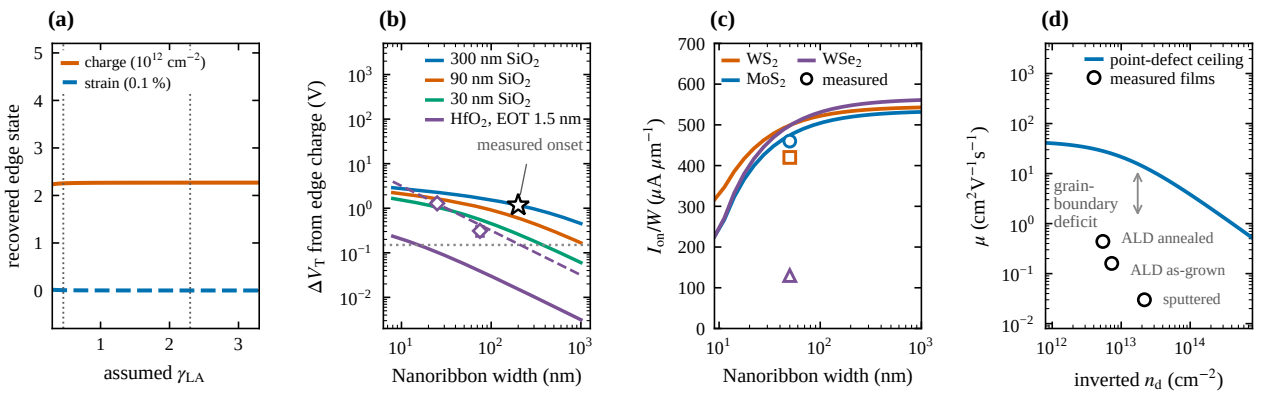
(a)
charge (10^{12} cm^{-2})
strain (0.1 %)
recovered edge state
assumed γ_{LA}
(b)
300 nm SiO$_2$
90 nm SiO$_2$
30 nm SiO$_2$
HfO$_2$, EOT 1.5 nm
measured onset
ΔV_T from edge charge (V)
Nanoribbon width (nm)
(c)
WS$_2$
WSe$_2$
MoS$_2$
measured
I_{on}/W (μA μm^{-1})
Nanoribbon width (nm)
(d)
point-defect ceiling
measured films
grain-boundary deficit
ALD annealed
ALD as-grown
sputtered
μ (cm^{2}V^{-1}s^{-1})
inverted n_d (cm^{-2})