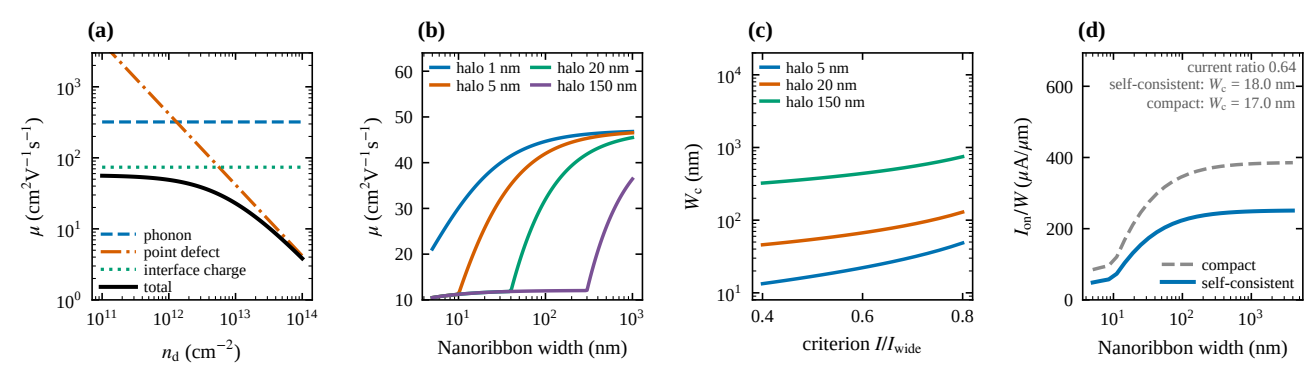
(a)
μ (cm²V⁻¹s⁻¹)
n_d (cm⁻²)
phonon
point defect
interface charge
total
(b)
μ (cm²V⁻¹s⁻¹)
halo 1 nm
halo 5 nm
halo 20 nm
halo 150 nm
Nanoribbon width (nm)
(c)
W_c (nm)
halo 5 nm
halo 20 nm
halo 150 nm
criterion I/I_wide
(d)
I_on/W (μA/μm)
current ratio 0.64
self-consistent: W_c = 18.0 nm
compact: W_c = 17.0 nm
compact
self-consistent
Nanoribbon width (nm)