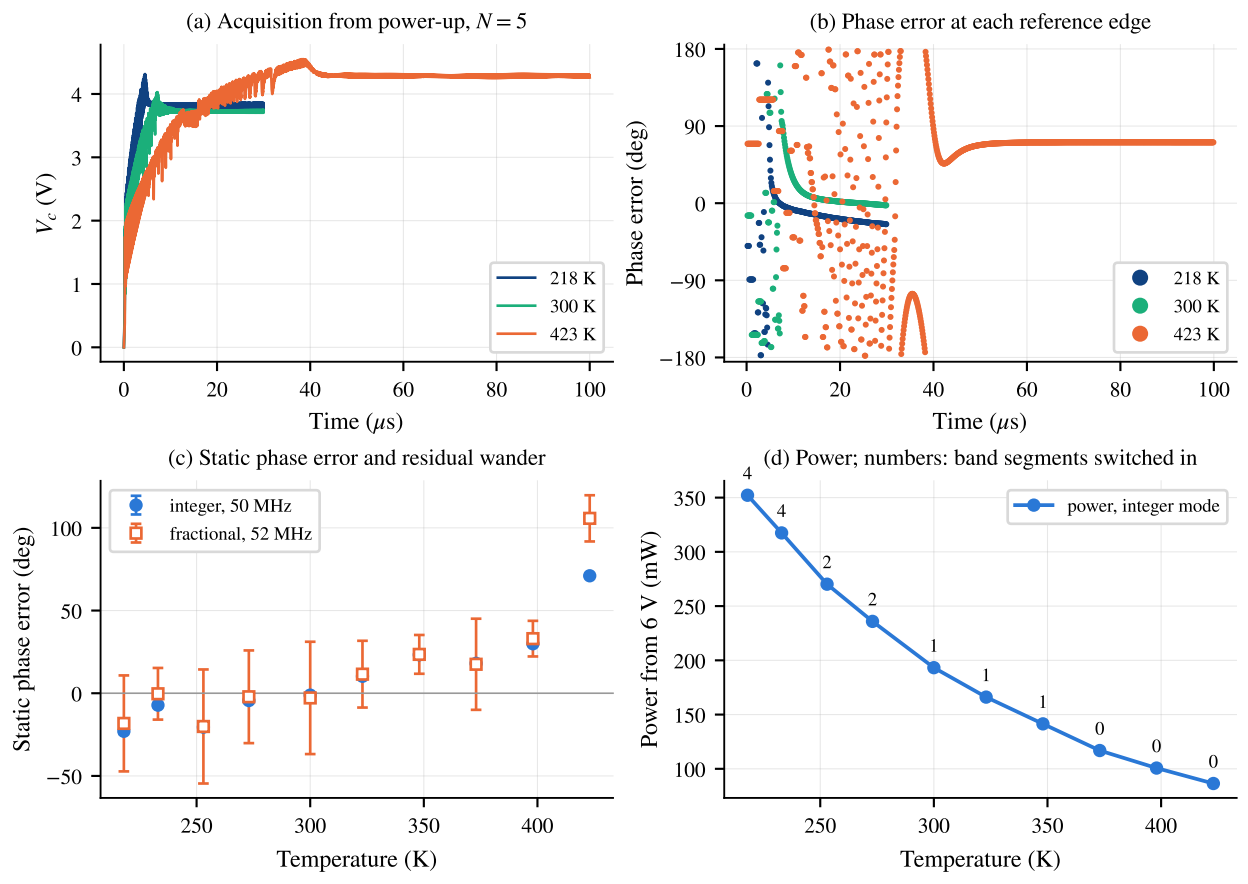

(a) Acquisition from power-up, $N = 5$
V_c (V)
Time (μs)
218 K
300 K
423 K
(b) Phase error at each reference edge
Phase error (deg)
Time (μs)
218 K
300 K
423 K
(c) Static phase error and residual wander
Static phase error (deg)
integer, 50 MHz
fractional, 52 MHz
Temperature (K)
(d) Power; numbers: band segments switched in
Power from 6 V (mW)
power, integer mode
Temperature (K)