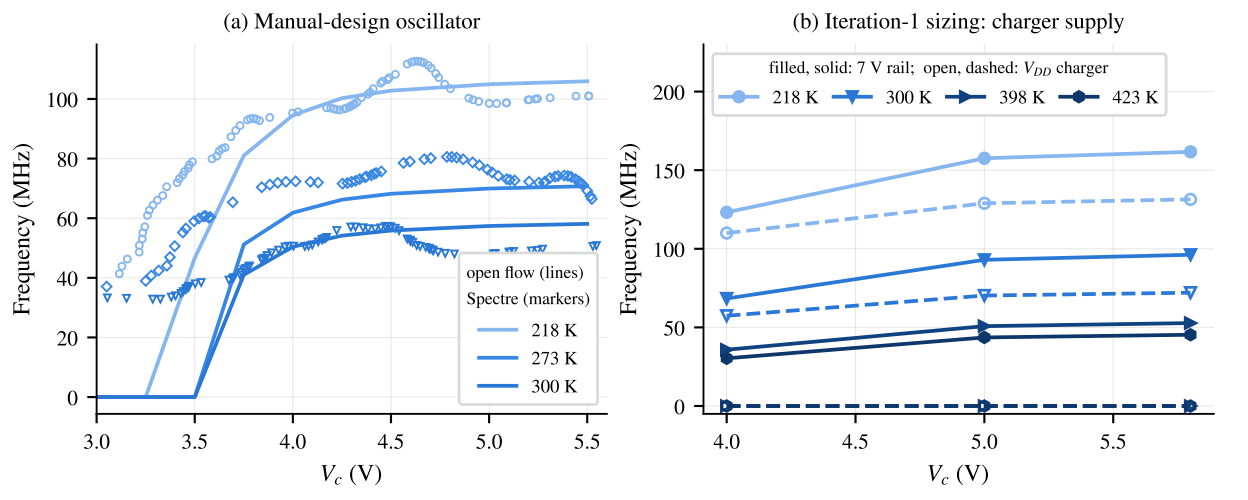
(a) Manual-design oscillator
Frequency (MHz)
V_c (V)
open flow (lines)
Spectre (markers)
218 K
273 K
300 K
(b) Iteration-1 sizing: charger supply
filled, solid: 7 V rail; open, dashed: V_{DD} charger
218 K
300 K
398 K
423 K
Frequency (MHz)
V_c (V)