



## Brief paper

Distributed event-driven control for finite-time consensus<sup>☆</sup>Bin Hu<sup>a</sup>, Zhi-Hong Guan<sup>b,\*</sup>, Minyue Fu<sup>c,d</sup><sup>a</sup> Britton Chance Center for Biomedical Photonics-Wuhan National Laboratory for Optoelectronics, and School of Engineering Sciences, Huazhong University of Science and Technology, Wuhan 430074, China<sup>b</sup> College of Automation, Huazhong University of Science and Technology, Wuhan 430074, China<sup>c</sup> School of Electrical Engineering and Computer Science, University of Newcastle, NSW 2308, Australia<sup>d</sup> School of Automation, Guangdong University of Technology, Guangzhou, Guangdong, 510006, China

## ARTICLE INFO

## Article history:

Received 21 January 2018

Received in revised form 21 August 2018

Accepted 28 December 2018

Available online xxxx

## Keywords:

Nonlinear system

Multi-agent network

Finite-time consensus

Event-driven control

Distributed control

## ABSTRACT

This paper is concerned with how multi-agent networks achieve finite-time consensus using distributed event-driven control. Due to the hybrid nonlinearities arising from the nonsmooth control and the triggering condition, finite-time consensus analyses are more challenging with event-driven control than with continuous-time control. We study agents with single integrator dynamics and scalar states and present a distributed event-driven control protocol for the finite-time consensus, with comparison to continuous-time control. It is shown that using the proposed event-driven control scheme, agents can reach consensus within a limited time and without Zeno behavior. We also obtain an estimate for the settling time and demonstrate that it is not only related to the initial condition and network connectivity, but is also linked with the event-triggering condition. Simulations are given to demonstrate the theoretical results.

© 2019 Elsevier Ltd. All rights reserved.

## 1. Introduction

Multi-agent networks (MANs) find applications in various engineering fields such as unmanned aerial vehicles (UAVs), cooperative robots, wireless sensor networks, and power systems. Distributed control for multi-agent cooperation has gained much attention in the past decade (Cai, Lewis, Hu, & Huang, 2017; Hou, Fu, Zhang, & Wu, 2017; Lu, Han, Zhang, Liu, & Liu, 2017; Olfati-Saber & Murray, 2004). Consensus control theory plays a fundamental role in studying multi-agent cooperation since other collective behaviors such as flocking, formation, and distributed optimization are mostly consensus-based, see, e.g., Chen, Wen, Liu, and Liu (2016), Guan, Hu, Chi, He, and Cheng (2014) and Li, Liao, and Huang (2013).

In real-world applications such as UAVs cruising, vehicles tracking, and robots environmental monitoring, it is important for agents to do all planned tasks within a limited time (Cao & Ren, 2014; Franceschelli, Pisano, Giua, & Usai, 2015; Lu et al., 2017).

From this practical consideration, the convergence performance should be taken into the design of control protocols. Previous studies suggest that with possible control protocols, MANs can achieve consensus asymptotically with an exponential convergence rate, and the rate of convergence is related to the network connectivity, i.e., the second-smallest eigenvalue of the Laplacian matrix. One further characterization of the convergence performance could be finite-time dynamics (Guan, Sun, Wang, & Li, 2012; Meng, Jia, & Du, 2016). Differing from asymptotic convergence, finite-time convergence requires a prescribed settling time that may depend on the initial conditions. Comparing with asymptotic consensus control, finite-time control ensures consensus in a limited time setup meanwhile with calculation/communication cost reduced, thus enabling better application in UAVs and cooperative robots.

The finite-time consensus analysis is based largely on the finite-time stability theory of continuous-time autonomous systems. Early in Tang (1998), a Lyapunov-based approach was presented to ensure the finite-time stability using terminal sliding mode control. Finite-time stability of continuous but non-Lipschitzian autonomous systems was investigated in Bhat and Bernstein (2000). There are many existing results on distributed finite-time control of MANs, including finite-time consensus and finite-time tracking. The finite-time consensus problems under bidirectional and unidirectional interaction cases were studied in Wang and Xiao (2010). A distributed binary consensus protocol and pinning control were used to ensure finite-time consensus in Chen, Lewis,

<sup>☆</sup> This work was supported in part by the National Natural Science Foundation of China under Grants 61672245, 61633011, 61672112, 61772086, 61672244, 61633014, and Grant U1701264. The material in this paper was not presented at any conference. This paper was recommended for publication in revised form by Associate Editor Dimos V. Dimarogonas under the direction of Editor Christos G. Cassandras.

\* Corresponding author.

E-mail addresses: [bhu@hust.edu.cn](mailto:bhu@hust.edu.cn) (B. Hu), [zhguan@mail.hust.edu.cn](mailto:zhguan@mail.hust.edu.cn) (Z.-H. Guan), [minyue.fu@newcastle.edu.au](mailto:minyue.fu@newcastle.edu.au) (M. Fu).

and Xie (2011). Finite-time consensus for leader-following second-order MANs was studied with a continuous-time nonsmooth control in Guan et al. (2012). Finite-time convergence of a nonlinear, continuous consensus algorithm for MANs with unknown inherent nonlinear dynamics was analyzed in Cao and Ren (2014). Finite-time consensus with disturbance rejection by discontinuous local interactions was considered in Franceschelli et al. (2015). Recently in Liu, Lam, Yu, and Chen (2016), finite-time consensus of MANs was studied with a switching protocol, while in Meng et al. (2016) finite-time consensus of agents over antagonistic signed networks was investigated.

In addition to convergence performance, the control cost is another key factor for designing control protocols. It is unnecessary to update controller in a time-clocked manner, continuously or periodically, especially for sensor agents with limited resources. The event-driven method has proved an alternative to the time-clocked ones (Dimarogonas, Frazzoli, & Johansson, 2012; Guo, Ding, & Han, 2014; Li, Yu, Yu, Huang, & Liu, 2016; Tabuada, 2007; Zhang, Feng, Yan, & Chen, 2014). In an event-driven setup, the control updating occurs only at event-based time instants, thus reducing the number of actuator updates (Fan, Feng, Wang, & Song, 2013; Hu, Liu, & Feng, 2016; Zhu, Jiang, & Feng, 2014). Early in Tabuada (2007), an event-triggered strategy was adopted for stabilizing nonlinear systems. Both centralized and distributed event-triggered controls were designed for consensus in Dimarogonas et al. (2012). A novel sampling-event-based control scheme was presented for designing consensus protocols in Meng and Chen (2013). A distributed event-triggering sampling scheme was designed to ensure leader-following consensus in Li, Liao, Huang, and Zhu (2015). The probabilistic consensus of MANs was studied with output feedback event-triggered control in Ding, Wang, Shen, and Wei (2015). A practical layered event control scheme was developed for multi-agent consensus in Xu, Chen, and Ho (2017).

A recent survey of event-triggered control for asymptotic consensus has been done in Ding, Han, Ge, and Zhang (2018). However, there has been very little work on designing event-driven control for finite-time stability or consensus. Most of the existing works on finite-time consensus use nonsmooth but continuous-time control methods (Cao & Ren, 2014; Franceschelli et al., 2015; Fu & Wang, 2016). An event-triggered control for finite-time consensus was reported in Lu et al. (2017), considering MANs with position and velocity dynamics and switching topologies. Beyond control updates, the triggering condition should have an influence on the convergence performance (time cost), as shown in Tabuada (2007). From this point of view, it is still in demand to bridge the settling time and the event-triggering condition in seeking multi-agent cooperation. The event-driven finite-time control algorithm cannot be dealt with either similarly to asymptotic consensus analyses in Dimarogonas et al. (2012), Hu et al. (2016), Xie, Xu, Chu, and Zou (2015) and Zhang et al. (2014), or using the existing finite-time convergence analyses in Bhat and Bernstein (2000), Lu et al. (2017), Meng et al. (2016) and Wang and Xiao (2010). Difficulties thus arise from synthesizing the hybrid nonlinearity caused by the nonsmooth control and the event-triggering condition in the Lyapunov analysis, as well as showing a link between the convergence time and the event condition.

The above observations motivate to develop an event-driven finite-time control protocol for MANs with single-integrator model and fixed topology in this paper. The objective here is to design a distributed event-driven control protocol for ensuring finite-time consensus, meanwhile showing a link between the settling time and the triggering condition. To this end, an event-driven finite-time control protocol is first presented and analyzed with comparison to continuous-time control. Then, new criteria including an effective triggering condition are established to guarantee consensus in a finite-time manner. We also obtain an estimate

for the settling time that is determined by the MAN model, the control gain and the event-triggering threshold. The developed results thus offer an insight into how networked agents cooperate with event-driven control and data in a finite-time manner.

The rest of the paper is organized as follows. Section 2 presents some preliminaries and formulates the research problem. Section 3 proposes an event-driven control protocol for the finite-time consensus and derives an estimate for the settling time involving the triggering condition. Section 4 gives simulation results while Section 5 concludes the paper.

**Notations:** Let  $\mathbb{R}$  be the set of real numbers,  $\mathbb{R}_+$  the set of nonnegative real numbers, and  $\mathbb{R}^n$  the set of  $n \times 1$  real vectors. Let  $y = \text{col}(y_1, y_2, \dots, y_n)$  be the  $n \times 1$  real vector, and  $y^\top$  its transposition. Denote  $\|y\| = \|y\|_2 = (\sum_{i=1}^n y_i^2)^{1/2}$  and  $\text{dist}(y, Q) = \inf_{q \in Q} \|y - q\|^2$  the distance of vector  $y$  on set  $Q \subset \mathbb{R}^n$ . Let  $[y_1]^{[\mu]} = \text{sign}(y_1)|y_1|^\mu$  and  $\text{sign}(\cdot)$  denote the sign function. For a continuous function  $f(t) : \mathbb{R}_+ \rightarrow \mathbb{R}^n$ , the upper Dini derivative is denoted by  $D^+f(t) = \limsup_{\tau \rightarrow 0^+} (f(t + \tau) - f(t))/\tau$ .

## 2. Preliminaries and problem formulation

In this section, preliminaries for finite-time convergence and the research problem of the paper are formulated.

### 2.1. Preliminaries

Consider the autonomous system

$$\dot{z}(t) = g(z(t)), \quad t \in \mathbb{R}_+, \quad z(0) = z_0, \quad (1)$$

where  $z = z(t) \in \mathbb{R}^n$  is the state at time  $t$ ,  $g : \mathbb{R}^n \rightarrow \mathbb{R}^n$  is continuous, and  $g(0) = 0$ .

**Definition 1.** The set  $\Theta \subset \mathbb{R}^n$  is said to be finite-time attractive for system (1) if there exists a settling time  $T_s > 0$ , such that for any initial state  $z_0$ ,

$$\begin{cases} \lim_{t \rightarrow T_s} \text{dist}(z(t), \Theta) = 0, \\ \text{dist}(z(t), \Theta) = 0, \quad t > T_s. \end{cases}$$

**Lemma 2.** Let  $V(z) : \mathbb{R}^n \rightarrow \mathbb{R}_+$  be a continuous and positive definite function, satisfying

- (i)  $V(z) = 0 \Leftrightarrow z \in \Theta$ ,
- (ii) the Dini derivative of  $V(z)$  along the solutions of system (1) is bounded as

$$D^+V(z(t))|_{(1)} \leq -aV(z(t))^\mu, \quad (2)$$

where  $0 < \mu < 1$  and  $a > 0$  are given constants.

Then, the set  $\Theta$  is finite-time attractive for system (1) with the settling time

$$T_s = \frac{1}{1 - \mu} \frac{V(z_0)^{1-\mu}}{a} \ll \infty. \quad (3)$$

**Proof.** The proof is similar to that were reported in Bhat and Bernstein (2000) and Tang (1998), thus is omitted.  $\square$

**Lemma 3.** For any  $\tilde{y}, \tilde{z} \in \mathbb{R}$  and  $0 < \mu \leq 1$ ,

$$(i) \quad |\tilde{y} + \tilde{z}|^\mu \leq |\tilde{y}|^\mu + |\tilde{z}|^\mu, \quad (4)$$

(ii) if  $|\tilde{z}| \leq |\tilde{y}|$ , then

$$-\tilde{y}[\tilde{y} + \tilde{z}]^{[\mu]} \leq -\tilde{y}[\tilde{y}]^{[\mu]} + |\tilde{y}| |\tilde{z}|^\mu. \quad (5)$$

**Proof.** See the Appendix.  $\square$

**Lemma 4.** (i) For any  $\xi_1, \xi_2, \dots, \xi_N \in \mathbb{R}_+$ ,  $0 < \mu < 1$ , and  $\nu > 1$ ,

$$\left(\sum_{r=1}^N \xi_r\right)^\mu \leq \sum_{r=1}^N \xi_r^\mu \leq N^{1-\mu} \left(\sum_{r=1}^N \xi_r\right)^\mu,$$

$$N^{1-\nu} \left(\sum_{r=1}^N \xi_r\right)^\nu \leq \sum_{r=1}^N \xi_r^\nu.$$

(ii) For continuous function  $\xi(t) = \text{col}(\xi_1(t), \xi_2(t), \dots, \xi_N(t))$ , with  $\xi_i(t) \neq 0$ ,  $i = 1, 2, \dots, N$ , and  $t \in [b_1, b_2]$ , there exists a constant  $\theta_i \geq 1$  such that

$$\theta_i |\xi_i(t)| \geq (1/\sqrt{N}) \|\xi(t)\|, \quad t \in [b_1, b_2],$$

where  $\theta_i = \frac{\max_{t \in [b_1, b_2]} |\xi_i(t)|}{m_i}$ ,  $M_i = \max_{t \in [b_1, b_2]} \{|\xi_i(t)|\}$ , and  $m_i = \min_{t \in [b_1, b_2]} \{|\xi_i(t)|\}$ ,  $0 \leq b_1 \leq b_2 < \infty$ .

**Proof.** See the Appendix.  $\square$

## 2.2. Problem formulation

Consider an MAN consisting of  $N$  agents, the communication topology is a weighted undirected graph  $\mathcal{G} = \{\mathcal{V}, \mathcal{E}, \mathcal{A}\}$ , with a node set  $\mathcal{V} = \{v_1, v_2, \dots, v_N\}$  and an edge set  $\mathcal{E} = \{(i, j) | i, j \in \mathcal{V}\}$ . Each agent has the dynamics

$$\dot{x}_i(t) = u_i(t), \quad t \in \mathbb{R}_+, \quad i = 1, 2, \dots, N, \quad (6)$$

where  $x_i(t) \in \mathbb{R}$  is the state variable, and  $u_i(t) \in \mathbb{R}$  is the control input. Denote  $x = \text{col}(x_1, x_2, \dots, x_N)$ .

Let  $\mathcal{A} = (a_{ij})_{N \times N}$  be the adjacency matrix, where  $a_{ij} > 0$  if  $(i, j) \in \mathcal{E}$ , otherwise  $a_{ij} = 0$ , and  $a_{ii} = 0$  for all  $i \in \mathcal{V}$ .  $N_i = \{j : j \in \mathcal{V}, a_{ij} > 0\}$  denotes the neighboring set of agent  $i$ . The Laplacian matrix  $L = (l_{ij})_{N \times N}$  of graph  $\mathcal{G}$  is defined as:  $l_{ij} = -a_{ij}$  ( $i \neq j$ ) and  $l_{ii} = \sum_{r=1, r \neq i}^N a_{ir}$ ,  $i, j = 1, 2, \dots, N$ .

According to Guan et al. (2014) and Olfati-Saber and Murray (2004), if the graph  $\mathcal{G}$  is undirected and connected, then the Laplacian matrix  $L$  is positive semi-definite, and its eigenvalues satisfy  $0 = \lambda_1(L) < \lambda_2(L) \leq \dots \leq \lambda_N(L)$ .

**Definition 5.** MAN (6) is said to reach finite-time consensus if for any initial condition  $x(0)$ , the set  $\mathcal{M} = \{x : Lx = 0\}$  is finite-time attractive for (6).

As mentioned above, an event-driven control protocol uses only certain sampling data for the updates of controller. While being used for seeking the finite-time consensus, the advantages of event-driven control can be a reduction in the updating number as well as a tradeoff between the settling time and the event-triggering condition. The main objective of the paper then is to design a distributed event-driven control with a specific event-based settling time  $T_s > 0$  such that the set  $\mathcal{M} = \{x : Lx = 0\}$  is finite-time attractive for (6), or equivalently  $\lim_{t \rightarrow T_s} \|x_i(t) - x_j(t)\| = 0$  and  $x_i(t) = x_j(t)$ , for all  $t > T_s$  and  $i, j = 1, 2, \dots, N$ .

## 3. Control design with event-driven data

In this section, a distributed event-driven control scheme is designed and analyzed with the goal of solving the finite-time consensus problem for MAN (6).

For agent  $i$ , denote by  $t_k^i$  the sampling instant for  $x_i(t)$ ,  $i = 1, 2, \dots, N$ ,  $k = 0, 1, 2, \dots$ . The state error for agent  $i$  is defined as

$$e_i(t) = x_i(t_k^i) - x_i(t), \quad t \in [t_k^i, t_{k+1}^i).$$

Similarly to related work (Dimarogonas et al., 2012; Xu et al., 2017), the event condition for agent  $i$  is then defined as

$$|e_i(t)| \leq \sigma_i |\hat{x}_i(t)|, \quad (7)$$

where  $\hat{x}_i = L_i x$  is the  $i$ th element of  $\hat{x} = Lx$ , and  $\sigma_i > 0$  denotes the event threshold.

More specifically, the sampling instant  $t_{k+1}^i$  is determined by

$$t_{k+1}^i = \inf \left\{ t > t_k^i \mid |e_i(t)| > \sigma_i |\hat{x}_i(t)| \right\}.$$

For the purpose of finite-time consensus, an event-driven control protocol is given as

$$u_i(t) = -\alpha \left[ \sum_{j=1}^N a_{ij} (x_i(t_k^i) - x_j(t_{k_j'}^j)) \right]^{[\mu]}, \quad (8)$$

where  $t \in [t_k^i, t_{k+1}^i)$ ,  $k_j'(t) = \arg \min_{b \in \mathbb{N}} \{t - t_b^j \mid t_b^j \leq t_k^i\}$ ,  $t_{k_j'}^j$  denotes the last event instant of agent  $j$  from time  $t$ ,  $0 < \mu < 1$ , and  $\alpha > 0$  is the control gain.

**Remark 6.** The control protocol (8) suggests that each agent updates its controller only at event instants  $t_k^i$ . Due to the ZOH (zero-order-hold) rule, for  $t \in [t_k^i, t_{k+1}^i)$ , the controller (8) takes a constant input that is a combination of its own data at the current event instant and the most recent neighboring data from the last event instant. Comparing with the continuous-time counterpart:

$$u_i(t) = -\alpha \left[ \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t)) \right]^{[\mu]}, \quad t \in \mathbb{R}_+, \quad (9)$$

the event-driven controller (8) allows a reduction in the number of control updates. Under the triggering condition (7), the protocol (8) can improve control implementation, while it may require a larger settling time to reach the consensus, as will be discussed later.

For comparison, the finite-time consensus of MAN (6) is first studied using the continuous-time control protocol (9).

Consider the following Lyapunov function candidate

$$W(x) = \frac{1}{2} x^\top L x$$

$$= \frac{1}{2} \left[ \frac{1}{2} \sum_{i=1}^N \sum_{j=1}^N a_{ij} (x_i - x_j)^2 \right]. \quad (10)$$

**Lemma 7.** Suppose that the graph  $\mathcal{G}$  is connected. Then under continuous-time control protocol (9), MAN (6) reaches finite-time consensus with the estimated settling time

$$T_s = \frac{1}{1 - \mu} \frac{W(x(0))^{\frac{1-\mu}{2}}}{\alpha^2 \frac{\mu-1}{2} \lambda_2^{\frac{\mu+1}{2}}}, \quad (11)$$

where  $\alpha > 0$ , and  $\lambda_2$  is the second-smallest eigenvalue of the Laplacian matrix  $L$ .

**Proof.** The proof is similar to that from Parsegov, Polyakov, and Shcherbakov (2013), thus is omitted.  $\square$

In the following, the finite-time consensus of MAN (6) with the event-driven control protocol (8) is analyzed.

According to the event-driven scheme, when an event occurs, i.e., the condition  $|e_i(t)| \leq \sigma_i |\hat{x}_i(t)|$  breaks,  $e_i(t) = 0$  is enforced. By the definitions of  $e_i(t)$  and  $k_j'(t)$ , one has  $x_i(t_k^i) = e_i(t) + x_i(t)$  and  $x_j(t_{k_j'}^j) = x_j(t) + e_j(t)$ ,  $j \in N_i$ ,  $t \in [t_k^i, t_{k+1}^i)$ . Then

$$u_i(t) = -\alpha \left[ \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t) + e_i(t) - e_j(t)) \right]^{[\mu]}. \quad (12)$$

Substituting (12) into (6) gives the closed loop

$$\dot{x}_i(t) = -\alpha \left[ \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t) + e_i(t) - e_j(t)) \right]^{[\mu]}. \quad (13)$$

The following theorem shows that MAN (6) can also reach finite-time consensus under the event-driven control protocol (8).

**Theorem 8.** Suppose that the graph  $\mathcal{G}$  is connected and the controller (8) is triggered by the event condition (7), with the thresholds  $\sigma_i$ ,  $i = 1, 2, \dots, N$  satisfying

$$0 < \sigma_{\max} = \max_i \{\sigma_i\} < \sqrt{\frac{\lambda_2}{\lambda_N^3 N^{\frac{1-\mu}{1+\mu}}}}. \quad (14)$$

Then under the event-driven control protocol (8)

(i) MAN (6) reaches finite-time consensus within the settling time estimate

$$\hat{T}_S = \frac{1}{1-\mu} \frac{W(x(0))^{\frac{1-\mu}{2}}}{\hat{\alpha} 2^{\frac{\mu-1}{2}} \lambda_2^{\frac{\mu+1}{2}}}, \quad (15)$$

(ii) MAN (6) does not exhibit Zeno behavior on time interval  $[0, \hat{T}_S]$ ,

where  $\hat{\alpha} = \alpha \frac{\mu}{1+\mu} \left[ 1 - N^{\frac{1-\mu}{2}} \left( \frac{\lambda_N^3 \sigma_{\max}^2}{\lambda_2} \right)^{\frac{\mu+1}{2}} \right] > 0$ ,  $0 < \mu < 1$ ,  $\alpha > 0$ ,  $\lambda_2$  and  $\lambda_N$  are respectively the second-smallest and largest eigenvalues of the Laplacian matrix  $L$ , and  $N$  is the number of agents.

**Proof.** (i) The first part verifies the finite-time convergence for consensus. The Dini derivative of  $W(x)$  along the state trajectories of MAN (13) satisfies

$$\begin{aligned} D^+ W(x(t)) \Big|_{(13)} &= -\alpha \sum_{i=1}^N \left\{ \left[ \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t)) \right] \cdot \left[ \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t) + e_i(t) - e_j(t)) \right]^{\frac{\mu+1}{2}} \right\} \\ &= -\alpha \sum_{i=1}^N \left\{ \hat{x}_i(t) \left[ \hat{x}_i(t) + \hat{e}_i(t) \right]^{\frac{\mu+1}{2}} \right\}, \end{aligned}$$

where  $\hat{x}_i = L_i x = \sum_{j=1}^N a_{ij} (x_i - x_j)$ ,  $\hat{e}_i = L_i e = \sum_{j=1}^N a_{ij} (e_i - e_j)$ , and  $L_i$  is the  $i$ th row of matrix  $L$ .

It is now to show that  $|\hat{e}_i| < |\hat{x}_i|$ ,  $i = 1, 2, \dots, N$ , under the event condition (7) with the threshold satisfying (14). Since  $\sum_{i=1}^N |\hat{e}_i|^2 = \sum_{i=1}^N e^T L_i^T L_i e = e^T L^T L e$ , it follows that

$$\begin{aligned} \sum_{i=1}^N |\hat{e}_i|^2 &\leq \lambda_N^2 \sum_{i=1}^N |e_i|^2 \leq \lambda_N^2 \sigma_{\max}^2 \sum_{i=1}^N |\hat{x}_i|^2 \\ &< \frac{\lambda_2}{\lambda_N N^{\frac{1-\mu}{1+\mu}}} \sum_{i=1}^N |\hat{x}_i|^2 < \sum_{i=1}^N |\hat{x}_i|^2. \end{aligned} \quad (16)$$

By the definitions:  $e_i = x_i(t_k^i) - x_i$ ,  $\hat{e}_i = L_i e$  and  $\hat{x}_i = L_i x$ , without loss of generality, let  $\hat{e}_i = q_i \hat{x}_i$ . The inequality (16) is then equivalent to  $\sum_{i=1}^N q_i^2 |\hat{x}_i|^2 < \sum_{i=1}^N |\hat{x}_i|^2$ . The matrix form is  $x^T L^T Q^2 L x < x^T L^T L x$ , where  $Q = \text{diag}(q_1, q_2, \dots, q_N)$  is the diagonal matrix. Note that the initial state of MAN (6) is arbitrary. That is, the inequality  $x^T L^T Q^2 L x < x^T L^T L x$  holds for all  $x \in \mathbb{R}^N$ . Thus, one has  $0 < |q_i| < 1$ , implying  $|\hat{e}_i| < |\hat{x}_i|$ .

Using Lemma 3(ii), one has

$$\begin{aligned} D^+ W(x(t)) \Big|_{(13)} &\leq -\alpha \sum_{i=1}^N \hat{x}_i(t) \left[ \hat{x}_i(t) \right]^{\frac{\mu+1}{2}} + \alpha \sum_{i=1}^N \left| \hat{x}_i(t) \right| \cdot \left| \hat{e}_i(t) \right|^{\mu} \\ &\leq -\alpha \sum_{i=1}^N \left| \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t)) \right|^{\frac{\mu+1}{2}} \end{aligned}$$

$$\begin{aligned} &+ \alpha \sum_{i=1}^N \left[ \frac{1}{1+\mu} \left| \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t)) \right|^{\mu+1} \right. \\ &\left. + \frac{\mu}{1+\mu} \left| \sum_{j=1}^N a_{ij} (e_i(t) - e_j(t)) \right|^{\mu+1} \right], \end{aligned} \quad (17)$$

where the last inequality is based on the Young's inequality.

Recalling the event condition (7), one obtains

$$\begin{aligned} &\sum_{i=1}^N \left[ \left| \sum_{j=1}^N a_{ij} (e_i(t) - e_j(t)) \right|^2 \right]^{\frac{\mu+1}{2}} \\ &\leq N^{\frac{1-\mu}{2}} \left\{ \sum_{i=1}^N \left[ \sum_{j=1}^N a_{ij} (e_i(t) - e_j(t)) \right]^2 \right\}^{\frac{\mu+1}{2}} \\ &\leq N^{\frac{1-\mu}{2}} (2\lambda_N^3 \sigma_{\max}^2)^{\frac{\mu+1}{2}} (W(x))^{\frac{\mu+1}{2}}. \end{aligned}$$

Substituting the above inequality into (17) gives

$$\begin{aligned} D^+ W(x(t)) \Big|_{(13)} &\leq -\alpha \left( 1 - \frac{1}{1+\mu} \right) \sum_{i=1}^N \left| \sum_{j=1}^N a_{ij} (x_i(t) - x_j(t)) \right|^{\mu+1} \\ &\quad + \alpha \frac{\mu}{1+\mu} \left\{ \sum_{i=1}^N \left[ \sum_{j=1}^N a_{ij} (e_i(t) - e_j(t)) \right]^2 \right\}^{\frac{\mu+1}{2}} \\ &\leq -\alpha \frac{\mu}{1+\mu} (2\lambda_2)^{\frac{\mu+1}{2}} W(x)^{\frac{\mu+1}{2}} \\ &\quad + \alpha \frac{\mu}{1+\mu} N^{\frac{1-\mu}{2}} (2\sigma_{\max}^2)^{\frac{\mu+1}{2}} W(x)^{\frac{\mu+1}{2}} \\ &= -\frac{\alpha \mu}{1+\mu} (2\lambda_2)^{\frac{\mu+1}{2}} \left[ 1 - N^{\frac{1-\mu}{2}} \left( \frac{\sigma_{\max}^2 \lambda_N^3}{\lambda_2} \right)^{\frac{\mu+1}{2}} \right] W(x)^{\frac{\mu+1}{2}} \\ &= -\hat{\alpha} (2\lambda_2)^{\frac{\mu+1}{2}} W(x)^{\frac{\mu+1}{2}}. \end{aligned} \quad (18)$$

Since  $0 < \frac{\mu+1}{2} < 1$  and  $\mathcal{M} = \{x : W(x) = 0\} = \{x : Lx = 0\}$ , it follows from Lemma 2 that the set  $\mathcal{M}$  is finite-time attractive for MAN (13) under the event condition (7). Therefore, MAN (6) reaches the finite-time consensus within the estimated settling time (15).

(ii) This part shows the exclusion of Zeno behavior. It will be verified that each inter-event time  $t_{k+1}^i - t_k^i$  that implicitly defined by (7) is positively lower bounded.

Consider that an event of agent  $i$  occurs at time  $t_k^i$ . According to the event-driven scheme, one has  $|e_i(t_k^i)| = 0$ , and only when the error  $|e_i(t)|$  is about to exceed the twisted threshold  $\sigma_i |\hat{x}_i(t)|$ , for  $\hat{x}_i(t) \neq 0$ , agent  $i$  will be reactivated. Thus, before the next event time, one has  $|e_i(t)| / |\hat{x}_i(t)| \leq \sigma_i$ .

Similarly to Dimarogonas et al. (2012) and Zhang et al. (2014), the comparison principle of differential equations is used to obtain a positive lower bound for  $t_{k+1}^i - t_k^i$ . Clearly,  $|e_i(t)| \leq \|e(t)\|$ ,  $i = 1, 2, \dots, N$ . By Lemma 4(ii), for  $\hat{x}_i(t) \neq 0$  and  $|\hat{x}_i(t)| < \infty$ , there exists a finite constant  $\vartheta_i \geq 1$  such that  $\vartheta_i |\hat{x}_i(t)| \geq (1/\sqrt{N}) \| \hat{x}(t) \|$ . One obtains  $\frac{|e_i(t)|}{|\hat{x}_i(t)|} \leq \vartheta_i \sqrt{N} \frac{\|e(t)\|}{\| \hat{x}(t) \|}$ . Then, the time interval for which  $|e_i(t)| / |\hat{x}_i(t)|$  ranges from 0 to  $\sigma_i$  is greater than that  $\vartheta_i \sqrt{N} \|e(t)\| / \| \hat{x}(t) \|$  needs.

The time derivative of  $\|e(t)\| / \| \hat{x}(t) \|$  satisfies

$$\begin{aligned} \frac{d}{dt} \frac{\|e\|}{\| \hat{x} \|} &\leq \frac{\| \dot{\hat{x}} \| \cdot \| \hat{x} \| + \| e \| \cdot \| \dot{\hat{x}} \|}{\| \hat{x} \|^2} \\ &\leq \frac{\| \dot{\hat{x}} \| \cdot \| \hat{x} \| + \| L \| \cdot \| e \| \cdot \| \dot{\hat{x}} \|}{\| \hat{x} \|^2}. \end{aligned} \quad (19)$$



Based on Lemma 3(i) and Lemma 4(i), one gets

$$\begin{aligned}
 \|\dot{x}\| &\leq \sum_{i=1}^N |\dot{x}_i| \\
 &= \alpha \sum_{i=1}^N \left| \dot{x}_i(t) + \sum_{j=1}^N a_{ij}(e_i(t) - e_j(t)) \right|^\mu \\
 &\leq \alpha N^{1-\frac{\mu}{2}} \left( \sum_{i=1}^N \hat{x}_i(t)^2 \right)^{\frac{\mu}{2}} \\
 &\quad + \alpha N^{1-\frac{\mu}{2}} \left[ \sum_{i=1}^N \left( \sum_{j=1}^N a_{ij}(e_i(t) - e_j(t)) \right)^2 \right]^{\frac{\mu}{2}} \\
 &= \alpha N^{1-\frac{\mu}{2}} \left( \|\hat{x}\|^\mu + \|Le\|^\mu \right). \tag{20}
 \end{aligned}$$

According to the event-driven scheme, one has  $\|e\| \leq \sigma_{\max} \|\hat{x}\|$  and  $e_i$  can be detected at any time  $t$ . Let  $E_{ik} = \max\{|e_i(t)| : t > t_k^i, e_i \neq 0\}$ . Substituting (20) into (19) then gives

$$\begin{aligned}
 &\frac{d}{dt} \frac{\|e\|}{\|\hat{x}\|} \\
 &\leq \alpha N^{1-\frac{\mu}{2}} \left( 1 + \|L\| \frac{\|e\|}{\|\hat{x}\|} \right) \left[ 1 + \|L\|^\mu \left( \frac{\|e\|}{\|\hat{x}\|} \right)^\mu \right] \frac{1}{\|\hat{x}\|^{1-\mu}} \\
 &\leq \alpha N^{1-\frac{\mu}{2}} \frac{\sigma_{\max}^{1-\mu}}{E_{ik}^{1-\mu}} \left( 1 + \|L\| \frac{\|e\|}{\|\hat{x}\|} \right) \left[ 1 + \|L\|^\mu \left( \frac{\|e\|}{\|\hat{x}\|} \right)^\mu \right]. \tag{21}
 \end{aligned}$$

By the comparison principle, the inequality (21) yields  $\|e(t)\|/\|\hat{x}(t)\| \leq \psi(t)$ , where  $\psi(t)$  is the solution of differential equation

$$\dot{\psi}(t) = b_{ik}(1 + \|L\|\psi(t)), \quad \psi(t_k^i) = 0, \quad t \in [t_k^i, t_{k+1}^i),$$

with  $b_{ik} = \alpha N^{1-\frac{\mu}{2}} (\sigma_{\max}^{1-\mu} + \|L\|^\mu \sigma_{\max}) / E_{ik}^{1-\mu} > 0$ .

Solving the above differential equation gives  $\psi(t) = \frac{\exp(\|L\|b_{ik}(t-t_k^i)) - 1}{\|L\|}$ . Denote  $y_i(t) = |e_i(t)|/|\hat{x}_i(t)|$ . Before the next event instant, one has  $y_i(t) \leq \vartheta_i \sqrt{N} \int_{t_k^i}^t \dot{\psi}(s) ds$ . Under the event condition (7), the next event instant is no less than  $t_k^i + \tau_{ik}$ , where  $\tau_{ik}$  satisfies  $\vartheta_i \sqrt{N} \int_{t_k^i}^{t_k^i + \tau_{ik}} \dot{\psi}(s) ds = \sigma_i$ . Thus

$$t_{k+1}^i - t_k^i \geq \tau_{ik} = \frac{1}{\lambda_N b_{ik}} \ln \left( 1 + \frac{\lambda_N \sigma_i}{\vartheta_i \sqrt{N}} \right) > 0. \tag{22}$$

This completes the proof.  $\square$

**Remark 9.** In (14), the triggering threshold  $\sigma_i$  is supposed to be no greater than  $\sqrt{\lambda_2 / (\lambda_N^3 N^{\frac{1-\mu}{1+\mu}})}$  which, with  $0 < \mu < 1$ , is inversely proportional to the network scale  $N$ . Meanwhile the lower bound of the inter-event time  $t_{k+1}^i - t_k^i$  is positively determined by the event threshold  $\sigma_i$ , as shown in (22). These observations are consistent with the phenomenon that as the network scale  $N$  goes bigger, MANs require more amount of control actuation/load. According to Zhang et al. (2014), the scalar  $\vartheta_i$  also influences the inter-event time. One has  $\vartheta_i = 1$  when  $|\hat{x}_i|$  is the largest element of  $\{|\hat{x}_1|, |\hat{x}_2|, \dots, |\hat{x}_N|\}$ . In particular, the  $\vartheta_i$  in (22) will approach 1 since the states of all agents will reach an agreement following the control protocol (8).

**Remark 10.** Specifically in Theorem 8, the condition (14) gives  $0 < 1 - N^{\frac{1-\mu}{2}} \left( \frac{\lambda_N^3 \sigma_{\max}^2}{\lambda_2} \right)^{\frac{\mu+1}{2}} < 1$ , implying that  $0 < \hat{\alpha} < \alpha$ . The event-driven control protocol (8) then has a larger settling time than the continuous-time controller (9), and this phenomenon can be verified by comparing the two time estimates respectively given by (11) and (15). As  $\sigma_i$  decreases near enough to 0, the event-driven

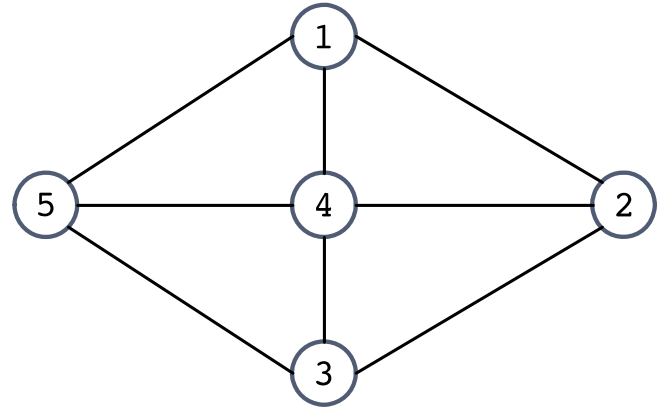


Fig. 1. Communication graph.

time estimate (15) also decreases near to that given by (11). Letting  $\sigma_i = 0$ , the first inequality in (17) becomes

$$\begin{aligned}
 D^+ W(x(t))|_{(13)} &\leq -\alpha \sum_{i=1}^N \hat{x}_i(t) [\hat{x}_i(t)]^{[\mu]} \\
 &= -\alpha \sum_{i=1}^N \left| \sum_{j=1}^N a_{ij}(x_i(t) - x_j(t)) \right|^{\mu+1}.
 \end{aligned}$$


Then the result of Theorem 8 conforms to that developed in Lemma 7. In contrast, the advantage of the event-driven control protocol (8) is a reduction in the number of control updates, i.e., a decrease in control effort, and a tradeoff between the settling time and the triggering condition.

**Remark 11.** Theorem 8 provides an appropriate unified framework for synthesizing hybrid control systems consisting of nonsmooth control and event-driven data. Differing from the existing work, e.g., Dimarogonas et al. (2012), Li et al. (2015), Liu et al. (2016) and Meng et al. (2016), the trick here is using the inequalities given in Lemma 3 to deal with the event-triggering condition in the Lyapunov analysis, though the agent model is limited to single integrator and scalar state. It can be verified that Lemma 3 holds for the multidimensional case, i.e.,  $[z]^{[\mu]} = \text{col}(\text{sign}(z_1)|z_1|^\mu, \dots, \text{sign}(z_n)|z_n|^\mu)$ ,  $z \in \mathbb{R}^n$ . In this case, combining the consensus control methods developed in Guan et al. (2014, 2012) and Lu et al. (2017), the proposed event-driven control scheme would work also well on complicated MANs, e.g., with double integrator dynamics, vector-valued states and switching topologies. In addition, using the sampled-data-event based method from Meng and Chen (2013), the proposed control approach can be further applied to address the finite-time consensus or optimization problems for discrete-time MANs.


## 4. Simulations

In this section, simulation results are provided and compared to illustrate the above theoretical results.


Consider the MAN (6) consisting of five agents, with the communication graph shown in Fig. 1. The adjacency matrix  $\mathcal{A}$  is an  $0-1$  matrix of dimensions  $5 \times 5$ . The second-smallest and largest eigenvalues of the corresponding Laplacian matrix  $L$  are respectively  $\lambda_2 = 3$  and  $\lambda_N = 5$ . The initial condition of agents is given by  $x(0) = \text{col}(-1.8074, 12.4584, -0.6378, -6.1134, 11.0932)$ .

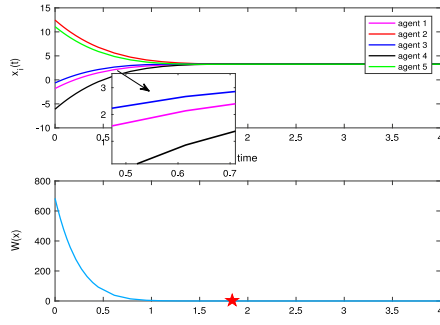

(a) State trajectories of agents and evolution of the Lyapunov function: The zoom in curves show the indentations in state response

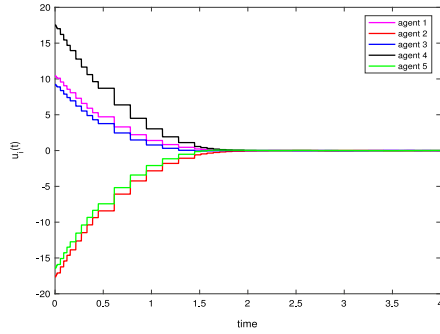

(b) Control inputs of agents

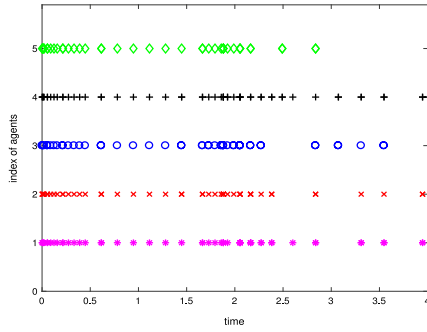

(c) Triggering instants versus time

**Fig. 2.** Under the event-driven control protocol (8):  $\sigma_i$  is given by (23a), and the red star represents the settling time.

Consider the event-driven control protocol (8) and the event condition (7). The following simulation results demonstrate the finite-time consensus result developed in Theorem 8. Choose  $\alpha = 1$  and  $\mu = 3/4$ . For comparison, two types of event thresholds  $\sigma_i$  are considered:


$$\sigma_1 = 0.1, \sigma_2 = 0.12, \sigma_3 = 0.106, \quad (23a)$$

$$\sigma_4 = 0.09, \sigma_5 = 0.098; \quad (23b)$$


$$\sigma_1 = \sigma_2 = \sigma_3 = \sigma_4 = \sigma_5 = 0.006. \quad (23b)$$

Then the triggering threshold satisfies constraint (14), i.e.,  $0 < \sigma_{\max} < \sqrt{\lambda_2 / (\lambda_N^3 N^{1-\mu})} = 0.1381$ .


In the case (23a), Fig. 2(a) shows the state trajectories of MAN (6) under the event-driven controller (8) and the Lyapunov function evolution, where the real simulation settling time, denoted by the red star, is 1.8377, denoting the first time visiting  $W(x) \leq 10^{-3}$ .

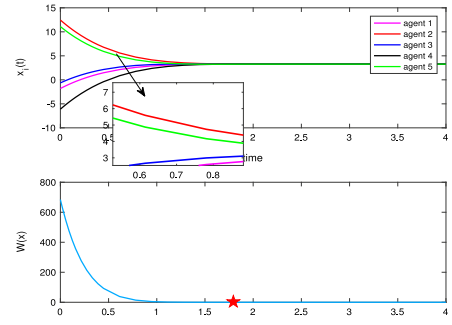

(a) State trajectories of agents and evolution of the Lyapunov function

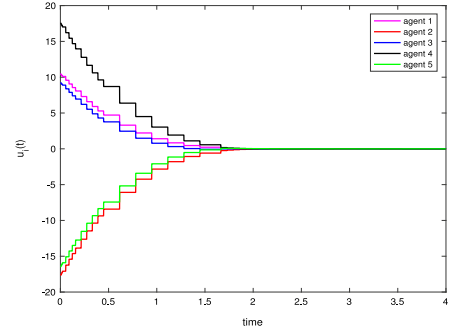

(b) Control inputs of agents

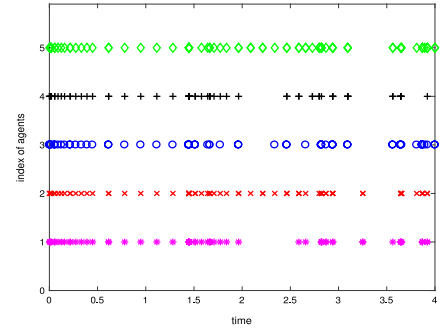

(c) Triggering instants versus time

**Fig. 3.** Under the event-driven control protocol (8):  $\sigma_i$  is given by (23b), and the red star represents the settling time.

According to Theorem 8, an estimate for the settling time is  $\hat{T}_S = 9.5324$ . The control inputs and triggering instants versus time are illustrated respectively by Figs. 2(b) and 2(c). Hence, comparing with the continuous-time controller, the event-driven controller (8) has the advantage in reducing the number of control updates. Moreover, Fig. 3 shows the state trajectories, the control inputs and agents' triggering instants for MAN (6) under the case (23b), where the real settling time is 1.7942 and the calculated estimate for the settling time is  $\hat{T}_S = 4.1309$ .

From Figs. 2 and 3 it suggests that a smaller event threshold  $\sigma_i$  brings a smaller settling time, implying a better convergence performance. This observation also is in accord with the results developed in Theorem 8. In this sense, a tradeoff can be found between the control updating cost and the time performance while the proposed event-driven control protocol is used for finite-time consensus. In terms of the settling time, the theoretical estimate may be bigger than the real simulation one (highlighted by the red stars in Figs. 2(a) and 3(a)). This time discrepancy results largely

from the conservativeness along the convergence analysis given in Theorem 8, which requires further investigation.

## 5. Conclusion

In this paper, the finite-time consensus problem of multi-agent networks has been studied. A distributed event-driven control protocol has been presented for finite-time consensus, and sufficient conditions involving a model-based triggering scheme have been established. Comparing with the continuous-time controller, the proposed event-driven control scheme has proven capable of reducing the number of control updates. More importantly, a link between the settling time and the event-triggering condition has been derived, showing that the event threshold brings a tradeoff between the control updating cost and the time performance. The theoretical results have been illustrated by a simulation example. Future work includes developing event-driven control for multi-agent networks with more complicated models.

## Appendix

### Proof of Lemma 3.

- (i) For simplicity, we only prove the inequality (5) in the following while the inequality (4) can be similarly verified.
- (ii) Consider  $|\tilde{z}| = |\tilde{y}|$ . It is obvious that the inequality (5) holds in the case of  $\tilde{z} = \tilde{y}$  since the left-side is no greater than zero while the right-side equals zero, and particularly the equality in (5) holds when  $\tilde{z} = \tilde{y} = 0$ . Moreover, the inequality (5) with  $\tilde{z} = -\tilde{y}$  is also true since both sides of (5) equal zero. Consider  $|\tilde{z}| < |\tilde{y}|$  ( $\tilde{y} \neq 0$ ). Assume that there exists a real number  $\theta$ :  $-1 < \theta < 1$ , such that  $\tilde{z} = \theta\tilde{y}$ . With  $1 + \theta > 0$ , the left-hand side of (5) can be written as

$$\begin{aligned} -\tilde{y}[\tilde{y} + \tilde{z}]^{\mu} &= -\tilde{y}[\tilde{y} + \theta\tilde{y}]^{\mu} \\ &= -(1 + \theta)^{\mu} \tilde{y}[\tilde{y}]^{\mu} - (1 + \theta)^{\mu} |\tilde{y}|^{1+\mu}. \end{aligned}$$

On the other hand, the right-hand side of (5) satisfies

$$\begin{aligned} -\tilde{y}[\tilde{y}]^{\mu} + |\tilde{y}| |\tilde{z}|^{\mu} &= -\tilde{y}[\tilde{y}]^{\mu} + |\theta|^{\mu} |\tilde{y}| |\tilde{y}|^{\mu} \\ &= (-1 + |\theta|^{\mu}) |\tilde{y}|^{1+\mu}. \end{aligned}$$

Note that  $0 < \mu \leq 1$ . For  $0 \leq \theta < 1$ , one has

$$(1 + \theta)^{\mu} + |\theta|^{\mu} - 1 \geq 1^{\mu} + \theta^{\mu} - 1 = \theta^{\mu} \geq 0.$$

For  $-1 < \theta < 0$ , one gets

$$(1 + \theta)^{\mu} + |\theta|^{\mu} - 1 \geq (1 + \theta) - \theta - 1 = 0.$$

Thus, for  $-1 < \theta < 1$ , it follows that

$$(-1 + |\theta|^{\mu}) |\tilde{y}|^{1+\mu} \geq -(1 + \theta)^{\mu} |\tilde{y}|^{1+\mu},$$

which yields the desired result.  $\square$

### Proof of Lemma 4.

- (i) Define vector  $\xi = \text{col}(\xi_1, \xi_2, \dots, \xi_N)$  and the norm  $\|\xi\|_s = (\sum_{i=1}^N \xi_i^s)^{1/s}$ . Using the norm equivalence property (Parsegov et al., 2013):

$$\|\xi\|_s \leq \|\xi\|_r \leq N^{\frac{1}{r}-\frac{1}{s}} \|\xi\|_s, \quad 0 < r < s,$$

the inequalities can be verified. Details are omitted.

- (ii) By the definition of 2-norm, it follows that

$$\begin{aligned} \|\xi(t)\|^2 &= \frac{N}{N} \sum_{i=1}^N |\xi_i(t)|^2 \leq N \max_i \{M_i^2\} \\ &\leq N \max_i \{M_i^2\} \frac{|\xi_i(t)|^2}{m_i^2} = N \theta_i^2 |\xi_i(t)|^2, \end{aligned}$$

which gives the desired results.  $\square$

## References

- Bhat, S. P., & Bernstein, D. S. (2000). Finite-time stability of continuous autonomous systems. *SIAM Journal on Control and Optimization*, 38(3), 751–766.
- Cai, H., Lewis, F. L., Hu, G., & Huang, J. (2017). The adaptive distributed observer approach to the cooperative output regulation of linear multi-agent systems. *Automatica*, 75, 299–305.
- Cao, Y., & Ren, W. (2014). Finite-time consensus for multi-agent networks with unknown inherent nonlinear dynamics. *Automatica*, 50(10), 2648–2656.
- Chen, G., Lewis, F. L., & Xie, L. (2011). Finite-time distributed consensus via binary control protocols. *Automatica*, 47(9), 1962–1968.
- Chen, C. L. P., Wen, G. X., Liu, Y. J., & Liu, Z. (2016). Observer-based adaptive backstepping consensus tracking control for high-order nonlinear semi-strict-feedback multiagent systems. *IEEE Transactions on Cybernetics*, 46(7), 1591–1601.
- Dimarogonas, D. V., Frazzoli, E., & Johansson, K. H. (2012). Distributed event-triggered control for multi-agent systems. *IEEE Transactions on Automatic Control*, 57(5), 1291–1297.
- Ding, L., Han, Q. L., Ge, X., & Zhang, X. M. (2018). An overview of recent advances in event-triggered consensus of multiagent systems. *IEEE Transactions on Cybernetics*, 48(4), 1110–1123.
- Ding, D., Wang, Z., Shen, B., & Wei, G. (2015). Event-triggered consensus control for discrete-time stochastic multi-agent systems: The input-to-state stability in probability. *Automatica*, 62, 284–291.
- Fan, Y., Feng, G., Wang, Y., & Song, C. (2013). Distributed event-triggered control of multi-agent systems with combinational measurements. *Automatica*, 49(2), 671–675.
- Franceschelli, M., Pisano, A., Giua, A., & Usai, E. (2015). Finite-time consensus with disturbance rejection by discontinuous local interactions in directed graphs. *IEEE Transactions on Automatic Control*, 60(4), 1133–1138.
- Fu, J., & Wang, J. (2016). Fixed-time coordinated tracking for second-order multi-agent systems with bounded input uncertainties. *Systems & Control Letters*, 93, 1–12.
- Guan, Z. H., Hu, B., Chi, M., He, D. X., & Cheng, X. M. (2014). Guaranteed performance consensus in second-order multi-agent systems with hybrid impulsive control. *Automatica*, 50(9), 2415–2418.
- Guan, Z. H., Sun, F. L., Wang, Y. W., & Li, T. (2012). Finite-time consensus for leader-following second-order multi-agent networks. *IEEE Transactions on Circuits and Systems I*, 59(11), 2646–2654.
- Guo, G., Ding, L., & Han, Q. L. (2014). A distributed event-triggered transmission strategy for sampled-data consensus of multi-agent systems. *Automatica*, 50(5), 1489–1496.
- Hou, W., Fu, M., Zhang, H., & Wu, Z. (2017). Consensus conditions for general second-order multi-agent systems with communication delay. *Automatica*, 75, 293–298.
- Hu, W., Liu, L., & Feng, G. (2016). Consensus of linear multi-agent systems by distributed event-triggered strategy. *IEEE Transactions on Cybernetics*, 46(1), 148–157.
- Li, H., Liao, X., & Huang, T. (2013). Second-order locally dynamical consensus of multiagent systems with arbitrary fast switching directed topologies. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 43(6), 1343–1353.
- Li, H., Liao, X., Huang, T., & Zhu, W. (2015). Event-triggering sampling based leader-following consensus in second-order multi-agent systems. *IEEE Transactions on Automatic Control*, 60(7), 1998–2003.
- Li, C., Yu, X., Yu, W., Huang, T., & Liu, Z. W. (2016). Distributed event-triggered scheme for economic dispatch in smart grids. *IEEE Transactions on Industrial Informatics*, 12(5), 1775–1785.
- Liu, X., Lam, J., Yu, W., & Chen, G. (2016). Finite-time consensus of multiagent systems with a switching protocol. *IEEE Transactions on Neural Networks and Learning Systems*, 27(4), 853–862.
- Lu, Q., Han, Q. L., Zhang, B., Liu, D., & Liu, S. (2017). Cooperative control of mobile sensor networks for environmental monitoring: An event-triggered finite-time control scheme. *IEEE Transactions on Cybernetics*, 47(12), 4134–4147.

- Meng, X., & Chen, T. (2013). Event based agreement protocols for multi-agent networks. *Automatica*, 49, 2125–2132.
- Meng, D., Jia, Y., & Du, J. (2016). Finite-time consensus for multiagent systems with cooperative and antagonistic interactions. *IEEE Transactions on Neural Networks and Learning Systems*, 27(4), 762–770.
- Olfati-Saber, R., & Murray, R. M. (2004). Consensus problems in networks of agents with switching topology and time-delays. *IEEE Transactions on Automatic Control*, 49(9), 1520–1533.
- Parsegov, S. E., Polyakov, A. E., & Shcherbakov, P. S. (2013). Fixed-time consensus algorithm for multi-agent systems with integrator dynamics. In *4th IFAC on distributed estimation and control in networked systems* (pp. 110–115).
- Tabuada, P. (2007). Event-triggered real-time scheduling of stabilizing control tasks. *IEEE Transactions on Automatic Control*, 52(9), 1680–1685.
- Tang, Y. (1998). Terminal sliding mode control for rigid robots. *Automatica*, 34(1), 51–56.
- Wang, L., & Xiao, F. (2010). Finite-time consensus problem for network of dynamic agents. *IEEE Transactions on Automatic Control*, 55(4), 950–955.
- Xie, D., Xu, S., Chu, Y., & Zou, Y. (2015). Event-triggered average consensus for multi-agent systems with nonlinear dynamics and switching topology. *Journal of The Franklin Institute*, 352(3), 1080–1098.
- Xu, W., Chen, G., & Ho, D. W. C. (2017). A layered event-triggered consensus scheme. *IEEE Transactions on Cybernetics*, 47(8), 2334–2340.
- Zhang, H., Feng, G., Yan, H., & Chen, Q. (2014). Observer-based output feedback event-triggered control for consensus of multi-agent systems. *IEEE Transactions on Industrial Electronics*, 61(9), 4885–4894.
- Zhu, W., Jiang, Z. P., & Feng, G. (2014). Event-based consensus of multi-agent systems with general linear models. *Automatica*, 50(2), 552–558.



**Bin Hu** received the Ph.D. degree in control science and engineering from Huazhong University of Science and Technology (HUST), Wuhan, China, in 2015.

She is currently an Associate Professor with the Wuhan National Laboratory for Optoelectronics, HUST. Her current research interests include distributed control and optimization of multi-agent network, hybrid control system, neural network, and artificial intelligence.



**Zhi-Hong Guan** received the Ph.D. degree in automatic control theory and applications from the South China University of Technology, Guangzhou, China, in 1994.

In 1994, he was a Full Professor with Jiangnan Petroleum Institute, Jingzhou, China. Since 1997, he has been a Full Professor with Huazhong University of Science and Technology, Wuhan, China, where since 2011 he has been a Huazhong Leading Professor. He was awarded the Natural Science Award (First Class) from the Ministry of Education of China in 2005 and the Natural Science Award (First Class) from the Hubei Province of China in 2014. His research interests include complex systems and complex networks, impulsive and hybrid control systems, networked control systems, multi-agent systems, networked robotic systems, neural networks and artificial intelligence.



**Minyue Fu** received his Bachelor's Degree in Electrical Engineering from the University of Science and Technology of China, Hefei, China, in 1982, and M.S. and Ph.D. degrees in Electrical Engineering from the University of Wisconsin-Madison in 1983 and 1987, respectively. From 1983 to 1987, he held a teaching assistantship and a research assistantship at the University of Wisconsin-Madison. He worked as a Computer Engineering Consultant at Nicolet Instruments, Inc., Madison, Wisconsin, during 1987. From 1987 to 1989, he served as an Assistant Professor in the Department of Electrical and Computer Engineering, Wayne State University, Detroit, Michigan. He joined the Department of Electrical and Computer Engineering, the University of Newcastle, Australia, in 1989. Currently, he is a Chair Professor in Electrical Engineering and Head of School of Electrical Engineering and Computer Science. In addition, he was a Visiting Associate Professor at University of Iowa in 1995–1996, and a Senior Fellow/Visiting Professor at Nanyang Technological University, Singapore, 2002. He has held a Distinguished Scholar position at Zhejiang University and Guangdong University of Technology, China. He is a Fellow of IEEE. His main research interests include control systems, signal processing and communications. He has been an Associate Editor for the IEEE Transactions on Automatic Control, *Automatica* and *Journal of Optimization and Engineering*.