

Packet Tracer - Use the ipconfig Command

Objectives

- Use the **ipconfig** command to identify incorrect configuration on a PC.

Background / Scenario

A small business owner cannot connect to the internet with one of the four PCs in the office. All the PCs are configured with static IP addressing using 192.168.1.0 /24 network. The PCs should be able to access **www.cisco.pka** webserver. Use the **ipconfig /all** command to identify which PC is incorrectly configured.


Instructions

Part 1: Verify Configurations

- Access the **Command Prompt** on each PC and type the command **ipconfig /all** at the prompt.
- Examine the IP address, subnet mask, and default gateway configuration for each PC. Be sure to record this IP configuration for each PC to help identify any PCs that are incorrectly configured.

Part 2: Correct Any Misconfigurations

- Select the PC that is incorrectly configured.
- Click the **Desktop** tab > **IP Configuration** tab to correct the misconfiguration.

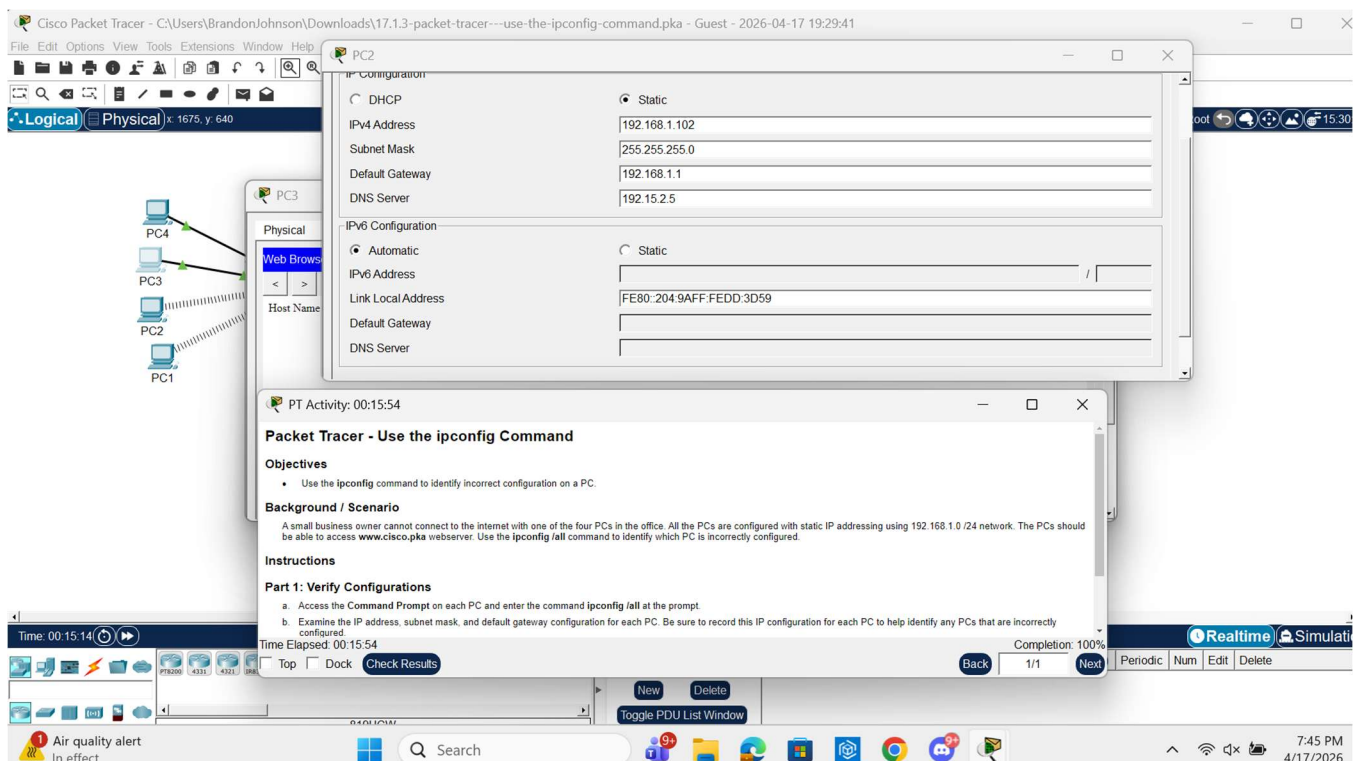

The screenshot displays the Cisco Packet Tracer interface. On the left, a network diagram shows four PCs (PC1, PC2, PC3, PC4) connected to a central switch. The main window shows the configuration for PC3. The IP Configuration tab is active, showing the following settings:

Configuration Type	Static
IP Address	192.168.1.102
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
DNS Server	192.15.2.5

Below the IP Configuration tab, the IPv6 Configuration tab is also visible, showing the following settings:

Configuration Type	Automatic	Static
IPv6 Address		
Link Local Address	FE80:2049AFF:FEDD:3D59	
Default Gateway		
DNS Server		

In the foreground, a task window titled "Packet Tracer - Use the ipconfig Command" is open. It contains the following text:

Objectives

- Use the ipconfig command to identify incorrect configuration on a PC.

Background / Scenario

A small business owner cannot connect to the internet with one of the four PCs in the office. All the PCs are configured with static IP addressing using 192.168.1.0 /24 network. The PCs should be able to access **www.cisco.pka** webserver. Use the **ipconfig /all** command to identify which PC is incorrectly configured.

Instructions

Part 1: Verify Configurations

- Access the Command Prompt on each PC and enter the command **ipconfig /all** at the prompt.
- Examine the IP address, subnet mask, and default gateway configuration for each PC. Be sure to record this IP configuration for each PC to help identify any PCs that are incorrectly configured.

The task window also shows a progress bar at the bottom with "Completion: 100%" and a "Check Results" button.