

SS ELEVATOR

Component Intl.,Trading

Professional & Excellent in
Elevator Spare Parts



Content

1 Safety Components

Over Speed Governor Dia. 300 - SS-OSGØ300 Page No. 01
Over Speed Governor Dia. 200 - SS-OSGØ200 Page No. 02
Over Speed Governor Dia. 200 A3 Compliant - SS-OGSMRL Page No. 03
Rope Tension Pulley - SS-RTP Page No. 04
Double Roller Instantaneous Safety Gear - SS-SG Page No. 05

2 Car Frame Components

Rope Anchorage Swivel Type - SS-RAS-S Page No. 06
Rope Anchorage Swivel Type - SS-RAS-R Page No. 06
Rope Anchorage - SS-RA-S Page No. 07
Rope Anchorage - SS-RA-R Page No. 07
Bulldog Clip SS-BC Page No. 08
Rope Eye SS-RE Page No. 08
Guide Shoe - SS-GS page number 09-13
Oiler & Oil Collectors - SS-O Page No. 14-15
Diverter Pulley For Car Frame - SS-IPCF Page No. 16
Diverter Pulley For Machine - SS-IPM Page No. 17
Nylon Pulley SS-NP Page No. 18
Pulley Accessories - SS-Pedestal Page No. 19
Pulley Accessories - SS-Shaft Page No. 19

3 Cable Hanger

Cable Hanger - SS-CH Page No. 20-22

4 Buffers

Spring Buffer SS-SB & Oil Buffer Page No. 23
Oil Buffer SS-OB Page No. 23
PU Buffer SS-PUB & Double Action Page No. 24
Double Action Rubber Buffer SS-DARB Page No. 24

5 Rubber

Isolators Rubber -SS-IR Page No. 25
Steadier Rubber (Buffer) SS-SR Page No. 25-26
Machine Base Rubber SS-MBR Page No. 26-27

6 Brackets & Accessories

Elevator Brackets - SS-EB Page No. 28-30
Combination Bracket Type A Page No. 31
Combination Bracket Type B Page No. 31
Limit Switch Cam Bracket Page No. 32
Adjustable Combination Brackets Page No. 32
Forged Rail Clip SS-FRC Page No. 33
Sheet Metal Rail Clip SS-SMRC Page No. 33



About Us:


SS Elevator Components International Trader is a leading, reliable, and dynamic trading firm established in 2022 in UP. We specialize in the sourcing, marketing, and distribution of high-quality. Each Spare Parts for the elevator across the middle east countries (Saudi Arabia, Kuwait, UAE, Qatar and Oman). we bridge the gap between global manufacturers and local markets through efficient logistics and strategic partnerships. Quality Assurance: Rigorous supplier selection ensuring international standards.Logistics Reliability: Expertise in navigating international shipping, customs, and logistics for timely delivery.Competitive Pricing: Leveraging a strong, direct network with suppliers to bring optimal value to customers.

Mission & Vision Our Mission:

To provide seamless, efficient, and ethical trading services that empower our clients to succeed in their respective markets.Our Vision: To be the most preferred global sourcing partner known for reliability, speed, and uncompromising quality.

OVER SPEED GOVERNOR DIA300 WITH SWITCH

CODE: SS-OSGØ300

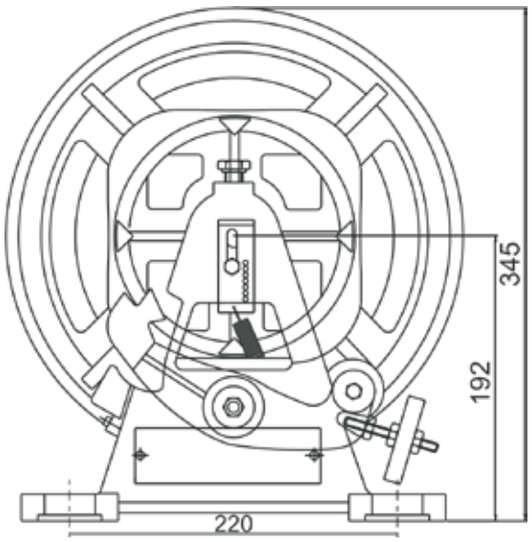




- Sheave Dia. - 300mm
- Rope Dia. - 6-8mm
- Action - Bi=directional

Code	Nominal Speed Max. m/s.	Electrical Tripping m/s.	Machanical Tripping m/s.	As per EN/Normal
SS-OSGØ30001	0.5	0.58/0.63	0.63/0.70	EN Normal
SS-OSGØ30002	0.63	0.72/0.78	0.79/0.88	EN/Normal
SS-OSGØ30003	0.75	0.86	0.94	Normal
SS-OSGØ30004	0.8	0.92/1.00	1.00/1.12	EN/Normal
SS-OSGØ30005	0.9	1.03	1.13	EN
SS-OSGØ30006	1	1.15/1.25	1.25/1.40	EN/Normal
SS-OSGØ30007	1.2	1.38/1.50	1.50/1.68	EN/Normal
SS-OSGØ30008	1.5	1.73/1.88	1.88/2.10	EN/Normal
SS-OSGØ30009	1.6	1.84/2.00	2.00/2.24	EN/Normal
SS-OSGØ300-10	1.8	2.07	2.25	Normal
SS-OSGØ300-11	2	2.30/2.50	2.5/2.80	EN/Normal

OVER SPEED GOVERNOR DIA200 WITH SWITCH

CODE: SS-OSGØ200

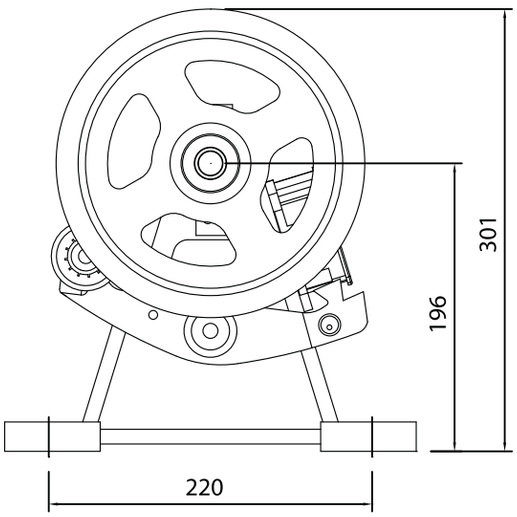





- Sheave Dia. - 200mm
- Rope Dia. - 6-8mm
- Action - Bi=directional
- Available with Solenoid coil for MRL application

Code	Nominal Speed Max. m/s.	Electrical Tripping m/s.	Machanical Tripping m/s.	As per EN/Normal
SS-OSGØ20001	0.30/0.30	0.35/0.38	0.38/0.42	En/Normal
SS-OSGØ20002	0.40	0.46	0.5/0.42	En
SS-OSGØ20003	0.43	0.54	0.60	Normal
SS-OSGØ20004	0.5	0.63	0.7	Normal
SS-OSGØ20005	0.63	0.72/0.79	0.79/0.88	En/Normal
SS-OSGØ20006	0.8	0.92/1.00	1.00/12	En/Normal
SS-OSGØ20007	1	1.15/1.25	1.25/1.40	En/Normal

OVER SPEED GOVERNOR DIA200 A3 COMPLIANT

CODE SS-OSGMRL

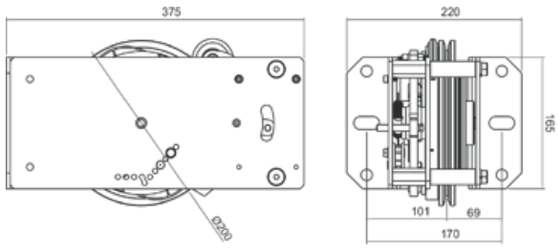

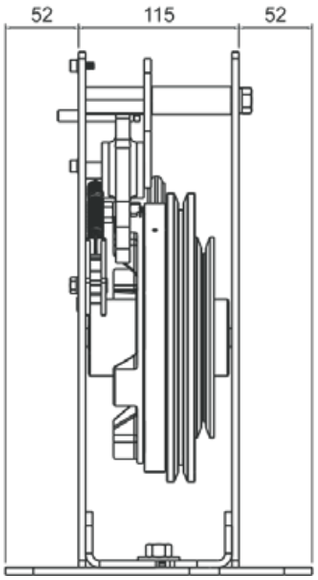




- Sheave Dia. - 200mm
- Rope Dia. - 6-8mm
- Action - Bi=directional
- A3 Norm Compliant to avoid unintended car movement


Code	Nominal Speed Max. m/s.	Electrical Tripping m/s.	Machanical Tripping m/s.	As per En/Normal
EOSGMRL01	1.00	1.15/1.25	1.25/1.40	En/Normal
EOSGMRL02	1.20	1.38/1.50	1.50/1.68	En/Normal
EOSGMRL03	1.50	1.73/1.88	1.88/2.10	En/Normal

ROPE TENSION PULLEY

CODE: SS-RTP

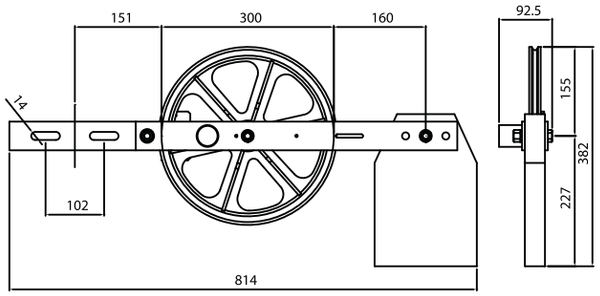

Rope Tensioner without guard

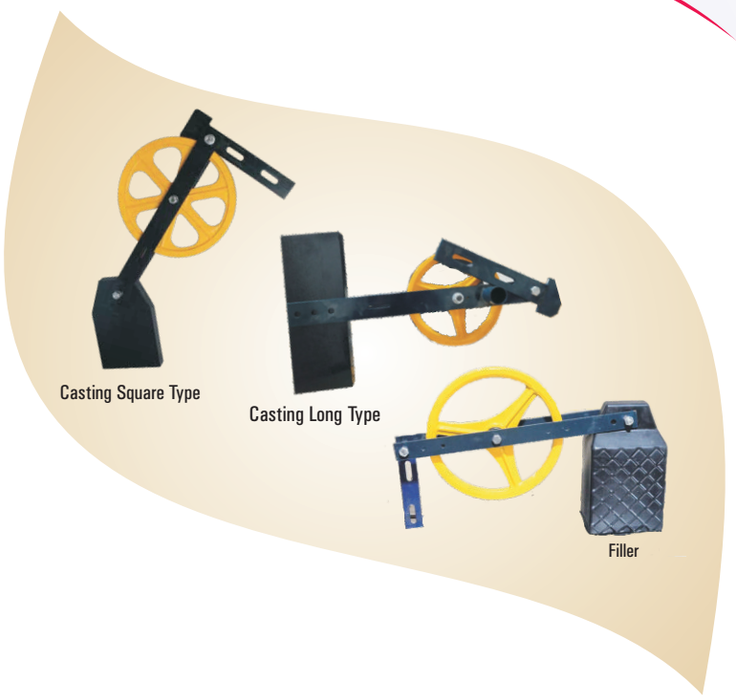


- Pulley Dia. - 300mm/200mm
- Rope Dia. - 6-8mm
- With Rope Guard
- Available with switch to control rope stretch

Code	Type of Wt.	Dead Wt. (Kgs)
SS-RTP01	Casting Long Type	16KG
SS-RTP02	Casting Square Type	16KG
SS-RTP03	Casting Long Type	20KG
SS-RTP04	Casting Square Type	20KG
SS-RTP05	Filter	11KG
SS-RTP06	Filter	15KG

DOUBLE ROLLER INSTANTANEOUS SAFTY GEAR

Code: SS-SG

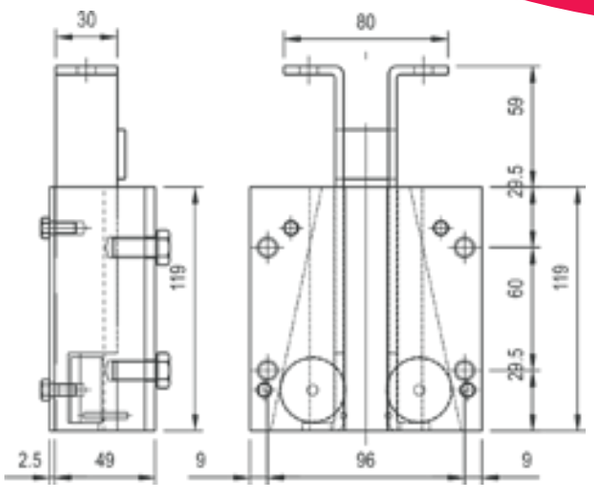




Action - Instantaneous
For Capacity - Upto 1 Tonne
For Speed - Upto 1.0 m/s
For Rail Size - 9, 10, 16mm

Code	Type	Rails	Max Normal Speed	Triping Speed	Holes	Mass Kg	Material	Maximaum Load on two device at difference release speed	0.60 m/s	3128kgs
SS-SG01	sp50	6 to 16 mm	0.60 m/s	1	Rear M10	4.0	C40		0.80 m/s	2853 kgs



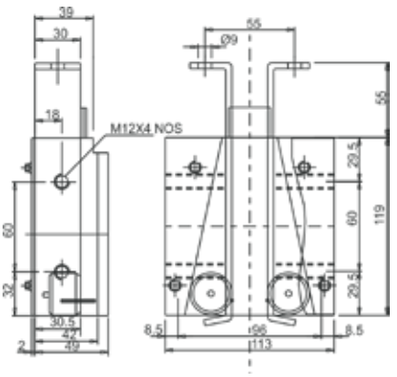



Action - Instantaneous
For Capacity - Upto 1 Tonne
For Speed - Upto 1.0 m/s
For Rail Size - 9, 10, 16mm

Code	Type	Rails	Max Normal Speed	Triping Speed	Holes	Mass Kg	Material	Maximaum Load on two device at difference release speed	0.60 m/s	3128kgs
SS-SG02	sp50	6 to 16 mm	0.60 m/s	1	Side M12	4.0	C40		0.80 m/s	2853 kgs

ROPE ANCHORAGE SWIVEL TYPE


Code: SS-RAS-S

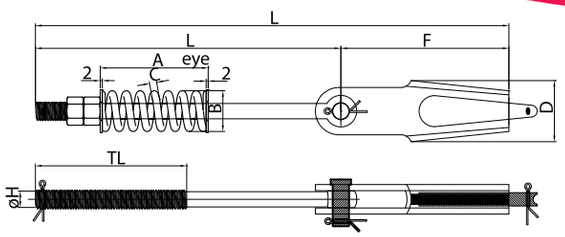


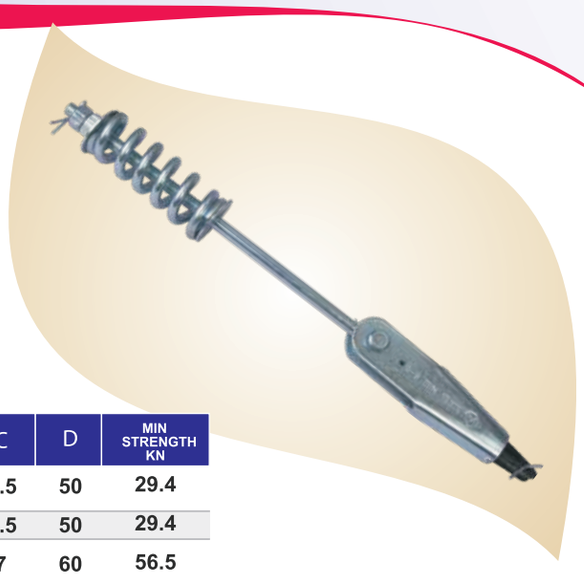

CODE	ROPE D	ø D	L eye	L mm	F	TL mm	A	B	C	D	MIN STRENGTH KN
SS-RAS-S01	6 - 8	M12	300	430	130	150	110	32	6.5	50	29.4
	6 - 8	M12	500	630	130	150	110	32	6.5	50	29.4
SS-RAS-S02	9 - 11	M16	300	465	165	150	102	40	7	60	56.5
	9 - 11	M16	500	665	165	150	102	40	7	60	56.5
SS-RAS-S03	12 - 14	M20	300	500	200	150	156	50	9	75	78.9
	12 - 14	M20	500	700	200	150	156	50	9	75	78.9
SS-RAS-S04	15 -17	M22	300	524	224	150	106	54	12	90	112
SS-RAS-S05	5 - 6.5	M10	180	265	85	75	68	24	4	36	22.7

Code: SS-RAS-R

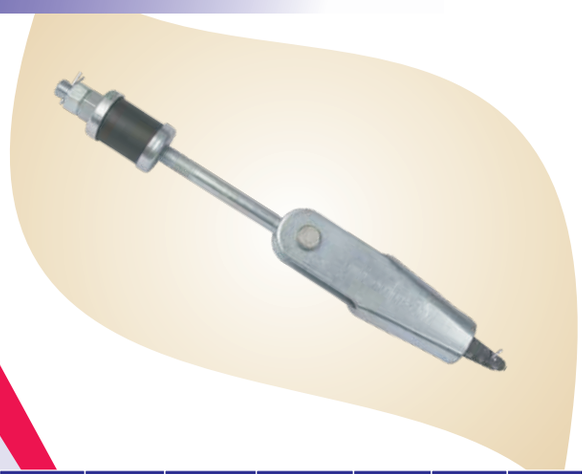


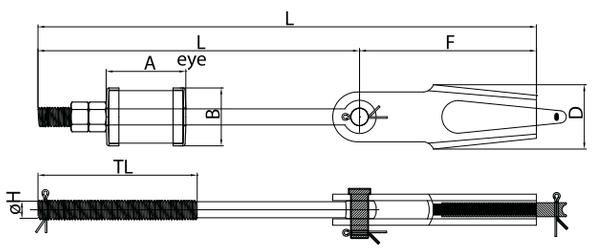


CODE	ROPE D	ø D	L eye	L mm	F	TL mm	A	B	D	MIN STRENGTH KN
SS-RAS-R01	6 - 8	M12	300	430	130	150	73.5	54	50	29.4
	6 - 8	M12	500	630	130	150	73.5	54	50	29.4
SS-RAS-R02	9 - 11	M16	300	465	165	150	73.5	54	60	56.5
	9 - 11	M16	500	665	165	150	73.5	54	60	56.5
SS-RAS-R03	12 - 14	M20	300	500	200	150	73.5	54	75	78.9
SS-RAS-R04	12 - 14	M20	500	700	200	150	73.5	54	75	78.9
SS-RAS-R05	5-6.5	M10	180	266	85	75	64	41	36	22.7

ROPE ANCHORAGE


Code: SS-RA-S

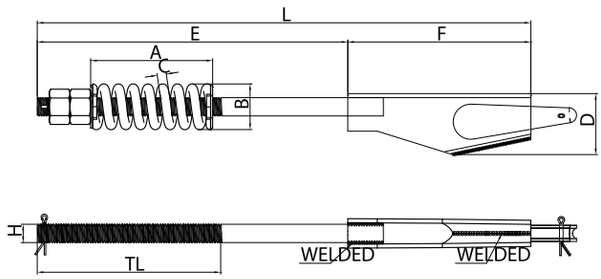


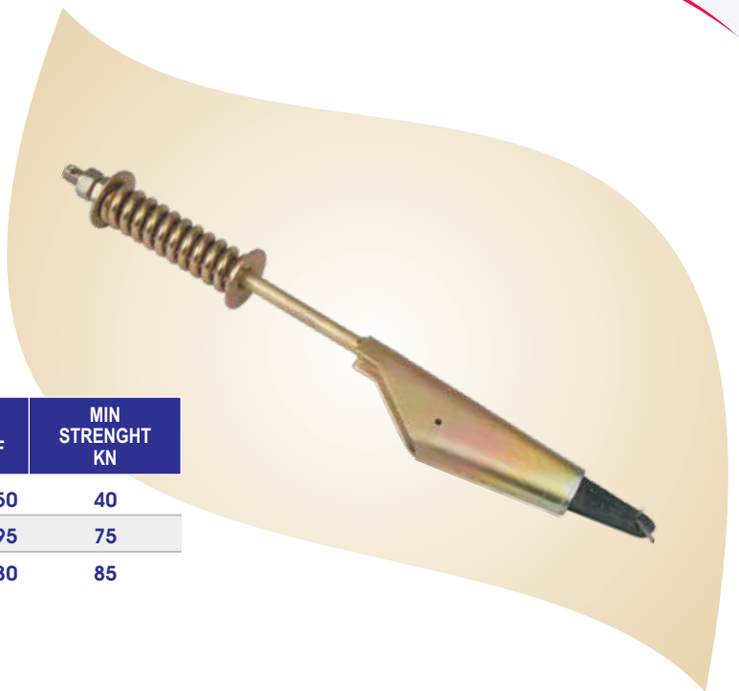

CODE	ROPE D mm	Q D	L mm	TL mm	A	B	C	D	E	F	MIN STRENGHT KN
Code: SS-RA-S01	6-8	M12	375	105	110	32	6.5	50	225	150	40
Code: SS-RA-S02	9-11	M16	455	110	121	40	9	55	260	195	75
Code: SS-RA-S03	12-14	M20	480	200	156	50	9	60	300	180	85

Code: SS-RA-R

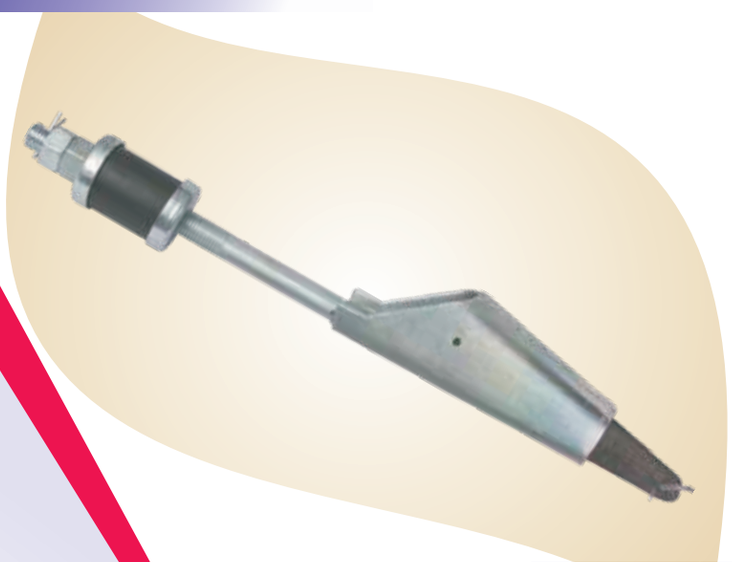


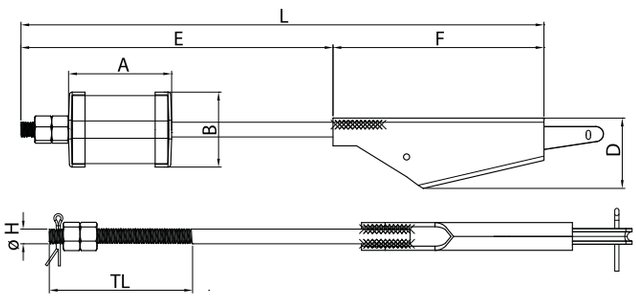

CODE	ROPE D mm	Q D	L mm	TL mm	A	B	D	E	F	MIN STRENGHT KN
Code: SS-RA-R01	6-8	M12	375	105	73.5	54	50	225	150	40
Code: SS-RA-R02	9-11	M16	455	110	73.5	54	55	260	195	75
Code: SS-RA-R03	12-14	M20	480	200	73.5	54	60	300	180	85

BULLDOG CLIP

Code: SS-BC

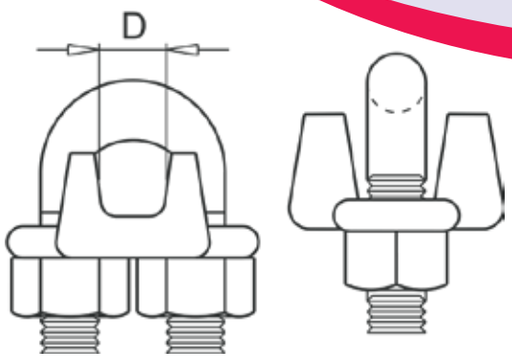



Finish Available


- White Zinc Plated
- Yellow Zinc Plated

Code	ROPE D.mm	TIGHTENING TOURQUE Nm
Code: SS-BC01	5 - 6	4,24
Code: SS-BC02	7 - 8	4,24
Code: SS-BC03	9 - 10	10,20
Code: SS-BC04	12 - 13	20,11
Code: SS-BC05	15 - 16	20,11

ROPE EYE

Code: SS-RE



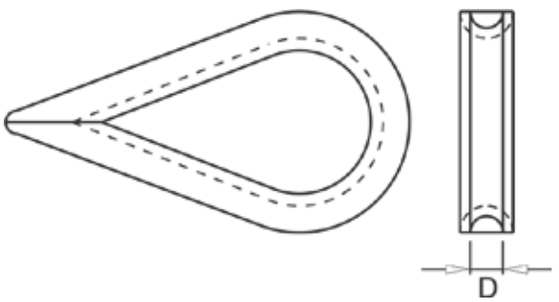


Finish Available

- White Zinc Plated
- Yellow Zinc Plated

Code	Rope D.mm
Code: SS-RE01	3 - 4
Code: SS-RE02	5 - 6
Code: SS-RE03	7 - 8
Code: SS-RE04	9 - 10
Code: SS-RE05	11 - 12
Code: SS-RE06	13 - 14

GUIDE SHOE

Code: SS-GS

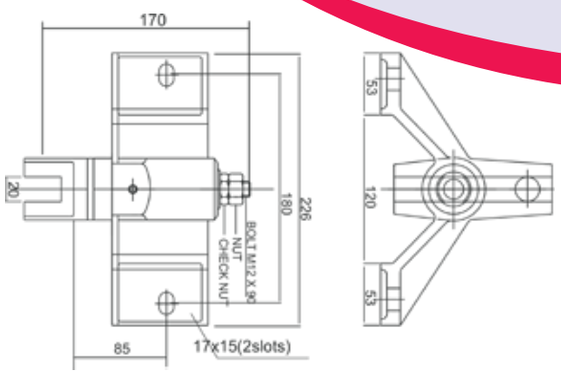


For Capacity - Upto 8 Passenger
For Speed - Upto 0.85 m/s
For Rail Size - 9mm, 10mm.



CODE	Rail Size	Load daN
SS-GS01	For 5 to 10 mm	1000




CODE	Rail Size	Load daN	Type
SS-GS02	For 16 mm	2500	ROCKING T600



For Capacity - Upto 1.5 Tonne
For Speed - Upto 0.6 m/s
For Rail Size - 16mm

GUIDE SHOE

Code: SS-GS

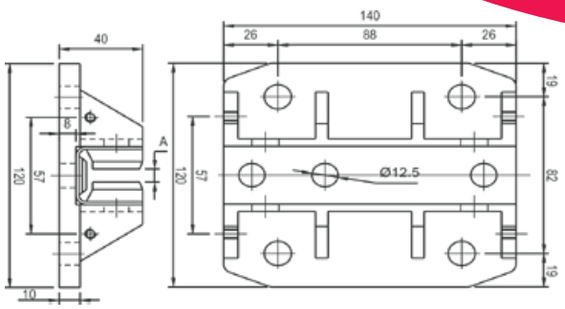




For Capacity - Upto 8 Passenger
For Speed - Upto 0.85 m/s
For Rail Size - 5, 6, 9, 10, 16mm"

CODE	Rail Size	Load daN	Type
SS-GS03	From 5 to 16mm	1350	C. I.




CODE	Rail Size	Load daN	TYPE
SS-GS04	For 5 to 16 mm	1000	C. I.

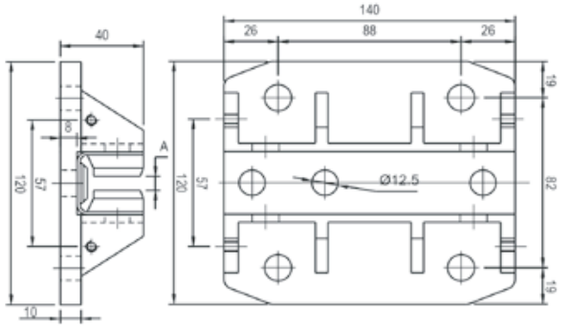


For Capacity - Upto 8 Passenger
For Speed - Upto 0.85 m/s
For Rail Size - 5, 6, 9, 10, 16mm

GUIDE SHOE

Code: SS-GS

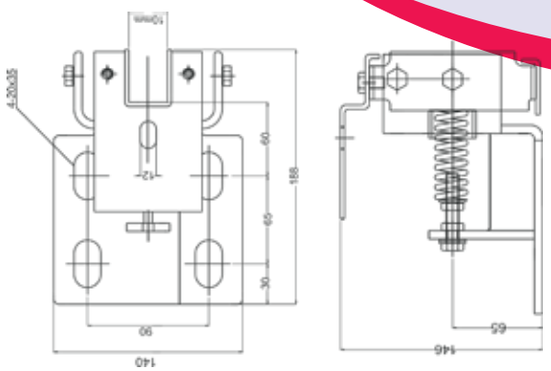


For Capacity - Upto 20 Passenger
For Speed - Upto 1.75 m/s
For Rail Size - 9mm, 10mm, 16mm

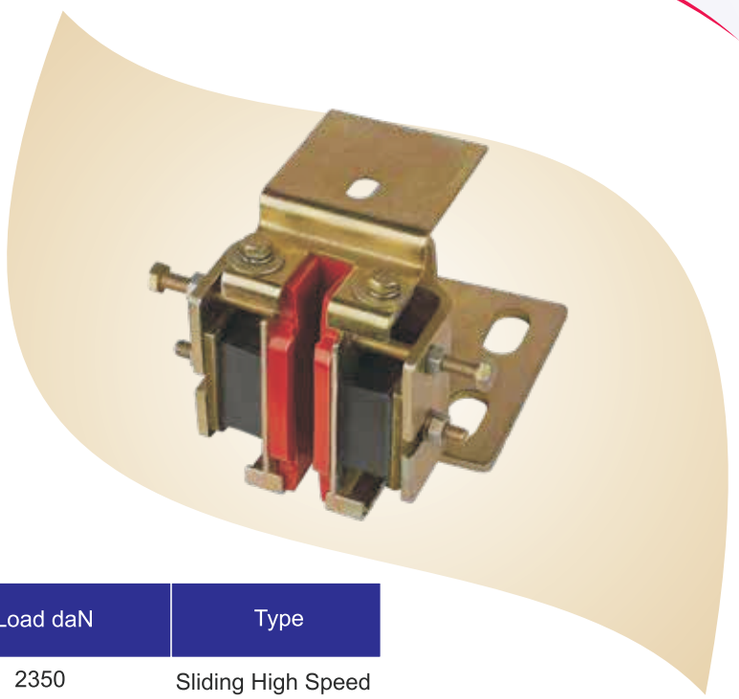

Code	Rated Speed	Rail Size	Load daN	Type
SS-GS05	UPTO 1.75 M/S	From 9 to 16mm	2350	Sliding High Speed



Code	Rail Size	Load daN	Type
SS-GS06	For 16 mm	2500	ROCKING T600

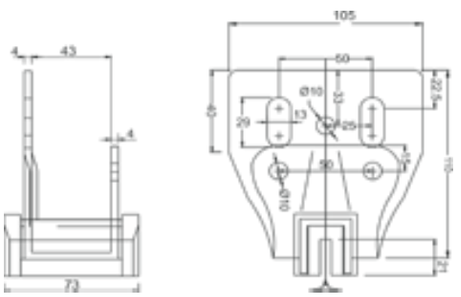


For Capacity - Upto 8 Passenger
For Speed - Upto 1.0 m/s
For Rail Size - 5mm, 6mm


GUIDE SHOE

Code: SS-GS





Code	Rail Size	Load daN	Type
SS-GS07	From 9 to 16mm	3000	Nylon





For Capacity - Upto 20 Passenger
For Speed - Upto 1.75m/s
For Rail Size - 9, 10, 16mm
For Rail Types - Hollow, Machined
Load daN - 3000

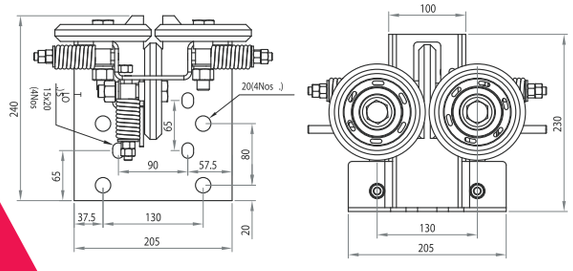

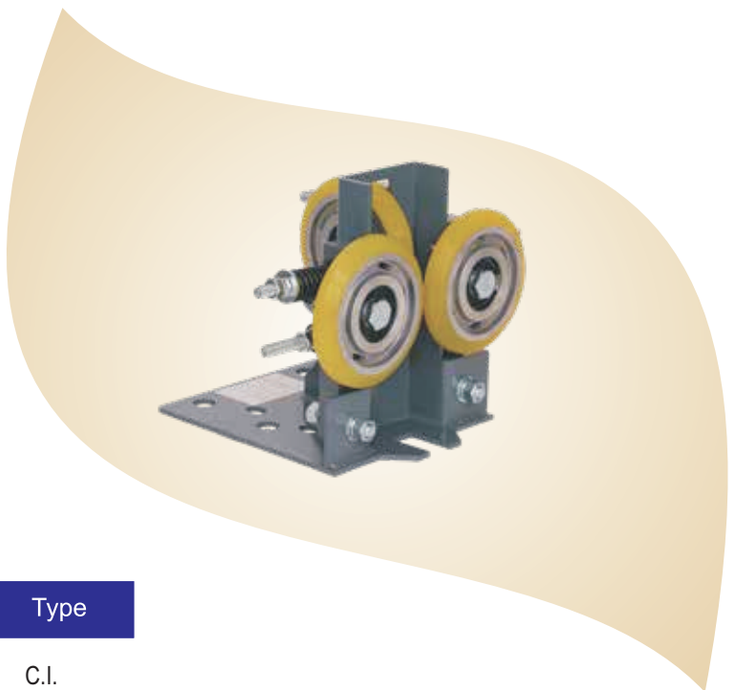


Diameter - 125 mm
For Speed - Upto 2.5m/s
For Rail Size - 10mm, 16mm
Allowable gross mass - Upto 1600 kg

Code	Rail Size	Load daN	Type
SS-GS08	From 9 to 16mm	1000	C.I.


GUIDE SHOE

Code: SS-GS

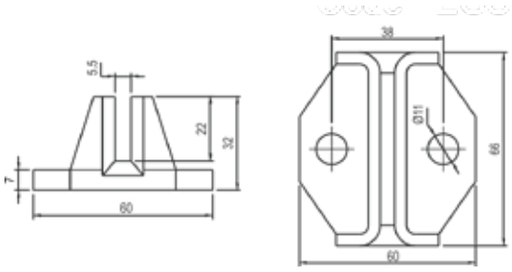


For Capacity - Upto 8 Passenger
For Speed - Upto 0.85m/s
For Rail Size - 5, 6mm

Code	Rail Size	Load Dan	Type
SS-GS09NY	From 5 to 6 mm	1000	Nylon

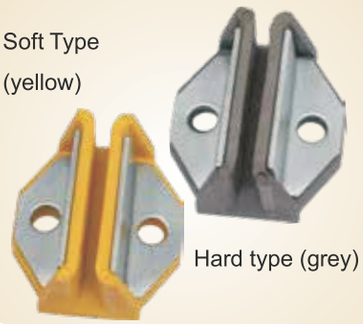



Code	Rail Size	Load dAN	Type
SS-GS10NY	From 5 mm	1000	C. I.

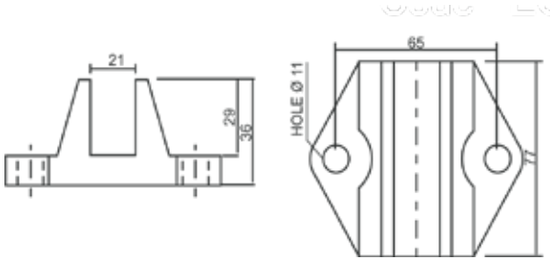

For Capacity - Upto 8 Passenger
For Speed - Upto 0.85m/s
For Rail Size - 5mm

OILER & OIL COLLECTORS

Code: SS-O



CODE: SS-O01B Big Can
CODE: SS-O01S Small Can

Oil Feeder Suitable for
SS-GS1, SS-GS2, SS-GS2a


CODE SS-O02

Oil Feeder Suitable for
SS-GS1, SS-GS2, SS-GS3



OILER & OIL COLLECTORS

Code: SS-O

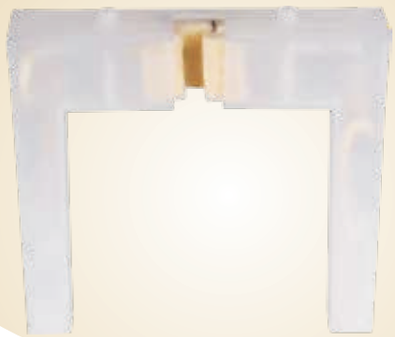

CODE SS-O03

Oil Feeder Suitable for

SS-GS A1, SS-GSA 1L,
SS-SG 8, SS-SG 11


CODE SS-O04


Oil Collector for rail size 5, 9,
14 & 16



DIVERTER PULLEY FOR CAR FRAME

Code: SS-IPCF

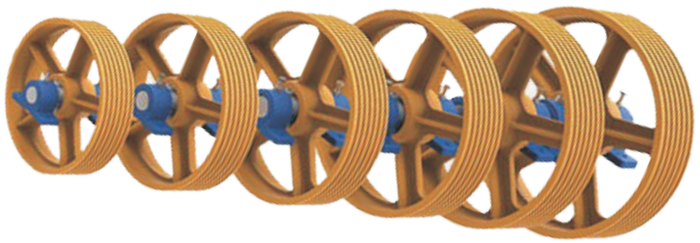





Code	Pulley Dia. 'D'	Rope Dia.	No. of ropes	Pitch 'P'	Width 'W'	Shaft Dia. 'd'	Ball Bearing
SS-IPCF01	250	6	5	12	84	50	6210-ZZ
SS-IPCF02	250	6	6	12	84	50	6210-ZZ
SS-IPCF03	250	6	7	12	116	50	6210-ZZ
SS-IPCF04	250	6	8	12	116	50	6210-ZZ
SS-IPCF05	300	8	4	12	70	50	6210-ZZ
SS-IPCF06	300	8	5	12	70	50	6210-ZZ
SS-IPCF07	300	8	6	12	83	50	6210-ZZ
SS-IPCF08	300	10	3	17	70	50	6210-ZZ
SS-IPCF09	300	10	4	17	83	50	6210-ZZ
SS-IPCF10	300	10	5	17	102	50	6210-ZZ
SS-IPCF11	300	13	3	19	70	50	6210-ZZ
SS-IPCF12	300	13	4	19	83	50	6210-ZZ
SS-IPCF13	320	6	5	12	70	55	6211-ZZ
SS-IPCF14	320	6	6	12	86	55	6211-ZZ
SS-IPCF15	320	6	7	12	106	55	6211-ZZ
SS-IPCF16	320	6	8	12	130	55	6211-ZZ
SS-IPCF17	320	8	4	12	70	55	6211-ZZ
SS-IPCF18	320	8	5	12	70	55	6211-ZZ
SS-IPCF19	320	8	6	12	86	55	6211-ZZ
SS-IPCF20	400	8	4	12	70	55	6211-ZZ
SS-IPCF21	400	8	5	12	70	55	6211-ZZ
SS-IPCF22	400	8	6	12	84	55	6211-ZZ
SS-IPCF23	400	8	8	12	102	55	6211-ZZ
SS-IPCF24	400	10	3	17	70	55	6211-ZZ
SS-IPCF25	400	10	4	17	84	55	6211-ZZ
SS-IPCF26	400	10	5	17	102	55	6211-ZZ
SS-IPCF27	400	13	3	19	70	55	6211-ZZ
SS-IPCF28	400	13	4	19	84	55	6211-ZZ
SS-IPCF29	400	13	5	19	102	55	6211-ZZ
SS-IPCF30	525	8	6	12	102	55	6211-ZZ
SS-IPCF31	525	8	8	12	108	55	6211-ZZ
SS-IPCF32	525	10	3	17	102	55	6211-ZZ
SS-IPCF33	525	10	4	17	102	55	6211-ZZ
SS-IPCF34	525	10	5	17	102	55	6211-ZZ
SS-IPCF35	525	13	3	19	102	55	6211-ZZ
SS-IPCF36	525	13	4	19	102	55	6211-ZZ

DIVERTER PULLEY FOR MACHINE

Code: SS-IPM

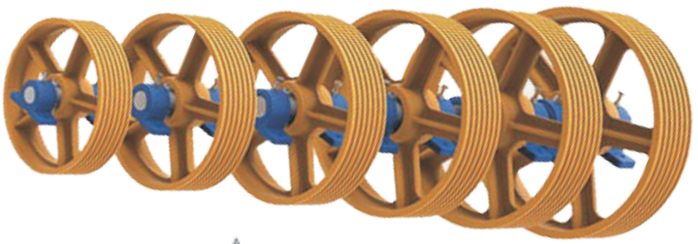

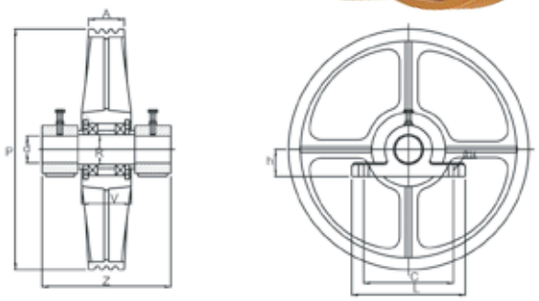

CODE	ØP	GROOVES "n"	ROPE DIA "mm"	A	C	L	V	Z	d	h	R	STATIC	BALL
SS-IPM01	360	4	911	82	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM02	400	4	911	85	128	175	85	300	50	45	55	2500	6210-ZZ
SS-IPM03	400	5	911	100	128	175	85	300	50	45	55	3900	6210-ZZ
SS-IPM04	450	5	911/ 1214	100	128	175	85	300	50	45	55	3900	6210-ZZ
SS-IPM05	525	6	911/ 1214	133	135	185	133	300	55	48	60	6300	6211-ZZ
SS-IPM06	550	7	911	130	128	175	122	300	55	48	60	6300	6211-ZZ
SS-IPM07	480	5	1214	101	135	175	88	300	50	45	55	3900	6210-ZZ
SS-IPM08	480	6	1214	134	135	175	124	300	50	45	55	3900	6210-ZZ
SS-IPM9	400	6	911/ 1214	101	128	175	86	300	50	45	55	3900	6210-ZZ
SS-IPM10	200	4	911	82	125	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM11	300	3	1013	85	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM12	300	4	1013	85	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM13	400	3	911/ 1214	85	128	175	85	300	50	45	45	2500	6210-ZZ
SS-IPM14	200	2	911	50	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM15	200	5	911	82	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM16	200	6	911	82	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM17	250	4	911	85	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM18	250	5	911	85	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM19	300	5	911	100	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM20	320	8	911	100	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM21	360	5	911	107	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM22	400	7	911/ 1214	135	128	175	85	300	50	45	55	3900	6210-ZZ
SS-IPM23	450	4	911	135	128	175	85	300	50	45	55	3900	6210-ZZ
SS-IPM24	450	7	911/ 1214	135	128	175	85	300	50	45	55	3900	6210-ZZ
SS-IPM25	525	3	1214	100	135	175	124	300	55	48	60	6300	6211-ZZ
SS-IPM26	525	4	1214	100	135	175	124	300	55	48	60	6300	6211-ZZ
SS-IPM27	525	5	1214	100	135	175	124	300	55	48	60	6300	6211-ZZ
SS-IPM28	250	6	9-11	82	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM29	250	8	9-11	100	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM30	320	4	9-11	85	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM31	360	6	9-11	82	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM32	320	5	9-11	100	128	175	85	300	50	45	55	2000	6210-ZZ
SS-IPM33	210	5	9-11	85	128	174	53	300	45	49	45	1800	6209-ZZ
SS-IPM34	240	6	9-11	85	128	174	53	300	45	49	45	1800	6209-ZZ

NYLON PULLEY

Code: SS-NP




Code	Pulley Dia 'B'	Rope dia	No of Rope
SS-NP01	200	6.5	4
SS-NP02	200	6.5	5
SS-NP03	200	6.5	6
SS-NP04	200	6.5	7
SS-NP05	200	6.5	8
SS-NP06	240	6.5	4
SS-NP07	240	6.5	5
SS-NP08	240	6.5	6
SS-NP09	240	6.5	7
SS-NP10	240	6.5	8
SS-NP11	240	6.5	9
SS-NP12	240	6.5	10
SS-NP13	320	8	4
SS-NP14	320	8	5
SS-NP15	320	8	6
SS-NP16	320	8	7
SS-NP17	320	8	8
SS-NP18	320	8	10

PULLEY ACCESORIES


CASTING PEDESTAL






SHAFT WITH CENTRE LOCKING PULLEY ARRANGEMENT

FABRICATED PEDESTAL






SHAFT WITH PROVISION FOR LOCK PLATE


U-BOLT








SHAFT WITH PROVISION FOR U BOLT CLAMPING




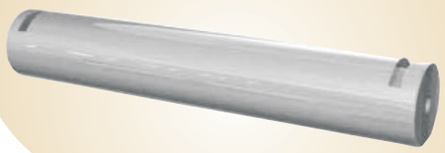

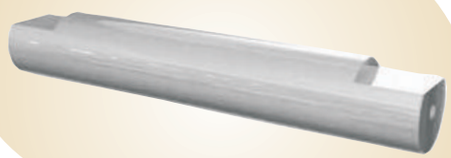

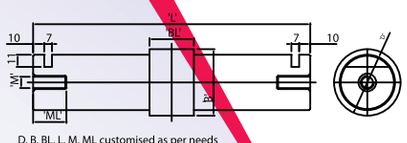







CABLE HANGER

Code: SS-CH

SS-CH01




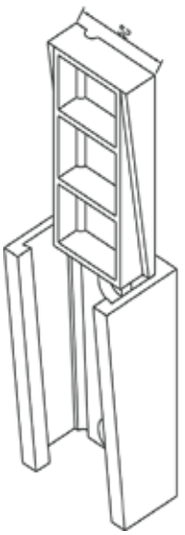


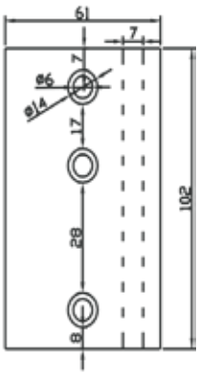

SS-CH02




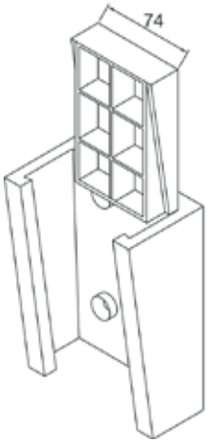



SS-CH03



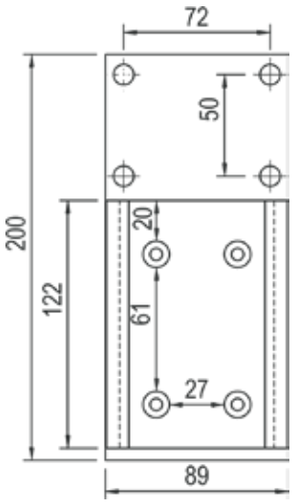


CABLE HANGER

Code: SS-CH


SS-CH04



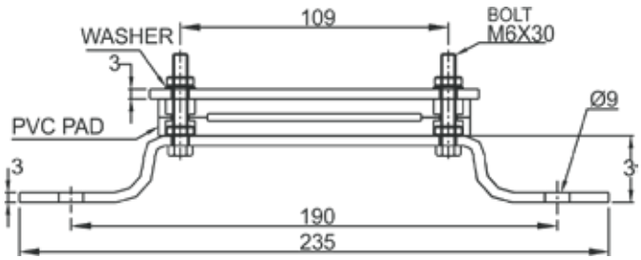


SS-CH05



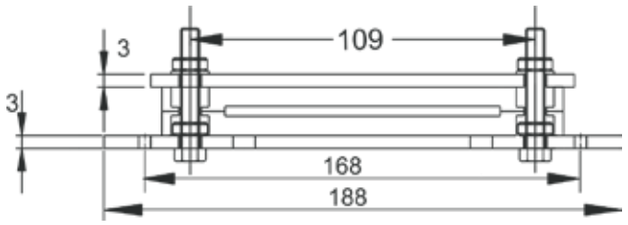

SS-CH06




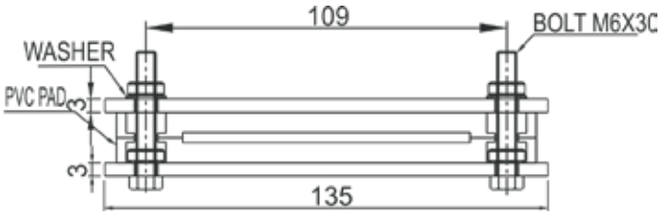


CABLE HANGER


Code: SS-CH


SS-CH 07

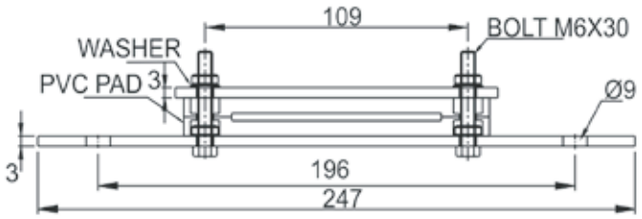

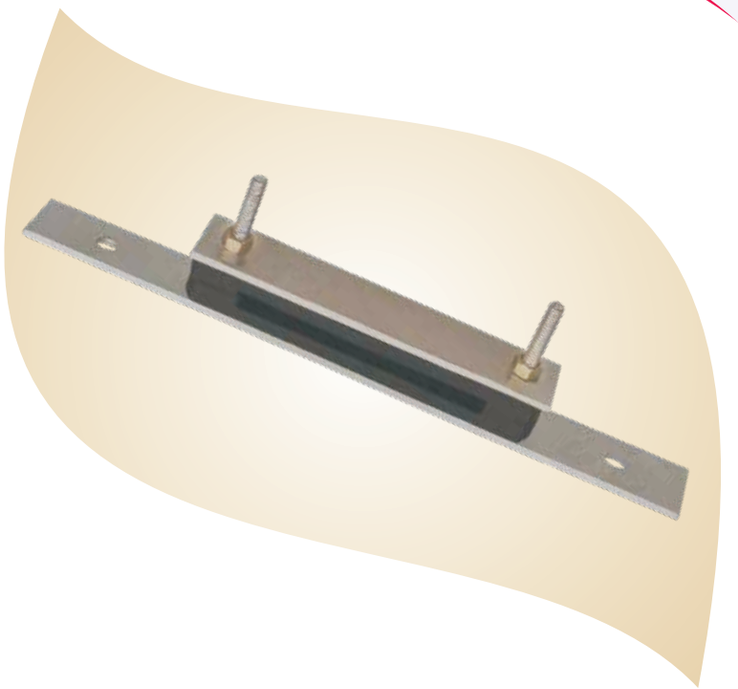


SS-CH 08

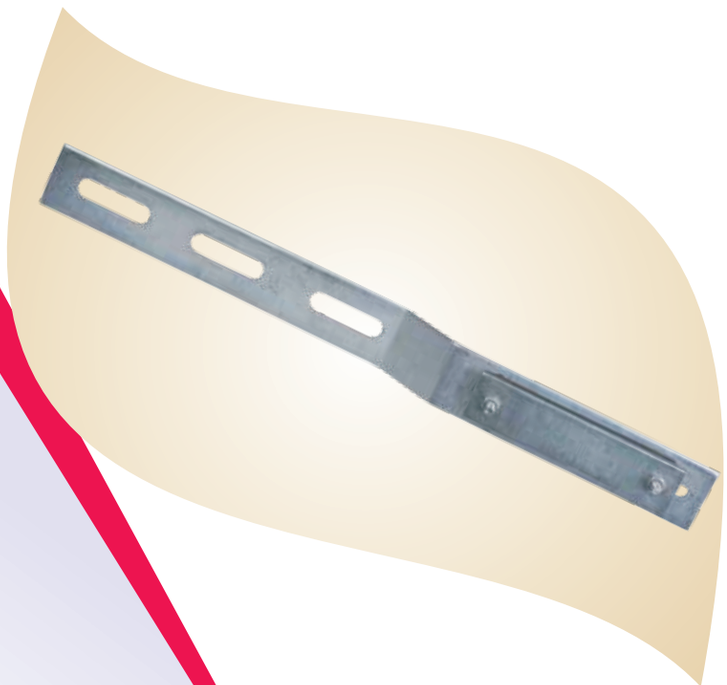

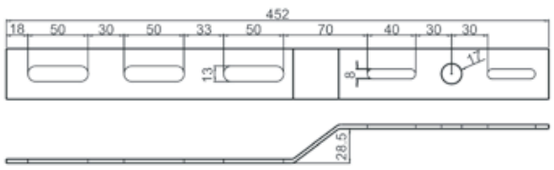

SPRING BUFFER

Code: SS-SB

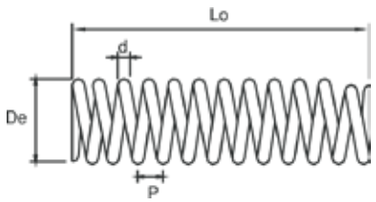



TEHNICAL DATA	LENGTH Lo = mm	WIRE DIA D = mm	OUTSIDE DIA De = mm	MIDDLE DIA Dm = mm	PITCH P = mm	ACTIVE TURNS it=	TOTAL TURNS it=	TOTAL COMPRESS LO
SS-D14	235	14	85	71	23.26	9.50	10.50	828
SS-D14/320	320	14	94	80	26.61	11.50	13.00	928
SS-D15	210	15	89	74	26	7.50	8.50	1165
SS-D15/330	330	15	94	79	30	10.50	12.00	1360
SS-D16	320	16	112	96	38	20	10	1560
SS-D18	250	18	98	80	29	8.00	9.00	1851
SS-D18/20	420	18	98	80	29.78	13.50	15.00	2007

OIL BUFFER

Code: SS-OB





MIN. STROKE - 173.7
MAX. OPEN HEIGHT - 485.6
NOMINAL OIL VOLUME - 0.9LITRES
BUFFER MASS / NO OIL - 6.7KG

PU BUFFER

Code: SS-PUB

- Speed <=1,00 m/s
- Load 450Kg - 2200Kg
- Height = 115 mm
- Diameter = 95 mm

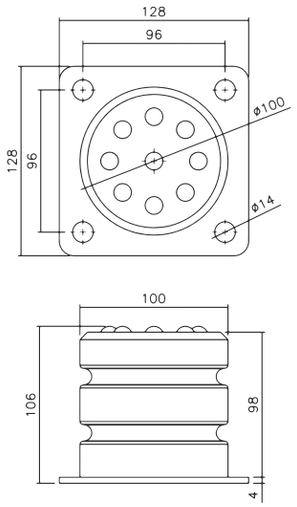


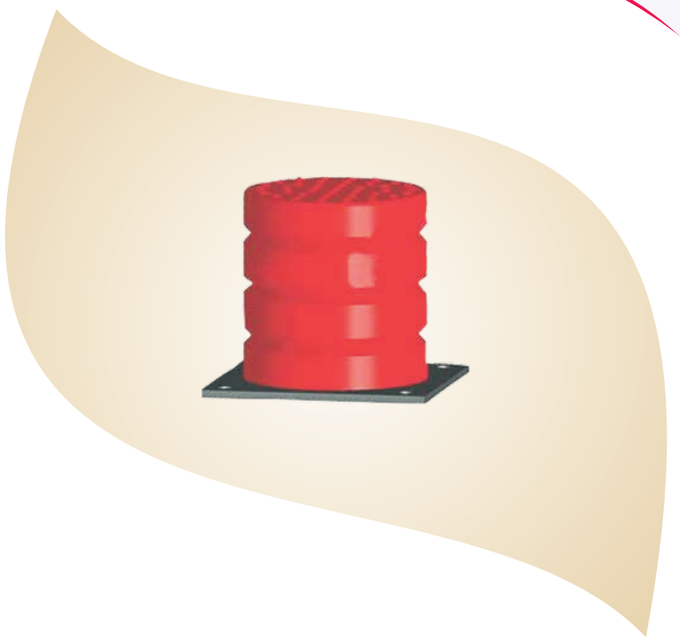

DOUBLE ACTION RUBBER BUFFER

Code: DARB



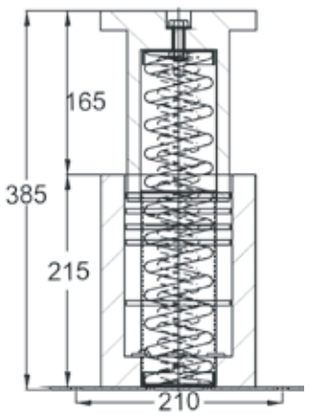


Code	Speed m/s
Code: DARB	0,63
Impact Force N	**Buer Stroke (Single Buer)mm**
21140	110

ISOLATORS

Code: SS-IR

CODE	HARDNESS sh	D mm	H mm	PIN	STROKE Y mm	LOAD daN
Code: SS-1R01	sh65	56	38	M10x23x23	280	3.8
Code: SS-1R02	sh65	75	30	M12x28x23	455	3.5






CODE	HARDNESS sh	D mm	H mm	PIN	STROKE Y mm	LOAD daN
Code: SS-1R03	sh65	40	32	M10x22	200	3.0
Code: SS-1R04	sh65	60	32	M10x22	200	3.0





STEADIER BUFFER

Code: SS-SR

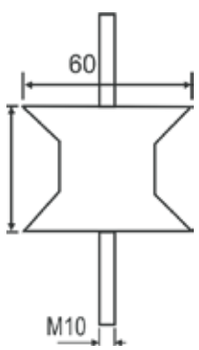

FOR LOWER CAR
FRAME BUFFER




M10 HARDNESS sh55

STEADIER BUFFER

Code: LTYPE


FOR UPPER CAR FRAME BUFFER



M8 HARDNESS sh55



MACHINE BASE RUBBER



CODE	HARDNESS sh	D mm	H mm	PIN	Y mm	LOAD daN
SS-MBR01	sh65	110	29	M14x37	1000	7
SS-MBR02	sh65	100	50	M14x55	1000	7



SS-MBR-03

Base rubber with 2 hole
L-140 x B-75 x Thk - 25



MACHINE BASE RUBBER

Base rubber
L-150 x B-108 x Thk - 28



SS-MBR-04


Base rubber with 1 hole
L-75 x B-75 x Thk - 24




MBR-05

ELEVATOR BRACKETS


SS-EB

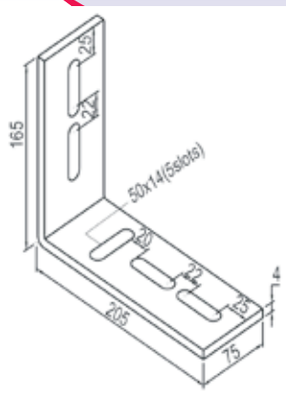


SS-EB01

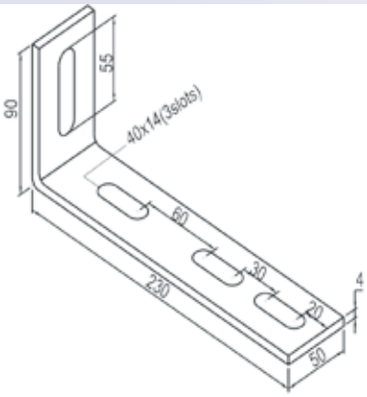


SS-EB02

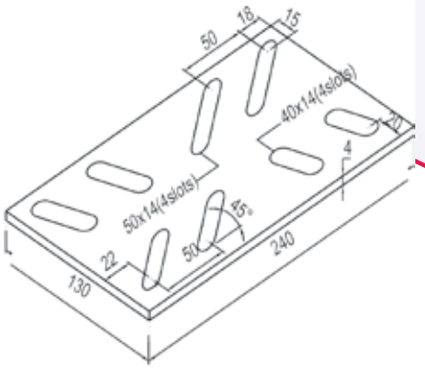


SS-EB03

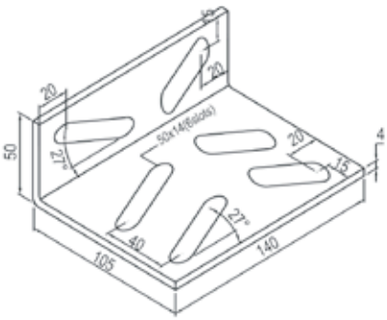


SS-EB04

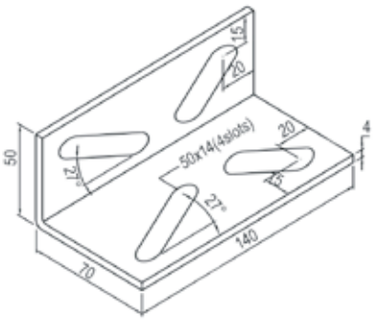


SS-EB04M

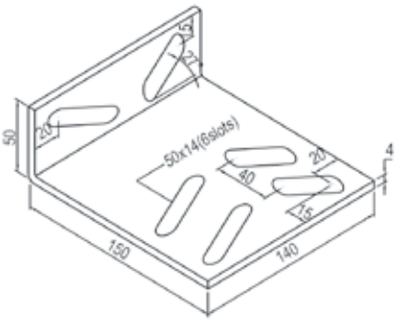


SS-EB05

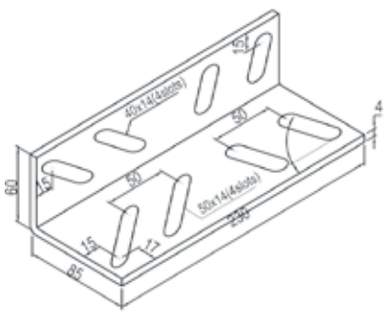


SS-EB06




SS-EB07

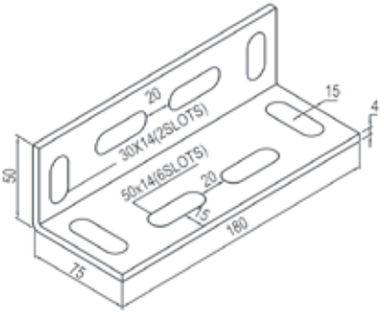


SS-EBN01

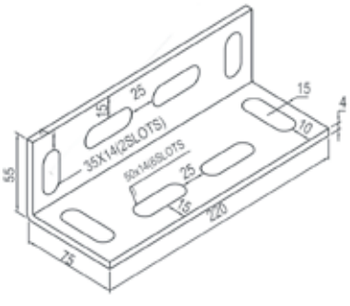

SS-EBN02




SS-EBAR01




SS-EBAR02

ELEVATOR BRACKETS


SS-EB

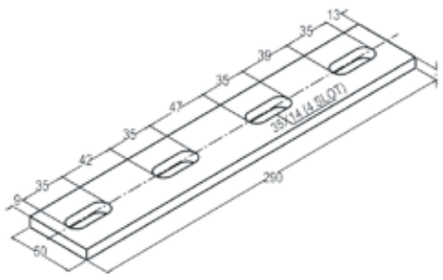


SS-EBEF1

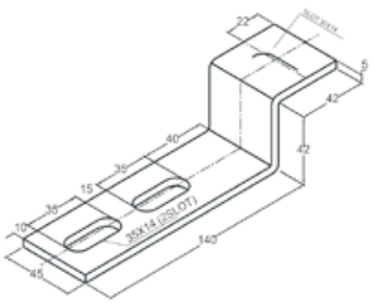


SS-EBEF2

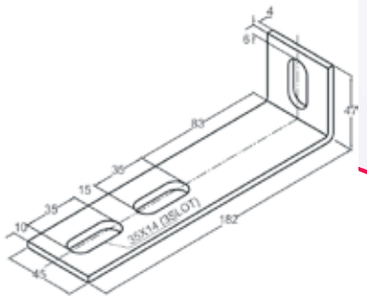


SS-EBEF3

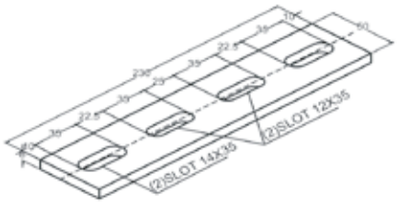


SS-EBEF4




SS-EBEF5

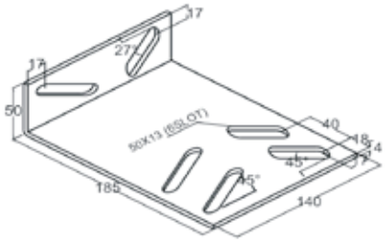


SS-EBSE1

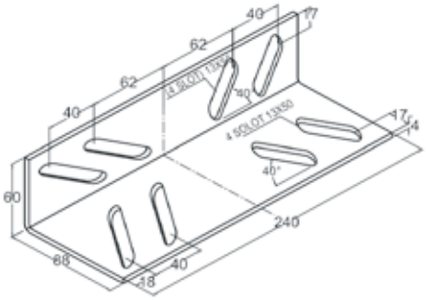


SS-EBSE2

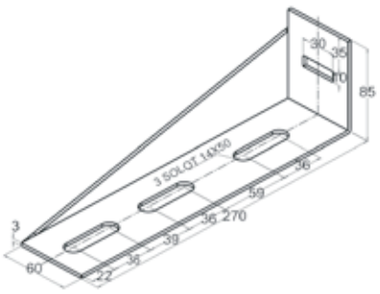

SS-EBSE3

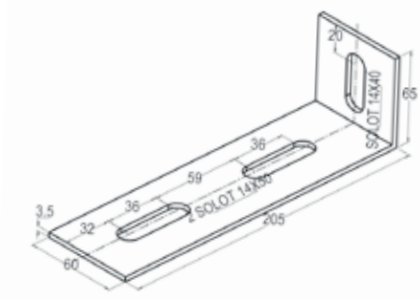


SS-EBSE4

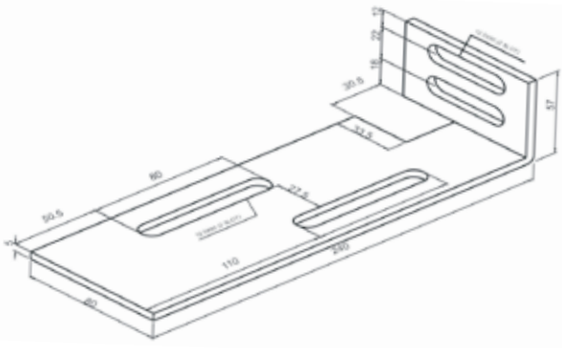


SS-EBSE5

ELEVATOR BRACKETS


SS-EB

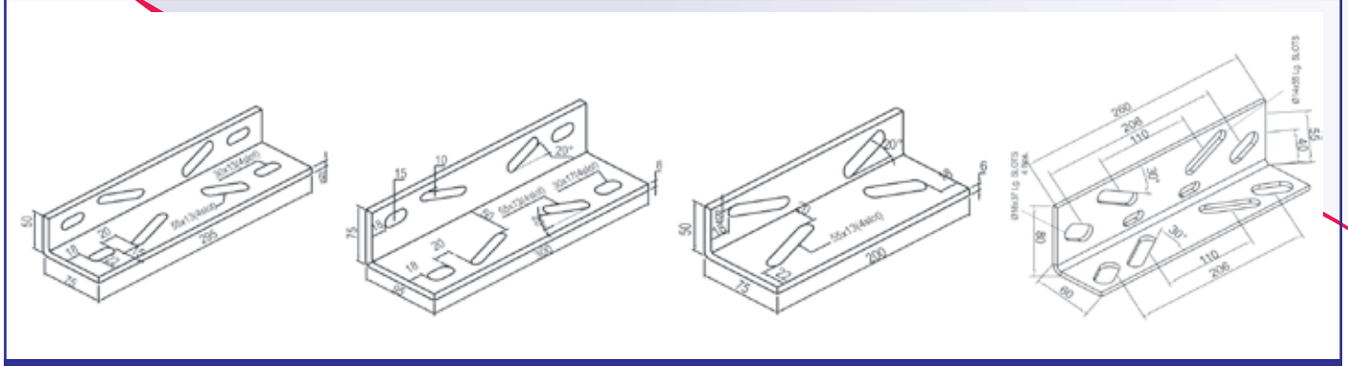

SS-EBAC2 | SS-EBAC2X | SS-EBADI | SS-EBETA

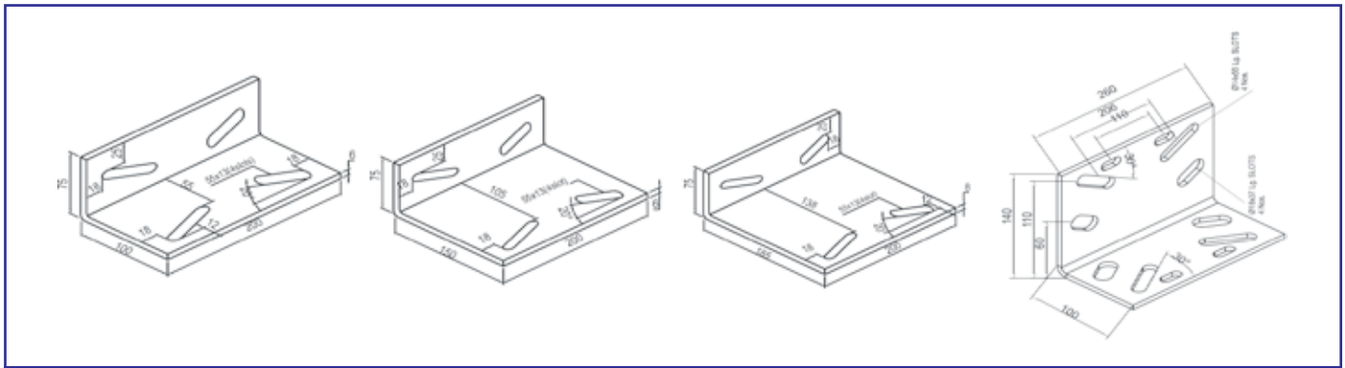


SS-AD2 | SS-EBAD3 | SS-EBAD3X | SS-EBETB

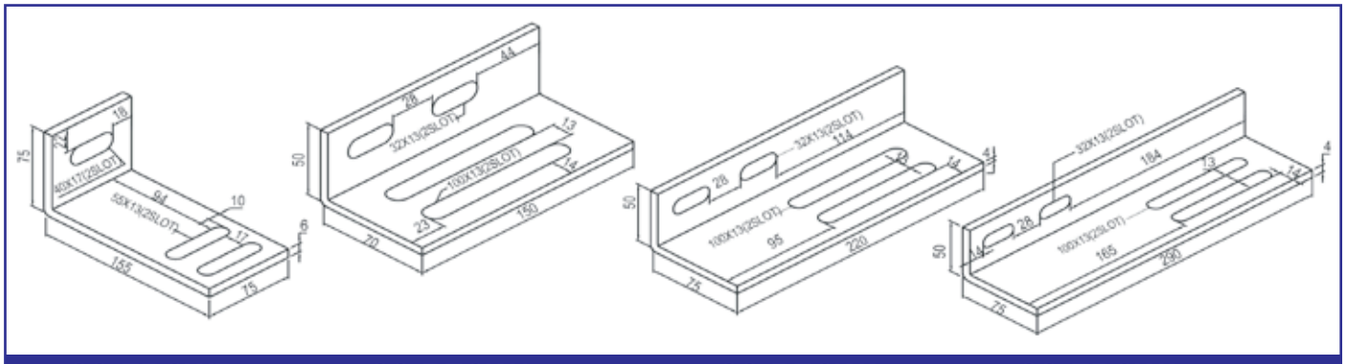

SS-EBCWB | SS-BECW1 | SS-BECW2 | SS-EBCW3

HYDRAULIC BRACKET CODE - EBRHYD




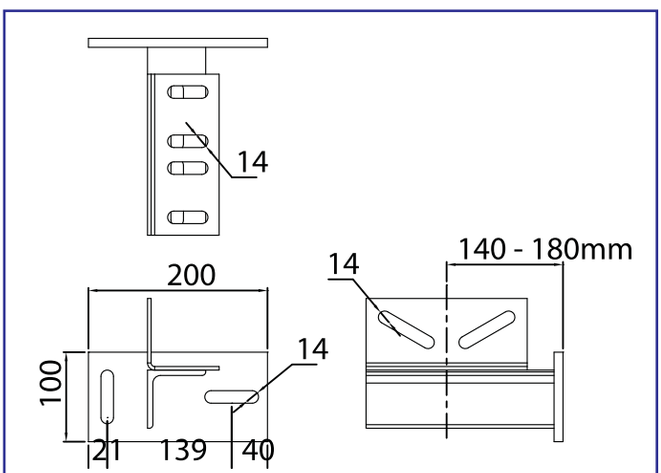


BRACKET & ACCESSORIES

COMBINATION BRACKET TYPE A


- Upto 8 passenger, 1.0 m/s

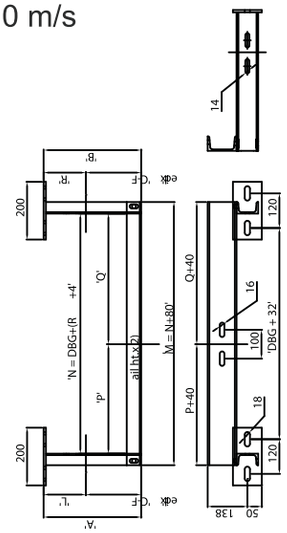


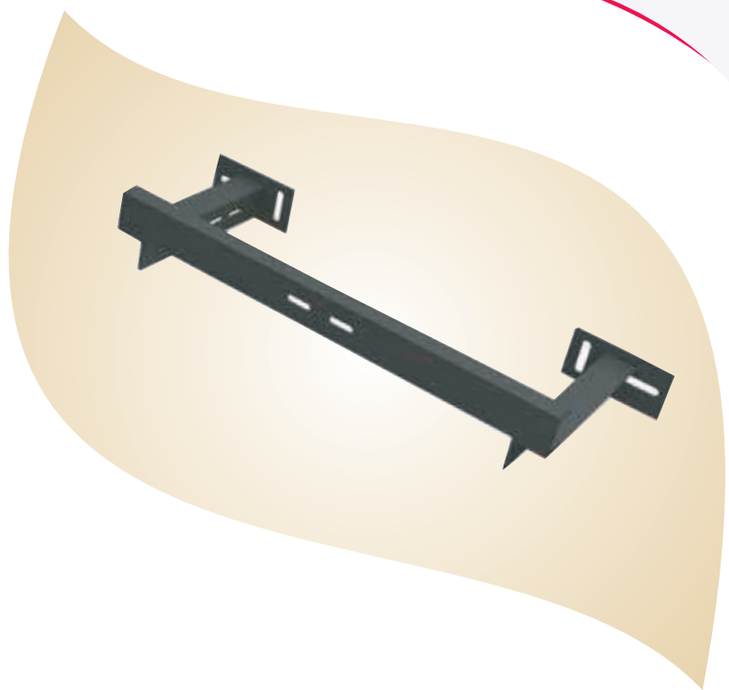

COMBINATION BRACKET TYPE B


- Upto 20 passenger, 1.5 m/s

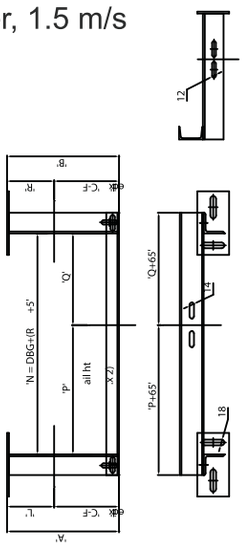


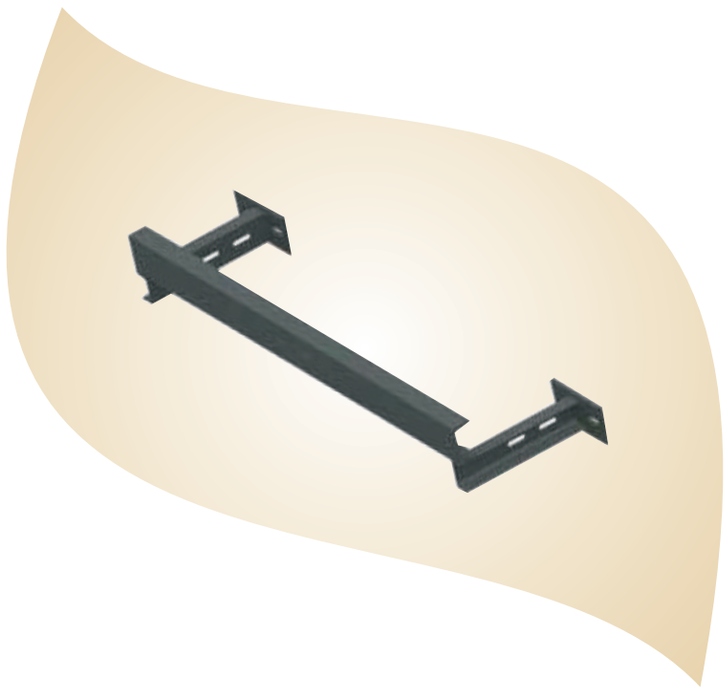


BRACKET & ACCESSORIES


LIMIT SWITCH CAM BRACKET

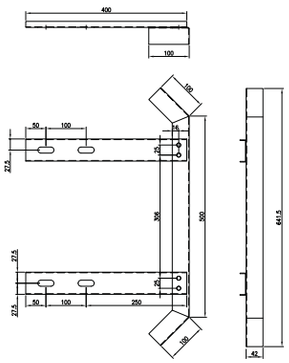

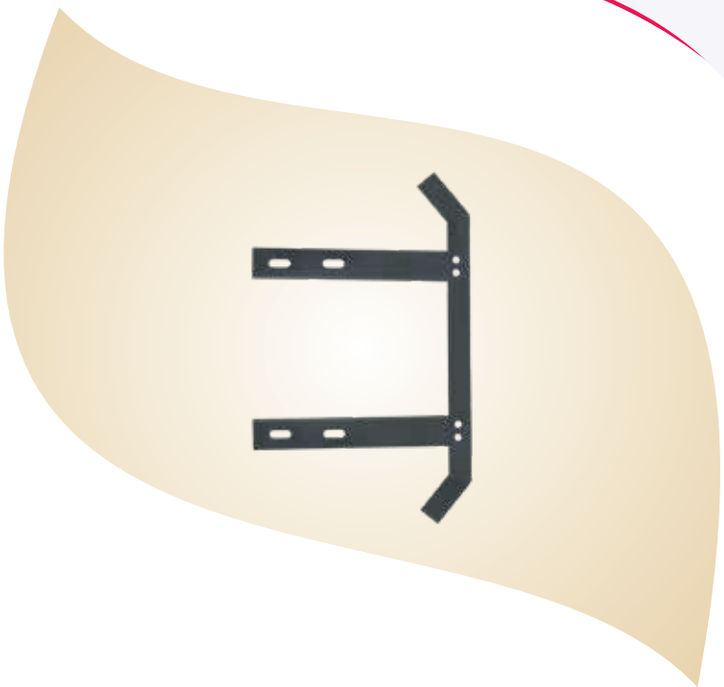

ADJUSTABLE COMBINATION BRACKETS

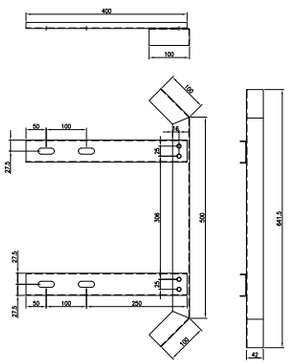


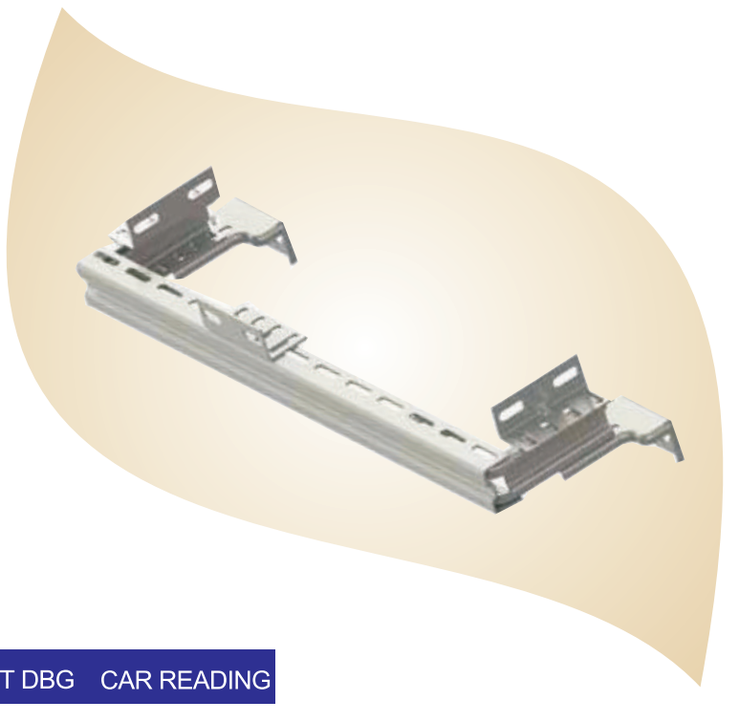

CODE	CWT DBG	CAR READING
SS-COMBC	700 - 1100	290 - 430
SS-COMBC	1320 - 1650	290 - 430

Forged Rail Clips

SS-FRC

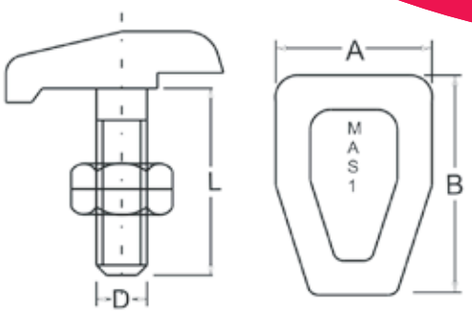




Available Finish
* White Zinc Passivated
* Yellow Zinc Passivated
* Anodised

CODE	Dmm	Amm	Bmm	Lmm
SS-RC10	M10	25	32	25
SS-RC12	M12	25	39	28
SS-RC14	M14	30	45	36
SS-RC16	M16	35	50	45
SS-RC18	M18	35	55	45

Sheet Metal Rail Clip

SS-SMRC

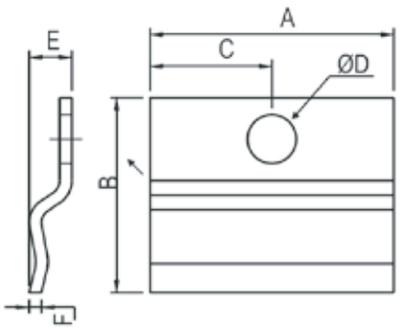



Available Finish
* White Zinc Passivated
* Yellow Zinc Passivated

CODE	ESRC-1	ESRC-2
SS-A	50	60
SS-B	40	50
SS-C	25	30
SS-D	10.5	12.5
SS-E	7	9
SS-F	3	3

SS ELEVATOR

Component Intl.,Trading

Professional & Excellent in Elevator Spare Parts

Mob: +91-9118535966
Email: sselevator@hotmail.com
Web: www.sselevator.in
Address: H#19, 2nd Floor Purabaaz,Aurangabad Mau- (U.P.) 275101 INDIA