




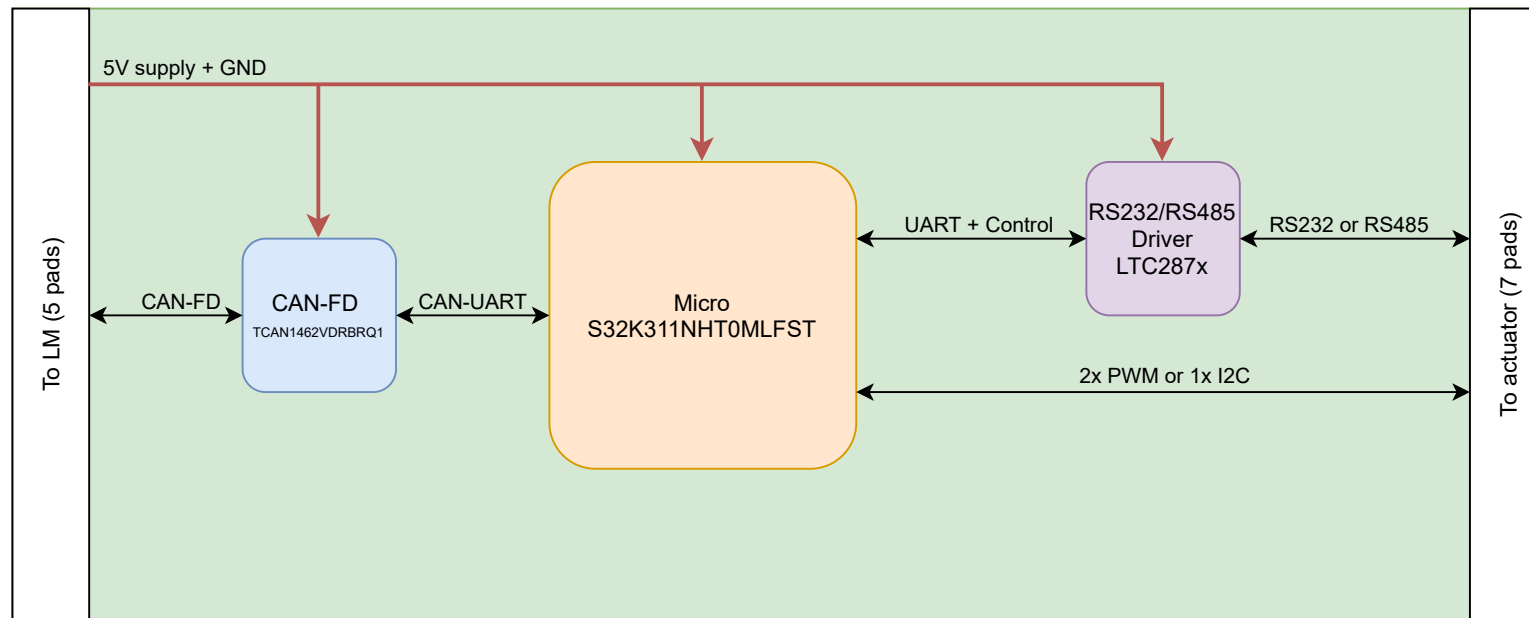

- The PCB will have
  - 1x CAN-FD (input)
  - 1x RS232 or RS485 Full/Half duplex
  - 1x I2C or 2 PWMs
- The LM output's 5V to supply all LM-CANconverter PCBs
- The S32K3, TCAN1462VDRBRQ1 and LTC287x works with 5V, so no DCDC or LDO is needed
- The 5 input pads consist on CAN-H, CAN-L, GND, 5V and GND. It is possible to remove one GND if needed.
- The 7 output pads consist on Tx/OUT-H, OUT-L, Rx/IN-H, IN-L, GND, SCL/GPIO1 and SDA/GPIO2
- For harness robustness a solution similar to the shifter can be used

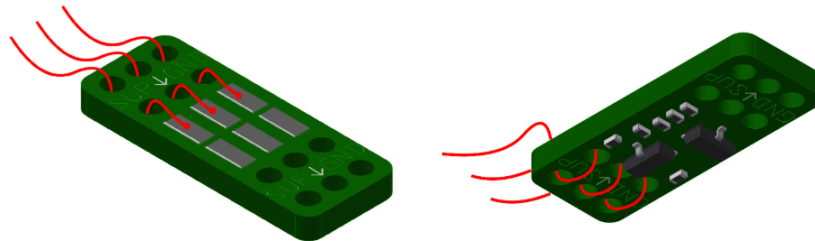

- The PCB approximate size can be 15x42cm.

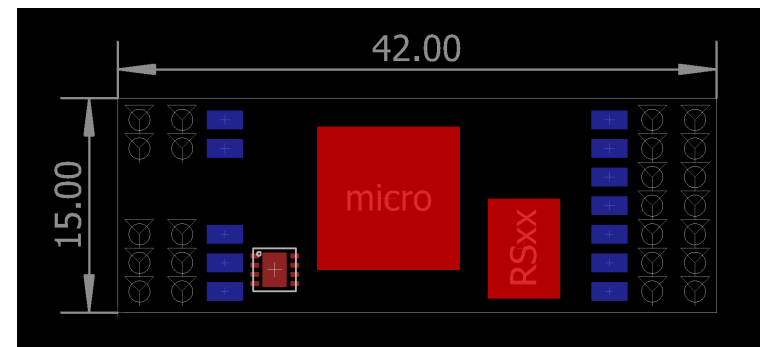

NOTE: High current switch is not a standard solution it will depend on customer needs. But it can be controlled by this PCB with the GPIOs.

|              |                  |
|--------------|------------------|
| Product:     | LM-CAN-Converter |
| Prepared by: | abs8             |
| Version:     | 1.0              |
| Date:        | 13/03/2026       |