


Basic Keyboard Arm BKA Series

Assembly Instructions



How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.

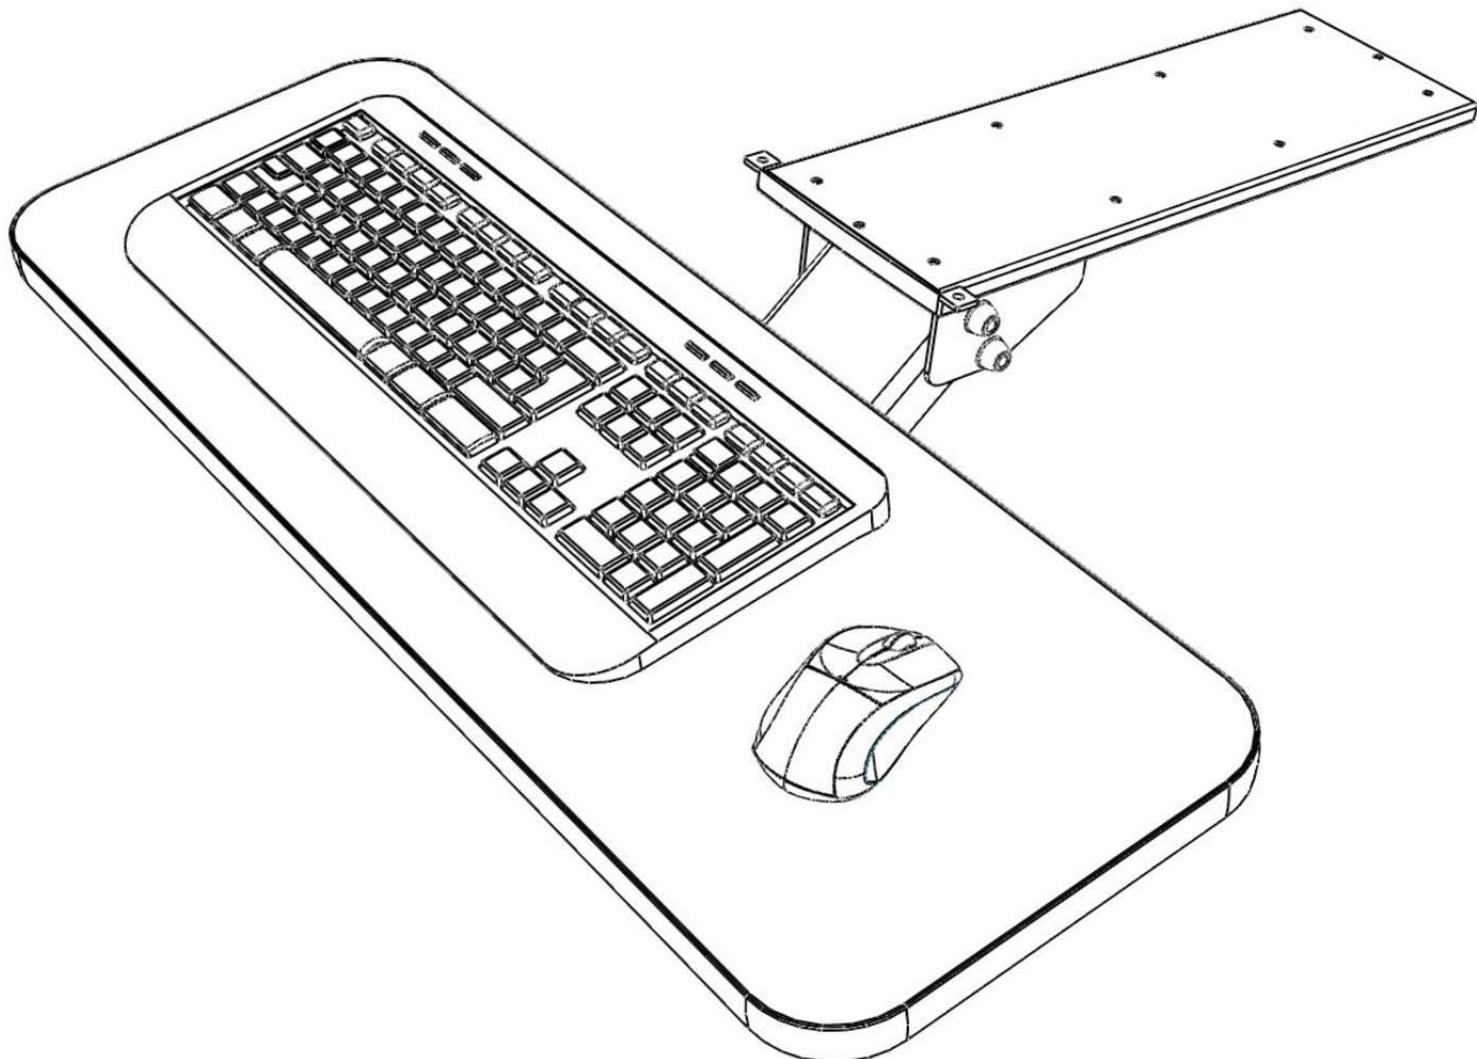

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts







Assembled in USA



Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

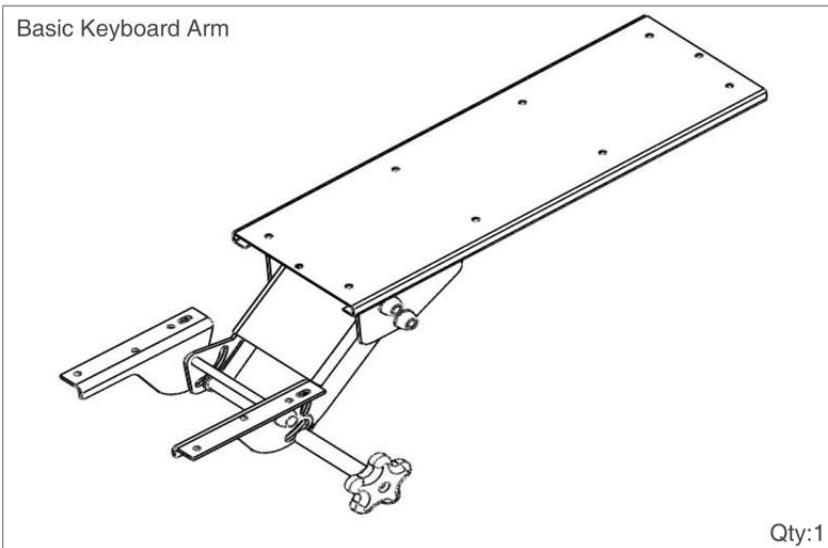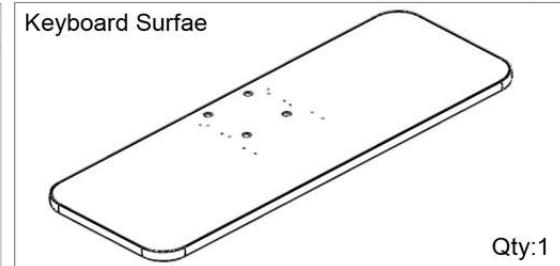


Additional Tools Required



Additional Tools Recommended




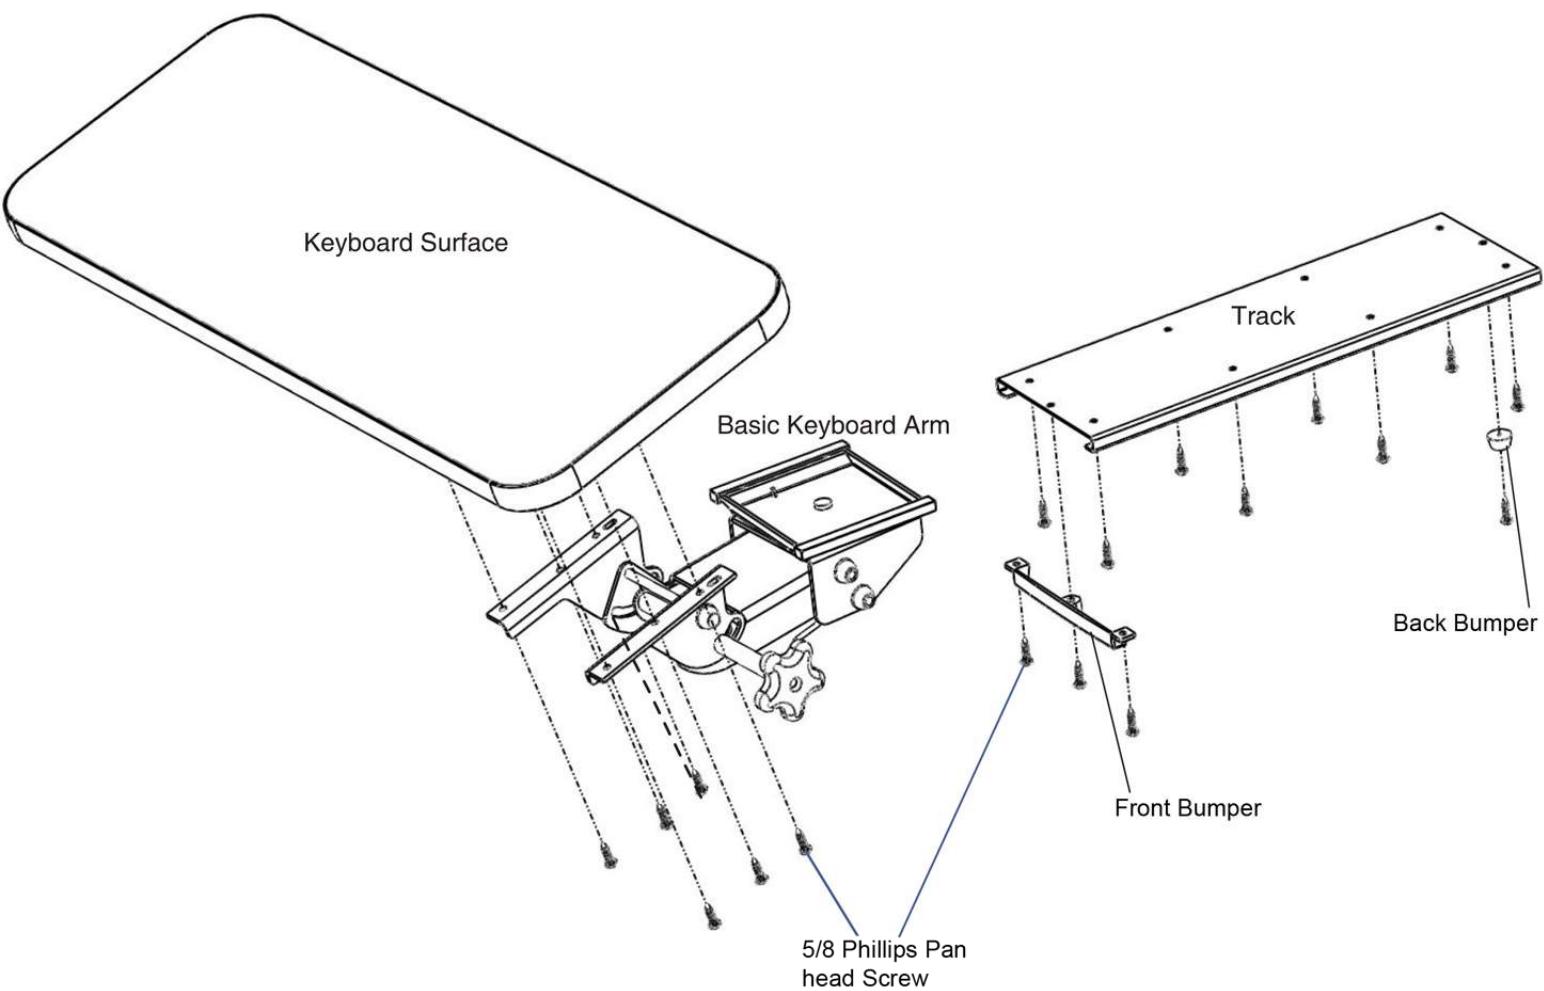

NOTE: Inverting the table or desk will make installation of Keyboard Arm easier, but is not required.

Step 1

Slide the Track off the Keyboard Arm.
Be Sure to keep Plastic Bearings attached to the Arm.

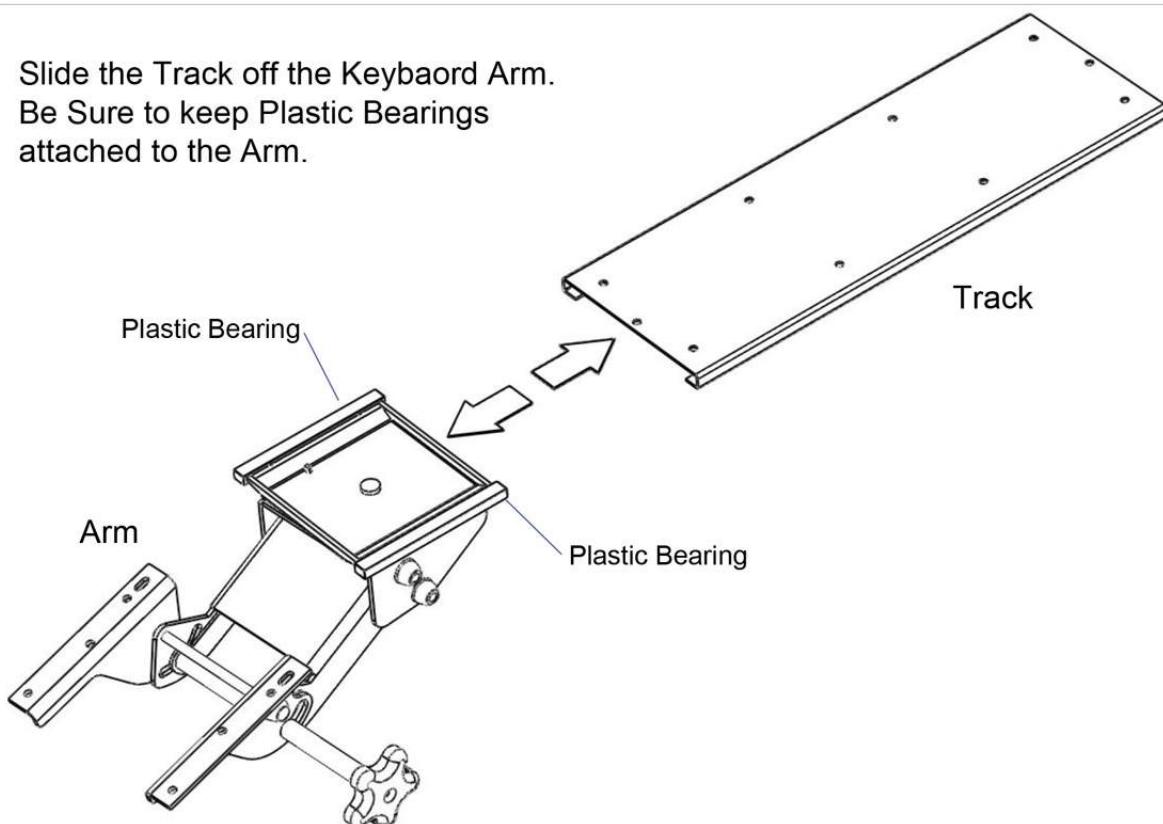


Step 2



Non-Versa Wood Surface Mounting:

Mounting: Place Track 1 inch from the front edge of the wood surface and use Track to premark the holes with pencil or pen.
Optional: Drill 1/8" pilot holes 1/4" way into surface.


1 Inch or Greater

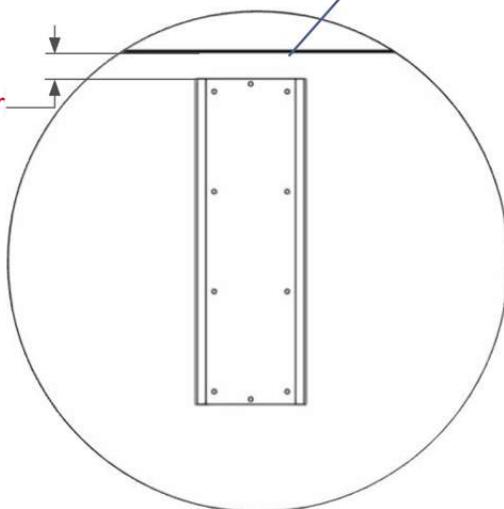

Front Edge of Desk

Versa Wood Surface Mounting:

Use pre-drilled holes (indicated with arrows) to align and mount the Track.
Optional: Mark the rest of the holes with pencil or pen and drill 1/8" pilot holes 1/4" way into surface.

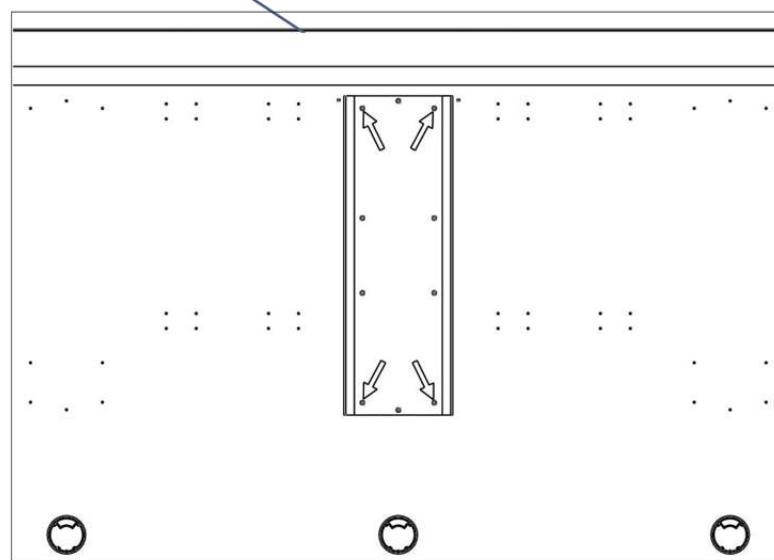

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA



Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com


Step 3

5/8 Phillips Pan Head Screw




Qty:8

Screw down the side holes of the Track first using eight 5/8 Phillips Pan Head Screws

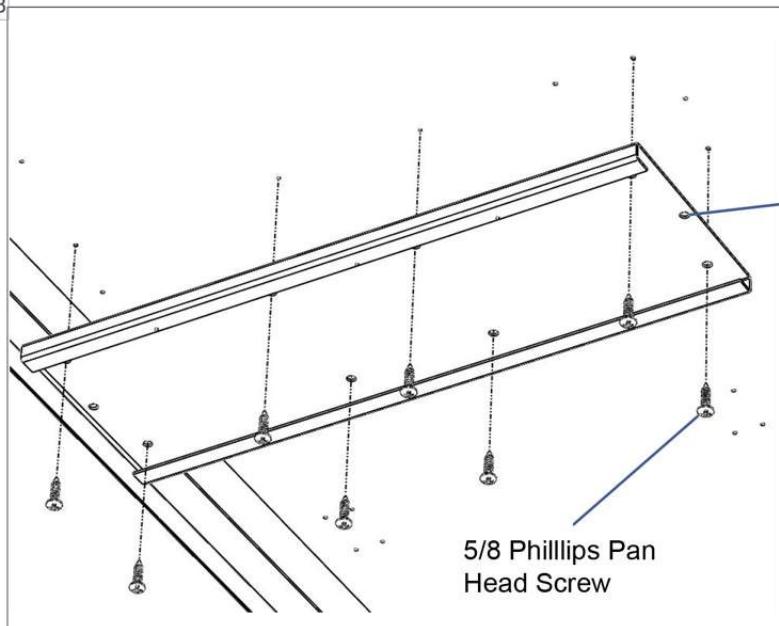

NOTE: Do not put screw here.

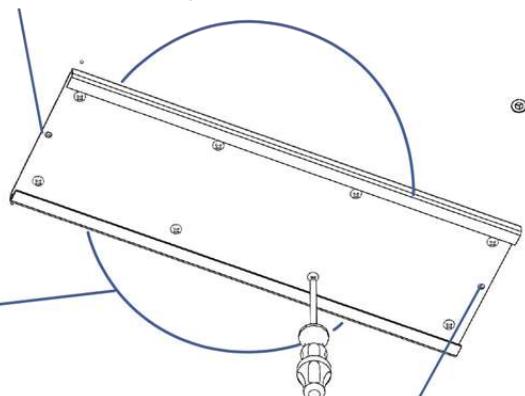

NOTE: Do not put screw here.


Step 4

5/8 Phillips Pan Head Screw




Qty:6

Attach the Keyboard Surface to the Keyboard Arm using six 5/8 Phillips Pan Head Screws.

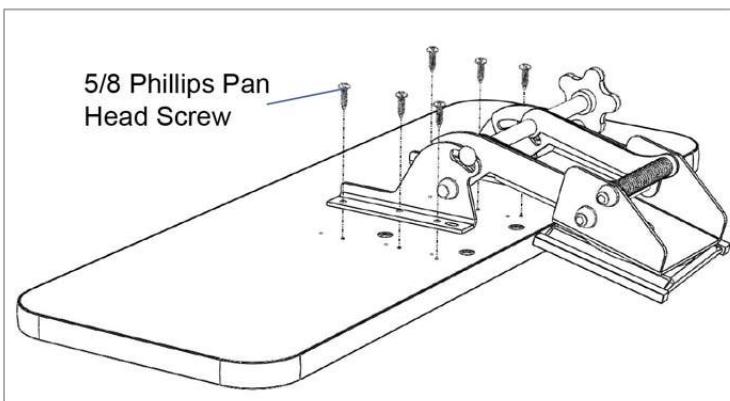

Keyboard Surface

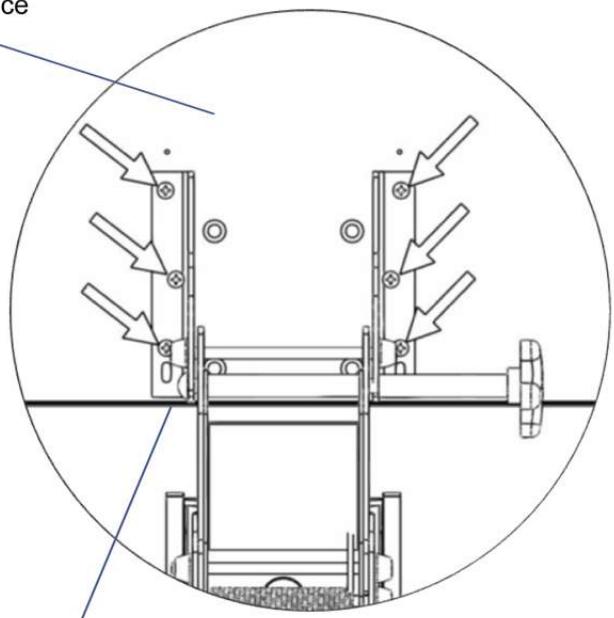

NOTE: Align back of Keyboard Surface to back of Keyboard Arm mounting surface.

NOTE: Some holes will not be used due to different keyboard configurations



VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA




Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step 5

If a table or desk includes a Front Cross Support beam, remove it. Otherwise, skip to Step 6.

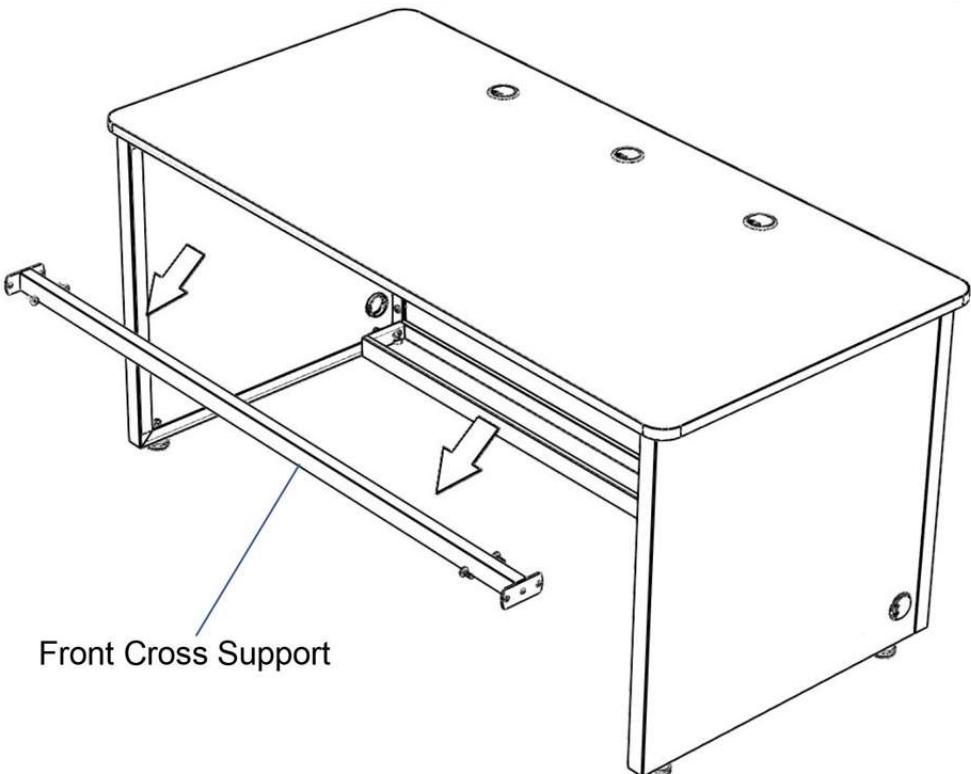

NOTE: Most of Versa Tables use Front Cross Support and can be removed with 4mm hex key.

Step 6

5/8 Phillips Pan Head Screw



Qty:4

Back Bumper




Qty:1

Front Bumper



Qty:1

Slide on the Keyboard Arm and rotate it to a side.
Screw in the Front and Back Bumpers with 5/8 Phillips Pan Head Screws.

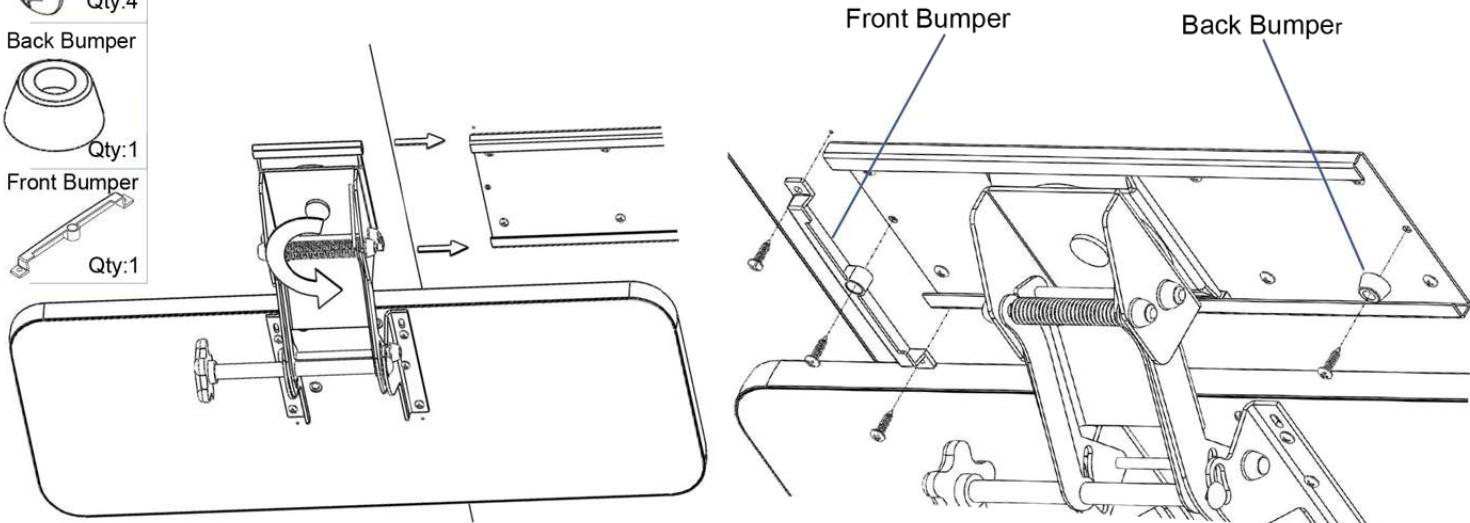

Step 7

If Front Cross Support was removed during Step 5, reattach it.