


ข้อที่ตอบผิด — CCNA 200-301 (Practice)

ตรวจแล้ว 8 ข้อ · ถูก 2 ข้อ (25%) · ผิด 6 ข้อ · 28/8/2569


ข้อ 1 · Question #448 · Single choice

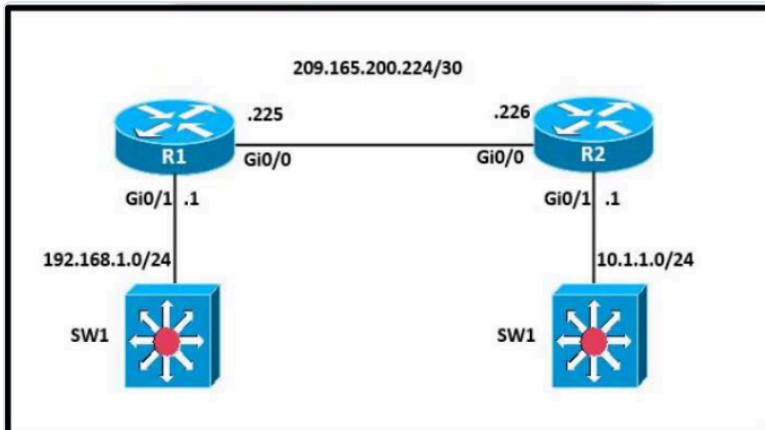

Refer to the exhibit. A network engineer is in the process of establishing IP connectivity between two sites. Routers R1 and R2 are partially configured with IP addressing. Both routers have the ability to access devices on their respective LANs. Which command set configures the IP connectivity between devices located on both LANs in each site?

- A. R1 ip route 192.168.1.1 255.255.255.0 GigabitEthernet0/1 / R2 ip route 10.1.1.1 255.255.255.0 GigabitEthernet0/1
- B. R1 ip route 192.168.1.0 255.255.255.0 GigabitEthernet0/0 / R2 ip route 10.1.1.1 255.255.255.0 GigabitEthernet0/0
- C. R1 ip route 0.0.0.0 0.0.0.0 209.165.200.225 / R2 ip route 0.0.0.0 0.0.0.0 209.165.200.226
- D. R1 ip route 0.0.0.0 0.0.0.0 209.165.200.226 / R2 ip route 0.0.0.0 0.0.0.0 209.165.200.225

ข้อ 2 · Question #659 · Multiple choice · choose 2

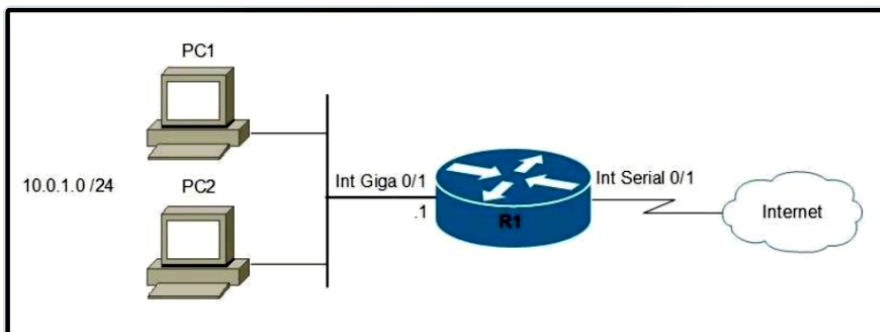

Refer to the exhibit. Which two commands must be configured on router R1 to enable the router to accept secure remote-access connections? (Choose two.)

- A. crypto key generate rsa
- B. username cisco password 0 cisco
- C. transport input telnet
- D. ip ssh pubkey-chain
- E. login console

ข้อ 3 · Question #874 · Multiple choice · choose 2

Refer to the exhibit. A network engineer configures the CCNA WLAN so that clients must reauthenticate hourly and to limit the number of simultaneous connections to the WLAN to 10. Which two actions complete this configuration? (Choose two.)

- A. Set the Maximum Allowed Clients value to 10.
- B. Set the Maximum Allowed Clients Per AP Radio value to 10.
- C. Enable the Wi-Fi Direct Clients Policy option
- D. Enable the Enable Session Timeout option and set the value to 3600.
- E. Enable the Client Exclusion option and set the value to 3600.

ข้อ 4 · Question #1937 · Single choice

Where are the real-time control functions processed in a split MAC architecture?

- A. Centralized cloud management platform
- B. Individual AP
- C. Client device
- D. Central WLC

ข้อ 6 · Question #931 · Multiple choice · choose 2

What are two benefits of private IPv4 addressing? (Choose two.)

- A. propagates routing information to WAN links
- B. provides external internet network connectivity
- C. reuses addresses at multiple sites
- D. conserves globally unique address space
- E. provides unlimited address ranges

ข้อ 8 · Question #1515 · Single choice

```
Router# show ip dhcp conflict
IP address      Detection method  Detection time
172.16.1.32     Ping             Feb 16 1998 12:28 PM
172.16.1.64     Gratuitous ARP   Feb 23 1198 08:12 AM
```

Refer to the exhibit. What happens to an IP address that is listed as a DHCP conflict?

- A. Only the IP detected by Ping is removed from the pool.
- B. Only the IP detected by Gratuitous ARP is removed from the pool.
- C. The IP will be shown, even after the conflict is resolved.
- D. The address is removed from the pool until the conflict is resolved.
- E. The address remains in the pool until the conflict is resolved.

ข้อ 1 — D. R1 ip route 0.0.0.0 0.0.0.0 209.165.200.226 / R2 ip route 0.0.0.0 0.0.0.0 209.165.200.225

ข้อ 2 — A. crypto key generate rsa | B. username cisco password 0 cisco

ข้อ 3 — A. Set the Maximum Allowed Clients value to 10. | D. Enable the Enable Session Timeout option and set the value to 3600.

ข้อ 4 — B. Individual AP

ข้อ 6 — C. reuses addresses at multiple sites | D. conserves globally unique address space

ข้อ 8 — D. The address is removed from the pool until the conflict is resolved.