


ข้อที่ตอบผิด — CCNA 200-301 (Practice)

ตรวจแล้ว 8 ข้อ · ถูก 2 ข้อ (25%) · ผิด 6 ข้อ · 28/8/2569

ข้อ 1 · Question #448 · Single choice

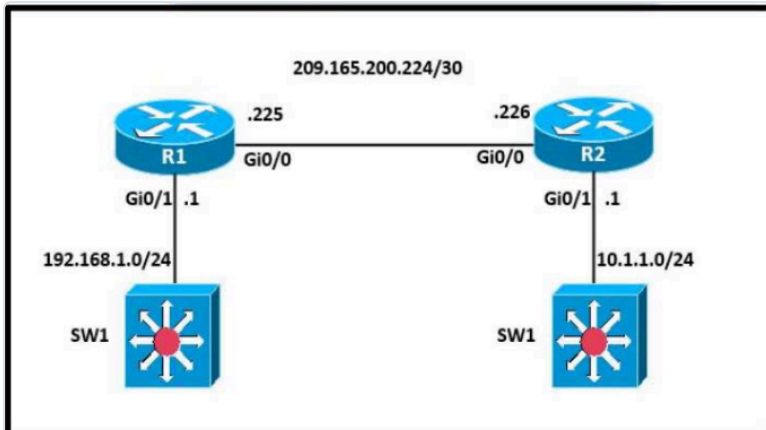


Refer to the exhibit. A network engineer is in the process of establishing IP connectivity between two sites. Routers R1 and R2 are partially configured with IP addressing. Both routers have the ability to access devices on their respective LANs. Which command set configures the IP connectivity between devices located on both LANs in each site?

- A. R1 ip route 192.168.1.1 255.255.255.0 GigabitEthernet0/1 / R2 ip route 10.1.1.1 255.255.255.0 GigabitEthernet0/1
- B. R1 ip route 192.168.1.0 255.255.255.0 GigabitEthernet0/0 / R2 ip route 10.1.1.1 255.255.255.0 GigabitEthernet0/0
- C. R1 ip route 0.0.0.0 0.0.0.0 209.165.200.225 / R2 ip route 0.0.0.0 0.0.0.0 209.165.200.226
- D. R1 ip route 0.0.0.0 0.0.0.0 209.165.200.226 / R2 ip route 0.0.0.0 0.0.0.0 209.165.200.225

คำตอบ A. R1 ip route 192.168.1.1 255.255.255.0 GigabitEthernet0/1 / R2 ip route 10.1.1.1 255.255.255.0 GigabitEthernet0/1

เฉลย D. R1 ip route 0.0.0.0 0.0.0.0 209.165.200.226 / R2 ip route 0.0.0.0 0.0.0.0 209.165.200.225

ข้อ 2 · Question #659 · Multiple choice · choose 2

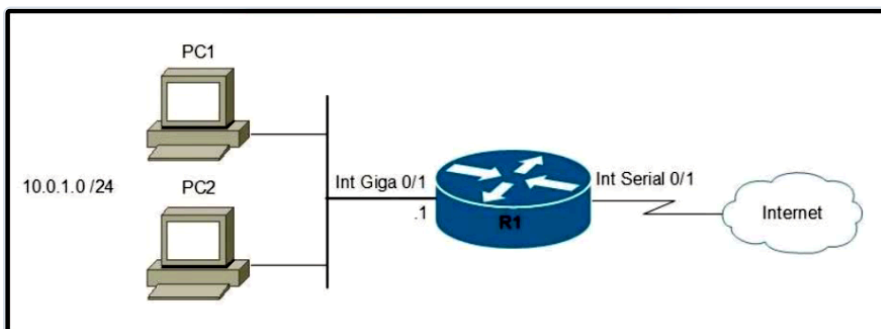

Refer to the exhibit. Which two commands must be configured on router R1 to enable the router to accept secure remote-access connections? (Choose two.)

- A. crypto key generate rsa
- B. username cisco password 0 cisco
- C. transport input telnet
- D. ip ssh pubkey-chain
- E. login console

คำตอบ A. crypto key generate rsa

เฉลย A. crypto key generate rsa
B. username cisco password 0 cisco

ข้อ 3 · Question #874 · Multiple choice · choose 2

WLANs > Edit 'CCNA'

General | Security | QoS | Policy-Mapping | **Advanced**

Allow AAA Override ☐ Enabled
Coverage Hole Detection ☐ Enabled
Enable Session Timeout ☒ Session Timeout (secs) 3600
Aironet IE ☐ Enabled
Diagnostic Channel 48 ☐ Enabled
Override Interface ACL IPv4 None IPv6 None
Layer2 Act None
P2P Blocking Action Disabled
Client Exclusion ☐ Enabled Timeout Value (secs) 0
Maximum Allowed Clients 10
Static IP Tunneling ☐ Enabled
Wi-Fi Direct Clients Policy Disabled
Maximum Allowed Clients Per AP Radio 200
Clear HotSpot Configuration ☐ Enabled
Client user idle timeout(15-100000) 0
Client user idle threshold (0-10000000) 0 Bytes

DHCP
DHCP Server ☐ Override
DHCP Addr. Assignment ☐ Required

OEAP
Split Tunnel ☐ Enabled

Management Frame Protection (MFP)
MFP Client Protection 4 Optional
DTIM Period (in beacon intervals)
802.11a/n (1 - 255) 1
802.11b/g/n (1 - 255) 1

NAC
NAC State None
Load Balancing and Band Select
Client Load Balancing ☐

Refer to the exhibit. A network engineer configures the CCNA WLAN so that clients must reauthenticate hourly and to limit the number of simultaneous connections to the WLAN to 10. Which two actions complete this configuration? (Choose two.)

- A. Set the Maximum Allowed Clients value to 10.
- B. Set the Maximum Allowed Clients Per AP Radio value to 10.
- C. Enable the Wi-Fi Direct Clients Policy option
- D. Enable the Enable Session Timeout option and set the value to 3600.
- E. Enable the Client Exclusion option and set the value to 3600.

คำตอบ A. Set the Maximum Allowed Clients value to 10.

เฉลย A. Set the Maximum Allowed Clients value to 10.

D. Enable the Enable Session Timeout option and set the value to 3600.

ข้อ 4 · Question #1937 · Single choice

Where are the real-time control functions processed in a split MAC architecture?

- A. Centralized cloud management platform
- B. Individual AP
- C. Client device
- D. Central WLC

คำตอบ A. Centralized cloud management platform

เฉลย B. Individual AP

ข้อ 6 · Question #931 · Multiple choice · choose 2

What are two benefits of private IPv4 addressing? (Choose two.)

- A. propagates routing information to WAN links
- B. provides external internet network connectivity
- C. reuses addresses at multiple sites
- D. conserves globally unique address space
- E. provides unlimited address ranges

คำตอบ A. propagates routing information to WAN links

เฉลย C. reuses addresses at multiple sites

D. conserves globally unique address space

ข้อ 8 · Question #1515 · Single choice

```
Router# show ip dhcp conflict
IP address      Detection method  Detection time
172.16.1.32     Ping             Feb 16 1998 12:28 PM
172.16.1.64     Gratuitous ARP   Feb 23 1198 08:12 AM
```

Refer to the exhibit. What happens to an IP address that is listed as a DHCP conflict?

- A. Only the IP detected by Ping is removed from the pool.
- B. Only the IP detected by Gratuitous ARP is removed from the pool.
- C. The IP will be shown, even after the conflict is resolved.
- D. The address is removed from the pool until the conflict is resolved.
- E. The address remains in the pool until the conflict is resolved.

คำตอบ A. Only the IP detected by Ping is removed from the pool.
เฉลย D. The address is removed from the pool until the conflict is resolved.