

SEW

VOLTAGE / CONTINUITY TESTER



- Voltage test: 12V to 1000V AC/DC (8 LEDs) with indication by buzzer.
- Voltage range: 12V, 24V, 50V, 120V, 230V, 400V, 750V, 1000V.
- Test leads positioned at 19mm apart.
- Interchangeable probe tip for 2mm and 4mm.
- Polarity test : LED +/-
- Audible continuity test.
- Phase rotation test : (/)
- Self-test button to ensure proper function of the device prior to testing.
- Waterproof design, protection class: IP65.
- Phase / Neutral identification.
- Rubberized double-molded housing.
- ELCB / RCD trip test.
- Flashlight function.
- Safety standard :
IEC/EN 61010-1 CAT III 1000V
IEC/EN 61010-1 CAT IV 600V
IEC/EN 61243-3
EN 61326-1




STANDARD ELECTRIC WORKS CO., LTD.
www.sew.com.tw

5F., NO.105, JHONGCHENG RD., TUCHENG DIST.,
NEW TAIPEI CITY 23674, TAIWAN (R.O.C.)
TEL: 886-2-22681528
FAX: 886-2-22681529
e-mail: sales@sew.com.tw

Model
VOT-52

INSTRUMENT LAYOUT

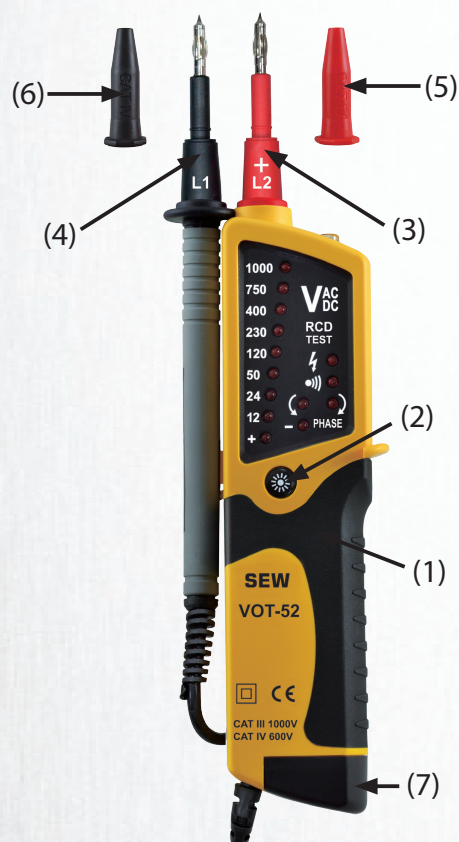

- (1) Rubberized injection housing
- (2) Flashlight & Self-test button
- (3) L2+, Red test probe
- (4) L1, Black test probe
- (5) Red protective cover
- (6) Black protective cover
- (7) Battery cover

SPECIFICATIONS

Voltage test	12V to 1000V AC/DC
Voltage range	12V, 24V, 50V, 120V, 230V, 400V, 750V, 1000V
Working frequency	40 ~ 65 Hz
Voltage protection	1100V AC / DC
Continuity range	< 200kΩ
Phase rotation test range	100V~1000V measure between 2 phases, instrument in hand
Operating temperature	0°C ~ 40°C
Operating humidity	80% R.H. Max.
Probe distance	19mm apart
Power source	1.5V (AAA) x 2
Dimensions	248(L) x 68(W) x 34(D)mm
Weight (battery included)	Approx. 215g
Safety standard	IEC/EN 61010-1 CAT III 1000V IEC/EN 61010-1 CAT IV 600V IEC/EN 61243-3 EN 61326-1
Accessories	Instruction manual Batteries