


● Pro-Range OE-775 Encoder

Two Channel Hall Effect Encoder

Operating relative humidity : 20%~85%RH

Operating temperature range: -40 ~+85



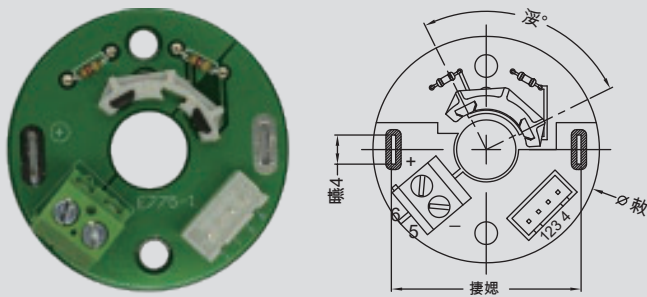

Two Channel Encoder Connections:

- 1.HALL SENSOR Vcc
- 2.HALL SENSOR GND
- 3.HALL SENSOR A Vout
- 4.HALL SENSOR B Vout
- 5.MOTOR -
- 6.MOTOR +


* This decoder is mainly installed on RS-755, RS-775 motors.
 * 3PPR,7PPR
 * Each turn output 3PPR,7PPR

Characteristics	Symbol	Test conditions	Min	Ref	Max	Units
Supply Voltage	Vcc	-----	4.5	--	24	V
Supply Current	Ice	-----	--	14	20	mA
Output Current	Ic	Vce=12V; Gauss<-170	--	<0.1	20	mA
Output Leakage Current	Icex	Output open; 25 [77]	--	--	10	μA
Output Rise Time	Tr	RL=820Ω; CL=20pF; 25	--	0.5	1.5	μS
Output Fall Time	Tf	RL=820Ω; CL=20pF; 25	--	0.2	1.5	μS


ELECTRICAL CHARACTERISTICS

At V=4.5V to 24V with 20mA load with Ta=-40 to 125 [-77 to 257] unless otherwise noted.

Output Circuit

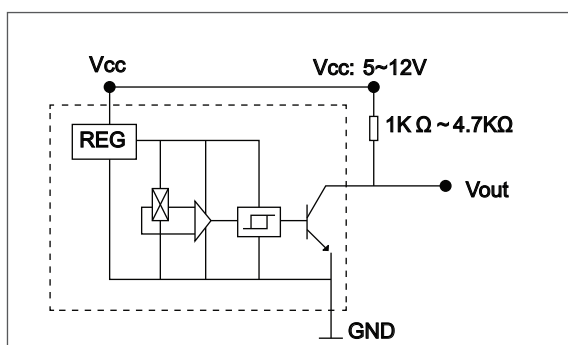

Output Wave

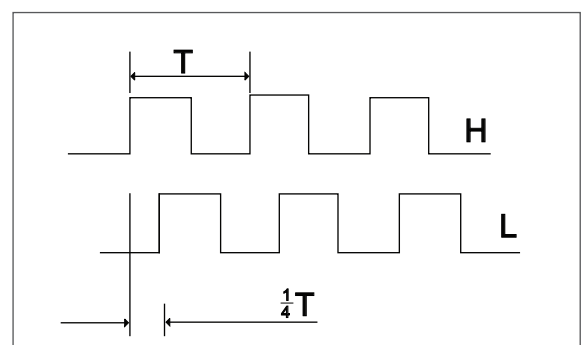

○ The above parameters are for reference only.