



PRODUCT BULLETIN

Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil

API SP/ ILSAC GF-6A

PRODUCT #097 / License# D33007DJ016

CAM2 Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil is a superior quality full synthetic engine oil specially formulated for and licensed by General Motors to meet their new Global Engine Oil Specification. **CAM2 Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil** is formulated with select synthetic base oils and advanced additive technology for 100% FULL SYNTHETIC licensed API SP and ILSAC GF-6A multi-grade engine oil.


CAM2 Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil is a premium quality motor oil developed for vehicles operating under severe driving conditions or extreme temperatures and provides superior sludge suspension, unsurpassed engine cleaning and increased compatibility with ethanol blended fuels.

CAM2 Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil provides outstanding wear protection and far exceeds the most stringent car manufacturer requirements for cleaning and protection. This product also helps reduce oil consumption and provides exceptional cold flow properties.

CAM2 Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil meets or exceeds the latest API SP classification and ILSAC GF-6A, as well as all previous service classifications: API SN Plus, SN, etc. and ILSAC GF-5, GF-4, etc. **CAM2 Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil** can be used in virtually all services for all gasoline engines, domestic and foreign. **CAM2 Synavex™ dexos™1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil** is fully compatible with all other synthetic and petroleum-based engine oils.

FEATURES

- Excellent for passenger cars, light duty trucks, SUVs, and gas/electric hybrid vehicles
- Protects turbo-charged engines against LSPI (Low Speed Pre-Ignition)
- Prolongs engine life by extending drain intervals
- Excellent protection under severe operating conditions
- Controls sludge and high temperature deposits from forming

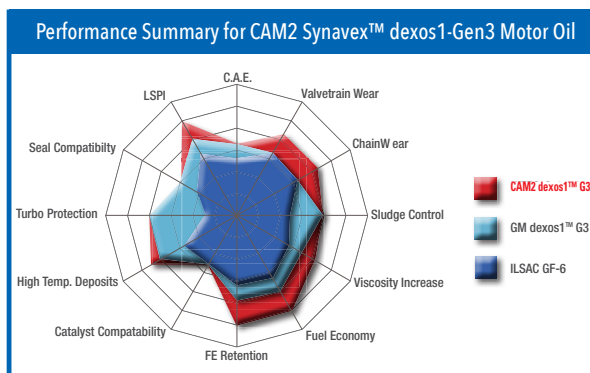

See Technical Data on pg 2.

CAM2 INTERNATIONAL, LLC
211 Violet Street Suite 100 • Golden, CO 80401
Telephone 800/338-2262 • Fax: 303/679-8988
www.CAM2.com



PRODUCT BULLETIN

Synavex™ dexos™ 1 Gen 3 SAE 0W-20 Full Synthetic Motor Oil

API SP/ ILSAC GF-6A

PRODUCT #097 / License# D33007DJ016

APPLICATIONS

CAM2 Synavex™ dexos™ 1- Gen 3 SAE 0W-20 Full Synthetic Motor Oil may be recommended for the following uses:

- When licensed GM dexos1™ - Gen 3 is required
- When API SP, SN Plus, and SN oils are required
- When ILSAC GF-6A, GF-5, and GF-4 oils are required
- When GM 17332, GMW 16182, GM 4718M, GM 6094M, GMW 16076, GMW 16181 is required
- When Ford WSS-M2C962-A1 (0W-20), WSS-M2C963-A1 (0W-30), WSS-M2C960-A1 (5W-20), WSS-M2C961-A1 (5W-30) is required
- When Ford WSS-M2C947-B1 (0W-20), WSS-M2C953-B1 (0W-30), WSS-M2C945-A1 (5W-20), WSS-M2C946-A1 (5W-30) is required
- When Chrysler MS-6395 is required
- When Honda/Acura HTO-06 is required
- In naturally aspirated gasoline engines and turbo-charged engines

TYPICAL DATA

SAE GRADE	0W-20
Product Code	80565-097
Viscosity @ 40°C, cSt	44.2
Viscosity @ 100°C, cSt	8.4
Viscosity Index	171
Flash Point: °C	225/437
Pour Point: °C	-45/-49
TBN	7.8
Color	2.8

Contact your CAM2 representative or CAM2 distributor for additional information.

CAM2 INTERNATIONAL, LLC

211 Violet Street Suite 100 • Golden, CO 80401

Telephone 800/338-2262 • Fax: 303/679-8988

www.CAM2.com