



GRIZZLY[®] ULV SPRAYER

Strong, durable, and powerful, the Grizzly[®] ULV sprayer delivers the force needed to tackle large-scale mosquito control application challenges.


The Grizzly ULV sprayer is a cold aerosol generator built with an 18 HP Over Head Valve (OHV) engine and capable of applying insecticide products at rates up to 18 ounces per minute. Its heavy-duty performance makes it a perfect choice for public health mosquito control professionals.

DISCOVER THE CLARKE ADVANTAGE TODAY:

- Laminar air flow nozzle with 360° swivel
- 10.25-gallon aluminum gas tank (EPA approved)
- All steel construction with Z-base rails for easier vehicle mounting
- Remote engine start/stop/choke/flush
- SmartFlow II included for variable and constant flow rate control
- Meets all droplet size requirements for ground ULV products
- Meets U.S. EPA Phase III exhaust and evaporative emission requirements
- Backed by Clarke's control consultants and technical experts

SPECIFICATIONS

Engine	18 HP (694cc)
Blower	350 CFM @ 10 P.S.I.
Weight	475 lbs. (216 kg.)
Nozzle	Laminar air flow design
Dimensions	54"Lx42"Wx42"H
Formulation Tank	15 gal. (56.7 liter)
Flush Tank	1 gal. (3.8 liter)
Fuel Tank	10.25 gal. (38.8 liter) (121.9cmLx99cmWx91.4cmH)
Flow Rate ULV	18 oz./min. (532ml)

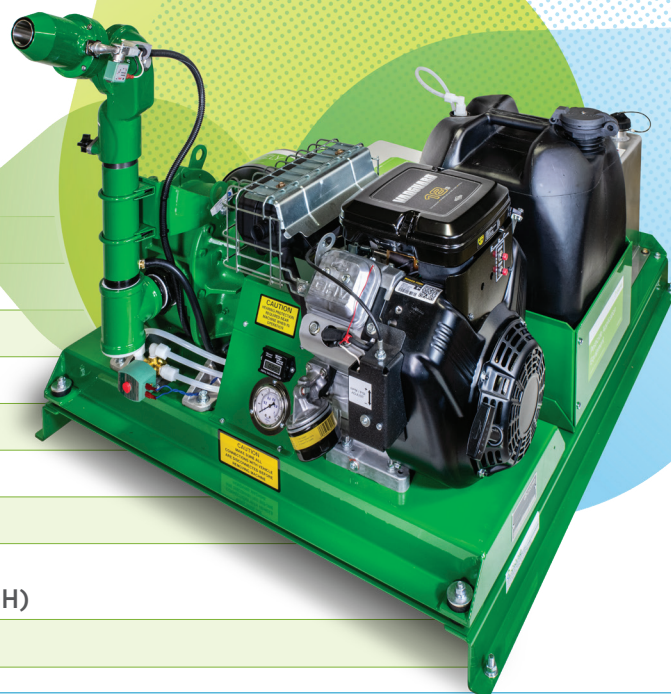

About the Smartflow II

Clarke's Smartflow II flow control system comes standard with all Clarke's ULV spray machines. It offers unprecedented accuracy and precision and can be used in tandem with GPS for variable flow. With three preprogrammed rates, you can store product-specific application details in the system and adapt quickly to varying field conditions.




GRIZZLY® ULV SPRAYER

Engine	18 HP (694cc)
Blower	350 CFM @ 10 P.S.I.
Weight	475 lbs. (216 kg.)
Nozzle	Laminar air flow design
Dimensions	54"Lx42"Wx42"H
Formulation Tank	15 gal. (56.7 liter)
Flush Tank	1 gal. (3.8 liter)
Fuel Tank	10.25 gal. (38.8 liter) (121.9cmLx99cmWx91.4cmH)
Flow Rate ULV	18 oz./min. (532ml)



COUGAR® ULV SPRAYER

Engine	10 HP (305cc)
Blower	105 CFM @ 3600 RPM
Weight	250 lbs. (112 kg.)
Nozzle	Laminar air flow design
Dimensions	42"Lx38"Wx43"H (107cmLx91cmWx102cmH)
Max Flow Rate ULV	18 oz./min. (532ml)
Formulation Tank	15 gal. (56.7 liter)
Flush Tank	2 qt. (1.9 liter)
Fuel Tank	2.84 gal. (10.7 liter)

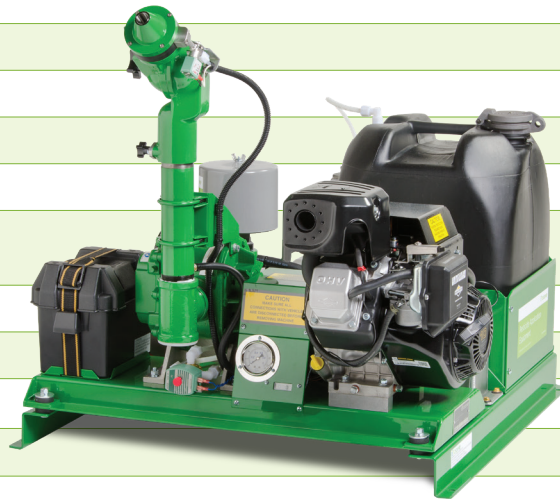

PRO-MIST® DURA ELECTRIC ULV SPRAYER

Weight	140 lbs. (46kg) (+ battery weight)
Dimensions	40"Lx28"Wx29.5"H (107cmLx71cmWx94cmH)
Noise Level	80 db or less at nozzle
Pumping System	FMI carbon/ceramic
Power Requirements	12 volt operation
Flow Control System	Smartflow II
Formulation Tank	15 gal. (56.7 liter)



Learn more about Clarke's full line of ULV spray equipment and find the best fit for your mosquito control program at Clarke.com!



Making communities around the world more livable, safe and comfortable.

GLOBAL HEADQUARTERS

675 Sidwell Court, Saint Charles, IL 60174 USA

Phone: 1.630.894.2000 Fax: 630.443.3070

www.clarke.com