US012389828B2

(12) **United States Patent** (10) **Patent No.: US 12,389,828 B2**
Long (45) **Date of Patent: Aug. 19, 2025**

(54) **SYSTEM AND METHOD FOR AN AGRICULTURAL APPLICATOR**

(71) Applicant: **CNH Industrial America LLC**, New Holland, PA (US)

(72) Inventor: **Scott Allen Long**, Plainfield, IL (US)

(73) Assignee: **CNH Industrial America LLC**, New Holland, PA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 865 days.

(21) Appl. No.: **17/544,484**

(22) Filed: **Dec. 7, 2021**

(65) **Prior Publication Data**

US 2023/0172108 A1 Jun. 8, 2023

(51) **Int. Cl.**
A01D 43/14 (2006.01)
A01D 41/127 (2006.01)
A01M 7/00 (2006.01)
(52) **U.S. Cl.**
CPC ***A01D 43/14*** (2013.01); ***A01D 41/127*** (2013.01); ***A01M 7/0089*** (2013.01)
(58) **Field of Classification Search**
CPC A01D 43/14; A01D 41/127; A01M 7/0089
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2020/0337235 A1*	10/2020	Blank	....	A01M 21/043
2021/0243950 A1*	8/2021	Blank	....	A01M 21/02
2022/0132723 A1*	5/2022	Anderson	....	G01C 21/20
				701/25
2022/0192174 A1*	6/2022	Humpal	....	A01M 7/0042
2022/0327815 A1*	10/2022	Picon Ruiz	....	G06T 7/001
2024/0000002 A1*	1/2024	Kiepe	....	A01M 7/0096

* cited by examiner
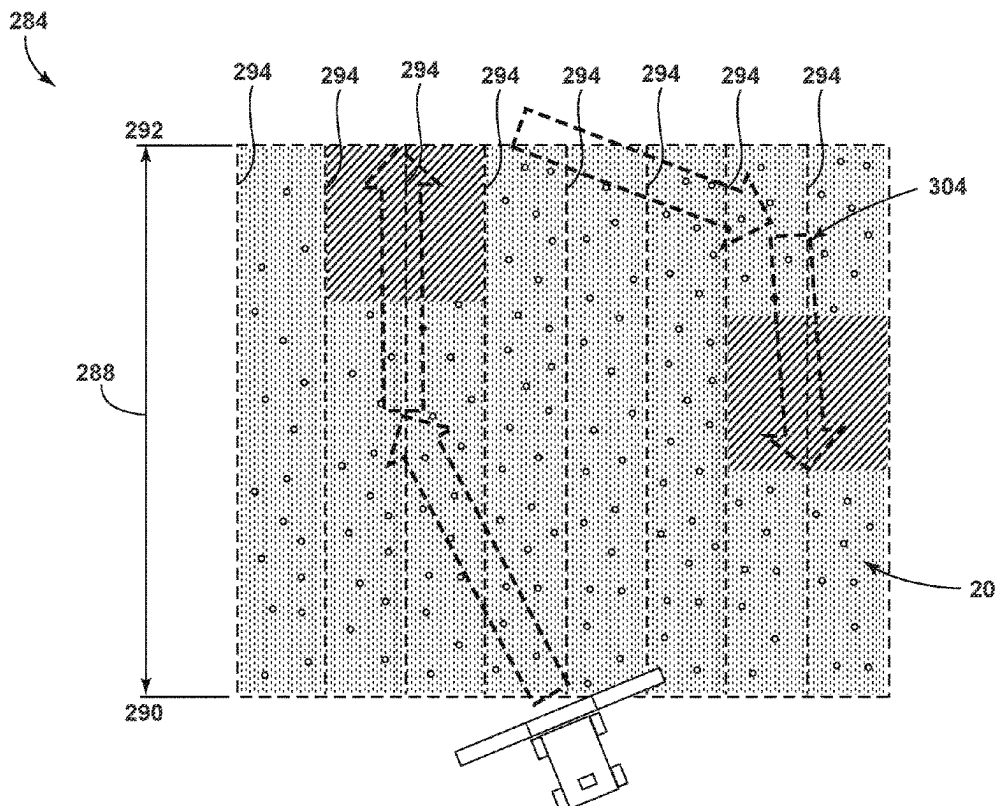
Primary Examiner — James J Lee
Assistant Examiner — Andrew Sang Kim
(74) *Attorney, Agent, or Firm* — Dority & Manning, P.A.

(57) **ABSTRACT**

A system for an agricultural operation includes a harvester configured to separate crop material into a harvest material and a non-harvest material. A crop material sensor is operably coupled with the harvester and is configured to capture crop material data. A positioning device is configured to generate location data to geolocate the crop material data relative to a field. A computing system is communicatively coupled with the crop material sensor and the positioning device. The computing system is configured to classify objects within the crop material data as harvest material or non-harvest material generate a map based on the harvest material and the non-harvest material.
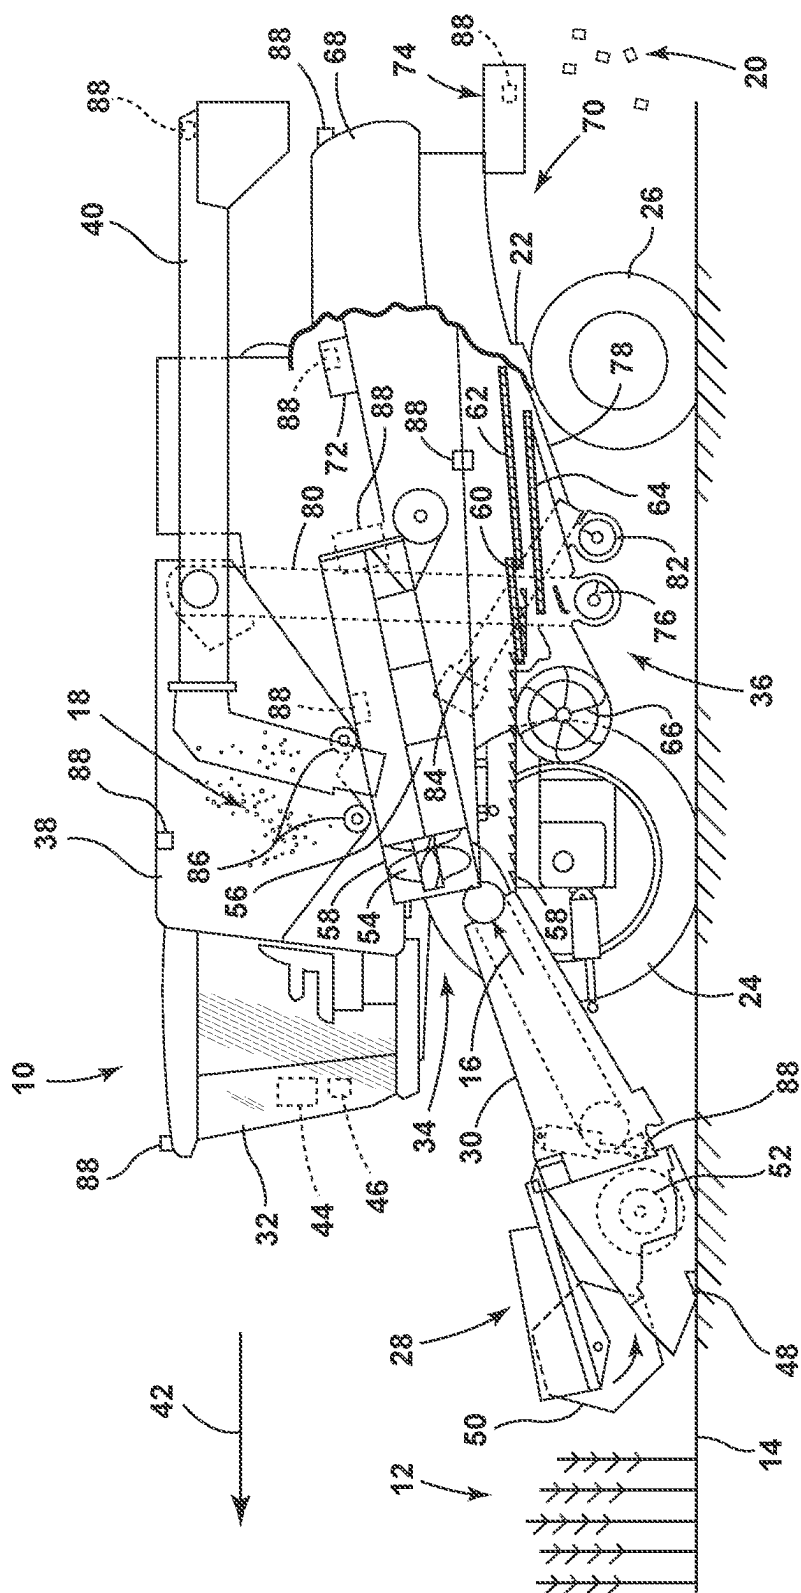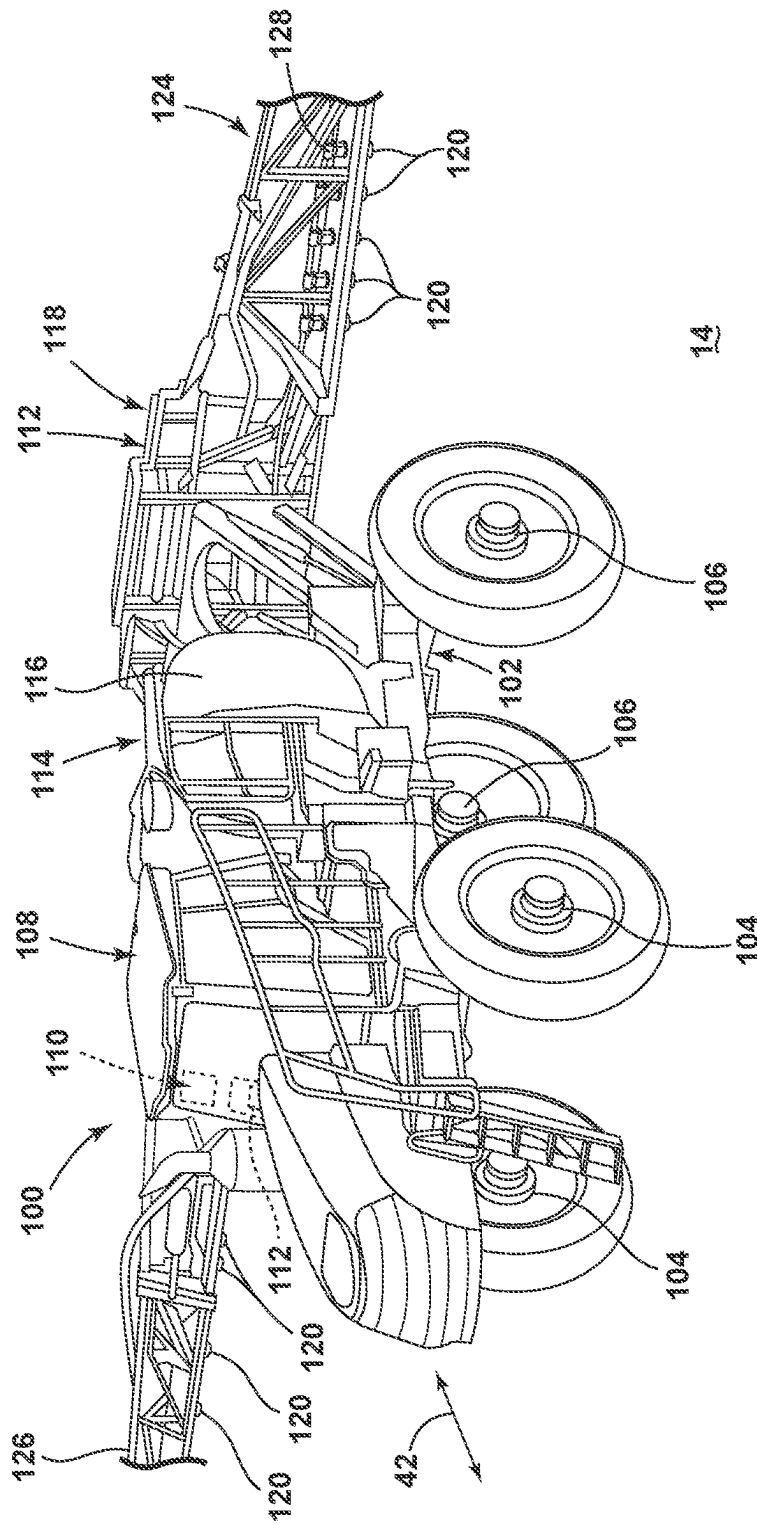
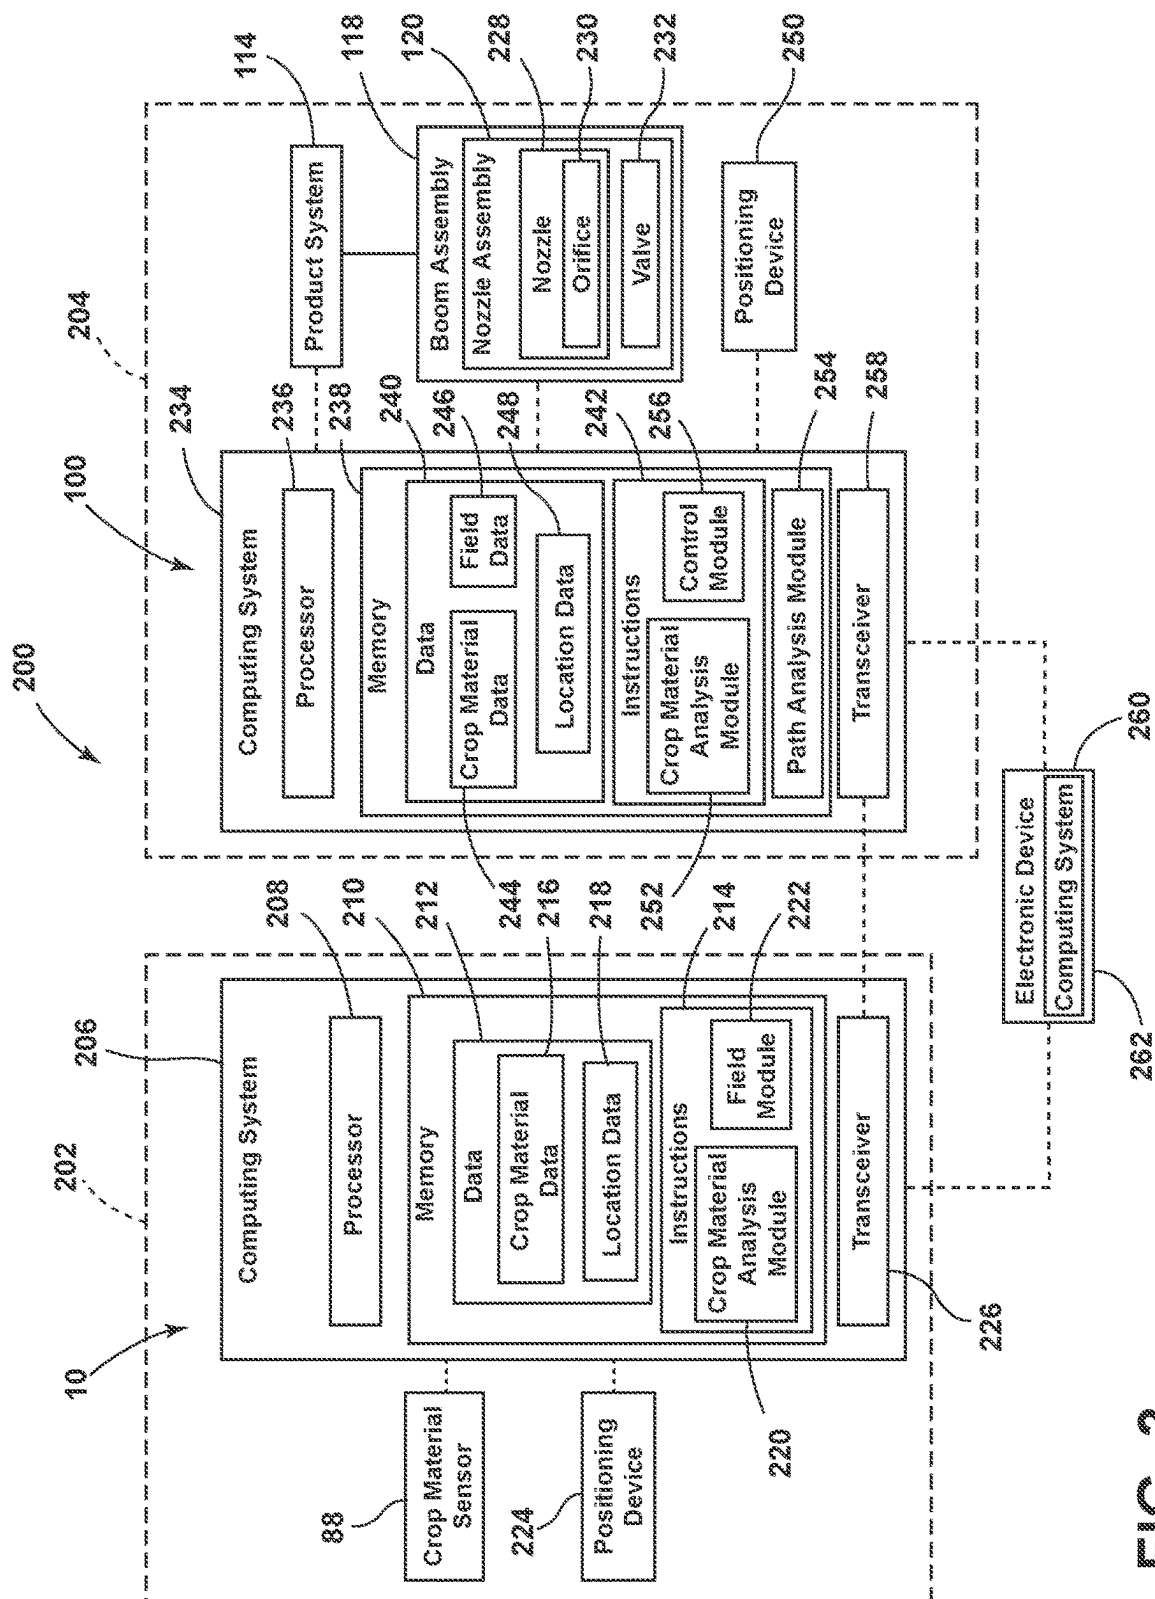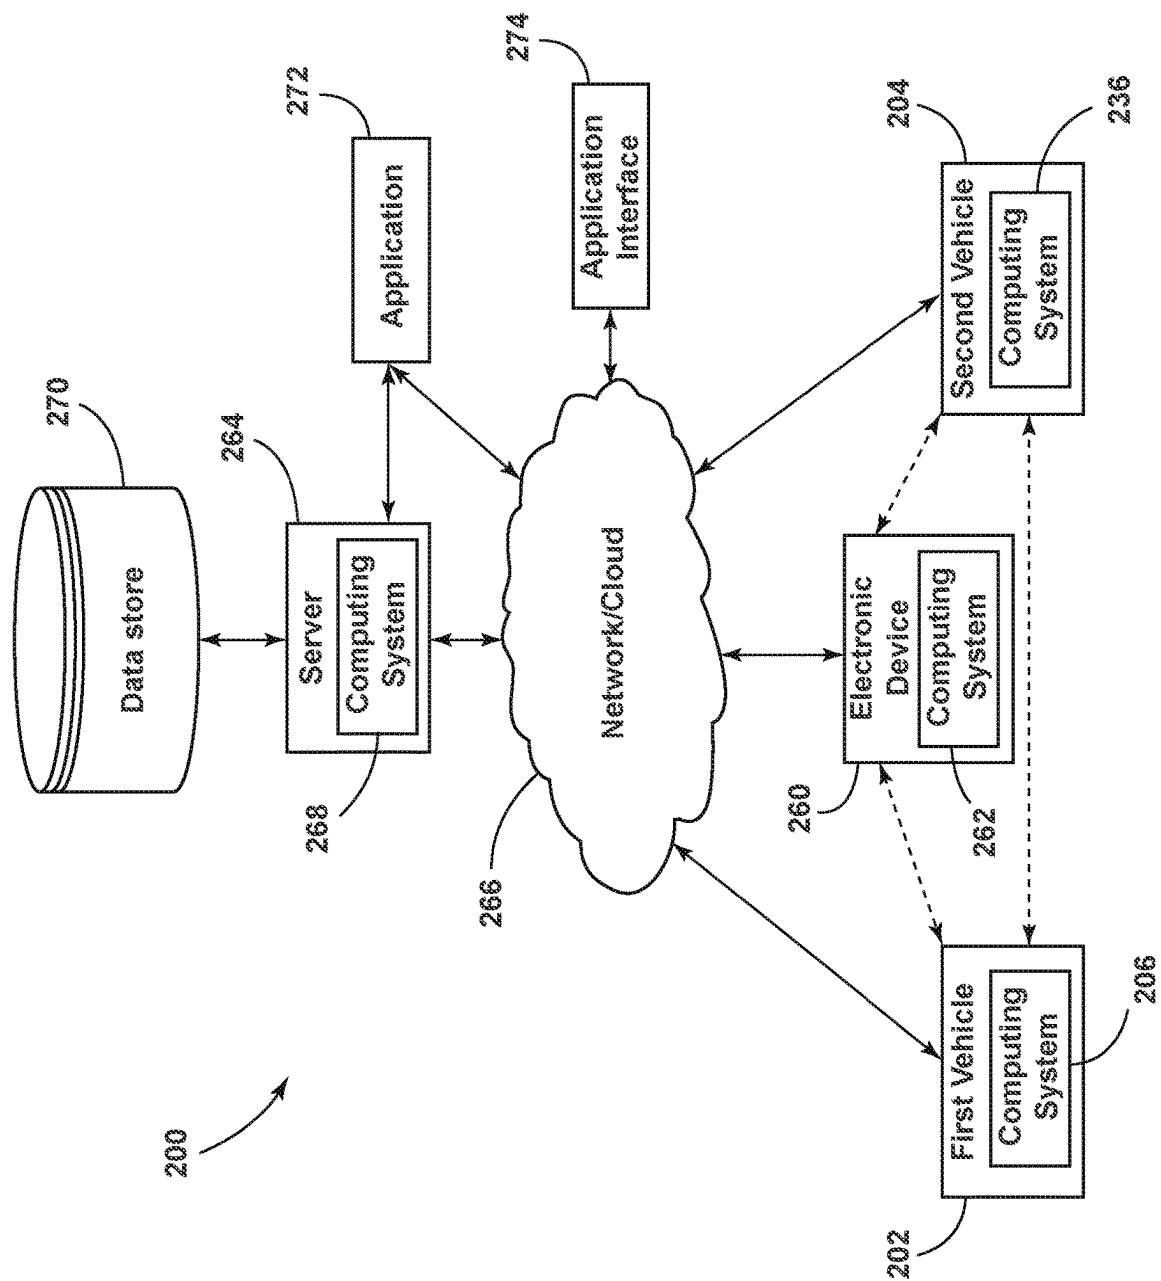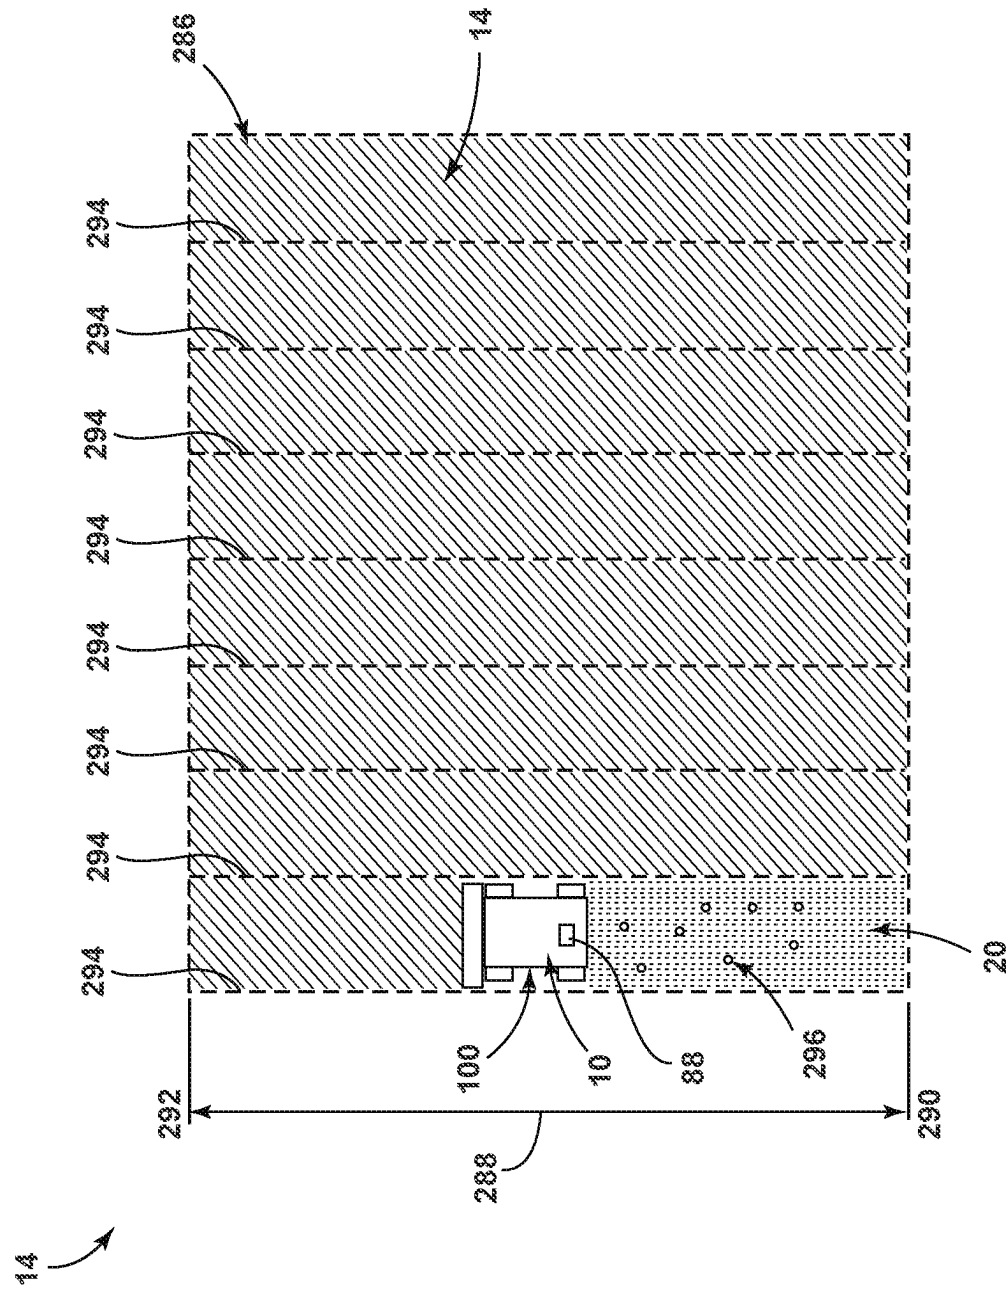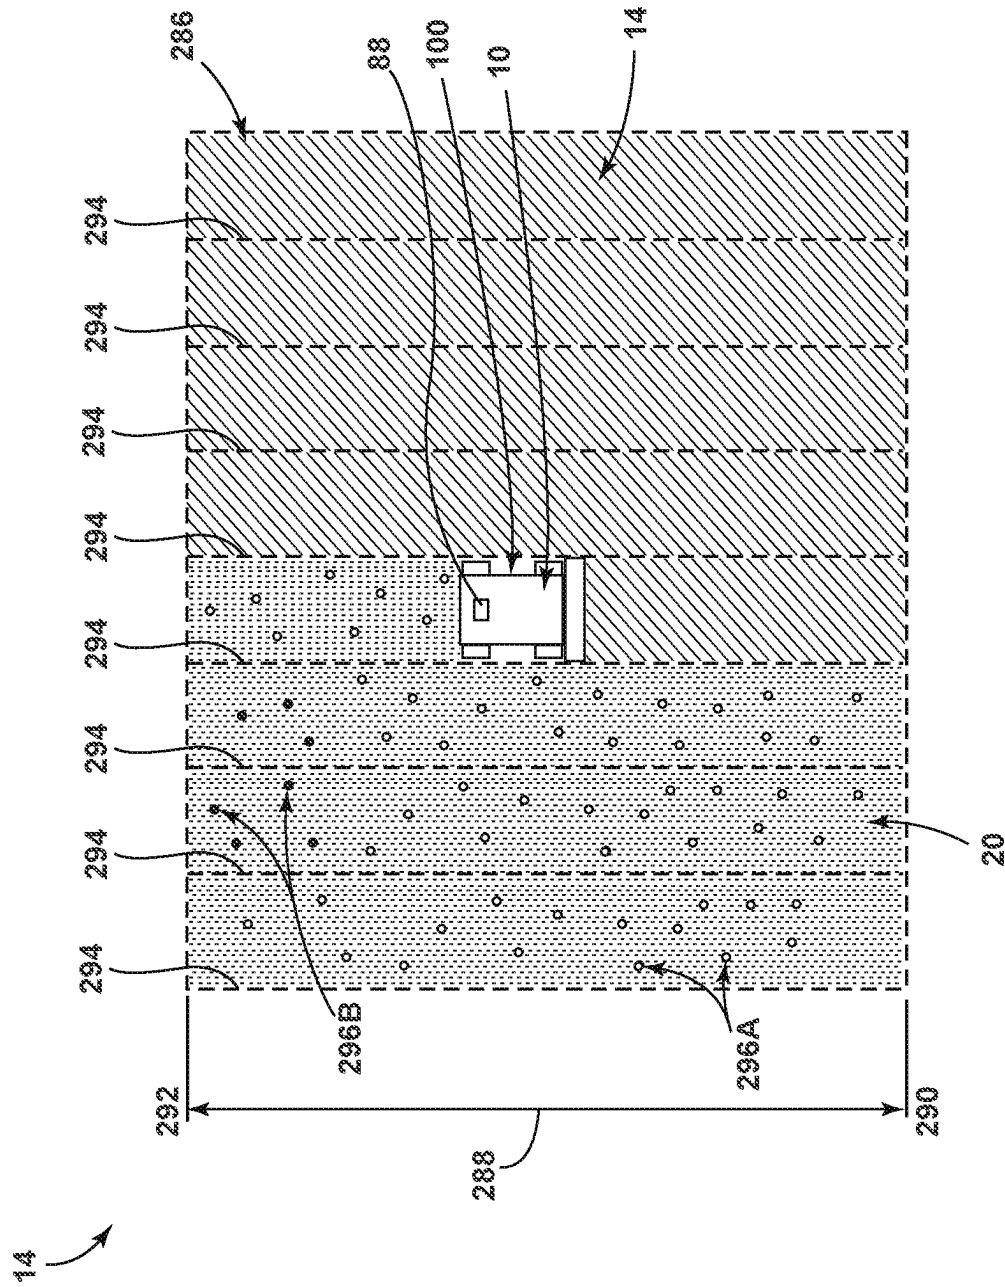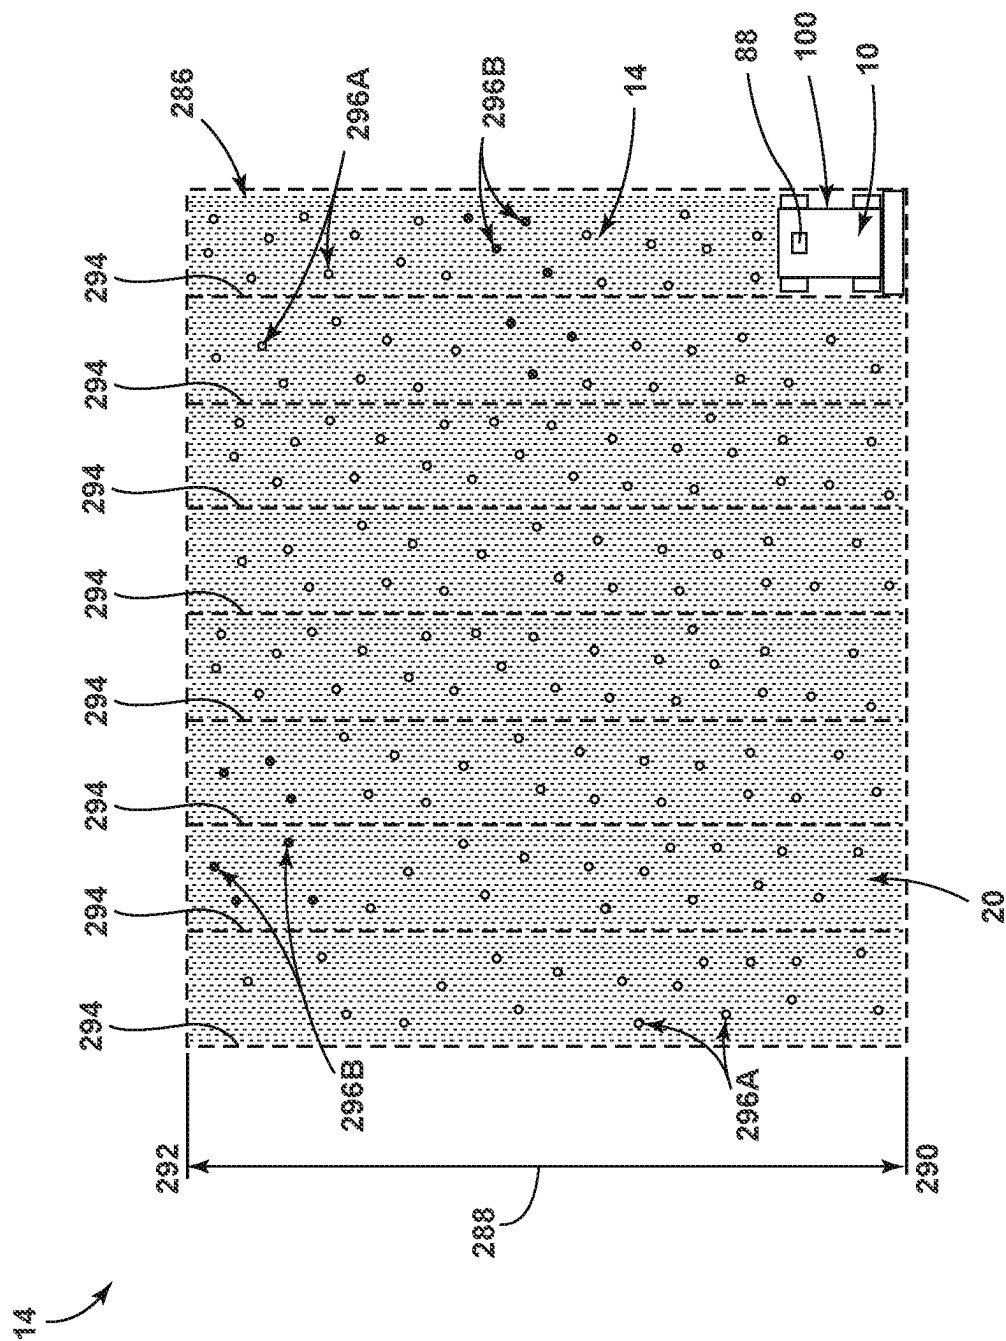**19 Claims, 13 Drawing Sheets**

FIG. 1

FIG. 2

FIG. 3

FIG. 4

FIG. 5

FIG. 6

FIG. 7
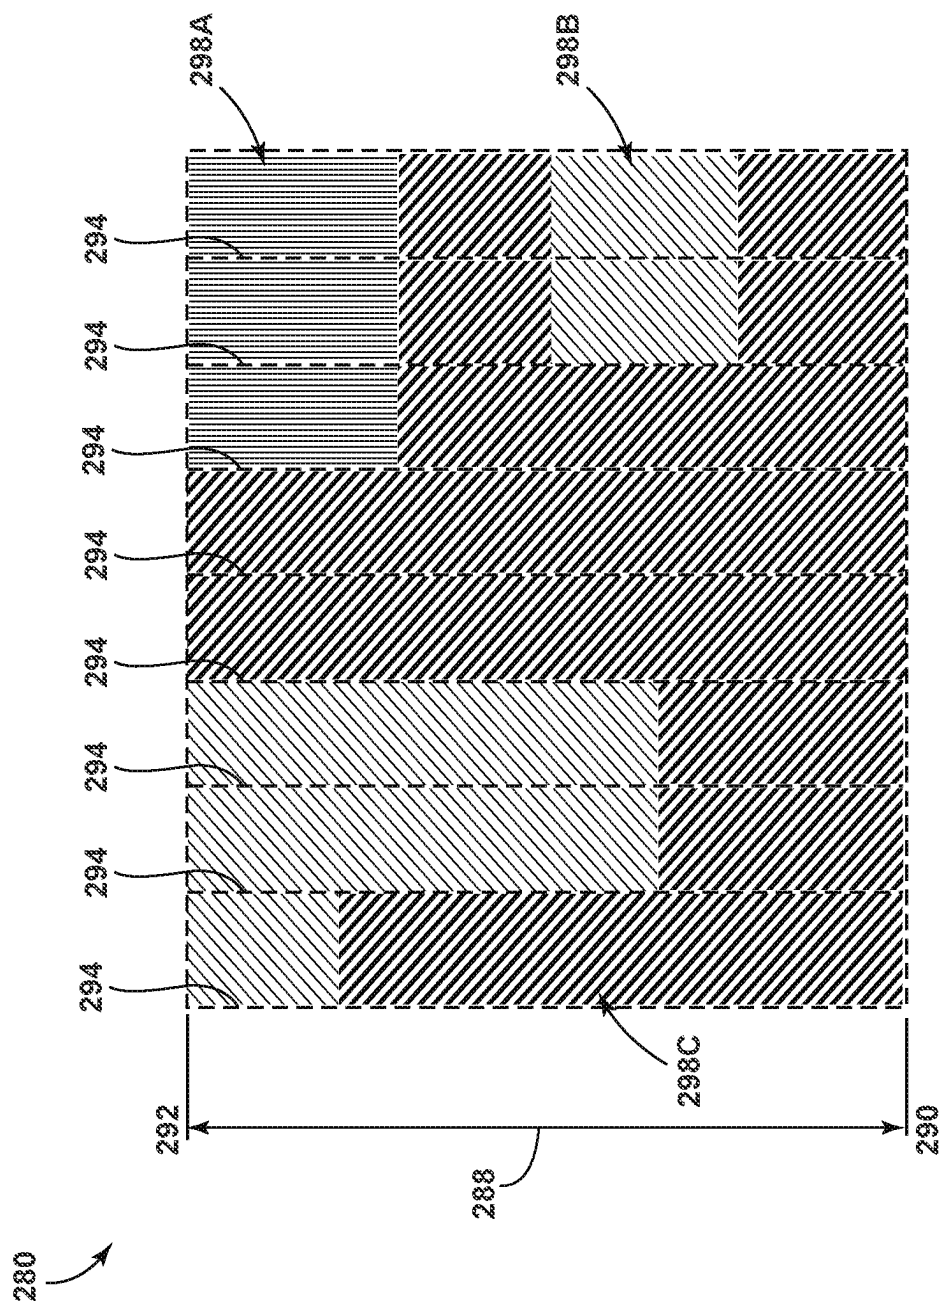
FIG. 8

FIG. 9

FIG. 10

FIG. 11

FIG. 12

400

| Capture, from a crop material sensor, crop material data while processing crop material through a harvester | 402 |

| Classify objects within the crop material data as harvest material or non-harvest material | 404 |

| Determine a harvest volume of the harvest material within one or more regions of a field | 406 |

| Determine a non-harvest volume of the non-harvest material within one or more regions of the field | 408 |

| Determine the one or more regions of the field having the harvest volume exceeding a defined volume range | 410 |

| Identify one or more of the objects within the non-harvest material as weeds | 412 |

| Generate a mop based on the harvest material and the non-harvest material | 414 |

| Generate one or more suggested paths for a sprayer based on the prescription map | 416 |

FIG. 13

SYSTEM AND METHOD FOR AN AGRICULTURAL APPLICATOR

FIELD

The present disclosure generally relates to agricultural vehicles for performing operations within a field.

BACKGROUND

Agricultural vehicles perform various operations within a field. For example, an agricultural harvesters to harvest and process crops while agricultural applicators (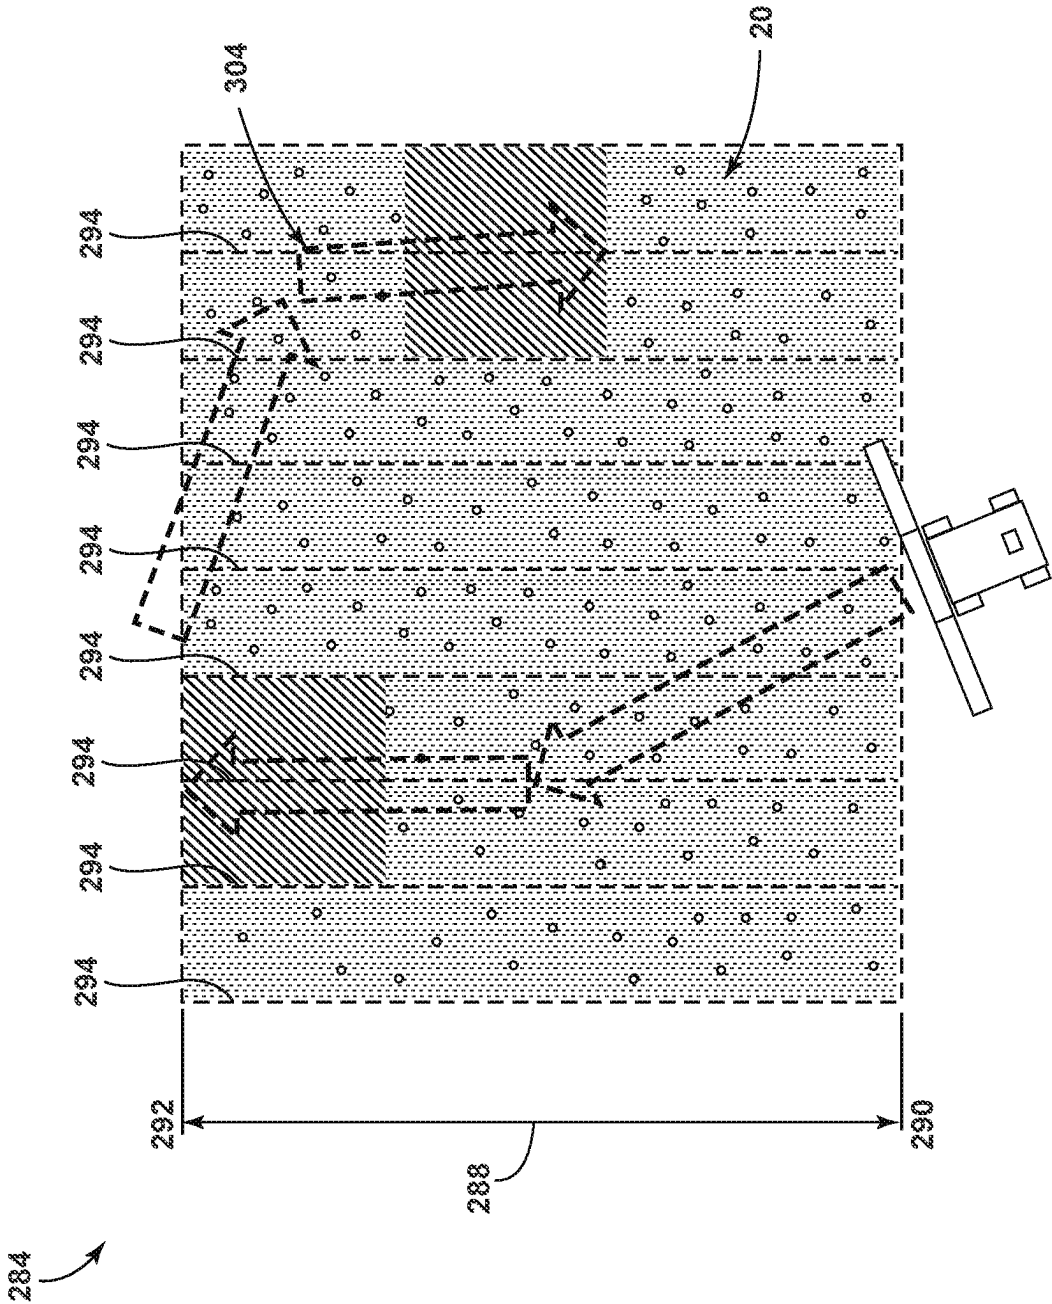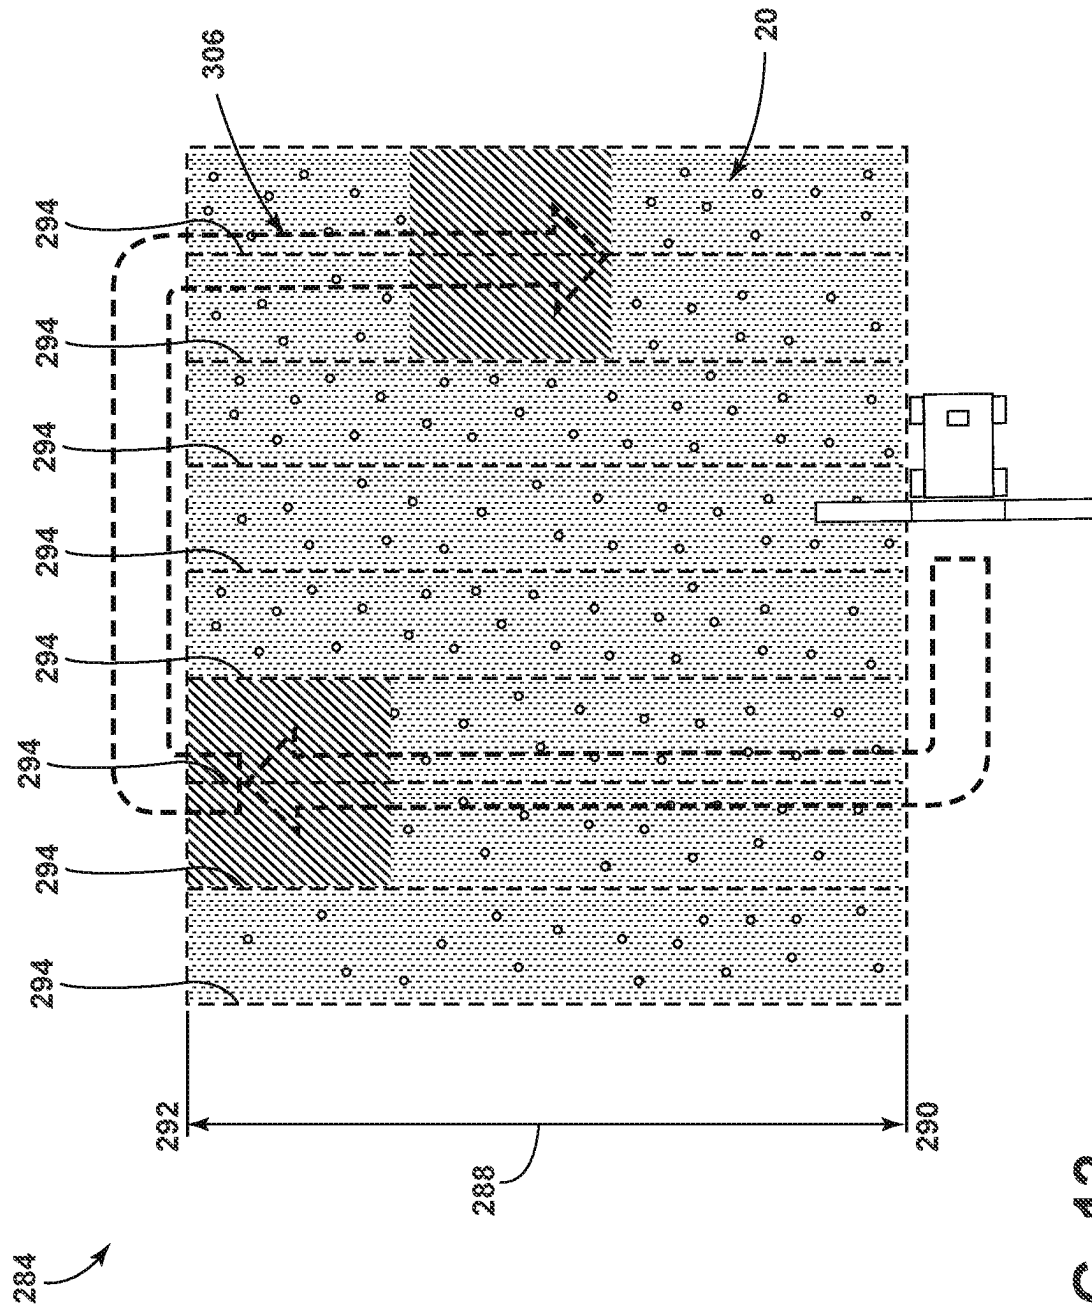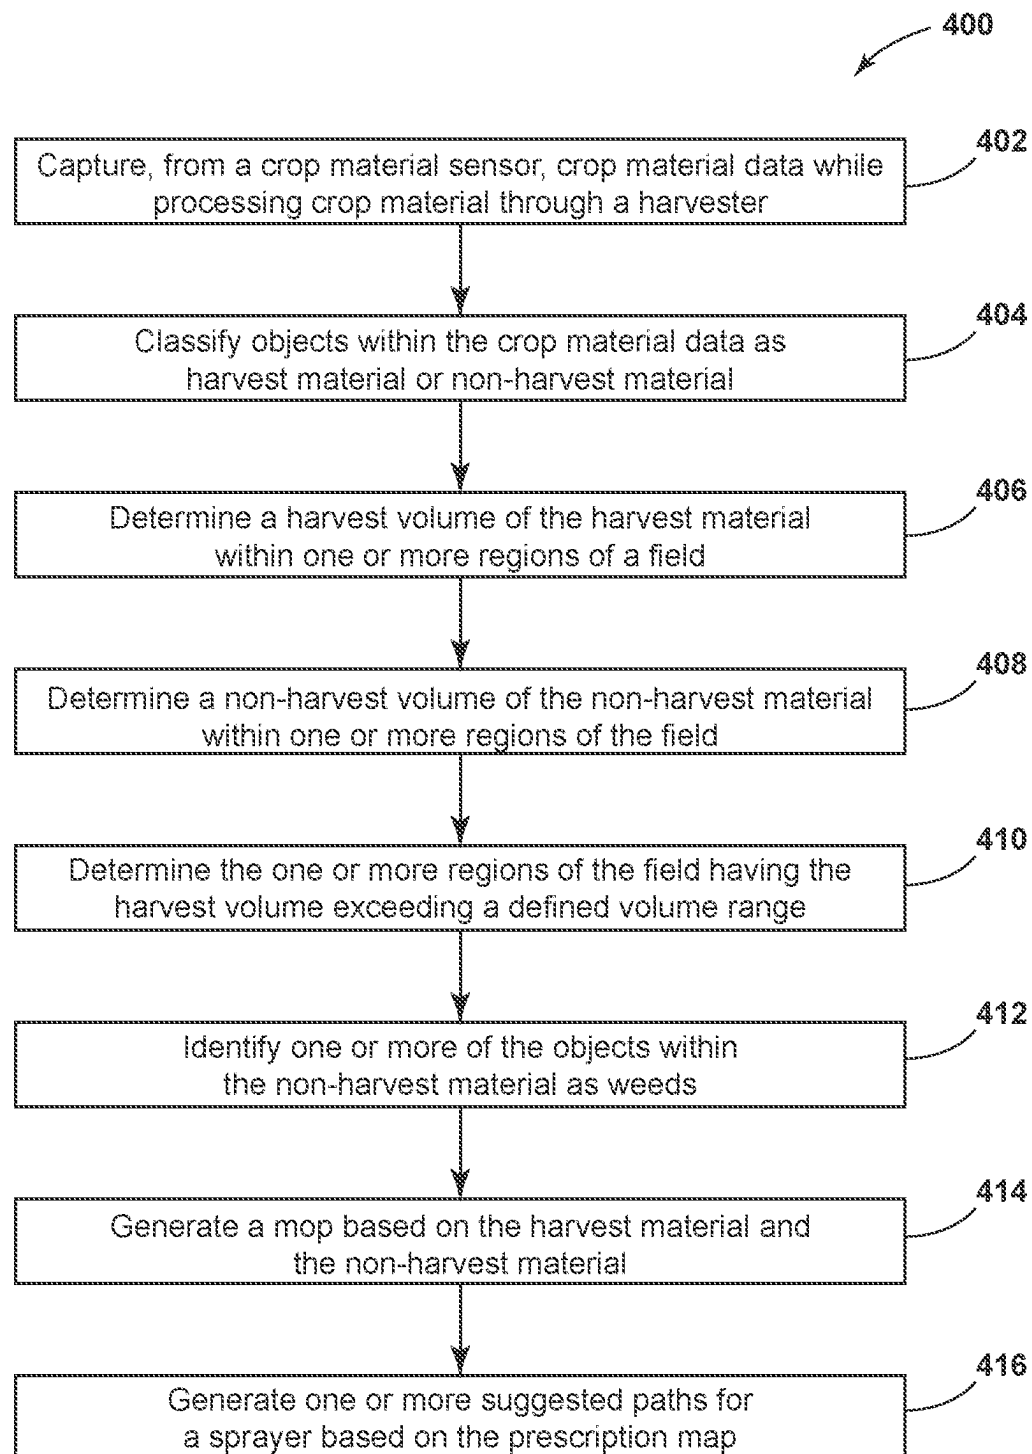e.g., a sprayer) apply an agricultural product (e.g., a pesticide, a nutrient, and/or the like) onto crops and/or a ground surface as the applicator is traveling across a field. To facilitate such travel, the agricultural vehicles can be configured as self-propelled vehicles or implements towed behind an agricultural tractor or another suitable work vehicle.

While each vehicle performs a defined operation, various information may be generated. Accordingly, an improved system and method for utilizing such information for subsequent operations would be welcomed in the technology.

BRIEF DESCRIPTION

Aspects and advantages of the technology will be set forth in part in the following description, or may be obvious from the description, or may be learned through practice of the technology.

In some aspects, the present subject matter is directed to a system for an agricultural operation that includes a harvester configured to separate crop material into a harvest material and a non-harvest material. A crop material sensor is operably coupled with the harvester and configured to capture crop material data. A positioning device is configured to generate location data to geolocate the crop material data relative to a field. A computing system is communicatively coupled with the crop material sensor and the positioning device. The computing system is configured to classify objects within the crop material data as harvest material or non-harvest material and generate a map based on the harvest material and the non-harvest material.

In some aspects, the present subject matter is directed to a method for operating an agricultural system. The method includes capturing, from a crop material sensor, crop material data while processing crop material through a harvester. The method also includes classifying objects within the crop material data as harvest material or non-harvest material. In addition, the method includes generating a map based on the harvest material and the non-harvest material.

In some aspects, the present subject matter is directed to an agricultural system that includes a harvester configured to separate crop material into a harvest material and a non-harvest material including a crop material sensor configured to capture crop material data of the crop material. A sprayer is communicatively coupled with the harvester and is configured to selectively apply an agricultural product to a field based at least in part on the crop material data.

These and other features, aspects, and advantages of the present technology will become better understood with reference to the following description and appended claims. The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the technology and, together with the description, serve to explain the principles of the technology.

BRIEF DESCRIPTION OF THE DRAWINGS

A full and enabling disclosure of the present technology, including the best mode thereof, directed to one of ordinary skill in the art, is set forth in the specification, which makes reference to the appended figures, in which:

FIG. 1 illustrates a side view of an agricultural harvester in accordance with aspects of the present subject matter;

FIG. 2 illustrates a perspective view of an agricultural sprayer in accordance with aspects of the present subject matter;

FIG. 3 illustrates a block diagram of components of a system for selectively applying an agricultural product in accordance with aspects of the present subject matter;

FIG. 4 is a block diagram illustrating a harvester and a sprayer operably coupled with a remote server in accordance with aspects of the present subject matter;

FIG. 5 is a schematic illustration of the harvester performing a first pass within an agricultural field in accordance with aspects of the present subject matter;

FIG. 6 is a schematic illustration of the harvester performing a second pass within an agricultural field in accordance with aspects of the present subject matter;

FIG. 7 is a schematic illustration of the harvester performing a third pass within an agricultural field in accordance with aspects of the present subject matter;

FIG. 8 illustrates a harvest material yield map in accordance with aspects of the present subject matter;

FIG. 9 illustrates a projected weed concentration map in accordance with aspects of the present subject matter;

FIG. 10 illustrates a prescription map in accordance with aspects of the present subject matter;

FIG. 11 illustrates the prescription map of FIG. 10 including a first suggested application path in accordance with aspects of the present subject matter;

FIG. 12 illustrates the prescription map of FIG. 10 including a second suggested application path in accordance with aspects of the present subject matter; and

FIG. 13 illustrates a flow diagram of a method of selectively applying an agricultural product in accordance with aspects of the present subject matter.

Repeat use of reference characters in the present specification and drawings is intended to represent the same or analogous features or elements of the present technology.

DETAILED DESCRIPTION

Reference now will be made in detail to embodiments of the disclosure, one or more examples of which are illustrated in the drawings. Each example is provided by way of explanation of the discourse, not limitation of the disclosure. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made in the present disclosure without departing from the scope or spirit of the disclosure. For instance, features illustrated or described as part can be used with another embodiment to yield a still further embodiment. Thus, it is intended that the present disclosure covers such modifications and variations as come within the scope of the appended claims and their equivalents.

In this document, relational terms, such as first and second, top and bottom, and the like, are used solely to distinguish one entity or action from another entity or action, without necessarily requiring or implying any actual such relationship or order between such entities or actions. The terms "comprises," "comprising," or any other variation thereof, are intended to cover a non-exclusive inclusion,

such that a process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus. An element preceded by "comprises . . . a" does not, without more constraints, preclude the existence of additional identical elements in the process, method, article, or apparatus that comprises the element.

As used herein, the terms "first," "second," and "third" may be used interchangeably to distinguish one component from another and are not intended to signify a location or importance of the individual components. The terms "coupled," "fixed," "attached to," and the like refer to both direct coupling, fixing, or attaching, as well as indirect coupling, fixing, or attaching through one or more intermediate components or features, unless otherwise specified herein. The terms "upstream" and "downstream" refer to the relative direction with respect to an agricultural product within a fluid circuit. For example, "upstream" refers to the direction from which an agricultural product flows, and "downstream" refers to the direction to which the agricultural product moves. The term "selectively" refers to a component's ability to operate in various states (e.g., an ON state and an OFF state) based on manual and/or automatic control of the component.

Furthermore, any arrangement of components to achieve the same functionality is effectively "associated" such that the functionality is achieved. Hence, any two components herein combined to achieve a particular functionality can be seen as "associated with" each other such that the desired functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two components so associated can also be viewed as being "operably connected" or "operably coupled" to each other to achieve the desired functionality, and any two components capable of being so associated can also be viewed as being "operably couplable" to each other to achieve the desired functionality. Some examples of operably couplable include, but are not limited to, physically mateable, physically interacting components, wirelessly interactable, wirelessly interacting components, logically interacting, and/or logically interactable components.

The singular forms "a," "an," and "the" include plural references unless the context clearly dictates otherwise.

Approximating language, as used herein throughout the specification and claims, is applied to modify any quantitative representation that could permissibly vary without resulting in a change in the basic function to which it is related. Accordingly, a value modified by a term or terms, such as "about," "approximately," "generally," and "substantially," is not to be limited to the precise value specified. In at least some instances, the approximating language may correspond to the precision of an instrument for measuring the value, or the precision of the methods or apparatus for constructing or manufacturing the components and/or systems. For example, the approximating language may refer to being within a ten percent margin.

Moreover, the technology of the present application will be described in relation to exemplary embodiments. The word "exemplary" is used herein to mean "serving as an example, instance, or illustration." Any embodiment described herein as "exemplary" is not necessarily to be construed as preferred or advantageous over other embodiments. Additionally, unless specifically identified otherwise, all embodiments described herein should be considered exemplary.

As used herein, the term "and/or," when used in a list of two or more items, means that any one of the listed items can be employed by itself, or any combination of two or more of the listed items can be employed. For example, if a composition or assembly is described as containing components A, B, and/or C, the composition or assembly can contain A alone; B alone; C alone; A and B in combination; A and C in combination; B and C in combination; or A, B, and C in combination.

In general, the present subject matter is directed to a system for various agricultural operations. In some instances, a first vehicle, such as a harvester, is configured to perform a first agricultural operation within a field. While the first vehicle described below are generally illustrated and described as a harvester, the first vehicle may additionally or alternatively be configured as a tractor, a self-propelled windrower, a self-propelled sprayer, and/or the like. As such, in various examples, the first vehicle may be configured to perform at least one of a planting process, seeding process, a tilling process, a mapping process, a scouting process, a harvesting process, and/or any other process during the operation of the first vehicle. In addition, the first vehicle may be human-controlled, autonomously controlled, and/or semi-autonomously controlled without departing from the teachings provided herein.

When the first vehicle is a harvester, the harvester is configured to separate crop material into a harvest material and a non-harvest material. A crop material sensor is operably coupled with the harvester and configured to capture crop material data. In addition, a positioning device is configured to generate location data to geolocate the crop material data relative to a field

A computing system is communicatively coupled with the crop material sensor and the positioning device. The computing system is configured to generate field data based on the crop material data and the location data. For example, the field data may include identified objects within the crop material data, which may include identifying the objects as harvest material or non-harvest material. In turn, the computing system may generate a map based on the harvest material and the non-harvest material. The map may be in the form of a harvest material yield map, a projected weed concentration map, and/or a prescription map.

In addition, a second vehicle, such as a sprayer, may receive the field data, the crop material data, and/or the location data from the first vehicle. In turn, the sprayer may apply an agricultural product to the field based at least in part on the data. By utilizing the data from the first vehicle, a more effective application of agricultural product to the field may be accomplished.

Referring now to FIG. 1, a first vehicle configured as an agricultural harvester 10 in the form of a combine is illustrated. In general, the harvester 10 is configured to sever crops 12 from a field 14 and direct the crop material 16 into the harvester 10. Within the harvester 10, the crop material 16 may be separated into harvest material 18 (e.g., grain) and non-harvest material 20 (e.g., material other than grain (MOG), straw, previously harvested crop, etc.). The harvest material 18 may be stored within the harvester 10 and/or directed into a storage space, such as a storage cart. The non-harvested crop may be exhausted from the harvester 10 back into the field 14.

As illustrated, the harvester 10 includes a chassis 22, ground engaging wheels 24 and 26, a header 28, a feeder housing 30, an operator cab 32, a threshing and separation system 34, a cleaning system 36, a grain tank 38, and an unloading conveyance 40. The wheels 14, 16 may be con-

figured to support the harvester 10 relative to the field 14 (or another ground surface) and move the agricultural harvester 10 in a direction of forward travel 42 across a field 14.

The cab 32, or any other form of operator's station, may house various control or input devices (e.g., levers, pedals, control panels, buttons, and/or the like) for permitting an operator to control the operation of the harvester 10. For instance, as shown in FIG. 1, the agricultural harvester 10 may include a user interface 44, such as a human-vehicle interface (HMI), for providing messages and/or alerts to the operator and/or for allowing the operator to interface with the vehicle's controller through one or more user-input devices 46 (e.g., levers, pedals, control panels, buttons, and/or the like) within the cab 32 and/or in any other practicable location.

The header 28 can be mounted to the front portion of harvester 10 and can include a cutter bar 48 for severing crops 12 from a field 14 during forward motion of harvester 10. A rotatable reel 50 feeds the crop into the header 28, and a double auger 52 feeds the severed crop material 16 inwardly from each side toward the feeder housing 30. The feeder housing 30 feeds the cut crop material 16 to the threshing and separation system 34.

The threshing and separation system 34 is configured to thresh and separate a flow of the crop material 16 that flows to the threshing and separation system 34 from the feeder housing 30. The threshing and separation system 34 generally includes a threshing rotor 54 at least partially enclosed by a rotor cage and rotatable within a corresponding perforated concave 56. The crop material 16 are threshed and separated by the rotation of rotor 54 within the concave 56, and larger non-harvest material 20, such as material other than grain, stalks, leaves, and the like are discharged from the rear of harvester 10. Smaller elements of the crop material 16 including the harvest material 18 and non-harvest material 20, including particles lighter than grain, such as chaff, dust, and straw, are discharged through perforations of the concave 56. The threshing and separation system 34 can also be a different type of system, such as a system with a transverse rotor rather than an axial rotor, etc.

The harvest material 18 that has been separated by the threshing and separation system 34 falls onto a grain pan 58 and is conveyed toward the cleaning system 36. The cleaning system 36 may include an optional pre-cleaning sieve 60, an upper sieve 62 (also known as a chaffer sieve or sieve assembly), a lower sieve 64 (also known as a cleaning sieve), and a cleaning fan 66. The crop material 16 on the sieves 60, 62, and 64 is subjected to a cleaning action by the fan 66, which provides airflow through the sieves 60, 62, and 64 to remove chaff and other impurities such as dust from the harvest material 18 by making this material airborne for discharge from a straw hood 68 of a residue management system 70 of the harvester 10. Optionally, the chaff and/or straw can proceed through a chopper 72 to be further processed into even smaller particles before discharging out of the harvester 10 by a spreader assembly 74. It should be appreciated that the "chopper" 180 referenced herein, which may include knives, may also be what is typically referred to as a "beater", which may include flails or other construction and that the term "chopper" as used herein refers to any construction which can reduce the particle size of the entering crop material 16 by various actions including chopping, flailing, etc. The grain pan 58 and the pre-cleaning sieve 60 oscillate in a fore-to-aft manner to transport the grain and finer non-harvest material 20 to the upper surface of the upper sieve 62. The upper sieve 62 and the lower sieve 64 are vertically arranged relative to each other, and likewise oscillate in a fore-to-aft manner to spread the harvest material 18 across the sieves 62, 64, while permitting the passage of cleaned harvest material 18 by gravity through the openings of the sieves 62, 64.

Clean harvest material 18 falls to a clean grain auger 76 positioned crosswise below and toward the front of the lower sieve 64. The clean grain auger 76 receives clean harvest material 18 from each sieve 62, 64, and a bottom pan 78 of the cleaning system 36. The clean grain auger 76 conveys the clean harvest material 18 laterally to a grain elevator 80 for transport to the grain tank 38. Tailings from the cleaning system 36 falls to a tailings auger trough 82. The tailings are transported via a return auger 84 to the upstream end of the cleaning system 36 for repeated cleaning action. A pair of grain tank augers 86 within the grain tank 38 convey the clean grain laterally within the grain tank 38 to the unloader 160 for discharge from the harvester 10.

In various examples, the harvester 10 may further include one or more crop material sensors 88 that may be configured to capture data indicative of the crop material 16. For instance, the crop material sensors 88 may be configured to capture data indicative of an amount or volume of the harvest material 18 and/or an amount or volume of the non-harvest material 20. In several embodiments, the crop material sensors 88 may be installed or otherwise positioned on or within any component of the harvester 10. For instance, the one or more crop material sensors 88 may be installed on an exterior portion of the harvester 10 and configured to capture data forwardly, rearwardly, and/or laterally outward of the harvester 10. Additionally or alternatively, the one or more crop material sensors 88 may be installed within the vehicle. For example, the one or more crop material sensors 88 may be operably coupled with the feeder housing 30, the threshing and separation system 34, the cleaning system 36, the grain tank 38, the unloading conveyance 40, the residue management system 70, the chopper 72, the spreader assembly 74, and/or any other system of the harvester 10.

In various embodiments, the one or more crop material sensors 88 are object detecting/identifying imaging devices, where the data captured by the one or more crop material sensors 88 may be indicative of the type of plants (e.g., harvest material 18 and/or non-harvest material 20) and/or other objects.

The agricultural harvester 10 may include any suitable number of the crop material sensors 88 and should not be construed as being limited to the number of crop material sensors 88 shown in FIG. 1. Additionally, the crop material sensors 88 may generally correspond to any suitable sensing devices. For example, each crop material sensor 88 may correspond to any suitable camera, such as single-spectrum camera or a multi-spectrum camera configured to capture images, for example, in the visible light range and/or infrared spectral range. Additionally, in various embodiments, the camera may correspond to a single lens camera configured to capture two-dimensional images or a stereo camera having two or more lenses with a separate image imaging device for each lens to allow the camera to capture stereographic or three-dimensional images. Alternatively, the crop material sensors 88 may correspond to any other suitable image capture devices and/or other imaging devices capable of capturing "images" or other image-like data. For example, the crop material sensors 88 may correspond to or include radio detection and ranging (RADAR) sensors, light detection and ranging (LIDAR) sensors, and/or any other practicable device.

Referring to FIG. **2**, a second vehicle configured as an agricultural sprayer **100** capable of performing a spraying operation based at least partially on the data provided from the first vehicle and/or the one or more crop material sensors **88** (FIG. **1**) is generally illustrated. In some embodiments, such as the one illustrated in FIG. **2**, the agricultural sprayer **100** may include a chassis **102** configured to support or couple to a plurality of components. For example, front and rear wheels **104, 106** may be coupled to the chassis **102**. The wheels **104, 106** may be configured to support the work vehicle **10** relative to the field **14** and move the work vehicle **10** in a direction of travel (e.g., as indicated by arrow **42** in FIG. **2**) across a field **14** or a ground surface.

The chassis **102** may also support a cab **108**, or any other form of operator's station, that houses various control or input devices (e.g., levers, pedals, control panels, buttons, and/or the like) for permitting an operator to control the operation of the sprayer **100**. For instance, as shown in FIG. **2**, the agricultural sprayer **100** may include a user interface **110**, such as a human-vehicle interface (HMI), for providing messages and/or alerts to the operator and/or for allowing the operator to interface with the vehicle's controller through one or more user-input devices **112** (e.g., levers, pedals, control panels, buttons, and/or the like) within the cab **108** and/or in any other practicable location.

The chassis **102** may also support a product system **112**. The product system **112** can include one or more tanks **116**, such as a product tank and/or a rinse tank, and a boom assembly **118**. The product tank is generally configured to store or hold an agricultural product, such as pesticides (e.g., herbicides, insecticides, rodenticides, etc.) and/or nutrients. The agricultural product is conveyed from the product tank and/or the rinse tank through a product circuit including numerous plumbing components, such as interconnected pieces of tubing, for release onto the underlying field **14** (e.g., plants and/or soil) through one or more nozzle assemblies **120** mounted on the boom assembly **118** (or the sprayer **100**).

As shown in FIG. **2**, the boom assembly **118** can include a frame **122** that supports first and second boom arms **124, 126**, which may be orientated in a cantilevered nature. The first and second boom arms **124, 126** are generally movable between an operative or unfolded position and an inoperative or folded position. When distributing an agricultural product, the first and/or second boom arm **124, 126** extend laterally outward from the work vehicle **10** to cover wide swaths of the underlying ground surface, as illustrated in FIG. **2**. However, to facilitate transport, each boom arm **124, 126** of the boom assembly **118** may be independently folded forwardly or rearwardly into the inoperative position, thereby reducing the overall width of the vehicle **10**, or in some examples, the overall width of a towable implement when the applicator is configured to be towed behind the work vehicle **10**.

The boom assembly **118** may be configured to support a plurality of nozzles **230**. Each nozzle **230** may, in turn, be configured to dispense the agricultural product stored within the tank **26** onto the underlying field **14**. In several embodiments, the nozzles **230** may be mounted on and/or coupled to the first and/or second boom arms **124, 126** of the boom assembly **118**, with the nozzles **230** being spaced apart from each other along a lateral direction **44**. Furthermore, fluid conduits **128** may fluidly couple the nozzles **230** to the tanks. In this respect, as the sprayer **100** travels across the field **14** in the direction of travel **42** to perform a spraying operation thereon, the agricultural product moves from the tank **26** through the fluid conduit(s) **58** to each of the nozzles **230**.

The nozzles **230** may, in turn, dispense or otherwise spray a fan of the agricultural product. For example, in one embodiment, the nozzles **230** may correspond to flat fan nozzles configured to dispense a flat fan of the agricultural product. However, in alternative embodiments, the nozzles **230** may correspond to any other suitable types of nozzles, such as dual pattern nozzles and/or hollow cone nozzles.

Referring to FIGS. **3** and **4**, in several embodiments, a system **200** may include a first vehicle **202**, such as the harvester **10** (FIG. **1**), that may collect crop material data related to the crop material **16** within a field **14**. The data may be analyzed for a subsequent spraying operation, which may be performed by a second vehicle **204**, such as the sprayer **100** (FIG. **1**).

Referring further to FIG. **3**, a schematic view of a system **200** for operating various agricultural vehicles is illustrated in accordance with aspects of the present subject matter. In general, the system **200** will be described with reference to the harvester **10** of FIG. **1** and the sprayer **100** of FIG. **2**. However, the disclosed system **200** may generally be utilized with agricultural vehicles having any other suitable vehicle configuration. For purposes of illustration, communicative links, or electrical couplings of the system **200** shown in FIG. **3** are indicated by dashed lines. The one or more communicative links or interfaces may be one or more of various wired or wireless communication mechanisms, including any combination of wired (e.g., cable and fiber) and/or wireless (e.g., cellular, wireless, satellite, microwave, and radio frequency) communication mechanisms and any desired network topology (or topologies when multiple communication mechanisms are utilized). Exemplary wireless communication networks include a wireless transceiver (e.g., a BLUETOOTH module, a ZIGBEE transceiver, a Wi-Fi transceiver, an IrDA transceiver, an RFID transceiver, etc.), local area networks (LAN), and/or wide area networks (WAN), including the Internet, providing data communication services.

In several embodiments, the first vehicle **202** can include a first computing system **106**. In general, the first computing system **106** may comprise any suitable processor-based device, such as a computing device or any suitable combination of computing devices. Thus, in several embodiments, the first computing system **106** may include one or more processors **208** and associated memory **210** configured to perform a variety of computer-implemented functions. As used herein, the term "processor" refers not only to integrated circuits referred to in the art as being included in a computer, but also refers to a controller, a microcontroller, a microcomputer, a programmable logic controller (PLC), an application-specific integrated circuit, and other programmable circuits. Additionally, the memory **210** of the first computing system **106** may generally comprise memory elements including, but not limited to, a computer-readable medium (e.g., random access memory (RAM)), a computer-readable non-volatile medium (e.g., a flash memory), a floppy disk, a compact disc-read only memory (CD-ROM), a magneto-optical disk (MOD), a digital versatile disc (DVD) and/or other suitable memory elements. Such memory **210** may generally be configured to store information accessible to the processor **208**, including data **212** that can be retrieved, manipulated, created, and/or stored by the processor **208** and instructions **214** that can be executed by the processor **208**, when implemented by the processor **208**, configure the first computing system **106** to perform various computer-implemented functions, such as one or more aspects of the image processing algorithms and/or related methods described herein. In addition, the first computing

system **106** may also include various other suitable components, such as a communications circuit or module, one or more input/output channels, a data/control bus, and/or the like.

In several embodiments, the first computing system **106** may correspond to an existing controller of the harvester **10**, or the first computing system **106** may correspond to a separate processing device. For instance, in some embodiments, the first computing system **106** may form all or part of a separate plug-in module or computing device that is installed relative to the harvester **10** to allow for the disclosed system **200** and method to be implemented without requiring additional software to be uploaded onto existing control devices of the harvester **10**.

In several embodiments, the data **212** may be information received and/or generated by the first computing system **106** that is stored in one or more databases. For instance, as shown in FIG. **3**, the memory **210** may include crop material data **216** received from the crop material sensor **88**. For instance, the crop material sensor **88** may be configured to continuously, periodically, or otherwise capture crop material data **216** associated with the crop material **16**. In such embodiments, the crop material data **216** transmitted to the computing system **106** from the crop material sensor **88** may be stored within the crop material database **216** for subsequent processing and/or analysis.

Additionally or alternatively, as shown in FIG. **3**, the memory **210** may also include a location database **218**, which may be configured to store location data **218** generated by a positioning device **224** that is received in conjunction with the crop material data **216** from the crop material sensor **88** and stored in association with such crop material data **216** for later use in geo-locating the crop material data **216** relative to the field **14**. In some instances, the system **200** may store areas of the field **14** as distinct regions. In such instances, the system **200** may correlate the crop material data **216** to each geolocated regions. In several examples, the first computing system **106** may store a harvest volume of the harvest material **18** within one or more regions of the field **14** a non-harvest volume of the non-harvest material **20** within the one or more regions of the field **14**.

In several embodiments, the instructions **214** stored within the memory **210** of the first computing system **106** may be executed by the processor **208** to implement a crop material analysis module **220**. In general, the crop material analysis module **220** may be configured to assess the crop material data **216** and associated location data **218** to geo-locate the crop material data **216** within the field **14**. As such, in various embodiments, as the harvester **10** travels across the field **14**, the first computing system **106** may be configured to receive sensor data (e.g., image data) associated with crop material within the harvester **10** from the crop material sensor **88** (e.g., crop material-identifying sensors).

The first computing system **106** may be configured to analyze/process the crop material data **216** to detect/identify the type and location of crop material within the field **14**. In this regard, the first computing system **106** may include any suitable image processing algorithms stored within its memory **210** or may otherwise use any suitable image processing techniques to determine, for example, the amount or volume of the harvest material **18** and/or an amount or volume of the non-harvest material **20** within the crop material **16** based on the received crop material data **216**. For instance, the first computing system **106** may be configured to distinguish between various types of objects, such as harvest material **18**, which may be a grain or other

material to be harvested, and non-harvest material **20**, which may be any material other than the material to be harvested. In some instances, the first computing system **106** may further determine one or more objects within the non-harvest material **20**. For example, the first computing system **106** may classify whether objects within the non-harvest material **20** are weeds (e.g., any plant other than harvest material **18**), dirt, rocks, stalk, straw, harvested crop from a previous season, etc.

The instructions **214** stored within the memory **210** of the first computing system **106** may further be executed by the processor **208** to implement a field module **222**. The field module **222** may operate in conjunction with the crop material analysis module **220** and the location data **218** to generate one or more maps or any other type of information as field data **246**. The field data **246** may be provided to the second vehicle **204** and/or any other remote location.

In some embodiments, the positioning device **224** may be configured as a satellite navigation positioning device (e.g. a GPS, a Galileo positioning system, a Global Navigation satellite system (GLONASS), a BeiDou Satellite Navigation and Positioning system, a dead reckoning device, and/or the like) to determine the location of the harvester **10**.

Further, as shown in FIG. **3**, the first computing system **106** may also include a transceiver **226** to allow for the first computing system **106** to communicate with any of the various other system components described herein. For instance, one or more communicative links or interfaces (e.g., one or more data buses) may be provided between the transceiver **226** and the crop material sensor **88** and/or the positioning device **224**. Similarly, one or more communicative links or interfaces may be provided between the transceiver **226** and the second vehicle **204**.

In several embodiments, the second vehicle **204** may additionally or alternatively be configured to receive the field data **246**, the crop material data **216**, and/or any other information from the first vehicle **202**. In turn, the second vehicle **204** may utilize one or more nozzle assemblies **120** to selectively apply an agricultural product to the field **14**. In some embodiments, the one or more nozzle assemblies **120** may be positioned along the boom assembly **118**. The one or more nozzle assemblies **120** can include a valve **228** operably coupled with a nozzle **230** and configured to control a flow of agricultural product through the nozzle **230**. The one or more nozzle assemblies **120** each define a respective orifice **232** that may dispense a fan pattern of the agricultural product. In various embodiments, the valve **228** may be configured as electronically controlled valves that are controlled by a Pulse Width Modulation (PWM) signal for altering the application rate of the agricultural product.

In several embodiments, the second vehicle **204** includes a second computing system **234**. In general, the second computing system **234** may comprise any suitable processor-based device, such as a computing device or any suitable combination of computing devices. Thus, in several embodiments, the second computing system **234** may include one or more processors **236** and associated memory **238** configured to perform a variety of computer-implemented functions. As used herein, the term "processor" refers not only to integrated circuits referred to in the art as being included in a computer, but also refers to a controller, a microcontroller, a microcomputer, a programmable logic controller (PLC), an application-specific integrated circuit, and other programmable circuits. Additionally, the memory **238** of the second computing system **234** may generally comprise memory elements including, but not limited to, a computer-readable medium (e.g., random access memory (RAM)), a computer-

readable non-volatile medium (e.g., a flash memory), a floppy disk, a compact disc-read only memory (CD-ROM), a magneto-optical disk (MOD), a digital versatile disc (DVD) and/or other suitable memory elements. Such memory 238 may generally be configured to store information accessible to the processor 236, including data 240 that can be retrieved, manipulated, created, and/or stored by the processor 236 and instructions 242 that can be executed by the processor 236, when implemented by the processor 236, configure the second computing system 234 to perform various computer-implemented functions. In addition, the second computing system 234 may also include various other suitable components, such as a communications circuit or module, one or more input/output channels, a data/control bus, and/or the like.

In several embodiments, the second computing system 234 may correspond to an existing controller of the agricultural second vehicle 204, or the second computing system 234 may correspond to a separate processing device. For instance, in some embodiments, the second computing system 234 may form all or part of a separate plug-in module or computing device that is installed relative to the second vehicle 204 or boom assembly 118 to allow for the disclosed system 202 and method to be implemented without requiring additional software to be uploaded onto existing control devices of the second vehicle 204 or the boom assembly 118.

In several embodiments, the data 240 may be data received and/or generated by the first vehicle 202 that is stored in one or more databases. Additionally or alternatively, the data 240 may be data and/or information received and/or generated by the second computing system 234 that is stored in one or more databases. For instance, as shown in FIG. 3, the memory may include the crop material data 244 generated by the first vehicle 202 and/or any processed data 244 that may be generated from the crop material data 216 generated by the first vehicle 202.

The memory may also include location database 248, which may be configured to store data from a positioning system 250 associated with the second vehicle 204. In some embodiments, the positioning system 250 may be configured as a satellite navigation positioning device (e.g. a GPS, a Galileo positioning system, a Global Navigation satellite system (GLONASS), a BeiDou Satellite Navigation and Positioning system, a dead reckoning device, and/or the like) to determine the location of the second vehicle 204.

In several embodiments, the instructions 242 stored within the memory 238 of the second computing system 234 may be executed by the processor 236 to implement a crop material analysis module 252. In general, the crop material analysis module 220 may be configured to assess the crop material data 244 and associated location data 218 from the first vehicle 202 to generate field data 246. The field data 246 generated by the first computing system 206 may be similar and/or different from the field data 246 that may be generated by the second computing system 234.

In various embodiments, the instructions 242 stored within the memory 238 of the second computing system 234 may be executed by the processor 236 to implement a path analysis module 254. In general, the path analysis module 254 may be configured to receive the field data 246 from the crop material analysis module 252 and/or the field data 246 from the first computing system 206. In addition, the instructions 242 may receive location data 248 from a positioning system 250 of the second vehicle 204. In turn, the second computing system 234 may determine whether the second vehicle 204 is within a defined location of the field 14.

Referring still to FIG. 3, in some embodiments, the instructions 242 stored within the memory 238 of the second computing system 234 may also be executed by the processor 236 to implement a control module 256. In general, the control module 256 may be configured to electronically control the operation of one or more components of the agricultural second vehicle 204. For instance, the second vehicle 204 may be configured to selectively spray the agricultural product when the second vehicle 204 is within a defined region of the field 14. For example, when the second vehicle 204 is within a region portion of the field 14, the control module 256 may selectively dispense agricultural product onto the field 14 at a first flow rate. When the second vehicle 204 is within a second region of the field 14, the control module 256 may selectively dispense agricultural product onto the field 14 at a second flow rate, which may be varied from the first flow rate.

Further, as shown in FIG. 3, the second computing system 234 may also include a transceiver 258 to allow for the second computing system 234 to communicate with any of the various other system components described herein. For instance, one or more communicative links or interfaces (e.g., one or more data buses) may be provided between the transceiver 258 and the one or more nozzle assemblies 120 positioned along a boom assembly 118.

As illustrated, the transceiver 226 of the first computing system 206 and/or the transceiver 258 of the second computing system 234 may be operably coupled with a remote electronic device 260. The electronic device 260 may include a display for displaying information to a user. For instance, the electronic device 260 may display one or more user interfaces and may be capable of receiving remote user inputs. In addition, the electronic device 260 may provide feedback information, such as visual, audible, and tactile alerts, and/or allow the operator to alter or adjust one or more components of the harvester 10 through the usage of the remote electronic device 260. The electronic device 260 may include a variety of computing systems 262 including a processor and memory. For example, the electronic device 260 may be a cell phone, mobile communication device, key fob, wearable device (e.g., fitness band, watch, glasses, jewelry, wallet), apparel (e.g., a tee shirt, gloves, shoes, or other accessories), personal digital assistant, headphones and/or other devices that include capabilities for wireless communications and/or any wired communications protocols.

Referring to FIG. 4, in some examples, the first vehicle 202 (e.g., the harvester 10), the second vehicle 204 (e.g., the sprayer 100), and/or the electronic device 260 may be communicatively coupled with one another and/or one or more remote sites, such as a remote server 264 via a network/cloud 266 to provide data and/or other information therebetween. The network/cloud 266 represents one or more systems by which the first vehicle 202, the second vehicle 204, and/or the electronic device 260 may communicate with the remote server 264. The network/cloud 266 may be one or more of various wired or wireless communication mechanisms, including any desired combination of wired and/or wireless communication mechanisms and any desired network topology (or topologies when multiple communication mechanisms are utilized). Exemplary communication networks 266 include wireless communication networks (e.g., using Bluetooth, IEEE 802.11, etc.), local area networks (LAN) and/or wide area networks (WAN), including the Internet and the Web, which may provide data communication services and/or cloud computing services. The Internet is generally a global data communications

system. It is a hardware and software infrastructure that provides connectivity between computers. In contrast, the Web is generally one of the services communicated via the Internet. The Web is generally a collection of interconnected documents and other resources, linked by hyperlinks and URLs. In many technical illustrations when the precise location or interrelation of Internet resources are generally illustrated, extended networks such as the Internet are often depicted as a cloud (e.g. 266 in FIG. 4). The verbal image has been formalized in the newer concept of cloud comput- ing. The National Institute of Standards and Technology (NIST) defines cloud computing as "a model for enabling convenient, on-demand network access to a shared pool of configurable computing resources (e.g., networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction." Although the Internet, the Web, and cloud computing are not the same, these terms are generally used interchangeably herein, and they may be referred to collectively as the network/cloud 266.

The server 264 may be one or more computer servers, each of which may include a computing system 268 includ- ing at least one processor and at least one memory, the memory storing instructions executable by the processor, including instructions for carrying out various steps and processes. The server 264 may include or be communica- tively coupled to a data store 270 for storing collected data as well as instructions and/or data for the first vehicle 202, the second vehicle 204, and/or the electronic device 260 with or without intervention from a user, the first vehicle 202, the second vehicle 204, and/or the electronic device 260. Moreover, the server 264 may be capable of analyzing initial or raw sensor data received from the first vehicle 202, the second vehicle 204, and final or post-processing data (as well as any intermediate data created during data process- ing). Accordingly, the instructions and/or data provided to any one or more of the first vehicle 202, the second vehicle 204, and/or the electronic device 260 may be determined and generated by the server 264 and/or one or more cloud-based applications 272. In such instances, the user interface 250 of the first vehicle 202, the second vehicle 204, and/or the electronic device 260 may be a dummy device that provides various instructions and/or data based on instructions from the network/cloud 266.

With further reference to FIG. 4, the server 264 also generally implements features that may enable the first vehicle 202, the second vehicle 204, and/or the electronic device 260 to communicate with cloud-based applications 272. Communications from the electronic device 260 can be directed through the network/cloud 266 to the server 264 and/or cloud-based applications 272 with or without a networking device, such as a router and/or modem. Addi- tionally, communications from the cloud-based applications 272, even though these communications may indicate one the first vehicle 202, the second vehicle 204, and/or the electronic device 260 as an intended recipient, can also be directed to the server 264. The cloud-based applications 272 are generally any appropriate services or applications 272 that are accessible through any part of the network/cloud 266 and may be capable of interacting with the electronic device 260.

In various examples, the first vehicle 202, the second vehicle 204, and/or the electronic device 260 can be feature- rich with respect to communication capabilities, i.e. have built-in capabilities to access the network/cloud 266 and any of the cloud-based applications 272 or can be loaded with, or programmed to have, such capabilities. The first vehicle

202, the second vehicle 204, and/or the electronic device 260 can also access any part of the network/cloud 266 through industry-standard wired or wireless access points, cell phone cells, or network nodes. In some examples, users can register to use the remote server 264 through the first vehicle 202, the second vehicle 204, and/or the electronic device 260, which may provide access to the first vehicle 202, the second vehicle 204, and/or the electronic device 260 and/or thereby allow the server 264 to communicate directly or indirectly with the first vehicle 202, the second vehicle 204, and/or the electronic device 260. In various instances, the first vehicle 202, the second vehicle 204, and/or the electronic device 260 may also communicate directly, or indirectly, with the first vehicle 202, the second vehicle 204, and/or the electronic device 260 or one of the cloud-based applications 272 in addition to communicating with or through the server 264. According to some examples, the first vehicle 202, the second vehicle 204, and/or the electronic device 260 can be preconfigured at the time of manufacture with a communication address (e.g. a URL, an IP address, etc.) for communicating with the server 264 and may or may not have the ability to upgrade or change or add to the preconfigured communication address.

Referring still to FIG. 4, when a new cloud-based appli- cation 272 is developed and introduced, the server 264 can be upgraded to be able to receive communications for the new cloud-based application 272 and to translate commu- nications between the new protocol and the protocol used by the first vehicle 202, the second vehicle 204, and/or the electronic device 260. The flexibility, scalability, and upgradeability of current server technology render the task of adding new cloud-based application protocols to the server 264 relatively quick and easy.

In several embodiments, an application interface 274 may be operably coupled with the cloud 266 and/or the applica- tion 272. The application interface 274 may be configured to receive data related to the first vehicle 202, the second vehicle 204, and/or the electronic device 260. In various embodiments, one or more inputs related to the field data 246 (FIG. 3) may be provided to the application interface 274. For example, a farmer, a vehicle user, a company, or other persons may access the application interface 274 to enter the inputs related to the field data 246. Additionally or alternatively, the inputs related to the field data 246 may be received from a remote server 264. For example, the inputs related to the field data 246 may be received in the form of software that can include one or more objects, agents, lines of code, threads, subroutines, databases, application pro- gramming interfaces (APIs), or other suitable data struc- tures, source code (human-readable), object code (vehicle- readable). In response, the system 200 may update any input/output based on the received inputs. The application interface 274 can be implemented in hardware, software, or a suitable combination of hardware and software, and which can be one or more software systems operating on a general- purpose processor platform, a digital signal processor plat- form, or other suitable processors.

In some examples, at various predefined periods and/or times, the first vehicle 202, the second vehicle 204, and/or the electronic device 260 may communicate with the server 264 through the network/cloud 266 to obtain the stored instructions and/or data, if any exist. Upon receiving the stored instructions and/or data, the first vehicle 202, the second vehicle 204, and/or the electronic device 260 may implement the instructions and/or data. In some instances, the first vehicle 202, the second vehicle 204, and/or the electronic device 260 can send event-related data to the

server **264** for storage in the data store **270**. This collection of event-related data can be accessed by any number of users, the first vehicle **202**, the second vehicle **204**, and/or the electronic device **260** to assist with application processes.

In various embodiments, the data used by the first vehicle **202**, the second vehicle **204**, the electronic device **260**, the remote server **264**, the data store **270**, the application **272**, the application interface **274**, and/or any other component described herein for any purpose may be based on data provided by the one or more crop material sensors **88** and/or the positioning device **224** operably coupled with the first vehicle **202**, the positioning system **250** operably coupled with the second vehicle **204**, and/or third-party data that may be converted into comparable data that may be used independently or in conjunction with data collected from the one or more crop material sensors **88**.

In various embodiments, based on the data collected during the first operation, the system **200** may be configured to generate a harvest material yield map **280**, a predicted weed concentration map **282**, a prescription map **284** that generally illustrates one or more regions for which an agricultural product is to be applied, and/or any other information. The system **200** may include the first computing system **106** associated with the first vehicle **202**, the second computing system **234** associated with the second vehicle **204**, the computing system **262** of the electronic device **260**, a computing system **268** of the remote server **264**, a computing system associated with the data store **270**, a computing system associated with the application **272**, and/or a computing system associated with the application interface **274**. As such, in various embodiments, the information that may be produced by a computing system is remote from the first vehicle **202** and/or the second vehicle **204**.

In various examples, the server **264** may implement machine learning engine methods and algorithms that utilize one or several machine learning techniques including, for example, decision tree learning, including, for example, random forest or conditional inference trees methods, neural networks, support vector vehicles, clustering, and Bayesian networks. These algorithms can include computer-executable code that can be retrieved by the server **264** through the network/cloud **266** and may be used to generate a predictive evaluation of the field **14**. In some instances, the machine learning engine may allow for changes to a harvest yield map **280**, a projected weed concentration map **282**, and/or a prescription map **284** to be performed without human intervention.

With respect to FIGS. **5-12**, various example embodiments of the system **200** during various operations are illustrated according to the present subject matter will be described below. Particularly, FIGS. **5-7** generally illustrate a first vehicle **202** performing a first agricultural operation in a working area **286** of a field **14** in accordance with various examples of the present disclosure. Additionally, FIG. **8** generally illustrates an exemplary harvest yield map **280** in accordance with various examples of the present disclosure. FIG. **9** generally illustrates an exemplary projected weed concentration map **282** in accordance with various examples of the present disclosure. FIG. **10** generally illustrates an exemplary prescription map **284** in accordance with various examples of the present disclosure. FIGS. **11** and **12** generally illustrate projected paths for a second vehicle **204** to selectively apply an agricultural product to one or more regions of a field **14** detected by the first vehicle **202** in accordance with various examples of the present disclosure.

Referring further to FIGS. **5-7**, the working area **286** of the field **14** extends in an operating direction **288** between a first end portion **290** and a second end portion **292**. In addition, a plurality of swath lines **294** may extend in the operating direction **288** between the first and second end portions **406**, **408** of the working area **286**. In general, the swath lines **294** may correspond to predetermined or pre-generated guidance lines representing anticipated or desired paths or passes across the field **14** for performing a first agricultural operation (e.g., a planting operation, a seeding operation, a tilling operation, a harvesting operation, a spraying operation, and/or any other operation). While the embodiments of FIGS. **5-7** generally illustrate and describe the first vehicle **202** being configured as a harvester **10**, it will be appreciated that the first vehicle **202** may be configured as tractor, harvester **10**, self-propelled windrower, self-propelled sprayer, drone, and/or the like. In addition, it will be appreciated that the first vehicle **202** may be human-controlled, autonomously controlled, and/or semi-autonomously controlled without departing the scope of the present disclosure.

With further reference to FIGS. **5-7**, while the first operation is performed by moving the first vehicle **202** through each swath line **294**, the one or more crop material sensors **88** may monitor the crop material **16** as the crops **12** are severed by the first vehicle **202**. Data captured by the one or more crop material sensors **88** may be provided to the first computing system **106** (FIG. **3**). Additionally, a positioning device **224** may be configured to provide data to the first computing system **106** related to a position of the first vehicle **202**, which may be correlated to the crop material data **244** generated by the one or more crop material sensors **88**. In some embodiments, the crop material data **244** and the location data may be utilized by the first computing system **106** to generate field data **246**.

The field data **246** may include defined objects within the crop material data **244**. For example, the system **200** may determine whether an object is harvest material **18** or non-harvest material **20**. In addition, the system **200** may be configured to determine a concentration or ratio of harvest material **18** and/or non-harvest material **20** within the field **14**. Still further, the system **200** may determine various objects within the non-harvest material **20**, which may include weeds **296A**, **296B** including a previous harvest season crop that is different than a current crop, etc.

In some instances, the system **200** may store areas of the field **14** as distinct regions. In such instances, the system **200** may geolocate various data to each region based on data from the positioning device **224**. For example, the stored field data may include a harvest volume of the harvest material **18** within one or more regions of the field **14** and/or a non-harvest volume of the non-harvest material **20** within the one or more regions of the field **14**.

Referring to FIG. **8**, based on the field data **246** of the first vehicle **202**, and the location data **218** of the first vehicle **202**, the system **200** may generate a harvest yield map **280**, which generally illustrates harvest material **18** outputs for each of the one or more regions within the field **14**. For example, the yield map **280** may illustrate regions **298A**, **298B 298C** of the field **14** that produced greater than a defined range of harvest material **18**, the defined range of harvest material **18**, and/or less than the defined range of harvest material **18**. Based on the various regions, the system **200** may project that regions **298A** that produced greater than the defined range of harvest material **18** may also have a higher concentration of weeds **296A**, **296B** as well. As such, a volume of the agricultural product above a

defined volume or application rate may be applied to the regions **298A** having the higher concentration of weeds **296A**, **296B**. Likewise, the system **200** may project that regions **298B** that produced less than the defined range of harvest material **18** may also have a lesser concentration of weeds **296A**, **296B** as well. As such, an amount of the agricultural product less than a defined volume or application rate may be applied to the regions **298B** having the lesser concentration of weeds **296A**, **296B**. Further, the system **200** may project that regions **298C** that produced the defined range of harvest material **18** may also have an average concentration of weeds **296A**, **296B** as well. As such, an amount of the agricultural product at the defined volume or application rate may be applied to the regions **298C** having the lesser concentration of weeds **296A**, **296B**.

Referring to FIG. **9**, the system **200** may additionally or alternatively generate a weed concentration map **282** based on the field data **246** of the first vehicle **202**, and the location data **218** of the first vehicle **202**. The weed concentration map **282** may illustrate regions **300A**, **300B**, **300C** of the field **14** that have a varied concentration and/or a number of weeds **296A**, **296B** from a defined range, which may be determined through the crop material sensors **88** detecting various objects within the crop material **16** and/or the non-harvest material **20** during the first operation. For instance, a first region **300A** may have a higher concentration of weeds **296A**, **296B** from the defined range, a second region **300B** may have a lower concentration of weeds **296A**, **296B** from the defined range, and remaining regions **300C** may have a concentration of weeds **296A**, **296B** within the defined range.

The projected weed concentration map **282** may be used by the second vehicle **204** to apply various quantities of agricultural product to defined regions of the field **14**. Additionally or alternatively, based on the harvest material **18** and/or non-harvest material **20** outputted from the harvester **10**, the first computing system **206** may provide a sprayer operator with a suggested product to apply to the field **14**.

The projected weed concentration map **282** may be used by the second vehicle **204** to apply various volumes or application rates of agricultural product to defined portions of the field **14**. For example, if a region **300A** of the field **14** contains a higher projected concentration of weeds **296A**, **296B** than a defined concentration range, a greater volume or application rate of the agricultural product or a different agricultural product may be applied to the higher projected concentration regions **300A**. Further, if a region **300B** of the field **14** contains a lower projected concentration of weeds **296A**, **296B** than the defined concentration range, a lesser volume or application rate of the agricultural product or a different agricultural product may be applied to the higher projected concentration regions **300B**.

Referring to FIGS. **10-12**, the system **200** may additionally or alternatively generate a prescription map **284** that illustrates various regions **302A**, **302B** of the field **14** that may have one or more agricultural products applied thereto based on the field data **246** of the first vehicle **202**, and the location data **218** of the first vehicle **202**. For example, the prescription map **284** may include a first region **302A** that is indicative of an area for which a first weed type **296A** that is to have a first agricultural product applied thereto and/or a second region **302B** that is indicative of an area for which a second weed type **296B** that is to have a second agricultural product applied thereto by the second vehicle **204**. In various instances, the first agricultural product may be applied at a first application rate while the second agricultural product may be applied at a second application rate.

In various examples, the system **200** may further generate one or more suggested paths **304**, **306** for the second vehicle **204** to apply an agricultural product to the first regions **302A** and/or the second regions **302B** of the field **14**. The paths **304**, **306** may be generated based on one or more user defined settings and/or field characteristics. The user defined settings may include any factor of a spray operation that may be altered by the user while the field characteristics may include one or more features of the field **14**. For example, the features may include whether the crop material **16** is in a pre-emergence stage or a post emergence stage. In such instances, as illustrated in FIG. **11**, a first path **304** may be generated to the second regions **320B** of the field **14** in which the sprayer **100** travels a first distance and may be utilized when the crop material **16** is in a pre-emergence stage. Additionally or alternatively, as illustrated in FIG. **12**, a second path **306** may be generated to the second regions **302B** of the field **14** in which the sprayer **100** travels a second distance and may be utilized when the crop material **16** is in a post-emergence stage. In some instances, the second distance may be less than the first distance.

Referring now to FIG. **13**, a flow diagram of some embodiments of a method **400** for selectively applying an agricultural product is illustrated in accordance with aspects of the present subject matter. In general, the method **400** will be described herein with reference to the system **200** described herein. However, it will be appreciated by those of ordinary skill in the art that the disclosed method **400** may generally be utilized with any suitable agricultural sprayer **100** and/or may be utilized in connection with a system having any other suitable system configuration. In addition, although FIG. **13** depicts steps performed in a particular order for purposes of illustration and discussion, the methods discussed herein are not limited to any particular order or arrangement. One skilled in the art, using the disclosures provided herein, will appreciate that various steps of the methods disclosed herein can be omitted, rearranged, combined, and/or adapted in various ways without deviating from the scope of the present disclosure.

As shown in FIG. **13**, at (**402**), the method **400** can include capturing crop material data while processing crop material through a harvester from a crop material sensor. In general, the harvester is configured to sever crops from a field and direct the crop material into the harvester. Within the harvester, the crop material may be separated into harvest material (e.g., grain) and non-harvest material (e.g., material other than grain (MOG), straw, previous harvest season crop, etc.). The harvester may further include one or more crop material sensors that may be configured to capture data indicative of a makeup of the crop material.

At (**404**), the method **400** can include classifying objects within the crop material data as harvest material or non-harvest material. In some instances, the crop material sensor can be configured to capture image data and/or image-like data. In such instances, the system provided herein can utilize one or more image processing algorithms to classify the objects within the crop material data as the harvest material or the non-harvest material.

At (**406**), the method **400** can include determining a harvest volume of the harvest material within one or more regions of a field based on the data provided from the one or more crop material sensors. Additionally or alternatively, at (**408**), the method **400** can include determining a non-harvest volume of the non-harvest material within the one or more regions of the field. As provided herein, in some

instances, the system may store areas of the field as distinct regions. In such instances, the system may correlate various data to each region. In addition, each region may be geolocated based on data from the positioning device.

At (410), the method 400 can include determining the one or more regions of the field having the harvest volume exceeding a defined range. For example, regions of the field that produced greater than a defined range of harvest material, the defined range of harvest material, and/or less than the defined range of harvest material. Based on the various regions, the system may project that regions that produced greater than the defined range of harvest material may also have a higher concentration of weeds as well. As such, a volume of the agricultural product above a defined volume or application rate may be applied to the regions having the higher concentration of weeds. Likewise, the system may project that regions that produced less than the defined range of harvest material may also have a lesser concentration of weeds as well. As such, an amount of the agricultural product less than a defined volume or application rate may be applied to the regions having the lesser concentration of weeds. Further, the system may project that regions that produced the defined range of harvest material may also have an average concentration of weeds as well. As such, an amount of the agricultural product at the defined volume or application rate may be applied to the regions having the lesser concentration of weeds.

At (412), the method 400 can include identifying one or more of the objects within the non-harvest material as weeds. For example, the system may classify whether objects within the non-harvest material are weeds (e.g., any plant other than harvest material), dirt, rocks, stalk, straw, harvested crop from a previous season, etc.

At (414), the method 400 can include generating a map based on the detected harvest material and the non-harvest material. As provided herein, the map may be at least one of a harvest material yield map, a projected weed concentration map, or a prescription map.

At (416), the method 400 can include generating one or more suggested paths for a sprayer based on the prescription map to apply an agricultural product to a first region and/or a second region of the field. The one or more suggested paths may be generated based on one or more user defined settings and/or field characteristics. The user defined settings may include any factor of a spray operation that may be altered by the user while the field characteristics may include one or more features of the field. For example, the features may include whether the cop material is in a pre-emergence stage or a post emergence stage. For instance, a first path may be generated to the second regions of the field in which the sprayer travels a first distance and may be utilized when the crop material is in a pre-emergence stage. Additionally or alternatively, a second path may be generated to the second regions of the field in which the sprayer travels a second distance and may be utilized when the crop material is in a post-emergence stage. In some instances, the second distance may be varied from the first distance.

In various examples, the method may implement machine learning methods and algorithms that utilize one or several machine learning techniques including, for example, decision tree learning, including, for example, random forest or conditional inference trees methods, neural networks, support vector vehicles, clustering, and Bayesian networks. These algorithms can include computer-executable code that can be retrieved by the computing system and/or through a network/cloud and may be used to evaluate and update the boom deflection model. In some instances, the machine learning engine may allow for changes to the boom deflection model to be performed without human intervention.

It is to be understood that the steps of any method disclosed herein may be performed by a computing system upon loading and executing software code or instructions which are tangibly stored on a tangible computer-readable medium, such as on a magnetic medium, e.g., a computer hard drive, an optical medium, e.g., an optical disc, solid-state memory, e.g., flash memory, or other storage media known in the art. Thus, any of the functionality performed by the computing system described herein, such as any of the disclosed methods, may be implemented in software code or instructions which are tangibly stored on a tangible computer-readable medium. The computing system loads the software code or instructions via a direct interface with the computer-readable medium or via a wired and/or wireless network. Upon loading and executing such software code or instructions by the controller, the computing system may perform any of the functionality of the computing system described herein, including any steps of the disclosed methods.

The term "software code" or "code" used herein refers to any instructions or set of instructions that influence the operation of a computer or controller. They may exist in a computer-executable form, such as vehicle code, which is the set of instructions and data directly executed by a computer's central processing unit or by a controller, a human-understandable form, such as source code, which may be compiled in order to be executed by a computer's central processing unit or by a controller, or an intermediate form, such as object code, which is produced by a compiler. As used herein, the term "software code" or "code" also includes any human-understandable computer instructions or set of instructions, e.g., a script, that may be executed on the fly with the aid of an interpreter executed by a computer's central processing unit or by a controller.

This written description uses examples to disclose the technology, including the best mode, and also to enable any person skilled in the art to practice the technology, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the technology is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they include structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

What is claimed is:

1. A system for an agricultural operation, the system comprising:

a sprayer configured to selectively apply an agricultural product, the sprayer configured to communicatively couple with a harvester configured to separate crop material into a harvest material and a non-harvest material, the harvester including a crop material sensor operably coupled with the harvester and configured to capture crop material data; and a positioning device configured to generate location data to geolocate the crop material data relative to a field;

a nozzle assembly operably coupled with the sprayer; and

a computing system communicatively coupled with the crop material sensor and the positioning device, the computing system configured to:

classify objects within the crop material data as the harvest material or the non-harvest material;

generate a map based on the harvest material and the non-harvest material;

generate one or more suggested paths based on the crop material within the field being in a pre-emergence state or post-emergence state; and

selectively apply the agricultural product from the nozzle assembly along the one or more suggested paths.

2. The system of claim **1**, wherein the sprayer includes a boom assembly supporting the nozzle assembly.

3. The system of claim **2**, wherein the computing system is remote from the harvester and the sprayer.

4. The system of claim **2**, wherein the harvester and the sprayer are communicatively coupled through a communication network/cloud.

5. The system of claim **1**, wherein the computing system is further configured to:

store a harvest volume of the harvest material within one or more regions of the field; and

store a non-harvest volume of the non-harvest material within the one or more regions of the field.

6. The system of claim **5**, wherein the map is a harvest material yield map, the harvest material yield map configured to illustrate a yield of the harvest material from each of the one or more regions within the field.

7. The system of claim **1**, wherein the crop material sensor is configured to capture image data, and wherein the computing system utilizes one or more image processing algorithms to classify the objects within the crop material data as the harvest material or the non-harvest material.

8. The system of claim **1**, wherein the computing system is further configured to:

identify one or more of the objects within the non-harvest material as weeds, wherein the map is a projected weed concentration map based on the weeds, the projected weed concentration map configured to illustrate a location of the weeds within the field.

9. The system of claim **8**, wherein the computing system is further configured to:

classify the weeds as a first set of weeds or a second set of weeds; and

generate a prescription map based on the first set of weeds and the second set of weeds, wherein the prescription map includes a first region associated with the first set of weeds and a second region associated with the second set of weeds.

10. The system of claim **9**, wherein the computing system is further configured to generate a first suggested path for the sprayer to the second region when the crop material within the field are in the pre-emergence state and a second suggested path for the sprayer to the second region when the crop material within the field are in the post-emergence state.

11. A method for operating an agricultural system, the method comprising:

capturing, from a crop material sensor, crop material data while processing crop material through a harvester;

classifying objects within the crop material data as harvest material or non-harvest material;

generating a map based on the harvest material and the non-harvest material;

generating a first suggested path for a second vehicle based on the crop material being in a pre-emergence state and a second suggested path based on the crop material being in a post-emergence state; and

selectively applying an agricultural product along the first suggested path or the second suggested path through a sprayer.

12. The method of claim **11**, wherein the method further comprises:

determining a harvest volume of the harvest material within one or more regions of a field; and

determining a non-harvest volume of the non-harvest material within the one or more regions of the field.

13. The method of claim **12**, further comprising:

determining the one or more regions of the field having the harvest volume exceeding a defined range.

14. The method of claim **11**, further comprising:

identifying one or more of the objects within the non-harvest material as weeds.

15. The method of claim **11**, wherein the map is at least one of a harvest material yield map, a projected weed concentration map, or a prescription map.

16. An agricultural system comprising:

a harvester configured to separate crop material into a harvest material and a non-harvest material including a crop material sensor configured to capture crop material data of the crop material;

a computing system communicatively coupled with the crop material sensor, the computing system configured to:

classify objects within the crop material data as harvest material or non-harvest material; and

generate one or more suggested paths based on the crop material within a field being in a pre-emergence state or post-emergence state; and

a sprayer communicatively coupled with the harvester and configured to selectively apply an agricultural product to the field along the one or more suggested paths.

17. The system of claim **16**, further comprising:

a positioning device configured to generate location data to geolocate the crop material data relative to the field.

18. The system of claim **17**, further comprising:

a computing system communicatively coupled with the crop material sensor and the positioning device, the computing system configured to:

generate a map based on the harvest material.

19. The system of claim **17**, further comprising:

a computing system communicatively coupled with the crop material sensor and the positioning device, the computing system configured to:

generate a map based on the non-harvest material.

* * * * *