US012398556B2

(12) United States Patent
Torres et al.

(10) Patent No.: US 12,398,556 B2
(45) Date of Patent: Aug. 26, 2025

(54) VENTILATION MEMBER AND SYSTEMS INCORPORATING THE SAME

(71) Applicant: **Stockton Products**, North Las Vegas, NV (US)

(72) Inventors: **Angelberto Torres**, La Puente, CA (US); **Thomas Arthur Anderberg**, Oakland, CA (US); **Don Pilz**, Livermore, CA (US)

(73) Assignee: **STOCKTON PRODUCTS**, Las Vegas, NV (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 179 days.

(21) Appl. No.: **18/046,888**

(22) Filed: **Oct. 14, 2022**

(65) **Prior Publication Data**

US 2023/0122577 A1 Apr. 20, 2023

Related U.S. Application Data

(60) Provisional application No. 63/256,506, filed on Oct. 15, 2021.

(51) **Int. Cl.**
E04B 1/70 (2006.01)
E04F 19/02 (2006.01)

(52) **U.S. Cl.**
CPC ***E04B 1/7069*** (2013.01); ***E04F 19/02*** (2013.01)

(58) **Field of Classification Search**
CPC E04B 1/7069; E04B 1/765; E04F 19/02; E04F 19/061; E04F 13/007
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,391,074	A	7/1983	Holsman	
5,630,297	A	5/1997	Rutherford	
6,385,932	B1	5/2002	Melchiori	
7,673,421	B2	3/2010	Pilz	
7,874,123	B2	1/2011	Maziarz	
8,082,713	B2	12/2011	Matthews	
8,584,416	B2	11/2013	Chenier	
9,279,247	B2	3/2016	Maziarz	
9,963,875	B1 *	5/2018	Prygon	E04C 2/528
10,024,063	B2	7/2018	Friel	
10,221,586	B2	3/2019	Mayer, Jr.	
10,494,818	B2	12/2019	Maziarz	
10,533,324	B2	1/2020	Baltz, Jr. et al.	

(Continued)

OTHER PUBLICATIONS

Koester, John H., "Getting to the Bottom of Moisture Management", 2015 Masonry Technology Inc., 7 pages.

Primary Examiner — Patrick J Maestri
(74) *Attorney, Agent, or Firm* — WOMBLE BOND DICKINSON (US) LLP

(57) **ABSTRACT**

A ventilation member includes a base panel for mounting onto a substrate, an upper panel extending transversely from the base panel, a lower panel spaced apart from the upper panel, and an inner panel extending transversely from the lower panel. A passageway is defined having a first portion defined between the base panel and the inner panel and a second portion extending transversely from the first portion and being defined between the upper and the lower panel. When used as part of a system, the ventilation member may be an upper ventilation member and the system may include a second lower ventilation member including a base panel and a leg extending transversely thereof.

45 Claims, 5 Drawing Sheets

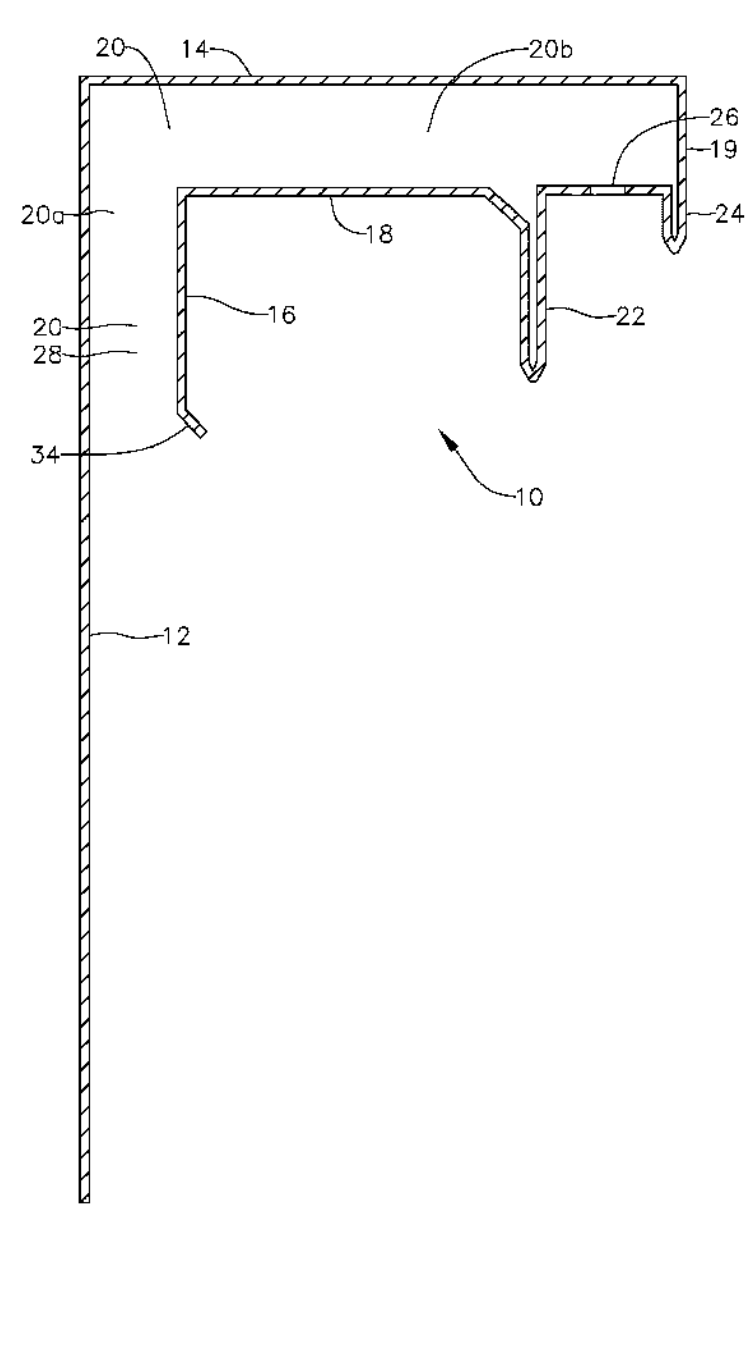

(56) **References Cited**

U.S. PATENT DOCUMENTS

10,570,640	B2	2/2020	Mayer, Jr.	
10,655,336	B2	5/2020	Friel	
D887,586	S	6/2020	Baltz, Jr. et al.	
D888,285	S	6/2020	Baltz, Jr. et al.	
10,669,721	B2	6/2020	Baltz, Jr. et al.	
D889,247	S	7/2020	Baltz, Jr. et al.	
D893,051	S	8/2020	Baltz, Jr. et al.	
10,731,335	B2	8/2020	Baltz, Jr. et al.	
10,731,354	B2	8/2020	Friel	
10,745,960	B1 *	8/2020	Hutchins	E06B 1/702
10,753,083	B2	8/2020	Baltz, Jr. et al.	
D896,993	S	9/2020	Baltz, Jr. et al.	
10,774,545	B2	9/2020	Baltz, Jr. et al.	
D902,443	S	11/2020	Baltz, Jr.	
D903,146	S	11/2020	Baltz, Jr. et al.	
D904,649	S	12/2020	Maldonado et al.	
D905,295	S	12/2020	Baltz, Jr. et al.	
10,947,722	B2	3/2021	Baltz, Jr. et al.	
10,968,635	B1 *	4/2021	Duran	E04D 3/363
D923,821	S	6/2021	Baltz, Jr. et al.	
11,180,913	B2	11/2021	Baltz, Jr. et al.	
11,180,928	B2	11/2021	Mayer, Jr.	
D940,349	S	1/2022	Baltz, Jr. et al.	
D940,350	S	1/2022	Baltz, Jr. et al.	
2016/0208484	A1 *	7/2016	Pilz	E04B 2/7411
2017/0226732	A1 *	8/2017	Collins	E04B 1/765
2017/0254091	A1	9/2017	Friel	
2019/0161960	A1 *	5/2019	Baltz, Jr.	E04F 13/068
2020/0370311	A1 *	11/2020	Koethe	E04F 19/061
2022/0205236	A1 *	6/2022	Kato	E04F 19/061

* cited by examiner

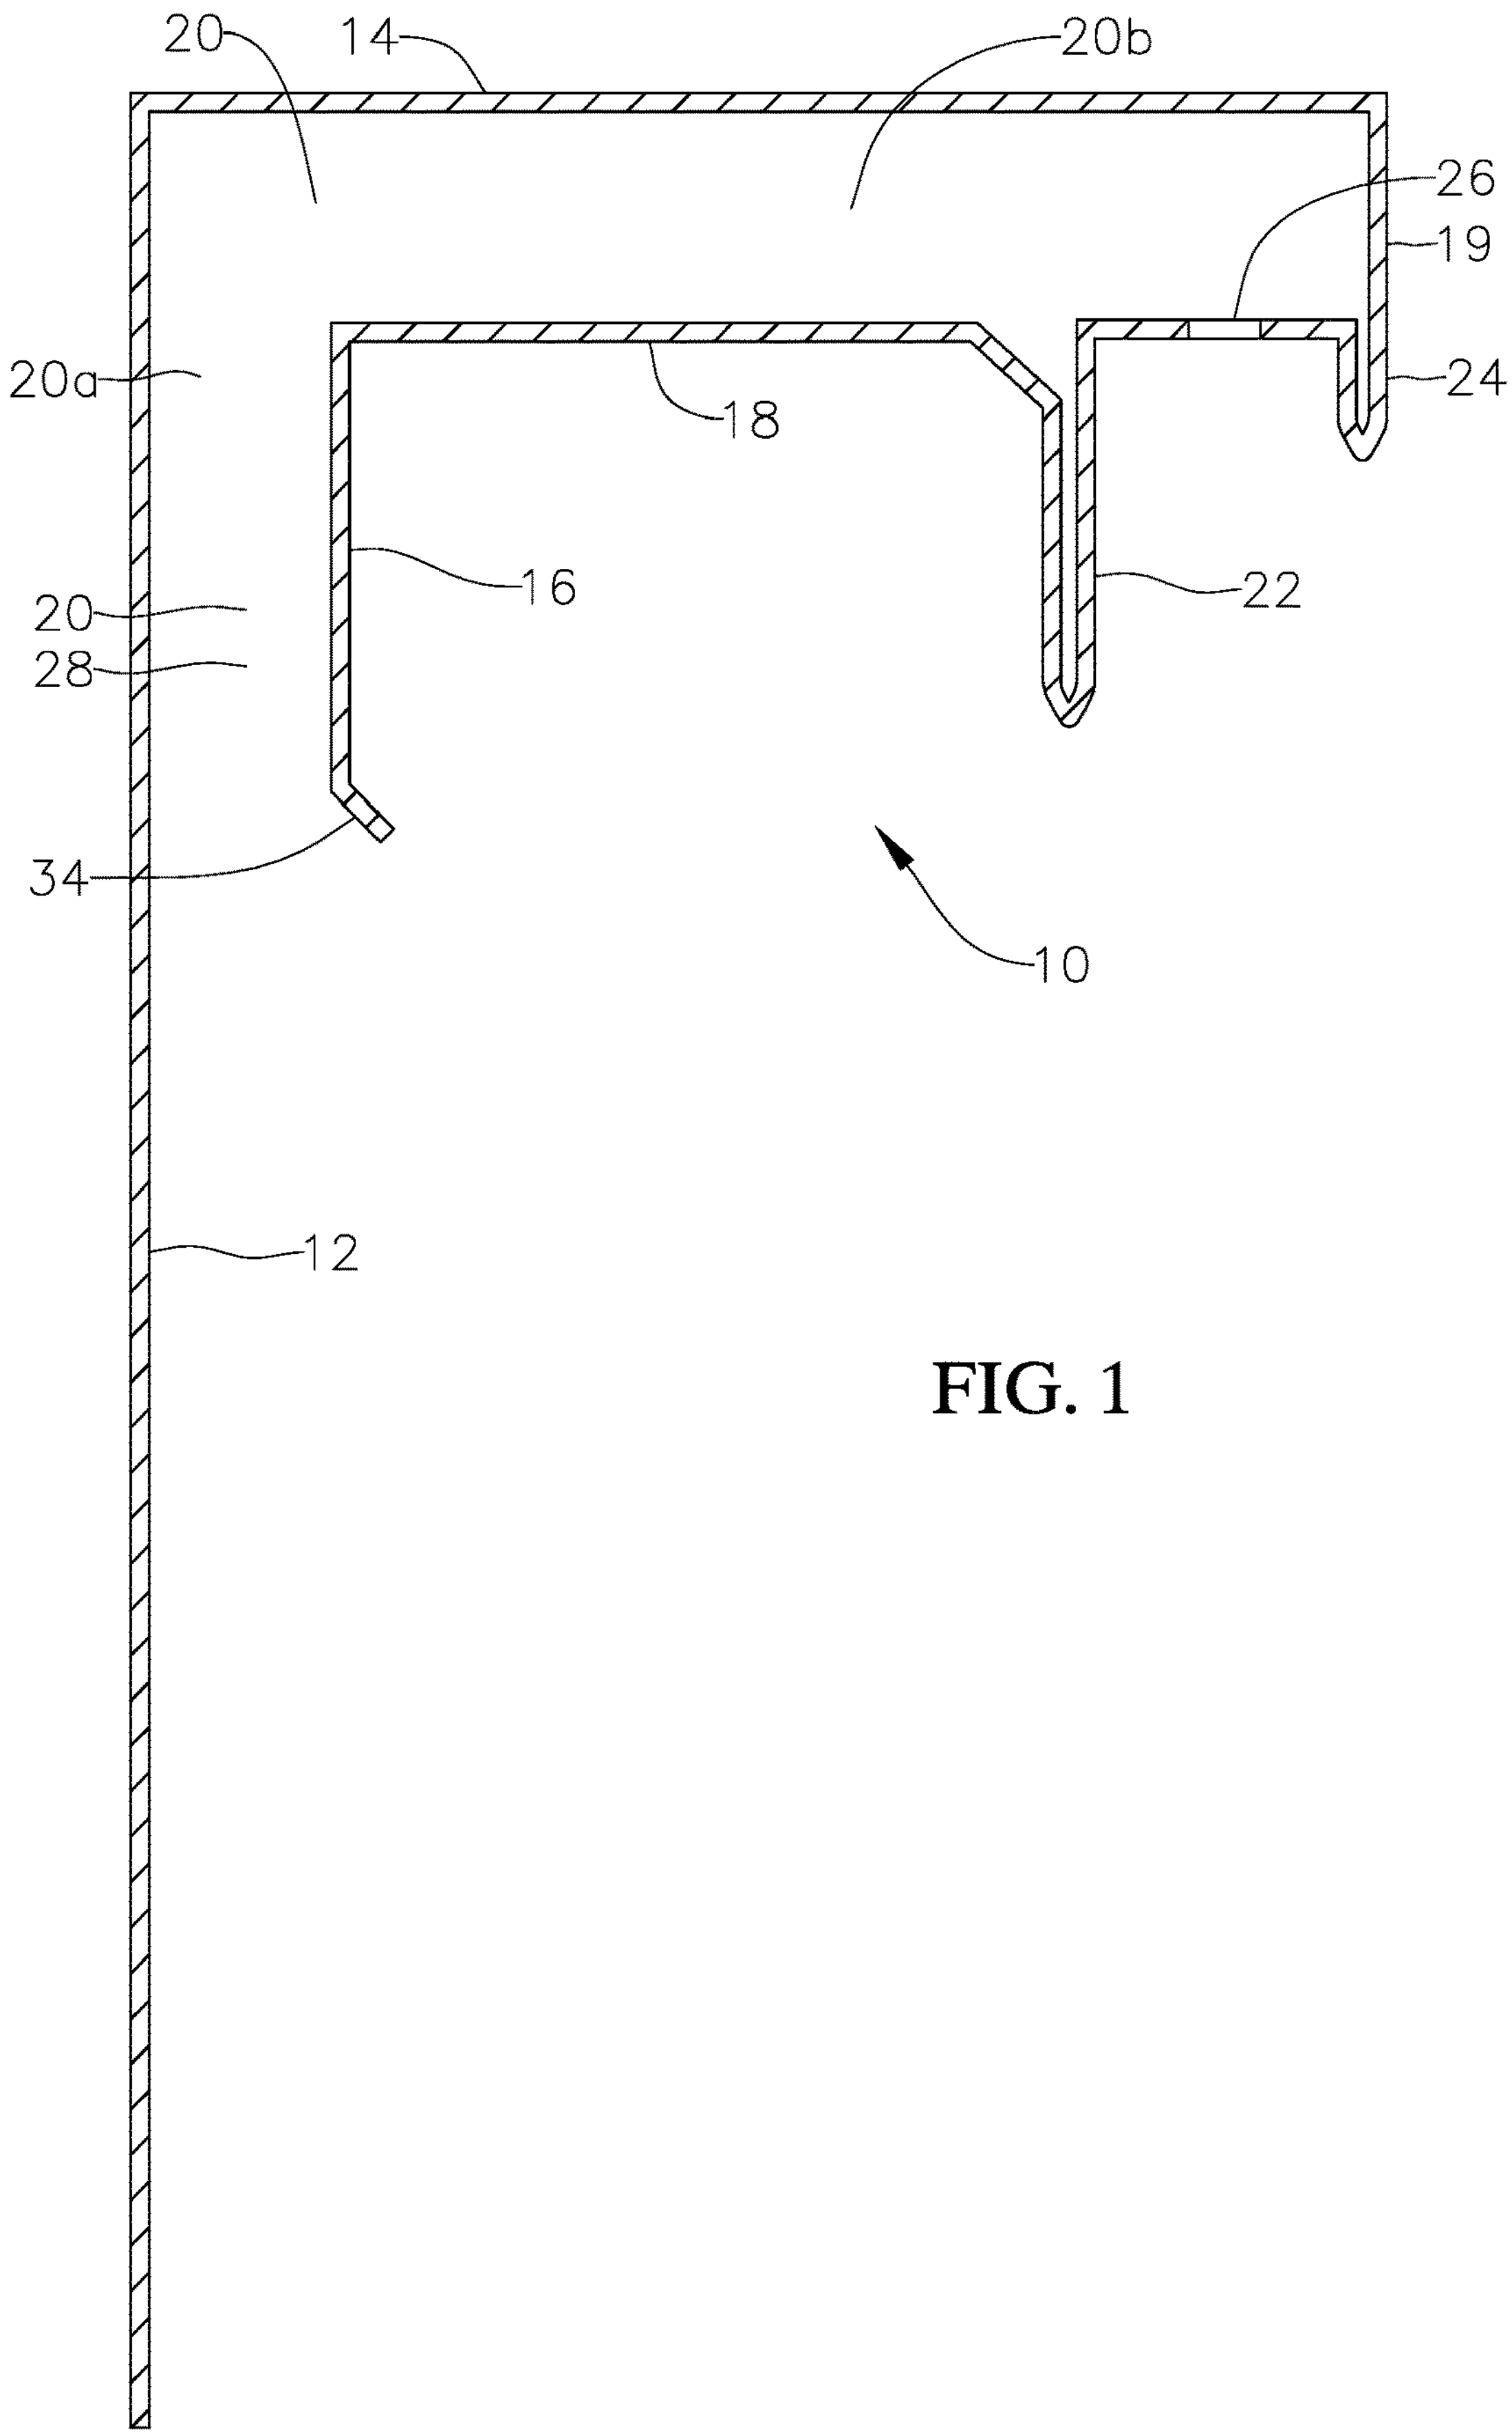

FIG. 1

FIG. 2

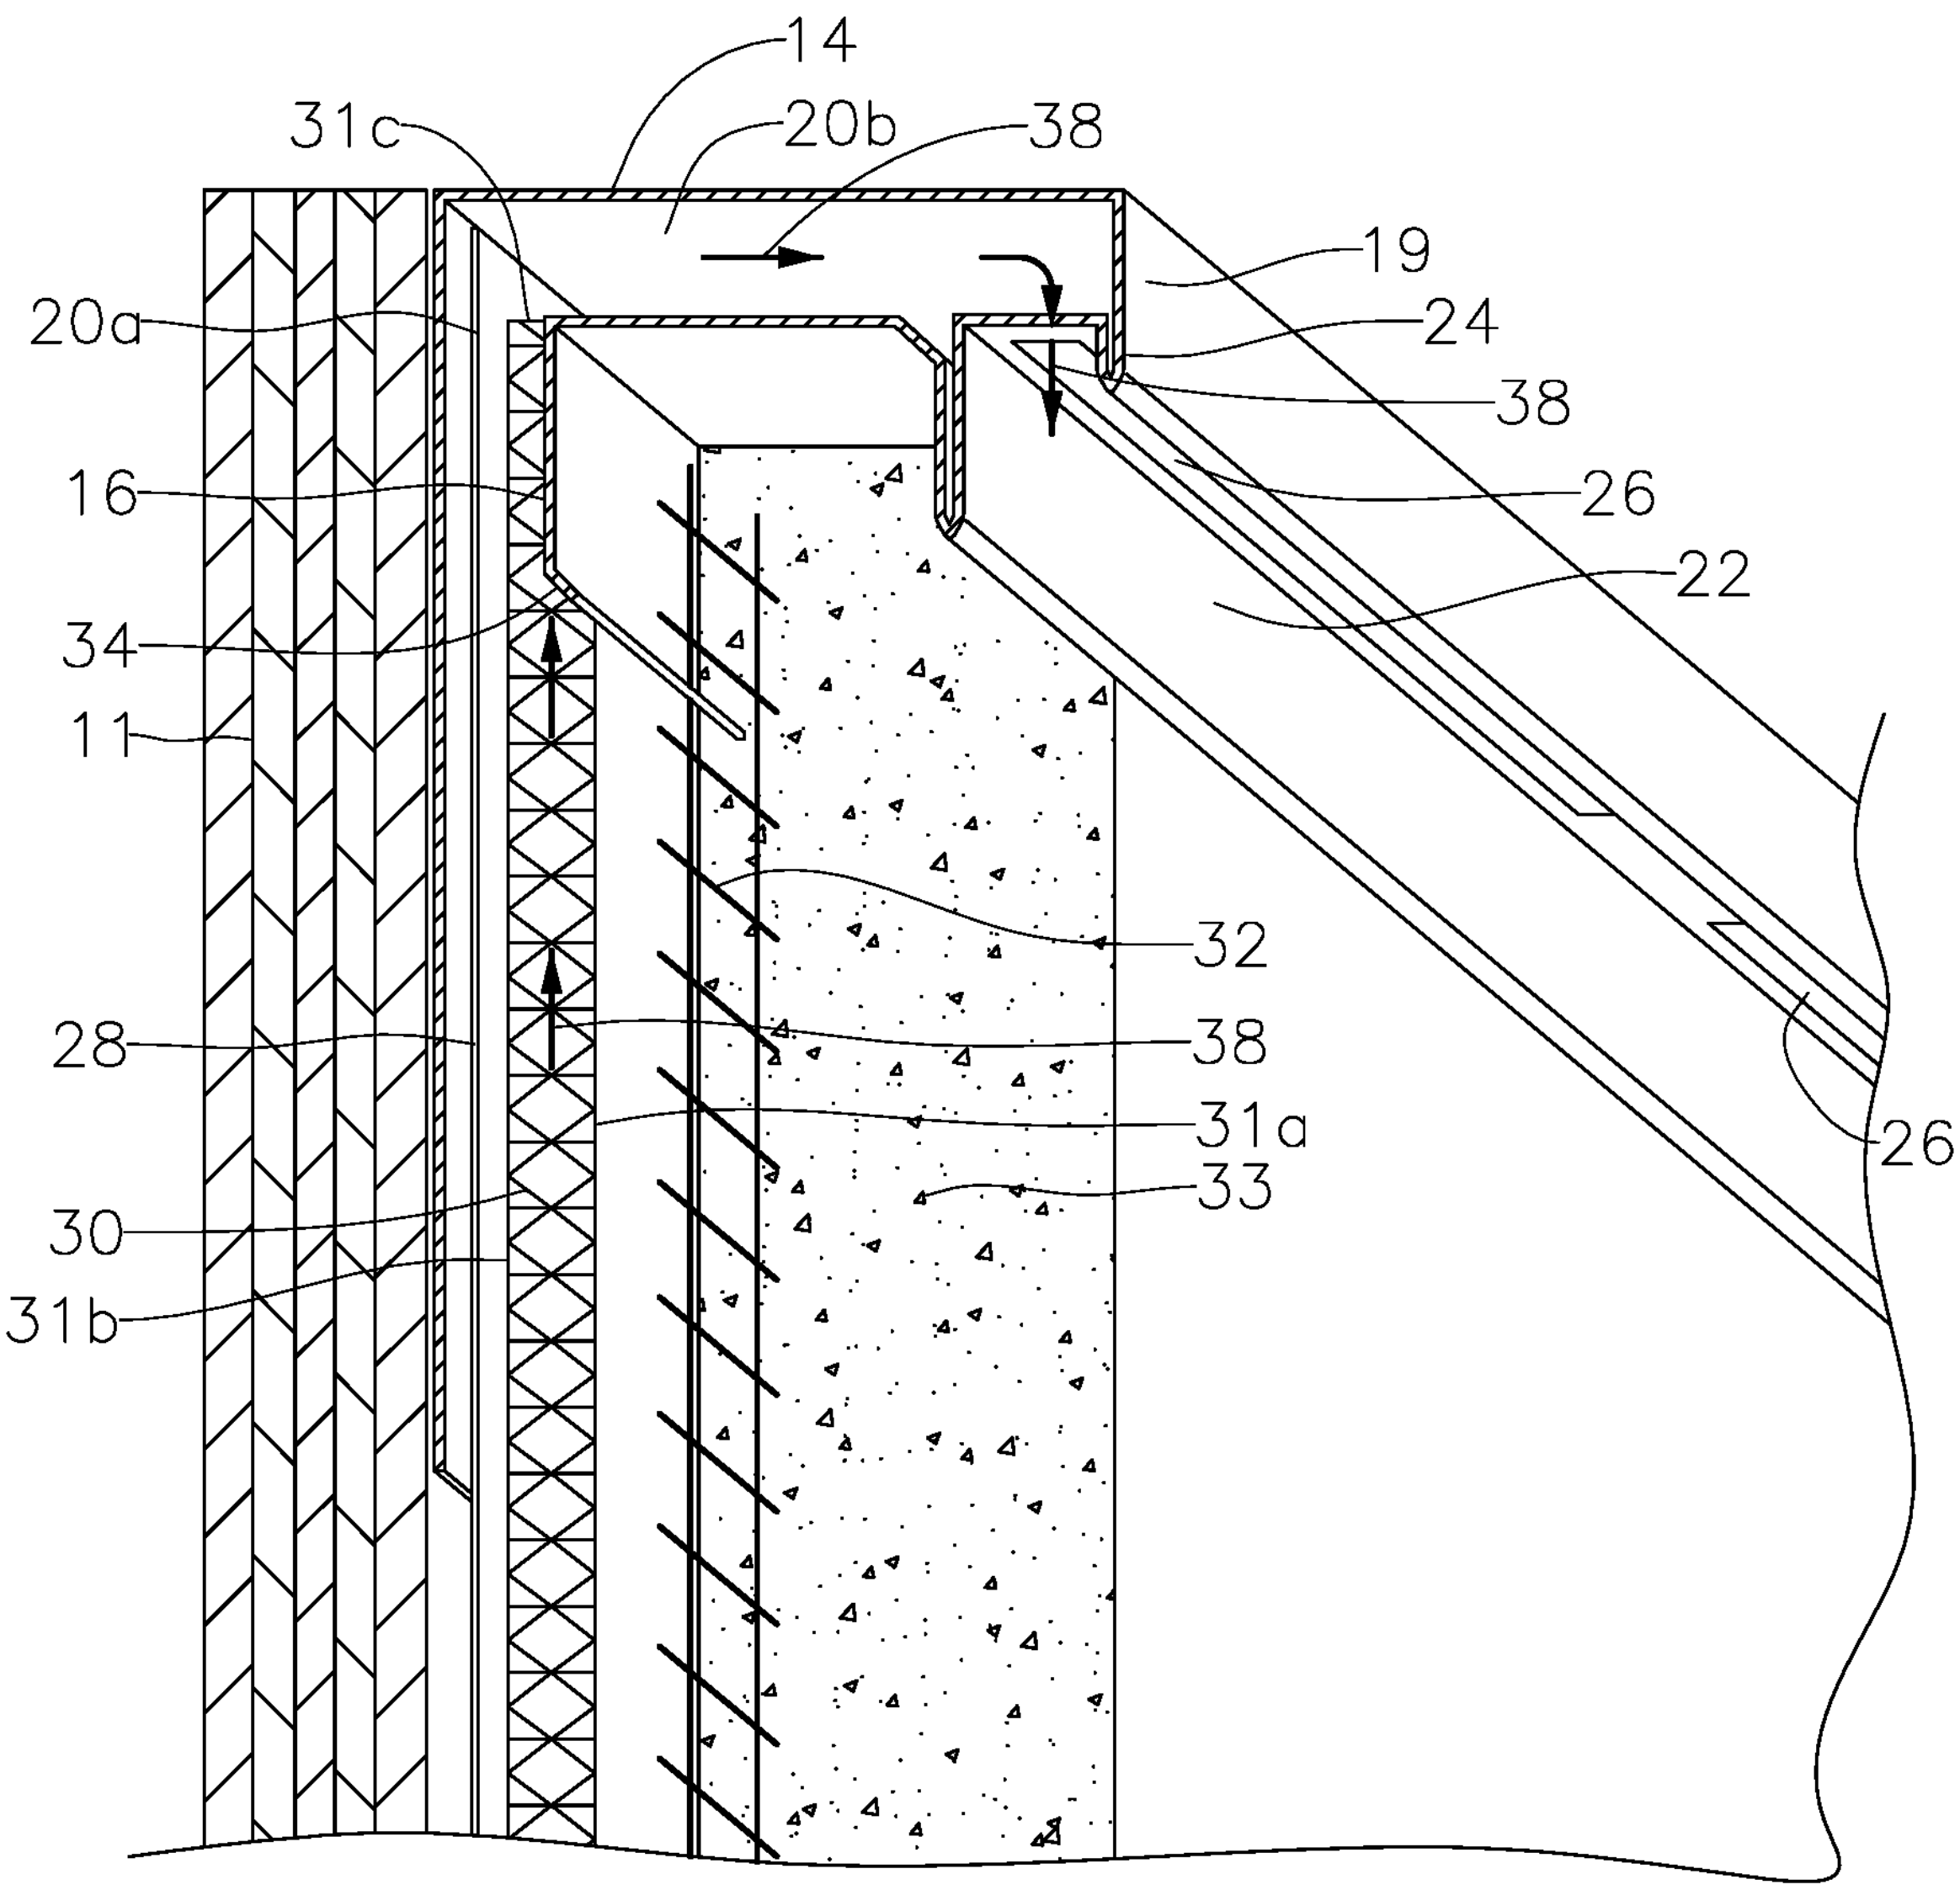

FIG. 3

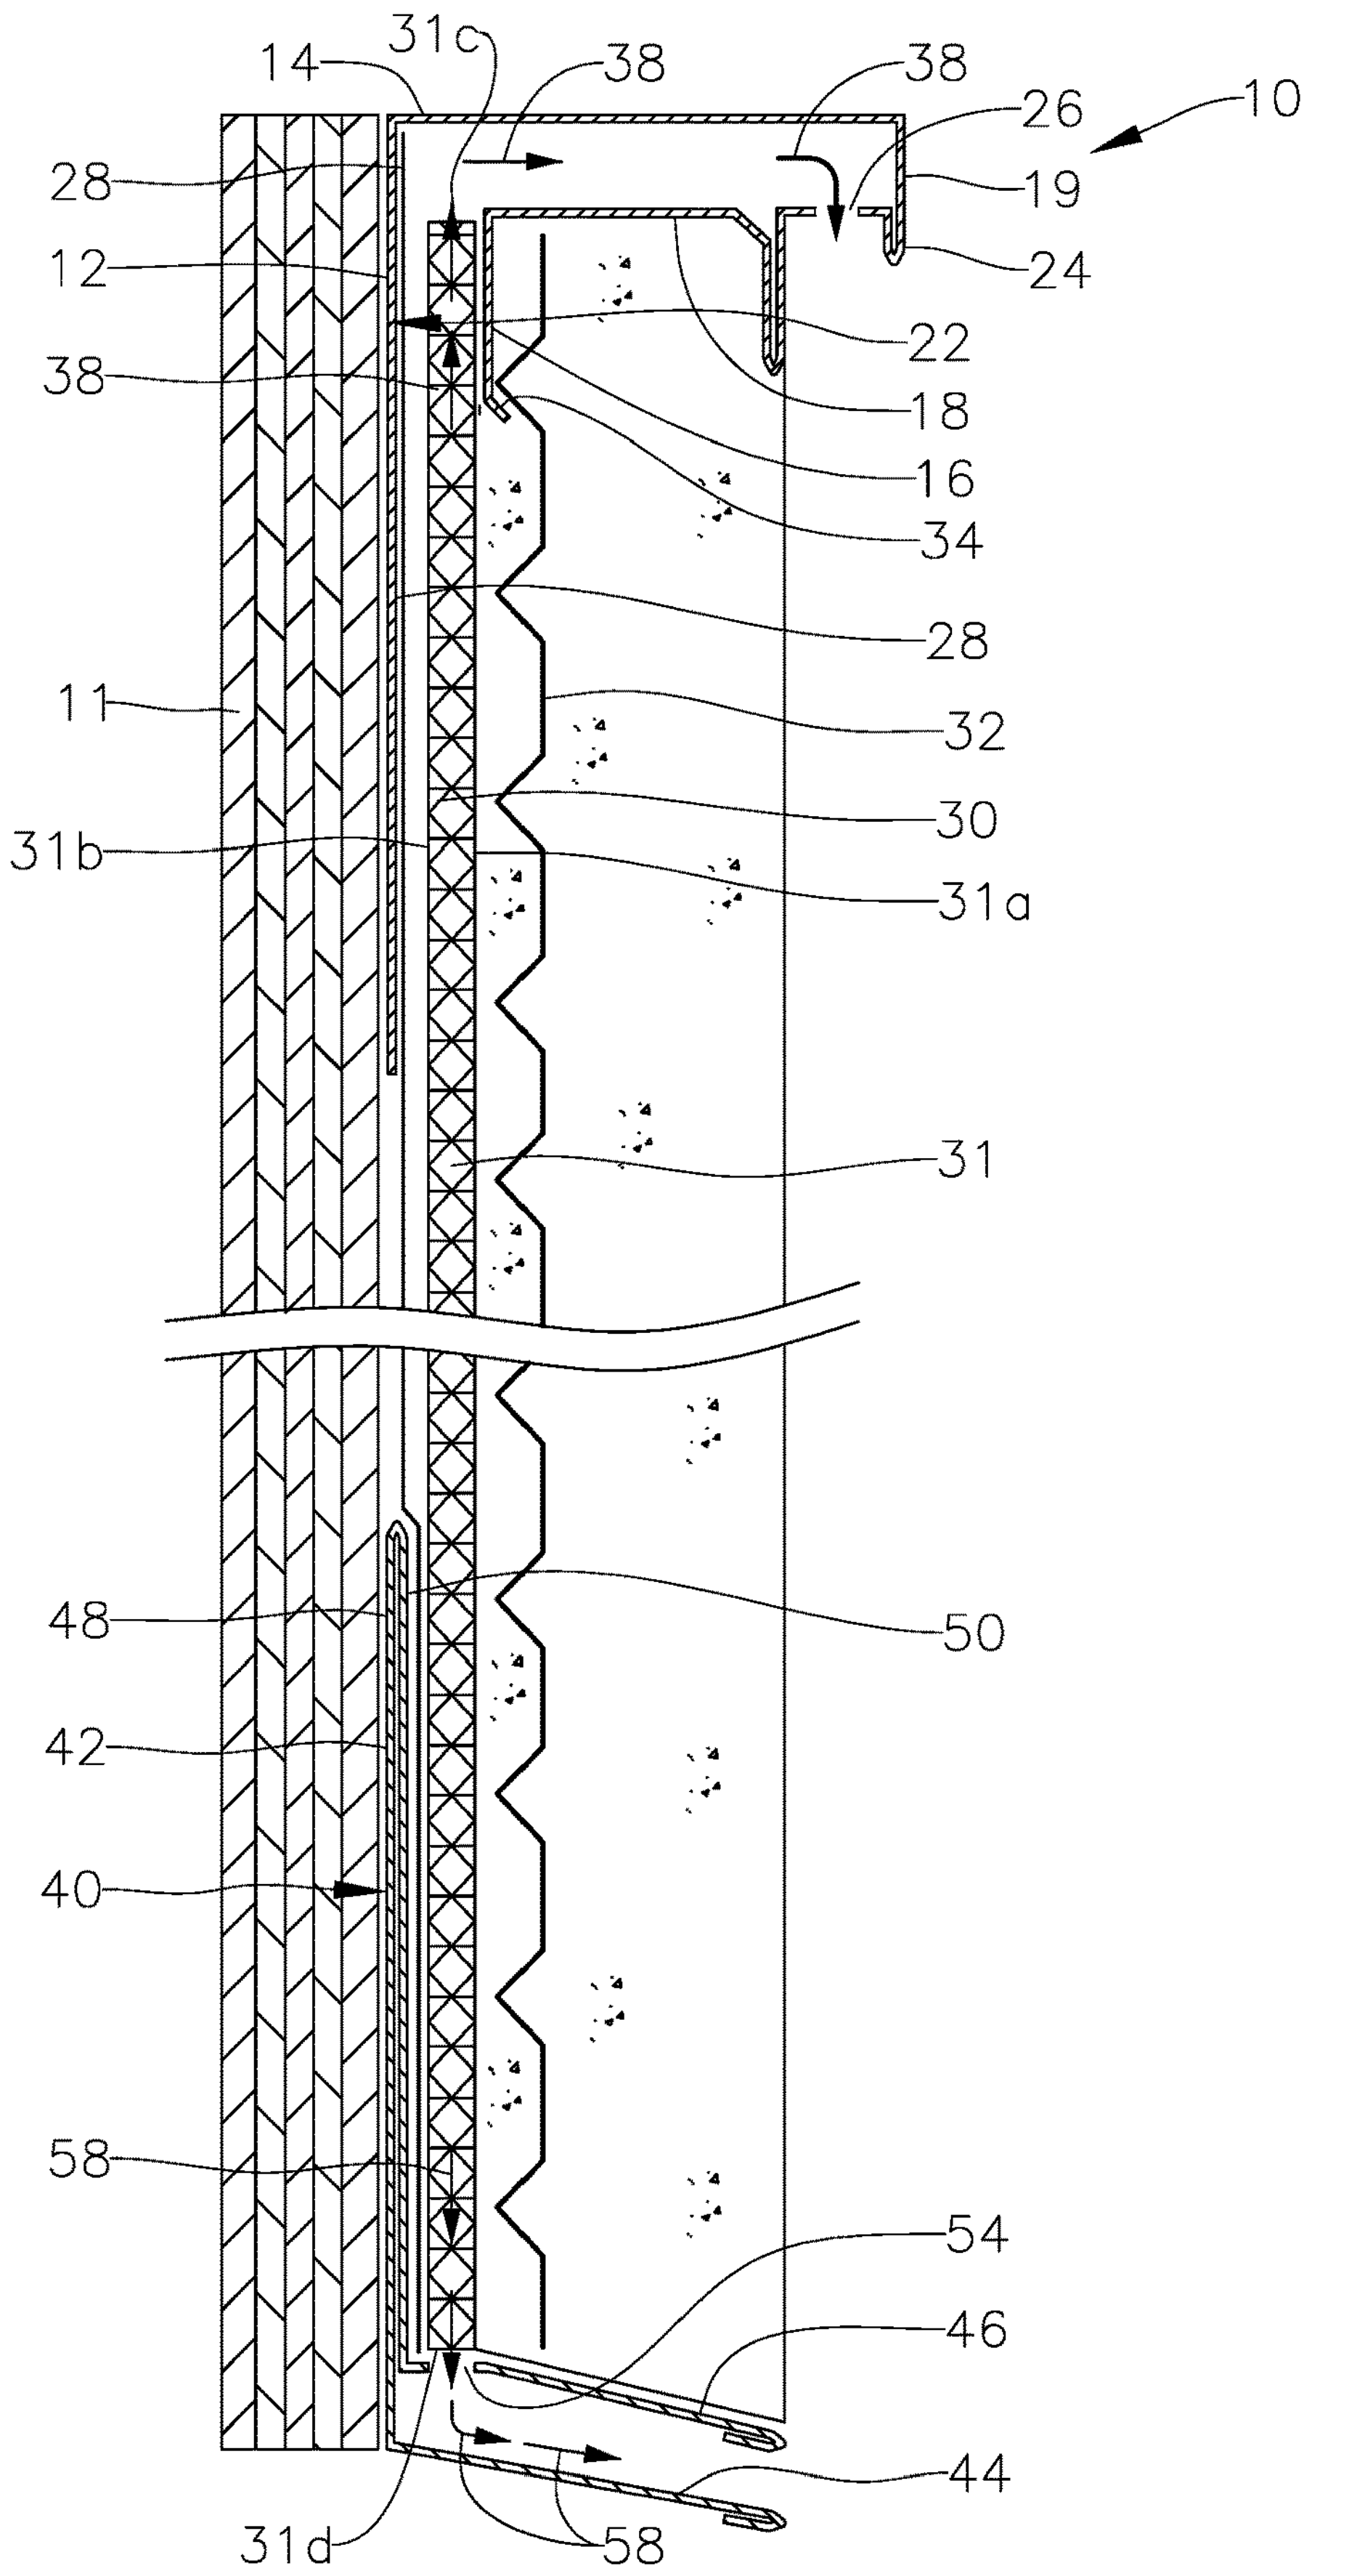

14
31c
38
38
26
10
28
19
12
24
22
38
18
16
34
28
11
32
30
31b
31a
31
48
50
42
40
58
54
46
44
31d
58

FIG. 4A

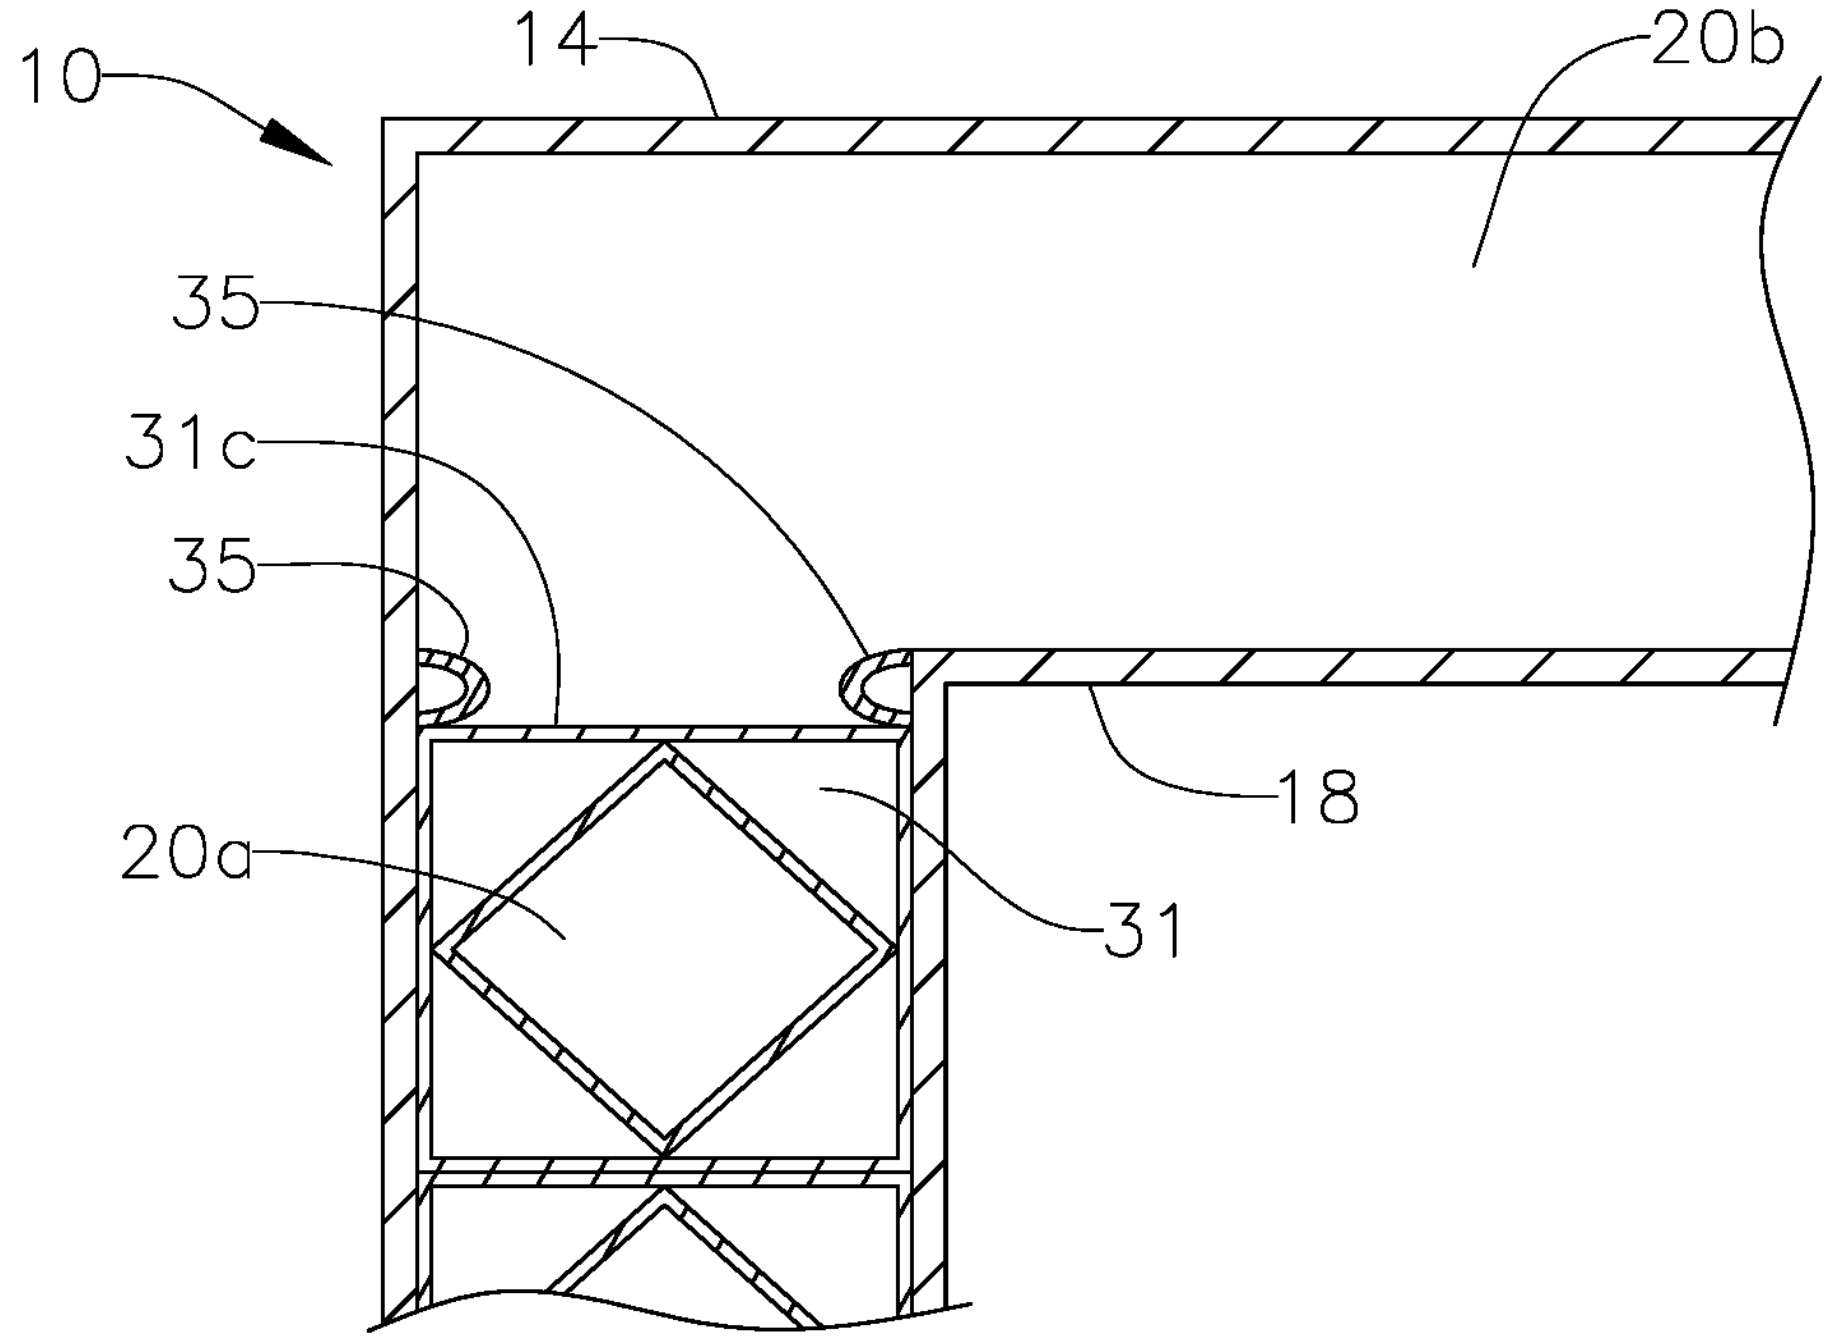

FIG. 4B

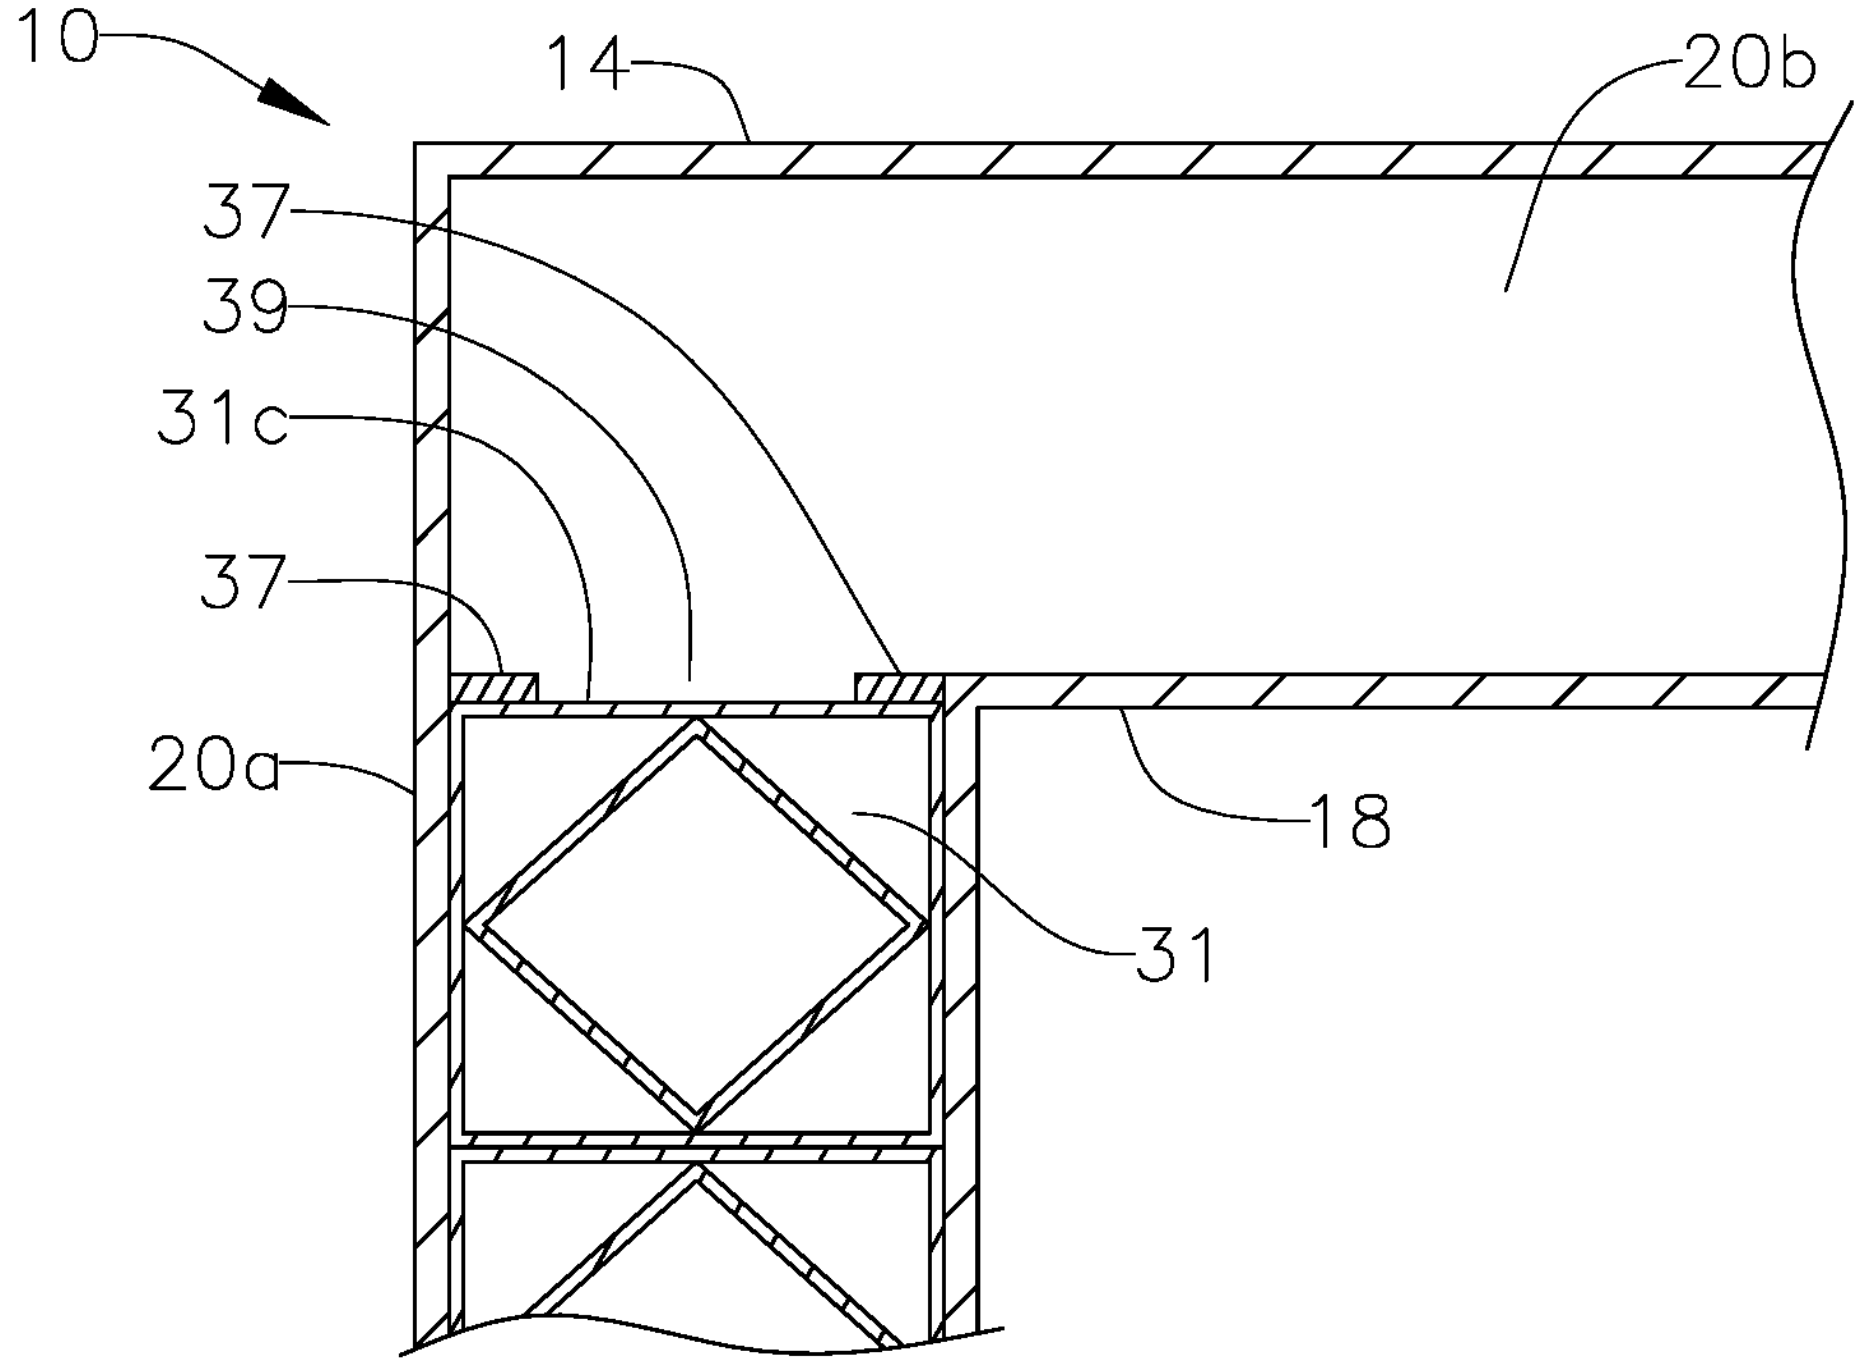

FIG. 5

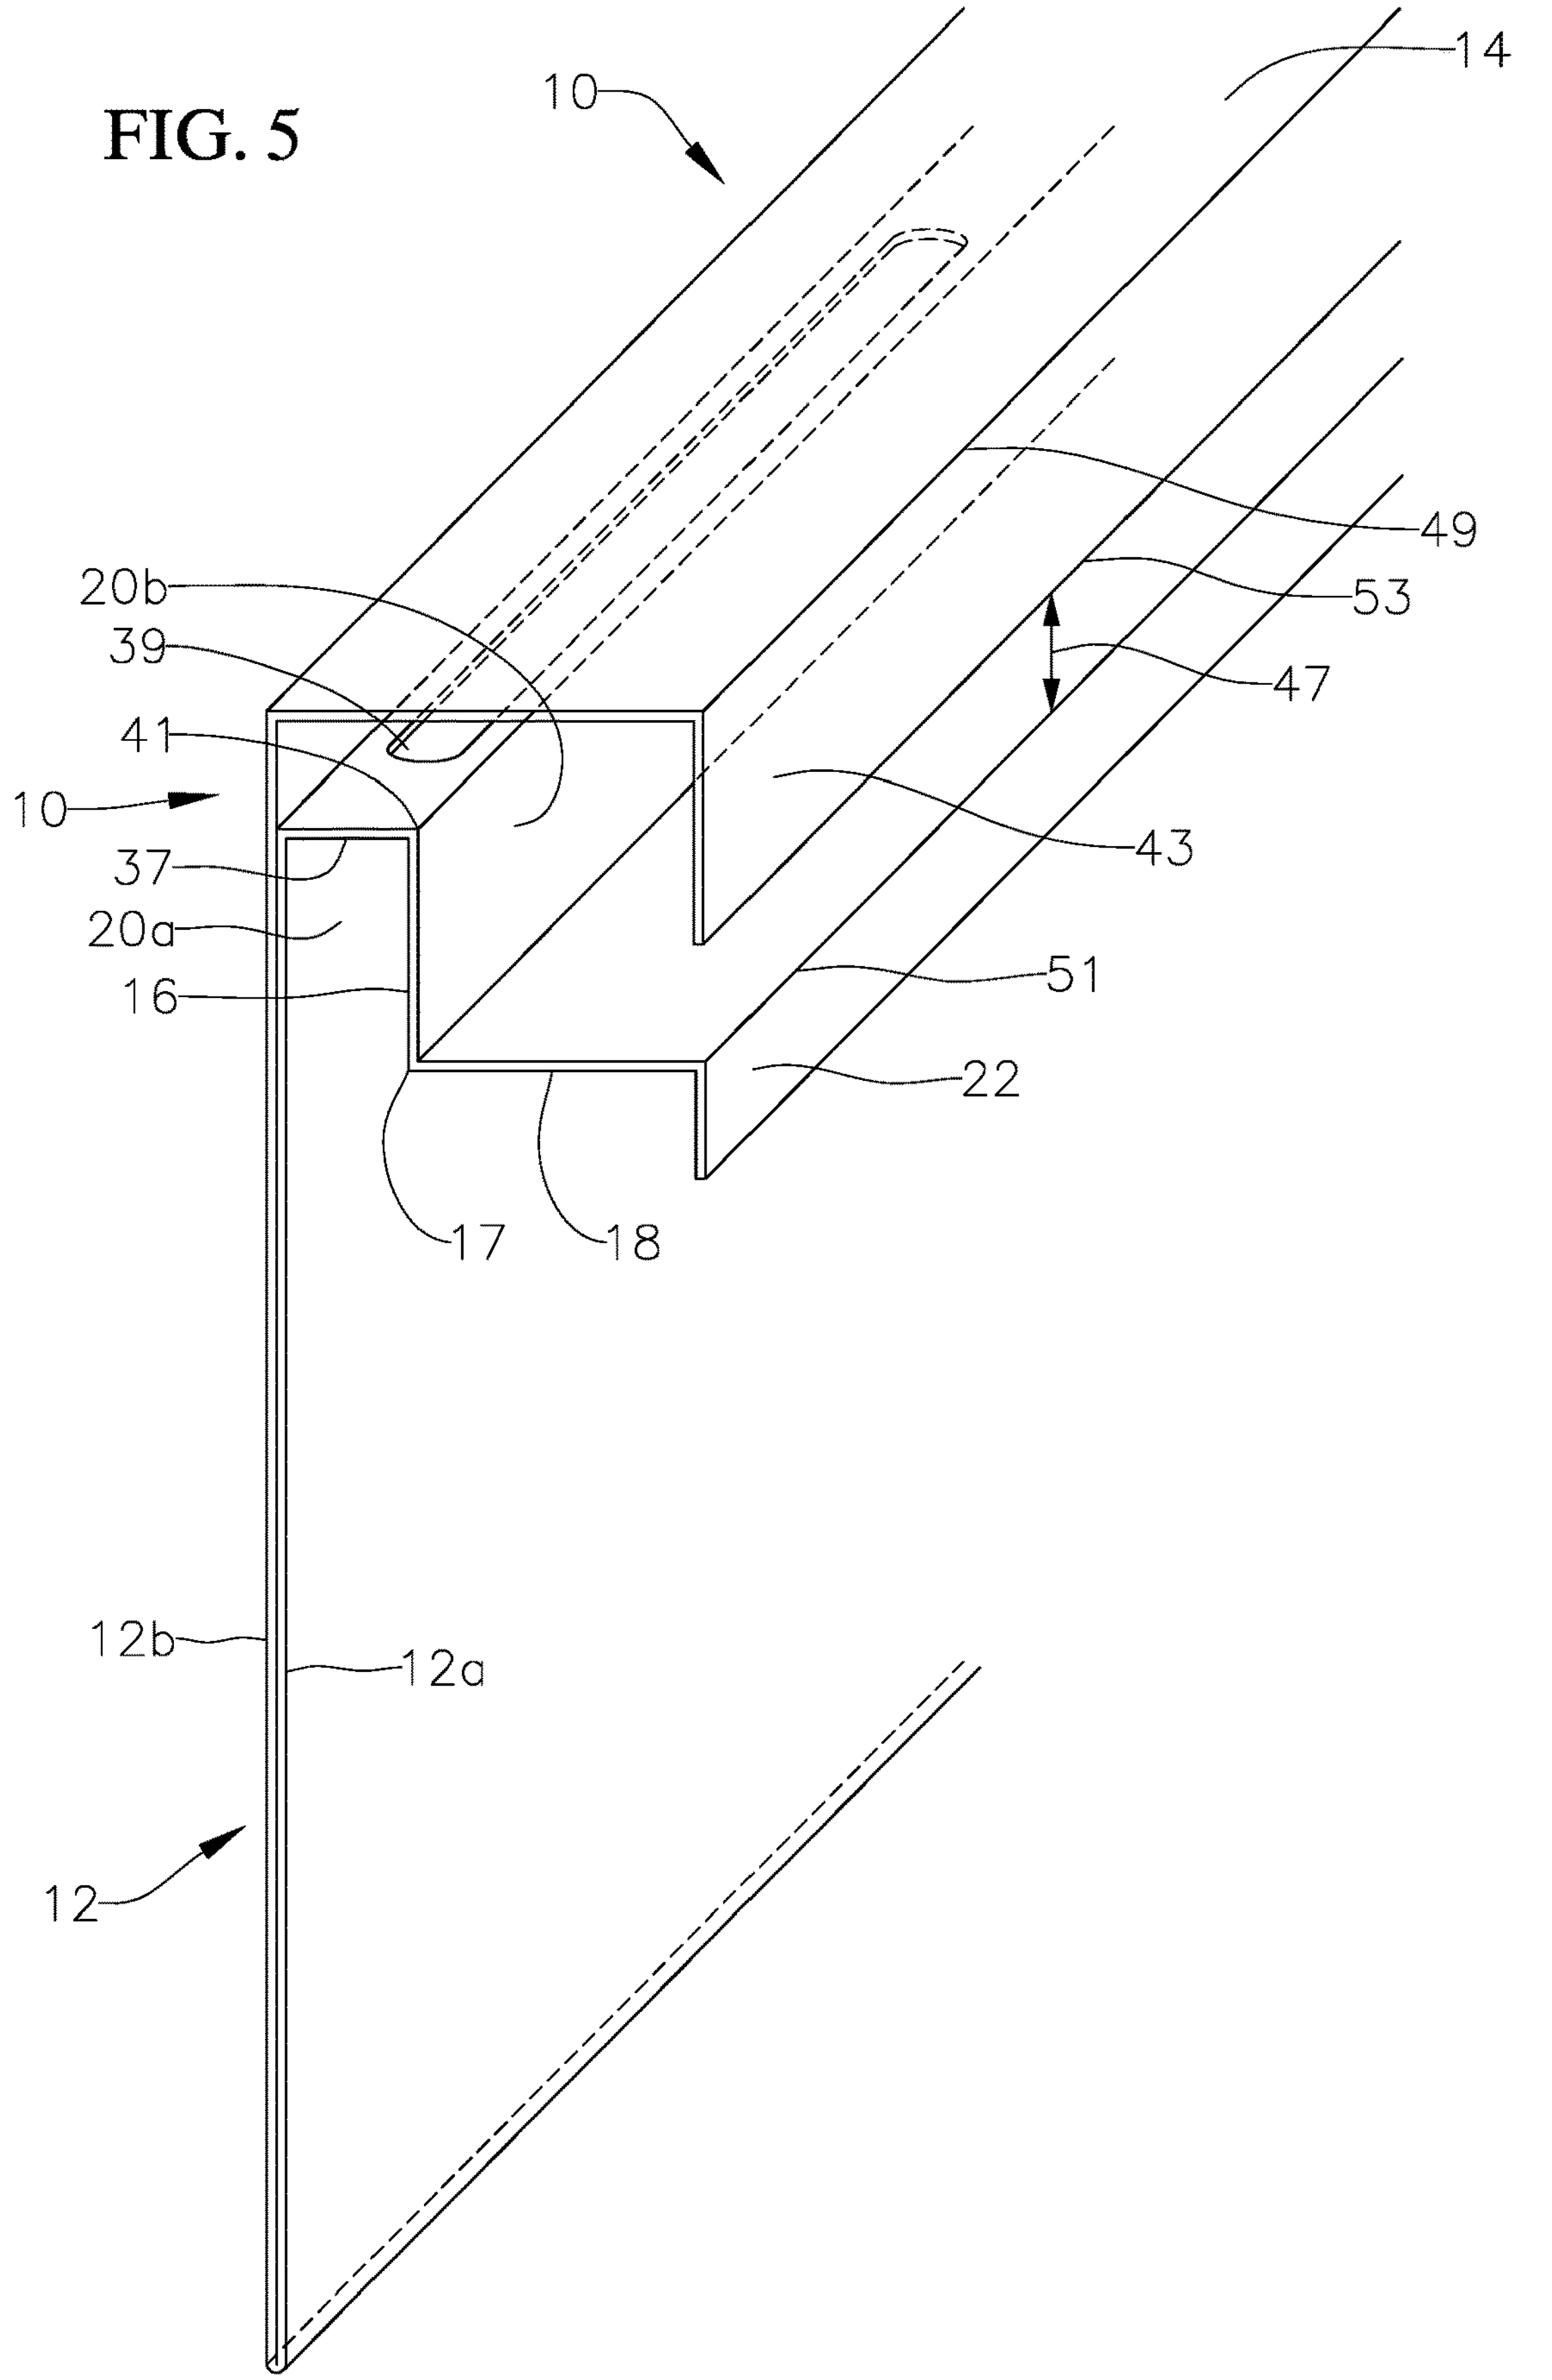

VENTILATION MEMBER AND SYSTEMS INCORPORATING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

This application is based upon and claims priority to U.S. Provisional Application No. 63/256,506 filed Oct. 15, 2021, the contents of which are fully incorporated herein by reference.

BACKGROUND

Stucco, plaster or other claddings are typically used for exterior surfaces of building structures defining substrates such as walls. Such claddings are applied over a wire mesh over felt paper which has been attached to underlying substrate, e.g. wall. This method of cladding installation often results in leak problems between the cladding and the substrate and often results in the collection of moisture between the cladding and substrate.

Weep screeds are often used with claddings over walls towards a bottom end of the wall or mid-wall (as for example externally between floors) to act as a stop for the cladding applied to the wall. Weep screeds generally have a panel that abuts the wall and a leg that extends transversely outward to provide a surface for the cladding to contact. The weep screed also allows moisture to be collected between the cladding and the substrate to drain. However, better drainage systems are desired that allow for venting of the moisture collected between the substrate and the cladding upwards and that can be used in with systems that allow for drainage of moisture downwards.

SUMMARY

In an example embodiment, a ventilation member includes a base panel for mounting onto a substrate, an upper panel extending transversely from the base panel, a lower panel spaced apart from the upper panel, and an inner panel extending transversely from the lower panel. A passageway is formed having a first portion defined between the base panel and the inner panel and a second portion extending transversely from the first portion and defined between the upper and the lower panels. In another example embodiment, the ventilation member further includes a connecting panel connecting the upper and lower panels at distal ends thereof. In yet another example embodiment, a vent opening is formed through a distal portion of the lower panel for venting the passageway. With this example embodiment, the ventilation member may further include a guide extending transversely from the lower panel for providing a guide for the addition of an exterior cladding. In yet a further example embodiment, the ventilation member also includes a leg extending from the lower panel at a distal end thereof. With this example embodiment, the vent opening is located between the guide and the leg. In yet a further example embodiment, the inner panel extends upward from the lower panel. In another example embodiment, the ventilation member also includes a vent panel extending from the base panel to the inner panel and having at least one opening. In one example embodiment, the ventilation member further includes a vertical panel extending from a distal end of the upper panel toward the lower panel defining a gap between a distal end of the vertical panel and a distal end of the lower panel for venting. In another example embodiment, the ventilation member also includes a guide extending from the distal end of the lower panel. In yet a further example embodiment, the base panel includes a second wall over a first wall, such that the upper panel extends from the first wall and the lower panel extend from the second wall. In an example embodiment, the base panel is for being sandwiched between a substrate and a water resistive barrier layer. In another example embodiment, the base panel is for being mounted on a substrate covered by a water resistive barrier layer. In yet another example embodiment, the base panel, the upper panel, the lower panel and the inner panel are integrally formed from a single layer of material. In yet another example embodiment the ventilation member further includes at least one protrusion extending from at least one of the base panel and the inner panel and into the passageway first portion. In a further example embodiment, the ventilation member also includes a vent panel including at least one opening and extending from the base panel to the inner panel.

In a further example embodiment, a structure venting system includes a substrate being part of the structure as well as a first ventilation member which includes a base panel mounted to the substrate, an upper panel extending transversely from the base panel, a lower panel spaced apart from the upper panel, and an inner panel extending transversely from the lower panel. A passageway is formed having a first portion defined between the base panel and the inner panel and a second portion extending transversely from the first portion and defined between the upper and the lower panel. The system also includes a water resistive barrier layer adjacent the base panel, and a drainage mat over the substrate and water resistive barrier layer and extending into the passageway first portion. In this regard, moisture collected in the drainage mat can vent through the passageway. In yet a further example embodiment, the water resistive barrier layer is over the base panel, such that the base panel is sandwiched between the substrate and the water resistive barrier layer. In another example embodiment, the water resistive barrier layer is over the substrate, such that the water resistive barrier layer is sandwiched between the substrate and the base panel. In an example embodiment, the system also includes a lath over the drainage mat, and a cladding over the lath. In a further example embodiment, the system further includes a connecting panel connecting the upper and lower panels at distal ends thereof. In yet a further example embodiment, a vent opening is formed through a distal portion of the lower panel for venting the passageway. In another example embodiment, the system further includes a guide extending transversely from the lower panel for providing a guide for an addition of the exterior cladding. In yet another example embodiment, the system also includes a leg extending from the lower panel at a distal end thereof. With this example embodiment, the vent opening is located between the guide and the leg. In yet a further example embodiment, the inner panel extends upward from the lower panel. In another example embodiment, the first ventilation member also includes a vent panel extending from the base panel to the inner panel and having at least one opening. In one example embodiment, the first ventilation member further includes a vertical panel extending from a distal end of the upper panel toward the lower panel defining a gap between a distal end of the vertical panel and a distal end of the lower panel for venting. In another example embodiment, the first ventilation member also includes a guide extending from the distal end of the lower panel. In yet a further example embodiment, the base panel includes a second wall over a first wall, such that the upper panel extends from the first wall and the lower panel extends from

the second wall. In another example embodiment, the system includes a guide extending from the distal end of the lower panel for providing a guide for an addition of the exterior cladding. In yet another example embodiment the base panel includes a second wall over a first wall, such that the upper panel extends from the first wall and the lower panel extends from the second wall. In one example embodiment, the system includes at least one protrusion extending from at least one of the base panel and the inner panel and into the passageway first portion. The at least one protrusion acting as a stop for preventing travel of the drainage mat beyond the at least one protrusion. In a further example embodiment, the system also includes a vent panel having at least one opening and extending from the base panel to the inner panel. The vent panel may act as a stop for preventing travel of the drainage mat beyond said vent panel. In one example embodiment, the system further includes a second ventilation member. The second ventilation member includes a base panel. With this example embodiment, a portion of the water resistive barrier layer extends adjacent the second ventilation member base panel and a portion of the draining mat extends over the second ventilation member base panel and the portion of the water resistive barrier layer. A first leg also extends transversely from the second ventilation member. The first leg includes a drain opening aligned with the drainage mat, such that moisture within the drainage mat can drain through the drain opening. In another example embodiment, the second ventilation member includes a second leg extending transversely and downwardly from the second ventilation member base panel, spaced apart and below the first leg, such that moisture drained through the drain opening of the first leg drains on the second leg and is guided by the second leg. In a further example embodiment, the water resistive barrier layer is over the base panel of the ventilation member and over the base panel of the second ventilation member, such that the base panels are sandwiched between the substrate and the water resistive barrier layer. In yet a further example embodiment, the water resistive barrier layer is over the substrate, such that the water resistive barrier layer is sandwiched between the substrate and the base panel of the ventilation member and between the substrate and the base panel of the second ventilation member.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is an end view of an example embodiment ventilation member.

FIG. **2** is a partial perspective view of the example embodiment ventilation member shown in FIG. **1** installed between a cladding and a substrate.

FIG. **3** is an end view of the example embodiment ventilation member show in FIG. **1** in combination with a lower ventilation member installed between a cladding a substrate.

FIG. **4**A is a partial end view of another example embodiment ventilation member.

FIG. **4**B is a partial end view of yet another example embodiment ventilation member.

FIG. **5** is a partial perspective view of a further example embodiment ventilation member.

DESCRIPTION

An example embodiment ventilation member **10**, as shown in the FIGS. **1**, **2** and **3**, includes a base panel or nailing flange **12** for being mounted on a substrate **11** (e.g., a of wall of a structure such as a building). The ventilation member includes an upper panel **14** extending transversely from the base panel **12**. In an example embodiment, the upper panel **14** extends perpendicularly from the base panel **12**. An inner panel **16** extends parallel from the base panel and a lower panel **18** extends transversely to the inner panel and parallel to the upper panel. A connecting panel **19**, which in the example embodiment is a vertical panel, extends from the upper panel to the lower panel at distal ends of the upper and lower panels. A passageway **20** is defined between the upper and lower panels and between the base and inner panels. The passageway has a first portion **20***a* defined between the base panel and the inner panel and a second portion **20***b* extending transversely from the first portion and defined between the lower panel and the upper panel. A guide **22** extends transversely from the lower panel. In example embodiments a leg **24** is defined extending on the connecting panel **19**, extending below the lower panel. The guide **22** provides a guide or reference for the addition of cladding over the ventilation member. At least one vent opening **26** is formed through a distal end portion of the lower panel distal from the guide. In an example embodiment, the at least one vent opening is a plurality of elongate slots. In an example embodiment where a leg **24** extends from the connecting panel **19**, the at least one vent opening **26** is formed through the lower panel between the guide **22** and the leg **24**. In example embodiments each of the panels, guide and leg may be separate members that are interconnected. In some example embodiment some of the panels, guide and leg may be formed integrally as part of one or more members that are interconnected. In an example embodiment, as shown in FIGS. **1**, **2** and **3**, all the panels, guide and leg are integrally formed from a single layer of material.

As shown in FIGS. **2** and **3**, in use, the base panel is mounted to the wall or substrate **11**. A water resistive barrier layer **28** is attached over the base panel covering the entire base panel **12** or substantially the entire base panel **12**. In this regard the base panel **12** is sandwiched between the substrate **11** and the water resistive barrier layer **28**. In another example embodiment, the water resistive barrier layer **28** may be placed between the base panel and the substrate prior to mounting of the base panel to the substrate. In another example embodiment, a first water resistive barrier layer is placed between the base panel and the substrate and a second water resistive barrier layer is placed over the base panel such that the base panel is sandwiched between the two water resistive barrier layers. In example embodiments, the water resistive barrier layer is a film type of material that resists penetration by water or moisture. Water resistive barriers are well known in the art. They are often barrier films or layers which resist penetration by water, moisture, or vapor.

A drainage mat **30** is positioned over the water resistive barrier layer and the base panel. Drainage mats are well known in the art and are used to absorb and drain moisture. Moisture may be in the form of vapor. "Drainage mat" as used herein refers to any type of structure can cover a surface area and is capable of absorbing and draining moisture. In an example embodiment, the drainage mat extends from below the base panel and within the passageway first portion **20***a*. In an example embodiment, the drainage mat extends so as to be adjacent to the second passageway portion **20***b* as for example shown in FIG. **3**. In another example embodiment, the drainage mat extends within the first portion of the passageway up to the upper panel, or just below the upper panel but above the lower panel. An example embodiment drainage mat **30** as shown in FIGS. **2** and **3**, has a first outer surface **31***a* opposite a second outer surface **31***b*. In an example embodiment at least the first outer surface **31***a*, or both outer surfaces **31***a*, **31***b*, of the drainage mat allow moisture to enter the drainage mat but resist the exit of moisture from within the drainage mat through such surfaces. With this example embodiment, the moisture taking the path of least resistance exits through the drainage mat opposite open ends **31***c*, **31***d*. As such, when using such drainage mat, it is desirable that the drainage mat extends within the first portion **20***a* of the passageway to a level below the upper panel, or at or below the lower panel **18**, such that the drainage mat only extends to a location below the upper panel. As shown in FIGS. **2** and **3**, the drainage mat extends up to the lower panel and the second portion of the passageway. In this regard, moisture within the drainage mat can escape and vent through its upper end **31***c* and through the second portion of the passageway. If the drainage mat extended all the way to the upper panel **14**, the moisture would have to exit through the first outer surface **31***a* which would be a more restrictive exit flow than the upper open end **31***c* of the drainage mat.

In an example embodiment, to assist with proper placement of the drainage mat so that it will not extend within the second portion **20***b* of the passageway, one or more protrusions **35** may extend for either or both the base panel and the inner panel and within the first portion **20***a* of the passageway, as shown in FIG. **4**A. The protrusion(s) act as stop(s) for the upper end **31***c* of the drainage mat. In this regard, during installation, the drainage mat can be pushed up until it is stopped by the protrusion(s) **35**. In another example embodiment, instead of protrusion as shown in FIG. **4**B, a vent panel **37** may be provided extending from the inner panel to the base panel to act as a stop for the upper end **31***c* of the drainage mat. The vent panel has at least one opening **39**. In an example embodiment, the at least one opening is a plurality of elongate slots. With this embodiment, moisture within the drainage mat can vent from the end **31***c* of the drainage mat through the least one opening **39** of the vent panel and into the second portion **20***b* of the passageway for venting to the outside through at least one vent opening **26**. In the shown example embodiment, the vent panel **37** is a horizontal panel extending between an upper end of the inner panel to the base panel. In another example embodiment, the vent panel extends from a level below the upper end of the inner panel to the base panel.

A lath **32** may be placed over the drainage mat and over the inner panel. Stucco or another cladding **33** is then placed over the lath and may extend up to the lower panel **18** having a thickness up to the guide **22**. Besides stucco, the cladding may be plaster, wood, aluminum or any other material that may be used to cover a wall, especially an exterior wall. In an example embodiment, the inner panel **16** is formed to have an obliquely extending distal end portion **34** which penetrates and locks into the stucco or other cladding. In addition, the distal end portion also guides any moisture trapped between the inner panel and the cladding outward away from the substrate and toward the cladding. Furthermore, the obliquely extending end portion **34** of the inner panel serves to guide the insertion of the drainage mat **30** in the portion of the passage way between the inner panel and the water resistive layer. With these example embodiments, moisture collected in the drainage mat is vented, as shown by arrow **38**, up through the drainage mat, through the passageway first portion **20***a*, the passageway second portion **20***b*, and out through the at least one vent opening **26** thereby venting into the atmosphere.

In another example embodiment, the lower panel **18** extends from a lower end **17** of the inner panel **16** as shown in FIG. **5**, or at another location below the upper end **41** of the inner panel. In an example embodiment, both the upper panel **14** and the lower panel **18** extend distally relative to the base panel the same distance, or approximately the same distance, as measured from a surface of the base panel.

A vertical panel **43** may be provided extending from a distal end **49** of the upper panel **14** in a direction toward the lower panel **18** to a distance spaced apart from a distal end **51** the lower panel **18** such that a vent gap **47** is defined between a distal end **53** of the vertical panel **43** and the lower panel **18** distal end **51**. In this regard moisture venting through the second portion **20***b* of the passageway will vent through the vent gap **47**. With this example embodiment, vent openings are not formed through the distal end portion of the lower panel. In another example embodiment, the vertical panel is not provided such that the vent gap is defined between the distal ends **49**, **51** of the upper and lower panels **14**, **18**, respectively. A guide **22** may be provided extending downward from the lower panel distal end. The vent panel **37** extends from the inner panel to the base panel. The vent panel serves as a stop when receiving the drainage mat and allows for venting of the drainage mat through the at least one opening **39** formed through the vent panel. In an example embodiment, the ventilation member **10** may be formed from a single sheet of material such as galvanized steel, as for example shown in FIG. **5**. With this example embodiment, the sheet of material is folded over itself to form the base panel **12** such that base panel **12** has a first wall **12***a* and a second wall **12***b* over the first wall.

With this embodiment, the upper panel extends from the second wall while the lower panel extends from the first wall. In a further example embodiment, the first wall **12***a*, the vent panel **37**, the inner panel **16**, the lower panel **18**, and the guide **22**, are formed from one piece of material, while the second wall **12***b*, the upper panel **14** and the vertical panel **43** are formed from a second piece of material. In another example embodiment, instead of the vent panel **37**, at least one protrusion is provided on the inner panel, or the base panel or both and extending within the passageway first portion **20***a* serving as a stop for the drainage mat. In another example embodiment, the vent panel **37** may extend from a level below the upper and end and above the lower end of the inner panel.

In an example embodiment, as shown in FIG. **3**, to properly vent the entire length of the wall or substrate **11**, a lower ventilation member (e.g. a screed) is also used. The lower ventilation member maybe a mid-wall ventilation member or a lower wall end ventilation member. An example lower ventilation member **40** has a base panel **42** and two legs, a lower leg **44**, and an upper leg **46** extending transversely from a distal end of the base panel **42**. The two legs are spaced apart from each other. In an example embodiment the lower ventilation member base panel **42** is doubled walled including a first wall **48**, and as a second wall **50** adjacent the first wall **48**, as shown in FIG. **3**. The first wall **48** extends the entire height of the lower ventilation member base panel and the lower leg **44** extends transversely from the lowest end of the first wall. The second wall **50** extends to a location above the first wall lowest end and the upper leg **46** extends transversely from the second wall lowest end such that it is spaced apart from the upper leg **46**. Drain openings **54** are formed at a proximal end portion of the upper leg **46**.

When the lower ventilation member is used, it is mounted on the wall such that the lower leg **44** extends from, or proximate, the lower end of the wall. The water resistive barrier layer **28** that is attached over the base panel **12** of the ventilation member **10** extends over the base panel **42** of the lower ventilation member so as to cover the entire, or substantially the entire, lower ventilation member base panel up to the upper leg **46** as shown in FIG. **3**. In an example embodiment where the water resistive barrier layer is placed between the ventilation member **10** base panel and the substrate **11**, the water restive barrier layer also extends so as to be between the lower ventilation member base panel and the substrate. The drainage mat extends to adjacent or almost adjacent the upper leg **46** of the lower ventilation member and it is aligned with the drain openings **54** formed on the upper leg **46**. The lath **32** also extends over the drainage mat up to the second leg. The wall cladding **33** also extends to the upper leg **46**, as for example shown in FIG. **3**. In this regard any moisture within the drainage mat can also drain downwards along the drainage mat, through the lower end **31***d* of the drainage mat, through the drain openings formed on the second leg, and drain through the space between the two legs and on the lower leg, as shown by arrows **58**. In an example embodiment the lower leg is inclined downward to aid in the drainage. The upper leg is also inclined downward to aid in drainage that may try to occur between the stucco and the second leg. In another example embodiment, the lower ventilation member is provided with only the upper leg **46** or with no legs at all.

The first and second ventilation members also allow external air to ventilate the system through the drainage mat. In addition, by the drain opening **54** and the passageway first portion **20***a* being aligned with the drainage mat, clogging of the drain opening **54** and the first passageway **20***a* by the cladding (e.g., stucco) is prevented.

While this invention has been described in detail with particular references to exemplary embodiments thereof, the exemplary embodiments described herein are not intended to be exhaustive or to limit the scope of the invention to the exact forms disclosed. Persons skilled in the art and technology to which this invention pertains will appreciate that alterations and changes in the described structures and methods of assembly and operation can be practiced without meaningfully departing from the principles, spirit, and scope of this invention, as set forth in the following claims. For example, the first or upper ventilation member shown in FIG. **3** can be any of the first or upper ventilation members described herein, as for example the ventilation member shown in FIG. **5**. Moreover, although relative terms such as "outer," "inner," "upper," "lower," "below," "above," and similar terms have been used herein to describe a spatial relationship of one element to another, it is understood that these terms are intended to encompass different orientations of the various elements and components of the invention in addition to the orientation depicted in the figures. Additionally, as used herein, the term "generally," "about," and similar terms are used as terms of approximation and not as terms of degree, and are intended to account for the inherent deviations in measured or calculated values that would be recognized by those of ordinary skill in the art. Furthermore, as used herein, when a component is referred to as being "on" or "over" another component, it can be directly on or over the other component, or components may also be present therebetween. Moreover, when a component is component is referred to as being "coupled" to another component, it can be directly attached to the other component or intervening components may be present therebetween.

The invention claimed is:

1. A ventilation member comprising:

a base panel for mounting onto a substrate;

an upper panel extending transversely from the base panel;

a lower panel spaced apart from the upper panel and below the upper panel; and

an inner panel extending transversely from the lower panel, wherein a passageway is defined having a first portion defined between the base panel and the inner panel and a second portion extending transversely from the first portion and defined between the upper and the lower panels.

2. The ventilation member of claim **1**, further comprising a connecting panel connecting the upper and lower panels at distal ends thereof.

3. The ventilation member of claim **2**, wherein a vent opening is formed through a distal portion of the lower panel for venting said passageway.

4. The ventilation member of claim **3**, further comprising a guide extending transversely from the lower panel for providing a guide for an addition of an exterior cladding.

5. The ventilation member of claim **4**, further comprising a leg extending from the lower panel at a distal end thereof, wherein the vent opening is located between the guide and said leg.

6. The ventilation member of claim **1**, wherein the inner panel extends upward from the lower panel.

7. The ventilation member of claim **6**, further comprising a vent panel comprising at least one opening, said vent panel extending from the base panel to the inner panel.

8. The ventilation member of claim **7**, wherein the ventilation member further comprises a vertical panel extending from a distal end of the upper panel toward the lower panel defining a gap between a distal end of said vertical panel and a distal end of the lower panel for venting.

9. The ventilation member of claim **8**, further comprising a guide extending from the distal end of the lower panel.

10. The ventilation member of claim **8**, wherein the base panel comprises a second wall over a first wall, wherein the upper panel extends from the first wall and the lower panel extend from the second wall.

11. The ventilation member of claim **1**, wherein the base panel is for being sandwiched between a substrate and a water resistive barrier layer.

12. The ventilation member of claim **1**, wherein the base panel is for being mounted on a substrate covered by a water resistive barrier layer.

13. The ventilation member of claim **1**, wherein the base panel, the upper panel, the lower panel and the inner panel are integrally formed from a single piece of material.

14. The ventilation member of claim **1**, further comprising at least one protrusion extending from at least one of the base panel and the inner panel and into the passageway first portion.

15. The ventilation member of claim **1**, further comprising a vent panel extending from the base panel to the inner panel, said vent panel comprising at least one opening.

16. A structure venting system comprising:

a substrate being part of said structure;

a first ventilation member comprising,

a base panel mounted to said substrate,

an upper panel extending transversely from the base panel,

a lower panel spaced apart from the upper panel, and

an inner panel extending transversely from the lower panel, wherein a passageway is defined having a first portion defined between the base panel and the inner panel and a second portion extending transversely from the first portion and defined between the upper and the lower panel;

a water resistive barrier layer adjacent said base panel; and

a drainage mat over said substrate and water resistive barrier layer and extending into the passageway first portion, wherein moisture in the drainage mat can vent through the passageway.

17. The system of claim **16**, wherein the water resistive barrier layer is over the base panel, wherein the base panel is sandwiched between the substrate and the water resistive barrier layer.

18. The system of claim **16**, wherein the water resistive barrier layer is over the substrate, wherein the water resistive barrier layer is sandwiched between the substrate and the base panel.

19. The system of claim **16**, further comprising:

a lath over the drainage mat; and

a cladding over the lath.

20. The system of claim **16**, further comprising a connecting panel connecting the upper and lower panels at distal ends thereof.

21. The system of claim **20**, wherein a vent opening is formed through a distal portion of the lower panel for venting said passageway.

22. The system of claim **21**, further comprising a guide extending transversely from the lower panel for providing a guide for an addition of the exterior cladding.

23. The system of claim **22**, further comprising a leg extending from the lower panel at a distal end thereof, wherein the vent opening is located between the guide and said leg.

24. The system of claim **16**, wherein the inner panel extends upward from the lower panel.

25. The system of claim **24**, further comprising a vent panel comprising at least one opening, said vent panel extending from the base panel to the inner panel, wherein said vent panel acts as a stop for preventing travel of the drainage mat beyond said vent panel.

26. The system of claim **25**, wherein the first ventilation member further comprises a vertical panel extending from a distal end of the upper panel toward the lower panel defining a gap between a distal end of said vertical panel and a distal end the lower panel for venting.

27. The system of claim **26**, further comprising a guide extending from the distal end of the lower panel for providing a guide for an addition of the exterior cladding.

28. The system of claim **27**, wherein the base panel comprises a second wall over a first wall, wherein the upper panel extends from the first wall and the lower panel extend from the second wall.

29. The system of claim **16**, further comprising at least one protrusion extending from at least one of the base panel and the inner panel and into the passageway first portion, said at least one protrusion acting as a stop for preventing travel of the drainage mat beyond said at least one protrusion.

30. The system of claim **16**, further comprising a vent panel extending from the base panel to the inner panel, said vent panel comprising at least one opening, said vent panel acting as a stop for preventing travel of the drainage mat beyond said vent panel.

31. The system of claim **16**, further comprising a second ventilation member, said second ventilation member comprising:

a base panel, wherein a portion of the water resistive barrier layer extends adjacent said second ventilation member base panel and a portion of the draining mat extends over said second ventilation member base panel and said portion of the water resistive barrier layer; and

a first leg extending transversely from said second ventilation member base panel, said first leg comprising a drain opening aligned with said drainage mat, wherein moisture within said drainage mat can drain through said drain opening.

32. The system of claim **31**, wherein the second ventilation member comprises a second leg extending transversely and downwardly from the second ventilation member base panel spaced apart and below said first leg of said second ventilation member, wherein moisture drained through said drain opening of said first leg drains on said second leg and is guided by said second leg.

33. The system of claim **31**, wherein the water resistive barrier layer is over the base panel of the ventilation member and over the base panel of the second ventilation member, wherein said base panels are sandwiched between the substrate and the water resistive barrier layer.

34. The system of claim **31**, wherein the water resistive barrier layer is over the substrate, wherein the water resistive barrier layer is sandwiched between the substrate and the base panel of the ventilation member and between the substrate and the base panel of the second ventilation member.

35. A ventilation member comprising:

a base panel for mounting onto a substrate;

an upper panel extending transversely from the base panel;

a lower panel spaced apart from the upper panel and below the upper panel; and

an inner panel extending transversely from the lower panel, wherein a passageway is defined having a first portion defined between the base panel and the inner panel and a second portion extending transversely from the first portion and defined between the upper and the lower panels

wherein a vent opening is formed through a distal portion of the lower panel for venting said passageway.

36. The ventilation member of claim **35**, further comprising a guide extending transversely from the lower panel for providing a guide for an addition of an exterior cladding.

37. The ventilation member of claim **36**, further comprising a leg extending from the lower panel at a distal end thereof, wherein the vent opening is located between the guide and said leg.

38. The ventilation member of claim **35**, wherein the inner panel extends upward from the lower panel.

39. The ventilation member of claim **38**, further comprising a vent panel comprising at least one opening, said vent panel extending from the base panel to the inner panel.

40. The ventilation member **39**, wherein the ventilation member further comprises a vertical panel extending from a distal end of the upper panel toward the lower panel defining a gap between a distal end of said vertical panel and a distal end of the lower panel for venting.

41. The ventilation member of claim **40**, further comprising a guide extending from the distal end of the lower panel.

42. The ventilation member of claim **40**, wherein the base panel comprises a second wall over a first wall, wherein the upper panel extends from the first wall and the lower panel extend from the second wall.

43. The ventilation member of claim **35**, wherein the base panel, the upper panel, the lower panel and the inner panel are integrally formed from a single piece of material.

44. The ventilation member of claim **35**, further comprising at least one protrusion extending from at least one of the base panel and the inner panel and into the passageway first portion.

45. The ventilation member of claim **35**, further comprising a vent panel extending from the base panel to the inner panel, said vent panel comprising at least one opening.

* * * * *