US012392137B2

(12) United States Patent
Lenney

(10) Patent No.: US 12,392,137 B2
(45) Date of Patent: *Aug. 19, 2025

(54) SELF-SUPPORTING BI-DIRECTIONAL CORRUGATED MESH LEAF PRECLUSION DEVICE

(71) Applicant: **Gutterglove, Inc.**, Franklin, TN (US)

(72) Inventor: **Robert C. Lenney**, Lincoln, CA (US)

(73) Assignee: **GUTTERGLOVE, INC.**, Franklin, TN (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/597,191**

(22) Filed: **Mar. 6, 2024**

(65) **Prior Publication Data**

US 2024/0344326 A1 Oct. 17, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/455,897, filed on Nov. 19, 2021, now Pat. No. 11,970,861, which is a continuation of application No. 17/027,664, filed on Sep. 21, 2020, now Pat. No. 11,193,280, which is a continuation of application No. 16/356,955, filed on Mar. 18, 2019, now Pat. No. 10,781,592, which is a continuation of application No. 15/920,407, filed on Mar. 13, 2018, now Pat. No. 10,233,648, which is a continuation of application No. 15/096,178, filed on Apr. 11, 2016, now Pat. No. 9,915,070, which is a

(Continued)

(51) **Int. Cl.**
E04D 13/076 (2006.01)
E04D 13/064 (2006.01)

(52) **U.S. Cl.**
CPC ***E04D 13/076*** (2013.01); ***E04D 13/064*** (2013.01)

(58) **Field of Classification Search**
CPC E04D 13/076; E04D 13/074
USPC 52/12
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,732,058	A	10/1929	Martini
2,229,381	A	1/1941	Grow
2,288,121	A	6/1942	Sandmeyer

(Continued)

FOREIGN PATENT DOCUMENTS

AU	2013201320	3/2013
CA	1310167	11/1992

(Continued)

OTHER PUBLICATIONS

Valor Gutter Guard's Melt Away Use Guide, published Apr. 2014.

Primary Examiner — Beth A Stephan
(74) *Attorney, Agent, or Firm* — Jonathan Kidney; Glen Gross; Intelink Law Group, P.C.

(57) **ABSTRACT**

A roof gutter for the purpose of keeping small debris out of the gutter and allowing rainwater to pass into the gutter. The covering is comprised of a water permeable, weather resistant mesh having apertures of a pre-determined size for passing water, the mesh sized to substantially cover a rain gutter; corrugations formed in the mesh; a debris collection first trough disposed along a longitudinal axis of the mesh, formed by making at least two bends in the mesh, the first trough located between a longitudinal midline of the mesh and a front gutter end of the mesh.

33 Claims, 11 Drawing Sheets

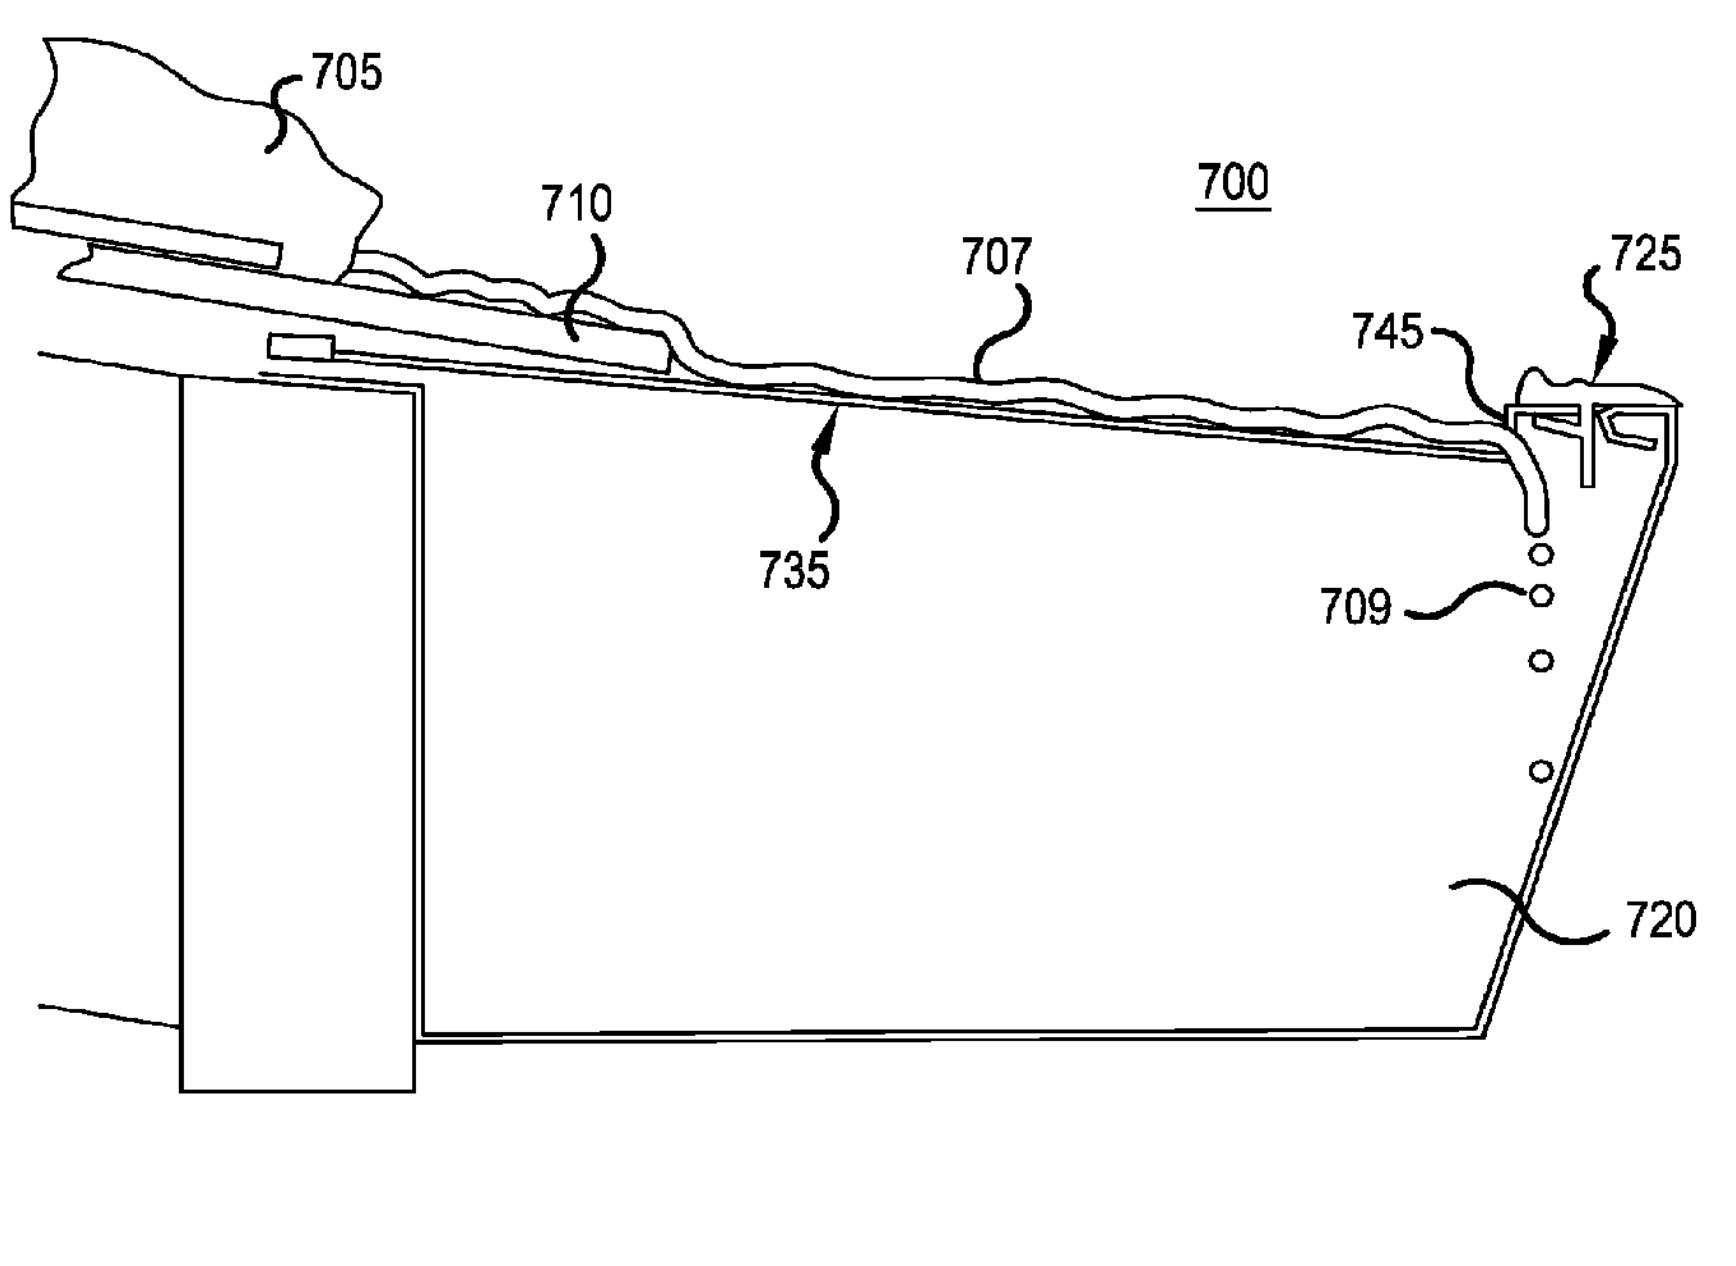

Related U.S. Application Data

continuation of application No. 14/620,729, filed on Feb. 12, 2015, now abandoned.

(60) Provisional application No. 61/939,005, filed on Feb. 12, 2014.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,569,568	A	10/1951	Lipshaw
2,583,422	A	1/1952	Haddon
2,674,961	A	4/1954	Lake
2,935,954	A	5/1960	Matthews
2,997,763	A	8/1961	Serfass
3,350,045	A	10/1967	Mayers
3,630,383	A	12/1971	Reeves
3,691,343	A	9/1972	Norman
3,925,264	A	12/1975	Corte
4,254,595	A	3/1981	Crossien
4,308,696	A	1/1982	Schroeder
4,435,466	A	3/1984	Kuhnel et al.
4,573,290	A	3/1986	Fleming
4,604,837	A	8/1986	Beam
4,646,488	A	3/1987	Burns
4,745,710	A	5/1988	Davis
4,750,300	A	6/1988	Winger
4,755,229	A	7/1988	Armanini
4,769,526	A	9/1988	Taouil
4,827,686	A	5/1989	Stamper
4,941,299	A	7/1990	Sweers
4,949,514	A	8/1990	Weller
4,954,015	A	9/1990	McGowan
4,959,932	A	10/1990	Pfeifer
5,010,696	A	4/1991	Knittel
5,035,092	A	7/1991	Brant
5,038,528	A	8/1991	Brant
5,044,581	A	9/1991	Dressler
5,067,675	A	11/1991	Brant
5,092,086	A	3/1992	Rognsvoog, Sr.
5,098,045	A	3/1992	Pepper
5,107,635	A	4/1992	Carpenter
5,109,640	A	5/1992	Creson
5,127,200	A	7/1992	Doran
5,181,350	A	1/1993	Meckstroth
5,216,852	A	6/1993	Bemis et al.
5,228,247	A	7/1993	Dressler
5,257,482	A	11/1993	Sichel
5,261,195	A	11/1993	Buckenmaier
5,315,090	A	5/1994	Lowenthal
5,371,979	A	12/1994	Kwiatkowski et al.
5,375,379	A	12/1994	Meckstroth
5,391,858	A	2/1995	Tourangeau et al.
5,398,464	A	3/1995	Jacobs
5,406,754	A	4/1995	Cosby
5,406,756	A	4/1995	Bemis et al.
5,438,803	A	8/1995	Blizard, Jr.
5,459,965	A	10/1995	Meckstroth
D364,338	S	11/1995	Cline
5,522,185	A	6/1996	Cline
D372,421	S	8/1996	Cline
5,558,705	A	9/1996	Keemer et al.
5,570,557	A	11/1996	Kwiatkowski et al.
5,617,678	A	4/1997	Morandin
5,640,809	A	6/1997	Iannelli
5,729,931	A	3/1998	Wade
5,759,255	A	6/1998	Venturini et al.
5,836,117	A	11/1998	Johnson
5,842,311	A	12/1998	Morin
5,842,469	A	12/1998	Rapp et al.
5,848,857	A	12/1998	Killworth et al.
5,878,533	A	3/1999	Swanfeld
5,893,240	A	4/1999	Ealer, Sr.
D418,403	S	1/2000	Cline
D419,863	S	2/2000	Mullane
6,035,587	A	3/2000	Dressler
6,134,843	A	10/2000	Tregear
6,194,049	B1	2/2001	Bindschedler-Galli et al.
6,194,519	B1	2/2001	Blalock et al.
6,205,715	B1	3/2001	Rex
6,223,777	B1	5/2001	Smith et al.
6,225,600	B1	5/2001	Burris
6,266,929	B1	7/2001	Cline
6,341,462	B2	1/2002	Kiik et al.
D457,423	S	5/2002	Mullane
6,412,228	B1	7/2002	Meckstroth
6,468,613	B1	10/2002	Kitano
6,543,729	B1	4/2003	Ylonen
D475,613	S	6/2003	Mullane
6,598,352	B2	7/2003	Higginbotham
6,607,781	B2	8/2003	Joedicke et al.
D481,929	S	11/2003	McNichol
6,700,098	B1	3/2004	Wyatt et al.
6,708,452	B1	3/2004	Tenute
6,759,630	B1	7/2004	Tenute
D494,461	S	8/2004	Dressler
D495,595	S	9/2004	Dressler
D499,331	S	12/2004	Dressler
6,933,007	B2	8/2005	Fensel et al.
6,942,419	B2	9/2005	Knak et al.
6,944,991	B2	9/2005	Kim
6,944,992	B2	9/2005	Brochu
6,951,077	B1	10/2005	Higginbotham
6,951,323	B1	10/2005	McNichol
D511,451	S	11/2005	Mullane
6,959,512	B2	11/2005	Cobb
D514,670	S	2/2006	Handley
7,017,614	B2	3/2006	Handley
D519,025	S	4/2006	Dressler
7,056,422	B2	6/2006	Swistun
7,104,012	B1	9/2006	Bayram
7,127,852	B1	10/2006	Dressler
7,174,677	B1	2/2007	Dressler
7,174,688	B2	2/2007	Higginbotham
7,191,564	B2	3/2007	Higginbotham
7,241,500	B2	7/2007	Shiao et al.
7,310,912	B2	12/2007	Lenney
7,340,863	B1	3/2008	Dressler
7,434,358	B2	10/2008	Smith
7,448,167	B2	11/2008	Bachman
7,493,686	B2	2/2009	Barford
7,516,576	B1	4/2009	Mullane
7,597,119	B2	10/2009	Boettner
7,624,541	B2	12/2009	Gentry
7,677,271	B2	3/2010	Boettner
7,726,076	B2	6/2010	Staub
7,793,465	B2	9/2010	McCann
7,913,458	B2	3/2011	Higginbotham
D638,920	S	5/2011	Ealer, Sr.
7,975,435	B2	7/2011	Lenney
8,033,058	B2	10/2011	Block
8,079,183	B2	12/2011	Lenney
8,251,302	B2	8/2012	Sloan, Jr.
8,276,321	B2	10/2012	Bell
8,312,677	B2	11/2012	Higginbotham
8,418,410	B2	4/2013	Martin
8,438,788	B2	5/2013	Bell et al.
8,479,454	B2	7/2013	Lenney
8,495,837	B2	7/2013	McCoy
8,572,899	B1	11/2013	Pearce et al.
8,607,827	B2	12/2013	Bell
8,677,694	B2	3/2014	Ash
8,689,837	B1	4/2014	Smith
8,720,132	B2	5/2014	Chihlas
D709,357	S	7/2014	Bell
8,782,960	B2	7/2014	Nark
8,901,458	B2	12/2014	Aussi
9,080,328	B1	7/2015	Smith
D752,722	S	3/2016	Boettner
9,309,995	B2	4/2016	Bell
9,487,955	B2	11/2016	Breyer
D790,672	S	6/2017	Benjamin
9,890,535	B2	2/2018	Breyer
9,915,070	B2	3/2018	Lenney
9,976,309	B2	5/2018	Lenney
9,982,438	B2	5/2018	Casey

(56) **References Cited**

U.S. PATENT DOCUMENTS

10,081,937 B2	9/2018	Elliott	
D837,048 S	1/2019	Benjamin et al.	
10,233,647 B2	3/2019	Benjamin et al.	
10,233,648 B2	3/2019	Lenney	
D878,189 S	3/2020	Benjamin et al.	
10,781,592 B2	9/2020	Lenney	
11,193,280 B2	12/2021	Lenney	
11,970,861 B2 *	4/2024	Lenney	E04D 13/076
2001/0054625 A1	12/2001	Iggulden	
2003/0046876 A1	3/2003	Higginbotham	
2003/0187539 A1	10/2003	Smith	
2003/0198736 A1	10/2003	Fensel et al.	
2005/0072114 A1	4/2005	Shiao et al.	
2005/0196124 A1	9/2005	Aldereguia et al.	
2005/0235577 A1	10/2005	Smith	
2005/0257432 A1	11/2005	Higginbotham	
2005/0279036 A1	12/2005	Brochu	
2006/0037252 A1	2/2006	Gosse et al.	
2006/0090404 A1	5/2006	Lovell	
2006/0117670 A1	6/2006	Tsioris	
2006/0179723 A1	8/2006	Robins	
2006/0196124 A1	9/2006	Bachman	
2006/0213129 A1	9/2006	Bachman	
2006/0230687 A1	10/2006	Ealer, Sr.	
2006/0277831 A1	12/2006	Bachman	
2006/0283096 A1	12/2006	Bachman	
2006/0288652 A1	12/2006	Gurr	
2007/0054129 A1	3/2007	Kalkanoglu et al.	
2007/0065640 A1	3/2007	Joedicke	
2007/0094939 A1	5/2007	Bachman	
2007/0107323 A1	5/2007	Higginbotham	
2007/0193012 A1	8/2007	Bergman et al.	
2007/0199276 A1	8/2007	Duque	
2007/0218251 A1	9/2007	Jacobs	
2007/0220814 A1	9/2007	Faulks	
2007/0234647 A1	10/2007	Higginbotham	
2007/0246449 A1	10/2007	Bachman	
2008/0000169 A1	1/2008	Handley	
2008/0187708 A1	8/2008	Decker	
2008/0248241 A1	10/2008	Kalkanoglu et al.	
2009/0056234 A1	3/2009	Brochu	
2009/0064628 A1	3/2009	Mellott et al.	
2009/0139180 A1	6/2009	Kehs et al.	
2009/0300995 A1	12/2009	Nikolopoulos	
2010/0042579 A1	2/2010	Larsen et al.	
2011/0047930 A1	3/2011	Nark	
2011/0049118 A1	3/2011	Nark	
2011/0056145 A1	3/2011	Lenney	
2011/0067318 A1	3/2011	Lenney et al.	
2011/0138698 A1	6/2011	Neumann	
2011/0253611 A1	10/2011	Higginbotham	
2012/0042579 A1	2/2012	McCoy	
2012/0049511 A1	3/2012	Bell et al.	
2012/0068452 A1	3/2012	Boettner	
2012/0144759 A1	6/2012	Higginbotham	
2013/0097943 A1	4/2013	Higginbotham	
2013/0160377 A1	6/2013	Sager	
2013/0160378 A1	6/2013	Higginbotham	
2013/0284650 A1	10/2013	Higginbotham	
2013/0319990 A1	12/2013	Casey	
2014/0013702 A1	1/2014	Pearce et al.	
2014/0069028 A1	3/2014	Lenney	
2014/0090311 A1	4/2014	Iannelli	
2014/0130929 A1	5/2014	Elliott et al.	
2014/0196400 A1	7/2014	Bell	
2014/0263001 A1	9/2014	Higginbotham	
2014/0291310 A1	10/2014	Iannelli	
2014/0326837 A1	11/2014	Rumsey	
2015/0143756 A1	5/2015	Higginbotham	
2015/0184394 A1	7/2015	Nark	
2016/0102459 A1	4/2016	Breyer	
2016/0168858 A1	6/2016	Breyer	
2017/0089071 A1	3/2017	Smith et al.	
2018/0179761 A1	6/2018	Higginbotham	
2018/0216755 A1	8/2018	Rumsey	

FOREIGN PATENT DOCUMENTS

CA	2021168	2/2002
CA	2021169	2/2002
CA	2476351	11/2005
CA	2551297	12/2007
CA	2390777	5/2008
CA	2752598	3/2013
CA	2938647	1/2019
EP	1344640	4/2006
EP	2518226	10/2012
FR	2694775	11/1997
JP	06-146506	5/1994
JP	09228592	9/1997
JP	2000-008559	1/2000
KR	890010803	7/1989
KR	1998-016228	6/1998
WO	WO9953157	10/1999

* cited by examiner

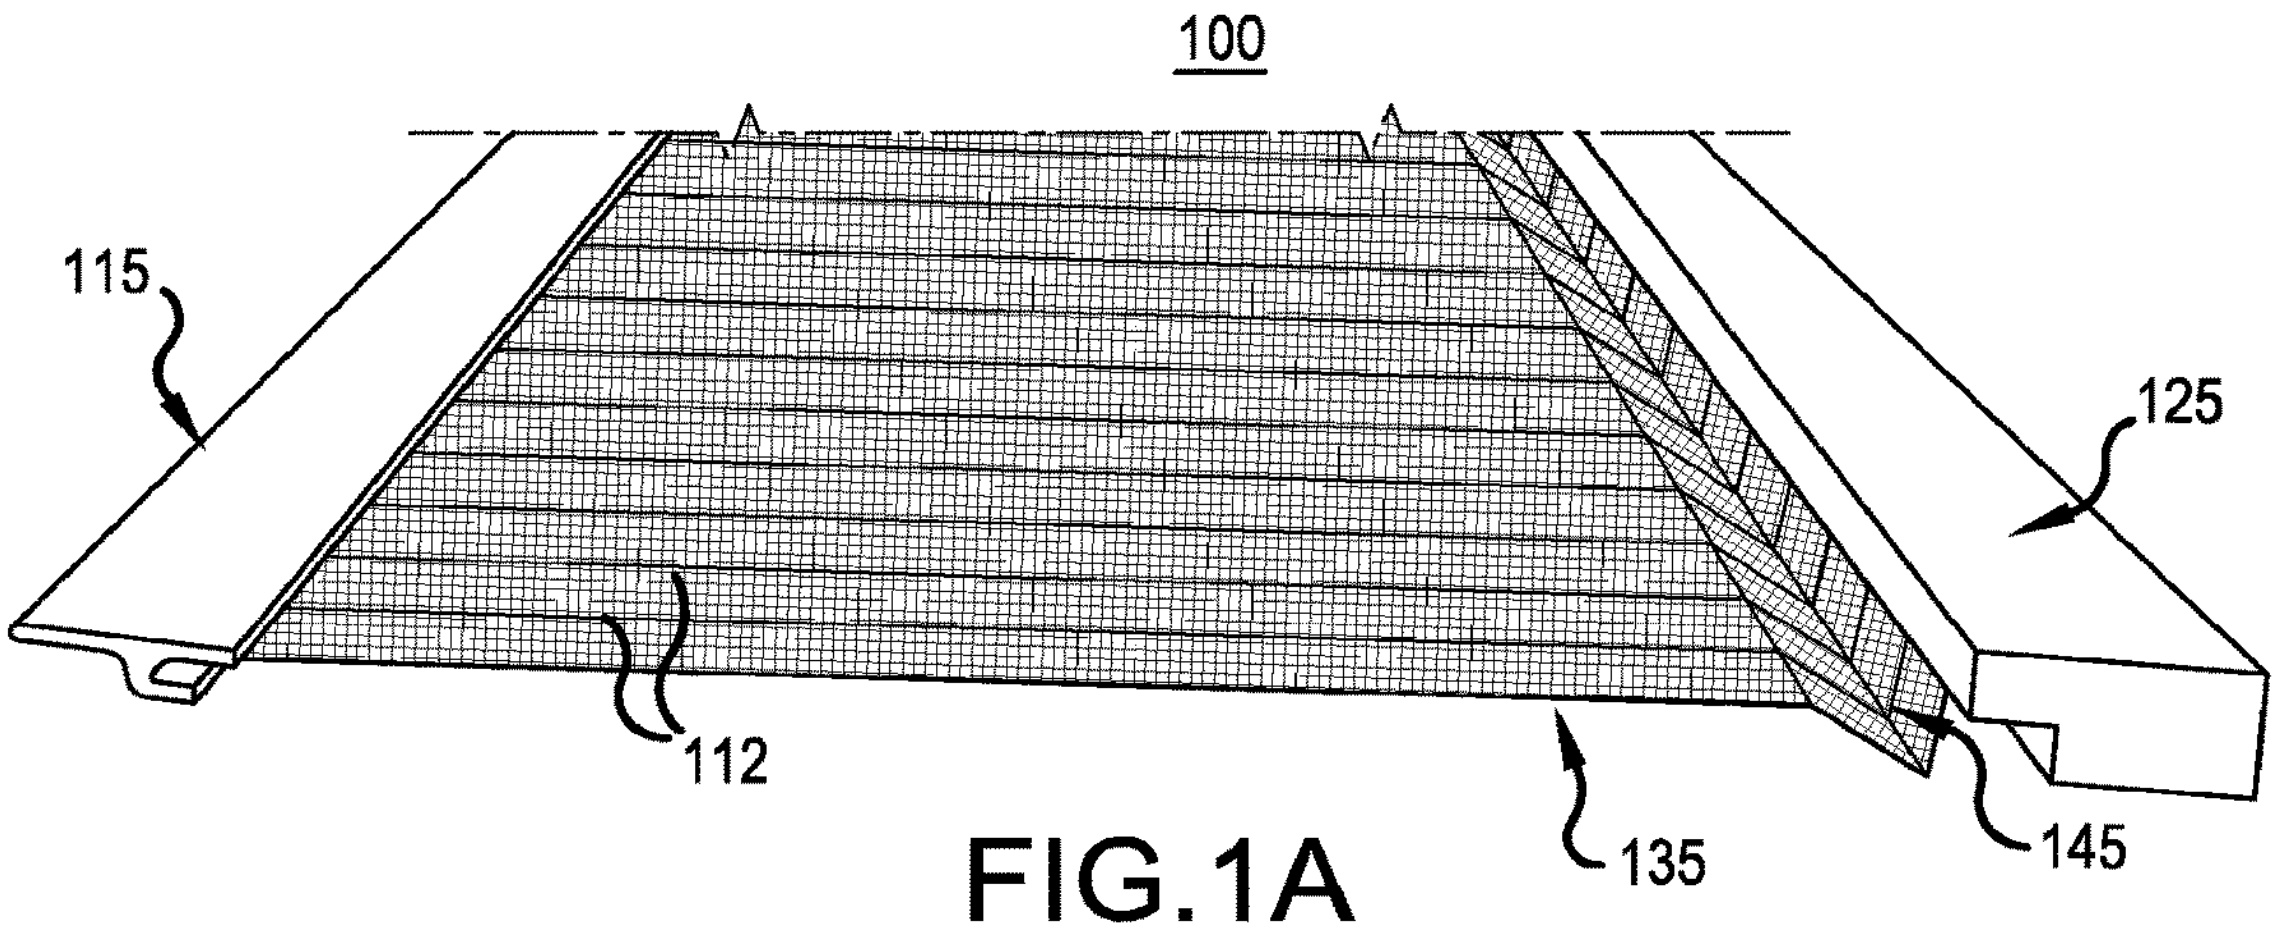

FIG.1A

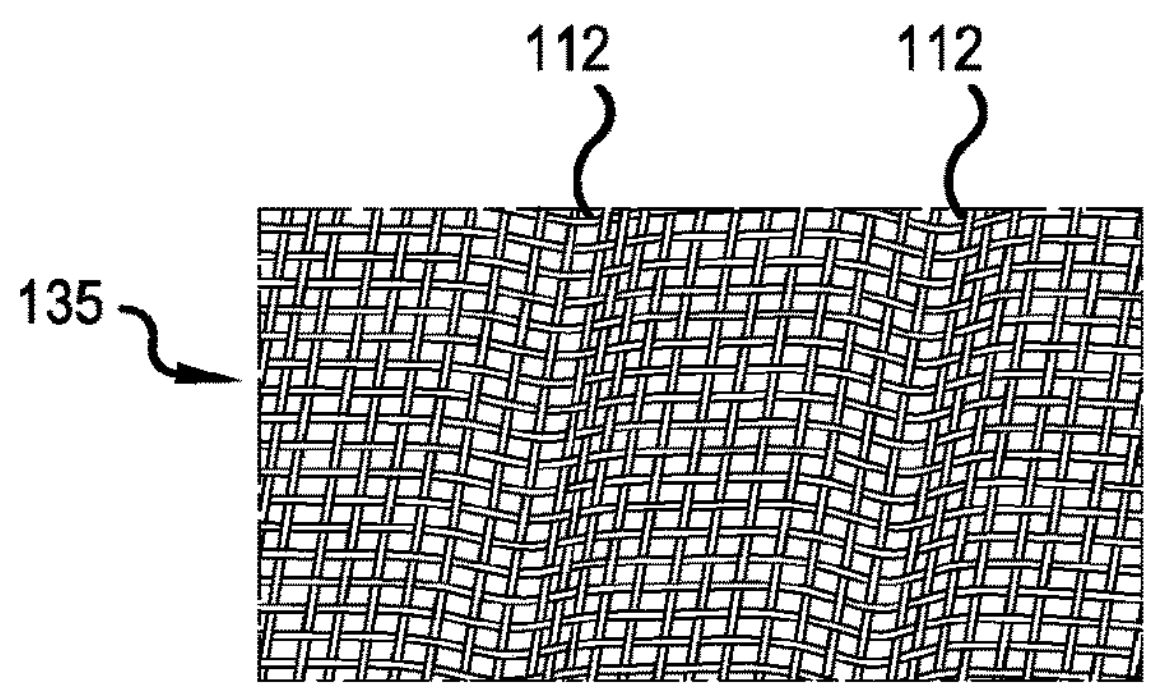

FIG.1B

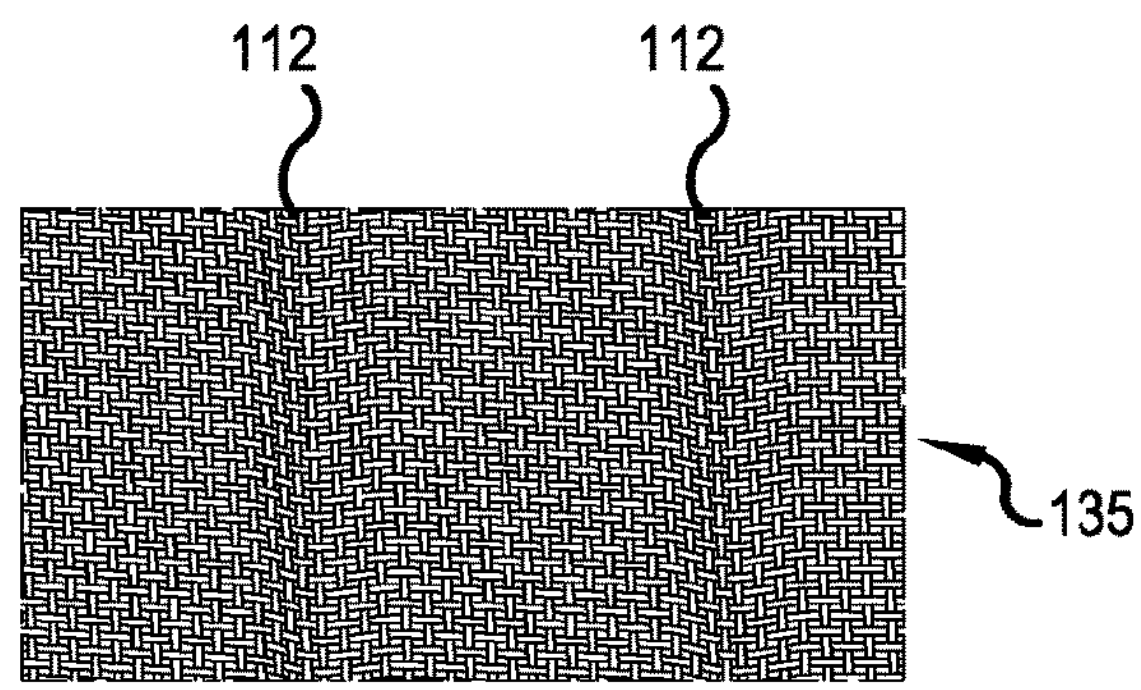

FIG.1C

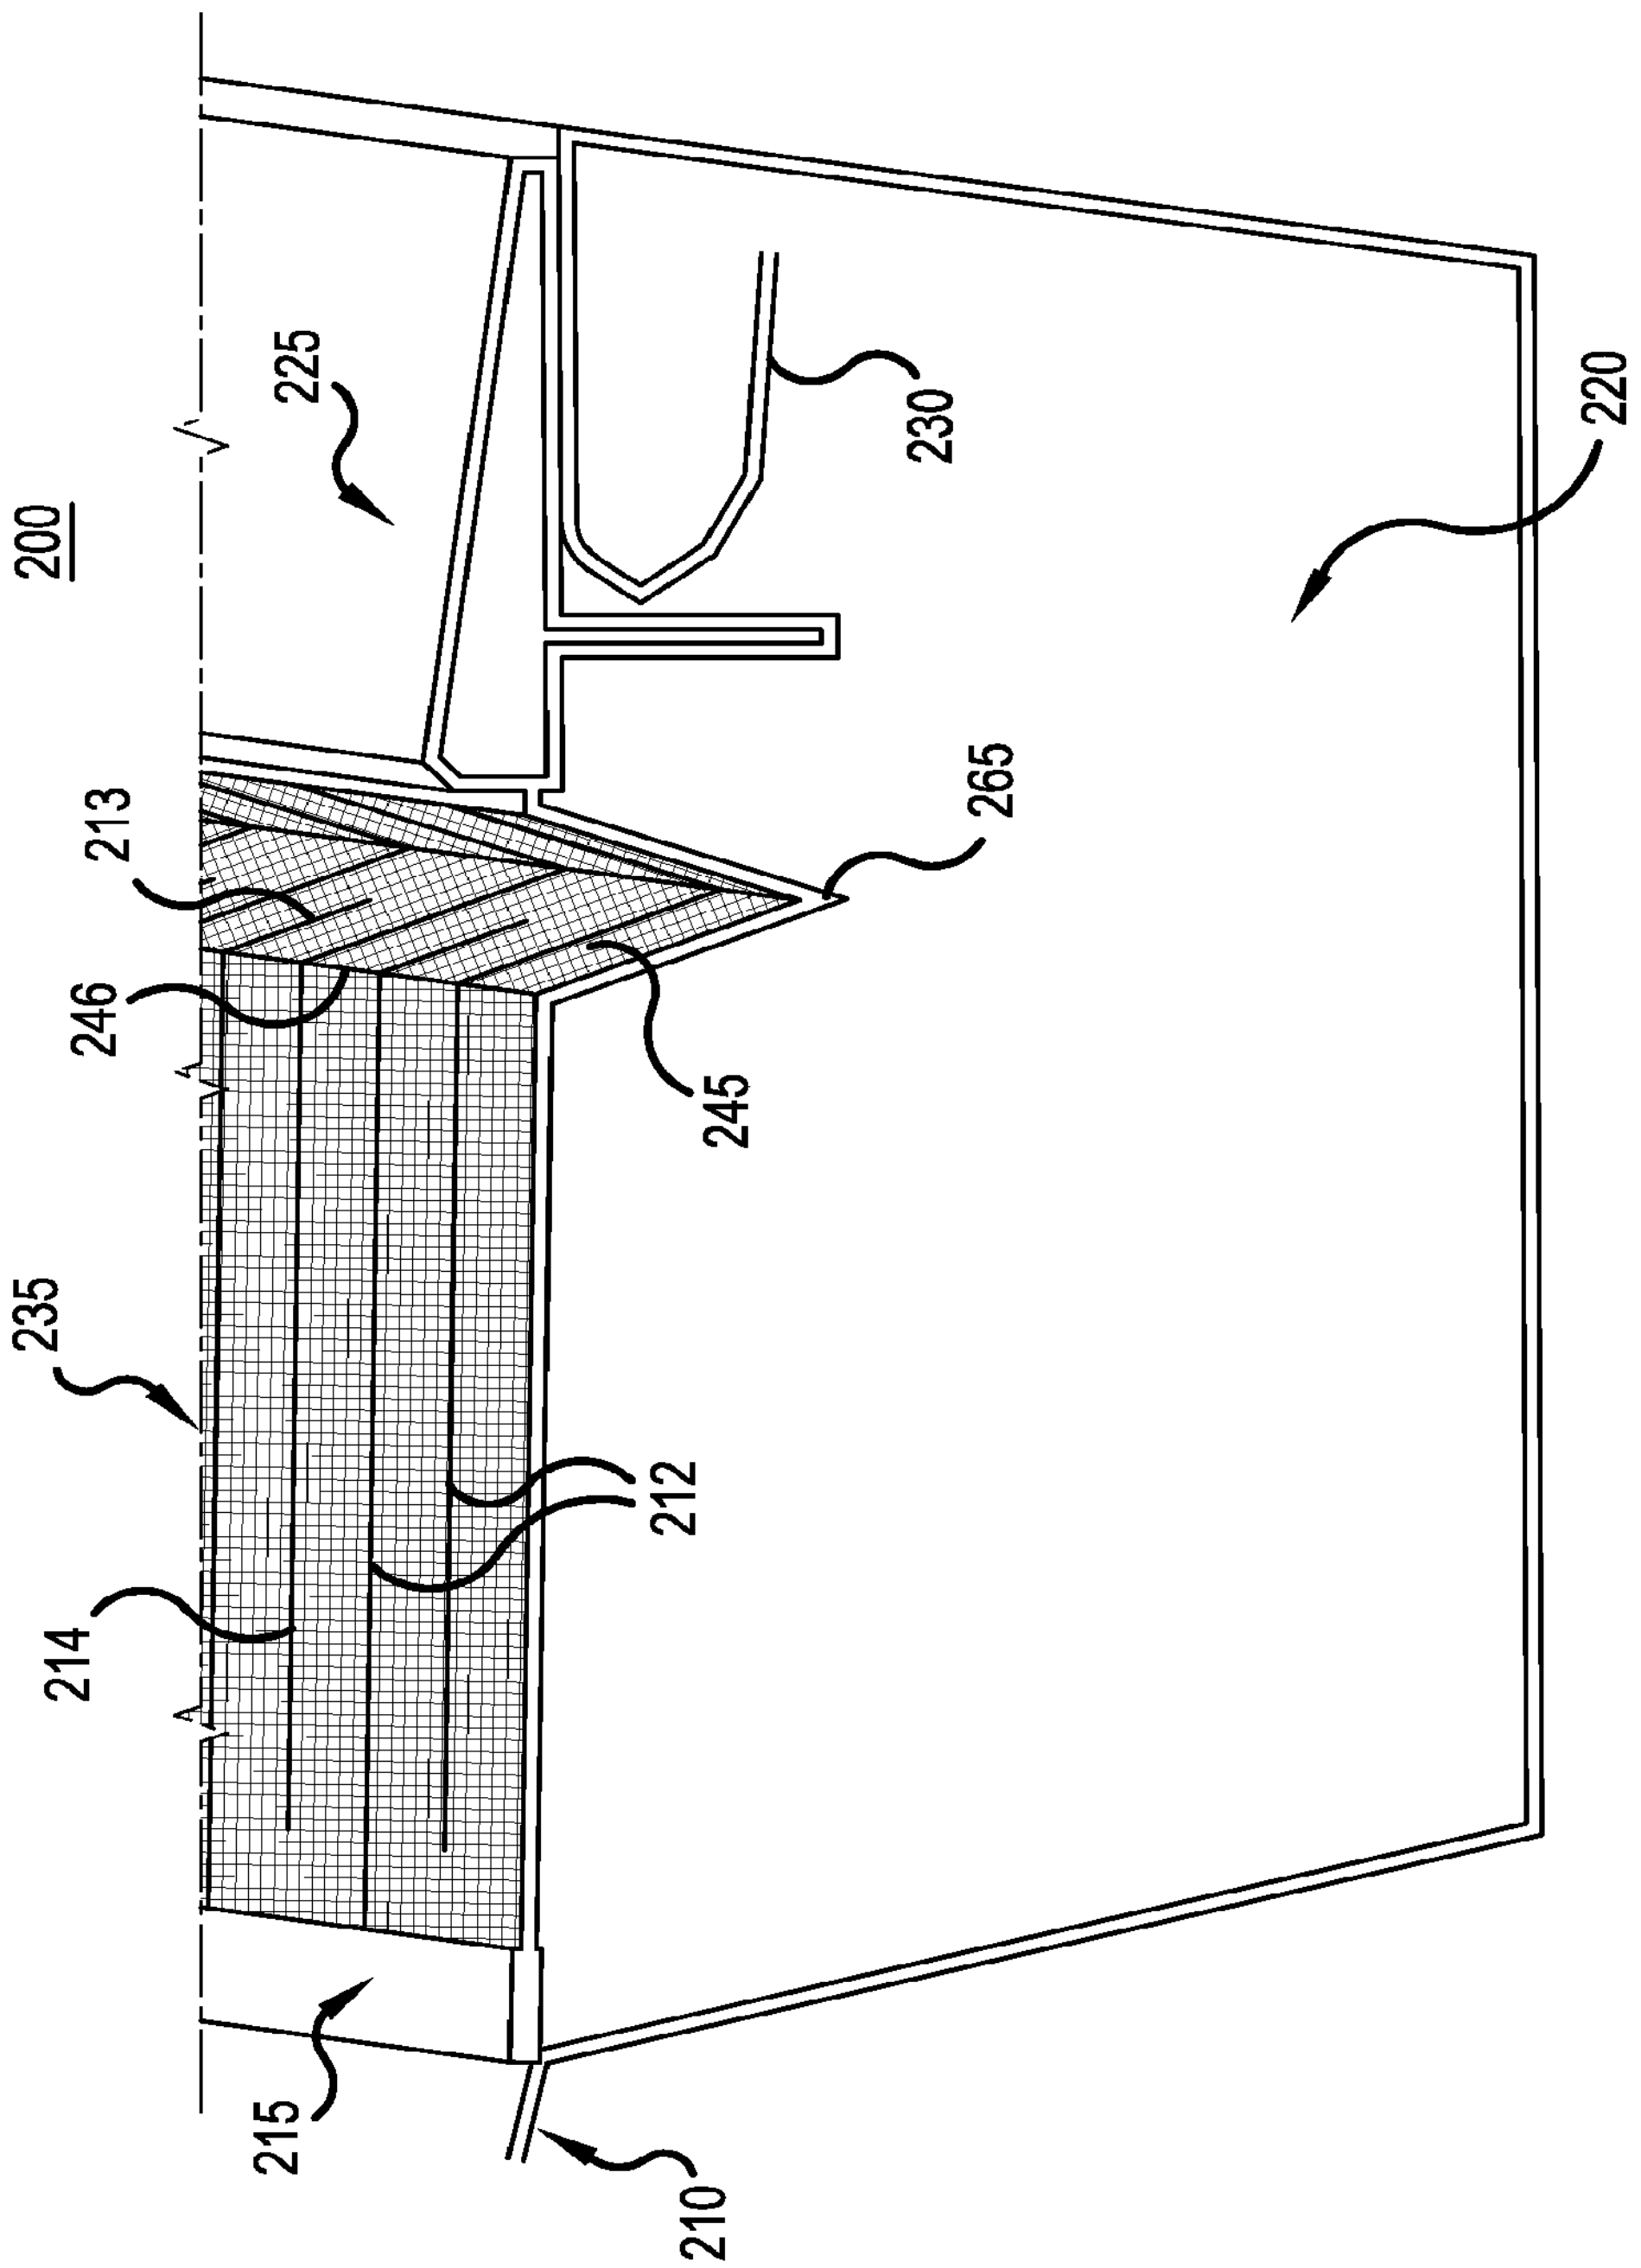

FIG.2

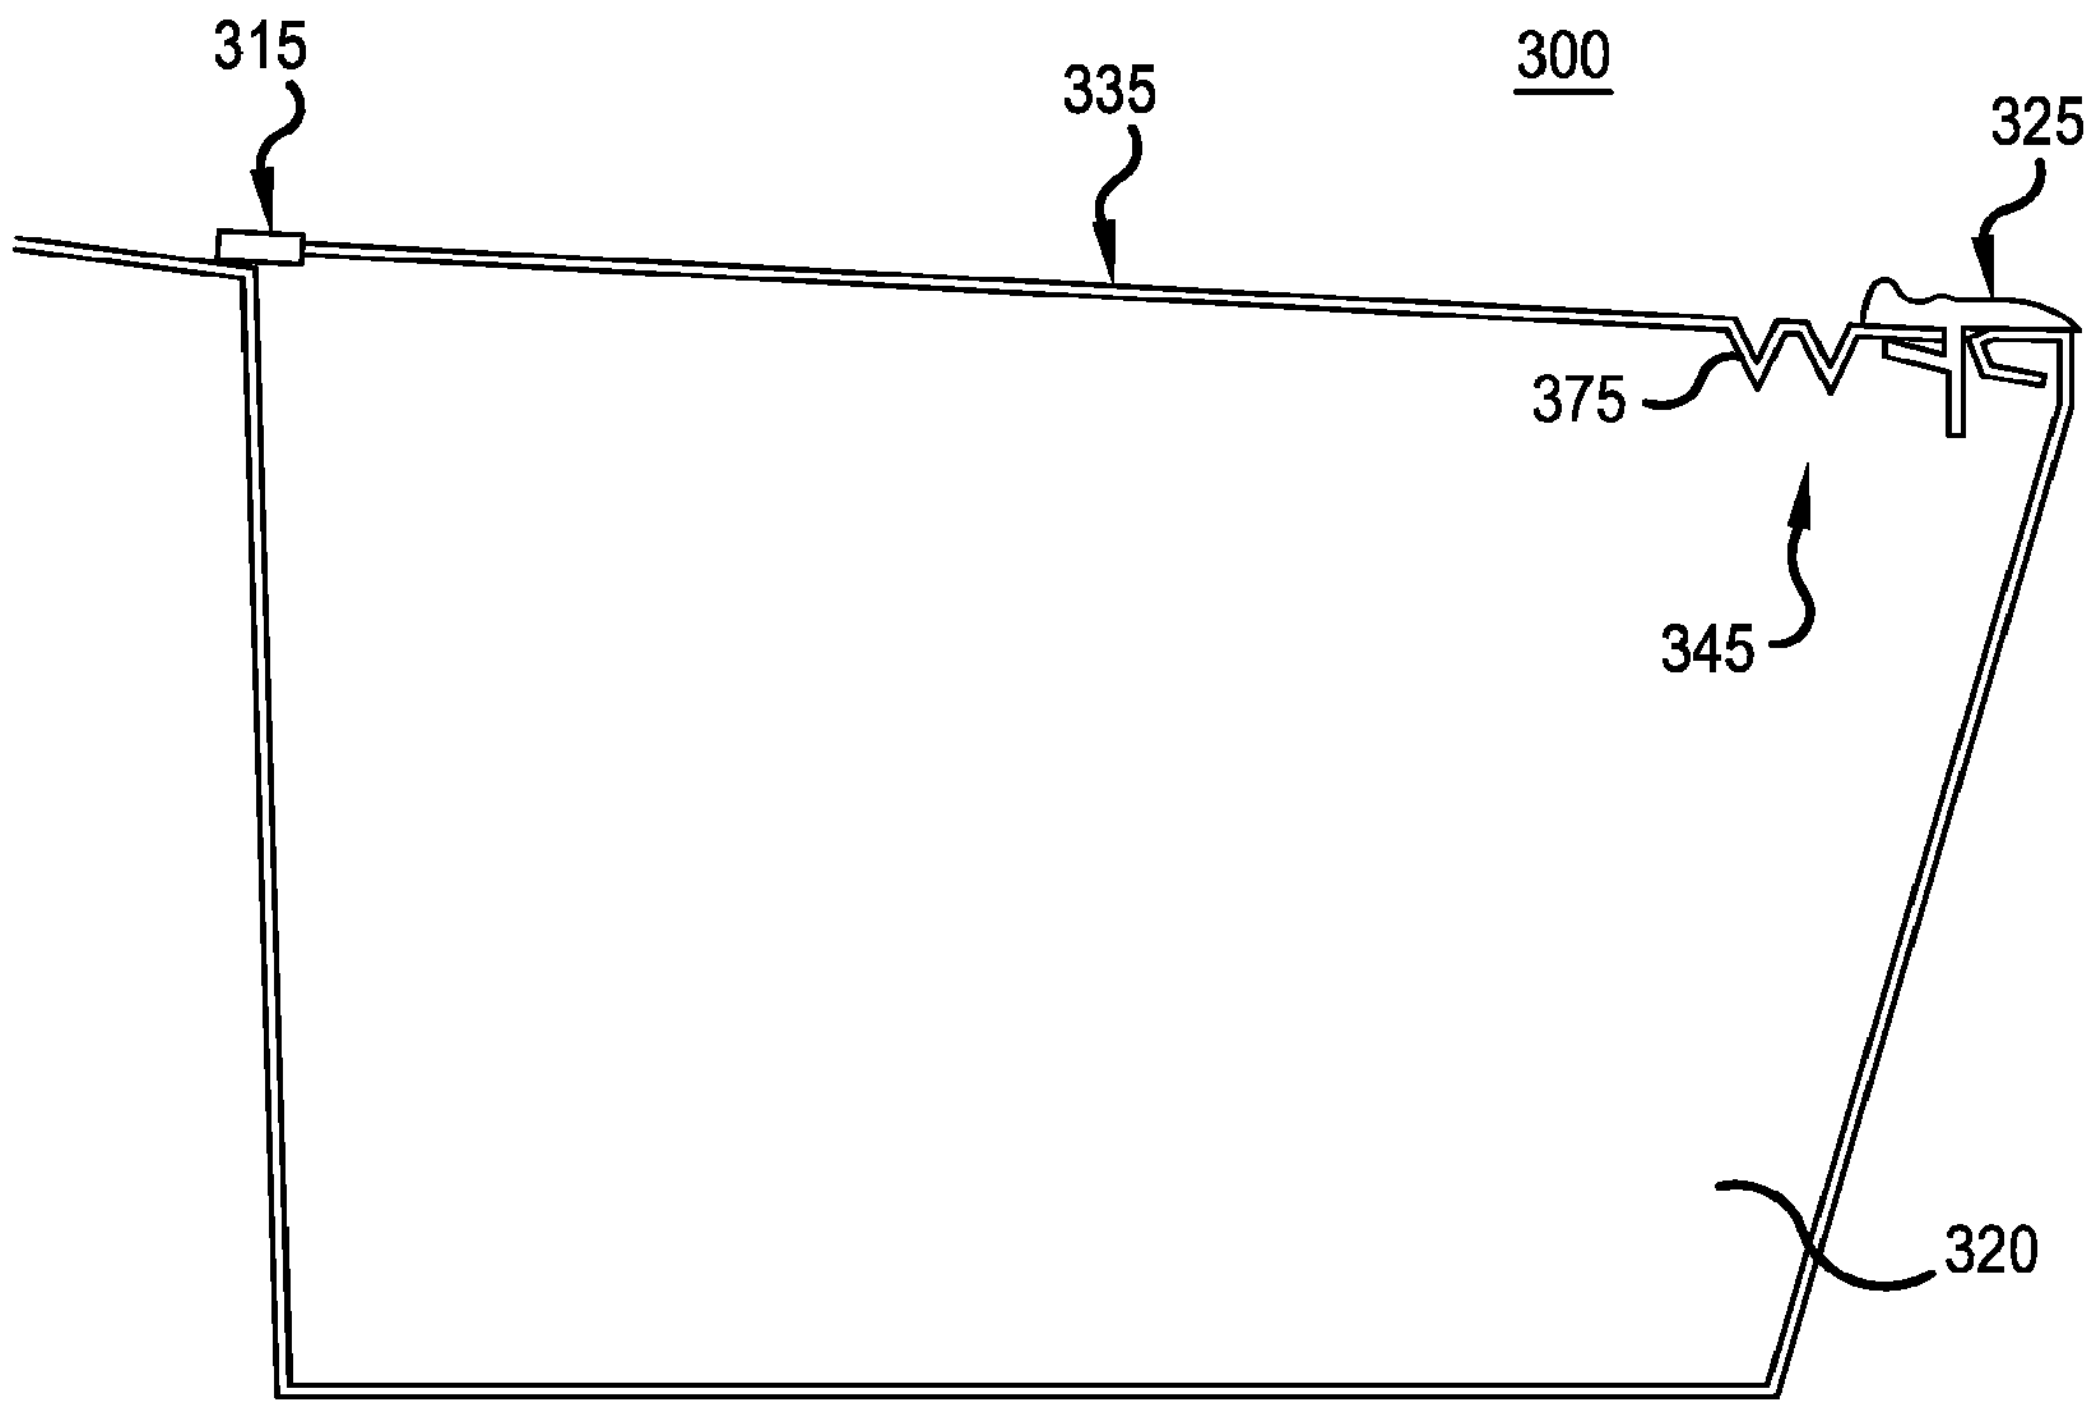

FIG.3A

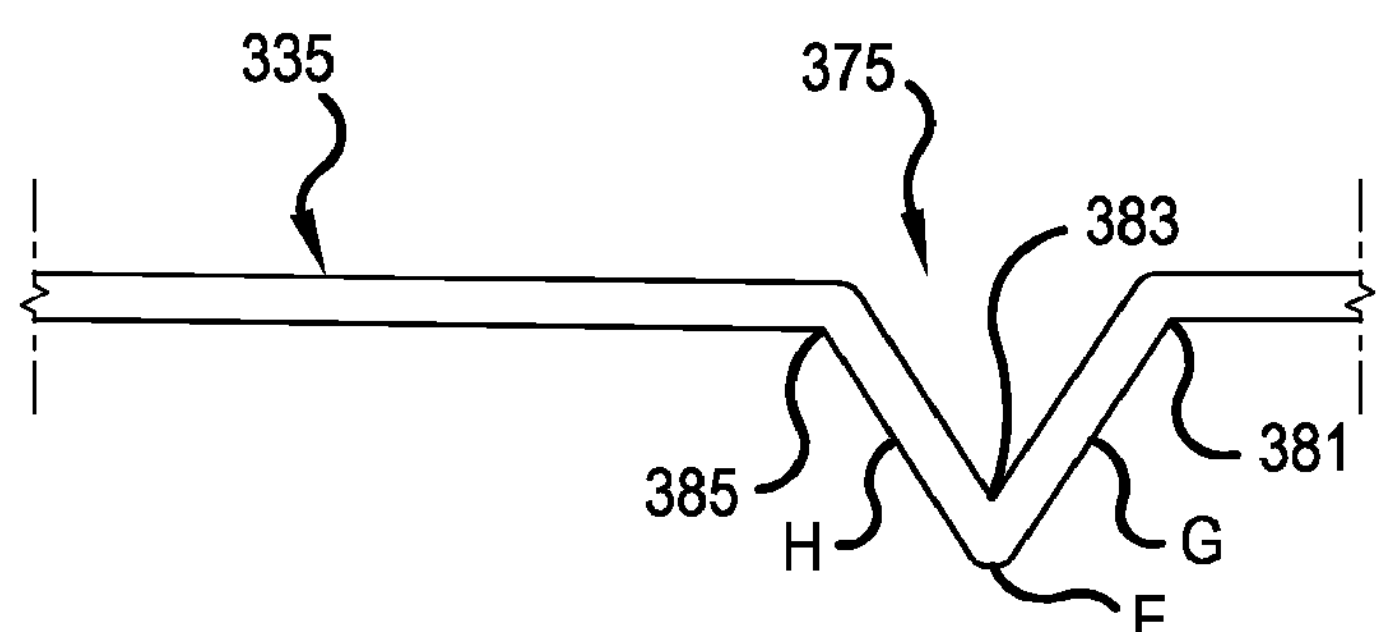

FIG.3B

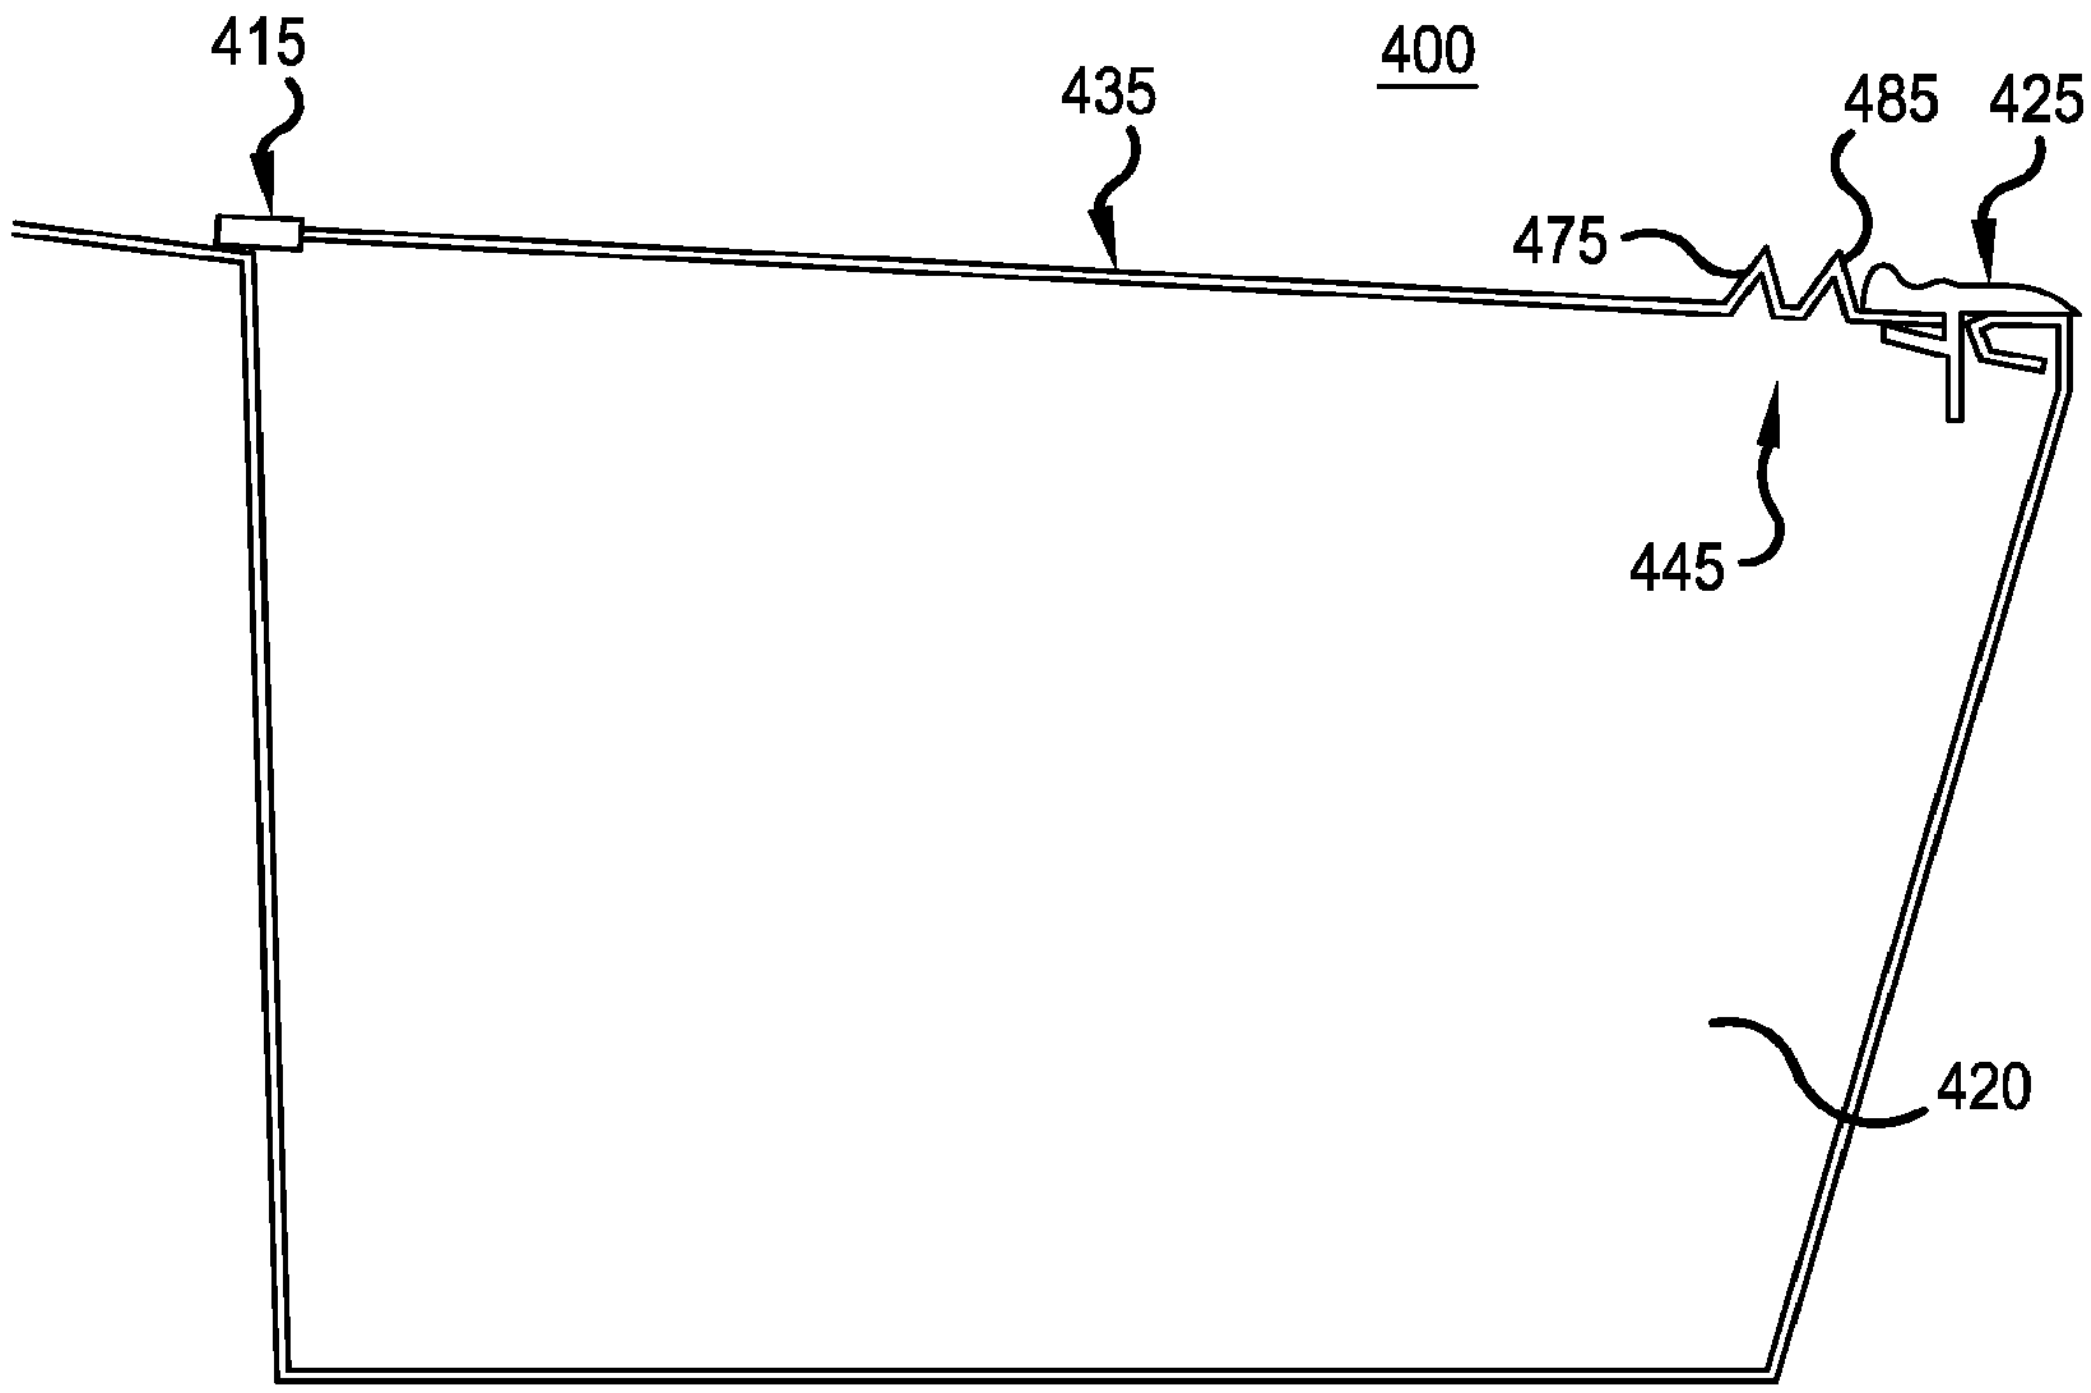

FIG.4

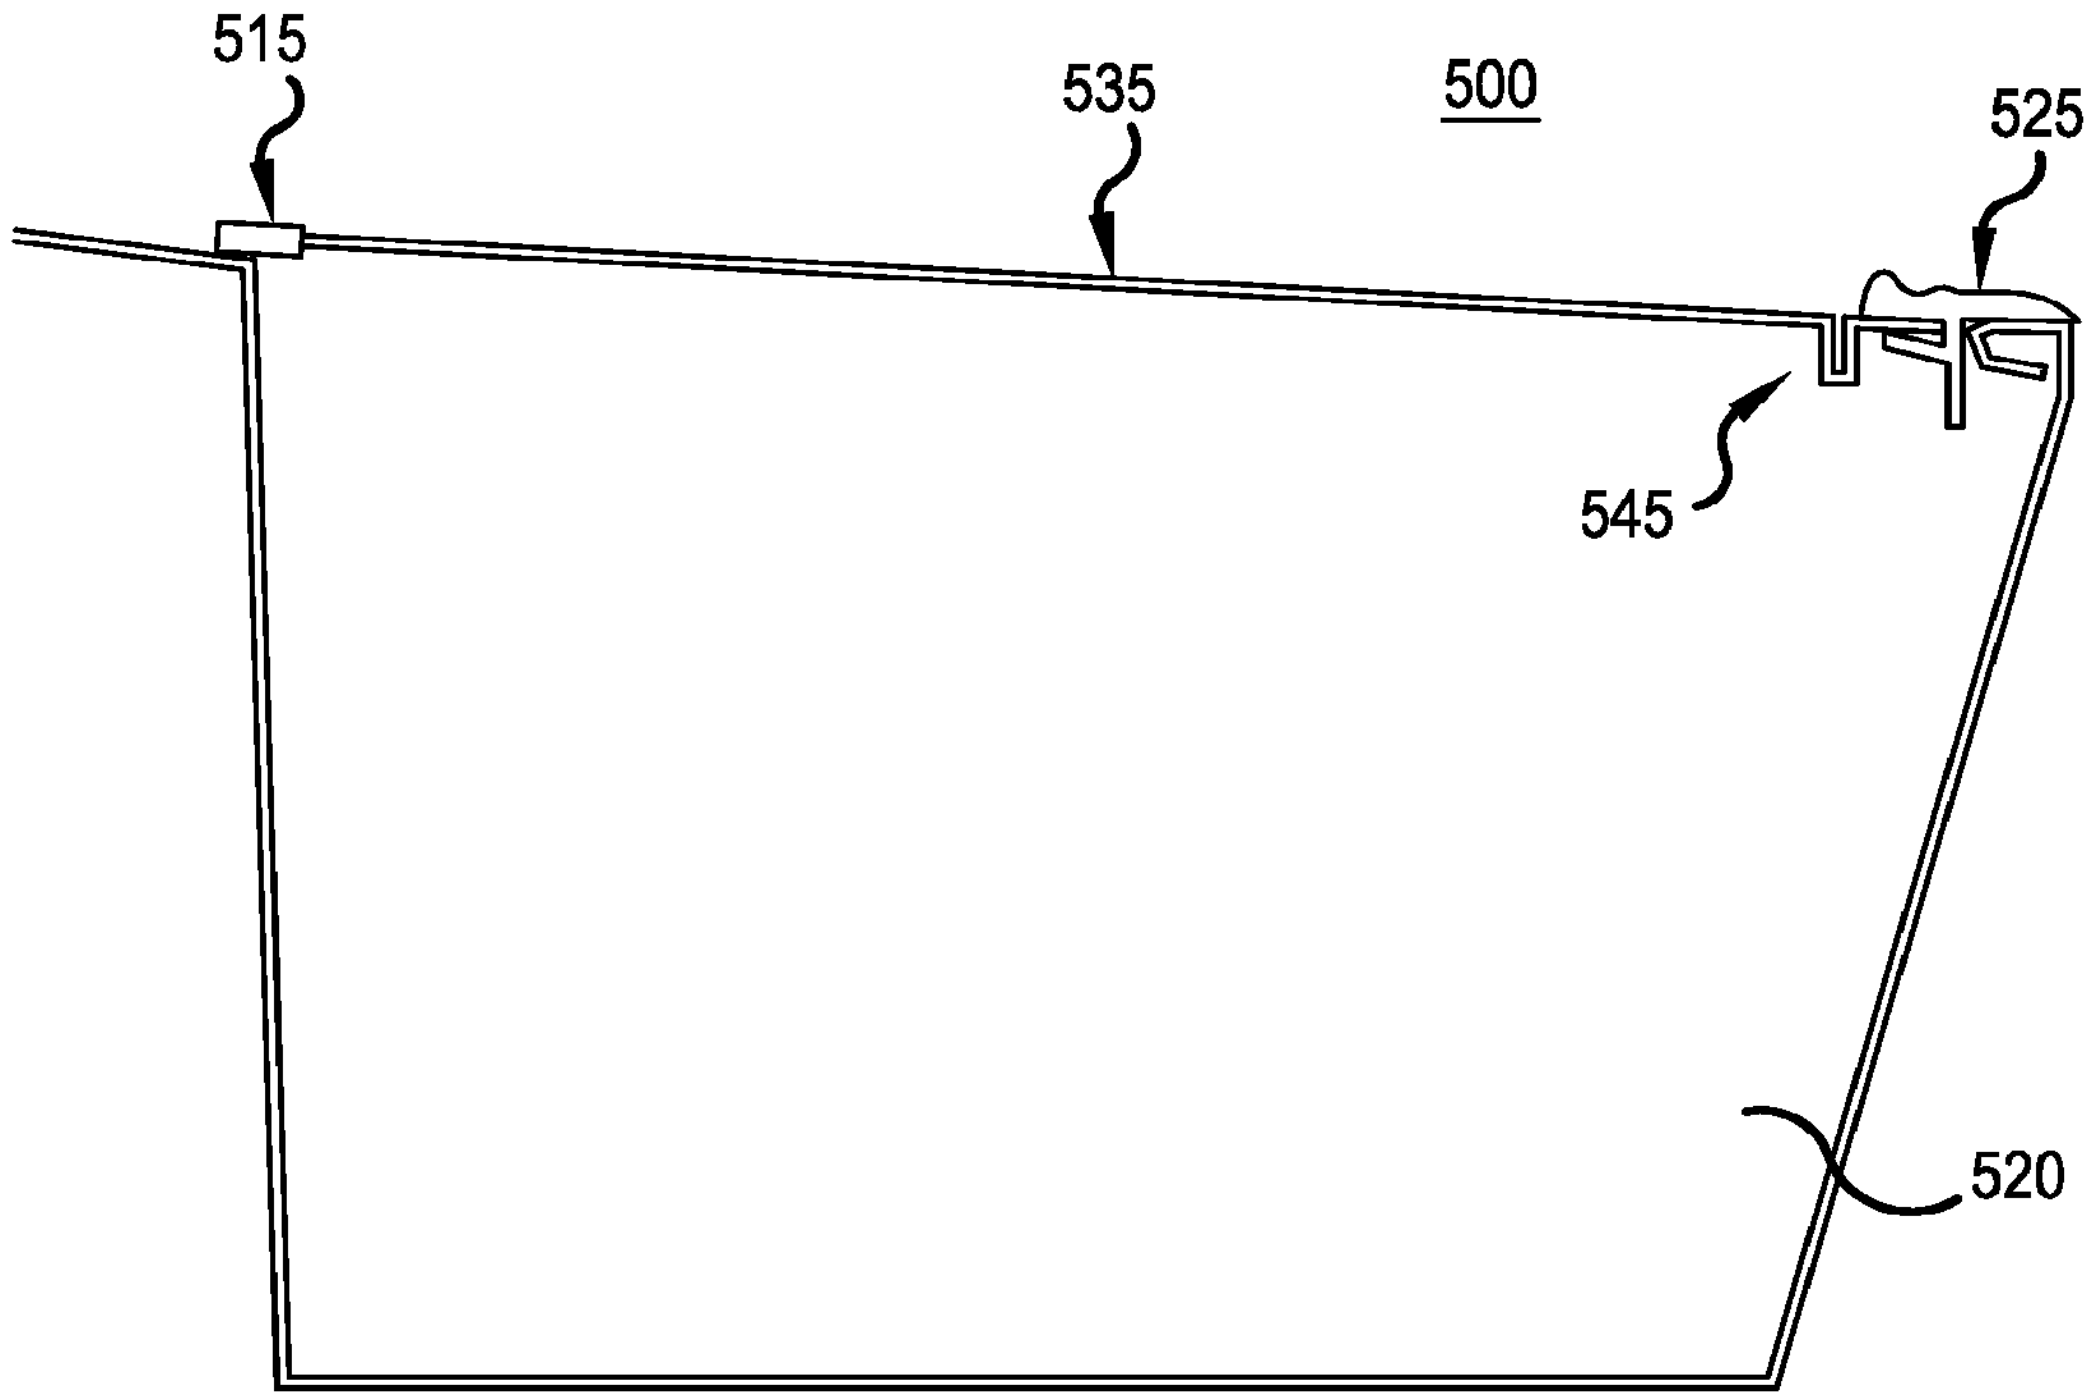

FIG.5A

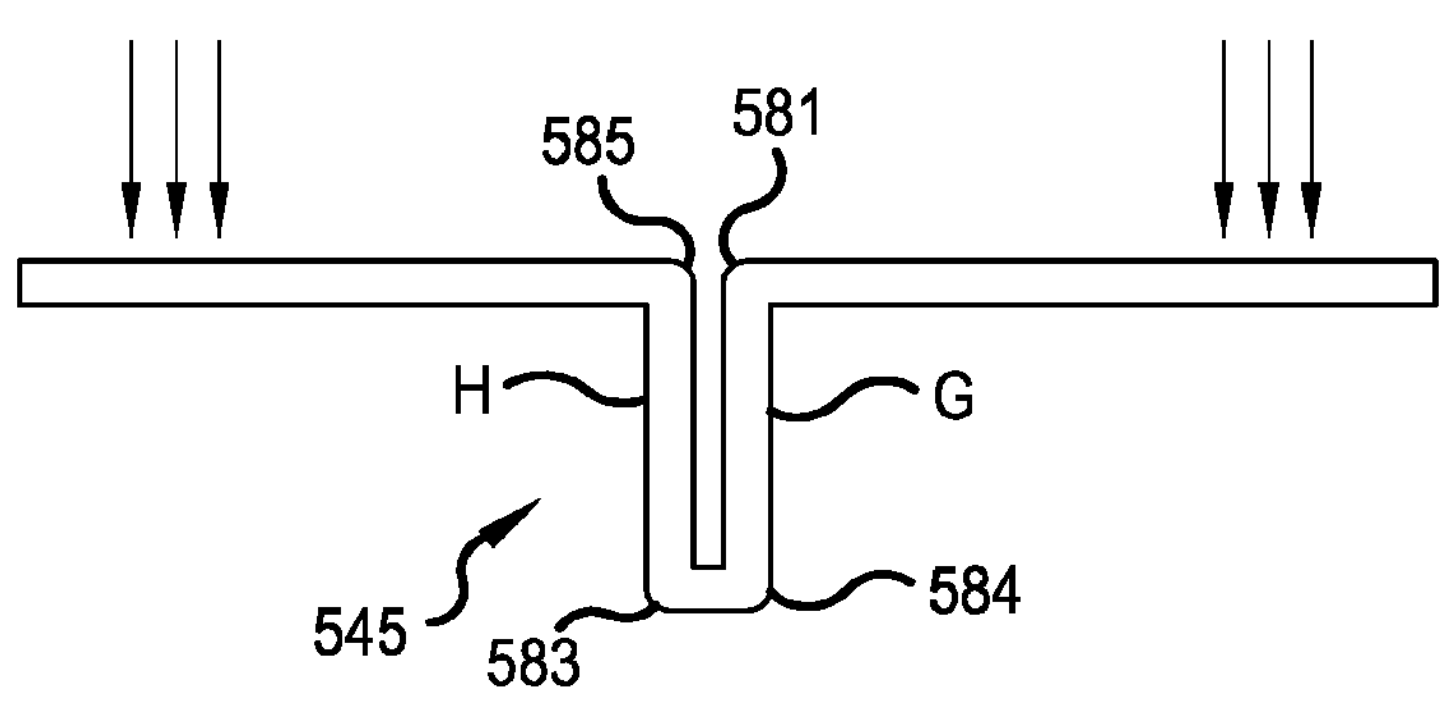

FIG.5B

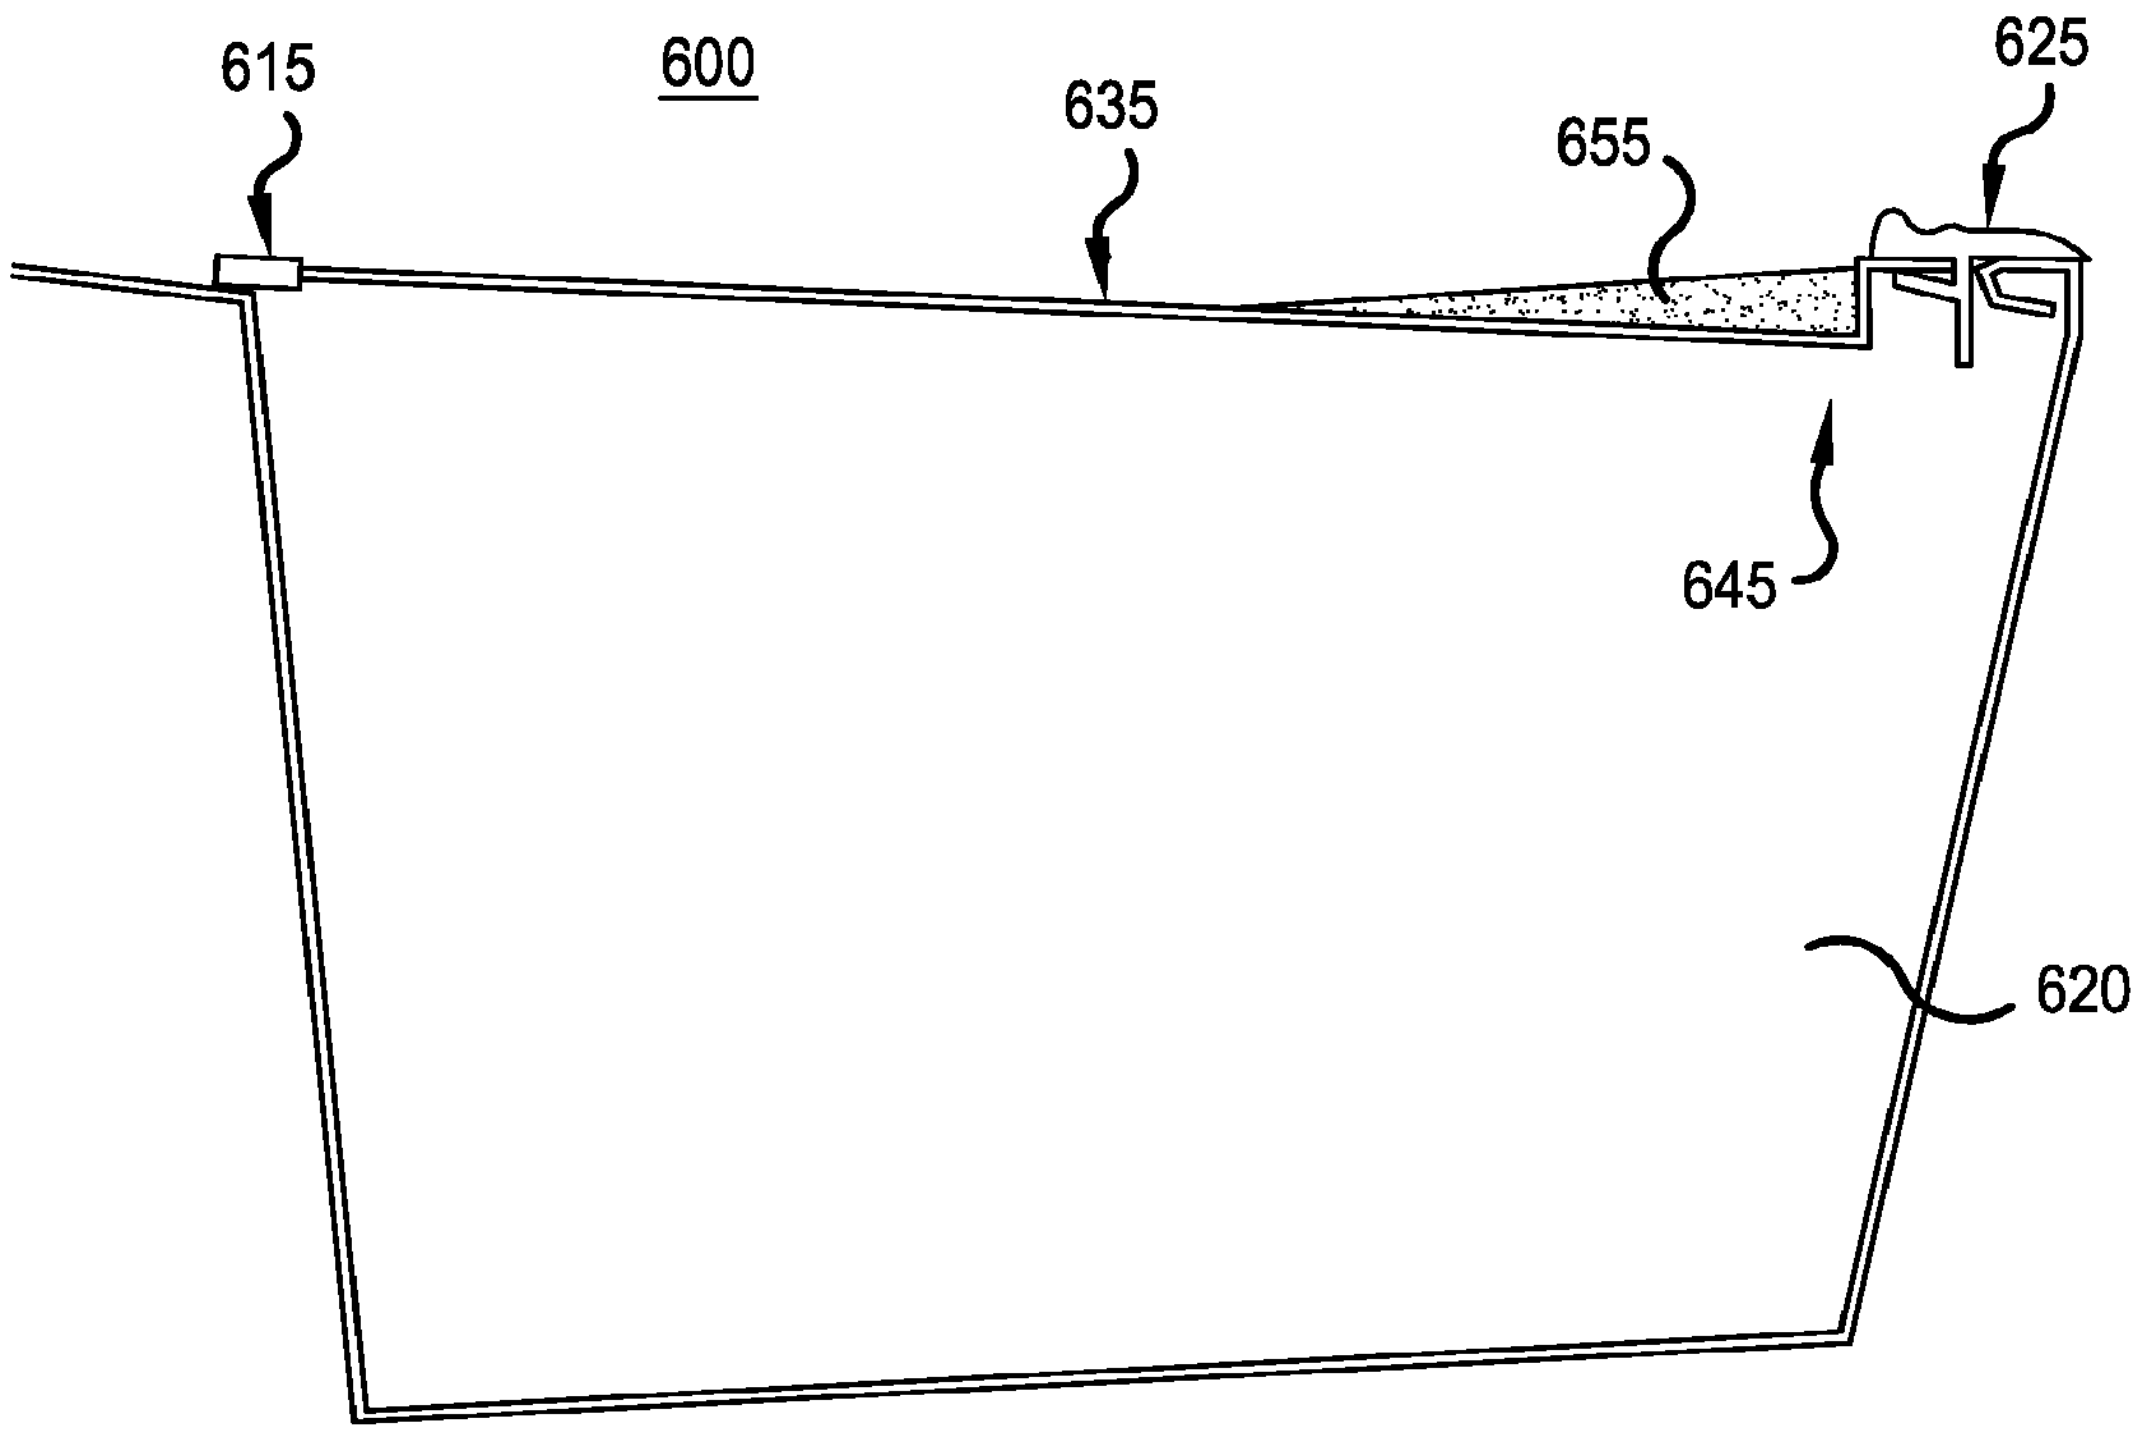

FIG.6A

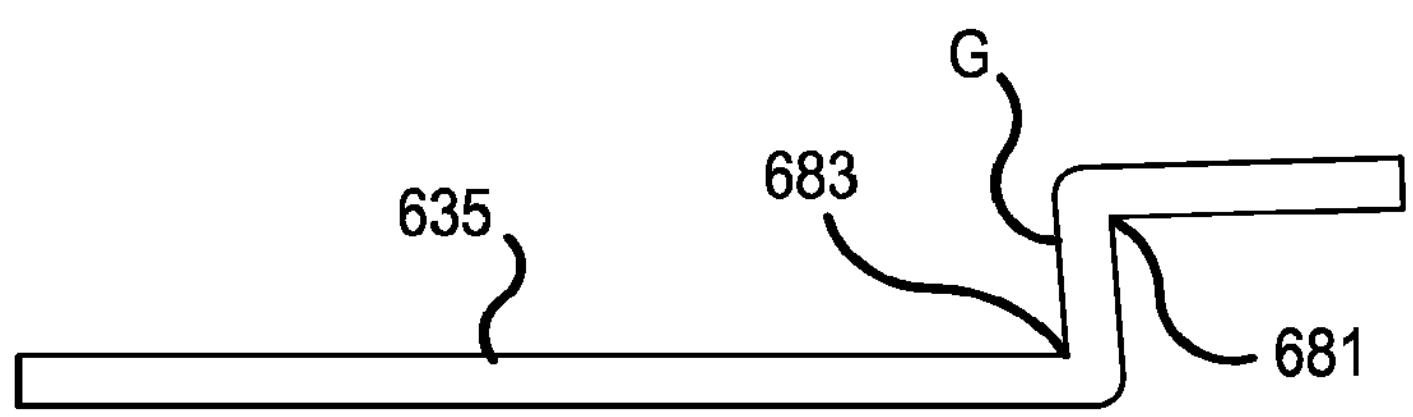

FIG.6B

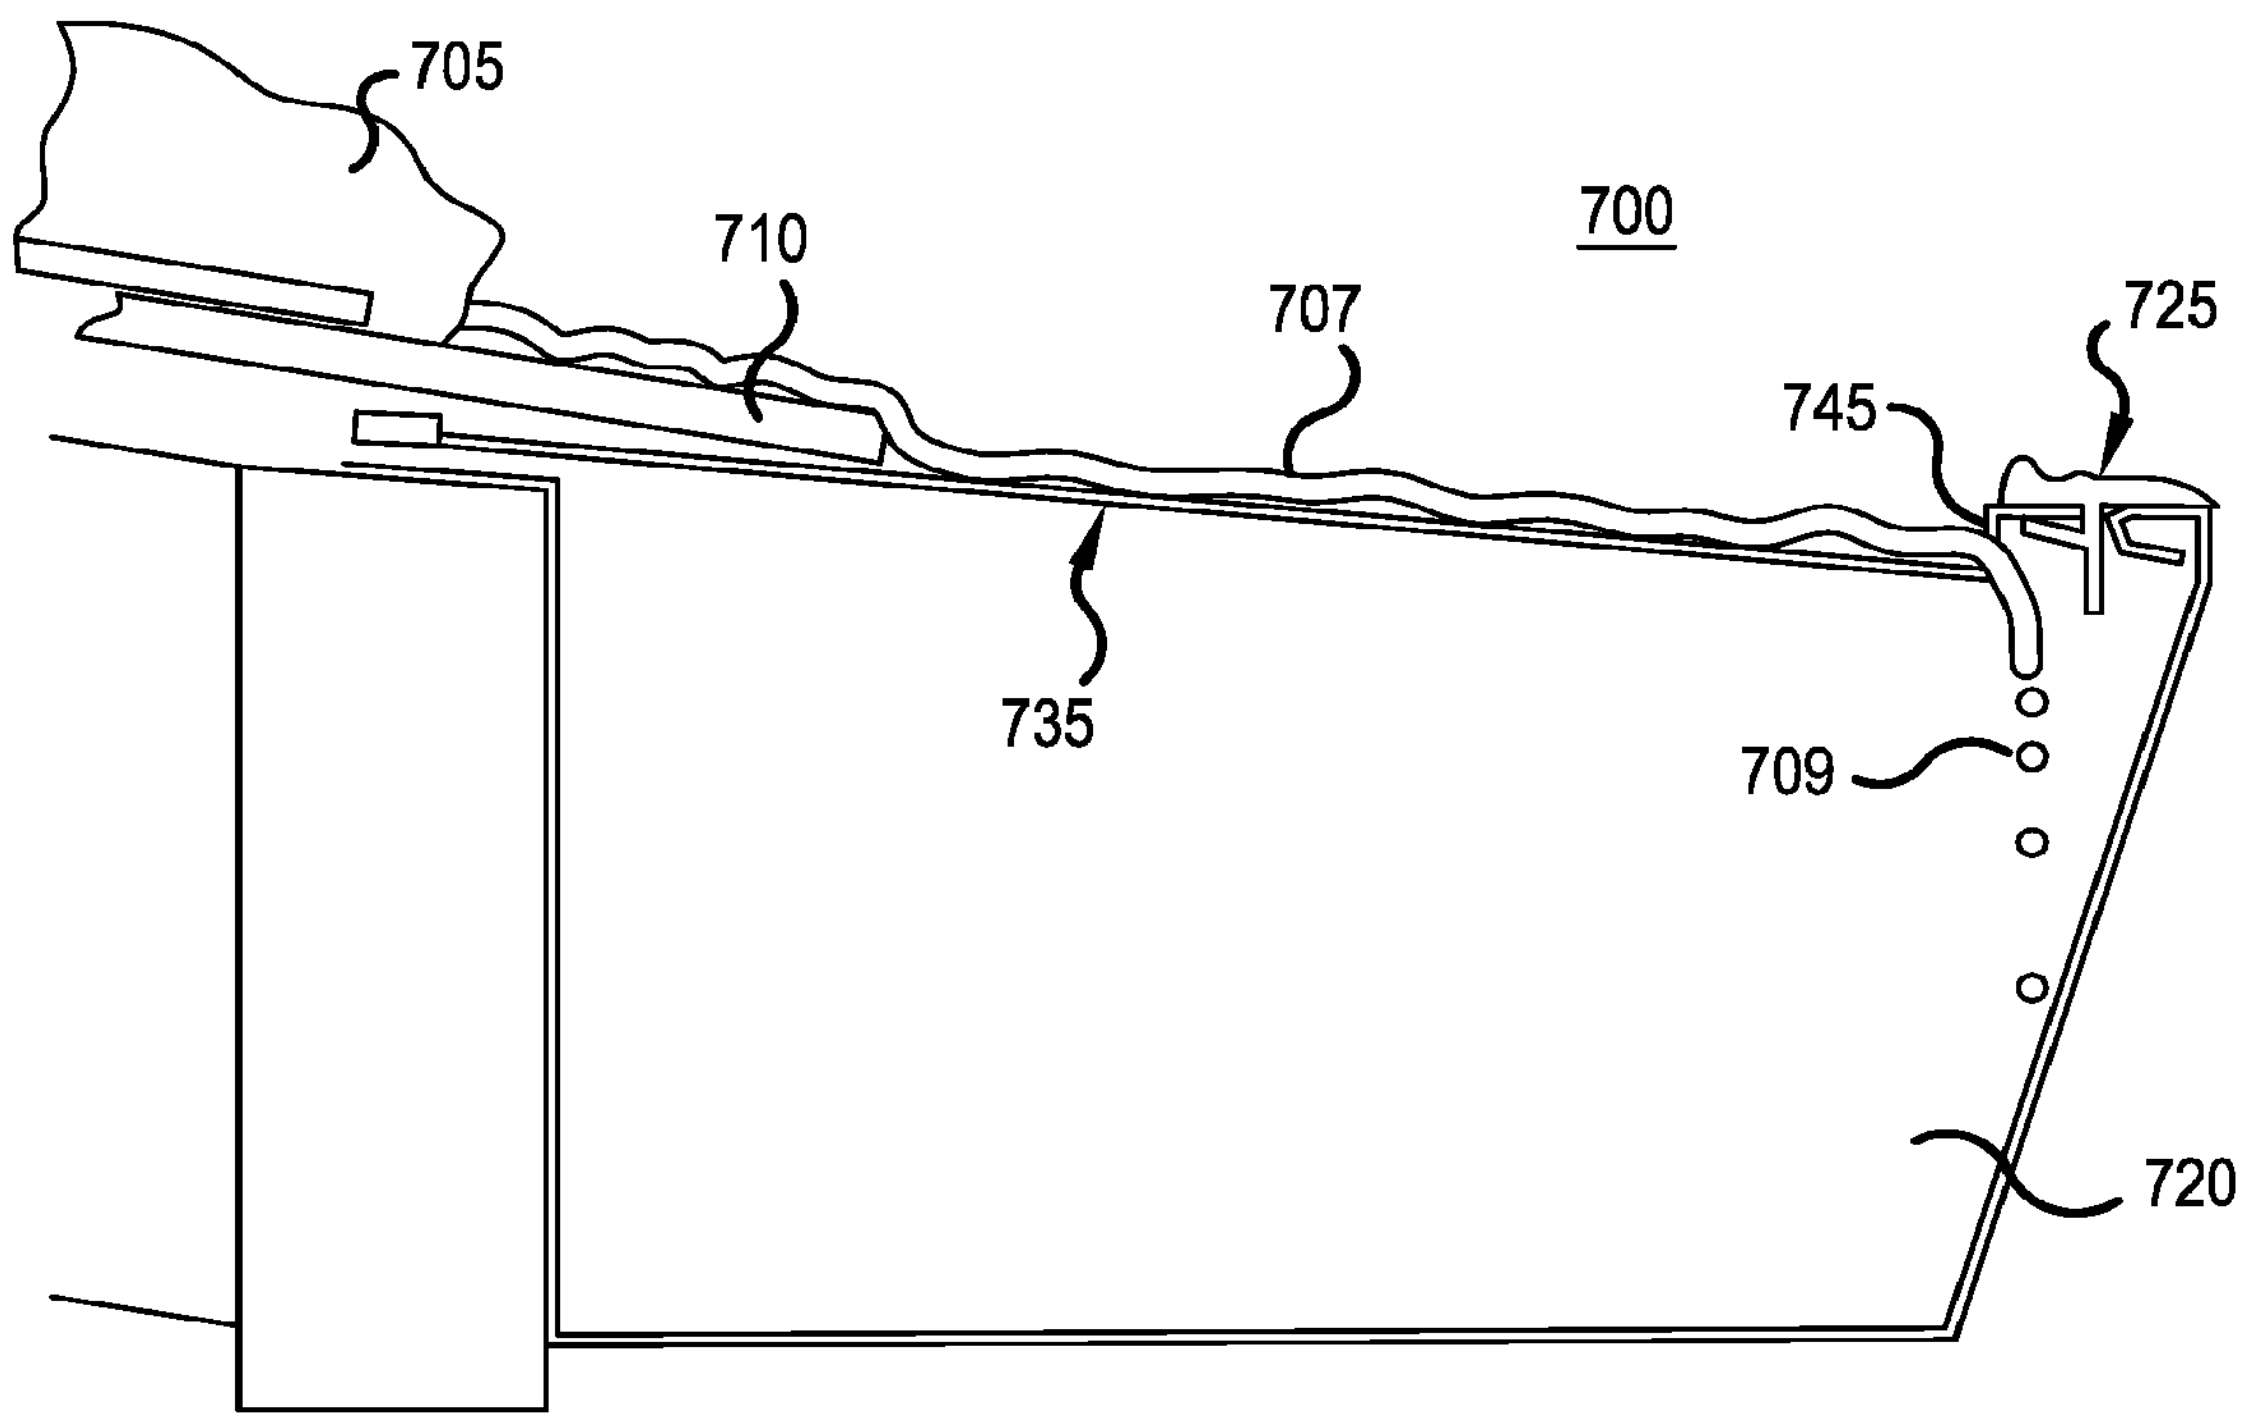

FIG.7

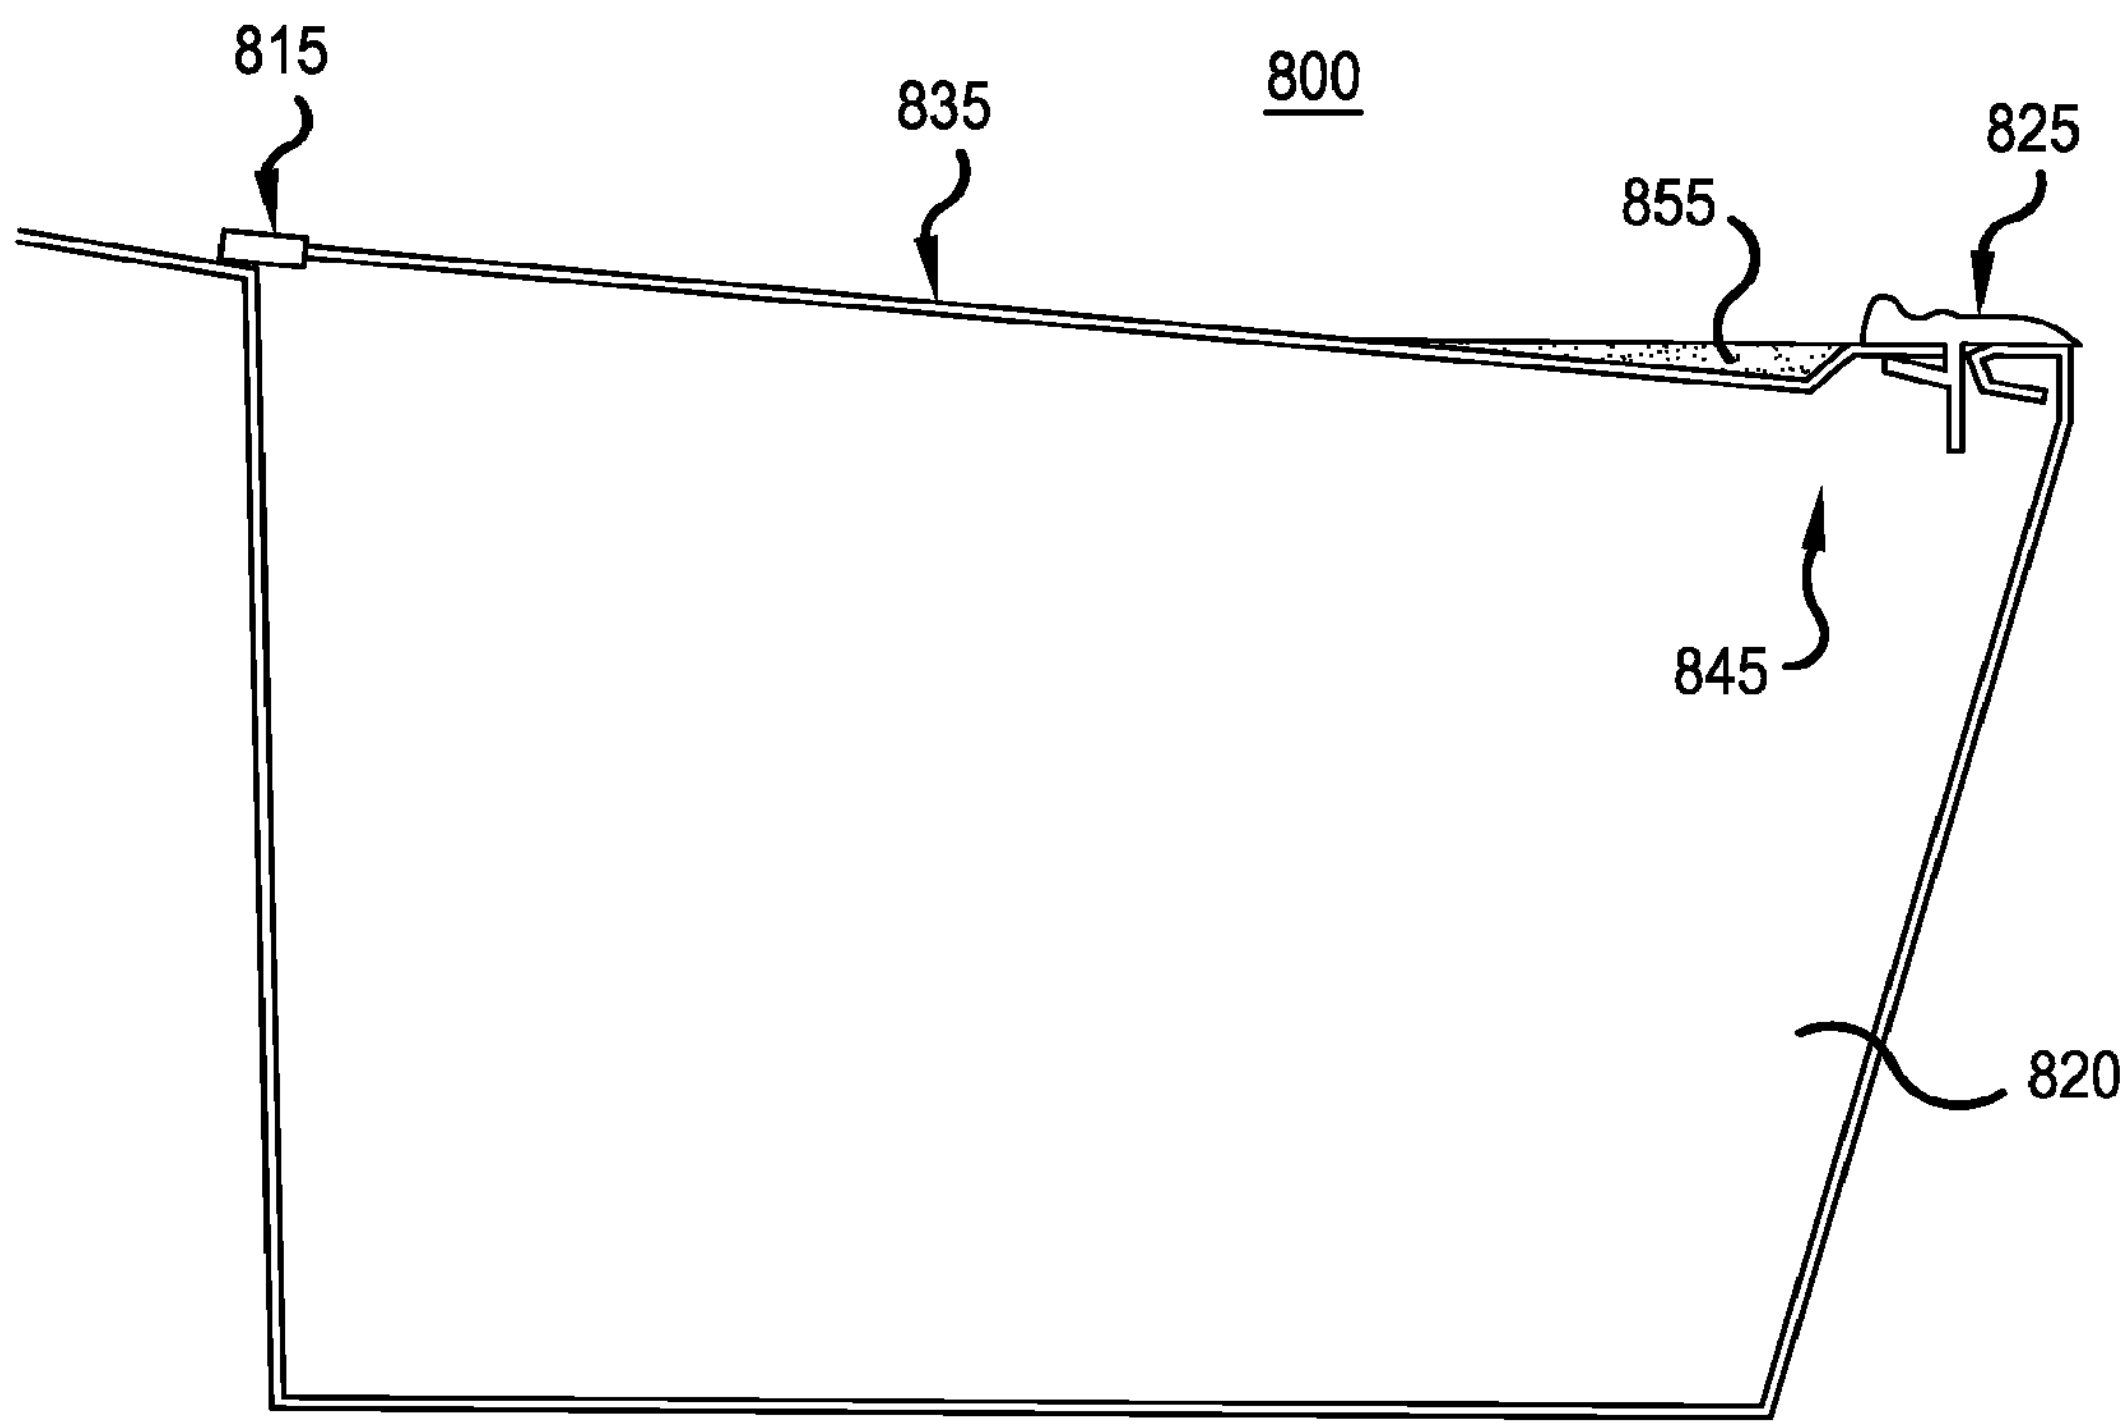

FIG.8A

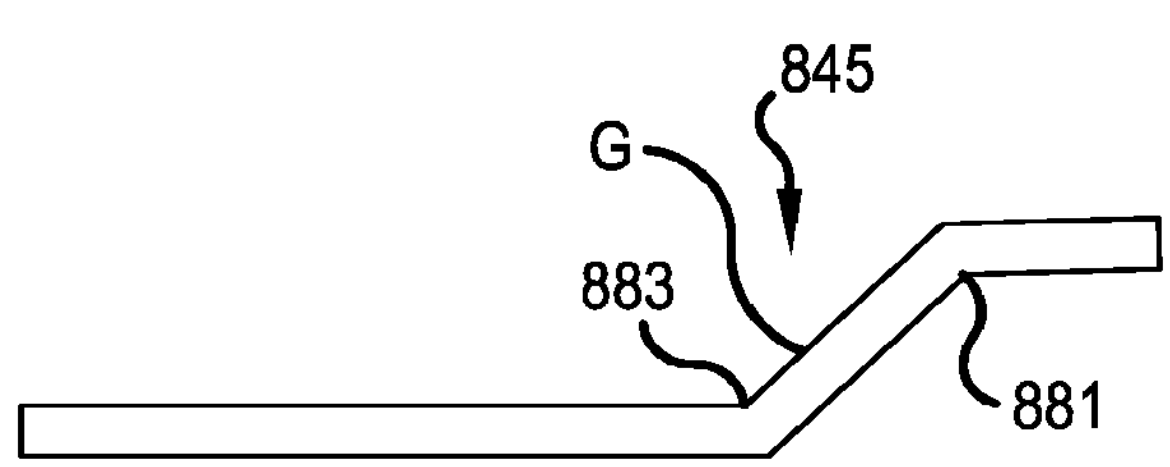

FIG.8B

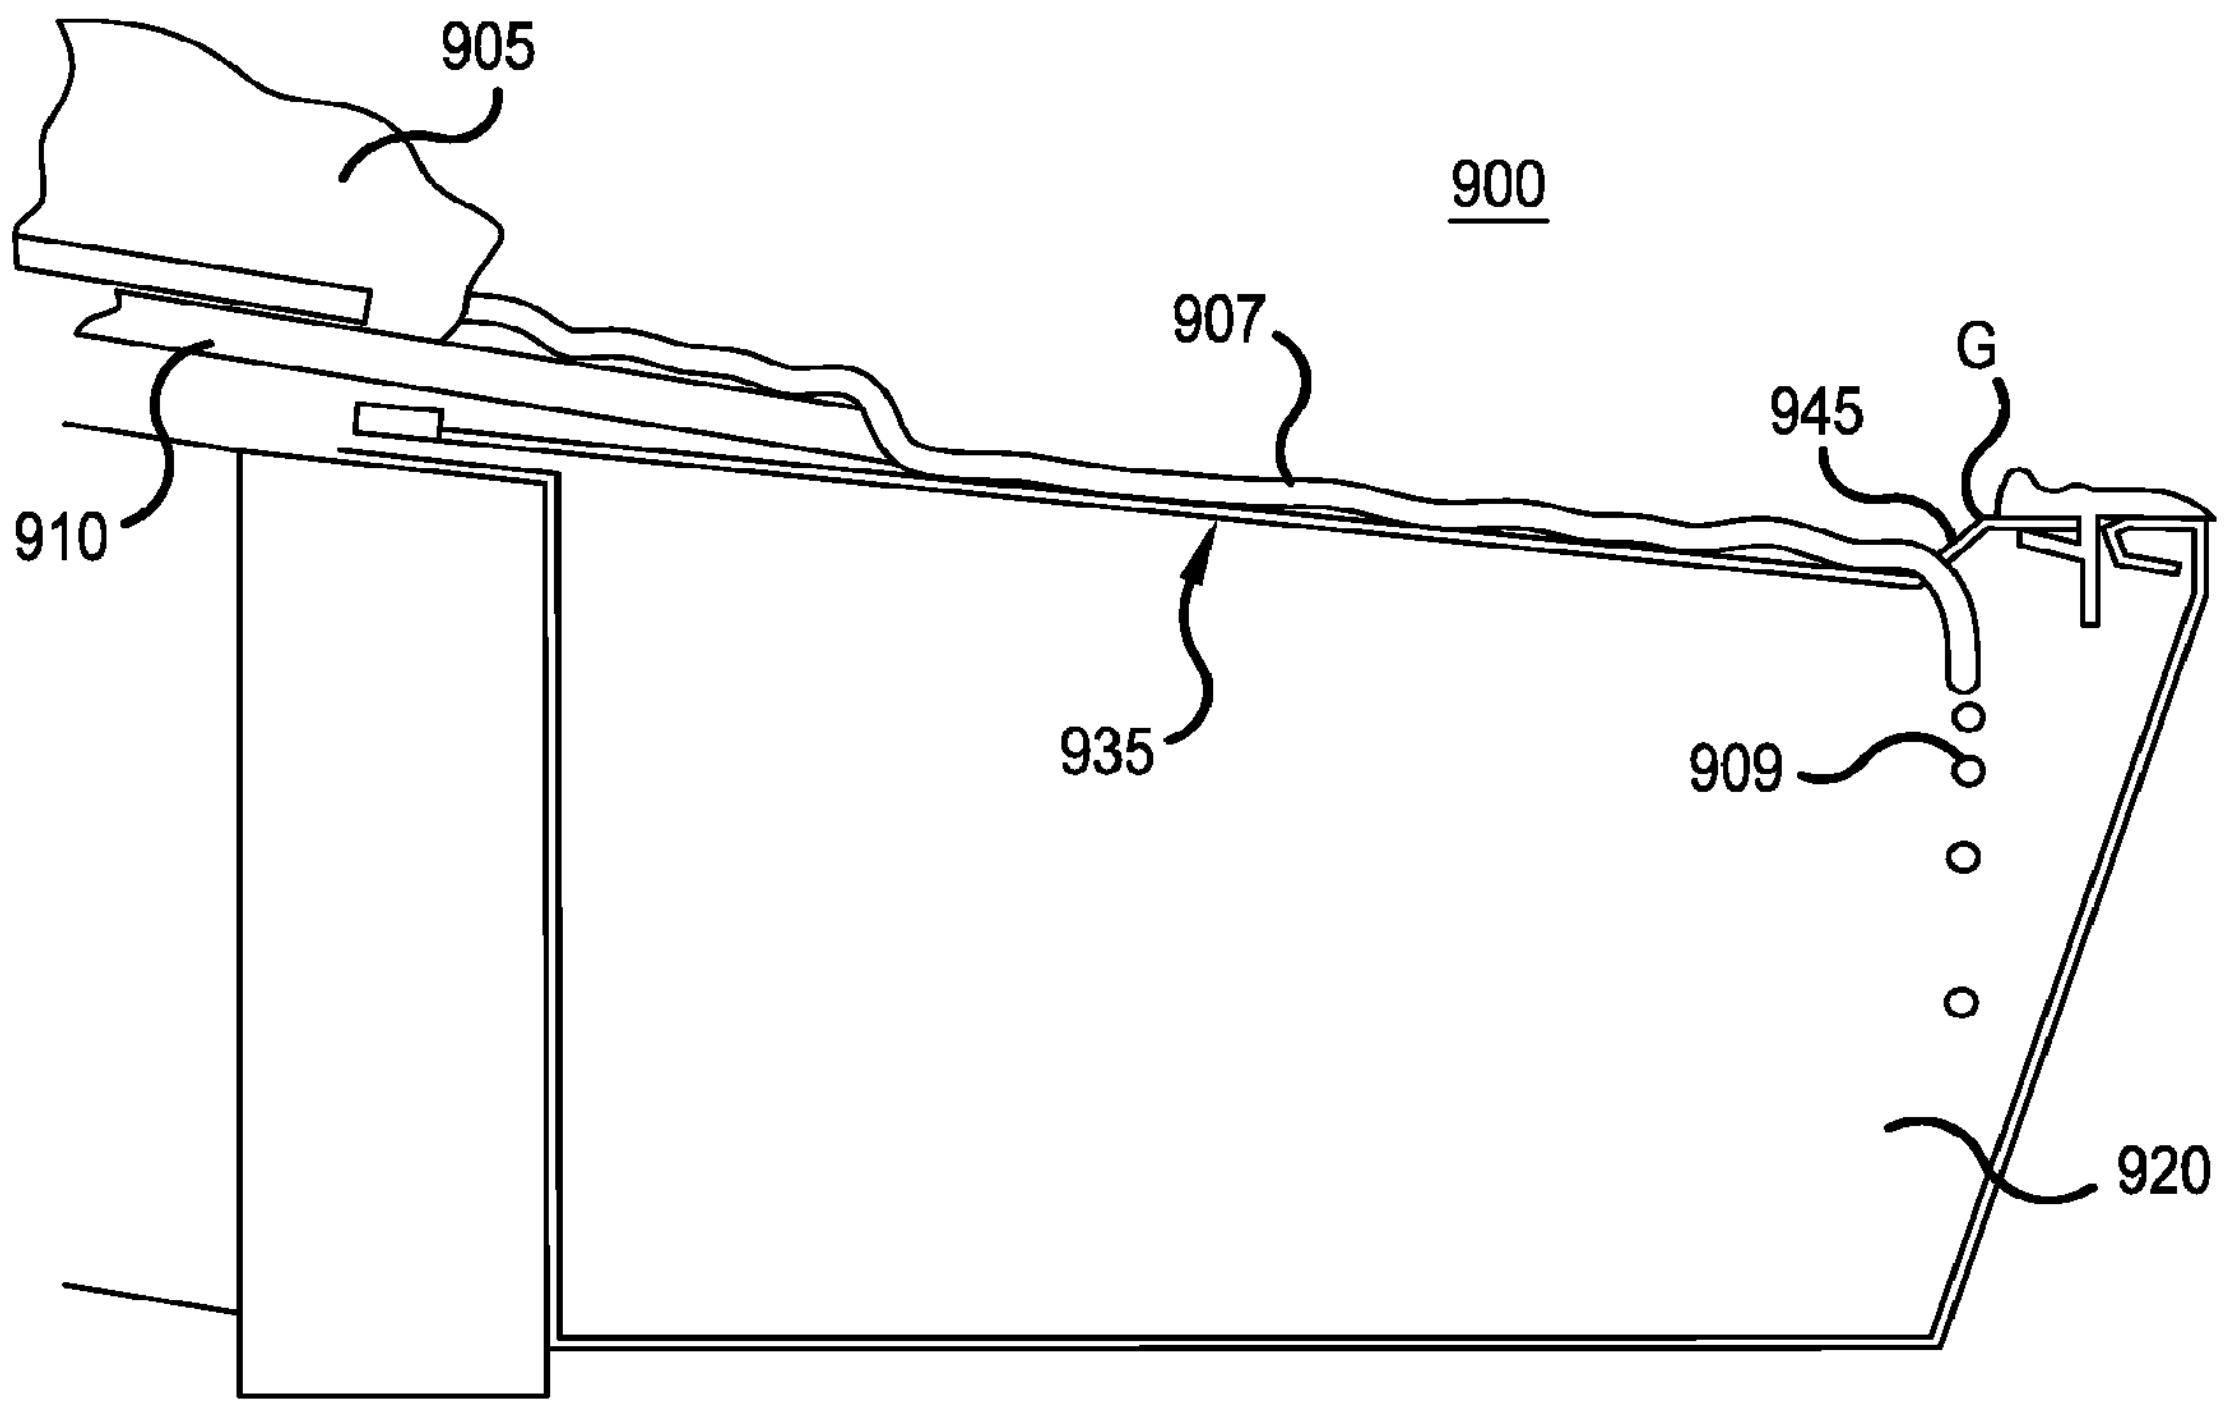

FIG.9

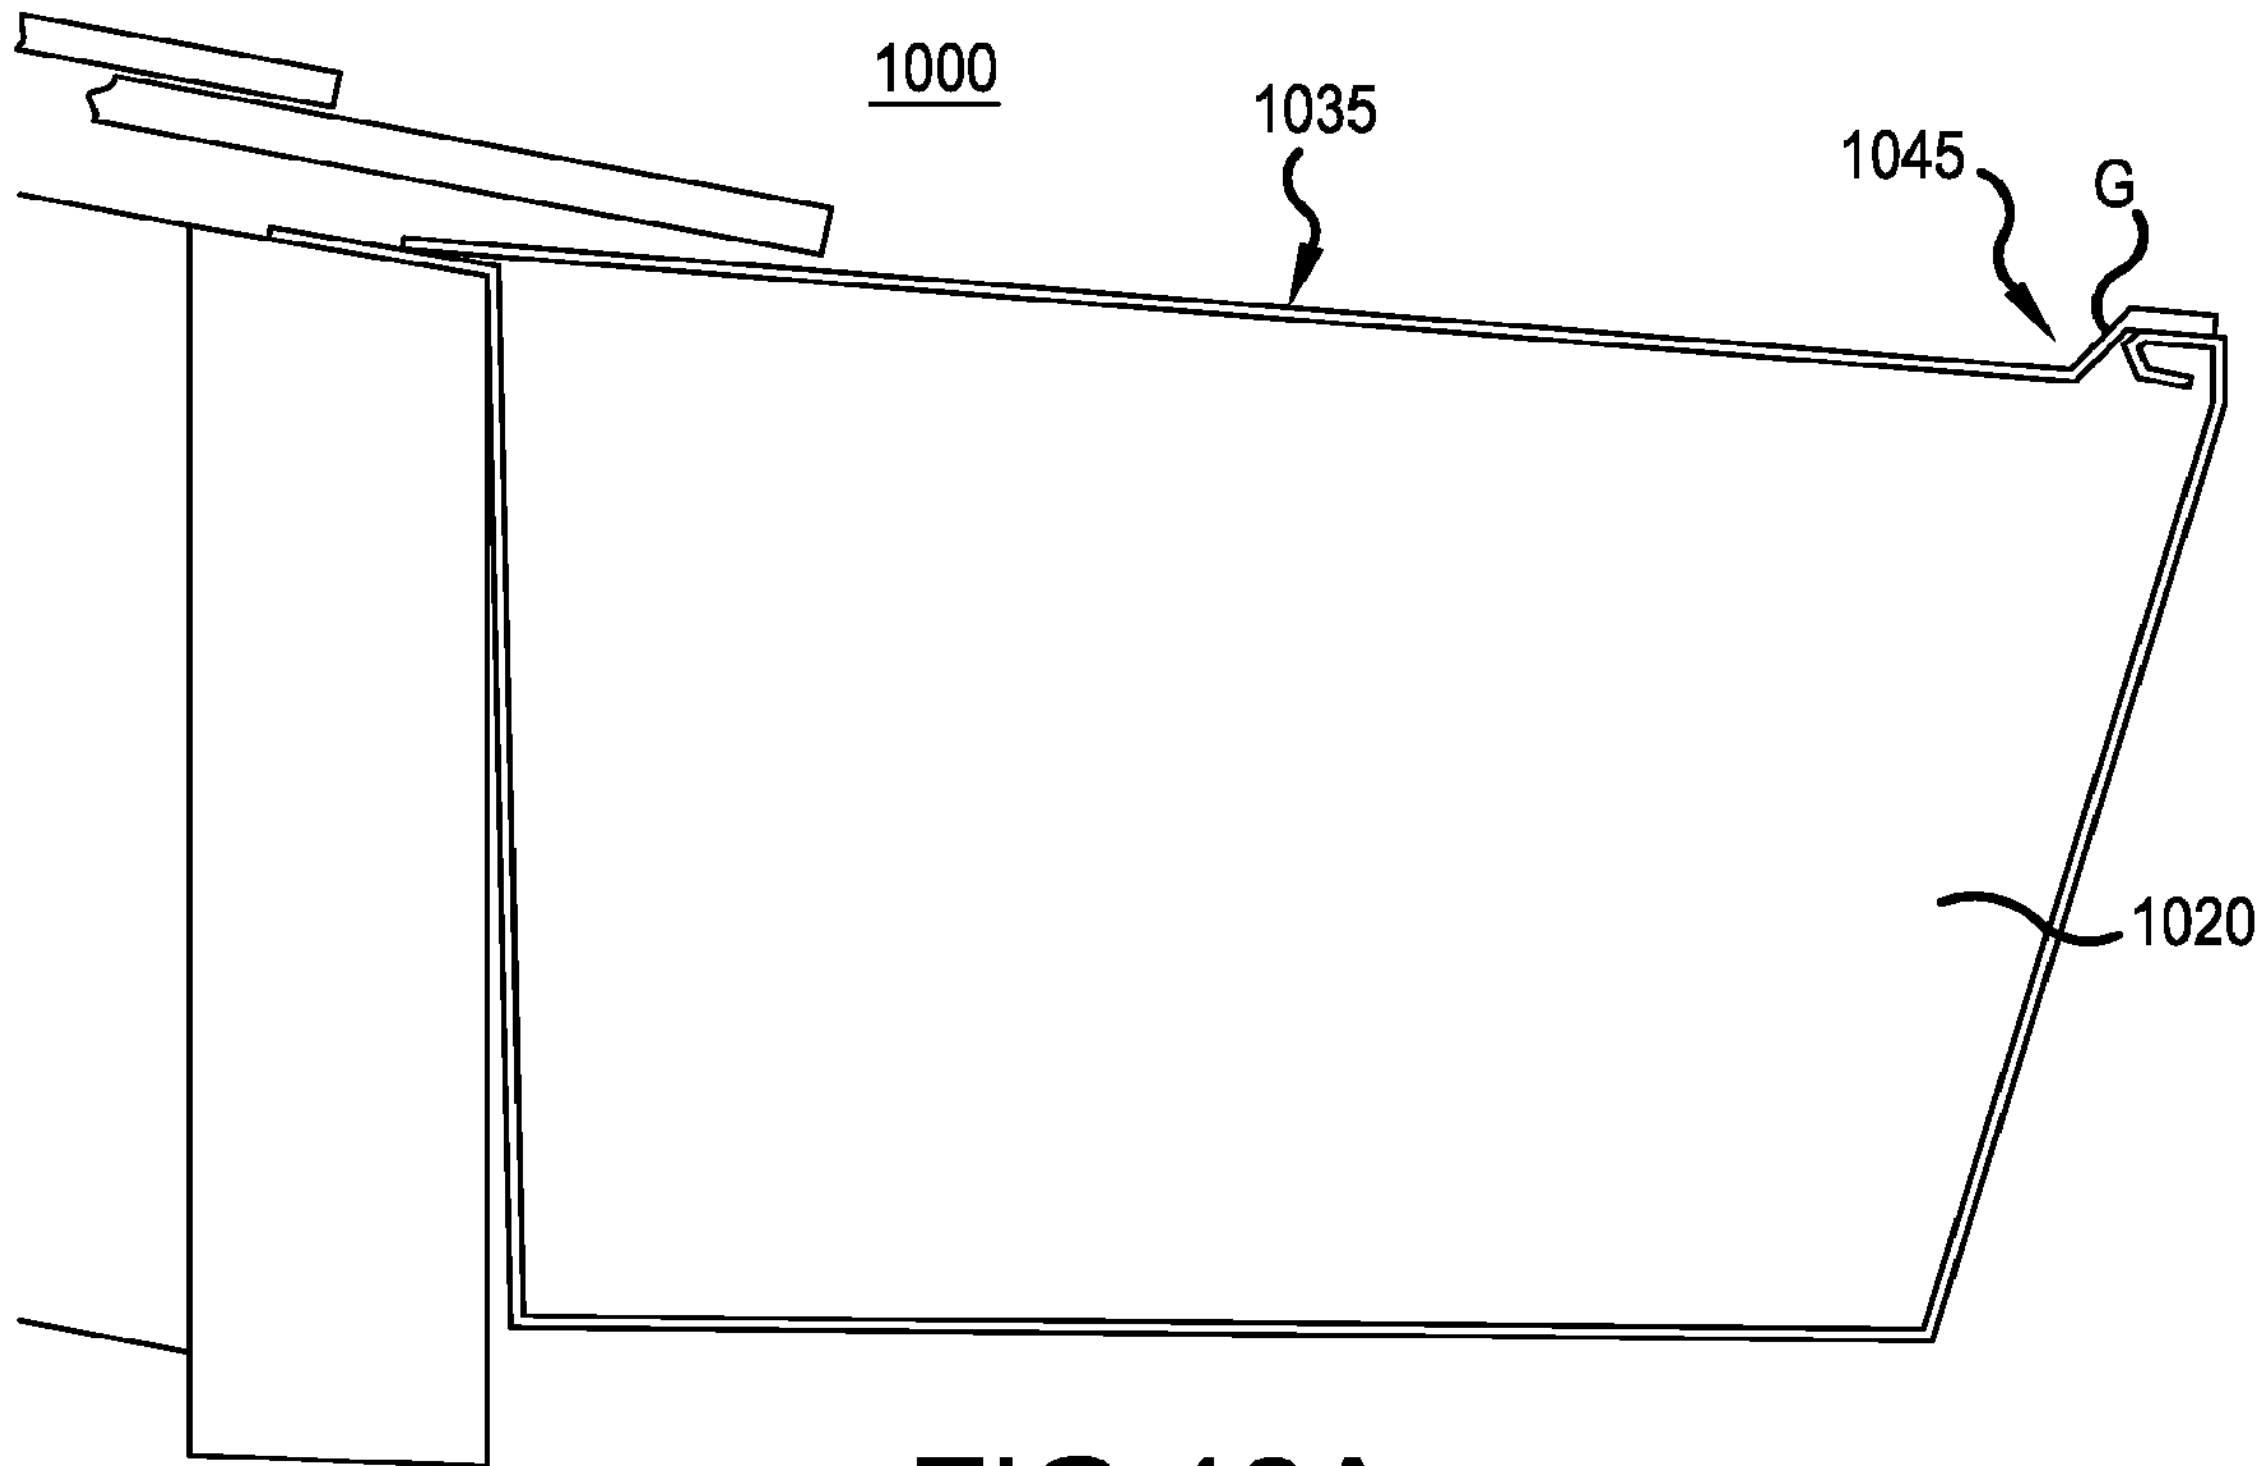

FIG.10A

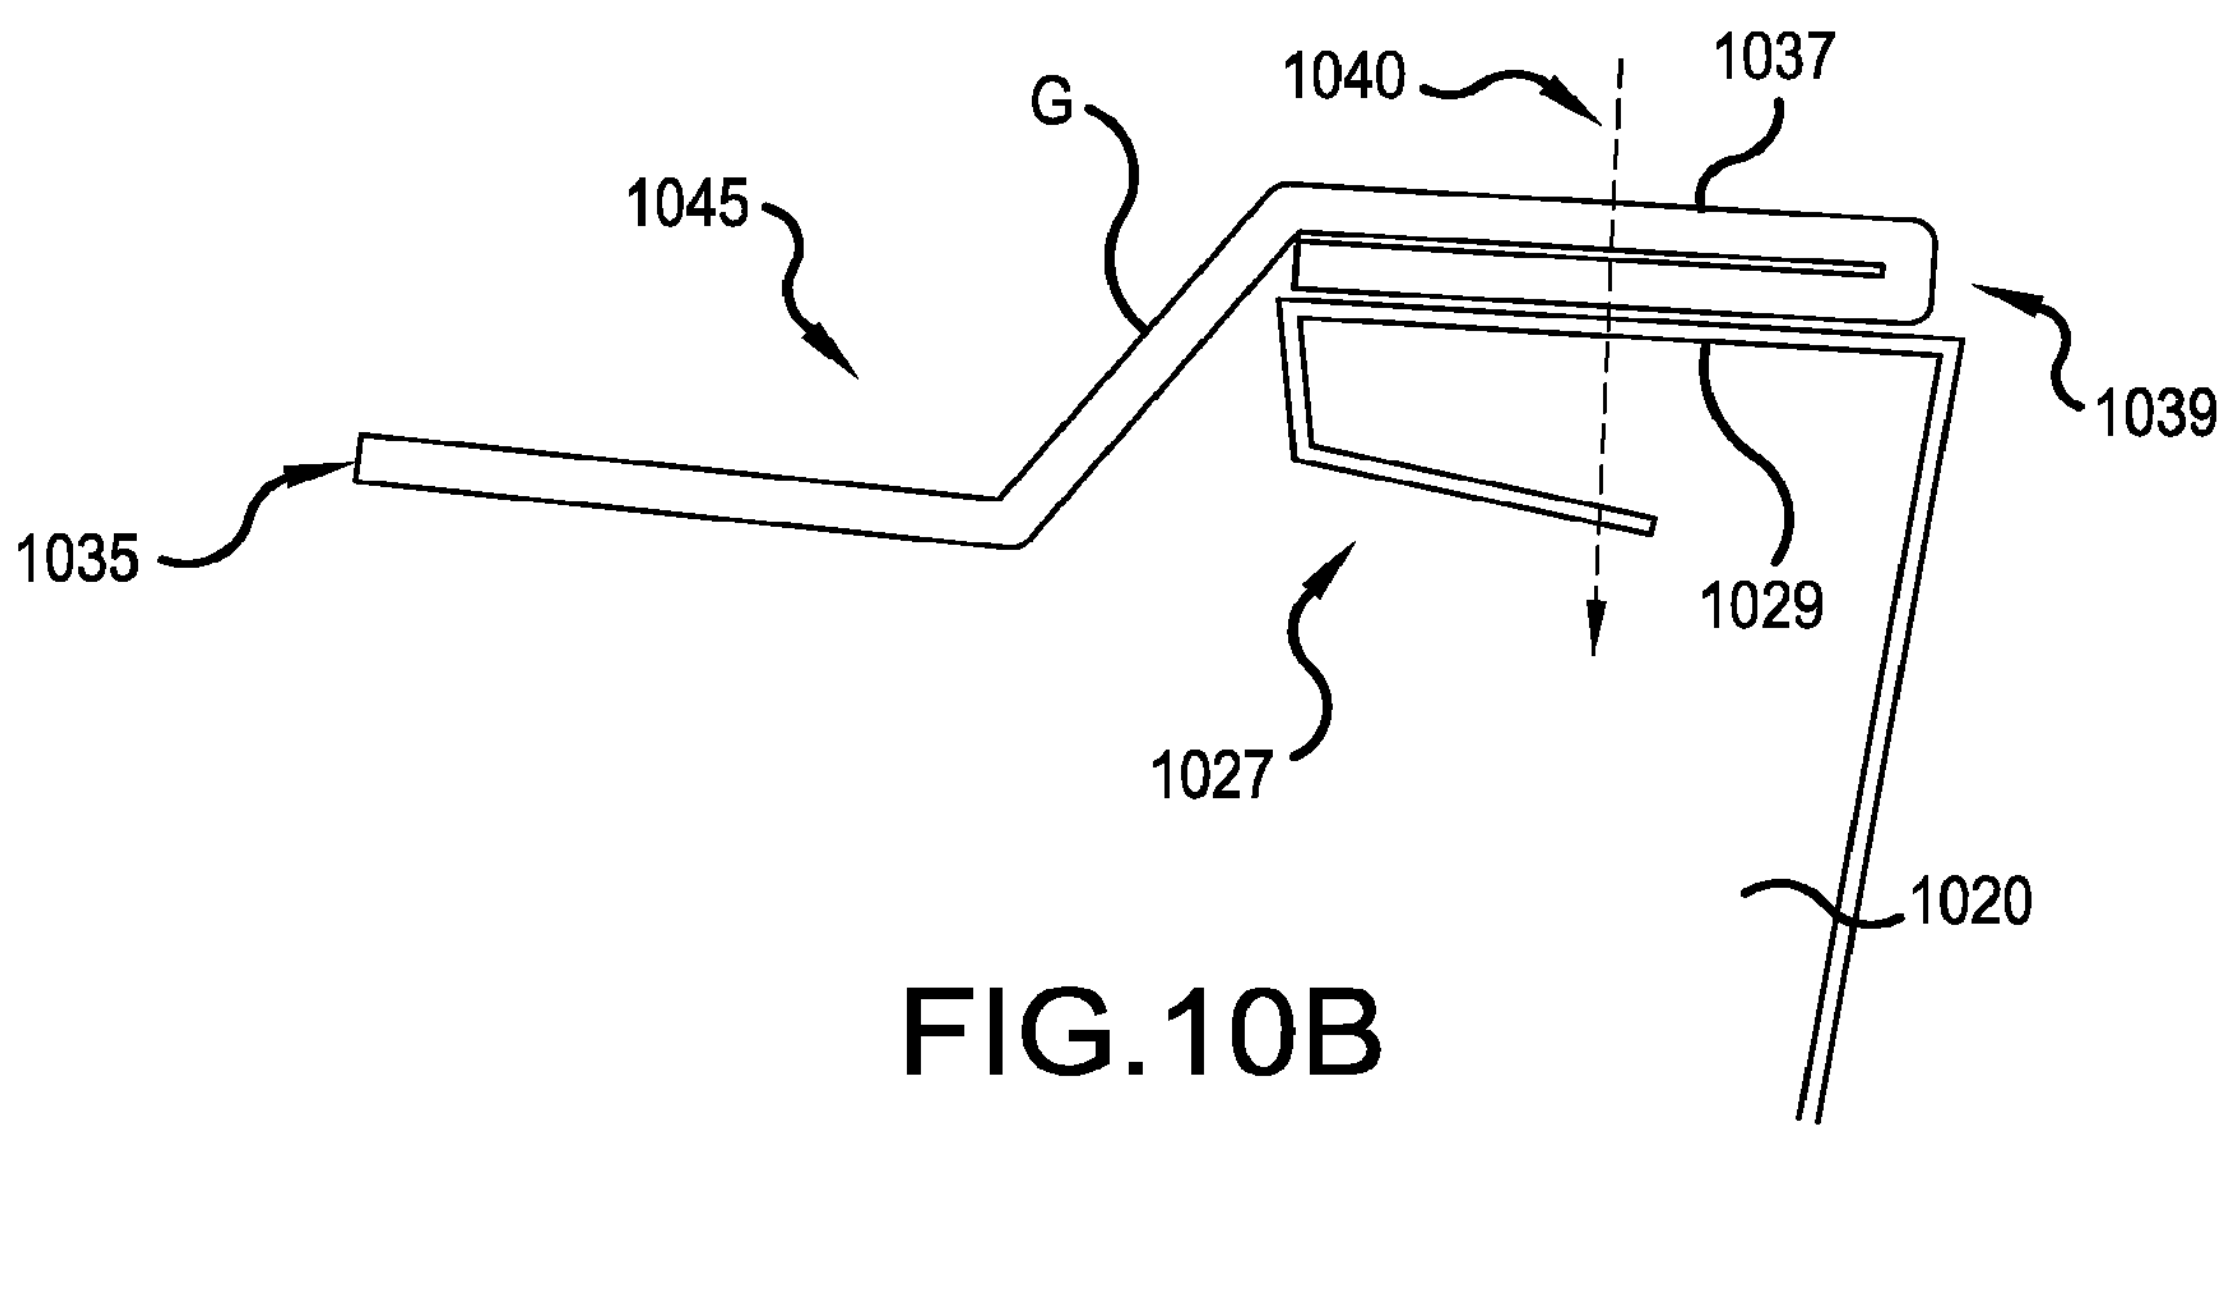

FIG.10B

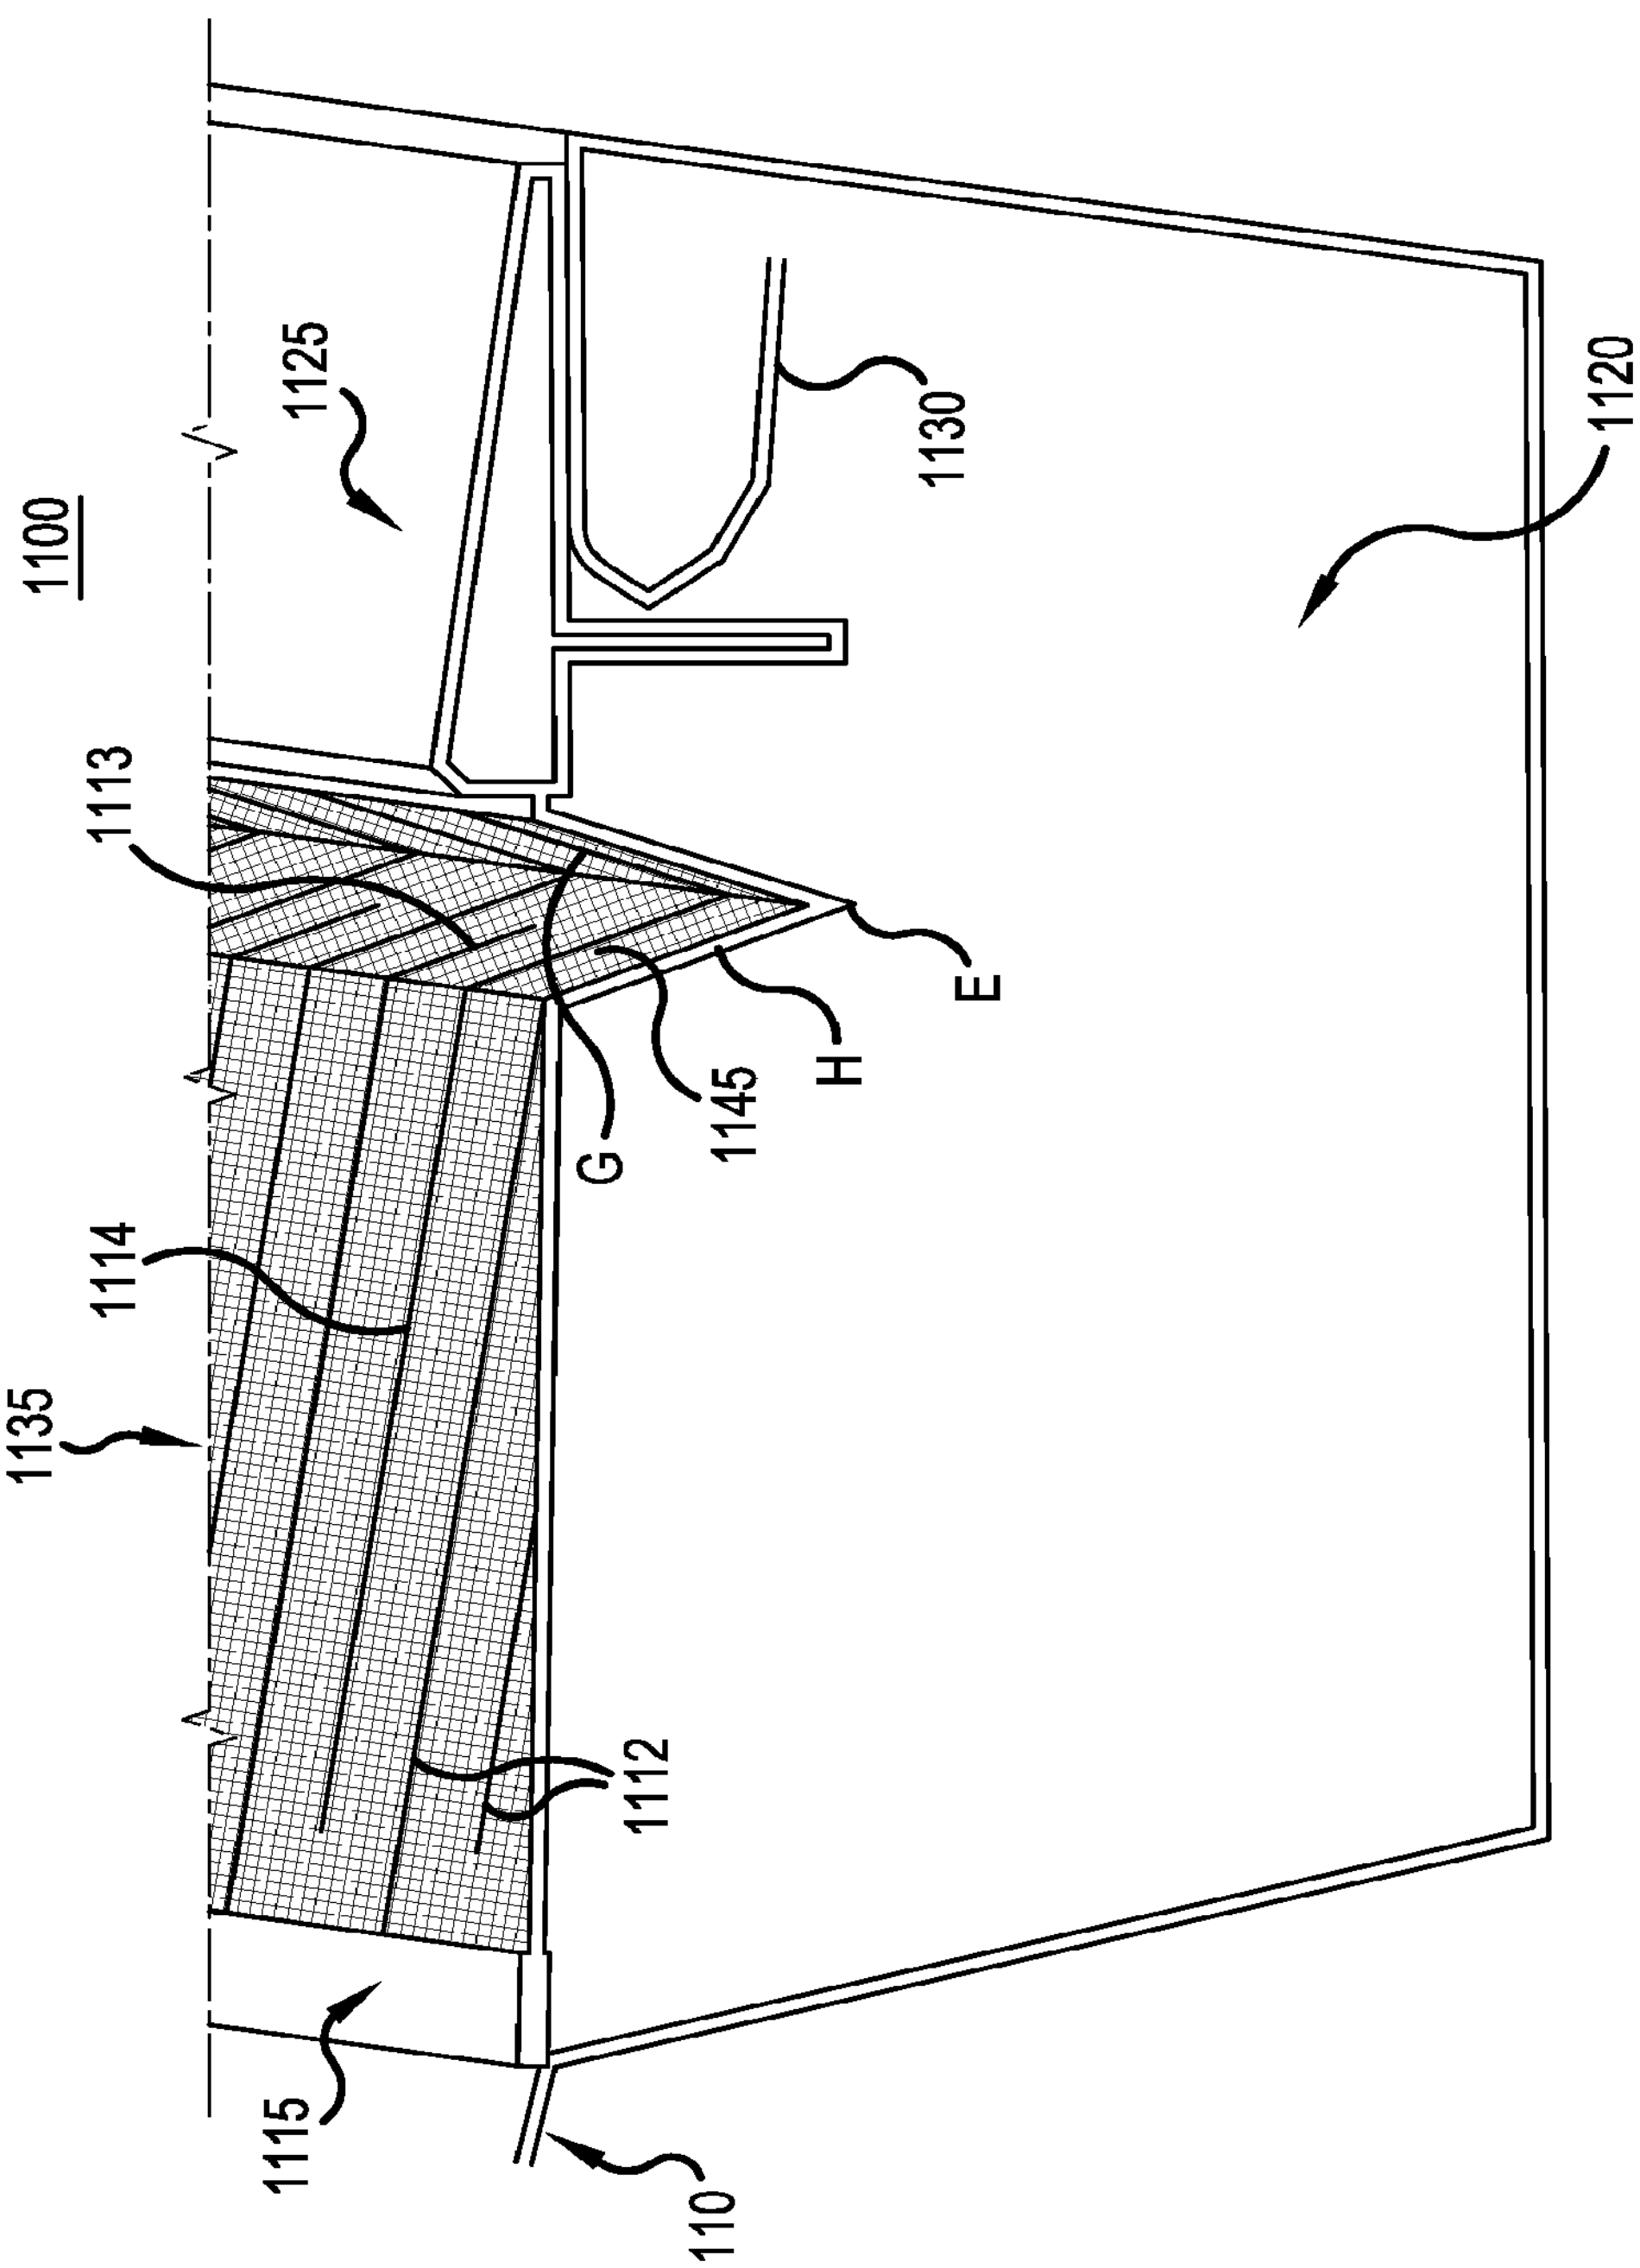

FIG.11

SELF-SUPPORTING BI-DIRECTIONAL CORRUGATED MESH LEAF PRECLUSION DEVICE

CROSS-REFERENCE TO RELATED APPLICATION(S)

This application is a continuation of U.S. patent application Ser. No. 17/455,897 filed Nov. 19, 2021, titled Self-Supporting Bi-Directional Corrugated Mesh Leaf Preclusion Device, which is a continuation of U.S. patent application Ser. No. 17/027,664 filed Sep. 21, 2020, now issued as U.S. Pat. No. 11,193,280 on Dec. 7, 2021, which is a continuation of U.S. patent application Ser. No. 16/356,955 filed on Mar. 18, 2019, now issued as U.S. Pat. No. 10,781,592 on Sep. 22, 2020, which is a continuation of U.S. patent application Ser. No. 15/920,407 filed Mar. 13, 2018, issued as U.S. patent Ser. No. 10/233,648 on Mar. 19, 2019, which is a continuation of U.S. patent application Ser. No. 15/096,178 filed Apr. 11, 2016, issued as U.S. Pat. No. 9,915,070 on Mar. 13, 2018, which is a continuation of U.S. patent application Ser. No. 14/620,729, filed on Feb. 12, 2015, which is a non-provisional application of U.S. Provisional Patent Application No. 61/939,005, filed Feb. 12, 2014, to which this application claims the benefit of all prior applications and are hereby incorporated by reference in their respective entireties.

FIELD

This invention relates to barriers for rain gutters and similar structures for keeping leaves and other debris out of the rain gutters. More particularly, this invention relates to rain gutter debris preclusion barriers, which utilize a conformed screen to allow water to pass into the gutter, but preclude debris from passing through the screen and into the gutter.

BACKGROUND

Prior art gutter debris preclusion devices are known to have difficulty in addressing excessive flow of rainwater coming off the roof of a house into the gutter. With excessive water flow, debris often accumulates on the device, clogging or impeding the effectiveness of the devise. Many complicated designs have been contemplated by others in the industry, each with their advantages and disadvantages. Of particular difficulty, is the need to support the "guard" over the gutter, wherein complicated and diverse support and bridging systems have been devised. These support systems add to the complexity, weight, and most importantly the cost of these guards. The industry was in need of a new system to support the guard over the gutter with easy installation, little or no increased weight, and without increasing the cost of the guard.

The present invention overcomes the deficiencies in the art by creating various systems and devices of screened gutter debris preclusion.

SUMMARY

The following presents a simplified summary in order to provide a basic understanding of some aspects of the claimed subject matter. This summary is not an extensive overview, and is not intended to identify key/critical elements or to delineate the scope of the claimed subject matter. Its purpose is to present some concepts in a simplified form as a prelude to the more detailed description that is presented later.

Various embodiments describe a covering that goes over a roof gutter for the purpose of keeping leaves, pine needles and small debris out of the gutter and for allowing rainwater to pass through a permeable material and into the gutter.

For example, one aspect of the disclosed embodiments, a gutter debris preclusion device for securing to a top portion of a roof gutter that is attached to a building for keeping leaves and other debris out of the roof gutter is provided, comprising: a water permeable, weather resistant mesh having apertures of a pre-determined size for passing water, the mesh sized to substantially cover a rain gutter; corrugations in the mesh; and a debris collection trough disposed along a longitudinal axis of the mesh and positioned proximal to a gutter lip end of the mesh.

In another aspect of the disclosed embodiments, the device described above is provided, further comprising first and second wall portions of the trough connected together to form a tilted L-shaped reservoir, a bottom of the reservoir below the gutter lip end of the mesh, the first wall portion longer than the second wall portion, and the second wall portion angled upwards and towards the gutter lip end of the mesh; and/or wherein the mesh is formed from stainless steel wires, plastic, expanded metal, perforated metal, slotted metal or louvered metal; and/or wherein the first wall portion extends to a roof-side end of the mesh; and/or wherein the corrugations are configured to provide a planar stiffness to the mesh causing the mesh to be self-supporting over the gutter; and/or wherein the corrugations in the mesh are formed via at least one of stamping, pressing, and weaving; and/or further comprising: a front strip connector adapted to connect the gutter lip end of the mesh to a front of the gutter; and a rear strip connector adapted to connect the roof-side end of the mesh to either a rear of the gutter or a roof element neighboring the gutter; and/or wherein the trough is displaced up to 1.5" from the front strip connector; and/or wherein the trough is displaced up to 0.25" from the front strip connector; wherein the corrugations span from a roof-side end of the mesh to at least one of a first and second bend in the trough; and/or further comprising a second trough disposed in the mesh along a longitudinal axis of the of mesh; and/or wherein an angle formed by the connected first and second wall portions is less than 90 degrees; and/or wherein an angle formed by the connected first and second wall portions is greater than 90 degrees; and/or wherein at least one of the first and second wall portions is further angled to form a segmented or a curved reservoir bottom.

In yet another aspect of the disclosed embodiments, a gutter debris preclusion device for securing to a top portion of a roof gutter that is attached to a building for keeping leaves and other debris out of the roof gutter is provided, comprising: weather resistant means for passing water while restricting debris, sized to substantially cover a rain gutter; stiffness means in the weather resistant means; and a debris collection means disposed along a longitudinal axis of the weather resistant means and positioned proximal to a gutter lip end of the weather resistant means. In another aspect of the disclosed embodiments, the device described above is provided, further comprising a first wall portion and second wall portion of the debris collection means, wherein the first wall portion is longer than the second wall portion and the second wall portion is angled upwards and towards the gutter lip end of the weather resistant means, wherein a bottom of the debris collection means is below the gutter lip end of the weather resistant means; and/or further comprising: a front strip connector adapted to connect the gutter lip end of the weather resistant means to a front of the gutter; and a rear strip connector adapted to connect the roof-side end of the weather resistant means to either a rear of the gutter or a roof element neighboring the gutter; and/or wherein the debris collection means is displaced up to 1.5" from the front strip connector; and/or further comprising a second debris collection means disposed along a longitudinal axis of the weather resistant means; and/or wherein an angle formed by the connected first and second wall portions is less than 90 degrees; and/or wherein at least one of the first and second wall portions form a segmented or a curved debris collection means bottom.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1**A is a side perspective view of an embodiment of a three-piece gutter cover.

FIGS. **1**B-C are illustrations of various meshes with corrugations that are formed with different diameter wires.

FIG. **2** is a semi-side cut-away illustration of the embodiment of FIG. **1**A.

FIG. **3**A is a side illustration of another mesh configuration with multiple troughs.

FIG. **3**B is a cross-sectional close up illustration of an exemplary V-shaped trough.

FIG. **4** is an illustration of an exemplary mesh with trough formed with a plurality of upward protruding barriers.

FIGS. **5**A-B are illustrations of a mesh embodiment with a U-shaped trough.

FIG. **6**A is a side-view illustration of a mesh embodiment with a laterally oriented trough.

FIG. **6**B is a close-up illustration of a laterally oriented L-shaped trough.

FIG. **7** is an illustration of the embodiment of FIG. **6**A in a snowmelt situation.

FIGS. **8**A-B are illustrations of another embodiment wherein the trough has a laterally oriented relaxed L-shape.

FIG. **9** is an illustration of the embodiments of FIGS. **8**A-B in a snowmelt situation.

FIGS. **10**A-B are illustrations of another gutter cover embodiment not requiring the front and rear strip connectors.

FIG. **11** is an illustration of another gutter cover embodiment not requiring the front and rear strip connectors.

DETAILED DESCRIPTION

FIG. **1**A is a side perspective view **100** of an embodiment of a three piece gutter cover showing a rear strip connector **115** that goes to the roof (not shown), a front strip connector **125** that fastens to the front lip of a gutter (not shown) and a corrugated mesh **135** that spans between the rear strip connector **115** and the front strip connector **125**, via trough **145**. The mesh **135** in this embodiment is formed of a stainless steel material, but other weather resilient materials may be used. The mesh **135** is generally rectangular in shape having a longitudinal axis parallel to the gutter, so as to fit over the gutter. Most residential gutters being approximately 5 inches in width, and commercial gutters being up to 10 inches in width, the mesh **135** will be sized in most embodiments to be wide enough to cover the gutter, less the widths of the rear and front strip connectors **115**, **125**, if they are used.

Illustrated in FIG. **1**A are corrugations **112** in the mesh **135**, which can be of varying shapes, orientations, etc., but are of a configuration that provides sufficient rigidity in the mesh **135**, so that it can free-formingly span the gutter without collapsing in the gutter. These corrugations **112** do not have to be perpendicular to rear strip connector **115**. The corrugations do not have to be perpendicular to the front strip connector **125** in other exemplary embodiments.

FIGS. **1**B-C are illustrations of various meshes **135** with corrugations **112** that are formed with different diameter wires. For example, FIG. **1**B shows a 30 wires per linear inch corrugation **112**. FIG. **1**C shows a 50 wires per linear inch corrugation **112**. Of course, other wires per linear inch density (or metric equivalent) can be used, as well as perforations or other mechanisms for forming passageways in a material. FIGS. **1**B-C are demonstrative of exemplary commercial embodiments and are understood not to be limiting.

In the various embodiments described herein, the mesh's corrugations **112** can be patterned to be rectangular, square, of various shapes, etc., and oriented substantial orthogonal (perpendicular) to the orientation of the lip of the gutter. The perpendicular orientation provides for linear or planar stiffness along the roof-to gutter lip line, resulting in a self-supporting mesh. The mesh's corrugations can be formed from stamping the mesh, pressing the mesh, or weaving the mesh in a corrugated form, and so forth.

The connectors **115** and **125** are similar to the lower and upper strips described in published application US 20110056145, published on Mar. 10, 2011, which is incorporated herein by reference in its entirety.

The corrugations **112** formed in the mesh **135** are formed similar to the corrugations formed in the mesh in published application US 20110056145, published on Mar. 10, 2011, which is incorporated herein by reference in its entirety.

The mesh **135** provides the function of allowing water to pass into the gutter while precluding debris from passing into the gutter. This corrugated mesh **135** is preferably formed as a woven screen of stainless steel wire or other wire-thread of suitable material. Important characteristics of the material forming the mesh include sufficiently high strength and inelasticity to function structurally, as well as resistance to corrosion in the gutter environment. Furthermore, it is advantageous that material forming the corrugated mesh **135** can be readily bent sufficient to cause the material to be readily corrugated into one of a variety of different cross-sections and hold that configuration after being so bent. Most preferably, the wire forming the corrugated mesh **135** extends in a pattern with some threads extending parallel with an upper edge (extending substantially parallel to the roof, when in use) of the overall corrugated mesh **135** and some of the wire/thread extending perpendicular to the upper edge. In such a configuration, the corrugation can occur to create the crests and valleys with only the threads, which run parallel with the upper edge needing to be bent. In such a configuration the corrugating of the fine mesh material forming the corrugated mesh **135** can more readily occur and this material formulating the corrugated mesh can more readily maintain this corrugated configuration during installation and use.

The corrugations **112** in the corrugated mesh **135** preferably have an amplitude between crests and valleys between one-fourth and one-tenth of the length of the corrugated mesh **135** between the upper edge and a lower edge (extending substantially parallel to the gutter lip when in use) of the mesh **135** and similar to a width of the opening in the gutter. Preferably, the corrugations **112** are in a repeating pattern. This pattern is most preferably a sinusoidal pattern with a curving crest and curving valley. Other configurations can also be provided for the corrugated mesh **135**.

It should be apparent that the mesh may be of any material that is weather resistant, has apertures for drainage, and is of sufficient stiffness to bridge the gutter without the need for an auxiliary support. Therefore, the gutter cover can be constructed of other materials such as plastic, expanded metal, perforated metal, slotted metal or louvered metal slits, and so forth. Furthermore, the mesh, with its associated corrugations does not need to completely span the gutter. That is, the mesh's corrugations can be limited to certain portions, according to design preference, and may not need span the entirety of the gutter. For example, the trough may be corrugation free. It should also be apparent that the front strip connector and the rear strip connector can be formed from metal, plastic, or any other suitable material. As a matter of convention, the front strip connector may alternately be referred to as a gutter lip rail that is connected to the gutter lip side of the mesh, and the rear strip connector alternately referred to as a roof side rail that is connected to the roof side of the mesh.

It is understood that in various other embodiments, the trough **145** (shown in the various embodiments as adjacent to the front strip connector and parallel to the longitudinal axis), can be angled to the front strip connector as well as be oriented at an angle to the mesh's corrugations. Therefore, it is understood that mesh corrugation shapes can be modified as well as the trough's angles without departing from the spirit and scope of this disclosure. For example, the trough can have repeating angles, such as a zigzag, or turns, or smooth gradual turns and so forth, wherein the corrugations may conform to the frough angles.

In addition to assisting in stiffening the mesh, the corrugations may result in an non-smooth or uneven mesh surface, which naturally allows collected debris to dry quicker (due to separation between the debris and the mesh surface) and blow off more easily when there is ambient wind.

FIG. **2** is a semi-side cut-away illustration **200** of the embodiment of FIG. **1**A. As illustrated, when the mesh **235** connects to the back of the roof **210** and the gutter **220**, via strip connectors **215** and **225**, a natural downward slope in mesh **235** is created toward the front lip **230** of gutter **220**. The mesh **235** includes a plurality of corrugations **212**. Accordingly, when rainwater comes down the roof **210** and on top of mesh **235**, the rainwater naturally passes through the apertures in mesh **235** and a large portion thereof clings to the underside of mesh **235** without falling off. The lightweight and adhesive properties of rainwater allow it to cling to the underside of mesh **235**, wherein the slope of the mesh **235** causes rainwater to travel towards frough **245**. The bottom **265** of trough **245** is designed to be lower than the front lip **230** of gutter **220**, thereby creating a barrier that deflects the underside rainwater down into the gutter **220**. The arrangement of this "creased" structure prevents rainwater from running off the front of the gutter **220**.

In various embodiments, it has been discovered that the cross sectional "crease" forming trough **245** also can operate to increase the structural integrity of the surface area of the mesh **235** over the gutter **220**. It is understood for a large spanning mesh **235**, the placement of trough **245** in the middle of mesh **235** may lessen its ability to independently support mesh **235**. For example, if the mesh **235** is composed of a steel mesh having a wire diameter that is less than 0.01" thick, with a weave count of more than 32 wires per linear inch (See FIGS. **1**B-C, for example), then placement of the trough **245** in the middle of mesh **235** will be insufficient to adequately stiffen the gutter spanning mesh **235** to be self-supporting over gutter **220**.

If the wire diameter decreases, then the wire count per inch increases—this will make the mesh **235** less stiff and unable to sustain itself over a gutter **220** when a cross sectional crease (e.g., trough **245** or similar trough) is formed. For wire diameters that are between 0.009" and 0.01" (thicker wire applied to the lessor wire count per inch), with wire counts of 32 to 60 per inch, the trough **245** can be displaced from the front strip connector **215** by up to 1.5."

For wire diameters that are between 0.007" and 0.089," with wire counts of 36 to 56 per inch, the trough **245** can be placed up to 0.75"' from the front strip connector **225**. For wire diameters that are between 0.005" and 0.069," with wire counts of 40 to 50 per inch, the trough **245** can be placed up to 0.25" from the front strip cormector **225**.

However, the trough **245** could be formed on the mesh **235** between the rear and front strip connectors (**215** and **225**) on a standard 5 inch gutter top opening, if the wire diameter is between 0.011" and 0.015" and the wire count is between 20 and 31 per inch. If a lower wire count per inch of between 10 and 19 is needed, then the wire diameter would need to be between 0.016" and 0.02." However, with the wider mesh hole openings, as in the latter example, pine needles and small leafy debris may penetrate into the mesh **235** and into the gutter **220**, potentially clogging the gutter **220** to cause rainwater to spill out of the gutter **220**. Accordingly, while a lower wire count per inch for mesh **235**, such as 20 wires per inch or less, can be used, it will be less effective in debris preclusion.

Having the mesh-clinging rainwater drop in to the middle of the gutter **220** rather than near the front lip **230** of the gutter **220** reduces the possibility that rainwater will run out of the gutter **220**. However, because a higher wire count per inch functions to keep out leaves, pine needles and roof sand grit, etc. from entering the gutter **220**, the mesh **235** will be stiffer and accordingly trough **245** can be close to or adjacent to the front strip connector **225**.

The trough **245** can be, for example, V-shaped to provide stability, strength and rigidity for supporting the back bend **246** of the trough **245**, as shown in FIG. **2** where the trough **245** is adjacent to the front strip connector **225**. The front strip connector **225** can act as additional support for the trough **245** when adjacent to each other. It is important for the bend **246** along the length of the mesh **235** (nearly adjacent to the front strip connector **225**) to be sufficiently rigid so as to sustain the span of the mesh **235** to rear strip connector **215**. Another reason for the needed strength and support along bend **246** is if the mesh **235** ever becomes weighted down with leaves, pine needles, roof sand grit or snow and ice. The added strength prevents or reduces the possibility of the mesh **235** collapsing into the gutter **220**.

The corrugations **212** on the mesh **235** of this embodiment 200, include at least one corrugation **213** that extends from an upper edge of the mesh **235** (near connector **215**) into a portion of the trough **245**. The corrugation **213** does not extend all the way through the through **245** to the lower edge of the mesh **235** (near connector **225**). The corrugations **212** further include at least one corrugation **214** that extends from the lower edge of the mesh **235** through the trough **245**. The corrugation **214** in this embodiment does not extend all the across the surface of the mesh **235** to the upper edge. In other exemplary embodiments, the corrugations do not extend into the trough.

As shown in the cross-sectional illustration of FIG. **3**A, the trough **345** can be composed of multiple troughs, the additional trough **375** appearing along the lower side of the mesh **335**. The rationale for additional troughs is to provide more barriers, which act to divert higher flows of rainwater into the gutter **320**. It is understood that higher flows of rainfall could potentially pass through a single barrier, which can arise from severe weather storms or from larger surface areas of a house roof where rainwater has accumulated in a roof valley and channeled to the inside corner of a covered gutter It is understood that the mesh **335** that is running adjacent to the front strip connector **325** can be formed into a variety of different shapes. It is further understood that the mesh **335** includes corrugations, not shown, that extend at least partially through the trough **375**.

FIG. **3**B is a cross-sectional, close up illustration of an exemplary trough **375**, with V-shape formed from three bends **381**, **383**, and **385**; and is illustrative of how rainwater typically travels along the mesh **335** into the trough **375**. Rainwater generally will travel under the mesh **335** and when encountering the barrier forming side/surface of the V-shaped trough **375**, travels down and eventually drops off from the end E of bend **383**, which forms the low point of trough **375**. In some instances, rainwater will flow on the top of mesh **335** and flowing over bend **385** encounter side/surface G, which diverts the water into the bottom of trough **375**. The entering water will drain through the apertures in surfaces Hand G, into the gutter (not shown).

Understanding that additional and/or varied shaped troughs can also be formed, FIG. **4** is an illustration **400** of mesh **435** with trough **445** formed with a plurality of upward protruding barriers **475** and **485**. In some embodiments, combinations of the froughs shown in FIGS. **2** and **3**A may be utilized, as well as other shaped troughs. Accordingly, trough **445** can be an inverted V, U, laterally oriented L, or laterally oriented relaxed L shape, for example. It is further understood that the mesh **435** includes corrugations, not shown, that extend at least partially through the trough **445**. FIGS. **5**A-B are illustrations of an embodiment of a mesh **535** with a U-shaped trough **545**, described here as having four bends **581**, **583**, **584** and **585**. The principal rainwater barrier is formed by surface H, which forces under-mesh traveling water towards bends **583** and **584**, which forms the lowest points of trough **545**. The ensuing water can penetrate through surface H into drain through to neighboring surface G, or be diverted by surface H down towards bends **583** and **584**, and fall into the gutter **520**. It is further understood that the mesh **535** includes corrugations, not shown, that extend at least partially through the trough **545**.

FIGS. **5**A-B are illustrations of an embodiment of a mesh **535** with a U-shaped trough **545**, described here as having four bends **581**, **583**, **584** and **585**. The principal rainwater barrier is formed by surface H, which forces under-mesh traveling water towards bends **583** and **584**, which forms the lowest points of trough **545**. The ensuing water can penetrate through surface H to drain through to neighboring surface G, or be diverted by surface H down towards bends **583** and **584**, and fall into the gutter **520**. It is further understood that the mesh **535** includes corrugations, not shown, that extend at least partially through the trough **545**.

It should be apparent that the V-shaped troughs in FIGS. **2-4** and the U-shaped trough(s) in FIGS. **5**A-B only require a minimum of three bends in the mesh for the V-shape and four bends for the U-shape to form their shapes. The wall barrier formed by surface H in FIG. **5**B has a unique feature in that if it is formed anywhere in the open surface area of mesh **535**, even along the longitudinal midline axis of the gutter (e.g., further away from the front strip connector **525**), the mesh **535** will retain a significant amount of its rigidity. Therefore, mesh **535** will be less likely to collapse in the gutter **520** from the weight of leaves, pine needles, roof sand, grit or snow and ice. This "supportability" is due to the fact that when downward pressure is applied to either sides of mesh **535**, from debris, etc., bends **581** and **585** will push against each other to stiffen against further downward movement in mesh **535**.

FIG. **6**A is a side-view illustration of a mesh **635** embodiment with a laterally oriented L-shaped trough **645**. The mesh **635** covers gutter **620** and is attached to the gutter's front and rear ends via rear strip connector **615** and front strip connector **625**. The void formed by the trough **645** operates to provide a debris collection area **655**. It is further understood that the mesh **635** includes corrugations **610** that extend at least partially through the trough **645**. It is further understood that the mesh **635** includes corrugations, not shown, that extend at least partially through the trough **645**.

FIG. **6**B is a close-up illustration of laterally oriented L-shaped trough **645**, showing only two bends **681** and **683** in mesh **635**, to form the trough **645**. Two bends **681** and **683** create a firmer support structure of the surface area of the mesh **635** than with three displaced bends, the exception perhaps being the embodiment of FIGS. **5**A-B, where the three bends are in close proximity to each other. Under-mesh **645** traveling rainwater will travel to bend **683**, which form the lowest point of mesh **645**, and drop into the gutter **620**. Surface G operates as a dam against onrushing water and a collection area for debris, allowing accumulating water to drain through the respective apertures in the mesh **645**.

FIG. **7** is an illustration of the embodiment of FIG. **6**A in a snowmelt situation. Snow **705** accumulating on the roof shingles/surface **710** will melt to form snowmelt **707** over mesh **735** traveling towards the trough **745**, which is connected to front strip connector **725**. Water melting from snowmelt **707** penetrates the mesh **735** and travels under the mesh **735** to trough **745**. The lowest point of the trough **745** (bend **683** in FIG. **6**B) acts as the drip point, causing the water to drop **709** into the gutter **720**. It is further understood that the mesh **735** includes corrugations **710** that extend at least partially through the trough **745**. It is further understood that the mesh **735** includes corrugations, not shown, that extend at least partially through the trough **745**.

FIGS. **8**A-B are illustrations of another embodiment wherein the trough **845** has a laterally oriented relaxed L-shape for accommodating debris, shown here as the debris collection area **855**. FIG. **8**A illustrates the mesh **835** attached to the gutter/roof via strip connectors **815** and **825**. Noticeable is that an angle of the plane of the mesh section-to-gutter strip connector **825** is different than the angle of the plane of the mesh section-to-roof strip connector **815**, forming an offset occupied by the trough **845**. Trough **845** is disposed in the mesh **835** proximal to the front strip connector **825**, which is attached to the gutter **820**. The trough **845** is formed from two bends **881** and **883** in the mesh **845**, however, the surface G between the two bends **881** and **883** is less vertical than in the embodiments shown in FIGS. **6**A-B. The "less than vertical" orientation results in a "softer" or not as steep of a slope for the barrier or surface G to accumulated debris in the trough **845**. That is, since the surface G is sloped, the debris will likely blow off of the gutter cover more easily than in the embodiment shown in FIGS. **6**A-B It is further understood that the mesh **835** includes corrugations **810** that extend at least partially through the trough **845**. It is further understood that the mesh **835** includes corrugations, not shown, that extend at least partially through the trough **845**.

FIG. **9** is an illustration of the embodiments of FIGS. **8**A-B in a snowmelt situation. Snow **905** accumulating on the roof shingle surface **910** will melt to form snowmelt **907** over mesh **935** traveling towards the trough **945**, which is connected to front strip connector **925**. Water melting from snowmelt **907** penetrates the mesh **935** and travels under the mesh **935** to trough **945**. The lowest point of the trough **945** (bend **883** in FIG. **7**B) acts as the drip point, causing the water to drop **909** into the gutter **920**. It is further understood that the mesh **935** includes corrugations, not shown, that extend at least partially through the trough **945**.

Both trough designs shown in FIGS. **8** and **9** provide a feature that significantly reduces potential snowmelt runoff over the gutter cover and unto the ground. To fully appreciate the snowmelt feature, an understanding of the snowmelt runoff problem is necessary. When a permeable mesh type gutter cover material is not exposed to rain or snow, but there is snow on top of the roof, when the snow begins to melt it can drip off the edge of the gutter cover and the gutter. This problem is mainly seen in the micro-mesh type gutter covers with hole openings less than 0.125" square.

The reason the snowmelt exits over the side of a mesh gutter cover is because the mesh is not wet since there is no rain. Moreover, it is possible the mesh is frozen, preventing penetration of the snowmelt into the mesh. In either instance, the snowmelt coming down the roof tends to not penetrate the permeable mesh material and consequently runs along the top of the mesh and then over the front of the gutter. It should be understood that snowmelt can occur in below freezing weather, wherein the roof under the snow is warmed by the home's heat, causing the snowmelt.

In contrast, when it is raining (which means the temperature is above freezing), snowmelt will come off the roof and with the mesh wet from the rain, the snowmelt will drop through the mesh and into the gutter. The warming rain droplets striking any snowmelt on the mesh will also help force the snowmelt through the mesh.

Because of the snowmelt issue, the downward trough designs illustrated in FIGS. **7** and **9** incorporate the barrier formed by surface G, which provides a permeable mesh wall that the melted snow can penetrate through. Typically, when snowmelt travels down the roof and onto the mesh of FIGS. **7** and **9**, it can travel between 3 and 10 miles per hour, depending on the steepness angle of the roof, when the snowmelt hits the surface G, its momentum can force the snowmelt through the apertures of surface G and drop down into the gutter. When the debris collection area **655**, **855** has no debris sitting in it, the functionality and purpose of the downward sides of surface G are greatly enhanced.

FIGS. **10**A-B are illustrations of another gutter cover embodiment, wherein either one or more or the front and rear strip connectors is not utilized. For example, the front of mesh **1035**, having trough **1045**, can be fastened to the front lip **1027** of the gutter **1020** and the rear of the mesh **1035** can be laid on the back lip of the gutter **1020**, without the need of fastening it to any strip connector. In this scenario, the front lip **1027** of the gutter **1020** acts like a front connector support to hold up the surface area of the mesh **1035** when a screw (not shown) is fastened through the top end portion **1037** of the mesh **1035** and through the gutter's top ridge **1029**. The screw can be placed through any section of the top ridge **1029** however typically is fastened along the dimensional line **1040**. To further create additional support, the mesh **1035** can be folded into a flap **1039**, which provides additional strength on the mesh **1035** screwed to the gutter **1020**. It is further understood that the mesh **1035** includes corrugations, not shown, that extend at least partially through the trough **1045**.

While FIG. **10**B shows a single fold, additional folds can be implemented for greater strength and support. In this embodiment, the trough **1045** is adjacent to the front lip **1027** of the gutter **1020**. As stated earlier, in various other embodiments, the trough **1045** may be disposed at an arbitrary distance from the front of the gutter **1020**.

Also, in various embodiments, the trough(s) shown may be composed of the mesh material with or without corrugations. That is, one or more of the trough surfaces H and/or G (seen in FIG. **3**A or **3**B) may be non-corrugated. For example, the mesh "corrugations" could begin from the rear strip connector and continue to the second bend in the trough, or stop at the first bend and resume from the second bend. In other embodiments, as seen in FIGS. **6**B and **8**B, because there is sufficient strength in the mesh on the surface G, due to being supported by the front strip connector, the mesh corrugations could go from the rear strip connector and stop at the second bend. It should be understood that the term corrugation can be interpreted as a structure that provides apertures for drainage, such as aperforation, slot, slit, overlaying wires with gaps, and so forth in the respective gutter cover.

FIG. **11** is a semi-side cut-away illustration **1100** of the embodiment of FIG. **1**A. As illustrated, when the mesh **1135** connects to the back of the roof **1110** and the gutter **1120**, via strip connectors **1115** and **1125**, a natural downward slope in mesh **1135** is created toward the front lip **1130** of gutter **1120**. This embodiment is similar to the embodiment of FIG. **2**, in that it includes a trough **1145** having surfaces G and H, along with the end point E. The device **1100** also has corrugation **1113**, which extends into the trough **245** and corrugation **1114**, which does not extend all the way to the top end of the mesh near connector **1115**. A difference with the present embodiment is that the corrugations **1112** extend in a non-perpendicular direction relative to the gutter lip **1130**.

Whereas in the embodiment shown in FIG. **2**, the corrugations are substantially perpendicular to the gutter lip. It should be appreciated that in other exemplary embodiments, the corrugations extend along the mesh in a variety of manners. Still further, in other embodiments, the corrugations extend along the mesh in differing angles relative to the gutter lip or the strip connector.

The present disclosure is not to be limited in terms of the particular embodiments described in this application, which are intended as illustrations of various aspects. Many modifications and variations can be made without departing from its scope, as will be apparent to those skilled in the art. Functionally equivalent methods and apparatuses within the scope of the disclosure, in addition to those enumerated herein, will be apparent to those skilled in the art from the foregoing descriptions. Such modifications and variations are intended to fall within the scope of the appended claims. The present disclosure is to be limited only by the terms of the appended claims, along with the full scope of equivalents to which such claims are entitled. It is to be understood that this disclosure is not limited to particular methods, implementations, and realizations, which can, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting.

With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations may be expressly set forth herein for sake of clarity.

While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope being indicated by the following claims.

What is claimed is:

1. A gutter debris preclusion device for securing to a top portion of a gutter that is attached to a building, comprising:

a mesh with corrugations having a roof side, a gutter lip side, and at least one trough with corrugations, wherein the mesh is configured to substantially cover a gutter when the device is installed over the gutter, and one or more troughs of the at least one trough is disposed proximal to and parallel to the gutter lip side; and

a gutter lip end of the mesh a gutter lip rail attached to the gutter lip side of the mesh.

2. The device of claim **1**, wherein the mesh is formed from stainless steel wires, plastic, expanded metal, perforated metal, slotted metal or louvered metal.

3. The device of claim **1**, wherein the corrugations in the mesh are configured to provide a planar stiffness to the mesh causing the mesh to be self-supporting over the gutter.

4. The device of claim **1**, wherein the corrugations in the mesh are formed via at least one of stamping, pressing, and weaving.

5. The device of claim **1**, wherein a trough of the at least one trough is displaced up to 1.5" from the gutter lip rail.

6. The device of claim **1**, wherein a trough of the at least one trough is displaced up to 0.25" from the gutter lip rail.

7. The device of claim **1**, further comprising a second trough disposed in the mesh along a longitudinal axis of the of mesh.

8. The device of claim **1**, wherein a trough of the at least one trough is disposed adjacent to the gutter lip side.

9. The device of claim **1**, further comprising a roof rail attached to the roof side of the mesh.

10. The device of claim **1**, wherein a bottom of a trough of the at least one trough is below in elevation from a top of the gutter lip rail.

11. The of claim **1**, wherein a trough of the at least one trough has a gutter lip side wall inclined in a direction towards the gutter lip rail and has a roof side wall joined to a bottom of the gutter lip side wall and inclined at an angle greater than 90 degrees from the gutter lip side wall, wherein the roof side wall is longer than the gutter lip side wall.

12. The device of claim **11**, wherein the gutter lip side wall is proximal to the gutter lip rail.

13. The device of claim **1**, wherein a cross-section of the at least one trough is U-shaped.

14. The device of claim **1**, wherein a cross-section of the at least one trough is partially U-shaped.

15. A gutter debris preclusion device for securing to a top portion of a gutter that is attached to a building, comprising:

a mesh having apertures, corrugations, a roof side, a gutter lip side, a gutter lip portion, and a water dam with corrugations disposed proximal to and parallel to the gutter lip portion, wherein the mesh is configured to substantially cover a gutter when the device is in use; and

a gutter lip rail attached to the gutter lip portion.

16. The device of claim **15**, wherein the water dam is formed from a first and second wall, joined at a bottom, wherein the bottom is below the gutter lip rail when the device is in use.

17. The device of claim **15**, further comprising a plurality of water dams.

18. The device of claim **16**, wherein at least one of the first and second wall is curved.

19. The device of claim **16**, wherein the joined walls form a contiguous curved shape.

20. The device of claim **16**, wherein a top portion of the first wall is connected to a gutter lip.

21. The device of claim **16**, further comprising a roof side rail attached to the roof side.

22. A gutter debris preclusion device for securing to a top portion of a gutter that is attached to a building, comprising:

a mesh having apertures, corrugations, a roof side, a gutter lip side, and a gutter lip portion terminating the gutter lip side, wherein the mesh is sized to substantially cover a gutter;

wherein a first plane of the gutter lip side is different from a second plane of the roof side, forming at least one offset between the first and second planes, the at least one offset being bridged by one or more third planes of the mesh; and

wherein a roof side end of the one or more third planes of the mesh being lower than a gutter lip side end of the one or more third planes of the mesh.

23. The device of claim **22**, wherein a width spanned by the first plane is less than a width spanned by the second plane.

24. The device of claim **22**, wherein a depth of the at least one offset operates as a water reservoir.

25. The device of claim **22**, wherein the corrugations are disposed in the second plane.

26. The device of claim **22**, wherein the corrugations are disposed in the one or more third planes.

27. The device of claim **22**, wherein a cross-section of the at least one offset is curved in shape.

28. A gutter debris preclusion device for securing to a top portion of a gutter attached to a building, comprising:

a water permeable mesh having corrugations, a roof side, a gutter lip portion, and a trough disposed parallel to and proximal to the gutter lip portion, wherein the mesh is sized to substantially cover a prospective gutter attached to a prospective building, wherein the trough has a longer first wall extending towards the roof side and a shorter second wall extending towards the gutter lip portion, wherein a shape of the longer first wall and shortrer second wall form a 2-sided reservoir, and wherein a bottom point of the reservoir is lower than the gutter lip portion; and

a gutter lip attachment member coupled to the gutter lip portion.

29. The device of claim **28**, wherein an angle between the longer first wall and shorter second wall is greater than 90 degrees.

30. The device of claim **28**, wherein an angle between the longer first wall and shorter second wall is less than 90 degrees.

31. The device of claim **28**, wherein the mesh is formed from stainless steel wires, plastic, expanded metal, perforated metal, slotted metal or louvered metal.

32. The device of claim **28**, further comprising a roof strip connector adapted to connect the roof side to either a rear of the gutter or a roof element neighboring the gutter.

33. The device of claim **28**, wherein at least one of the first and second walls contains another angled bend to form a segmented or a curved reservoir bottom.

* * * * *