US012392455B2

(12) **United States Patent**
Dietze, Jr. et al.

(10) **Patent No.: US 12,392,455 B2**
(45) **Date of Patent: Aug. 19, 2025**

(54) **SYSTEM FOR TRANSPORTING NON-NEWTONIAN MATERIALS USING ACOUSTIC SOFTENING OVER LONG DISTANCES**

(71) Applicant: **GM GLOBAL TECHNOLOGY OPERATIONS LLC**, Detroit, MI (US)

(72) Inventors: **Robert H. Dietze, Jr.**, Brighton, MI (US); **Christopher Brady**, Madison Heights, MI (US); **Dmitriy Bruder**, Clinton Township, MI (US); **Megan E. McGovern**, Detroit, MI (US); **Robin James**, Rochester Hills, MI (US); **Ryan Gergely**, Fraser, MI (US)

(73) Assignee: **GM GLOBAL TECHNOLOGY OPERATIONS LLC**, Detroit, MI (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 230 days.

(21) Appl. No.: **18/134,664**

(22) Filed: **Apr. 14, 2023**

(65) **Prior Publication Data**

US 2024/0344668 A1 Oct. 17, 2024

(51) **Int. Cl.**
F17D 1/14 (2006.01)

(52) **U.S. Cl.**
CPC *F17D 1/14* (2013.01)

(58) **Field of Classification Search**
CPC F17D 1/14
USPC 137/828
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,649,358 A * 3/1972 Johnson, II B01J 19/10 118/259
3,746,027 A * 7/1973 Elliott F17D 1/14 137/268
4,941,346 A 7/1990 Suzuki et al.
5,690,145 A * 11/1997 Kuklinski F15C 1/04 181/0.5
5,797,414 A * 8/1998 Sirovich F15D 1/003 137/833

(Continued)

FOREIGN PATENT DOCUMENTS

DE 19813975 A1 9/1999
JP 2004012149 A 1/2004
KR 20140050438 A * 4/2014 .... F16L 3/205

OTHER PUBLICATIONS

Translation of KR 201440050438 (Year: 2014).*

(Continued)

Primary Examiner — Umashankar Venkatesan

(57) **ABSTRACT**

A system for transporting a non-Newtonian material. The system includes a storage container configured to store the non-Newtonian material and a dispensing system configured to dispense the non-Newtonian material. A conduit connects the storage container to the dispensing system. The conduit is configured to transport the non-Newtonian material from the storage container to the dispensing system. A pump is configured to pump the non-Newtonian material out of the storage container and through the conduit to the dispensing system. A hanger is configured to support the conduit from a support structure. An acoustic wave generator is along the conduit configured to impart acoustical shear agitation to the non-Newtonian material to reduce viscosity of the non-Newtonian material.

15 Claims, 4 Drawing Sheets

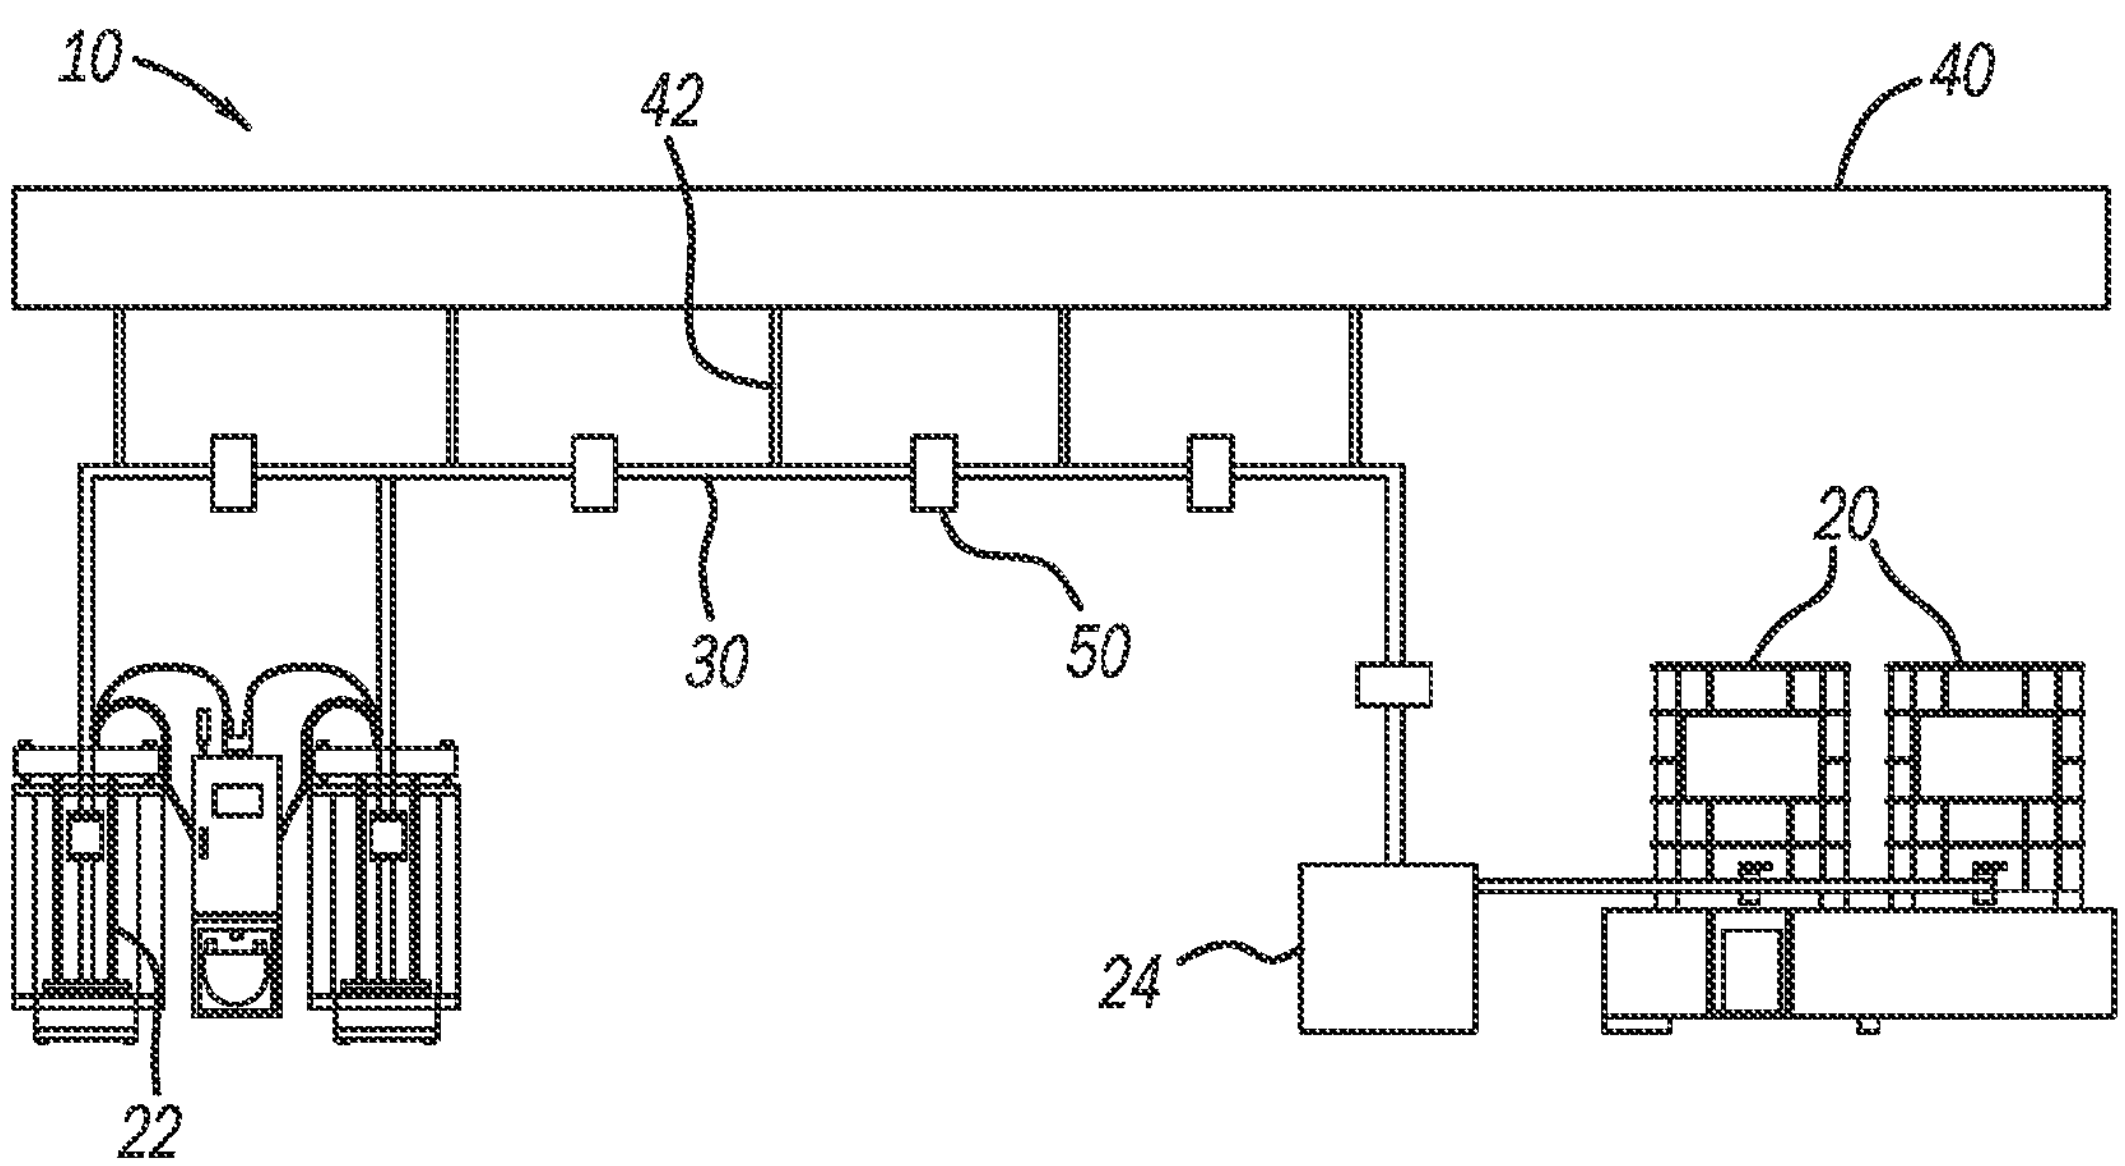

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,884,650	A *	3/1999	Ruffa	F16L 57/00	137/13
6,026,839	A *	2/2000	Kriebel	F16L 53/32	137/340
8,396,676	B2	3/2013	Zozulya et al.		
11,358,328	B2 *	6/2022	Okonski	B29C 64/165	
11,740,206	B2 *	8/2023	Giurgiutiu	G01N 29/0645	73/596
11,982,660	B2 *	5/2024	Ardanese	G01N 33/0036	
12,098,990	B2	9/2024	Jhe et al.		
2007/0084272	A1	4/2007	Wang		
2015/0052981	A1 *	2/2015	Kim	G01N 29/032	73/54.41
2020/0166444	A1 *	5/2020	Anklin	G01N 11/16	
2023/0364633	A1	11/2023	Dietz, Jr. et al.		
2024/0344668	A1	10/2024	Dietze, Jr. et al.		

OTHER PUBLICATIONS

Material Safety Sheet for EA 1800EV A; Revision No. 001.0; Issue date: Nov. 3, 2020; 5 Pages.

Material Safety Sheet for EA 1800EV B; Revision No. 001.0; Issue date: Nov. 3, 2020; 5 Pages.

Safety Data Sheet according to (EC) No. 1907/2006 as amended for Loctite TLB 9200 APS Part A. Revision: Jun. 24, 2021; 9 Pages.

Safety Data Sheet according to (EC) No. 1907/2006 as amended for Loctite TLB 9200 APS Part B. Revision: Jun. 24, 2021; 16 Pages.

U.S. Appl. No. 17/743,199, filed May 12, 2022, Robert H. Dietze.

U.S. Appl. No. 18/084,091, filed Dec. 19, 2022, Dmitriy Bruder.

* cited by examiner

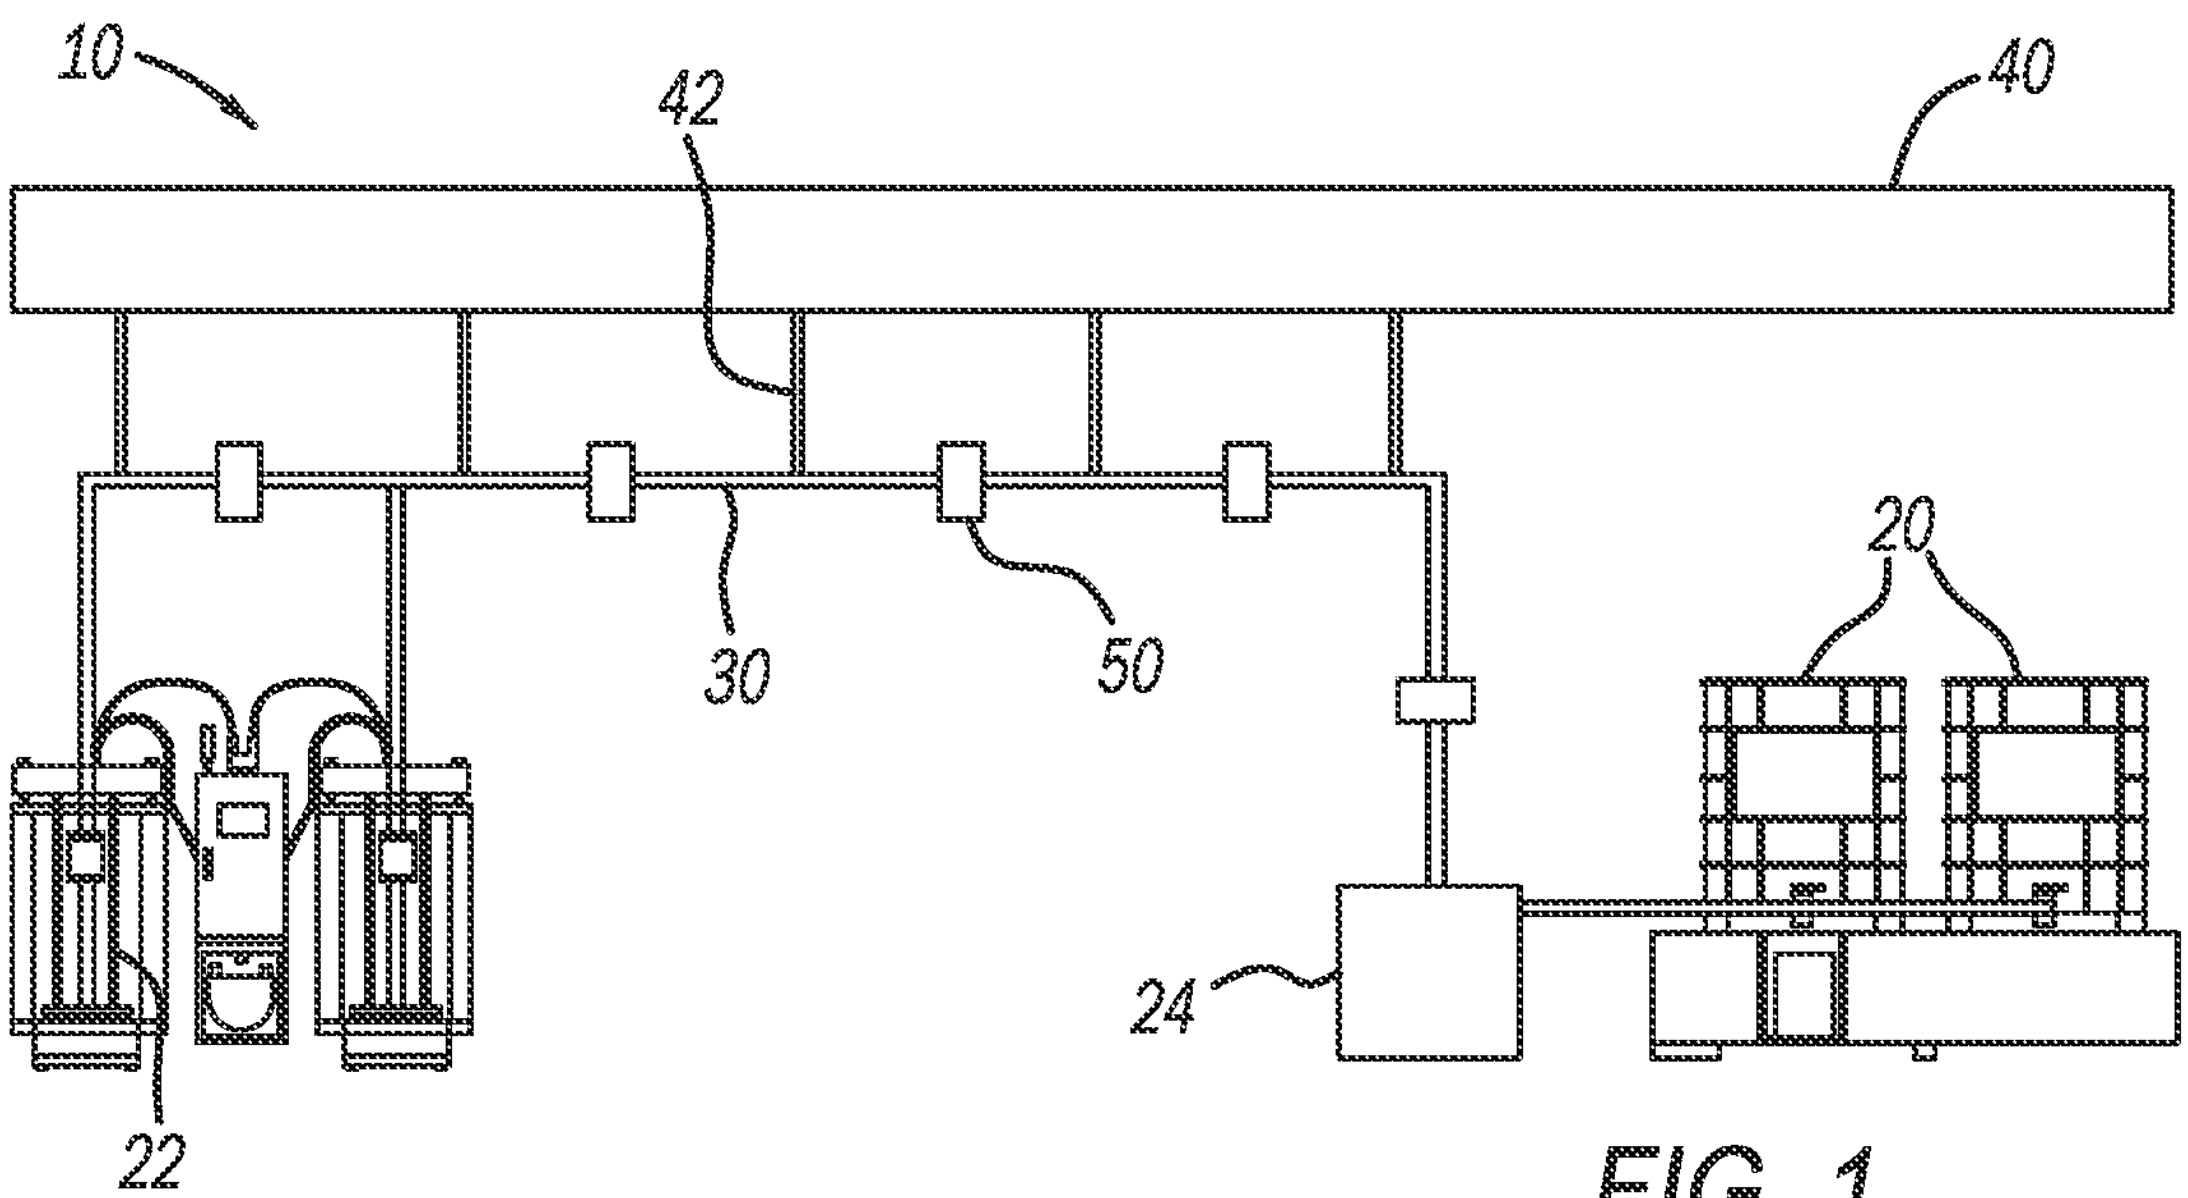

FIG. 1

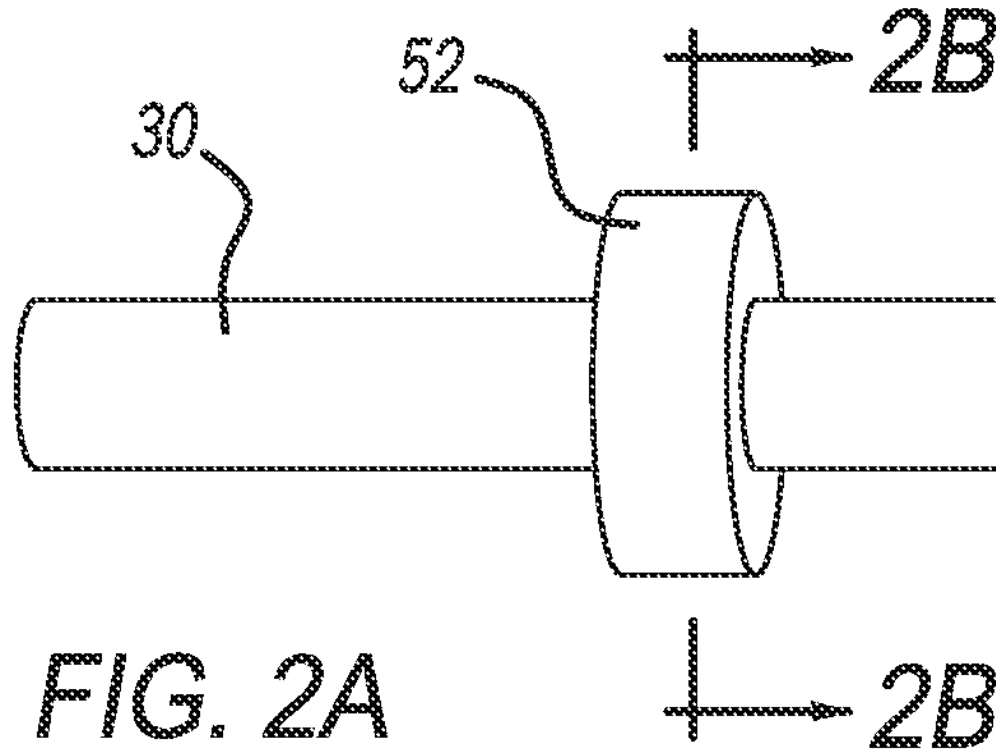

FIG. 2A

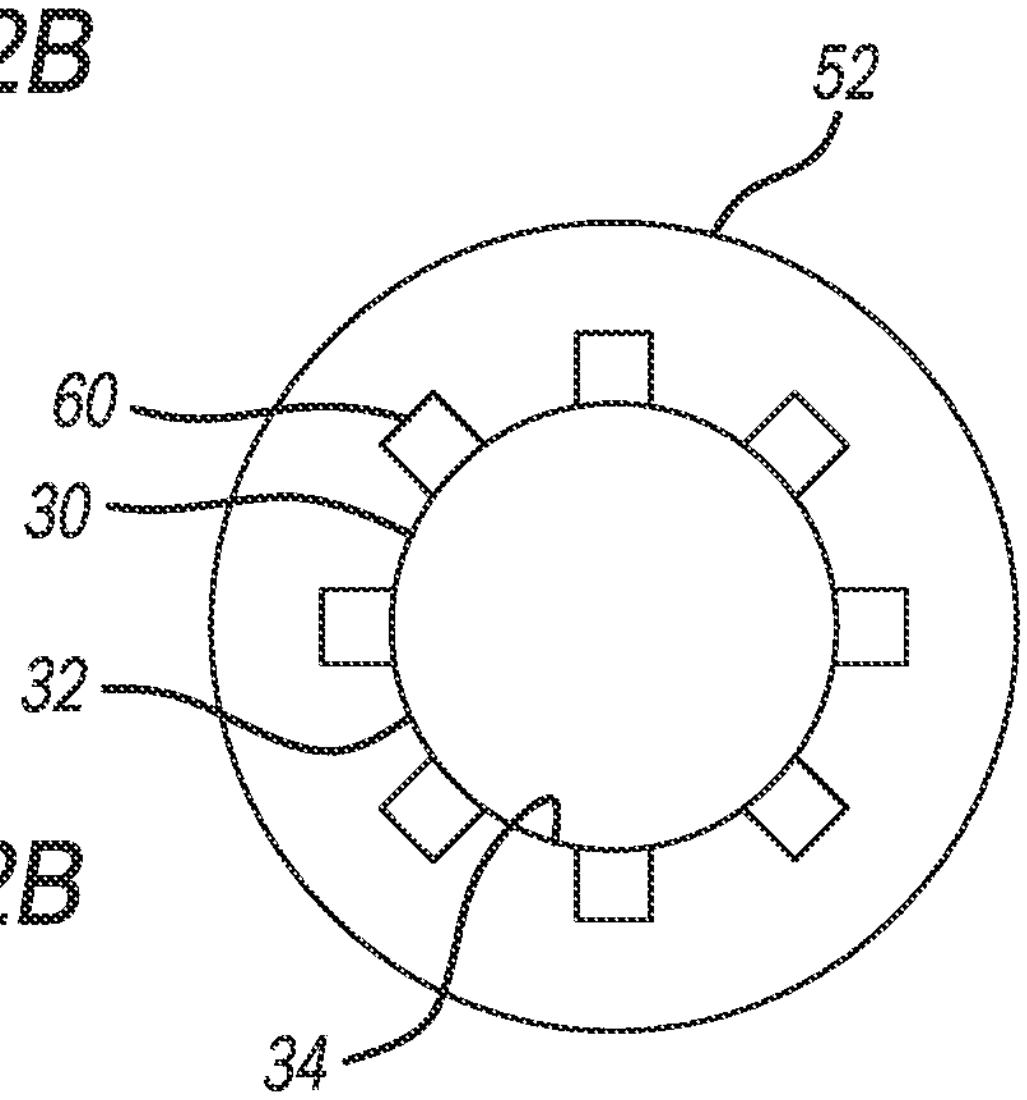

FIG. 2B

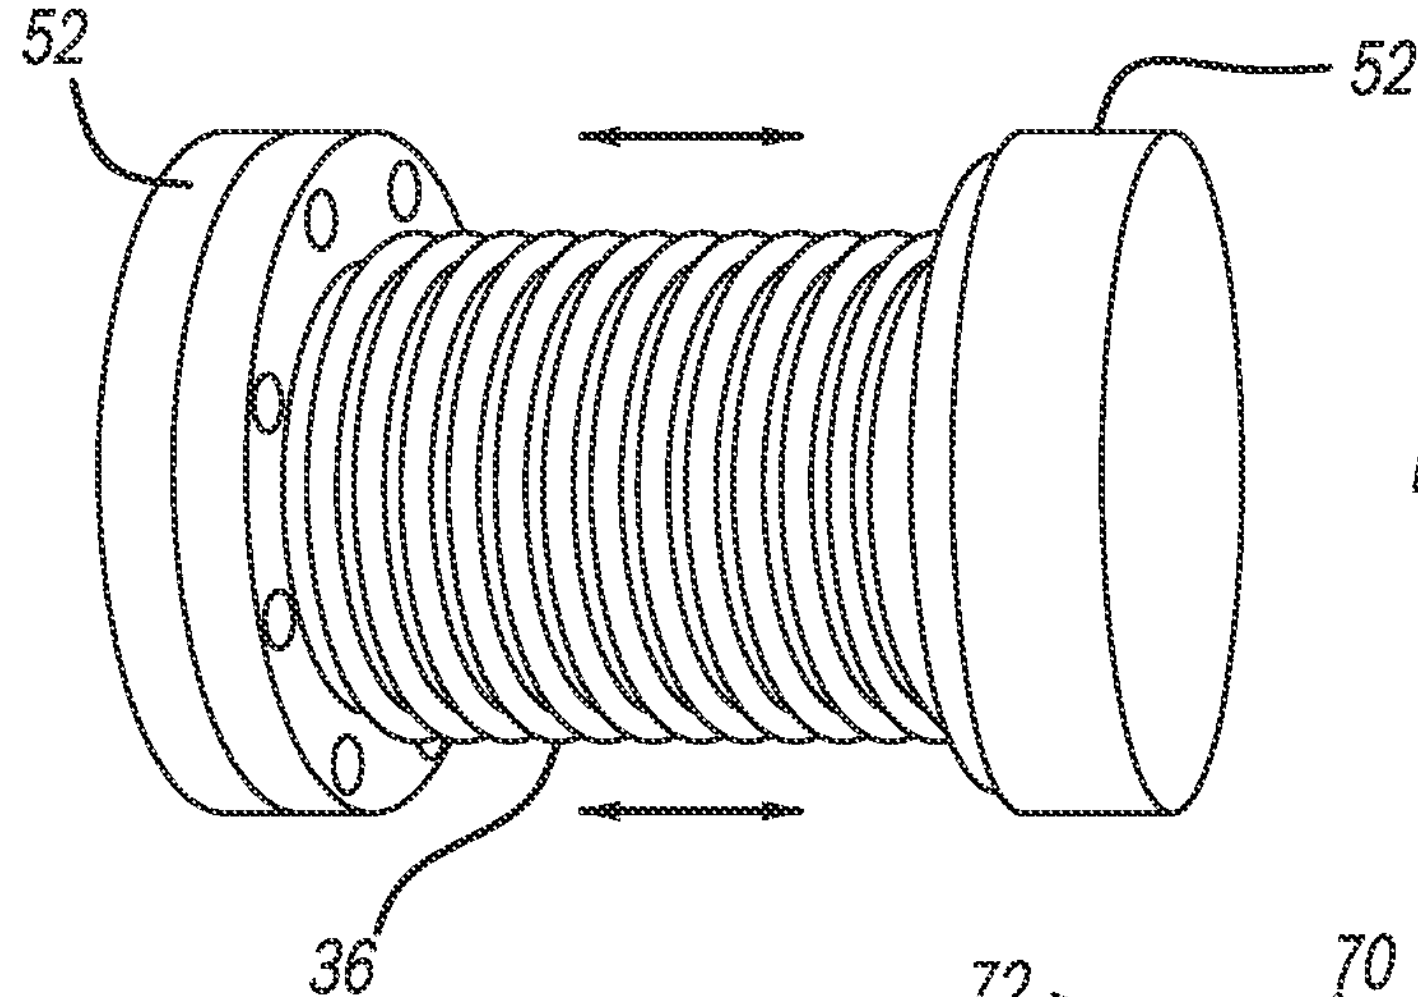

FIG. 3

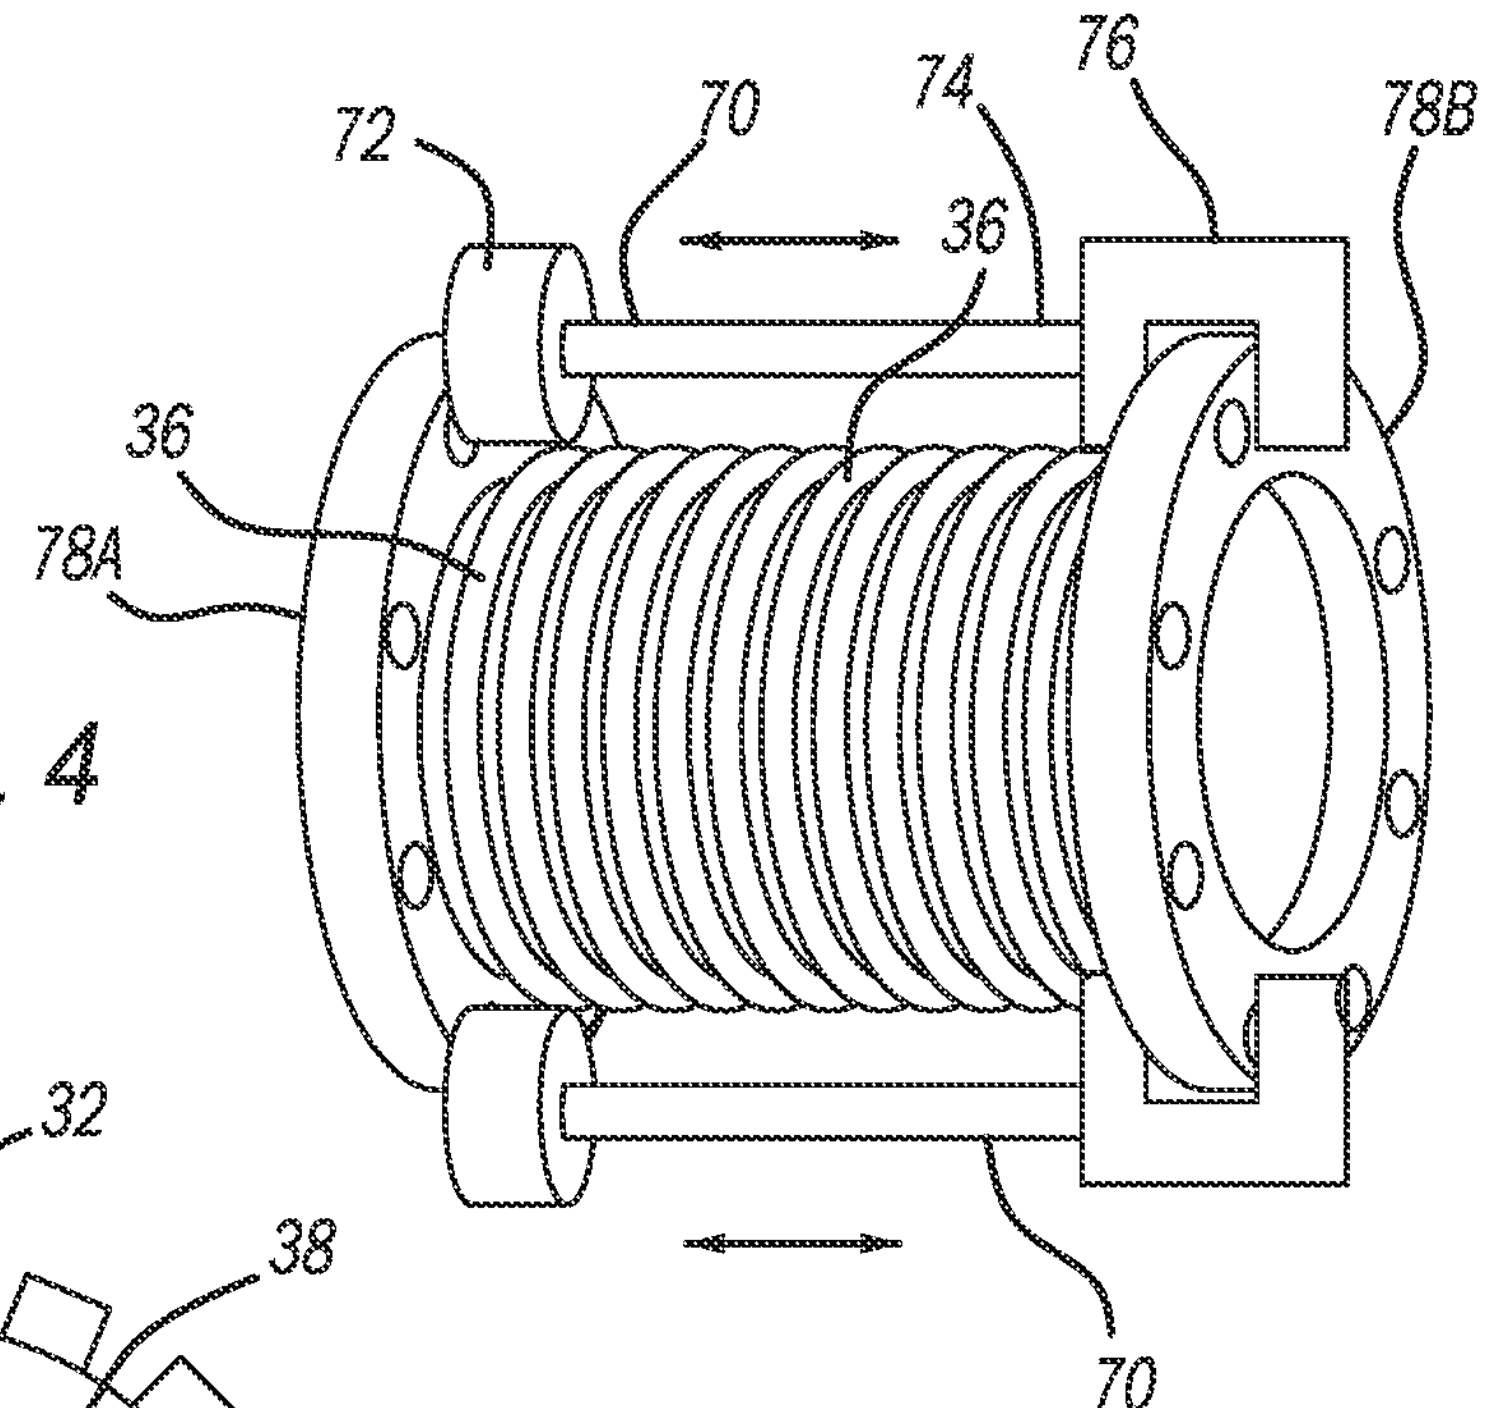

FIG. 4

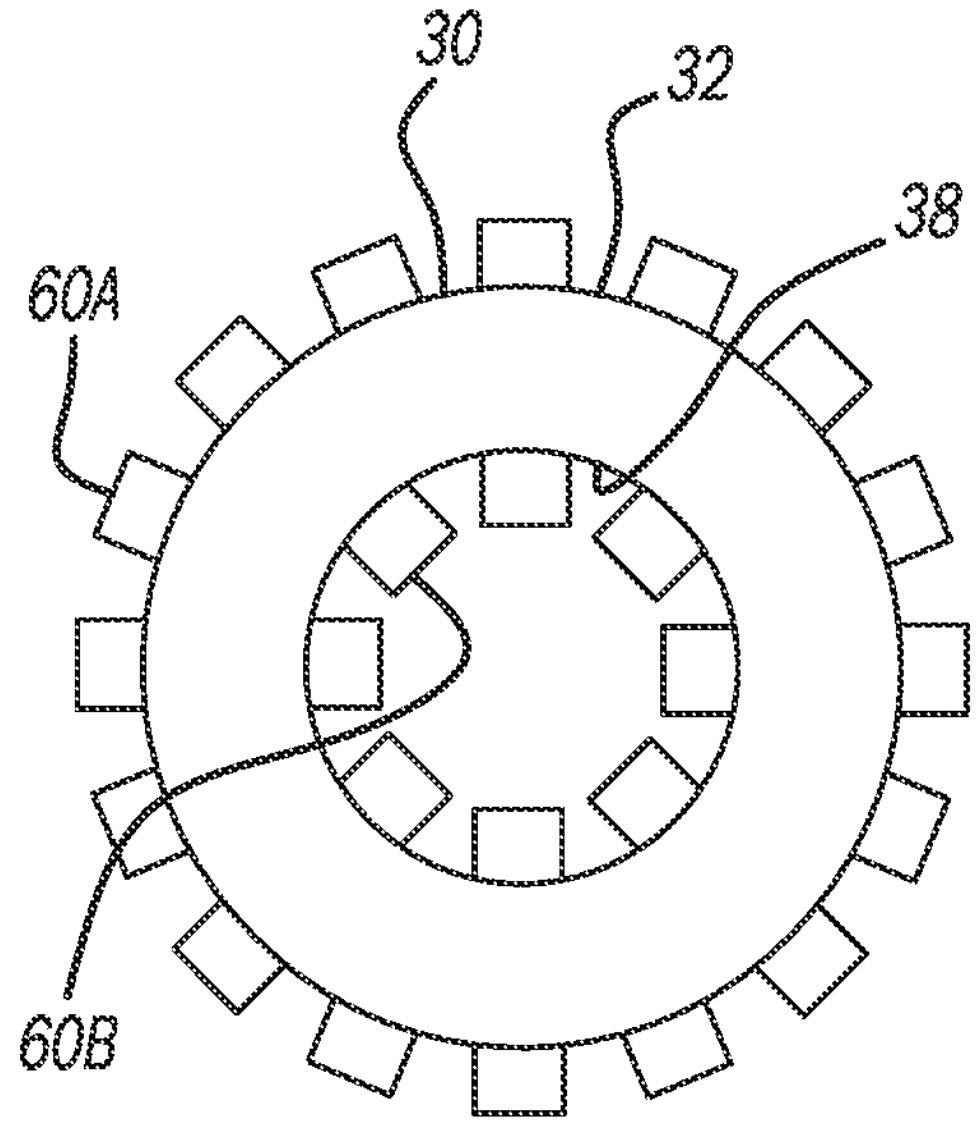

FIG. 5A

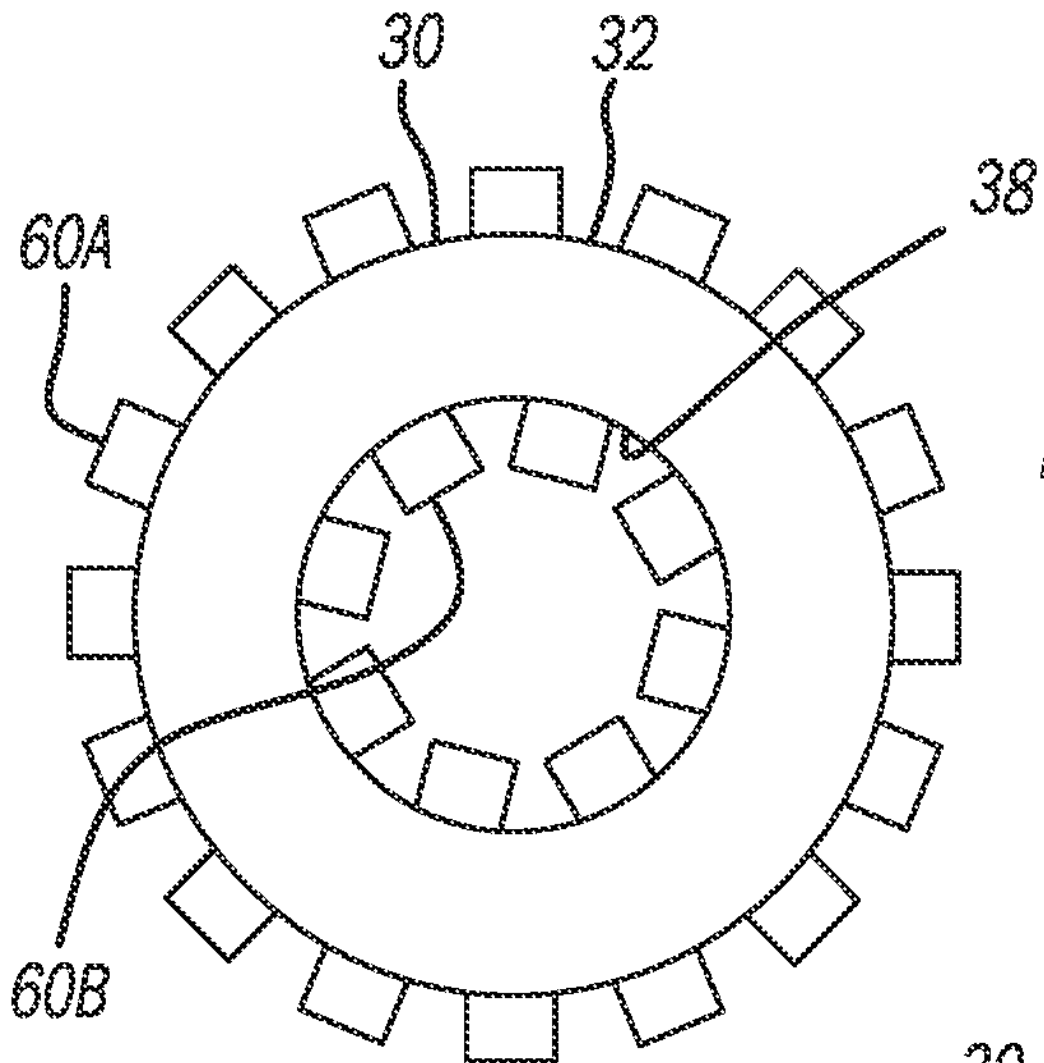

FIG. 5B

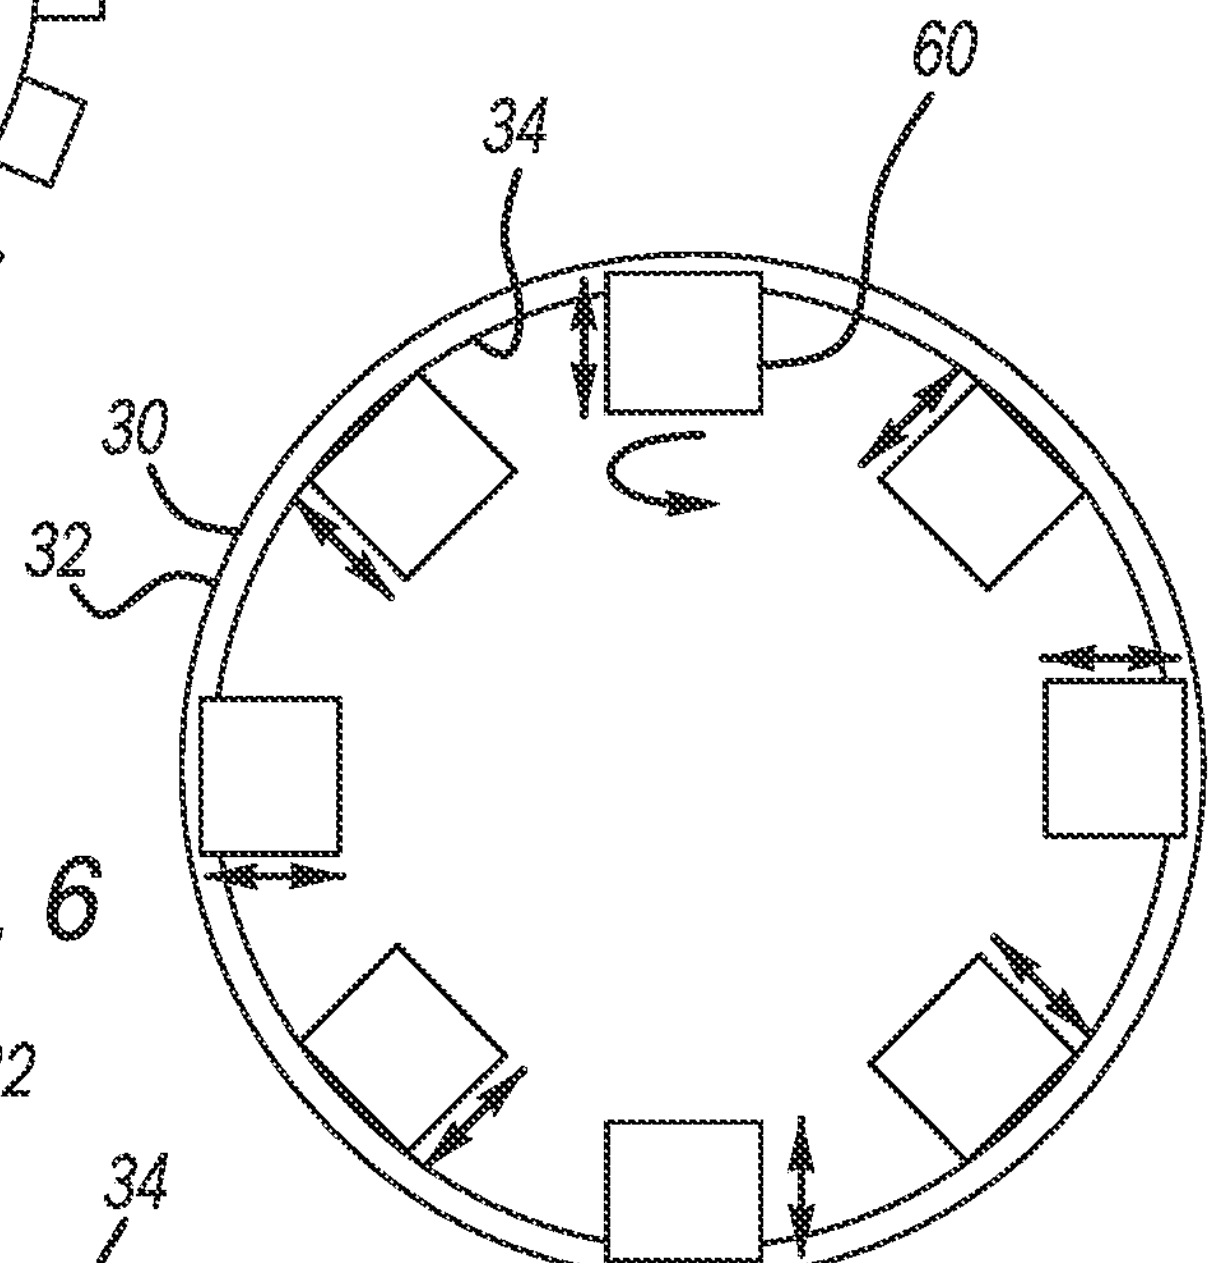

FIG. 6

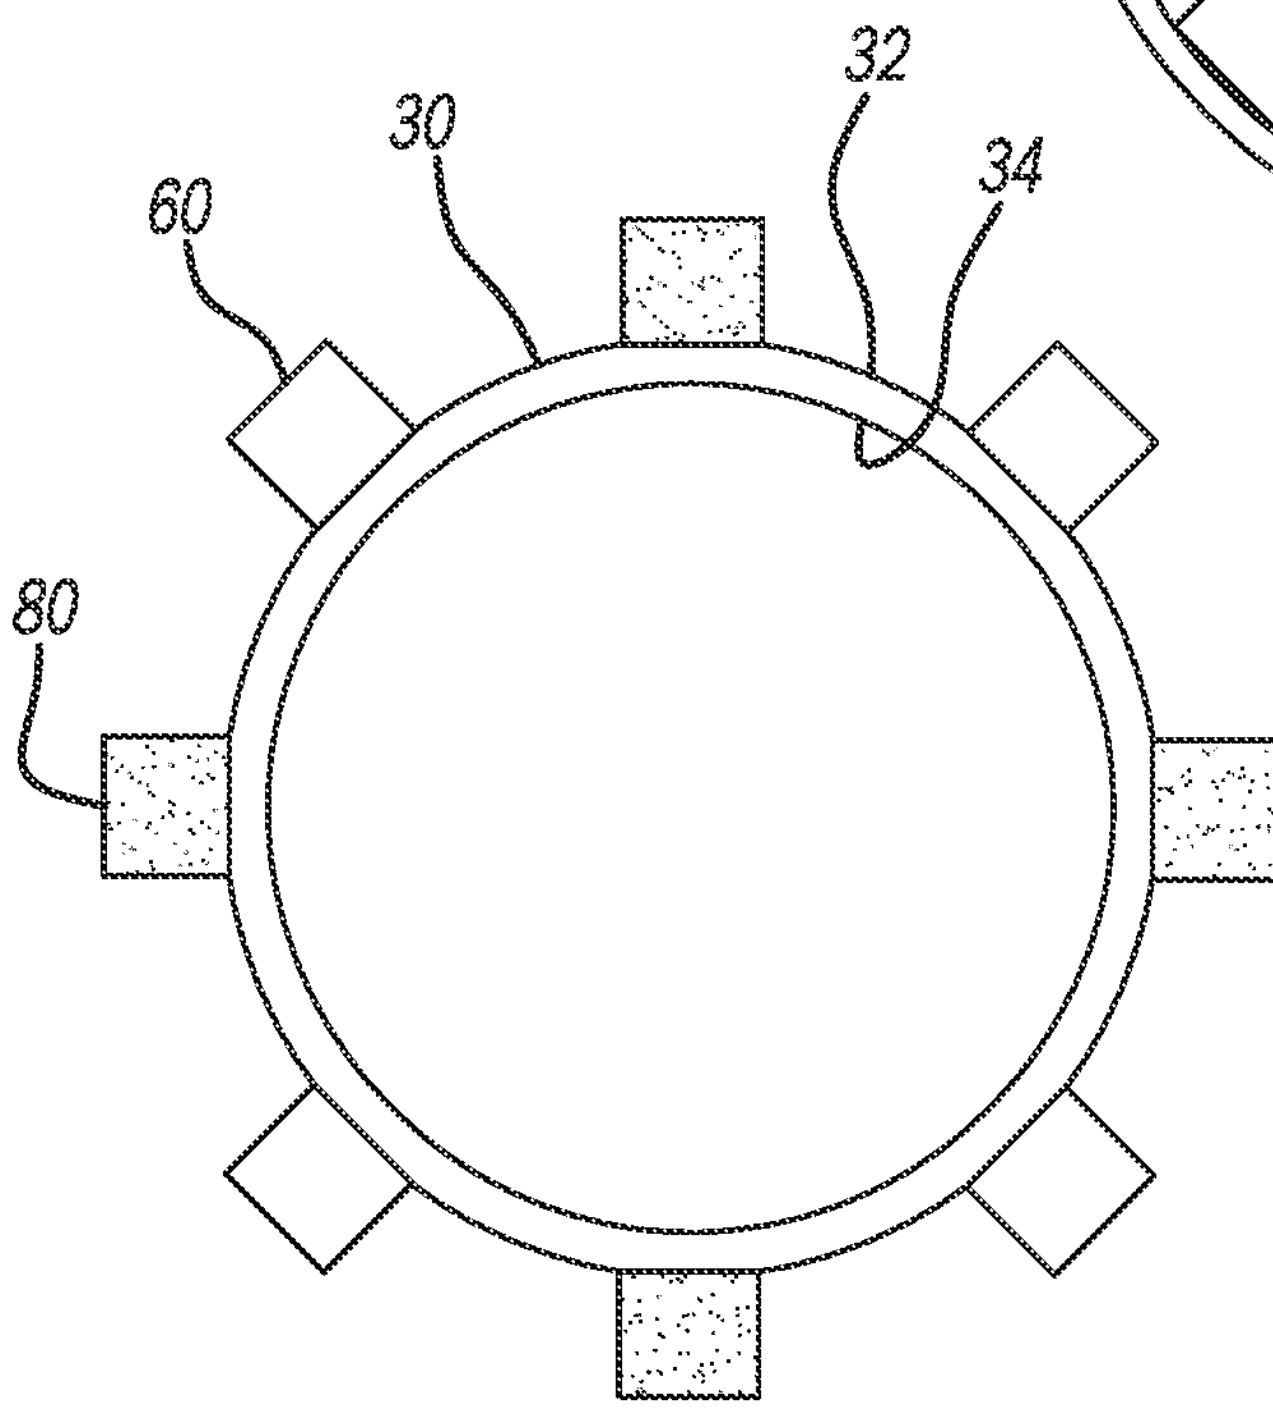

FIG. 7

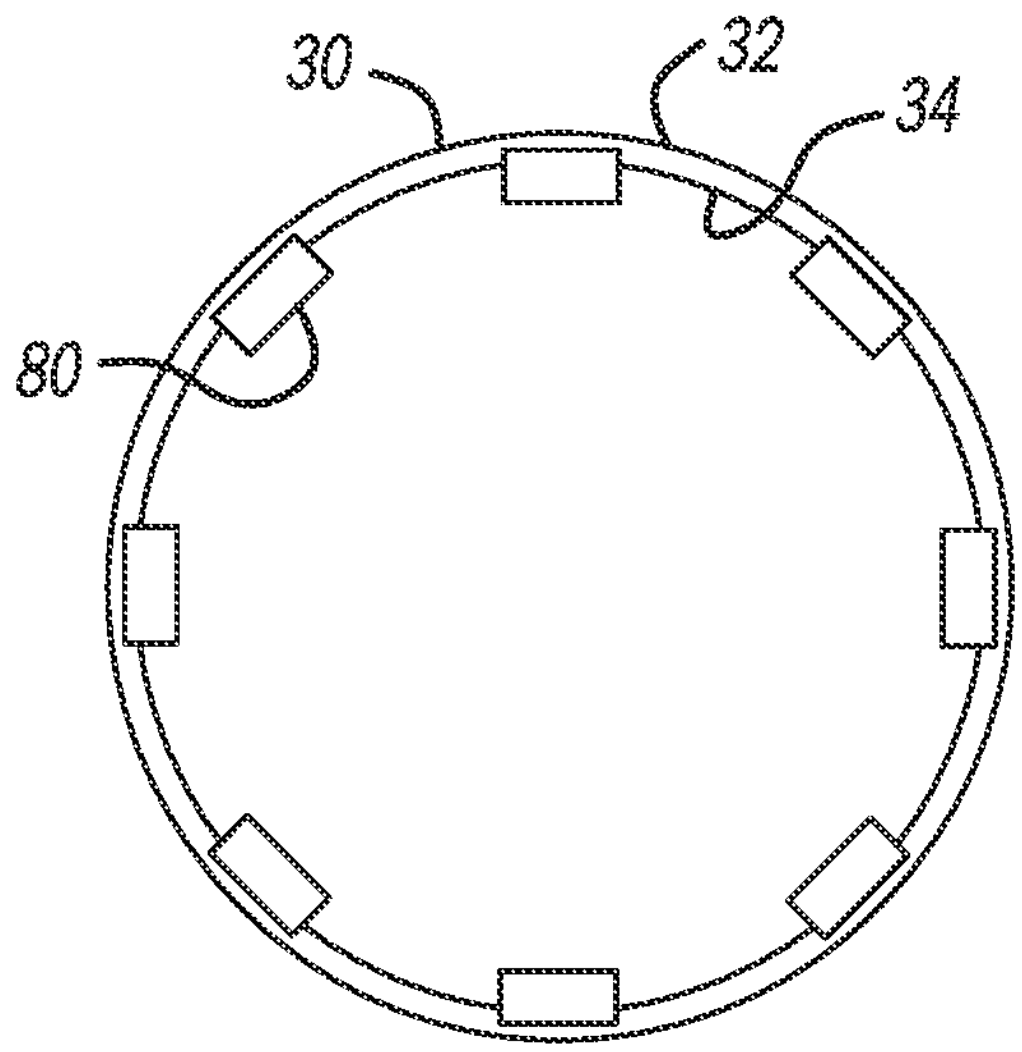

FIG. 8

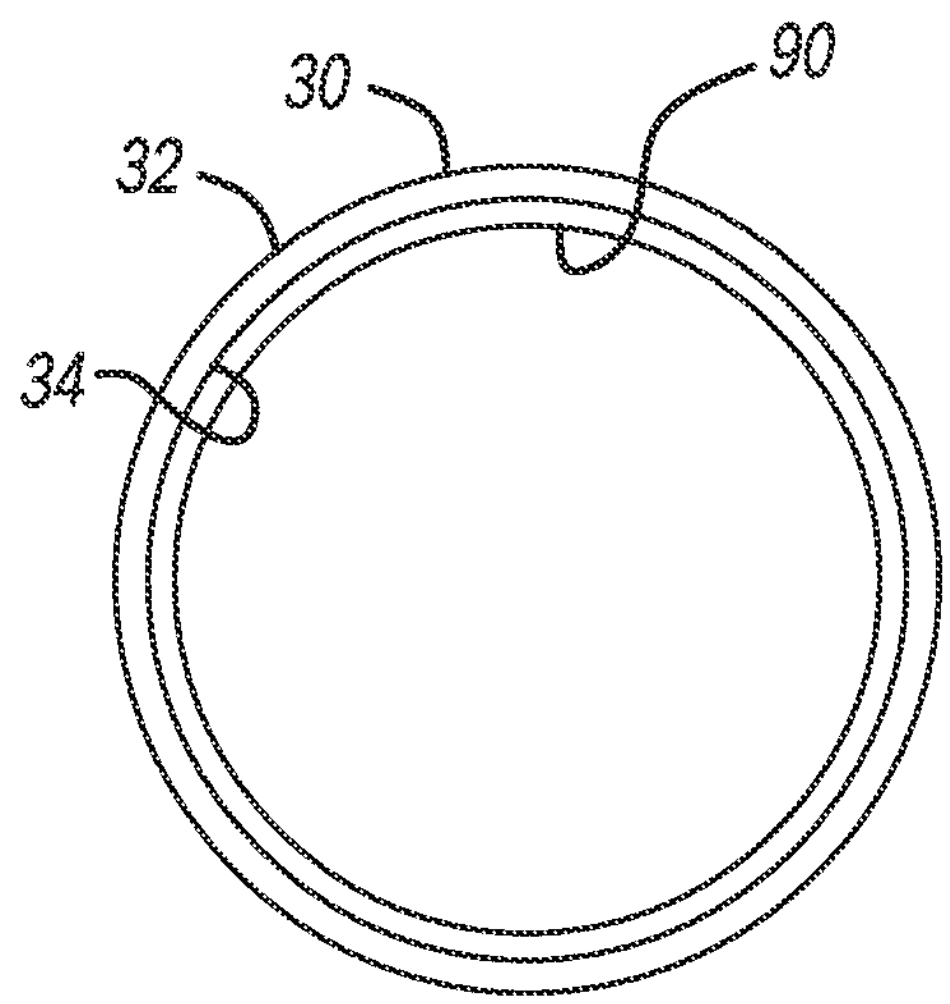

FIG. 9

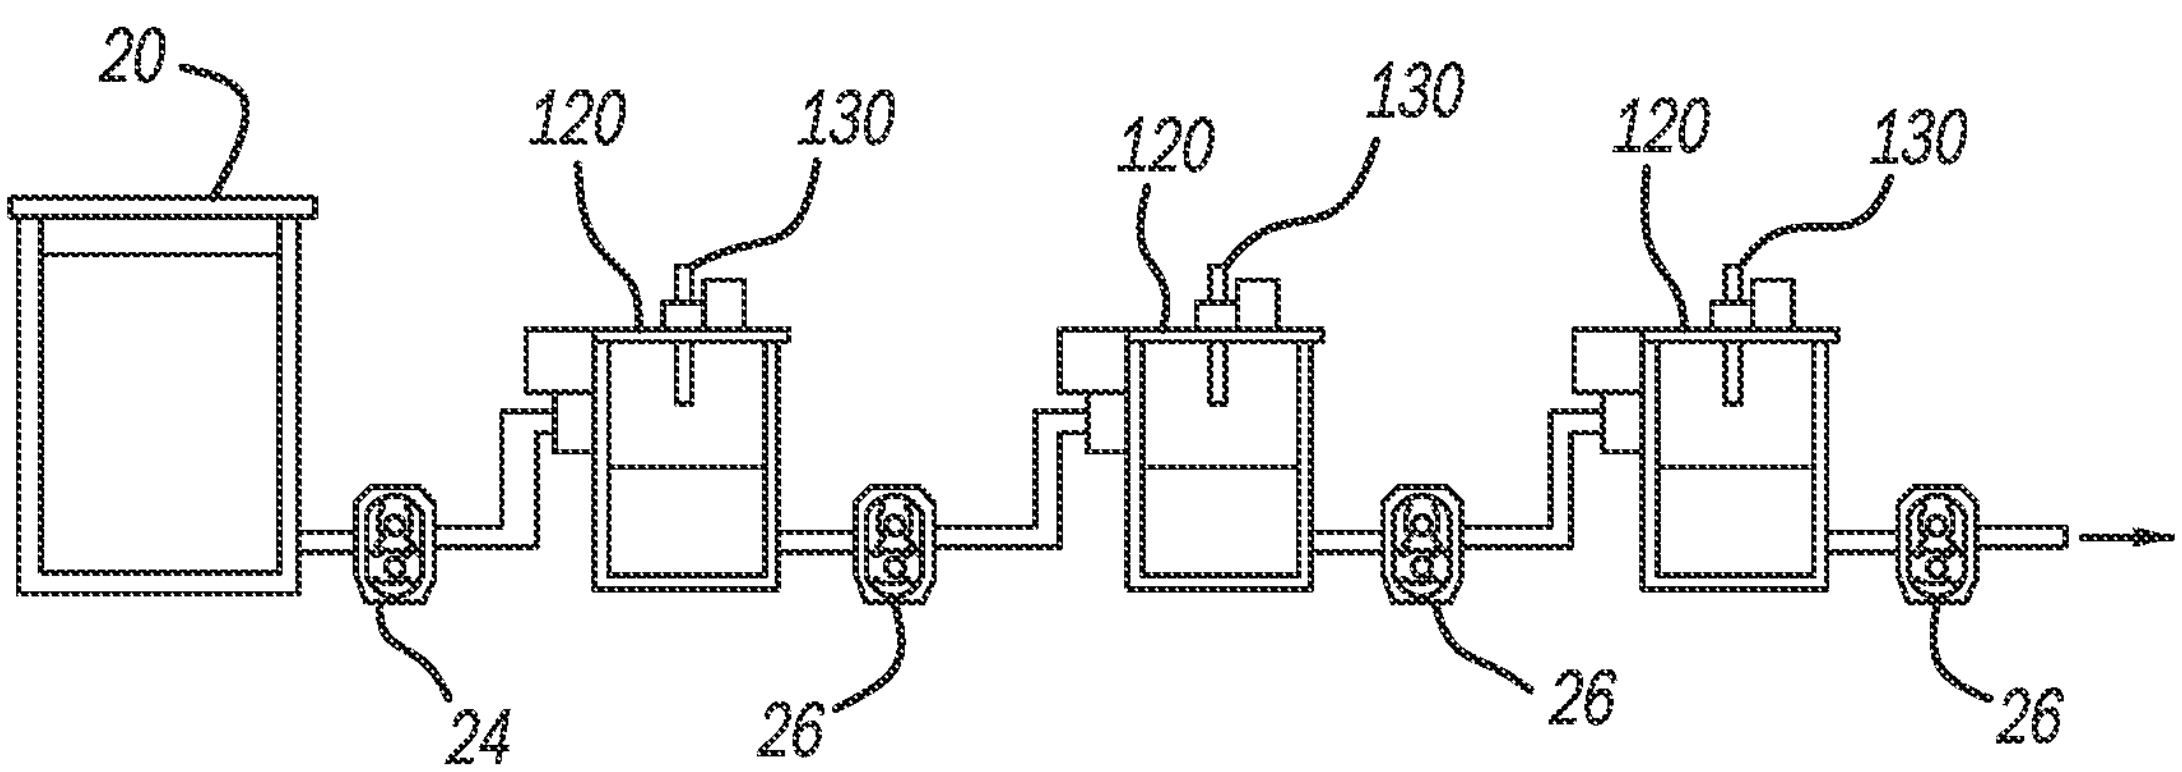

FIG. 10

SYSTEM FOR TRANSPORTING NON-NEWTONIAN MATERIALS USING ACOUSTIC SOFTENING OVER LONG DISTANCES

INTRODUCTION

The information provided in this section is for the purpose of generally presenting the context of the disclosure. Work of the presently named inventors, to the extent it is described in this section, as well as aspects of the description that may not otherwise qualify as prior art at the time of filing, are neither expressly nor impliedly admitted as prior art against the present disclosure.

The present disclosure relates to a system for transporting non-Newtonian materials using acoustic softening over long distances.

Non-Newtonian materials do not follow Newton's law of viscosity, that is, they have a variable viscosity dependent on the amount of shear stress that the material is subject to. Shear thinning non-Newtonian materials decrease in viscosity when subject to increased shear stress. Shear thinning non-Newtonian materials are used in various manufacturing processes. For example, electric vehicle battery packs include shear thinning non-Newtonian thermal interface materials, potting materials, and adhesives.

SUMMARY

The present disclosure includes, in various features, a system for transporting a non-Newtonian material. The system has a storage container configured to store the non-Newtonian material. A dispensing system is configured to dispense the non-Newtonian material. A conduit connects the storage container to the dispensing system. The conduit is configured to transport the non-Newtonian material from the storage container to the dispensing system. A pump is configured to pump the non-Newtonian material out of the storage container and through the conduit to the dispensing system. A hanger is configured to support the conduit from a support structure. An acoustic wave generator is along the conduit configured to impart acoustical shear agitation to the non-Newtonian material to reduce viscosity of the non-Newtonian material.

In further features, the acoustic wave generator includes a plurality of acoustic transducers arranged around the conduit.

In further features, the plurality of acoustic transducers include shear polarized acoustic transducers configured to introduce shear acoustic waves in a direction parallel to a longitudinal axis of the conduit.

In further features, the plurality of acoustic transducers are on an exterior of the conduit.

In further features, the plurality of acoustic transducers are on an interior of the conduit.

In further features, the plurality of acoustic transducers include rotary transducers and translatory transducers.

In further features, the plurality of acoustic transducers are at an expansion joint of the conduit.

In further features, the acoustic wave generator includes an acoustic shaker.

In further features, the acoustic shaker is at an exterior of an expansion joint of the conduit.

In further features, the conduit includes a concentric pipe; and the acoustic wave generator includes outer acoustic transducers at an outer diameter of the concentric pipe and inner acoustic transducers at an inner diameter of the concentric pipe.

In further features, the outer acoustic transducers are aligned with the inner acoustic transducers.

In further features, the outer acoustic transducers are offset from the inner acoustic transducers.

In further features, a heater is proximate to the acoustic wave generator, the heater configured to heat the non-Newtonian material.

In further features, the acoustic wave generator includes a plurality of internal piezoelectric patch transducers at an interior of the conduit.

In further features, the acoustic wave generator includes a piezoelectric film transducer at an interior of the conduit.

In further features, the hanger is configured to support the conduit from the support structure including a building truss.

In further features, the hanger includes dampeners configured to isolate vibration of the conduit from the support structure.

In various features, the present disclosure includes a system for transporting a non-Newtonian material. The system has a storage container configured to store the non-Newtonian material. A dispensing system is configured to dispense the non-Newtonian material. A conduit connects the storage container to the dispensing system, the conduit configured to transport the non-Newtonian material from the storage container to the dispensing system. A transfer chamber is along the conduit between the storage container and the dispensing system. A first pump is configured to pump the non-Newtonian material out of the storage container and into the transfer chamber. A second pump is configured to pump the non-Newtonian material out of the transfer chamber to the dispensing system. A pressure source is at the transfer chamber configured to apply pressure to the non-Newtonian material within the transfer chamber. A plurality of acoustic transducers are along the conduit configured to impart acoustical shear agitation to the non-Newtonian material to reduce viscosity of the non-Newtonian material.

In further features, the plurality of acoustic transducers include shear polarized acoustic transducers configured to introduce shear acoustic waves in a direction parallel to a longitudinal axis of the conduit.

In various features, the present disclosure includes a system for transporting a non-Newtonian material. The system has a storage container configured to store the non-Newtonian material. A dispensing system is configured to dispense the non-Newtonian material. A conduit connects the storage container to the dispensing system. The conduit is configured to transport the non-Newtonian material from the storage container to the dispensing system. A pump is configured to pump the non-Newtonian material out of the storage container and through the conduit to the dispensing system. A plurality of shear polarized acoustic transducers about the conduit are configured to introduce shear acoustic waves in a direction parallel to a longitudinal axis of the conduit to reduce viscosity of the non-Newtonian material.

Further areas of applicability of the present disclosure will become apparent from the detailed description, the claims and the drawings. The detailed description and specific examples are intended for purposes of illustration only and are not intended to limit the scope of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

The present disclosure will become more fully understood from the detailed description and the accompanying drawings, wherein:

FIG. **1** illustrates an exemplary system in accordance with the present disclosure for transporting non-Newtonian material;

FIG. **2**A illustrates a conduit of the system of FIG. **1** including an acoustic collar housing an exemplary acoustic wave generator in accordance with the present disclosure in the form of acoustic transducers;

FIG. **2**B is a cross-sectional view taken along line **2**B-**2**B of FIG. **2**A;

FIG. **3** is a perspective view of an expansion joint of the conduit of FIG. **1** including acoustic collars housing exemplary acoustic wave generators in the form of acoustic transducers;

FIG. **4** is a perspective view of another expansion joint of the conduit of FIG. **1** including exemplary acoustic wave generators in the form of acoustic shakers;

FIG. **5**A is a cross-sectional view of the conduit including exemplary acoustic wave generators in the form of external acoustic transducers aligned with internal acoustic transducers;

FIG. **5**B is a cross-sectional view of the conduit including external acoustic transducers offset from internal acoustic transducers;

FIG. **6** is a cross-sectional view of the conduit including exemplary acoustic wave generators in the form of internal acoustic transducers configured to generate translatory and rotary motion;

FIG. **7** is a cross-sectional view of the conduit including exemplary acoustic wave generators in the form of external acoustic transducers with heaters therebetween;

FIG. **8** is a cross-sectional view of the conduit including exemplary acoustic wave generators in the form of internal piezoelectric patch transducers;

FIG. **9** is a cross-sectional view of the conduit including an exemplary acoustic wave generator in the form of an internal piezoelectric film actuator; and

FIG. **10** illustrates exemplary pumps and transfer stations for inclusion with the system of FIG. **1**.

In the drawings, reference numbers may be reused to identify similar and/or identical elements.

DETAILED DESCRIPTION

FIG. **1** illustrates an exemplary system **10** in accordance with the present disclosure for transporting any suitable non-Newtonian material from a storage container **20** to a dispensing system **22**. Non-Newtonian materials do not follow Newton's law of viscosity. That is, non-Newtonian materials have a variable viscosity dependent on the amount of shear stress that the material is subject to. Shear thinning non-Newtonian materials decrease in viscosity when subject to increased shear stress. Exemplary shear thinning non-Newtonian materials that the system **10** is configured to transport from the storage container **20** to the dispensing system **22** include, for example, materials used in manufacturing battery packs for battery electric vehicles. Exemplary battery pack materials include, but are not limited to, thermal interface material (TIM), potting materials, and adhesives. The system **10** is configured to transport shear thinning non-Newtonian materials across large distances, such as across a large factory floor where battery packs are manufactured, assembled, and/or installed into battery electric vehicles. The system **10** may be configured for transporting non-Newtonian materials, or any other suitable materials, at any other suitable location as well.

The system **10** further includes a pump **24**, which is configured to pump the non-Newtonian material from the storage containers **20** to the dispensing system **22** through any suitable conduit **30**. The storage containers **20** may be any suitable storage containers at any suitable location at a manufacturing site. The dispensing system **22** may be any suitable dispensing system configured to dispense shear thinning non-Newtonian material, such as TIM, potting materials, adhesives, etc. The dispensing system **22** may be arranged any suitable distance from the storage containers **20**, such as at opposite ends of a manufacturing shop floor.

The conduit **30** may be any suitable pipe, for example, of any suitable length to connect the storage containers **20** to the dispensing system **22**. The conduit **30** may be hung from any suitable support structure **40** using hangers **42**. The support structure **40** may be a building truss, for example. Thus, the conduit **30** may be suspended above a shop floor to allow personnel, forklifts, and other vehicles and machinery to pass under the conduit **30**. The hangers **42** extend from the support structure **40** to the conduit **30**, and may include dampeners configured to isolate vibrations at the conduit **30** from the support structure **40**. The hangers **42** may include any suitable dampeners, such as, but not limited to, a tuned mass damper, a sheer thickening material damper, a rubber damper, etc.

Along the conduit **30** is any suitable number of acoustic wave generators **50** configure to impart acoustical shear agitation to the non-Newtonian material as the material passes through the conduit **30** to reduce the viscosity of the non-Newtonian material. Reducing the viscosity of the non-Newtonian material allows the material to more freely and rapidly flow from the storage container **20** to the dispensing system **22**. As a result, the system **10** increases the volume of non-Newtonian material to the dispensing system **22** and increases the distance that the material may be transported from the storage container **20**, which improves manufacturing times, reduces forklift traffic at the manufacturing site, reduces equipment footprint, eliminates manual drum exchange at a point of use, and allows for larger bulk material containers. The conduit **30** may include a low internal friction coating to further reduce the viscosity of the non-Newtonian material.

With reference to FIGS. **2**A and **2**B, the acoustic wave generator **50** may include a plurality of acoustic transducers **60** within an acoustic collar **52**. In the example illustrated, the acoustic transducers **60** are secured at an exterior surface **32** of the conduit **30**, which is opposite to an interior surface **34** of the conduit **30**. The acoustic transducers **60** are spaced apart about the exterior surface **32** of the conduit **30**. Any suitable number of acoustic transducers **60** may be arranged along the length of the conduit **30**. The acoustic transducers **60** may be any suitable transducers configured to convert electromagnetic energy into acoustic energy. For example, the transducers **60** may include shear polarized acoustic transducers configured to introduce shear acoustic waves in a direction parallel to a longitudinal axis of the conduit **30**. Activation of the acoustic transducers **60** agitates the shear thinning non-Newtonian material, thereby reducing the viscosity of material to facilitate flow of the material through the conduit **30**.

Guided waves arise when the acoustic wave interacts with the geometric boundaries of the conduit **30** or other structure through which it is propagating. For a given geometry, multiple guided wave modes are generated. Which modes are present is characterized by the dispersion curve and depends on the frequency of the acoustic wave. All modes will exist simultaneously; however, it is possible to "funnel" more energy into a desired mode by selecting a transducer that outputs a given displacement profile/frequency conducive to the wave-mode of choice. For example, out of phase shear transducers positioned along the conduit **30** will be conducive to a torsional mode. For shear thinning applications in pipes, it is most desirable to generate a mode which has a high displacement profile at the inner diameter of the pipe. The acoustic transducers **60** may be configured to generate any suitable guided wave to maximize shear at an inner diameter of the conduit **30**, such as a longitudinal mode, flexural mode, or a torsional mode.

With reference to FIG. **3**, acoustic collars **52** including any suitable acoustic wave generator **50**, such as the acoustic transducer **60**, may be arranged on opposite ends of an expansion joint **36** of the conduit **30**. The expansion joint **36** is configured to allow the conduit **30** to expand and contract, thereby facilitating acoustic transfer across the conduit **30** and lessening stress on the conduit **30** from the acoustic wave generators **50**.

With reference to FIG. **4**, the acoustic wave generators **50** may include acoustic shakers **70**. Each acoustic shaker **70** includes a base **72**, a rod **74** extending from the base **72**, and a clamp **76** at a distal end of the rod **74**. The base **72** may be arranged at a first flange **78**A of the expansion joint **36**. The clamp **76** may be positioned to clamp onto an opposite flange **78**B of the expansion joint **36**. Actuation of the rod **74** agitates the expansion joint **36** to incorporate acoustic agitation into the conduit **30** and reduce the viscosity of the non-Newtonian material.

With reference to FIGS. **5**A and **5**B, the conduit **30** may include one or more concentric pipes including an inner ring **38** opposite to exterior surface **32**. The non-Newtonian fluid flows in an area of the conduit **30** defined between the exterior surface **32** and the inner ring **38**. In this configuration, the acoustic wave generator **50** is in the form of external acoustic transducers **60**A at the exterior surface **32** and internal acoustic transducers **60**B at the inner ring **38**. In the configuration of FIG. **5**A, the external transducers **60**A are arranged opposite to the internal transducers **60**B. The transducers **60**A, **60**B are configured to fire in any suitable sequence to generate rotational flow of the non-Newtonian fluid through the conduit **30**. For example, the external transducers **60**A may be fired sequentially in a clockwise direction, and the internal transducers **60**B may be fired sequentially in a counter-clockwise direction to generate rotational flow of the non-Newtonian material. With reference to FIG. **5**B, the external transducers **60**A may be arranged offset from the internal transducers **60**B. In this configuration, both the external transducers **60**A and the internal transducers **60**B may be fired sequentially in a clockwise or counterclockwise direction to generate rotational flow of the non-Newtonian material through the concentric conduit **30**.

With reference to FIG. **6**, the acoustic wave generators **50** may be configured as acoustic transducers **60** mounted to the inner surface **34** of the conduit **30**. The acoustic transducers **60** are configured as rotary and/or translatory transducers for mechanically agitating the non-Newtonian fluid by way of rotary and translatory motion.

With reference to FIG. **7**, the acoustic wave generators **50** may include the acoustic transducers **60** spaced apart about the exterior surface **32** of the conduit **30**. Between the acoustic transducers **60** are any suitable heaters **80** configured to heat the non-Newtonian fluid. The heaters **80** may be arranged at the exterior surface **32**, or at any other suitable location. Both acoustically agitating and heating the non-Newtonian material simultaneously further reduces the viscosity of the non-Newtonian material.

With reference to FIG. **8**, the acoustic wave generators **50** may be configured as internal piezoelectric patch transducers **80** at the interior surface **34** of the conduit **30**. When activated, the transducers **80** ultrasonically agitate the non-Newtonian fluid flowing through the conduit **30** to decrease the viscosity thereof.

FIG. **9** illustrates another exemplary acoustic wave generator **50** in the form of an internal piezoelectric coating actuator, such as a film **90**, which is configured to ultrasonically agitate the non-Newtonian material when a voltage is applied to the film **90**. The ultrasonic agitation reduces the viscosity of the non-Newtonian material.

With reference to FIG. **10**, to facilitate transport of the non-Newtonian fluid across a large distance, the system **10** may further include intermediate transfer stations **120** between the storage container **20** and the dispensing system **22**. Any suitable number of transfer stations **120** may be included, such as three in the example illustrated. In the example of FIG. **10**, the main pump **24** pumps the non-Newtonian material from the storage container **20** to a first transfer station **120**. From the first transfer station **120**, a transfer pump **26** pumps the non-Newtonian fluid to a second transfer station **120**. Additional transfer pumps **26** pump the non-Newtonian material to the dispensing system **22**. The transfer pumps **26** reduce the overall load on the main pump **24**, which increases the overall distance that the non-Newtonian fluid may be transported. Each one of the transfer stations **120** includes any suitable pressure source **130**. The pressure source **130** is configured to apply pressure to the non-Newtonian material at the transfer stations **120** to facilitate pumping of the non-Newtonian material out of the transfer stations **120**. The pressure source **130** may include, for example, a plunger configured to press against the non-Newtonian fluid.

The system **10** thus advantageously includes acoustic wave generators **50** that impart acoustical shear agitation on non-Newtonian materials flowing through the conduit **30**, which reduces the viscosity of the non-Newtonian materials, thereby allowing the materials to be transported over large distances without the materials clogging the conduit **30**, and without imparting excessive stress on the pump **24**.

The foregoing description is merely illustrative in nature and is in no way intended to limit the disclosure, its application, or uses. The broad teachings of the disclosure can be implemented in a variety of forms. Therefore, while this disclosure includes particular examples, the true scope of the disclosure should not be so limited since other modifications will become apparent upon a study of the drawings, the specification, and the following claims. It should be understood that one or more steps within a method may be executed in different order (or concurrently) without altering the principles of the present disclosure. Further, although each of the embodiments is described above as having certain features, any one or more of those features described with respect to any embodiment of the disclosure can be implemented in and/or combined with features of any of the other embodiments, even if that combination is not explicitly described. In other words, the described embodiments are not mutually exclusive, and permutations of one or more embodiments with one another remain within the scope of this disclosure.

Spatial and functional relationships between elements (for example, between modules, circuit elements, semiconductor layers, etc.) are described using various terms, including "connected," "engaged," "coupled," "adjacent," "next to," "on top of," "above," "below," and "disposed." Unless explicitly described as being "direct," when a relationship between first and second elements is described in the above disclosure, that relationship can be a direct relationship where no other intervening elements are present between the first and second elements, but can also be an indirect relationship where one or more intervening elements are present (either spatially or functionally) between the first and second elements. As used herein, the phrase at least one of A, B, and C should be construed to mean a logical (A OR B OR C), using a non-exclusive logical OR, and should not be construed to mean "at least one of A, at least one of B, and at least one of C."

What is claimed is:

1. A system for transporting a non-Newtonian material, the system comprising:

a storage container configured to store the non-Newtonian material;

a dispensing system configured to dispense the non-Newtonian material;

a conduit connecting the storage container to the dispensing system, the conduit configured to transport the non-Newtonian material from the storage container to the dispensing system;

a pump configured to pump the non-Newtonian material out of the storage container and through the conduit to the dispensing system;

a hanger configured to support the conduit from a support structure; and

an acoustic wave generator along the conduit configured to impart acoustical shear agitation to the non-Newtonian material to reduce viscosity of the non-Newtonian material;

wherein:

the acoustic wave generator includes a plurality of acoustic transducers arranged around the conduit; and

the plurality of acoustic transducers are on an interior of the conduit.

2. The system of claim **1**, wherein the plurality of acoustic transducers include shear polarized acoustic transducers configured to introduce shear acoustic waves in a direction parallel to a longitudinal axis of the conduit.

3. The system of claim **1**, wherein the plurality of acoustic transducers include rotary transducers and translatory transducers.

4. The system of claim **1**, wherein the plurality of acoustic transducers are at an expansion joint of the conduit.

5. The system of claim **1**, wherein:

the conduit includes a concentric pipe; and

the acoustic wave generator includes outer acoustic transducers at an outer diameter of the concentric pipe.

6. The system of claim **5**, wherein the outer acoustic transducers are aligned with the plurality of acoustic transducers on the interior of the conduit.

7. The system of claim **5**, wherein the outer acoustic transducers are offset from the plurality of acoustic transducers on the interior of the conduit.

8. The system of claim **1**, further comprising a heater proximate to the acoustic wave generator, the heater configured to heat the non-Newtonian material.

9. The system of claim **1**, wherein the acoustic wave generator includes a plurality of internal piezoelectric patch transducers at an interior of the conduit.

10. The system of claim **1**, wherein the acoustic wave generator includes a piezoelectric film transducer at an interior of the conduit.

11. The system of claim **1**, wherein the hanger is configured to support the conduit from the support structure including a building truss.

12. The system of claim **1**, wherein the hanger includes dampeners configured to isolate vibration of the conduit from the support structure.

13. A system for transporting a non-Newtonian material, the system comprising:

a storage container configured to store the non-Newtonian material;

a dispensing system configured to dispense the non-Newtonian material;

a conduit connecting the storage container to the dispensing system, the conduit configured to transport the non-Newtonian material from the storage container to the dispensing system;

a transfer chamber along the conduit between the storage container and the dispensing system;

a first pump configured to pump the non-Newtonian material out of the storage container and into the transfer chamber;

a second pump configured to pump the non-Newtonian material out of the transfer chamber to the dispensing system;

a pressure source at the transfer chamber configured to apply pressure to the non-Newtonian material within the transfer chamber; and

a plurality of acoustic transducers along the conduit configured to impart acoustical shear agitation to the non-Newtonian material to reduce viscosity of the non-Newtonian material.

14. The system of claim **13**, wherein the plurality of acoustic transducers include shear polarized acoustic transducers configured to introduce shear acoustic waves in a direction parallel to a longitudinal axis of the conduit.

15. A system for transporting a non-Newtonian material, the system comprising:

a storage container configured to store the non-Newtonian material;

a dispensing system configured to dispense the non-Newtonian material;

a conduit connecting the storage container to the dispensing system, the conduit configured to transport the non-Newtonian material from the storage container to the dispensing system;

a pump configured to pump the non-Newtonian material out of the storage container and through the conduit to the dispensing system; and

a plurality of shear polarized acoustic transducers about the conduit configured to introduce shear acoustic waves in a direction parallel to a longitudinal axis of the conduit to reduce viscosity of the non-Newtonian material,

wherein the plurality of shear polarized acoustic transducers are on an interior of the conduit.

* * * * *