



US 20250261949A1

(19) **United States**

(12) **Patent Application Publication**
Mac An Tuile et al.

(10) **Pub. No.: US 2025/0261949 A1**

(43) **Pub. Date: Aug. 21, 2025**

(54) **SURGICAL SAGITTAL BLADE CARTRIDGE
WITH A REINFORCED GUIDE BAR**

(60) Provisional application No. 62/160,234, filed on May 12, 2015.

(71) Applicant: **Stryker European Operations
Holdings LLC**, Portage, MI (US)

Publication Classification

(72) Inventors: **Conor Mac An Tuile**, Muine Bheag
(IE); **James G. Walen**, Portage, MI
(US)

(51) **Int. Cl.**

A61B 17/14 (2006.01)

B23D 51/16 (2006.01)

B23D 61/00 (2006.01)

B27B 19/00 (2006.01)

(73) Assignee: **Stryker European Operations
Holdings LLC**, Portage, MI (US)

(52) **U.S. Cl.**

CPC **A61B 17/142** (2016.11); **A61B 17/14**

(2013.01); **B23D 51/16** (2013.01); **B23D**

61/006 (2013.01); **B27B 19/006** (2013.01)

(21) Appl. No.: **19/203,110**

(22) Filed: **May 8, 2025**


Related U.S. Application Data

(63) Continuation of application No. 18/398,744, filed on Dec. 28, 2023, which is a continuation of application No. 17/572,022, filed on Jan. 10, 2022, now Pat. No. 11,890,021, which is a continuation of application No. 16/907,197, filed on Jun. 20, 2020, now Pat. No. 11,241,240, which is a continuation of application No. 15/807,961, filed on Nov. 9, 2017, now Pat. No. 10,687,823, which is a continuation of application No. PCT/US2016/031407, filed on May 9, 2016.

(57)

ABSTRACT

A surgical sagittal saw cartridge that includes a guide bar formed from an inner plate and opposed outer plates, the inner plate defining a head. The cartridge has a blade that is disposed against the head of the inner plate. The inner plate may comprise an inner tine and/or two opposed outer tines. The inner tine may be formed to define the head against which the blade is disposed. The outer tines may extend distally so as to define a space between the outer tines in which the blade is seated.

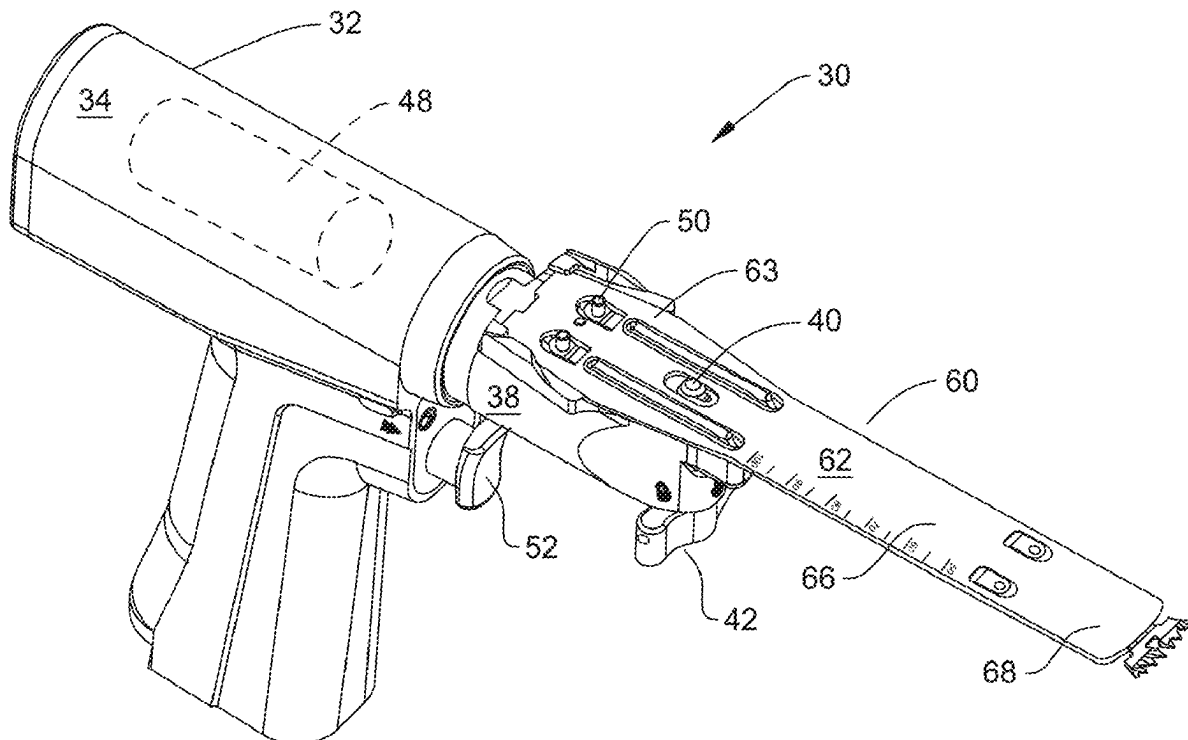

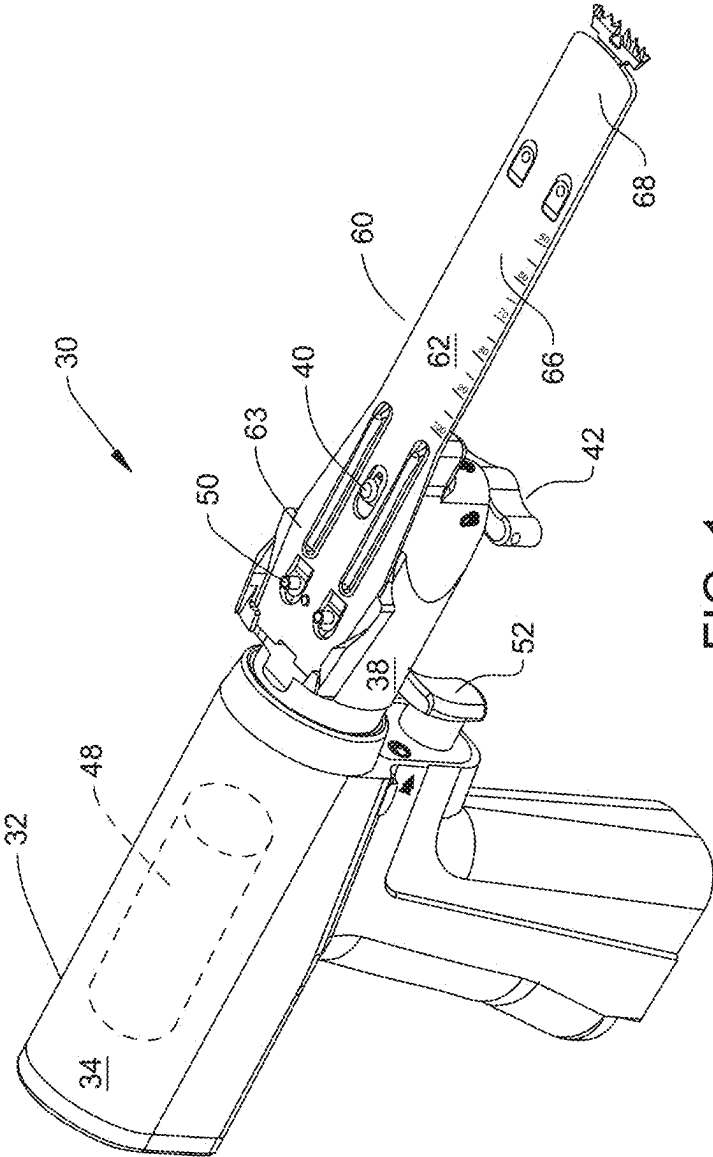
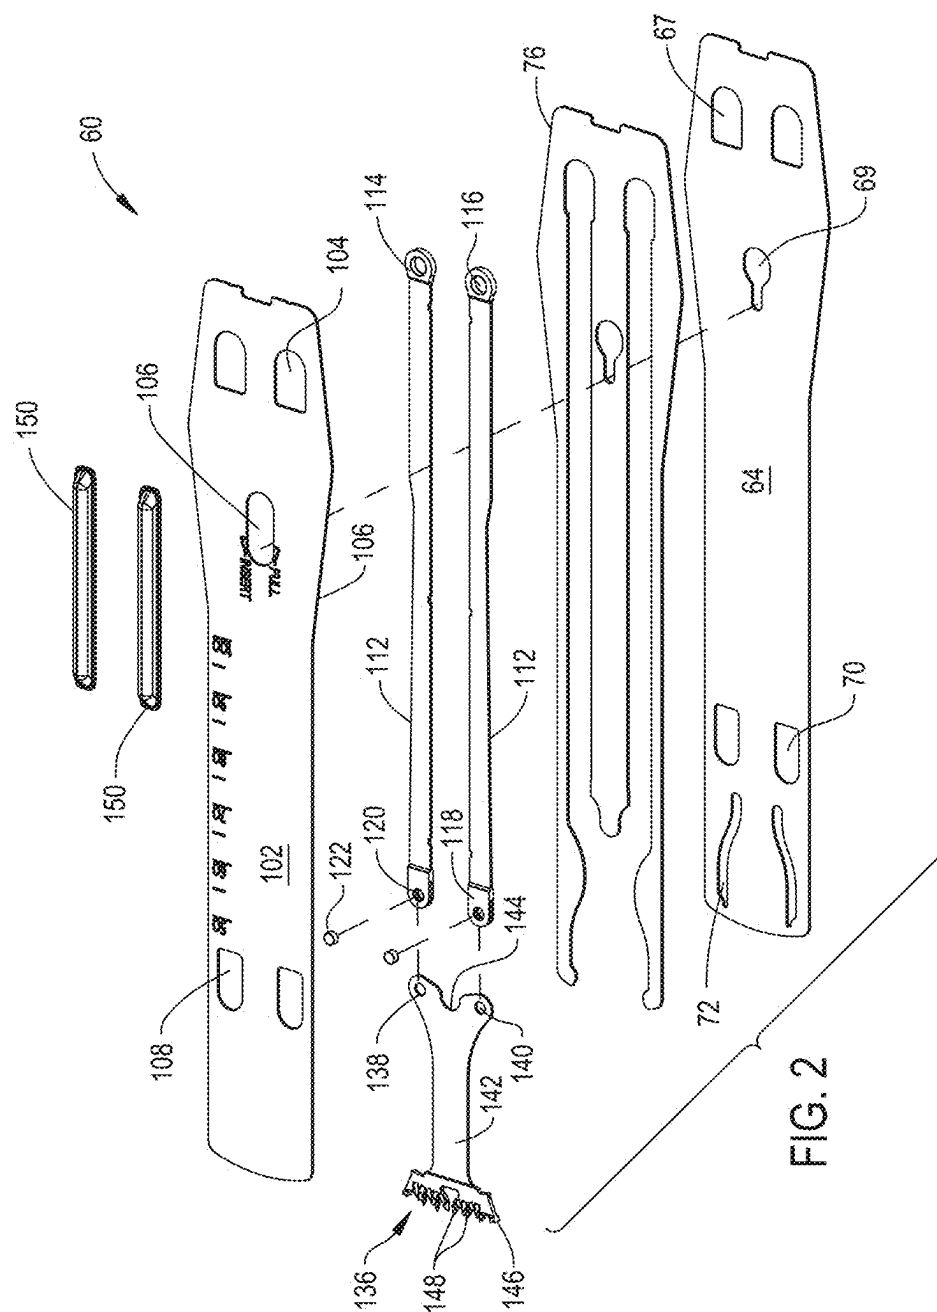
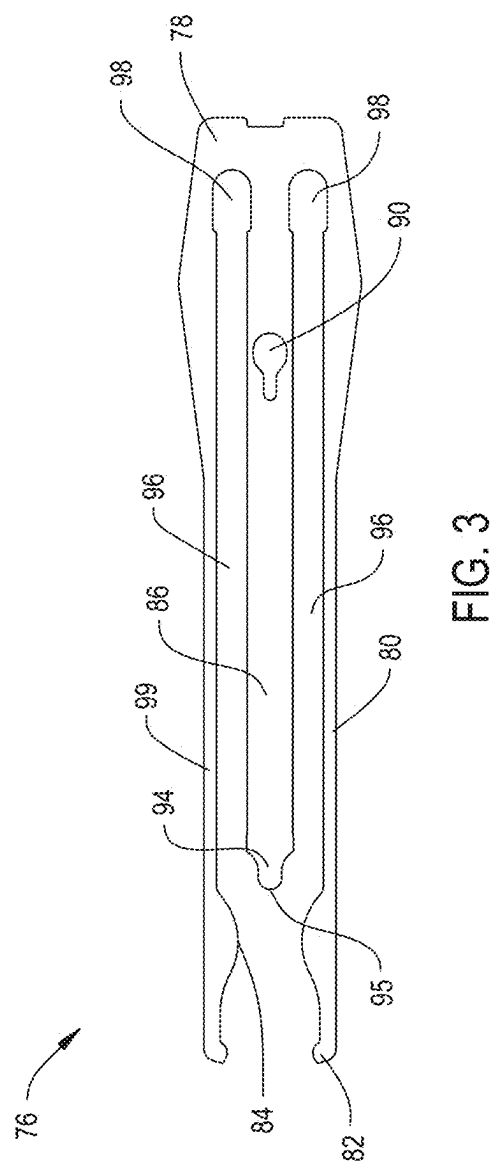


FIG. 1





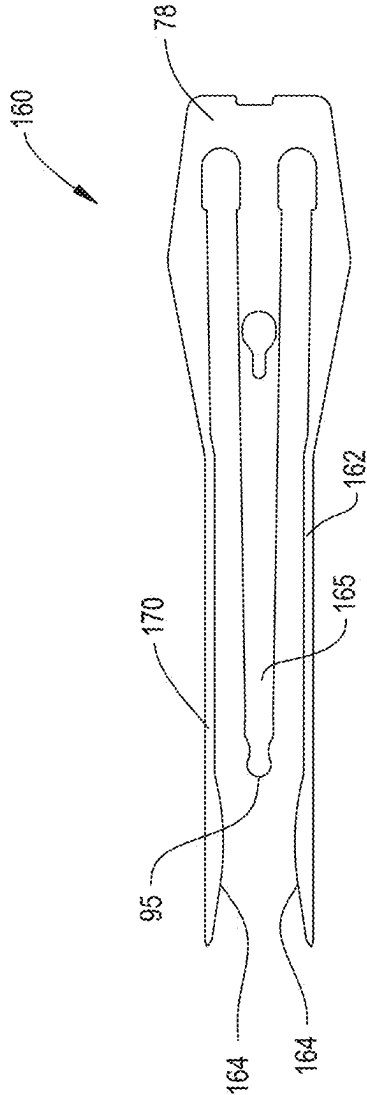


FIG. 4

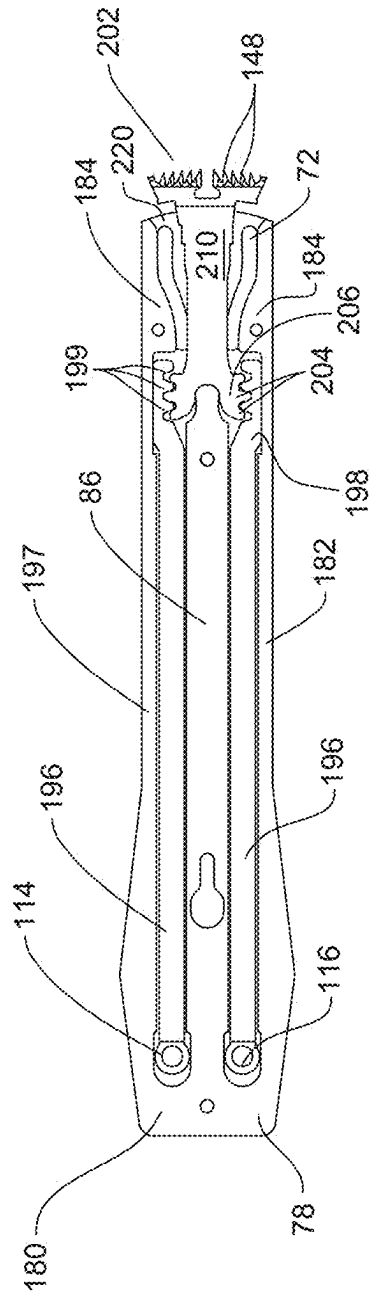


FIG. 5

SURGICAL SAGITTAL BLADE CARTRIDGE WITH A REINFORCED GUIDE BAR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. patent application Ser. No. 18/398,744, filed on Dec. 28, 2023, which is a continuation of U.S. patent application Ser. No. 17/572,022, filed on Jan. 10, 2022, which is a continuation of U.S. patent application Ser. No. 16/907,197, filed on Jun. 20, 2020, which is a continuation of U.S. patent application Ser. No. 15/807, 961, filed on Nov. 9, 2017, which is a continuation of PCT International Application No. PCT/US2016/031407, filed on May 9, 2016, which claims priority to and all the benefits of U.S. Provisional Patent Application No. 62/160,234, filed on May 12, 2015, all of which are hereby expressly incorporated herein by reference in their entirety.

FIELD OF THE INVENTION

[0002] This invention relates to a surgical sagittal blade cartridge that has a static guide bar and a blade head that is pivotally mounted to the guide bar. More particularly, this invention is related to a surgical sagittal blade cartridge with a reinforced guide bar.

BACKGROUND OF THE INVENTION

[0003] A sagittal saw blade is a surgical saw with a head that pivots around an axis that is perpendicular to the blade. PCT Pub. No. WO 2006/017066A2/U.S. Pat. No. 7,497,860 and PCT Pub. No. WO 2007/030793A2/U.S. Pat. No. 7,704, 254, the contents of which are each incorporated herein by reference, each disclose a sagittal saw blade cartridge. A sagittal saw blade cartridge includes a static guide bar and a blade head. The guide bar is an elongated member that is releasably attached to the handpiece, the saw that actuates the cartridge. The blade head is pivotally mounted to the guide bar and has teeth that extend forward from the guide bar. One or more drive links extend from the blade head towards the proximal end of the guide bar. The drive links are reciprocated back and forth by a drive assembly internal to the saw. The reciprocation of the drive links causes the blade head to pivot back and forth. The pivoting of the blade head is what enables the teeth to cut the tissue against which the blade head is pressed. Sometimes, this type of cartridge is referred to as an oscillating tip saw blade cartridge.

[0004] An advantage of the sagittal blade cartridge is that the only portion of the cartridge that pivots is the distally located blade head. By way of comparison, a conventional sagittal saw blade pivots from its point of attachment to the saw to which the blade is attached. A cartridge, when actuated, vibrates less in the hands of the surgeon holding the handpiece. Also, it is common practice to use a cutting guide to properly position a sagittal saw blade relative to the tissue the blade is intended to cut. When a conventional blade is actuated, the oscillating movement of the blade imposes significant wear on the surfaces of the cutting guide defining the slot in which the blade is seated. The guide bar of a surgical sagittal blade cartridge only minimally moves in this slot. Thus, by using a cartridge, instead of a conventional blade, less of the material forming the cutting guide is rubbed off the guide. This reduces the extent to which the surgeon has to flush worn off cutting guide material from the

surgical site. Further, use of the oscillating tip blade reduces the extent to which the material forming the guide becomes so worn that the guide itself is rendered useless.

[0005] A surgical sagittal blade cartridge has another benefit over a conventional sagittal saw blade. Since the guide bar remains static when the blade head is actuated, the practitioner can press a finger or two against the guide bar. This facilitates the holding of the cartridge in the desired position as the cartridge is advanced against the tissue that is to be cut.

[0006] When either a conventional sagittal blade or a sagittal blade cartridge advances through bone, the blade head is exposed to resistance. This resistance can be appreciable when the cut has a depth of 5 cm or more. Often the bone located adjacent the underside of the cartridge is more resistive to cutting than the bone located immediately above the cartridge. The cartridge, like most mechanical devices, will when advanced forward, advance along the path of least resistance. Since the bone above the cartridge can be less resistance to cutting than the bone below the cartridge, a cartridge when advanced, can flex upwardly out of the plane of the desired cut. This upwardly flexing of the blade is known as skiving. There can also be situations when owing to the density of the bone, the cartridge, when advanced, flexes below the plane of the cut. This type of flexure is known as diving.

[0007] Regardless of the direction the blade flexes, the flexure is undesirable. This is because a sagittal saw blade cartridge is typically used to remove bone so an artificial implant can be fitted in the space previously occupied by the removed bone. An implant is formed with surfaces designed to precisely seat against the complementary surfaces of the bone against which the implant is mounted. If the cut does not leave the bone with surfaces that have the desired shape, the results of the implant fitting procedure may be less than optimal.

[0008] In theory, one could increase the rigidity of a surgical sagittal blade cartridge by increasing the thickness of the guide bar. It should be appreciated that the slots of cutting guide through which the cartridge is inserted tend to be relatively narrow. Often the height this slots is around 1.5 mm or less. This height limit imposes a limit of the thickness of the cartridge guide bar that can be inserted in this slot. Furthermore, if thickness of the guide bar is increased, by extension it is necessary to increase the thickness of the cut that will be formed by the cartridge. Increasing cut thickness can also lead to the cartridge leaving a cut surface that does not have the desired degree of planar smoothness. Increasing guide bar thickness is therefore typically not a viable solution for reducing the incidence of cartridge flexure.

SUMMARY OF THE INVENTION

[0009] This invention is related to a new and useful surgical sagittal blade cartridge. The surgical sagittal blade cartridge includes a guide bar designed to resist deformation when subjected to uneven resistance.

[0010] The surgical sagittal blade cartridge of this invention includes a guide bar that is formed with three plates. There is a top plate and a bottom plate opposite the top plate. Between the top and bottom plate there is an inner plate. The inner plate is formed to have a curved head. The curved head functions as the boss around which the cartridge blade head pivots.

[0011] In many versions of the invention, the inner plate is formed to have a base that forms proximal end of the plate. Three tines extend forward from the base. There are two outer tines and an inner tine. The tines are laterally spaced apart from each other. The inner tine formed to have a curved head that functions as the pivot boss. When a cartridge with this type of guide bar is assembled, the drive links that pivot the blade head are disposed in the spaces between the inner tine and the outer tine.

[0012] In some versions of this invention, the outer tines extend distally forward of the inner tine. In these versions of the invention, the outer tines thus extend forward of the pivot boss. It should be appreciated that in these versions of the invention the base of the blade head is disposed between the spaced apart sections of the outer tine that are located forward of the pivot boss.

[0013] In versions of the invention where the outer tines extend forward of the inner tine, the outer tines may be formed with lobes that extend inwardly towards each other. These distal sections of the outer tine thus reinforce the guide bar so as to reduce the likelihood of the flexing of the guide bar.

[0014] In some versions of the invention the plates forming the guide bar are three distinct plates. These plates are welded or otherwise secured together to form the guide bar. In some versions of the invention two or more of the plates are machined, molded or otherwise formed as a single unit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The invention is pointed out with particularity in the claims. The above and further features and benefits of this invention are understood from the following Detailed Description taken in conjunction with the accompanying drawings in which:

[0016] FIG. 1 is a perspective view of a saw and surgical sagittal blade cartridge assembly of this invention;

[0017] FIG. 2 is an exploded view of the cartridge of this invention;

[0018] FIG. 3 is a plan view of the inner plate of the cartridge of this invention;

[0019] FIG. 4 is a plan view of an alternative inner plate of a cartridge of this invention; and

[0020] FIG. 5 is a plan view of an alternative assembly that may be integral with the cartridge of this invention.

DETAILED DESCRIPTION

[0021] FIG. 1 depicts an assembly 30 of this invention. Assembly 30 includes a saw 32 to which a surgical sagittal blade cartridge 60 is releasably attached. Saw 32 includes a body or housing 34. In the depicted version of the invention, housing 34 is pistol shaped. The head 38 is shaped to receive the proximal end of cartridge 60. (Here, “proximal” is understood to mean towards the surgeon holding the saw 32; away from the site to which the cartridge 60 is applied. “Distal” is understood to mean away from the surgeon holding the saw; towards the site to which the cartridge 60 is applied). A coupling rod 40, the head of which is seen, is slidably mounted to the saw head 38. When coupling rod 40 is in the run position, a portion of the rod presses against the cartridge to hold the cartridge to the head. When the coupling rod 40 is in the load position, the coupling rod 40 does not press against cartridge 60. This allows the cartridge 60 to be removed from the head and a new cartridge releasably

attached to the head. A wing nut 42 attached to the head moves the coupling rod 40 between the run and load positions.

[0022] A motor 48, represented by a phantom cylinder, is disposed inside the barrel of housing 34. Motor 48 is connected to a pair of drive pins 50, one identified, that are mounted to the head 38 to project above the surface on which the cartridge 60 is seated. The drive pins 50 are mounted to the head 38 to engage in opposed oscillatory motion. A trigger 52, located below the saw head 38, is the manually actuated member that is depressed to control the actuation of the saw. Not seen is the power supply that provides energization signals to the motor 48. Often this power supply is a battery or power cord that is attached to the base of grip portion of the saw housing 34.

[0023] The cartridge 60, as seen in FIG. 2, includes a guide bar 62 to which a blade 136 is attached. The blade 136 is mounted to and extends forward from the distal section of the guide bar 62. Drive links 112 extend proximally from opposed sides of the blade 136. The drive links 112 terminate at a location forward of the proximal end of the guide bar 62.

[0024] The guide bar 62 is a laminate structure that includes a bottom plate 64, an inner plate 76 disposed over the bottom plate 64 and a top plate 102 disposed over the inner plate 76. Inner plate 76 is thus sandwiched between the two outer plates, bottom plate 64 and top plate 102. Collectively, the plates are formed so that the guide bar 62 has a proximal section 63 that from the proximal end of the plate initially tapers outwardly and then tapers inwardly. Forward of the proximal section 63 the guide bar has a middle section 66 and a distal section 68. Plates 64, 76 and 102 are formed so that the opposed sides of the guide bar that form the sides of the middle section and distal sections 68 are parallel. The width across the bar middle and distal sections 66 and 68, respectively, is less than the width across the outwardly tapered portions of the bar proximal section 63.

[0025] Immediately forward of the proximal end of the plate, the bottom plate 64 is formed to have two laterally spaced apart openings 67 (one identified). Openings 67 in semi-oval in shape. Each opening 67 has a curved perimeter directed towards the proximal end of the plate and a straight perimeter directed towards the distal end of the cartridge. Forward of openings 67, the bottom plate is formed to have a keyhole shaped opening 69. Opening 69 is shaped so the widest width portion of the opening can receive a head portion of the saw coupling rod 40. Opening 69 is centered along the proximal-to-distal longitudinal axis along the guide bar 62. The bottom plate 64 is further formed so the narrow width portion of the opening 69 is located distally forward of the wide width portion of the opening.

[0026] The bottom plate 64 is further formed so that proximal to the distal plate there are two openings 70, one opening identified. Each opening 70 is longitudinally aligned with a separate one of the openings 67. Openings 70 are similar in shape to openings 67 and reverse in orientation relative to openings 67. Openings 70 are thus orientated so the curved ends of the openings 70 face distally. The straight ends of the openings 70 face the proximal end of plate 64. Forward of openings 70, the bottom plate 64 is formed with two elongated slots 72, one slot identified, that extend through the plate. Each slot 72 extends forward from a proximal end located close to the end of the adjacent opening 70 closest to the longitudinal axis along the plate

64. Forward from the proximal end, the slot **72** curves outwardly towards the side edge of the plate. Slots **72** terminate at locations spaced proximally away from the distal end of the plate **64**.

[0027] Inner plate **76**, as seen best in FIG. 3, is formed to have a base **78** that forms the proximal end of the plate. Three laterally spaced apart tines **80**, **86** and **99** extend forward from the base **78**. Tines **80** and **99** are the outer tines. The outer surfaces of tines **80** and **99** are the outer surfaces of the plate **76** that form sections of the outer side surfaces of the guide bar **62**. Outer tines **80** and **99** thus have proximal sections that extending forward from plate base **78** taper first inwardly and then outwardly. The outer tines **80** and **99** are symmetrically located relative to the longitudinal axis through the guide bar **62**. Outer tines **80** and **99** are further shaped to be mirror images each other. Adjacent the distal end of each tine **80** and **99**, each tine is shaped to have a tab **82**, one identified, that extends inwardly to the longitudinal center axis of the plate **76**. Proximal to the tab **82**, each tine **80** and **99** is shaped to have a lobe **84**, one lobe identified, that extends inwardly towards the longitudinal center axis of the plate **76**. Moving proximally to distally along the tine **80** or **99**, the associated lobe **84** first curves inwardly and then curves outwardly. The inner plate **76** is formed so that lobes **84** are spaced proximally away from tabs **82**.

[0028] Tine **86**, the inner tine of inner plate **76**, is centered on the longitudinal axis of the plate. Tine **86** is formed to have a keyhole shaped opening **90**. The inner plate **76** is shaped so that opening **90** is identical in shape and positioned to be in registration with opening **69** of bottom plate **64**. The inner tine **86** is of constant width except for the distal end of the tine. At the most distal end, tine **86** has a head **95** with a distally directed face that is curved. Between the constant width section of the tine and the head **95** the tine has a neck **94**. The neck **94** has opposed side surfaces that curve inwardly to head **95**.

[0029] Given that the tines **80**, **86** and **99** are spaced apart from each other, there is elongated, closed end slot **96** between each of the outer tines **80** and **99** and the inner tine **86**. The proximal end of the slot **96** is the closed end of the slot. When cartridge **60** is assembled, each slot **96** is disposed over a separate one of the openings **67** and **70** in the bottom plate **64**. The inner plate **76** is further formed so that the proximal end portion **98** of each slot **96** has a shape substantially equal to the shape of bottom plate openings **67**. Thus, the lateral width of the proximal end portion **98** of each slot **96** is greater than the width of the slot **96** distally forward of the proximal section.

[0030] Returning to FIG. 2, it is observed that top plate **102** is shaped to have an outer perimeter substantially identical to that of bottom plate **80**. Forward of the proximal end of the top plate **102**, the plate **102** is shaped to have two openings **104**, one opening identified. Openings **104** are identical in shape and positioned to be in registration with bottom plate openings **67**. Forward of openings **104**, the top plate is formed to have an oval shaped opening **106**. Top plate **102** is formed so that when the guide bar **60** is assembled opening **106** is disposed over and extends around inner plate opening **90**. The top plate **102** is further formed to define two openings **108**, one opening identified. Openings **108** are formed to be identical in shape and in registration over the bottom plate openings **70**.

[0031] Blade **136** is formed to have a centrally located web **142**. The blade **136** is formed so that web **142** has a

thickness that is no greater than the thickness of inner plate **76**. The web **142** of the blade **136** seen in FIG. 2 is generally rectangular in shape. When blade **136** is in the centered position within the guide bar **62** the major axis of the web **142** is collinear with the major axis of the guide bar. Extending proximally from web **142** and away from the longitudinal axis of the web. Blade **136** is shaped to have two feet **138**, one foot identified. Feet **138** have the same thickness of web **142**. Each foot **138** extends to the open end of the adjacent slot **96** internal to the inner tine **86**. An opening **140** extends top to bottom through each foot **138**. Between the feet **138** blade **136** is formed to have a curved, proximally directed face **144**. The blade **136** is shaped so that blade face **144** can seat against and pivot around the head **95** integral with the inner tine **86**. The blade feet **138** and web **142** are sometimes referred to as the base of the blade **136**.

[0032] The distal end of the blade web **142** extends to the distal end of the guide bar **60**. A head **146** is integrally with and extends forward of the distal end of the web **142**. Head **146** is formed with teeth **148**. The blade **136** is further formed so that head **142** has a thickness greater than that of the web **142**. More particularly, the head is formed to have a thickness so that the kerf formed by the cutting action of blade **136** is sufficient to receive the guide bar **60**.

[0033] A drive link **112** is disposed in each of the slots **96** internal to the guide bar **62**. Each drive link **112** is in the form of an elongated flat strip of metal. The drive links **112** are formed so that, at the proximal end of each link, there is a foot **114**, one foot identified. Each foot **114** is formed to have a center located through hole **116**, one opening identified. Through holes **116** are dimensioned so that the associated drive rod feet **114** can be fitted over the saw head drive pins **50**. Each drive link **112** is shaped so that foot **114** has a thickness that is greater than the thickness of the metal strip forming the main body of the link. The thickness of the feet **114** is typically no greater than the thickness of the guide bar **62**. When the cartridge **60** is assembled, the feet **114** generally seat in the proximal end portion **98** of the associated slot **96**. The portions of the feet **114** that project outwardly from the main body of each link **112** seat in bottom plate openings **67** and top plate openings **104**.

[0034] Two fingers **118** extend distally forward from the distal end of the main body of each drive link **112**, one finger identified. Fingers **118** overlap and are spaced apart from each other. More particularly, fingers **118** are spaced apart from each a sufficient distance so that a blade foot **138** can seat between each pair of fingers. Each finger **118** is formed with a hole **120**. The holes **120** of each pair of fingers **118** are in registration with each other.

[0035] As part of the process of assembly a cartridge **60** of this invention, the blade **136** is positioned so that each blade foot **138** is disposed between a pair of drive link fingers **118**. A pivot pin **122**, one pin identified, that extends through the finger holes **120** and the blade foot opening **140** pivotally holds the foot **38** to the associated drive link **112**.

[0036] During the assembly of the cartridge **60**, the inner plate **76** is initially welded or otherwise secured to the bottom plate **64** or to the top plate **102**. After this operation is completed, the drive links-and-blade assembly is positioned so that the drive links **112** are seated in slots **96** and the curved proximally directed face **144** of blade **136** is seated against the curved distally directed face of tine head **95** integral with the inner plate **76**. The top plate **102** or

bottom plate **64** is then welded or otherwise secured to the exposed face of the inner plate **76**. At the completion of the process of assembling the cartridge **60**, the drive link feet **114** seat in plate openings **67** and **104**. The drive link fingers **118** seat in openings **70** and **108** formed, respectively in the guide bar bottom plate **64** and top plate **102**. Blade head **142** is located immediately forward of the distal end of the guide bar **62**.

[0037] From FIGS. **1** and **2** it can be seen that cartridge **60** includes two parallel ribs **150**. Ribs **150** extend upwardly from the outer surface of the bar top plate **102**. The ribs are positioned so each rib is aligned with the longitudinal axis of a separate one of the openings **104**. Ribs **150** extend forward from a location approximately **2** mm forward of the openings **104**. Each rib **150** terminates at a location approximately **10** mm forward of plate opening **106**. Ribs **150** are formed separate from the top plate **102**. The rib **150** are welded or otherwise permanently secured to the rest of cartridge **60**.

[0038] As discussed in PCT Pub. No. WO 2013/016472A1/US Pat. Pub. No. 2014/0163558, explicitly incorporated herein by reference, once assembly **30** is prepared for use, cartridge ribs **150** are disposed over saw head **38**. Ribs **150** reduce the flexing of the section of cartridge **60** disposed over the saw head **38**.

[0039] To prepare assembly **30** of this invention for use, the cartridge **60** is fitted to the saw head **38**. As a result of this over this attachment, each drive pin **50** is seated in a separate one of the holes **116** formed in a drive link foot **114**. Coupling rod **40** extends through the overlapping openings **69**, **90** and **106** of the cartridge. The coupling rod **40** is lowered over the guide bar so the head of the coupling rod (not identified) presses against the surface of inner plate **72** exposed through top plate opening **106**. This press action holds the cartridge **60** to the saw head **38**. When the cartridge **60** is secured to the drive head, the drive pins and drive links cooperate to urge the blade **136** proximally. The proximally directed face **144** of the blade is urged against the curved face of head **95** internal to the cartridge **60**.

[0040] Assembly **30** is actuated by depressing trigger **52**. This results in the actuation of the motor **44**. The actuation of the motor **44** results in the back and forth oscillation of the drive pins **50**. The movement of the drive pins **50** causes the drive links **112** to engage in opposed back and forth reciprocation of the drive links. The opposed back and forth motion of the drive links **112** causes the blade to pivot back and forth around the head **95** internal to the guide bar **62**. The pivoting action of the blade teeth **148** causes the teeth to cut the tissue against which the cartridge is pressed.

[0041] During the course of advancing the cartridge **60**, the cartridge is exposed to resistive forces. The inner plate **76** provides structural strength to the guide bar **62**. This structural strength resists the extent to which the bar **62** would otherwise flex when exposed to these resistive forces. Further reinforcement of the guide bar **62** is provided by the sections of the outer tines **80** and **99** that extend forward of the head **95** of the inner tine **86**. Tabs **82** and lobes **84** provide structural strength to the guide bar at the distal portion of the guide bar. This is the portion of the guide bar initially exposed to the resistive forces. The presence of tabs **82** and **84** thus further reduces the likelihood that the distal portion of the guide bar will skive or dive. The prevention

of the skiving or diving of this portion of the guide bar **62** reduces the likelihood that the cartridge **60** as whole will skive or dive.

[0042] A further feature of this invention is that the drive links **112** are, on both sides, encased in the inner plate **76**. This means that, if a surgeon holds or touches the sides of the guide bar when the cartridge is actuated, the surgeon's fingers do not come into contact with the reciprocating driving links **112**. At a minimum, this makes it essentially impossible for the drive links to, when moving, tear the glove off the surgeon's fingers. Still another benefit of this construction of the invention is that it facilitates the efficient welding of the side portions of plates **64**, **76** and **102**. This side welding of the plates **64**, **76** and **102** so as to form side welds along the opposed sides of the guide bar **62** serves to strengthen the guide bar.

[0043] FIG. **4** is a plan view of an alternative inner plate **160** that can be part of guide bar of a cartridge of this invention. Inner plate **160** has the base **78** of the first described inner plate **76**. Outer tines **162** and **170** extend forward from the base **78** and are spaced laterally away from the inner tine **86**. The proximal portions of outer tines **162** and **170** are identical in shape to the proximal portions of tines **80** and **99**. The distal portion of each tine **162** and **170** is only formed with a single member that protrudes inwardly towards the longitudinal axis of the plate **160**. This single protrusion is a lobe **164**. Extending proximal to distally along the tine **162** or **170** the lobe extends outwardly from the tine (towards the plate longitudinal axis) from a position slightly proximal to the distal end of the head **95** integral with the inner tine **88**. The lobe **164** curves such that where the lobe has a maximum thickness is location forward of head **95**. From the position of the maximum thickness, the lobe curves inwardly towards the outer surface of the tine **162** or **170**. The distal end of each lobe **164** is the distal end of the tine **162** or **170** with which the lobe is integral.

[0044] Inner plate **160** is formed with an inner tine **165**. Inner tine **165** is similar in shape to the previously described inner tine **86**. A difference between the two tines is that proximal to the neck **95**, inner tine **165** has a taper. Thus extending proximally from neck **95** the width of the tine **165** increases.

[0045] Inner plate **160** is well suited as the inner plate of a guide bar that is part of cartridge that includes a blade that has a relatively wide web. With this type of cartridge, it may be difficult to provide the tabs **82** of cartridge **60** since the presence of the tabs might interfere with the back and forth oscillations of the web. With a cartridge including lobes **164** the lobes provide the guide bar with the structural strength adjacent in the distal portion of the guide bar that is useful for reducing skiving and diving.

[0046] FIG. **5** illustrates alternative components of a cartridge of this invention. Illustrated here is an inner plate **180**. Inner plate **180** has the base **78** and inner tine **86** of the first described inner plate **76**. Inner plate **180** has opposed outer tines **182** and **197** that are mirror images from each other. Each tine **182** is formed to have a single lobe **184**. Inner plate **180** is formed so that each lobe **184** extends inwardly from the associated tine **182** or **197** at a location distally forward of the tine head **95**. Each lobe **184** essentially extends perpendicularly away from the tine **182** or **197**. Forward of where the tine **184** extends perpendicularly to the longitudinal axis of the inner plate **180** the lobe starts to taper outwardly away from the longitudinal axis. The distal end of

each lobe **184** essentially is the distal end of the tine **182** or **197** with which the lobe is integral. The side to side thickness of the lobes proximal to the distal end of plate **180** is greater than the side to side thickness of the tines **182** and **197** proximal to the lobes.

[0047] The inner plate is shown as having a number of through holes, one in the base, one in the inner tine **86** and one in each of the lobes **184**, (holes not identified). These holes are present for manufacturing reasons.

[0048] A drive link **196** is disposed in each slot between the inner tine **88** and the laterally spaced outer tines **182** and **197**. Each drive link has the main body and foot **114** of the first described drive link **112**. At the distal end each drive link **196** has a head **198**, one head identified. Each head **198** is formed have teeth **199**, one set of teeth identified. The drive link teeth **199** are spaced apart from each other along proximal to distal longitudinal axis of the cartridge with which the links **96** are integral.

[0049] A blade **202** is disposed between tine lobes **184**. Blade **202** has a web **210**. Two legs **206**, one leg identified, that are integral with the web **206** extend proximally from the web. Legs **206** are spaced apart from each other so tine head **95** can seat between the legs. The blade **202** is formed so that teeth **204** extend outwardly from legs **206**, two teeth identified. Teeth **204** are dimensioned to engage the teeth **199** integral with the adjacent drive link **196**. Blade **202** is further formed to have a curved proximally directed face **208** that is located between legs **206** at the distal end of web **210**. Face **208** is similar to face **144** of blade **136**.

[0050] Blade web **210** extends to the distal end of the guide bar. A head **212** is integral with and located forward of the distal end of web **210**. Head **210** is functionally the same as blade head **146**. Teeth **148** extend forward of head **210**.

[0051] Also seen in FIG. **5** is a portion of the underlying bottom plate **220**. Bottom plate **220** is similar in structure to previously described bottom plate **64**. Specifically seen are the slots **72** formed in the bottom plate.

[0052] When a cartridge having the components of FIG. **5** is assembled, the components are arranged so that blade teeth **204** engage the teeth **198** integral with the driver links **196**. The cartridge is used in the same manner in which the previously described cartridge **60** is used. When this cartridge is used, the reciprocal motion of the drive links **196** is transferred to the blade by the engagement of teeth **198**. As a result of this engagement the longitudinal back and forth reciprocation of the drive links causes the blade **202** to pivot back and forth around the tine head **95**.

[0053] It should be understood that the components of the cartridge of FIG. **5** are constructed so that outer tines **182** and **197** restrain the outward lateral movement of the adjacent heads **198** of the drive links **196**. More specifically the outer side surfaces of the drive link heads **198** press against the side surfaces of the adjacent drive links **196**. This restraining of the motion of the drive link head **198** ensures that, as the links reciprocate to pivot the blade **202**, the pivoting movement of the blade legs **206** push the drive link heads **198** away from the adjacent teeth **204**. If this action was allowed to occur, it could result in the drive link teeth **199** disengaging from the blade teeth **204**.

[0054] The above is directed to specific versions of the invention. Alternative versions of the invention may have features different from what has been described.

[0055] For example, the various features of the different versions of the invention can be combined.

[0056] Likewise not all versions of the invention may have all the described features. There may not be a requirement that in all versions of the invention the outer tines extend forward of the inner tine. In versions of the invention where the outer tines have distal sections that are located forward of the inner tine, it may not be necessary to provide the outer tines with inwardly extends lobes.

[0057] Not all versions of the invention may include ribs **150**. In some versions of the invention the ribs may be stamped or molded or otherwise integrally formed with the top plate.

[0058] Likewise, in some versions of the invention, the inner plate **76** may be wholly or partially formed with one or both of the bottom plate **64** or top plate **102**. Thus, in these versions of the invention, once a blank is formed, the blank is machined to define the slots in which the drive rods are seated and that define the perimeter of the tines. Alternatively, the opening-and slot-defining portion of the guide bar may be formed by molding.

[0059] In some versions of the invention, a single drive link may be all that is needed to pivot the blade head. In some versions of the invention the one or more drive links may not be parallel to the longitudinal axis through the cartridge. Thus in these versions of the invention, the openings in the guide bar through in which elements of the one or more drive links are seated likewise may not be aligned on line that are parallel to the longitudinal axis through the cartridge.

[0060] In versions of the invention in which the at least one drive link and the blade are provided with complementary teeth, the guide bar may have a structure different from what has been described. Specifically the guide bar may be formed so that head are which the blade head is not an integral part of one of the plates forming the bar. In these versions of the invention, the structure around which the blade pivots may be a pin mounted to or integral with at least one of the plates that form the bar.

[0061] In some versions of the invention two or all three of the plates that form the guide bar may not be three distinct plates that are welded or otherwise secured together. In these alternative versions of the invention, the plural plates are machined or molded together as a single unit.

[0062] The various shapes of the elements may also vary from what has been described.

[0063] Accordingly, it is an object of the appended claims to cover all such variations and modifications that cover the true spirit and scope of the invention.

What is claimed is:

1. A surgical saw cartridge for oscillating a blade, the surgical saw cartridge comprising:

a guide bar including a proximal end and a distal end, the guide bar comprising:

two outer plates; and

two outer tines spaced apart from one another, each of the two outer tines located between the two outer plates;

an inner tine being disposed between the two outer tines, the inner tine is formed to define a head and defining an opening in registration with an opening of one of the two outer plates; and

a blade coupled to the guide bar, the blade formed with teeth located distal to the guide bar and configured to contact and pivot about the head of the inner tine.

2. The surgical saw cartridge of claim 1, further comprising a base that forms the proximal end of an inner plate; wherein each of the two outer tines and the inner tine extend distally from the base.

3. The surgical saw cartridge of claim 1, wherein the two outer tines are mirror images of one another.

4. The surgical saw cartridge of claim 1, wherein at least a portion of the blade is located between the two outer tines.

5. The surgical saw cartridge of claim 1, wherein the two outer tines are symmetrically located relative to a longitudinal axis through the guide bar.

6. The surgical saw cartridge of claim 2, wherein the two outer plates and the inner plate are three separate plates that are secured together to form the guide bar.

7. The surgical saw cartridge of claim 1, wherein an outer surface of each of the two outer tines forms a section of an outer side surface of the guide bar; and

wherein the guide bar includes a side weld formed along the section of the outer side surface of the guide bar that couples each of the two outer tines to each of the two outer plates.

8. The surgical saw cartridge of claim 1, further comprising at least one drive link moveably disposed between the two outer plates within a space between the inner tine and one of the two outer tines, the at least one drive link connected to the blade so that reciprocation of the at least one drive link results in pivoting of the blade around the head of the inner tine.

9. The surgical saw cartridge of claim 1, wherein the inner tine further defines an opening in registration with an opening of one of the two outer plates.

10. A surgical saw cartridge for oscillating a blade, the surgical saw cartridge comprising:

a guide bar including a proximal end and a distal end, the guide bar comprising:

two outer plates;

two outer tines extending distally from said proximal end of said guide bar, each of the two outer tines located between the two outer plates and spaced apart from one another;

an inner tine being disposed between the two outer tines and extending distally from said proximal end of said guide bar, the inner tine is formed to define a head; and

a blade coupled to the guide bar, the blade formed with teeth located distal to the guide bar and the blade configured to contact and pivot about the head of the inner tine.

11. The surgical saw cartridge of claim 10, wherein the inner tine further defines an opening in registration with an opening of one of the two outer plates.

12. The surgical saw cartridge of claim 10, further comprising a base that forms the proximal end of an inner plate; wherein each of the two outer tines and the inner tine extend distally from the base.

13. The surgical saw cartridge of claim 10, wherein the two outer tines are mirror images of one another.

14. The surgical saw cartridge of claim 10, wherein at least a portion of the blade is located between the two outer tines.

15. The surgical saw cartridge of claim 10, wherein the two outer tines are symmetrically located relative to a longitudinal axis through the guide bar.

16. The surgical saw cartridge of claim 12, wherein the two outer plates and the two outer tines are secured together to form the guide bar.

17. The surgical saw cartridge of claim 10, wherein an outer surface of each of the two outer tines forms a section of an outer side surface of the guide bar; and

wherein the guide bar includes a side weld formed along the section of the outer side surface of the guide bar that couples each of the two outer tines to each of the two outer plates.

18. The surgical saw cartridge of claim 10, further comprising at least one drive link moveably disposed between the two outer plates within a space between the inner tine and one of the two outer tines, the at least one drive link connected to the blade so that reciprocation of the at least one drive link results in pivoting of the blade around the head of the inner tine.

* * * * *