US 20250270815A1

(19) United States

(12) Patent Application Publication

Rudyan

(10) Pub. No.: US 2025/0270815 A1

(43) Pub. Date: Aug. 28, 2025

(54) EDGE FLASHING APPARATUS, AND A METHOD OF USING SAME

(71) Applicant: **Amir Rudyan**, Canoga Park, CA (US)

(72) Inventor: **Amir Rudyan**, Agoura Hills, CA (US)

(21) Appl. No.: **18/587,928**

(22) Filed: **Feb. 26, 2024**

Publication Classification

(51) **Int. Cl.**
E04D 13/15 (2006.01)
E04D 13/04 (2006.01)

(52) **U.S. Cl.**
CPC *E04D 13/15* (2013.01); *E04D 13/0459* (2013.01); *E04D 2013/0468* (2013.01)

(57) **ABSTRACT**

The present invention relates generally to an edge flashing apparatus, and a method of using same. The invention encompasses an edge flashing that is installed at an edge of a structure, such as, for example, a wooden deck, a roof, a building, etc. The edge flashing has a first or upper edge that is secured to the structure, while the second or lower edge is over and below the edge of the structure. For some applications, the second edge could also have a drip edge to allow the water or moisture to be directed in a certain direction. The edge flashing apparatus may have a coating of at least one layer of deck material or concrete, and at least one layer of at least one covering material or deck coating or waterproofing membrane or waterproofing system. The invention also provides a method of using the inventive edge flashing apparatus.

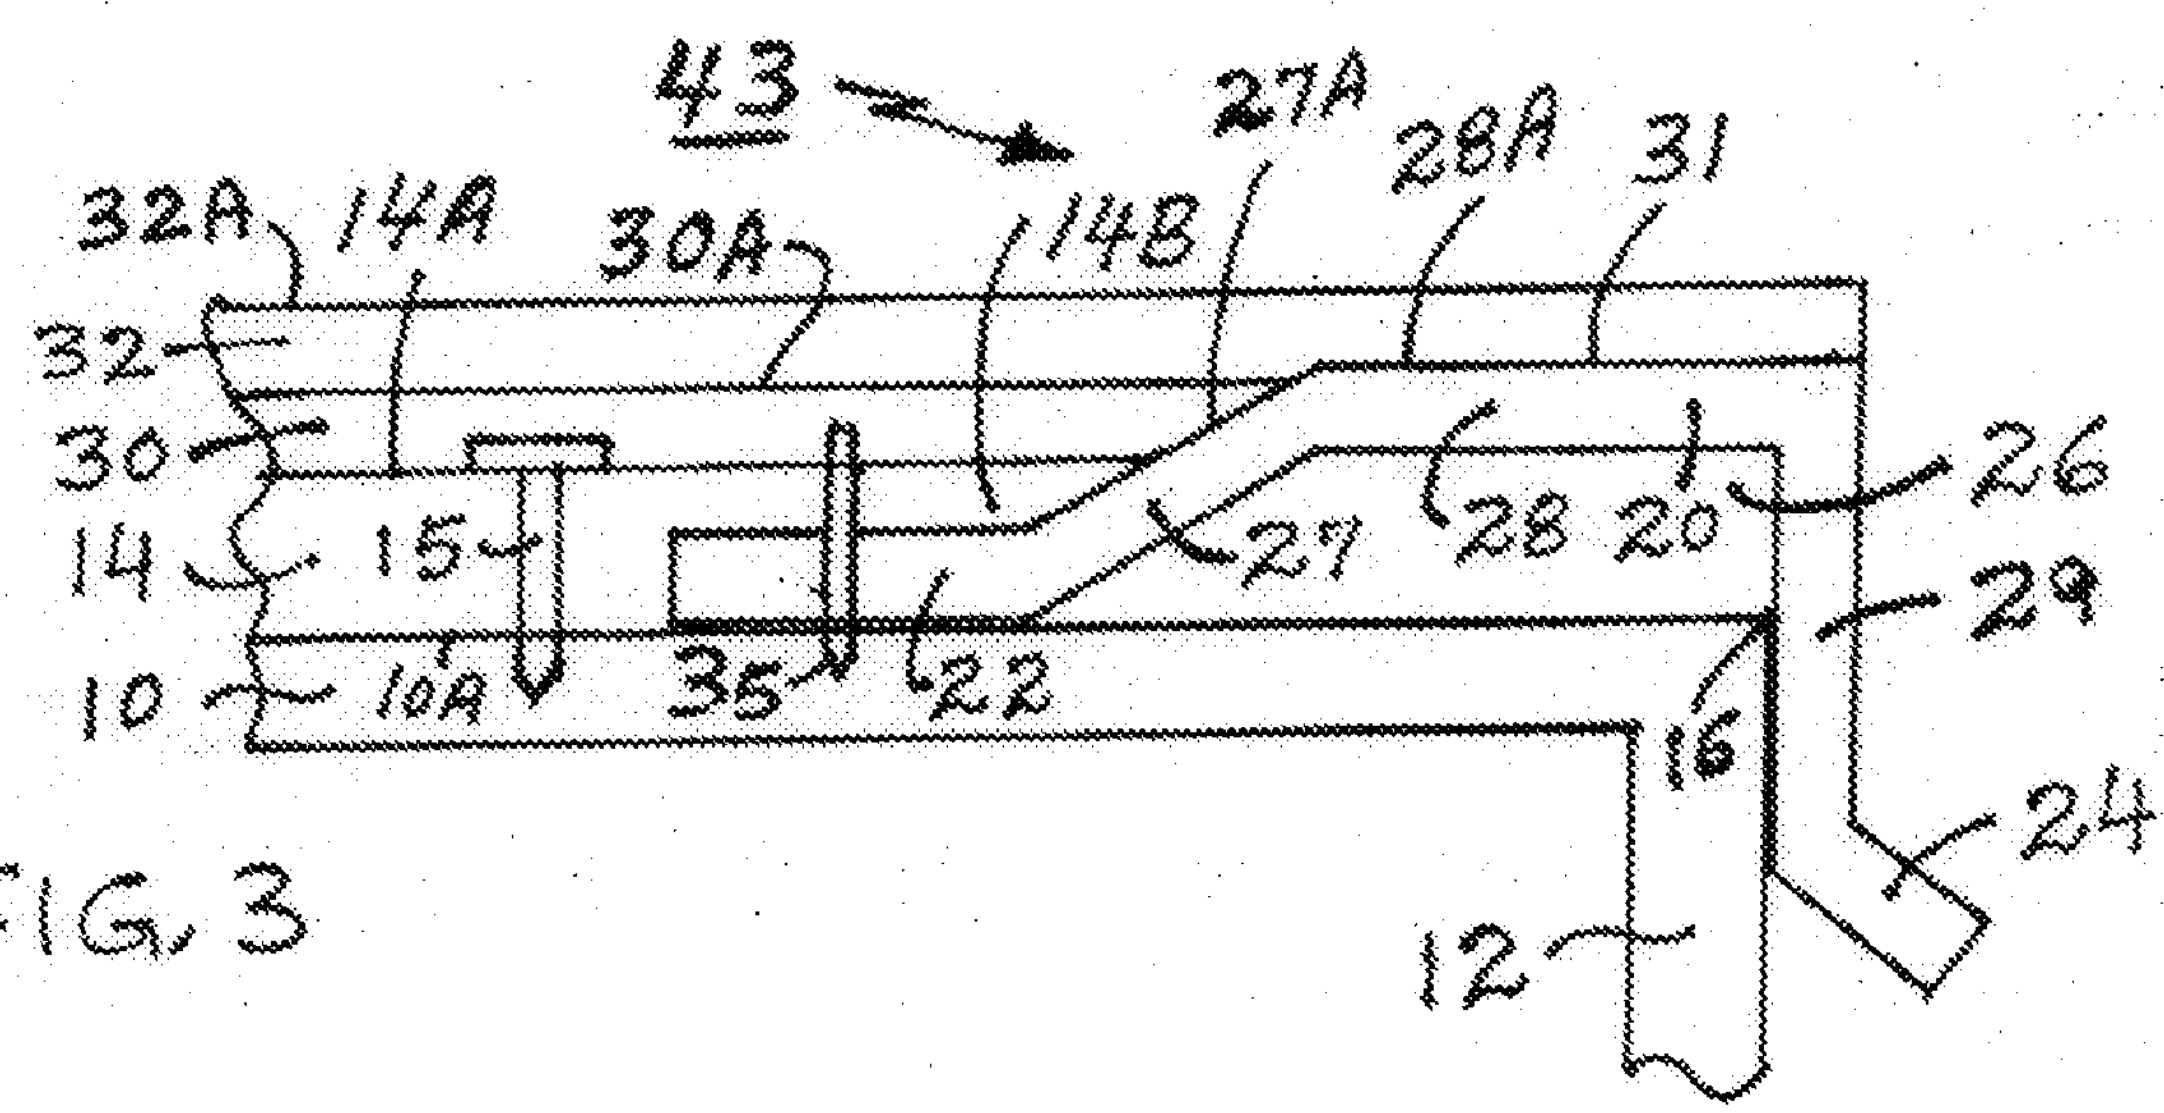

FIG. 3

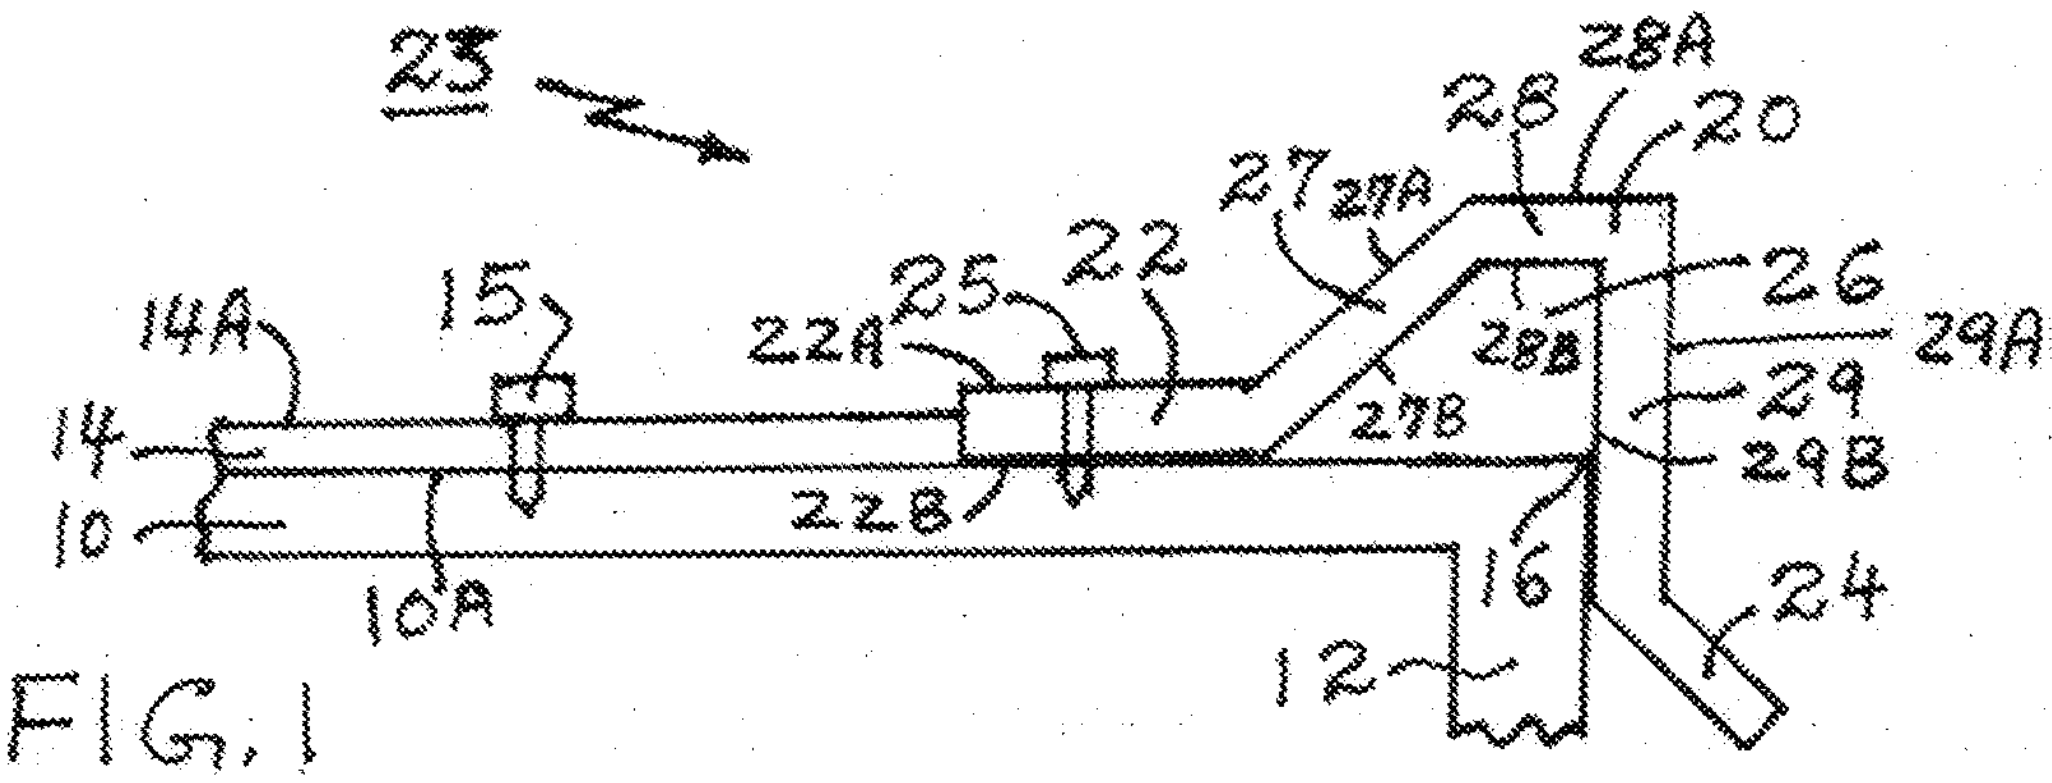

FIG. 1

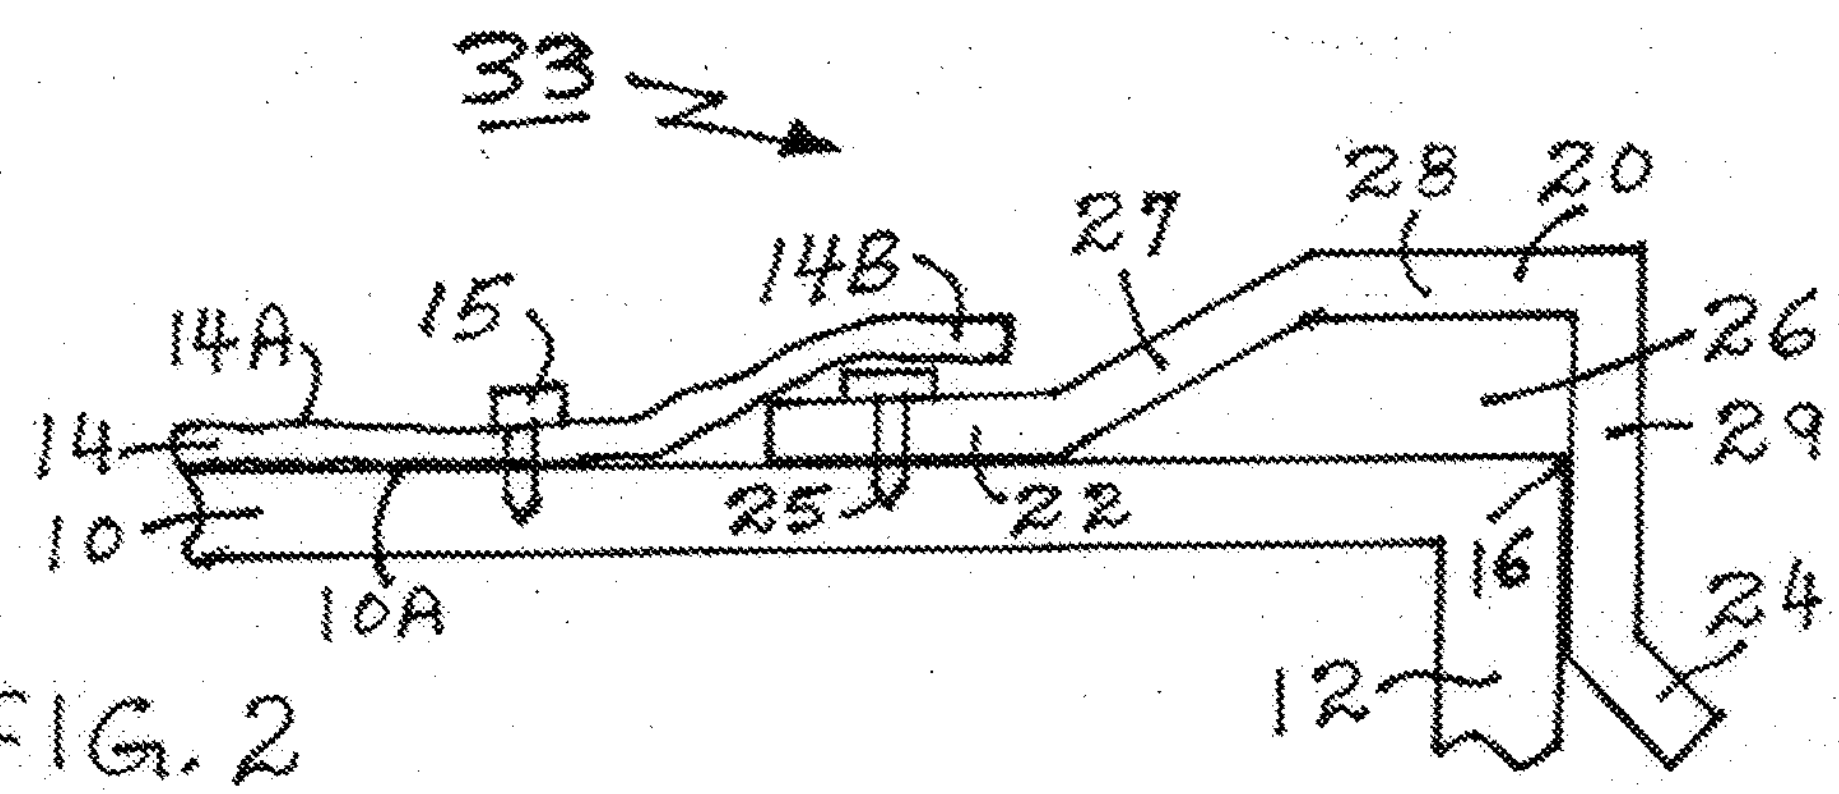

FIG. 2

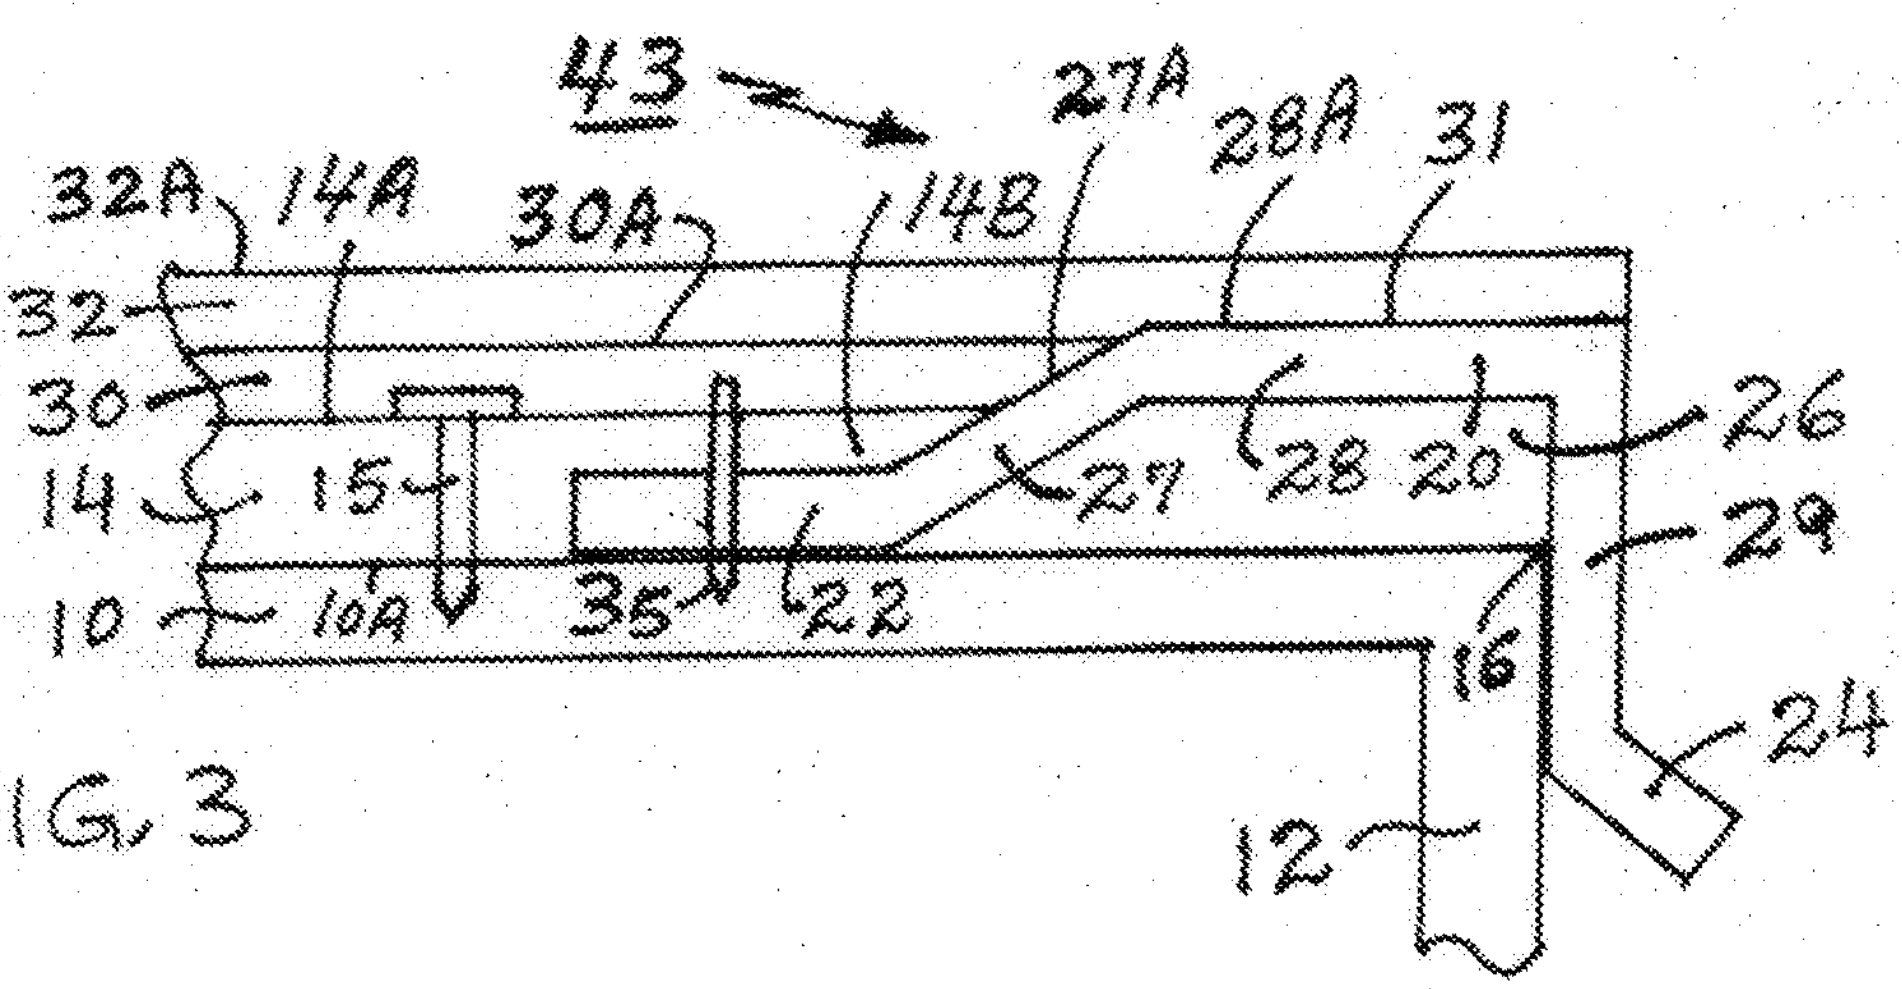

FIG. 3

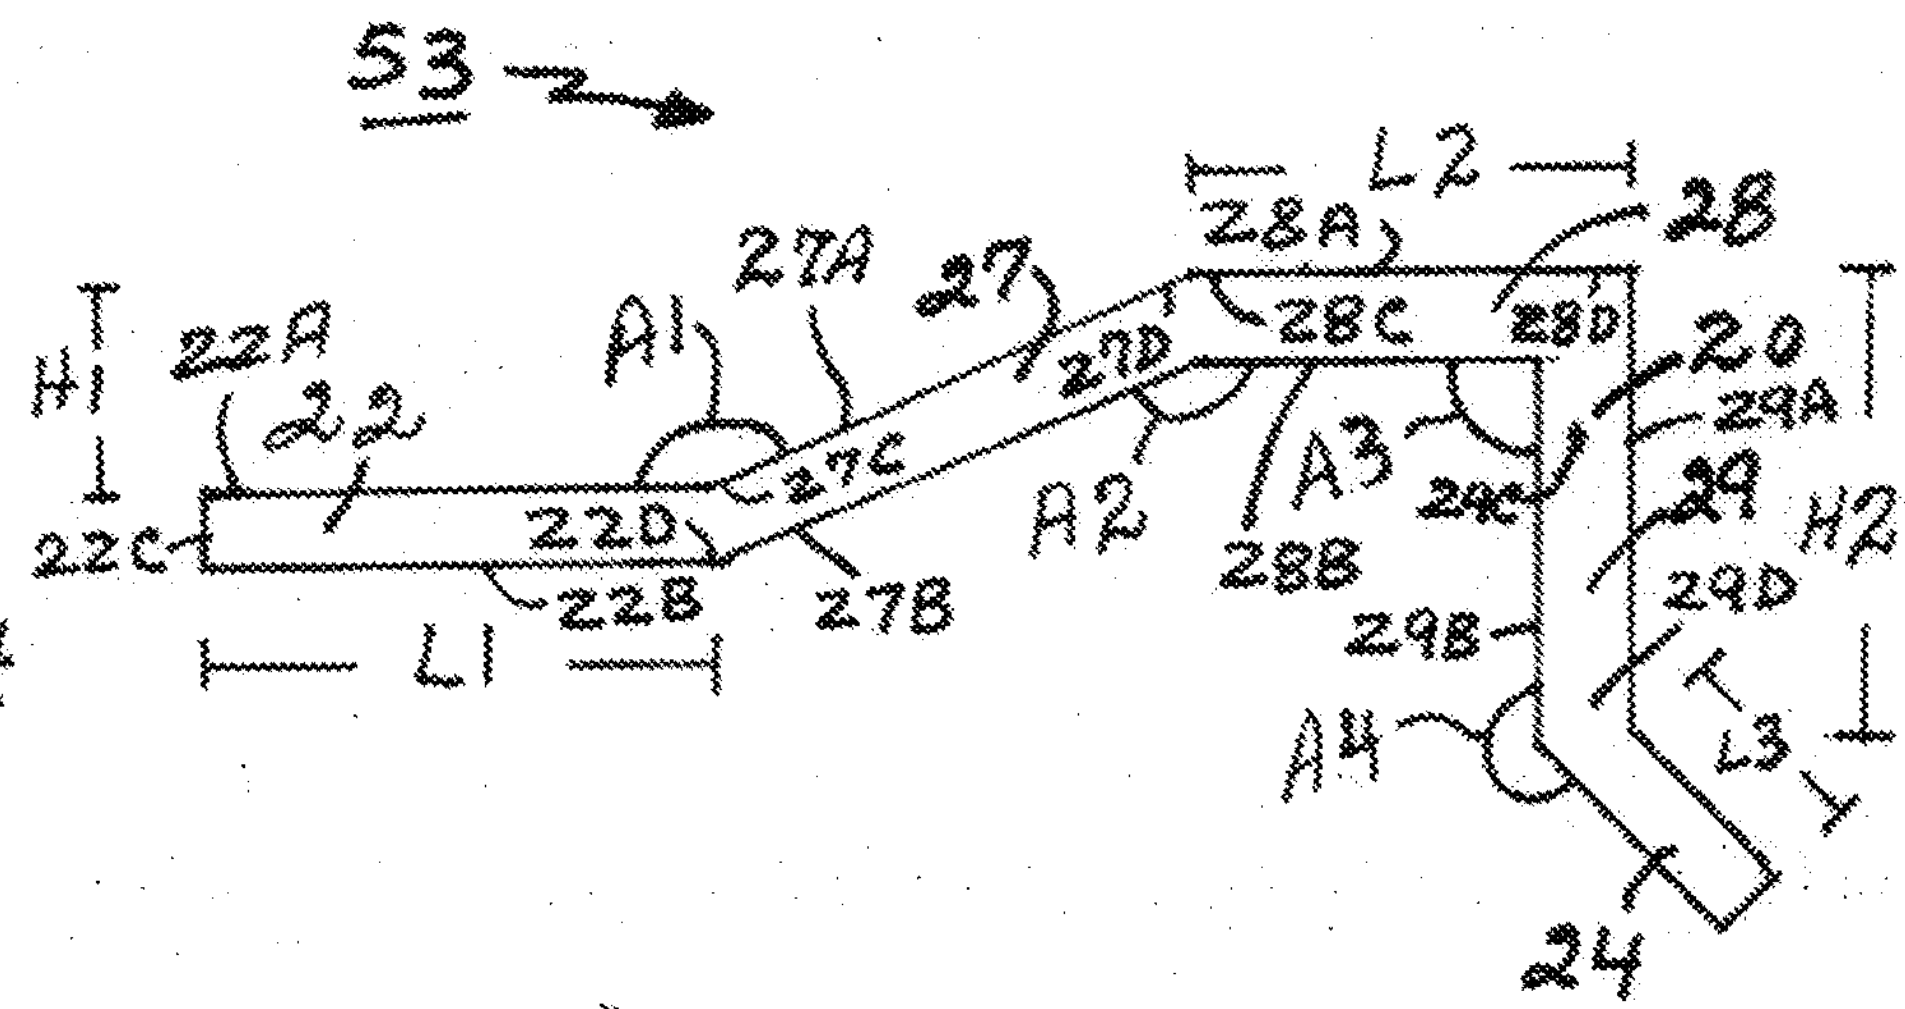

FIG.4

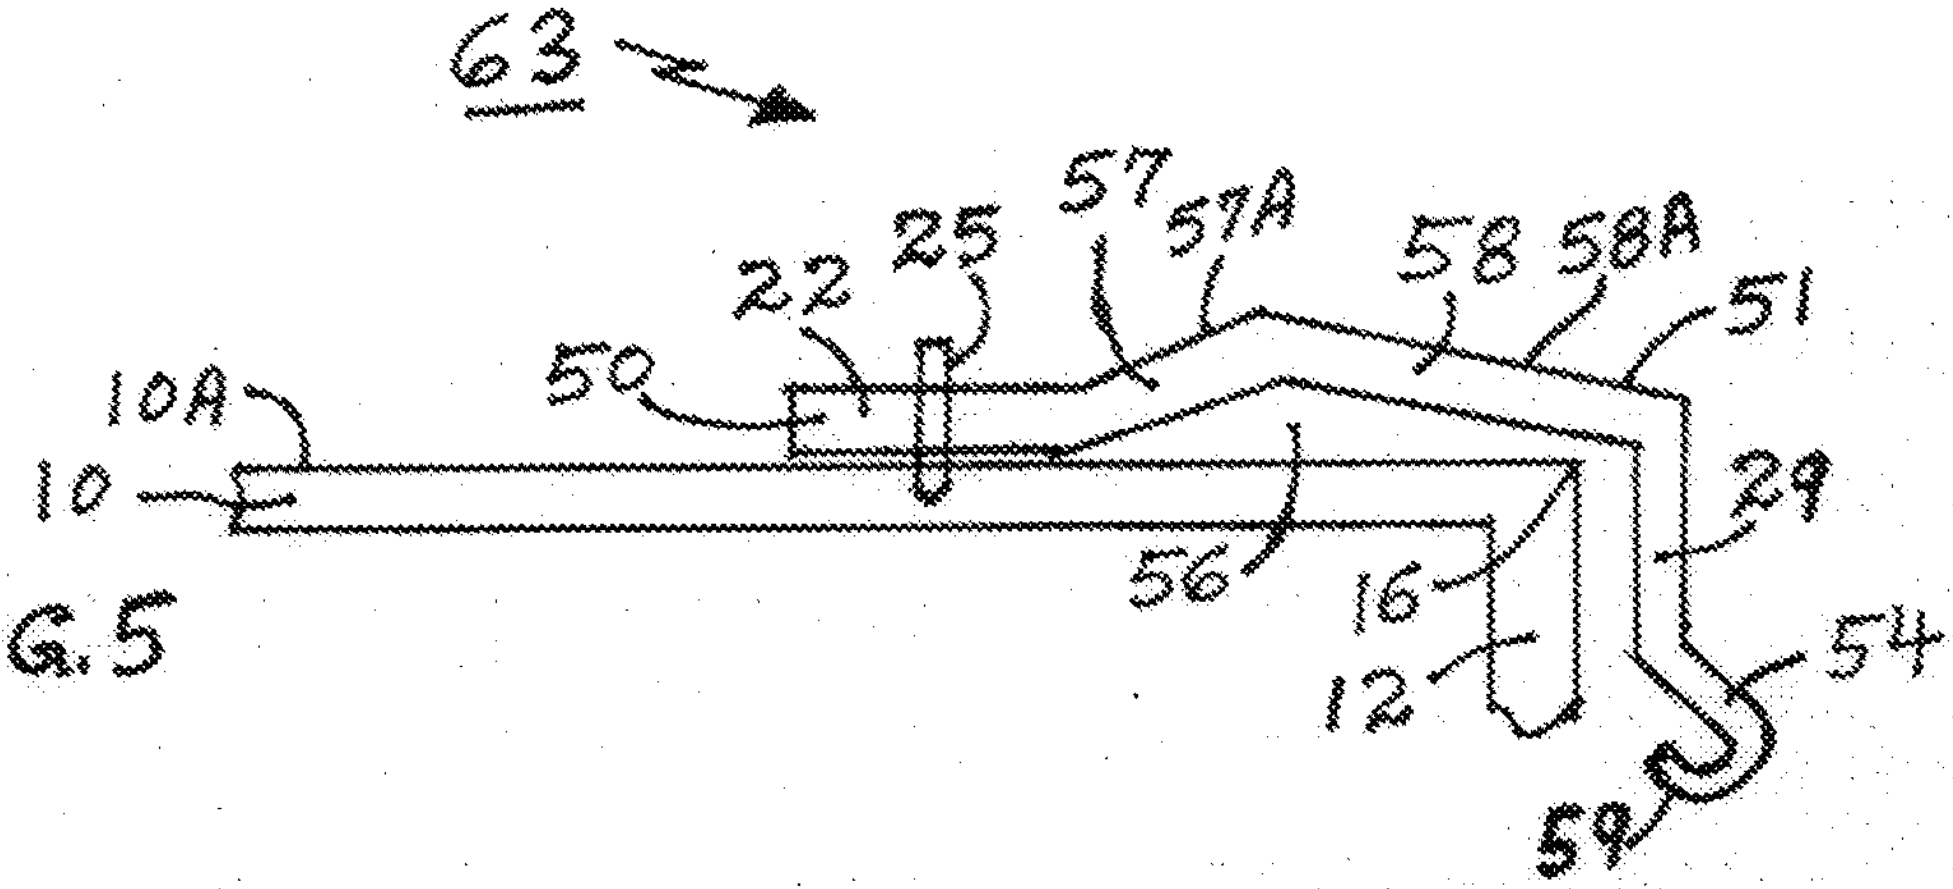

FIG.5

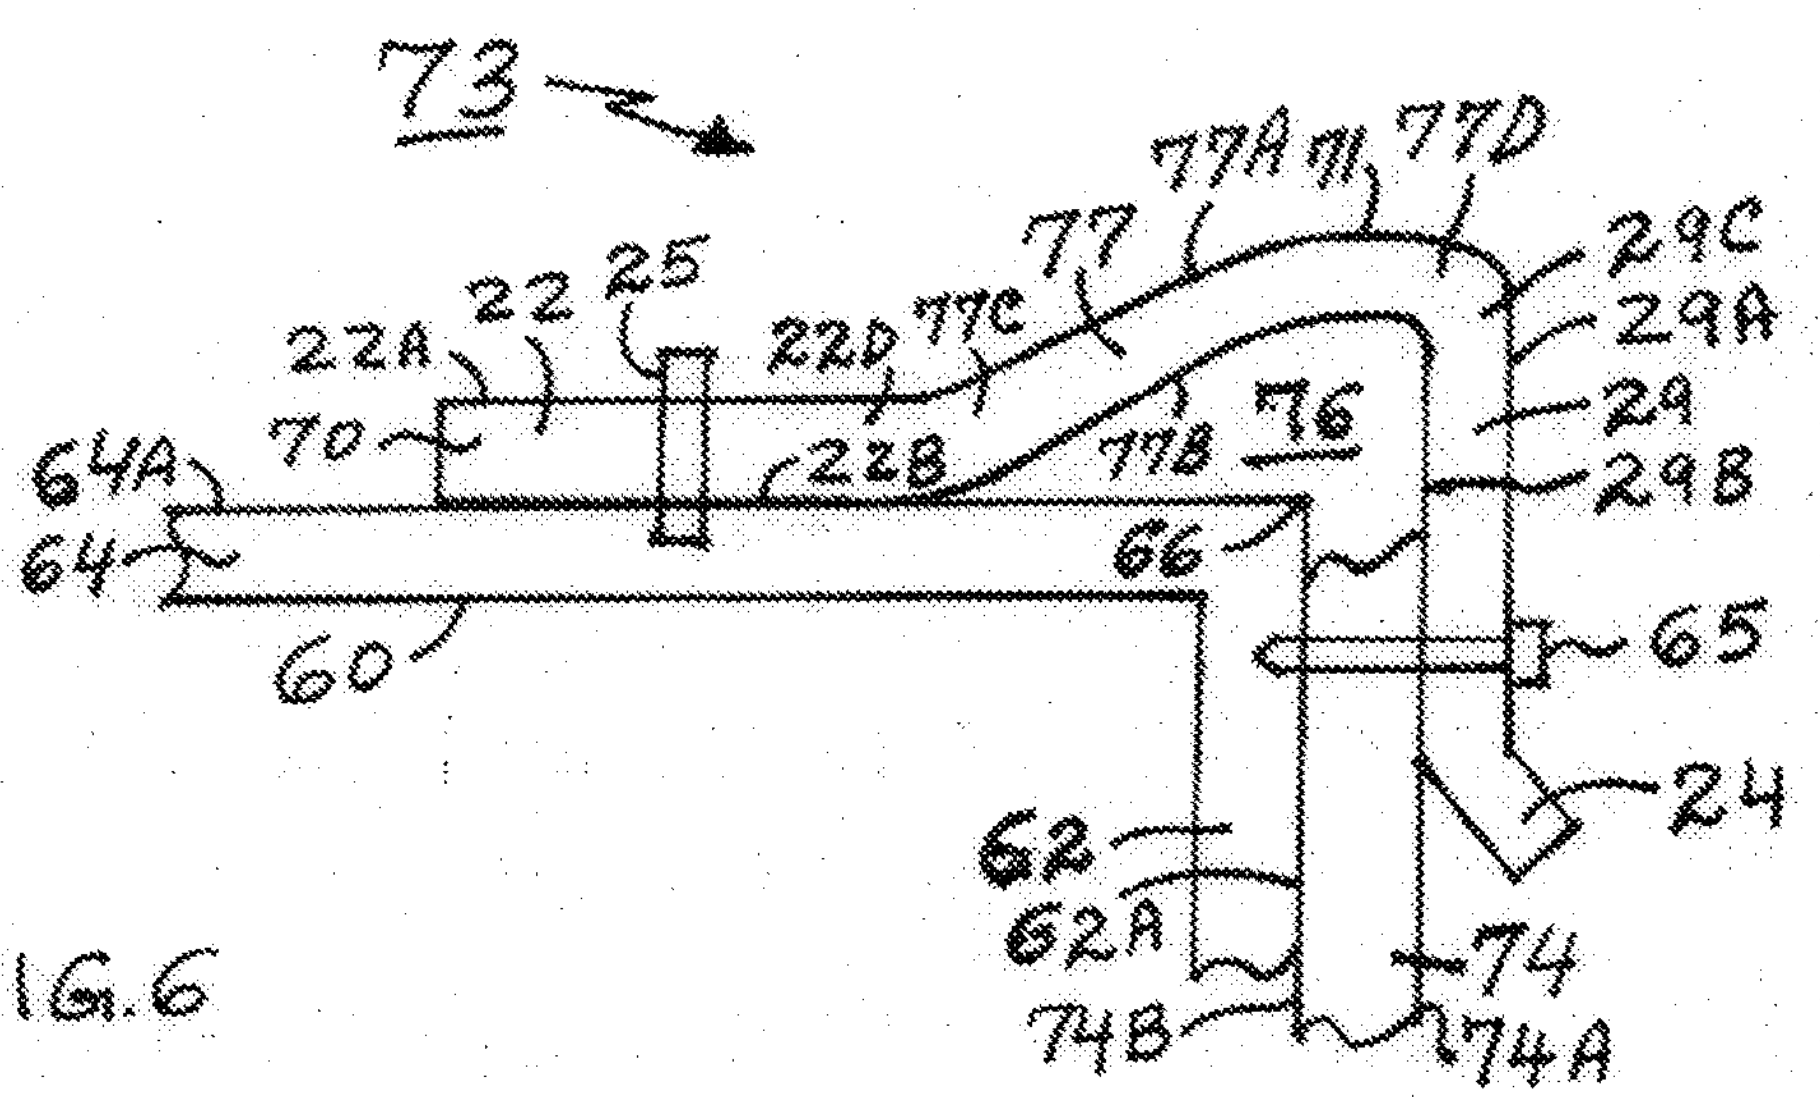

FIG.6

EDGE FLASHING APPARATUS, AND A METHOD OF USING SAME

FIELD OF THE INVENTION

[0001] The present invention relates generally to an edge flashing apparatus, and a method of using same. The invention encompasses an edge flashing that is installed at an edge of a structure, such as, for example, a wooden deck, a roof, a building, etc. The edge flashing has a first or upper edge that is secured to the structure, while the second or lower edge is over and below the edge of the structure. For some applications, the second edge could also have a drip edge to allow the water or moisture to be directed in a certain direction. The edge flashing apparatus may have a coating of at least one layer of deck material or concrete, and at least one layer of at least one covering material or deck coating or waterproofing membrane or waterproofing system. The invention also provides a method of using the inventive edge flashing apparatus.

BACKGROUND INFORMATION

[0002] The edge metals used with deck coatings or roofing systems are flashings which are installed at the open ends of exposed decks, such as, for example, a roof or a balcony, to properly seal the deck's edges from water penetrating into the structure or assembly.

[0003] Traditionally, there are two types of edge metals on decks when doing a deck coating application, one is called an edge metal flashing, and the second is called gravel stop flashing.

[0004] The edge metal flashing has a flat section that lays flat on the deck, and then the flashing is bent either straight down or have some sort of return, but eventually the flashing is bent downwards. At the end of the edge metal flashing there is a small bend facing outwards from the deck which is known as a drip edge.

[0005] The second type of flashing is called a gravel stop flashing which is similar to the edge metal flashing, except that it has a sharp bump at the edge to accommodate the thickness of the roofing material or membrane.

[0006] This invention improves on the deficiencies of the prior art and provides an inventive deck edge flashing apparatus, and a method of using same.

PURPOSES AND SUMMARY OF THE INVENTION

[0007] The invention is a novel edge flashing apparatus, and a method of using same.

[0008] Therefore, one purpose of this invention is to provide an edge flashing apparatus, and a method of using same.

[0009] Another purpose of this invention is to provide an edge flashing apparatus having a flashing flat bump that is higher than a flashing deck edge.

[0010] Yet another purpose of this invention is to provide an edge flashing apparatus where at least one layer of a metal mesh covers a portion of the edge flashing.

[0011] Still yet another purpose of this invention is to provide an edge flashing apparatus where at least one layer of concrete covers a portion of the flashing.

[0012] Yet another purpose of this invention is to provide an edge flashing apparatus where at least one layer of at least one covering material covers a portion of the flashing.

[0013] Therefore, in one aspect this invention comprises an edge flashing apparatus, comprising:

[0014] (a) an edge section having a substantially flat surface, and having a first edge end, and a second edge end;

[0015] (b) a sloped section having a substantially flat sloped surface, and having a first sloped end, and a second sloped end, and wherein said first sloped end is connected to said second edge end;

[0016] (c) a bump section having a substantially flat surface, and having a first bump end, and a second bump end, and wherein said first bump end is connected to said second sloped end;

[0017] (d) a straight edge section having a substantially flat surface, and having a first straight edge end, and a second straight edge end, and wherein said first straight edge end is connected to said second bump end; and

[0018] (e) wherein said bump section is at a height above said edge section, to form said edge flashing apparatus.

[0019] In another aspect this invention comprises an edge flashing apparatus, comprising:

[0020] (a) an edge section having a substantially flat surface, and having a first edge end, and a second edge end;

[0021] (b) a sloped section having a substantially flat sloped surface, and having a first sloped end, and a second sloped end, and wherein said first sloped end is connected to said second edge;

[0022] (c) a sloped bump section having a substantially flat surface, and having a first sloped bump end, and a second sloped bump end, and wherein said first sloped bump end is connected to said second edge;

[0023] (d) a straight edge section having a substantially flat surface, and having a first straight edge end, and a second straight edge end, and wherein said first straight edge end is connection to said second sloped bump edge; and

[0024] (e) wherein said sloped bump section is at a height above said edge section, to form said edge flashing apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] FIG. **1**, illustrates a side view of an inventive edge flashing apparatus, according to a first embodiment of the invention.

[0026] FIGS. **2**, illustrates a side view of an inventive edge flashing apparatus, according to a second embodiment of the invention.

[0027] FIG. **3**, illustrates a side view of an inventive edge flashing apparatus, according to a third embodiment of the invention.

[0028] FIG. **4**, illustrates a side view of an inventive edge flashing apparatus, according to a fourth embodiment of the invention.

[0029] FIG. **5**, illustrates a side view of an inventive edge flashing apparatus, according to a fifth embodiment of the invention.

[0030] FIG. **6**, illustrates a side view of an inventive edge flashing apparatus according to a sixth embodiment of the invention.

DETAILED DESCRIPTION

[0031] The inventive edge flashing apparatus, and a method of using same will now be discussed with reference to FIGS. **1** through **6**. Although the scope of the present invention is much broader than any particular embodiment, a detailed description of the preferred embodiment follows together with drawings. These drawings are for illustration purposes only and are not drawn to scale. Like numbers represent like features and components in the drawings.

[0032] FIG. **1**, illustrates a side view of an inventive edge flashing apparatus **23**, according to a first embodiment of the invention. A flashing **20**, has a first or upper end or edge or flashing edge section **22**, a flashing slope section **27**, a flashing bump section **28**, a second or lower end or edge or flashing straight edge section **29**, all of which are connected to each other as shown in FIG. **1**. The first or upper end or edge or flashing edge section **22**, has an upper or outer surface **22**A, a lower or inner surface **22**B. The flashing slope section **27**, has an upper or outer surface **27**A, a lower or inner surface **27**B. The flashing bump section **28**, has an upper or outer surface **28**A, a lower or inner surface **28**B. The second or lower end or edge or flashing straight edge section **29**, has an upper or outer surface **29**A, a lower or inner surface **29**B. The first or upper end or edge section **22**, of the flashing **20**, is placed on a deck **10**, having a top or upper deck surface **10**A, which is connected to a deck edge or extension or wall **12**, creating a deck corner **16**, and then the first or edge section **22**, is secured to the top surface **10**A, of the deck **10**, via at least one securing means **25**, such as, for example, a nail **25**, a deck nail **25**, a staple **25**, a flashing nail **25**, a screw **25**, and combinations thereof, to name a few. The second or lower end or flashing straight edge section **29**, is placed along the deck edge **12**. For some applications the flashing **20**, could also have a drip edge **24**, along the second or lower edge or flashing straight edge section **29**, so as to channel moisture or water (not shown). At least one mesh **14**, such as, for example, a metal mesh **14**, a plastic mesh **14**, a composite material mesh **14**, and combinations thereof, to name a few, having an upper or top or outer surface **14**A, is secured to the top surface **10**A, of the deck **10**, using at least one securing means **15**, such as, for example, nail **15**, mesh nail **15**, staple **15**, screw **15**, and combinations thereof, to name a few. For some applications, the flashing straight edge section **29**, is below the deck corner **16**, and is against or adjacent the deck edge **12**. It should be appreciated that the flashing slope section **27**, the flashing flat bump section **28**, and the flashing straight edge section **29**, creates an area **26**, which is generally hollow, and which allows for the air movement above and around the deck **10**, corner **16**, and deck edge **12**. Deck **10**, as used herein can be a regular wooden deck **10**, or a roof deck **64**, or a building deck **64**.

[0033] FIGS. **2**, illustrates a side view of an inventive edge flashing apparatus **33**, according to a second embodiment of the invention. The inventive deck edge flashing apparatus **33**, is similar to the inventive deck edge flashing apparatus **23**, however, the mesh **14**, has an upper or outer surface **14**A, and a mesh extension **14**B, which extends over at least a portion of the first or edge section **22**, of the flashing **20**. For some applications, the mesh extension **14**B, could also cover or be over at least a portion of the securing means **25**. For some applications, the mesh extension **14**B, could also cover or be over at least a portion of the flashing slope section **27**, as more clearly shown in FIG. **3**.

[0034] FIG. **3**, illustrates a side view of an inventive edge flashing apparatus **43**, according to a third embodiment of the invention. The inventive deck edge flashing apparatus **43**, is similar to the inventive deck edge flashing apparatus **33**, but now has at least one coating or layer of at least one deck material **30**, or roofing material **30**, on top of surface **14**A, of the mesh **14**. The at least one concrete layer **30**, has an outer or upper surface **30**A. It is preferred that an edge of the concrete layer **30**, terminates along the surface of the flashing slope section **27**. For some applications it is preferred that an edge of the concrete layer **30**, terminates along the surface of the flashing slope section **27**, and adjacent the surface of the flashing flat bump section **28**. At least one coating or layer of at least one covering material **32**, having an outer or upper surface **32**A, is applied over the upper surface **30**A, of the at least one concrete layer **30**. It is preferred that the edge of the at least one covering material **32**, such as, for example, a deck coating **32**, terminates along the upper surface **28**A, of the flashing flat bump section **28**. For some applications, it is preferred that the edge of the at least one deck coating **32**, terminates along the upper surface **28**A, of the flashing flat bump section **28**, and the edge of the flashing straight edge section **29**. For some applications the top deck coating layer **32**, can be used to provide a sealer **32**, or a sealing layer **32**, for the at least one concrete layer **30**. The at least one top deck coating layer **32**, could also be made from a material that has a textured upper surface **32**A, which would allow a person (not shown) to walk over it, and which could provide slip resistance or a non-slippery surface **32**A, to the at least one deck coating layer **32**. It should be appreciated that the upper surface **27**A, of the slope section **27**, provides a large or big area to hold or contain the roofing or deck material **30**. For most applications it is preferred that the upper surface **30**A, of the roofing or deck material **30**, remains flush with or above the upper surface **28**A, of the bump section **28**. Additionally, it should be appreciated that the upper surface **28**A, of the bump section **28**, provides a large or bigger or extended surface **28**A, for the at least one deck coating layer **32**, to securely bond or adhere to and to create a bond or seal **31**, between the at least one deck coating layer **32**, and the upper surface **28**A, of the bump section **28**. This bond or seal **31**, also prevents any moisture or water from reaching the at least one roofing or deck material **30**. For some applications at least one securing means **35**, could be used to secure the at least one mesh extension **14**B, to the edge section **22**, and the deck **10**.

[0035] FIG. **4**, illustrates a side view of an inventive edge flashing apparatus **53**, according to a fourth embodiment of the invention. The inventive edge flashing apparatus **53**, comprises of the flashing **20**, having a first or upper end or edge or flashing edge section **22**, a flashing slope section **27**, a flashing flat bump section **28**, a second or lower end or edge or flashing straight edge section **29**, all of which are connected each to the other. The first or upper end or edge or flashing edge section **22**, has the upper or outer surface **22**A, the lower or inner surface **22**B, a first end **22**C, and a second end **22**D. The flashing slope section **27**, has the upper or outer surface **27**A, the lower or inner surface **27**B, a first end **27**C, and a second end **27**D. The flashing bump section **28**, has the upper or outer surface **28**A, the lower or inner surface **28**B, a first end **28**C, and a second end **28**D. The second or lower end or edge or flashing straight edge section **29**, has the upper or outer surface **29**A, the lower or inner surface **29**B, a first end **29**C, and a second end **29**D. The second end **22**D, of the edge section **22**, is connected to the first end **27**C, of the slope section **27**. The first end **28**C, of the bump section **28**, is connected to the second end **27**D, of the slope section **27**. The first end **29**C, of the straight edge section **29**, is connected to the second end **28**D, of the bump section **28**. The flashing edge section **22**, and the flashing slope section **27**, has an upper angle A**1**, and the flashing slope section **27**, and the flashing flat bump section **28**, has a lower angle A**2**, and the flashing flat bump section **28**, and the flashing straight edge section **29**, has a lower angle A**3**, and the flashing straight edge section **29**, and the drip edge **24**, has a lower angle A**4**. For some applications it is preferred that the upper angle A**1**, is between about 45 degrees to about 170 degrees, and the lower angle A**2**, is between about 45 degrees, and about 170 degrees, and the lower angle A**3**, is between about 45 degrees to about 135 degrees, and the lower angle A**4**, is between about 110 degrees to about 180 degrees. For some applications the flashing **20**, having the first or upper end or edge or flashing edge section **22**, has a length L**1**, of between about one half inches (12.7 mm) to about 10 inches (254 mm), and where the flashing slope section **27**, has a height H**1**, of between about one eight of an inch (3.2 mm) to about 4 inches (102 mm), and where the flashing flat bump section **28**, or a second flashing slope section **58**, has a length L**2**, of between about one eighth of an inch (3.2 mm) to about 10 inches (254 mm), and where the second or lower end or edge or flashing straight edge section **29**, has a length or height H**2**, of between about one inch (25.4 mm) to about 8 inches (203 mm). Additionally, for some applications the drip edge **24**, could have a length L**3**, of between about one eight inch (3.2 mm) to about one inch (25.4 mm).

[0036] FIG. **5**, illustrates a side view of an inventive edge flashing apparatus **63**, according to a fifth embodiment of the invention. The inventive deck edge flashing apparatus **63**, is similar to the inventive deck edge flashing apparatus **23**, however the shape of the flashing **50**, is different than the flashing **20**. The flashing **50**, has the first or upper end or edge or flashing edge section **22**, a first flashing slope section **57**, a second flashing slope section **58**, a second or lower end or edge or flashing straight edge section **29**, all of which are connected to each other as shown in FIG. **5**. For some applications the flashing **50**, could also have a drip edge **54**, along the second or lower edge section **29**, so as to channel moisture or water (not shown). For some applications the drip edge **54**, could also have a drip edge return **59**, which would create a “U” turn for the drip edge **54**. It should be appreciated that the first flashing slope section **27**, the second flashing slope section **58**, and the flashing straight edge section **29**, creates an area **56**, which is generally hollow, and which allows for the air movement above and around the corner **16**, of the deck **10**, and the deck edge **12**. It should be appreciated that an upper surface **57**A, of the first flashing slope section **57**, provides a large or big area to hold or contain the roofing or deck material **30**. For most applications it is preferred that the upper surface **30**A, of the roofing or deck material **30**, remains flush with or above an upper surface **58**A, of the second flashing slope section **58**. Additionally, it should be appreciated that the upper surface **58**A, of the second flashing slope section **58**, provides a large or bigger or extended surface **58**A, for the at least one deck coating layer **32**, to securely bond or adhere to and to create a bond or seal **51**, between the at least one deck coating layer **32**, and the upper surface **58**A, of the second flashing slope section **58**. This bond or seal **51**, also prevents any moisture or water from reaching the at least one roofing or deck material **30**.

[0037] FIG. **6**, illustrates a side view of an inventive edge flashing apparatus **73**, according to a sixth embodiment of the invention. The inventive edge flashing apparatus **73**, is similar to the inventive edge flashing apparatus **23**, **63**, however, the inventive edge flashing apparatus **73**, has at least one flashing **70**, and the flashing is secured to a different structure **60**. The flashing **70**, is similar to the flashing **20**, **50**, except that the flashing **70**, has a raised and rounded or curved section **77**, which connects the edge section **22**, to the straight edge section **29**. As one can appreciate that the raised and curved section **77**, combines the slope section **27**, and the bump section **28**, into one section **77**. Similarly, the raised and curved section **77**, combines the first slope section **57**, and the second slope section **58**, into one section **77**. The raised and curved section **77**, has an upper or outer surface **77**A, a lower or inner surface **77**B, a first end **77**C, and a second end **77**D, and where the first end **77**C, is in contact with the second end **22**D, of the edge section **22**, and the second end **77**D, is in contact with the first end **29**C, of the straight edge section **29**. It should be appreciated that sections **27**, **57**, **77**, can also act as a gravel stop **27**, **57**, **77**, or concrete stop **27**, **57**, **77**. Once at least one layer of concrete **30**, has been placed on top of the mesh **14**, one would then cover the upper surface **30**A, with at least one coating of at least on deck coating layer **32**. The different structure **60**, could be, for example, a house **60**, a warehouse **60**, a building **60**, to name a few, having a first or roof surface **64**, a second or subsurface structure or exterior wall **62**, and when joined would create a corner **66**. The roof **64**, has a roof exposed surface **64**A, and the subsurface structure **62**, has an exposed subsurface **62**A. At least one exterior structure **74**, having an exterior or outer surface **74**A, and an interior or inner surface **74**B, such that the inner surface **74**B, is in contact with or adjacent to the exposed subsurface **62**A. For some applications the at least one exterior structure **74**, could be selected from a group comprising stucco, siding, brick, wood, composite material, panel, plastic panel, and combination thereof, to name a few. For most applications it is preferred that the outer surface **74**A, has a finished surface **74**A. The edge section **22**, of the flashing **20**, **50**, **70**, is placed on top of the roof surface **64**, such that the inner surface **22**B, is in contact with or adjacent to the first exposed surface **64**A. Additionally, the inner surface **29**B, of the straight edge section **29**, of the flashing **20**, **50**, **70**, is in contact with or adjacent the outer surface **74**A, of the at least one exterior structure **74**. As one can appreciate that the placing of the flashing **20**, **50**, **70**, over the corner **66**, prevents any outside water or rain from entering the areas between the at least one exterior structure **74**, and the exterior wall **62**. Additionally, as one can appreciate that the edge of the flashing **20**, **50**, **70**, extends beyond the corner **66**, or over the exterior wall **62**, or over the exterior wall surface **74**A, of the at least one exterior structure **74**, to create a complete seal at the roof or wall’s edge **66**, along with at the end of the at least one exterior structure **74**, which is near or adjacent the corner **66**. For some applications one could also use at least one securing means **65**, where the securing means **65**, could be used to secure the straight edge section **29**, to the at least one exterior structure **74**. Similarly, for some applications one could also use at least one securing means **65**, where the securing means **65**, could be used to secure the straight edge section **29**, to the at least one exterior structure **74**, and the exterior wall **62**, or the subsurface structure **62**. It should be appreciated that the upper surface **77**A, of the raised and curved section **77**, provides a large or big area to hold or contain the roofing or deck material **30**. However, care should be taken that the roofing or deck material **30**, does not take all of the upper surface **77**A, of the raised and curved section **77**, as the upper surface **77**A, also needs to be shared with the at least one deck coating **32**, to create a bond or seal **71**, with a portion of the upper surface **77**A, of the raised and curved section **77**. Furthermore, as one can appreciate that the upper surface **77**A, of the raised and curved section **77**, provides a large or bigger or extended surface **77**A, for the at least one deck coating layer **32**, to securely bond or adhere to and to create a bond or seal **71**, between the at least one deck coating layer **32**, and the upper surface **77**A, of the raised and curved section **77**. This bond or seal **71**, also prevents any moisture or water from reaching the at least one roofing or deck material **30**.

[0038] For some applications, the flashing straight edge section **29**, could start above or below the deck corner **16**, and it could be against or adjacent the deck edge **12**, as more clearly seen in FIG. **1**, or it could be a little distance away from the deck edge **12**, as more clearly seen in FIG. **5**.

[0039] The material for the deck **10**, could be selected from a group comprising an ABS (Acrylonitrile Butadiene Styrene) material, a plastic material, a polymeric material, a PTFE (polytetrafluoroethylene) material, a metallic material, a wood material, a plywood material, a composite material, a concrete material, and combinations thereof, to name a few.

[0040] The at least one deck material **30**, or roofing material **30**, could be selected from a group comprising a concrete material **30**, a filler material **30**, a mud-bed material **30**, a sand mixed with a binder material **30**, and combinations thereof, to name a few.

[0041] The at least one coating or layer of at least one covering material **32**, could be selected from a group comprising a deck coating **32**, a waterproofing membrane **32**, a waterproofing system **32**, and combinations thereof, to name a few.

[0042] The thickness of the flashing **20**, **50**, **70**, can have a thickness between about 28 gauge to about 14 gauge, or between about 0.012 inches (0.30 mm) to about 1 inch (25.4 mm).

[0043] The material for the flashing **20**, **50**, **70**, or the edge metal **20**, **50**, **70**, can be selected from a group comprising galvanized metal, bonderized metal, copper, stainless steel, plastic, and combinations thereof, to name a few. A bonderized metal is a galvanized steel sheet plated in zinc phosphate for building facades and roofing.

[0044] The at least one deck material **30**, or roofing material **30**, could have a layer **30**, having a thickness from between about one-eighth inch (3.2 mm) to about 12 inches (305 mm).

[0045] The at least one covering material **32**, or deck coating layer **32**, could have a thickness from between about 10 Mils (0.25 mm) to about 12 inches (305 mm).

[0046] The at least one securing means **15**, **25**, **35**, **65**, could be selected from a group comprising a nail, a deck nail, a staple, a screw, and combinations thereof, to name a few.

[0047] The inventive flashing **20**, **50**, **70**, could be sold under a trademark, such as, Crete Edge or Crete-Edge **20**, **50**, **70**.

[0048] It should be appreciated that when gravel stop edge metals are used, the concrete layer is poured all the way to the gravel stop leaving no exposed horizontal metal to attach the membrane to. Thus, the seal of the edge of the deck using gravel stop edge metals is very weak and of course prone to failures. Furthermore, when a membrane separates from the edge of the metal's edge, it creates an opening for water, such as, for example, rainwater, to get in and further damage the edge seal. Additionally, with edge metal flashings, there is no easy way to terminate the concrete layer, which needs to be approximately a minimum of one quarter inch (6.4 mm) thick. This requires an extra step of installing some sort of patch material to transition from the one quarter inch (6.4 mm) high edge of the concrete layer down to the surface of the edge metal flashing, adding costs and installation times. As one can see that the inventive flashing **20**, **50**, **70**, solves this problem by creating an edge metal that on the one hand has a gravel stop **27**, **57**, **77**, to terminate the concrete **30**, against without having to apply the extra layer of patch material to transition down to the edge metal's surface while at the same time, leaves a large enough horizontal surface **28**, (see "L**2**" in FIG. **4**), also known as "a flange" to which the coatings/membranes **32**, can easily be attached to and create a long lasting seal at the edge of the deck **10**, **64**.

[0049] Thus, the present invention is not limited to the embodiments described herein and the constituent elements of the invention can be modified in various manners without departing from the spirit and scope of the invention. Various aspects of the invention can also be extracted from any appropriate combination of a plurality of constituent elements disclosed in the embodiments. Some constituent elements may be deleted in all of the constituent elements disclosed in the embodiments. The constituent elements described in different embodiments may be combined arbitrarily.

[0050] Still further, while certain embodiments of the inventions have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the inventions. Indeed, the novel methods and systems described herein may be embodied in a variety of other forms; furthermore, various omissions, substitutions and changes in the form of the methods and systems described herein may be made without departing from the spirit of the inventions.

[0051] It should be further understood that throughout the specification and claims several terms have been used and they take the meanings explicitly associated herein, unless the context clearly dictates otherwise. For example, the phrase "in one embodiment" as used herein does not necessarily refer to the same embodiment, though it may. Additionally, the phrase "in another embodiment" as used herein does not necessarily refer to a different embodiment, although it may. Thus, various embodiments of the invention may be readily combined, without departing from the scope or spirit of the invention.

[0052] While the present invention has been particularly described in conjunction with a specific preferred embodiment, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. It is therefore contemplated that the appended claims will embrace any such alternatives, modifications and variations as falling within the true scope and spirit of the present invention.

What is claimed is:

1. An edge flashing apparatus, comprising:

(a) an edge section having a substantially flat surface, and having a first edge end, and a second edge end;

(b) a sloped section having a substantially flat sloped surface, and having a first sloped end, and a second sloped end, and wherein said first sloped end is connected to said second edge end;

(c) a bump section having a substantially flat surface, and having a first bump end, and a second bump end, and wherein said first bump end is connected to said second sloped end;

(d) a straight edge section having a substantially flat surface, and having a first straight edge end, and a second straight edge end, and wherein said first straight edge end is connected to said second bump end; and

(e) wherein said bump section is at a height above said edge section, to form said edge flashing apparatus.

2. The edge flashing apparatus of claim **1**, further comprising a deck structure, and wherein said deck structure has a substantially flat horizontal surface and a substantially flat vertical surface, and wherein said edge section is secured to said substantially flat horizontal surface of said deck structure using at least one securing means.

3. The edge flashing apparatus of claim **2**, wherein said deck structure is selected from a group consisting of a deck, a roof, a building, and combinations thereof.

4. The edge flashing apparatus of claim **2**, wherein said at least one securing means is selected from a group consisting of a nail, a deck nail, a staple, a flashing nail, a screw, and combinations thereof.

5. The edge flashing apparatus of claim **2**, wherein at least one mesh structure is adjacent said edge section.

6. The edge flashing apparatus of claim **2**, wherein at least one mesh structure is adjacent said edge section, and wherein said at least one mesh structure is secured to said substantially flat horizontal surface of said deck structure.

7. The edge flashing apparatus of claim **2**, wherein at least one mesh structure overlaps at least a portion of said edge section.

8. The edge flashing apparatus of claim **2**, wherein at least one mesh structure overlaps at least a portion of said edge section, and wherein said at least one mesh structure is secured to said substantially flat horizontal surface of said deck structure.

9. The edge flashing apparatus of claim **1**, having a drip edge, wherein said drip edge has a first drip edge end, and a second drip edge end, and wherein said first drip edge end is secured to said second straight edge end.

10. The edge flashing apparatus of claim **9**, having a return edge, wherein said return edge has a first return edge end, and a second return edge end, and wherein said first return edge end is secured to said second drip edge end.

11. The edge flashing apparatus of claim **2**, further comprising:

(a) at least one mesh structure having an upper mesh surface and a lower mesh surface, and wherein said lower mesh surface is in direct contact with said substantially flat horizontal surface of said deck structure, and at least one securing means secures said at least one mesh structure to said substantially flat horizontal surface of said deck structure;

(b) at least one layer of at least one deck material has an upper deck material surface and a lower deck material surface, and wherein said lower deck material surface is in direct contact with said upper surface of said at least one mesh; and

(c) at least one layer of at least one covering material covering at least a portion of said upper deck material surface of said at least one layer of deck material, and wherein said at least one covering material covers at least a portion of said bump section.

12. The edge flashing apparatus of claim **11**, wherein said at least one layer of at least one deck material has a thickness between about one-eighth inch (3.2 mm) to about 12 inches (305 mm), and wherein said at least one layer of at least one covering material has a thickness from between about 10 Mils (0.25 mm) to about 12 inches (305 mm).

13. The edge flashing apparatus of claim **2**, wherein said straight edge section is adjacent said substantially flat vertical surface of said deck structure.

14. The edge flashing apparatus of claim **2**, further comprising:

(a) at least one secondary wall structure having an inner wall surface, and an outer wall surface, and wherein said inner wall surface is adjacent said substantially flat vertical surface, and wherein said straight edge section is adjacent said outer wall surface of said at least one secondary wall structure.

15. The edge flashing apparatus of claim **14**, wherein said at least one secondary wall structure is selected from a group consisting of stucco, siding, brick, wood, composite material, panel, plastic panel, and combination thereof.

16. The edge flashing apparatus of claim **1**, wherein said second edge end and said first slope end form a first angle, and wherein said first angle is between about 45 degrees to about 170 degrees, said second slope end and said first bump end form a second angle, and wherein said second angle is between about 45 degrees, and about 170 degrees, and wherein said second bump end and said first straight edge end forms a third angle, and wherein said third angle is between about 45 degrees to about 135 degrees.

17. The edge flashing apparatus of claim **1**, wherein said edge section has a first length, and wherein said first length is between about one half inches (12.7 mm) to about 10 inches (254 mm), and said slope section has a height, and wherein said height is between about one eight of an inch (3.2 mm) to about 4 inches (102 mm), and wherein said bump section has a second length, and wherein said second length is between about one eighth of an inch (3.2 mm) to about 10 inches (254 mm), and wherein said straight edge section has a third length, and wherein said third length is between about one inch (25.4 mm) to about 8 inches (203 mm).

18. The edge flashing apparatus of claim **1**, wherein said edge flashing apparatus has a thickness of between about 0.012 inches (0.30 mm) to about 1 inch (25.4 mm).

19. The edge flashing apparatus of claim **1**, wherein said edge flashing apparatus is selected from a group consisting of a galvanized metal, a bonderized metal, copper, stainless steel, plastic, and combinations thereof.

20. An edge flashing apparatus, comprising:

(a) an edge section having a substantially flat surface, and having a first edge end, and a second edge end;

(b) a sloped section having a substantially flat sloped surface, and having a first sloped end, and a second sloped end, and wherein said first sloped end is connected to said second edge;

(c) a sloped bump section having a substantially flat surface, and having a first sloped bump end, and a second sloped bump end, and wherein said first sloped bump end is connected to said second edge;

(d) a straight edge section having a substantially flat surface, and having a first straight edge end, and a second straight edge end, and wherein said first straight edge end is connection to said second sloped bump edge; and

(e) wherein said sloped bump section is at a height above said edge section, to form said edge flashing apparatus.

21. The edge flashing apparatus of claim **20**, further comprising:

(a) a deck structure, and wherein said deck structure has a substantially flat horizontal surface and a substantially flat vertical surface, and wherein said edge section is secured to said substantially flat horizontal surface of said deck structure using at least one securing means;

(b) at least one mesh structure having an upper mesh surface and a lower mesh surface, and wherein said lower mesh surface is in direct contact with said substantially flat horizontal surface of said deck structure, and at least one securing means secures said at least one mesh structure to said substantially flat horizontal surface of said deck structure;

(c) at least one layer of at least one deck material has an upper deck material surface and a lower deck material surface, and wherein said lower deck material surface is in direct contact with said upper surface of said at least one mesh; and

(d) at least one layer of at least one covering material covering at least a portion of said upper deck material surface of said at least one layer of deck material, and wherein said at least one covering material covers at least a portion of said bump section.

* * * * *