US 20250280506A1

(19) United States
(12) Patent Application Publication
Ku et al.
(10) Pub. No.: US 2025/0280506 A1
(43) Pub. Date: Sep. 4, 2025

(54) **HEAT EXCHANGERS ON CIRCUIT BOARDS**

(71) Applicant: **Intel Corporation**, Santa Clara, CA (US)

(72) Inventors: **Jeff Ku**, Taipei (TW); **Smit Kapila**, Bangalore (IN); **Min Suet Lim**, Gelugor (MY); **Lance Lin**, Taipei (TW); **Arnab Sen**, Bengaluru (IN); **Shuo Man Yuan**, Taipei (TW)

(21) Appl. No.: **18/593,345**

(22) Filed: **Mar. 1, 2024**

Publication Classification

(51) **Int. Cl.**

H05K 7/20	(2006.01)
G06F 1/20	(2006.01)
H05K 1/02	(2006.01)

(52) **U.S. Cl.**

CPC ***H05K 7/20154*** (2013.01); ***G06F 1/203*** (2013.01); ***H05K 1/0204*** (2013.01); ***H05K 1/0209*** (2013.01); ***H05K 7/20336*** (2013.01)

(57) **ABSTRACT**

Heat exchangers on edges of circuit boards are disclosed. An apparatus includes: a housing including an outlet for air flow; a circuit board; and a heat exchanger extending along an edge of the circuit board. The heat exchanger includes a first side and a second side opposite the first side. The first side faces away from the outlet, and the second side faces toward the outlet. The edge of the circuit board is closer to the second side of the heat exchanger than the edge is to the first side of the heat exchanger.

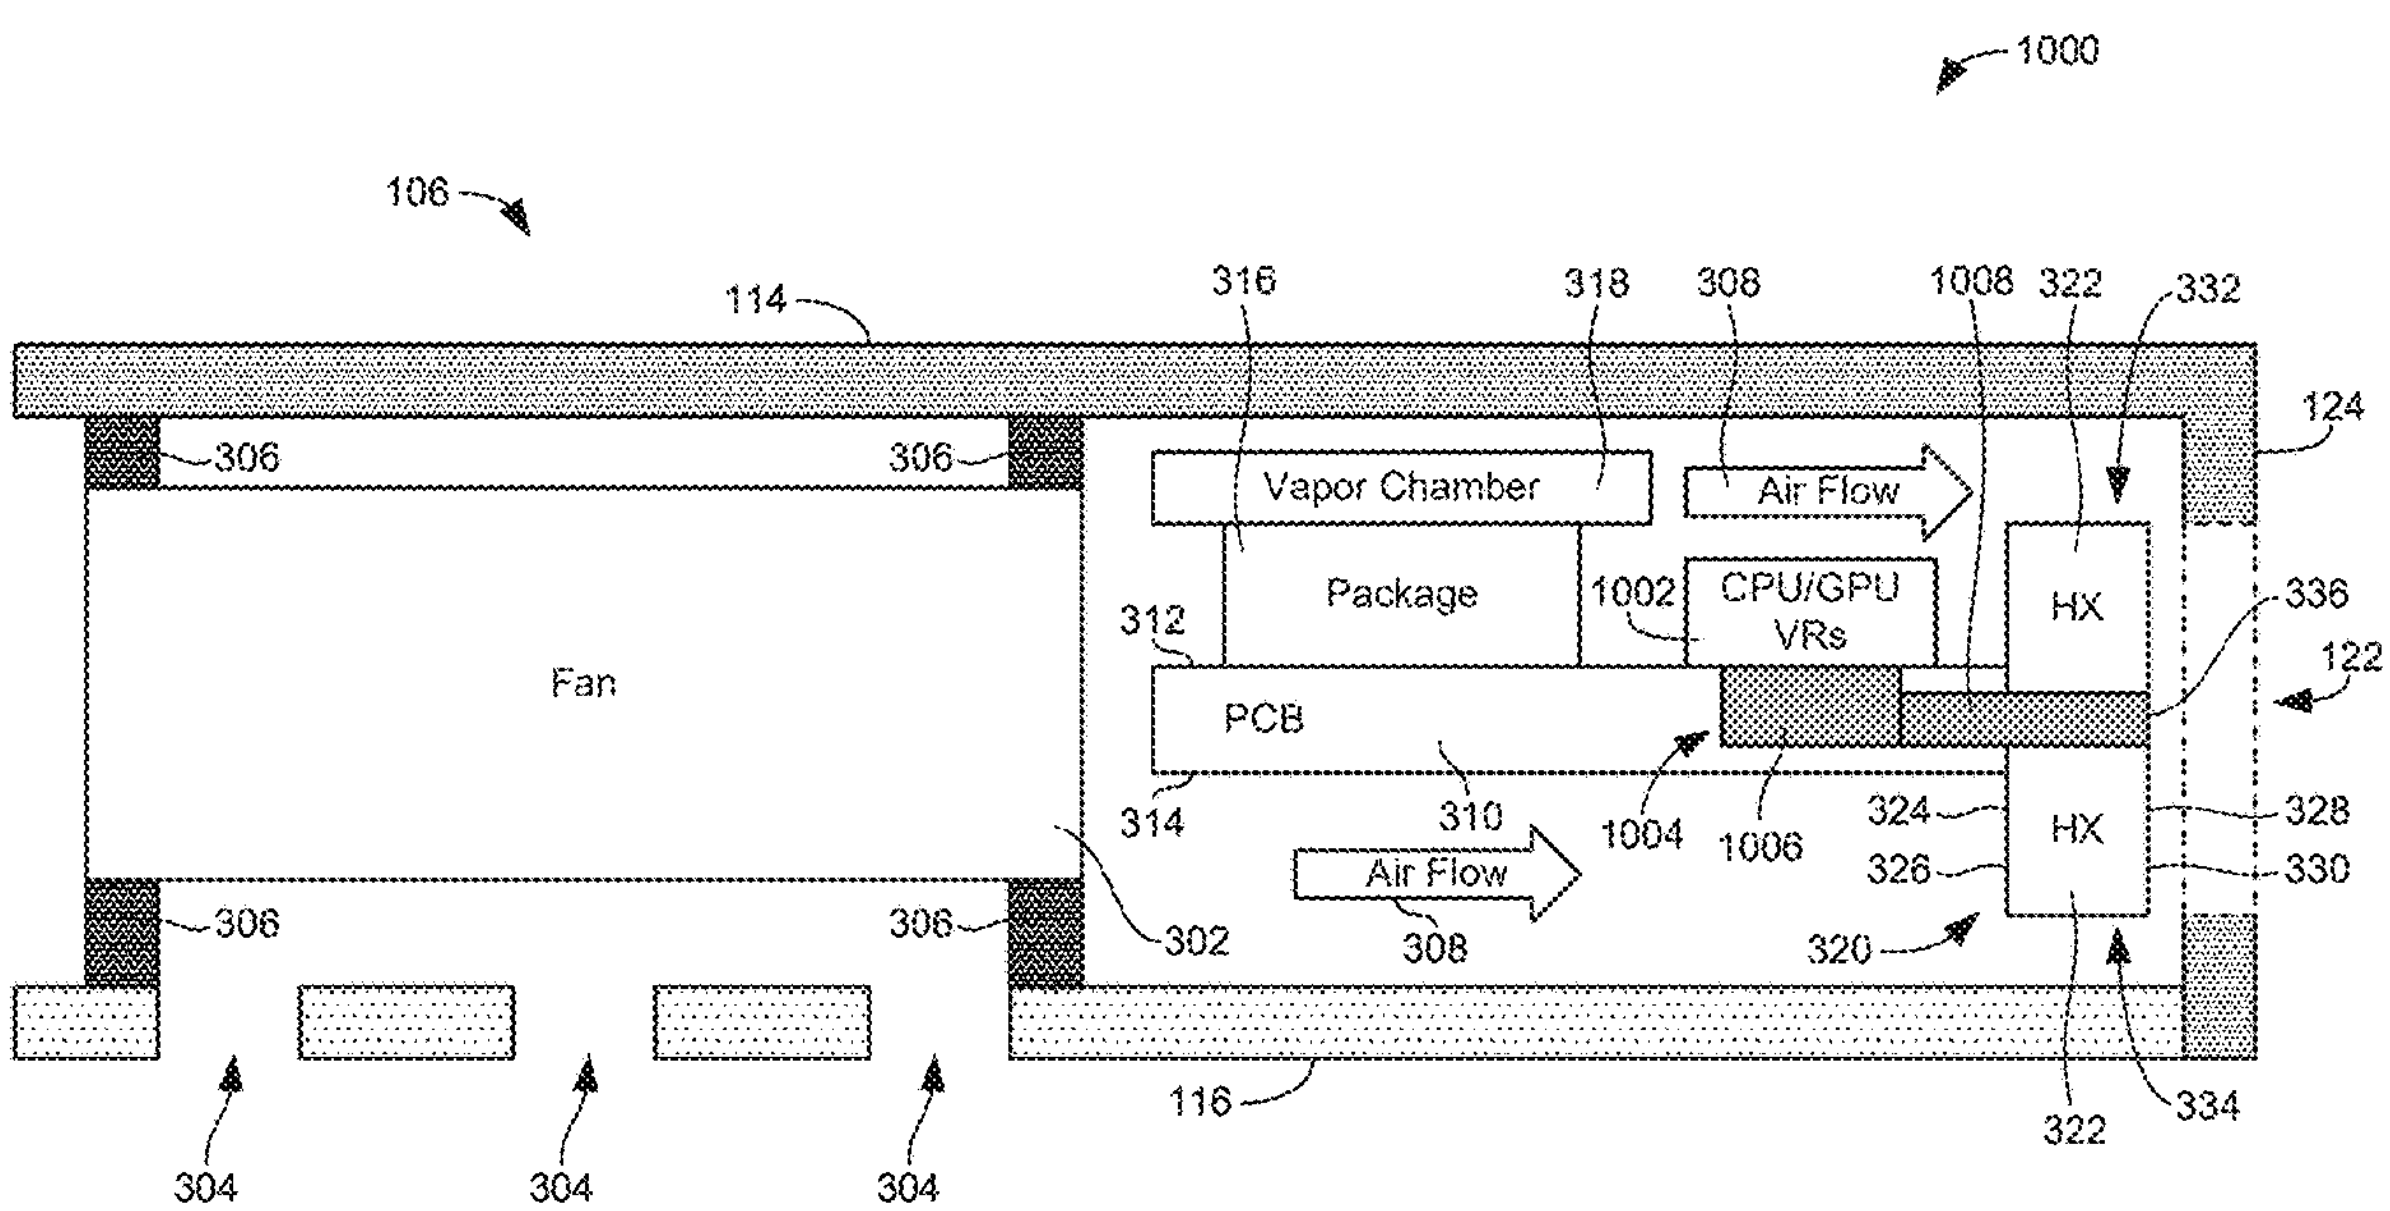

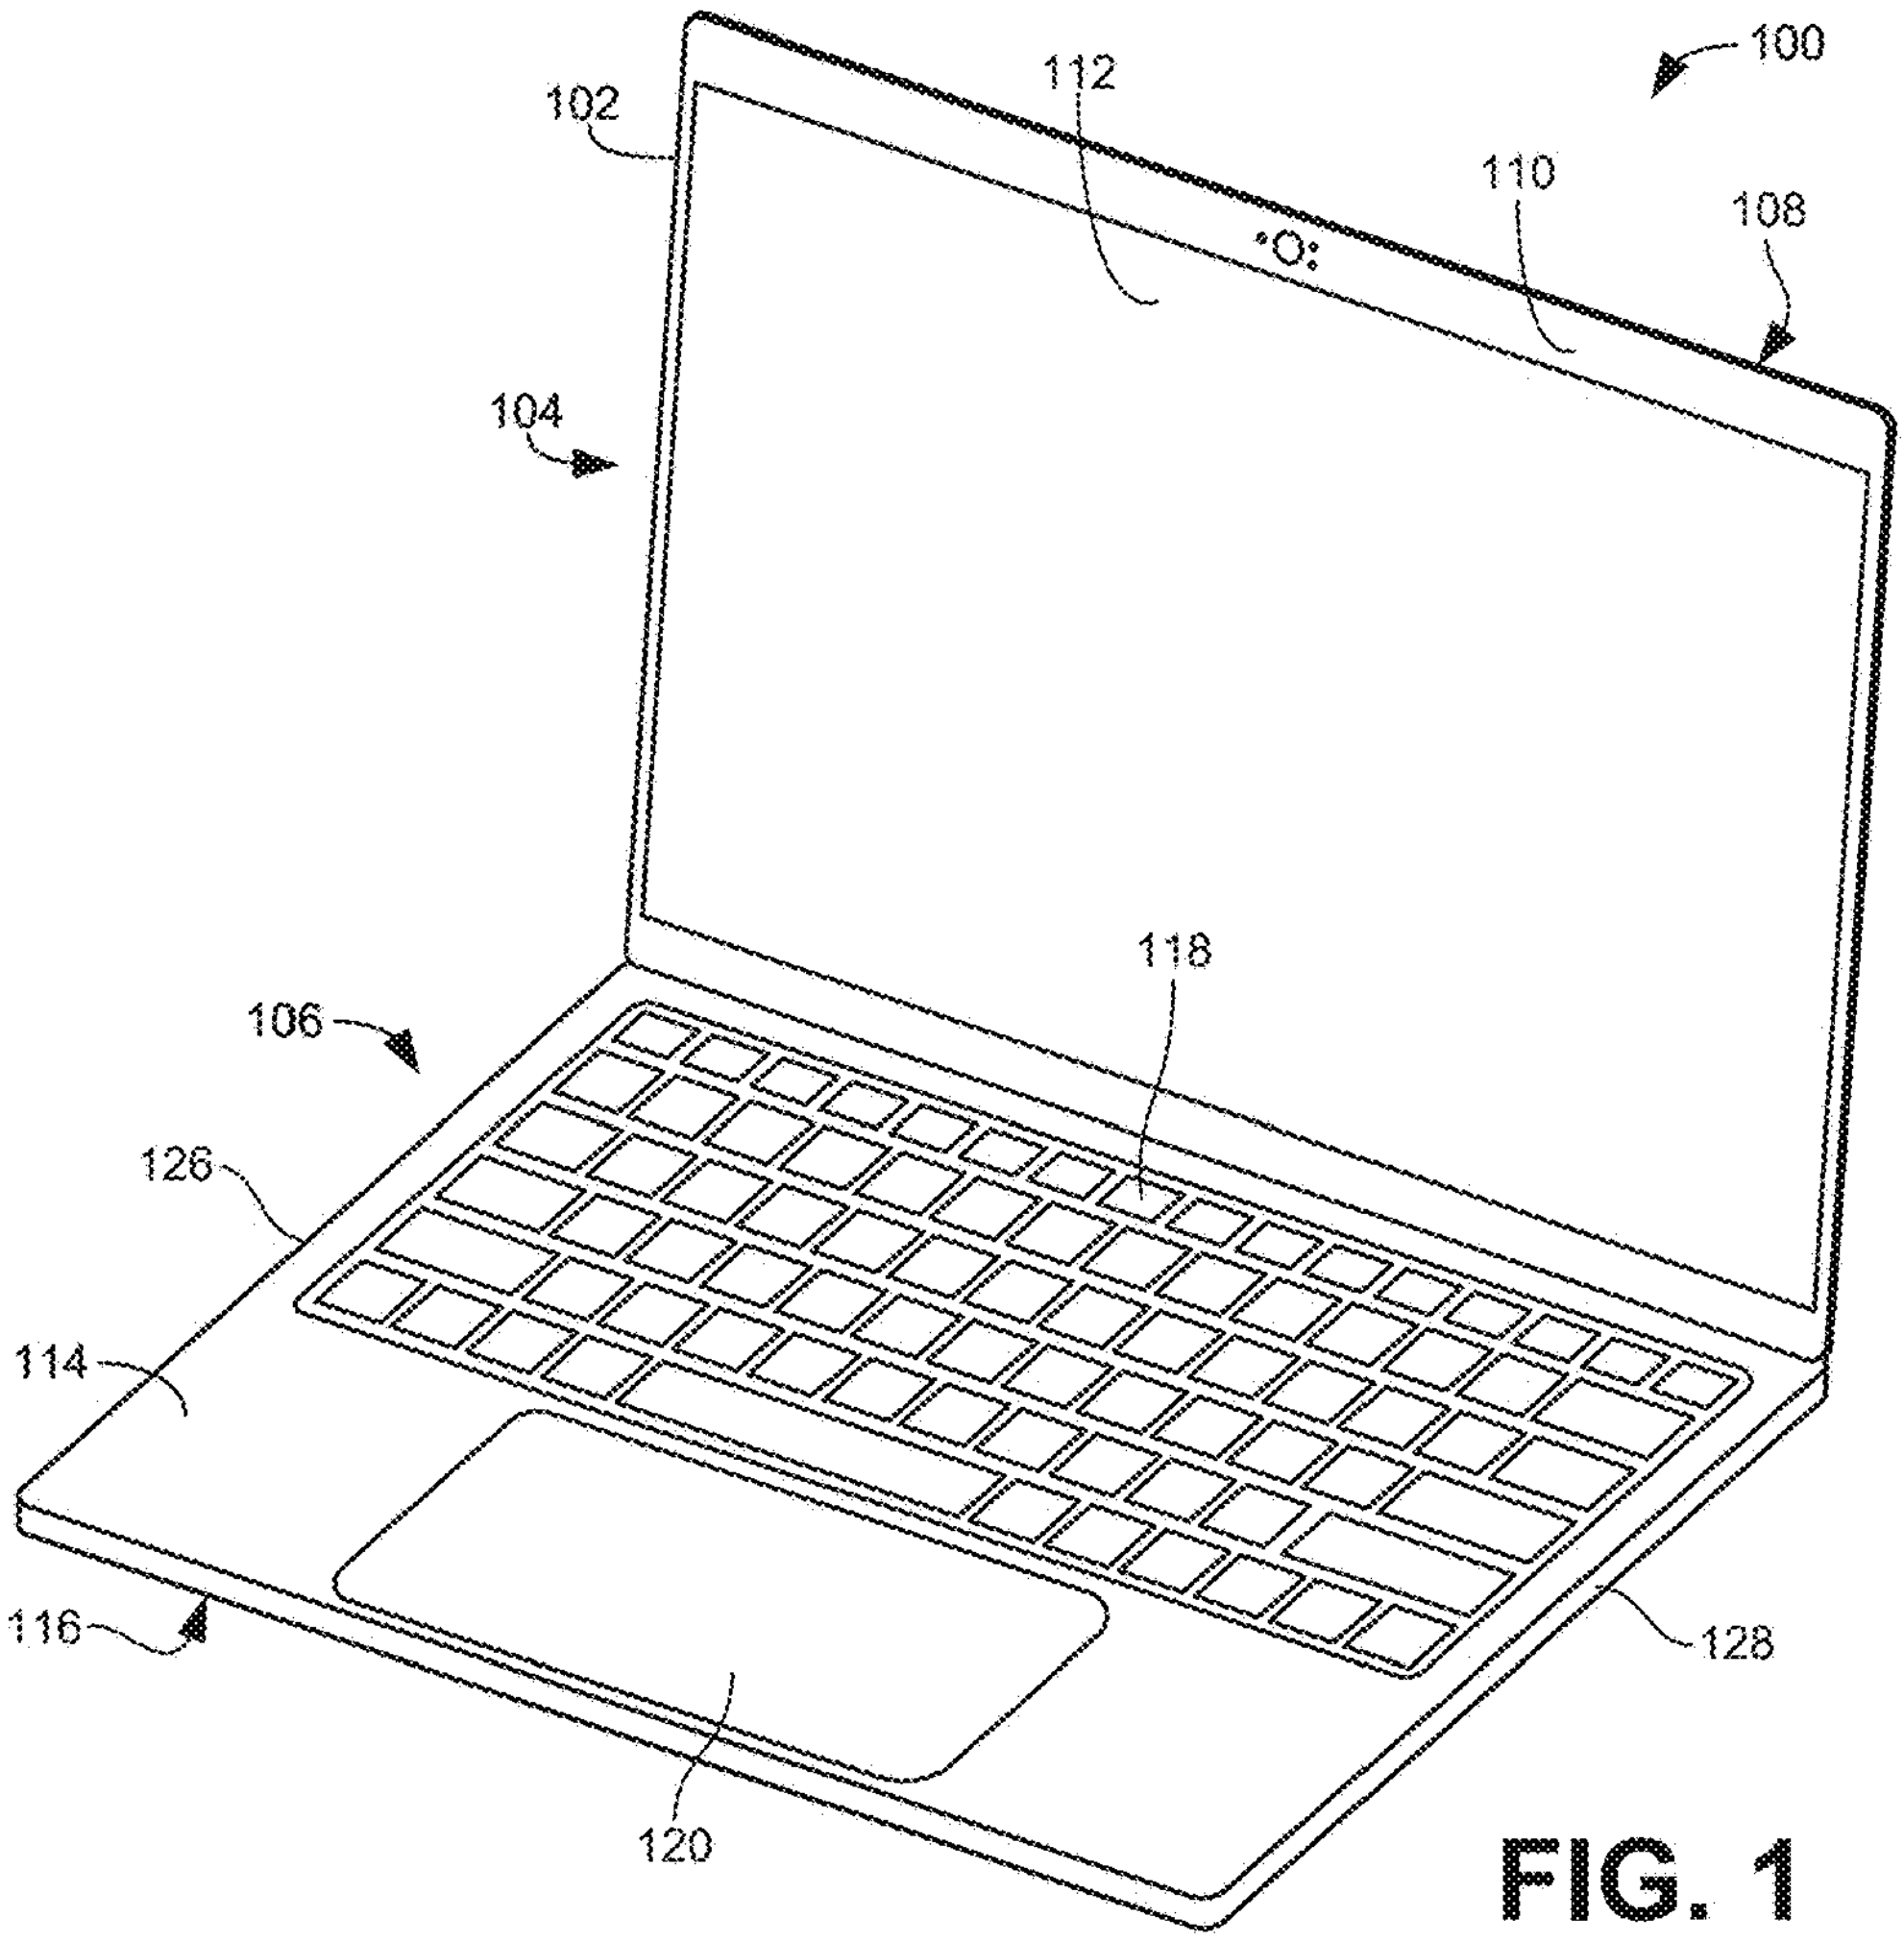
100
102
112
110
108
104
106
118
126
114
116
128
120

FIG. 1

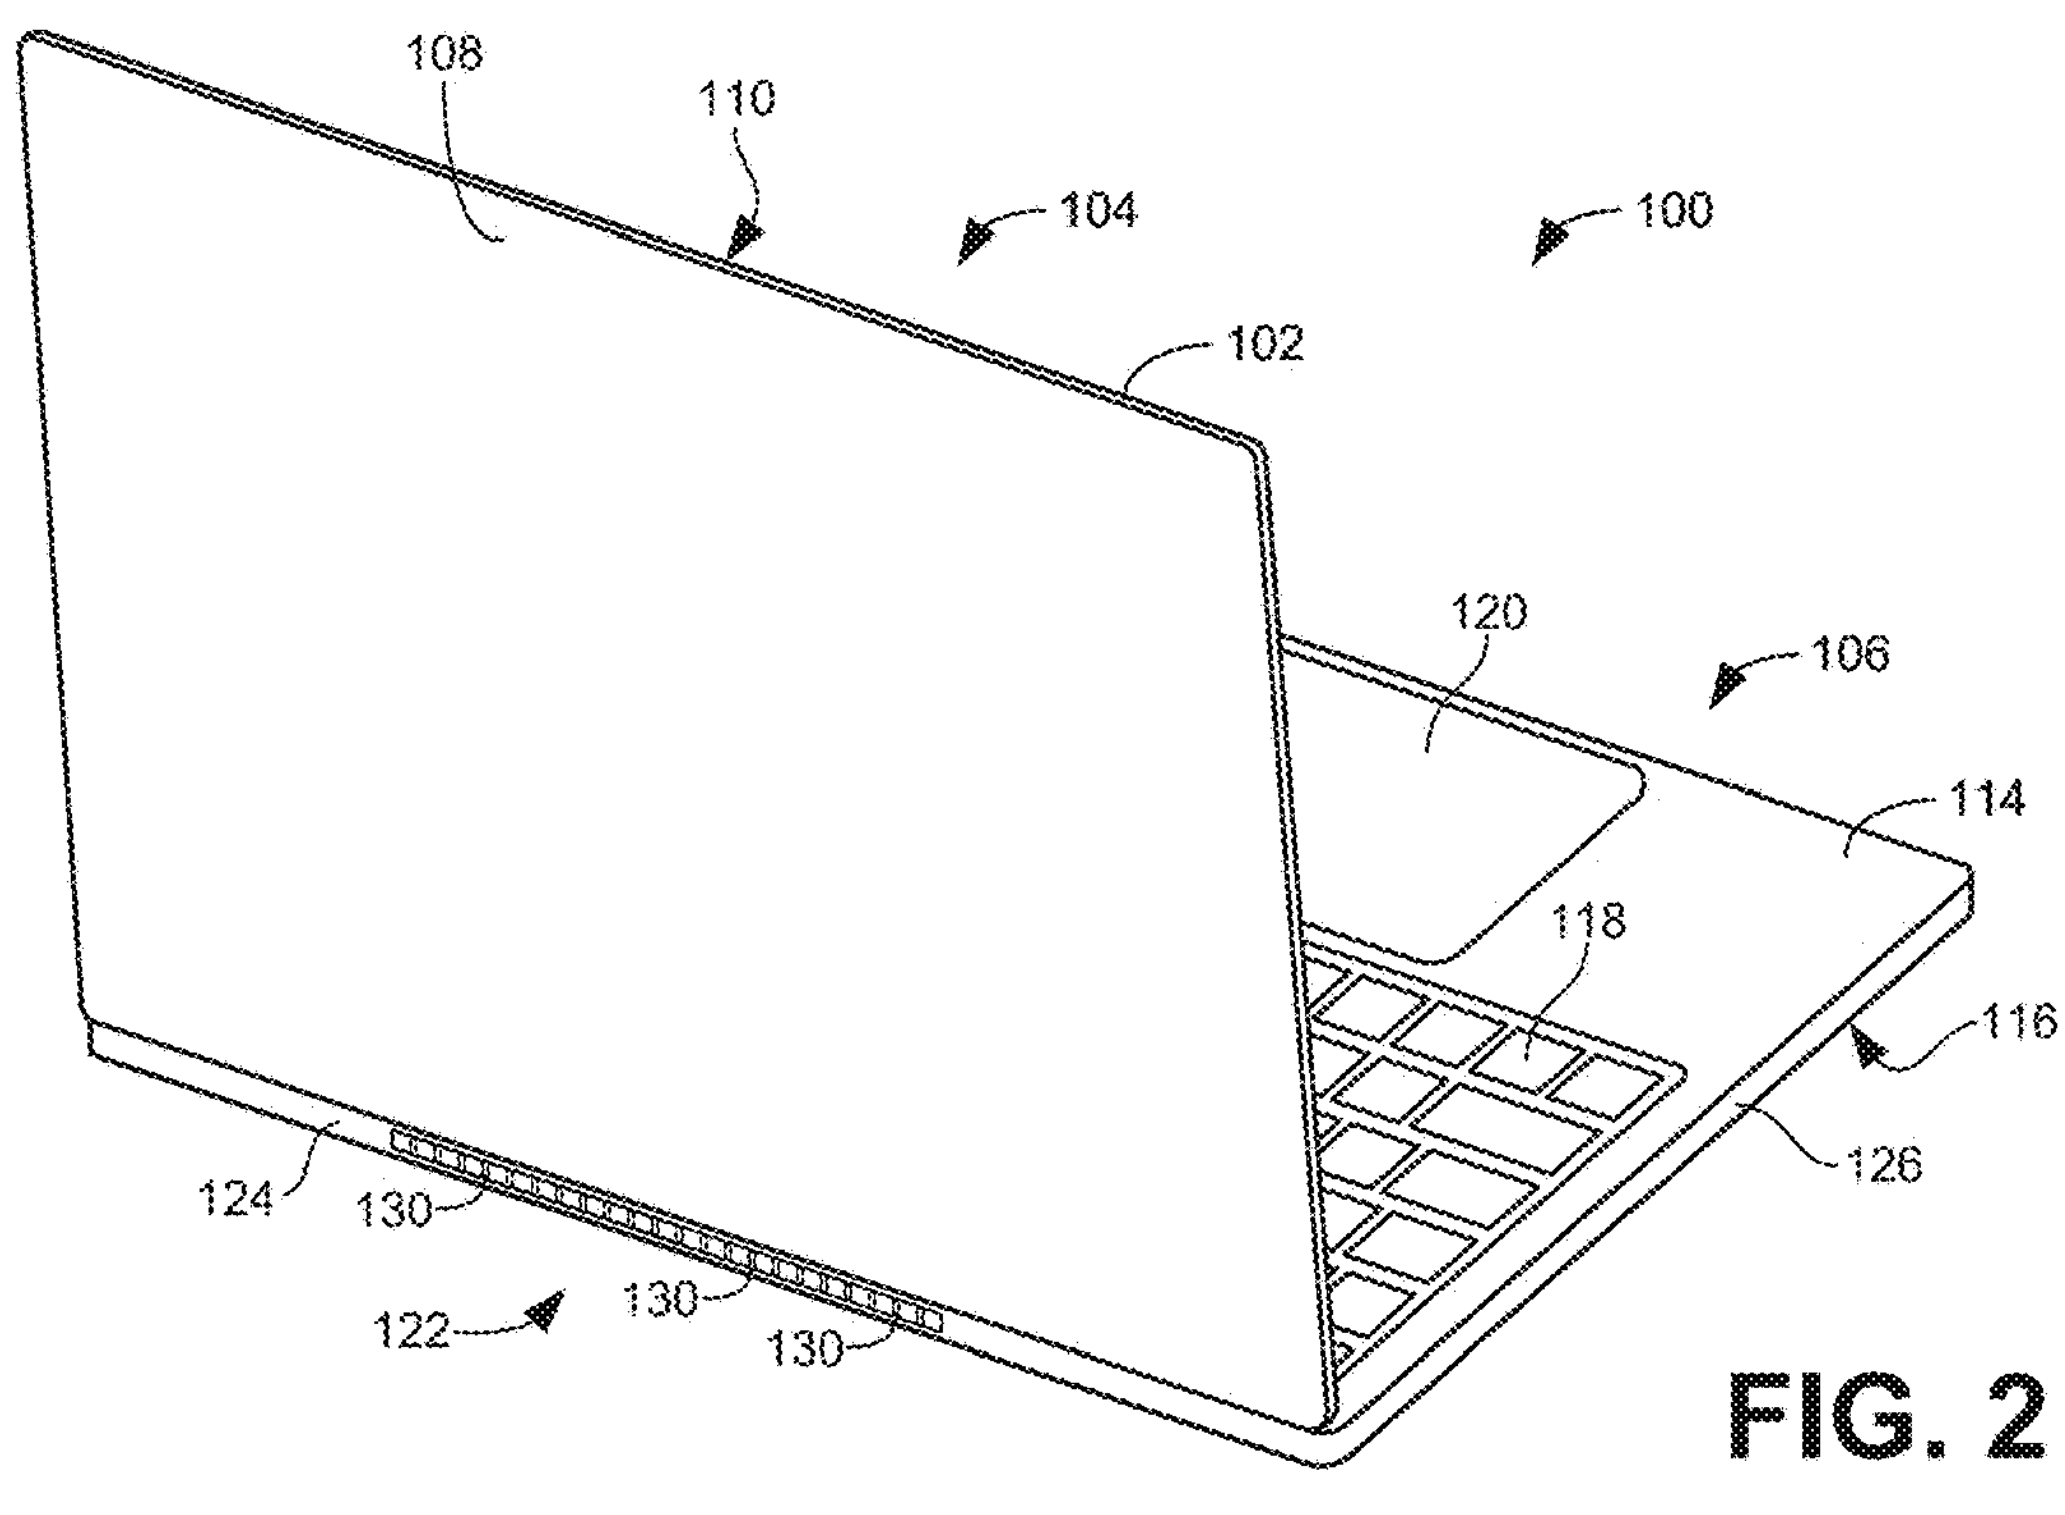
108
110
104
100
102
120
106
114
118
116
126
124
130
122
130
130

FIG. 2

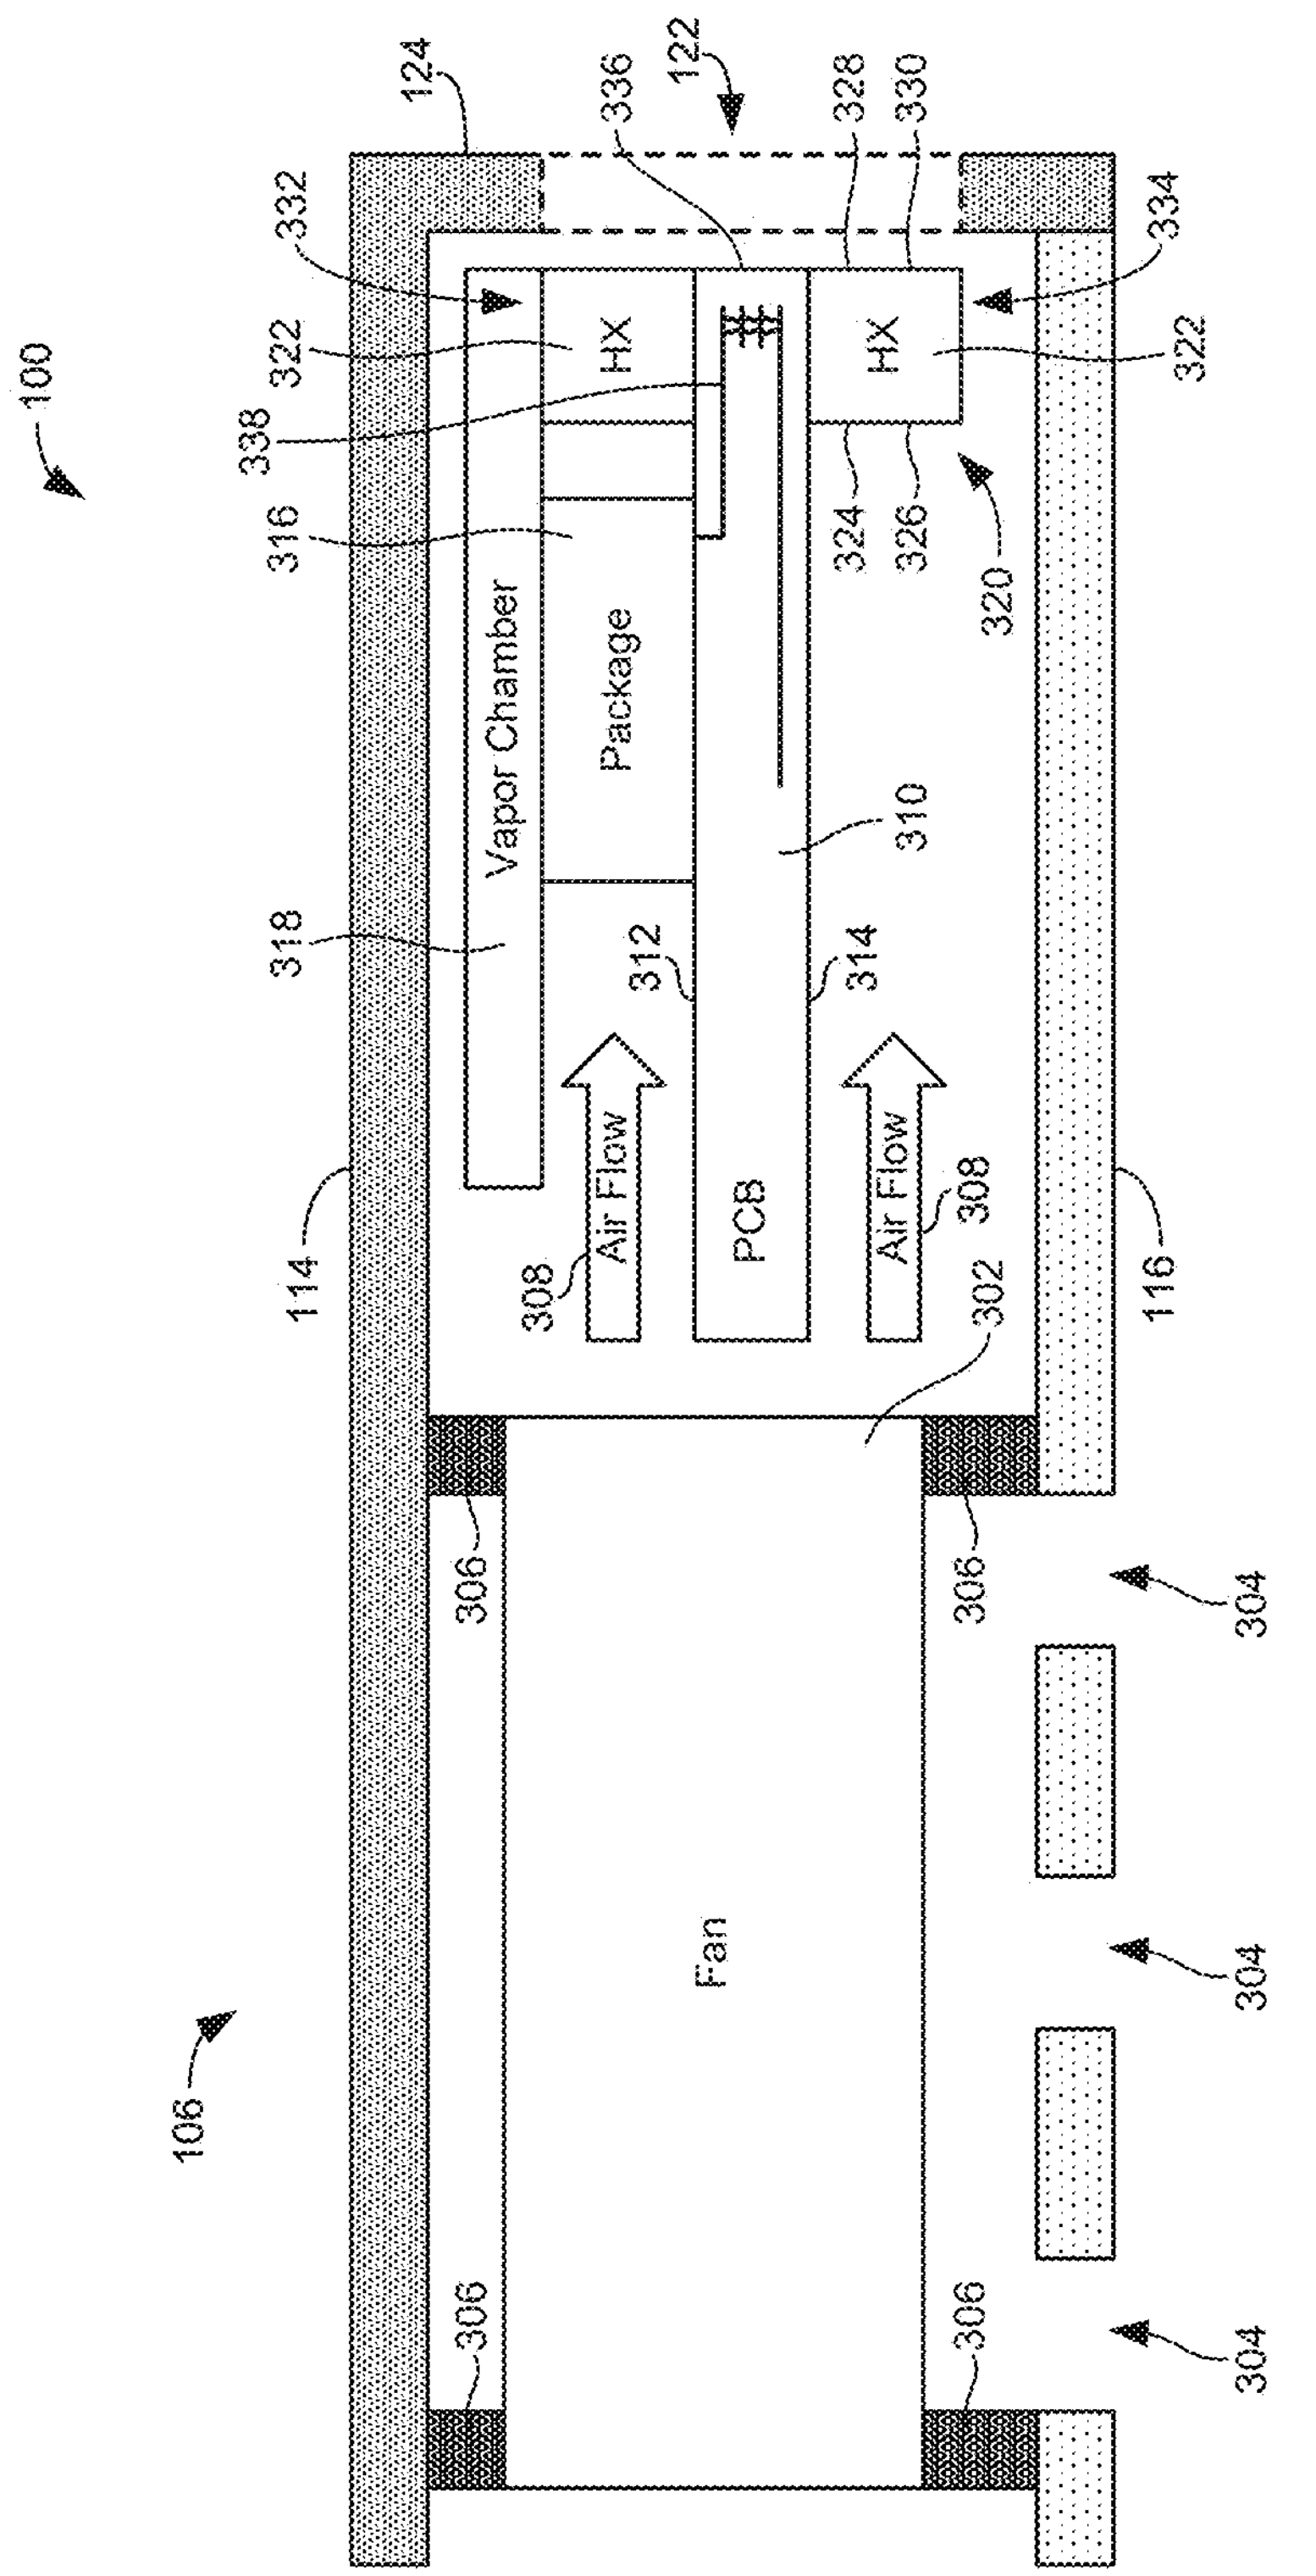
100
124
122
336
328
330
332
334
322
HX
HX
322
338
316
324
326
320
Vapor Chamber
Package
310
318
312
314
Air Flow
Air Flow
PCB
308
308
114
116
302
306
306
304
Fan
106
304
306
306
304

FIG. 3

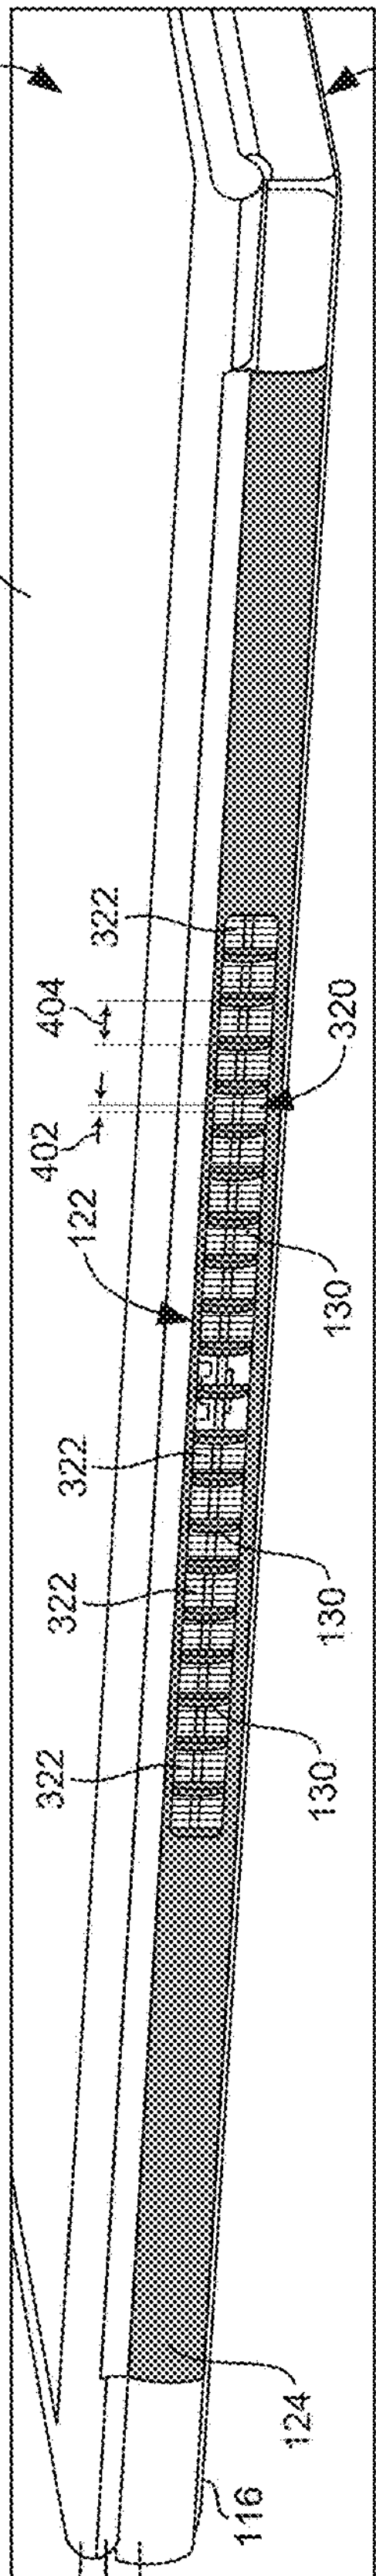
400
104
106
102
322
404
320
402
122
130
322
322
130
322
130
124
116
108
110
114

FIG. 4

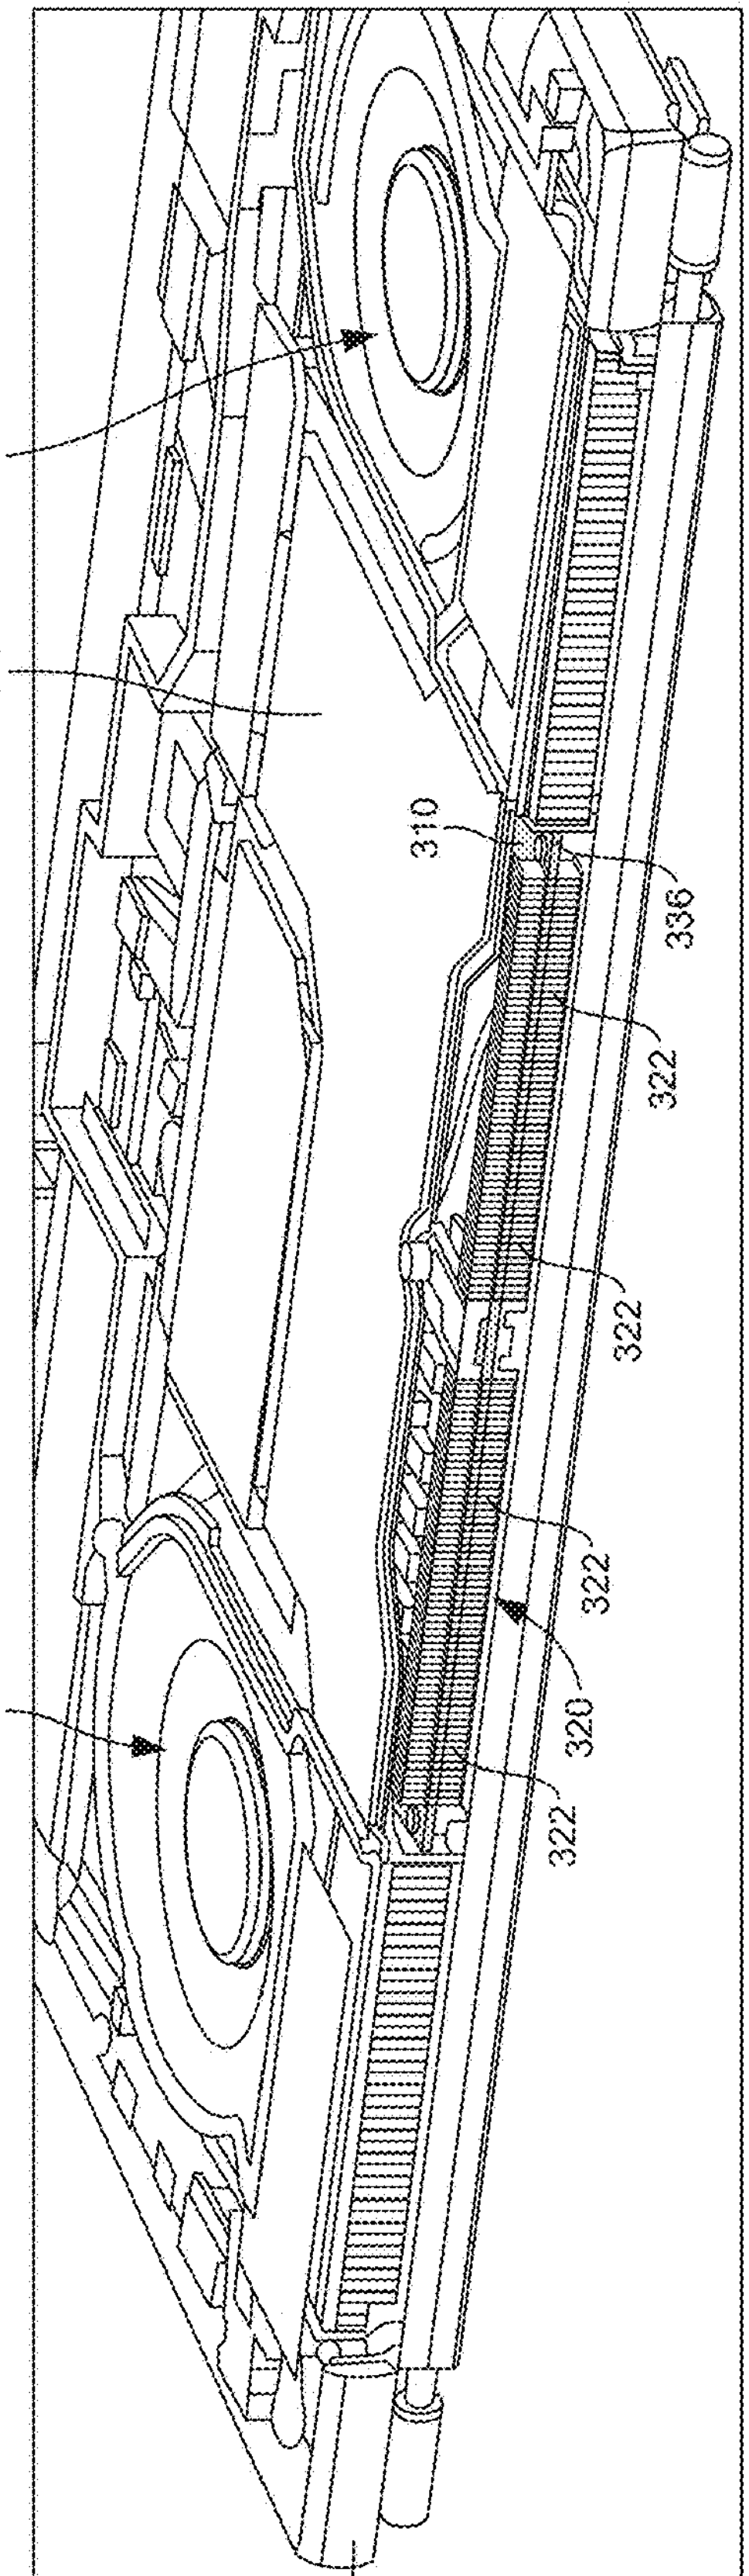
400
302
318
310
336
322
322
322
322
320
322
302
114

FIG. 5

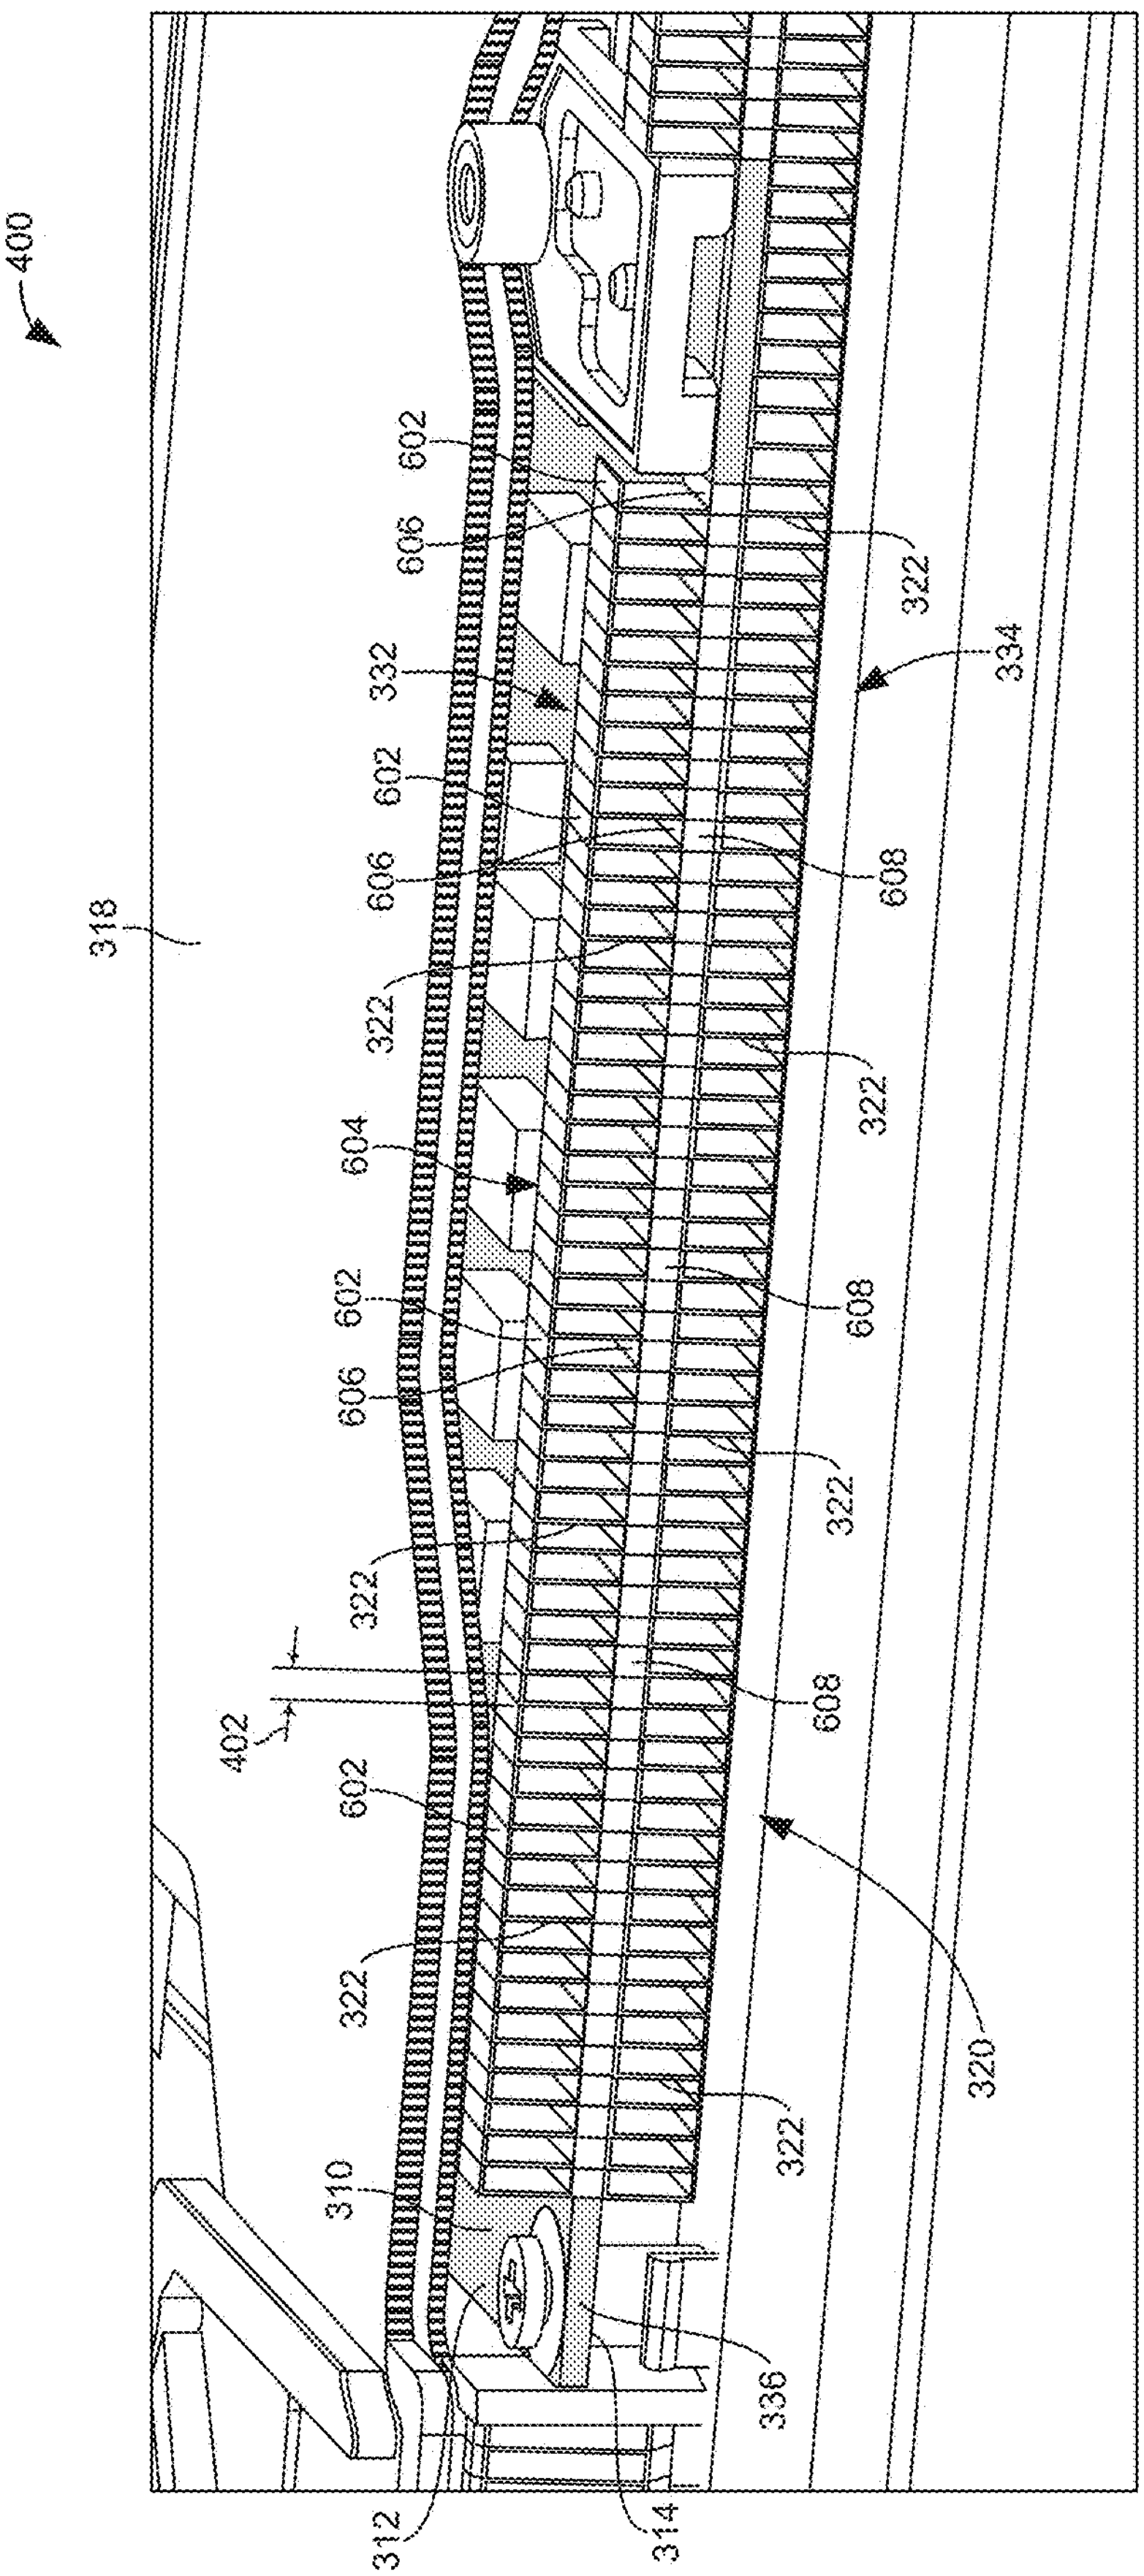
400
318
602
606
332
602
606
322
604
602
606
322
402
602
322
310
312
314
336
320
322
322
608
322
608
608
322
334
322

FIG. 6

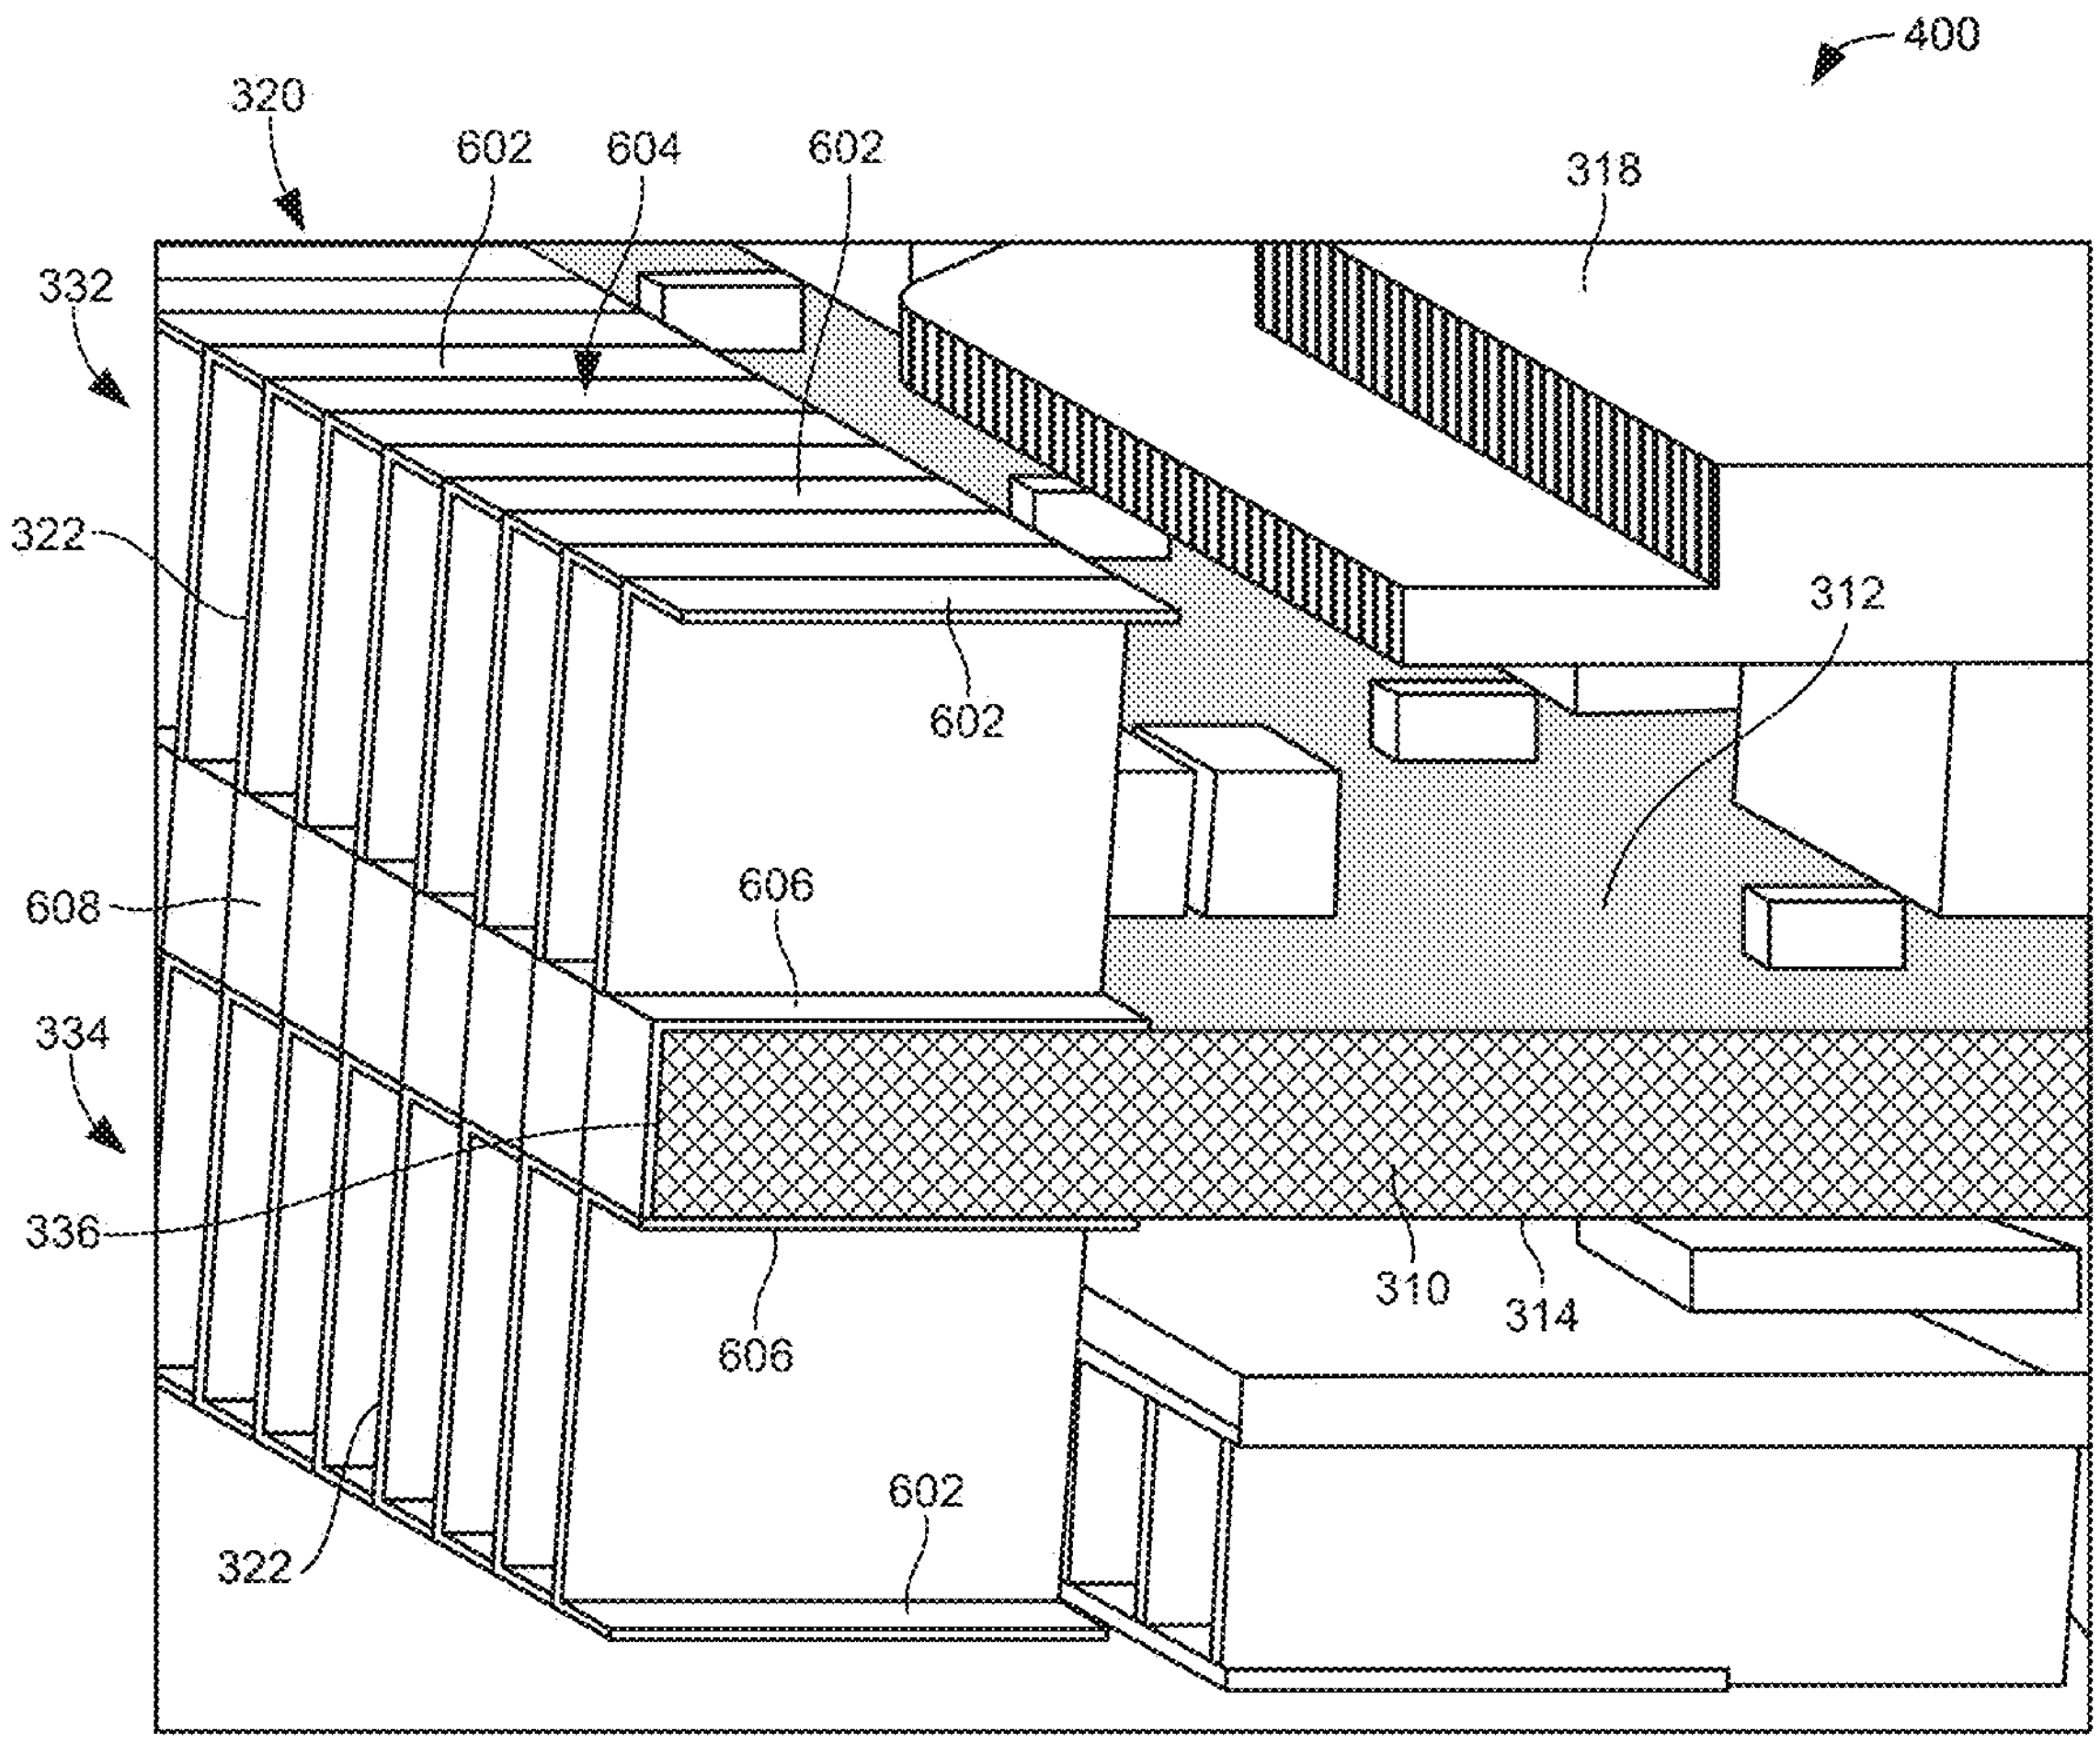
400
320
602
604
602
318
332
322
602
312
608
606
334
336
310
314
606
602
322

FIG. 7

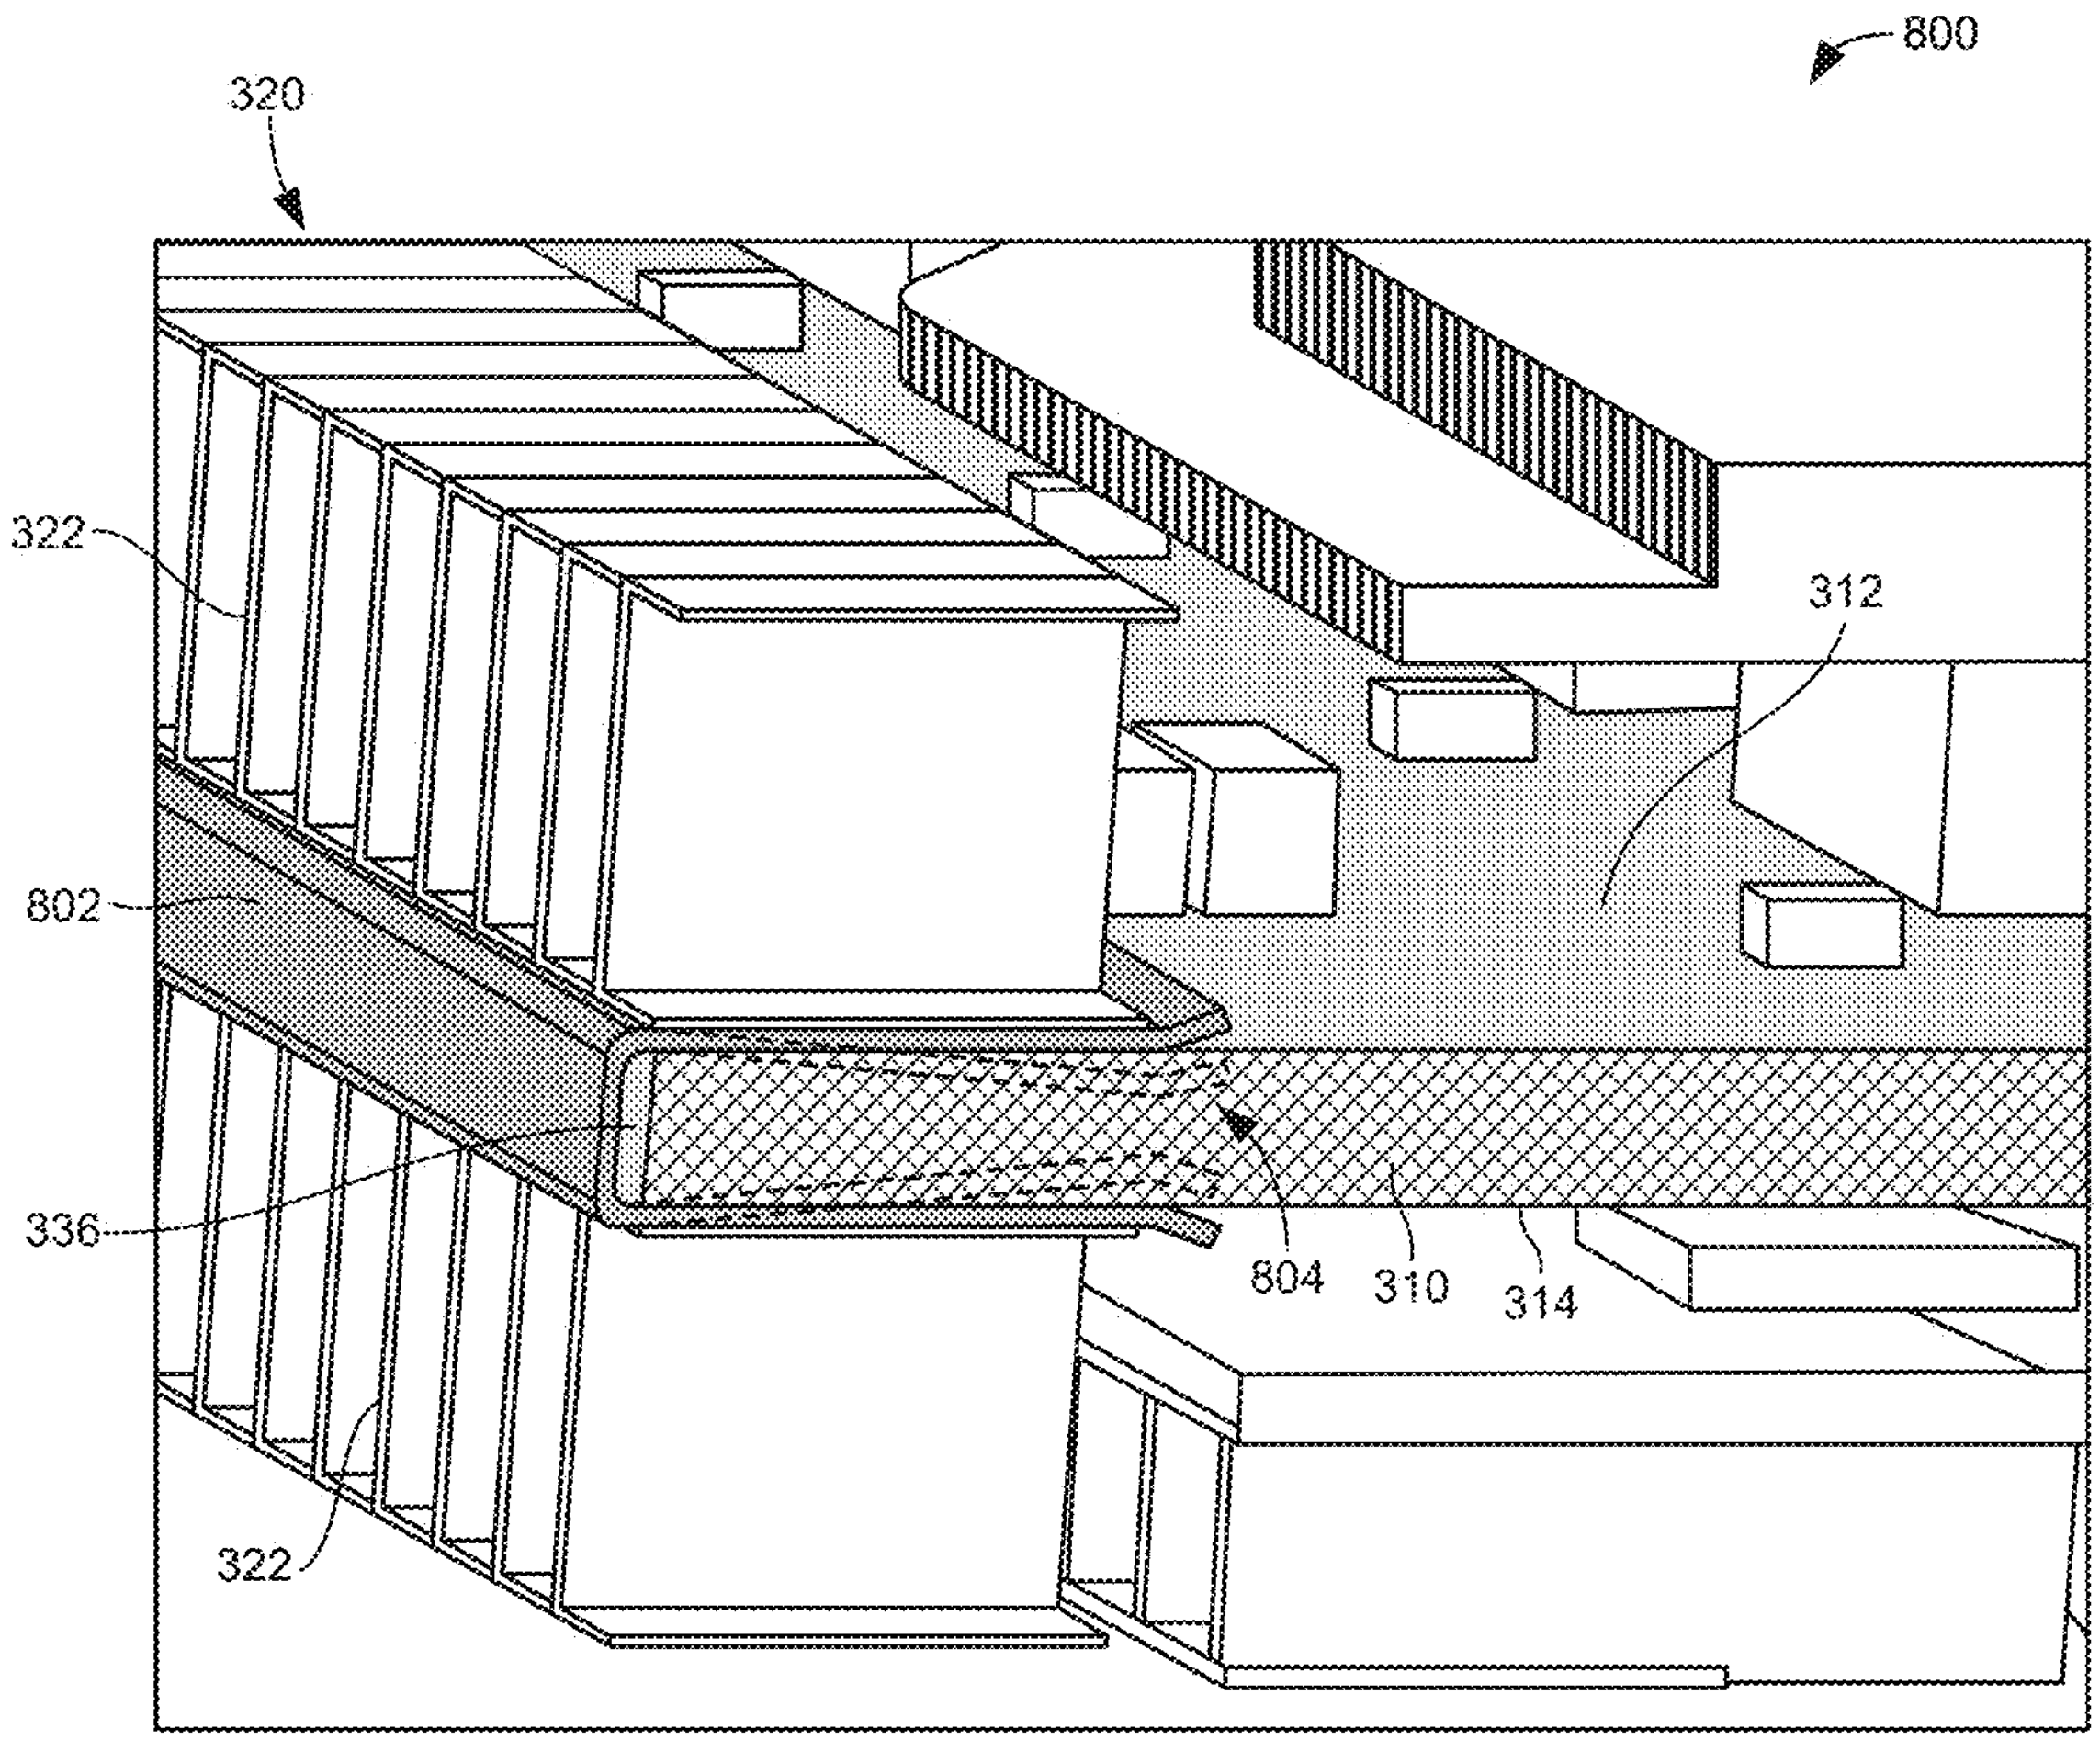

FIG. 8



FIG. 9


1000
124
122
336
328
330
332
334
322
HX
HX
322
1008
Air Flow
CPU/GPU VRs
324
326
320
308
1006
1002
1004
318
Vapor Chamber
Package
310
PCB
Air Flow
308
316
312
314
302
116
114
306
306
304
Fan
304
106
306
306
304

FIG. 10


1100
332
336
1102
334
HX
HX
1008
Air Flow
CPU/GPU
VRs
320
1006
1004
Vapor Chamber
Package
PCB
310
Air Flow
312
314
Fan

FIG. 11

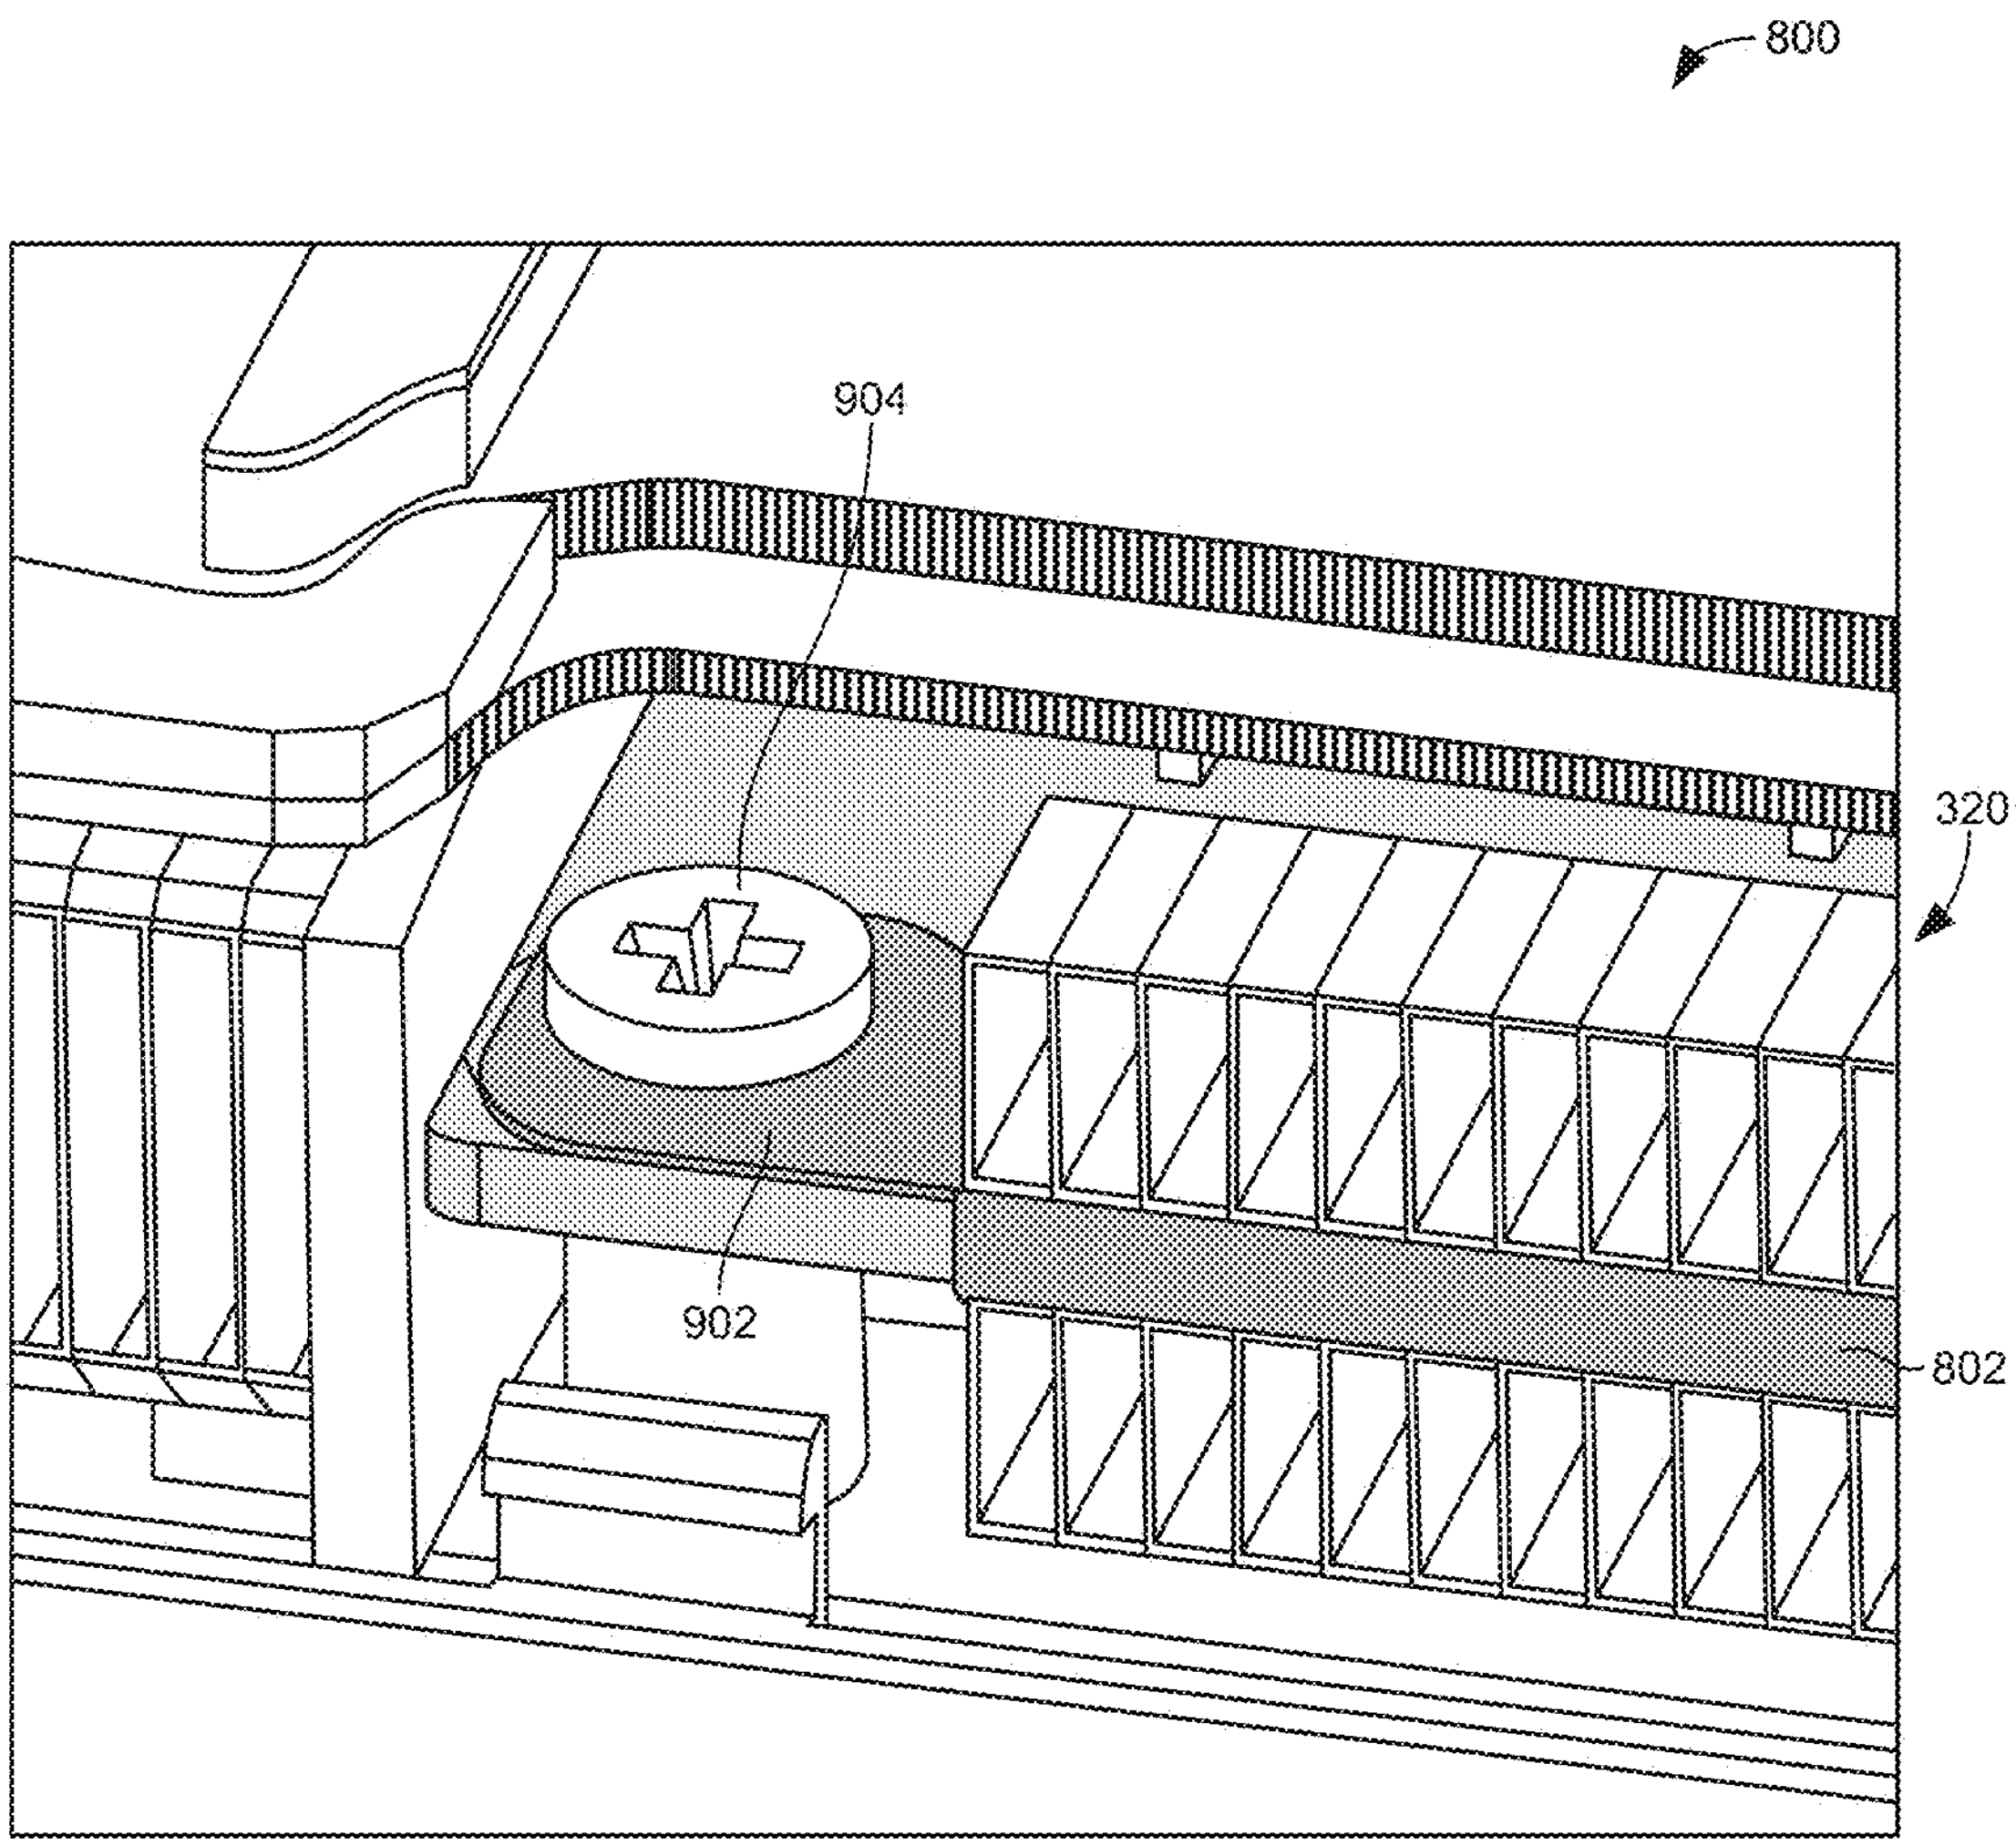
1200
336
332
334
HX
HX
1008
Air Flow
CPU/GPU VRs
320
1006
1004
Vapor Chamber
Package
PCB
310
Air Flow
312
314
Fan

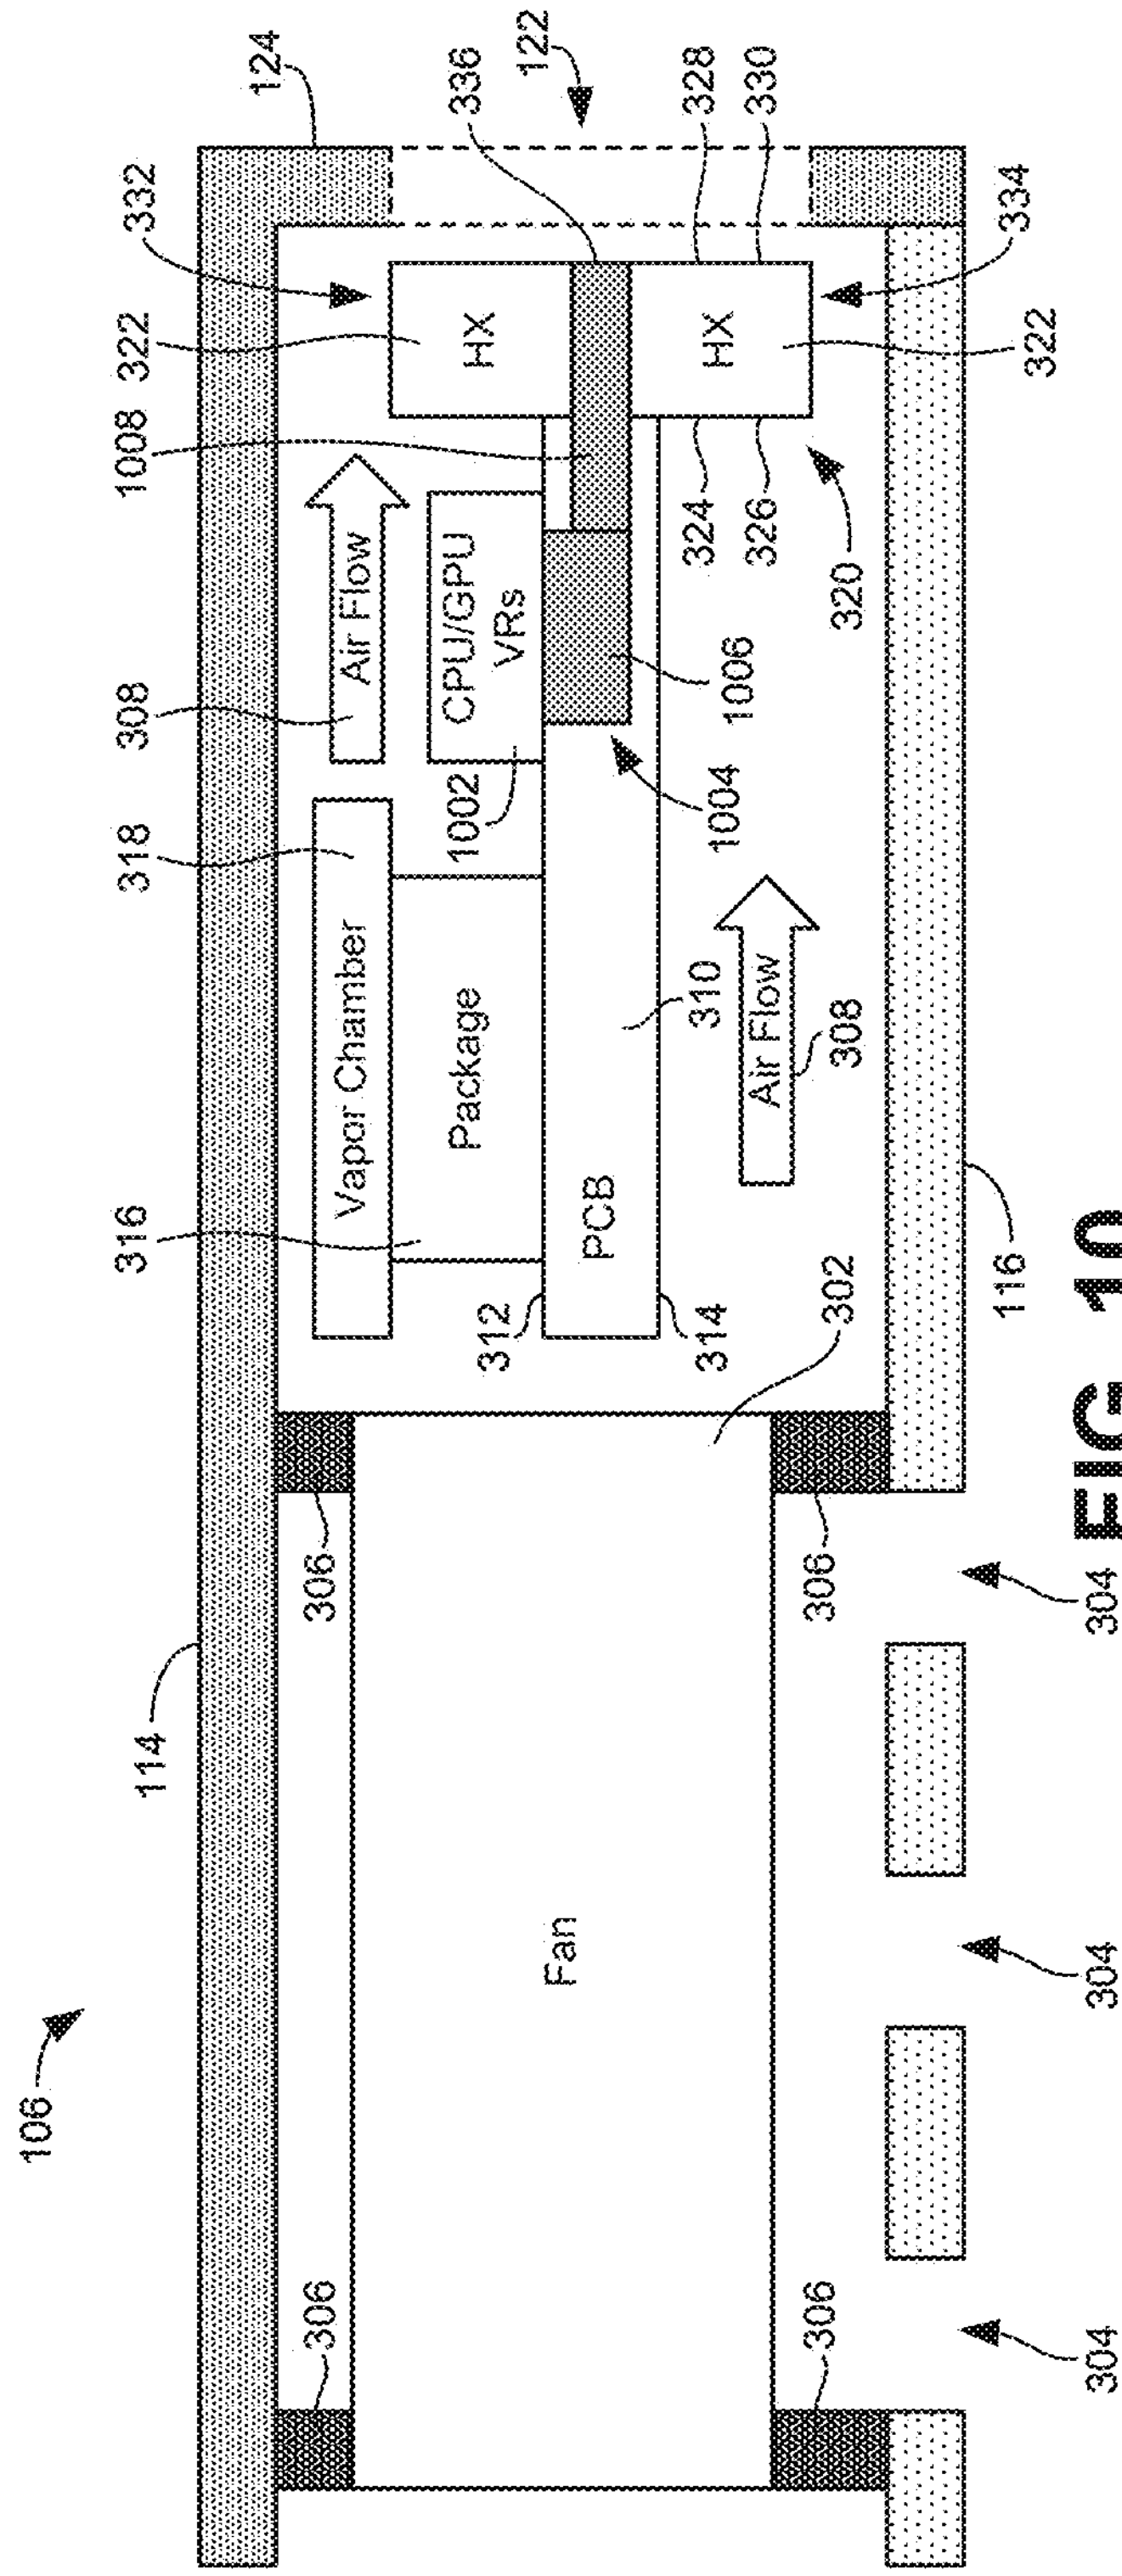FIG. 12

HEAT EXCHANGERS ON CIRCUIT BOARDS

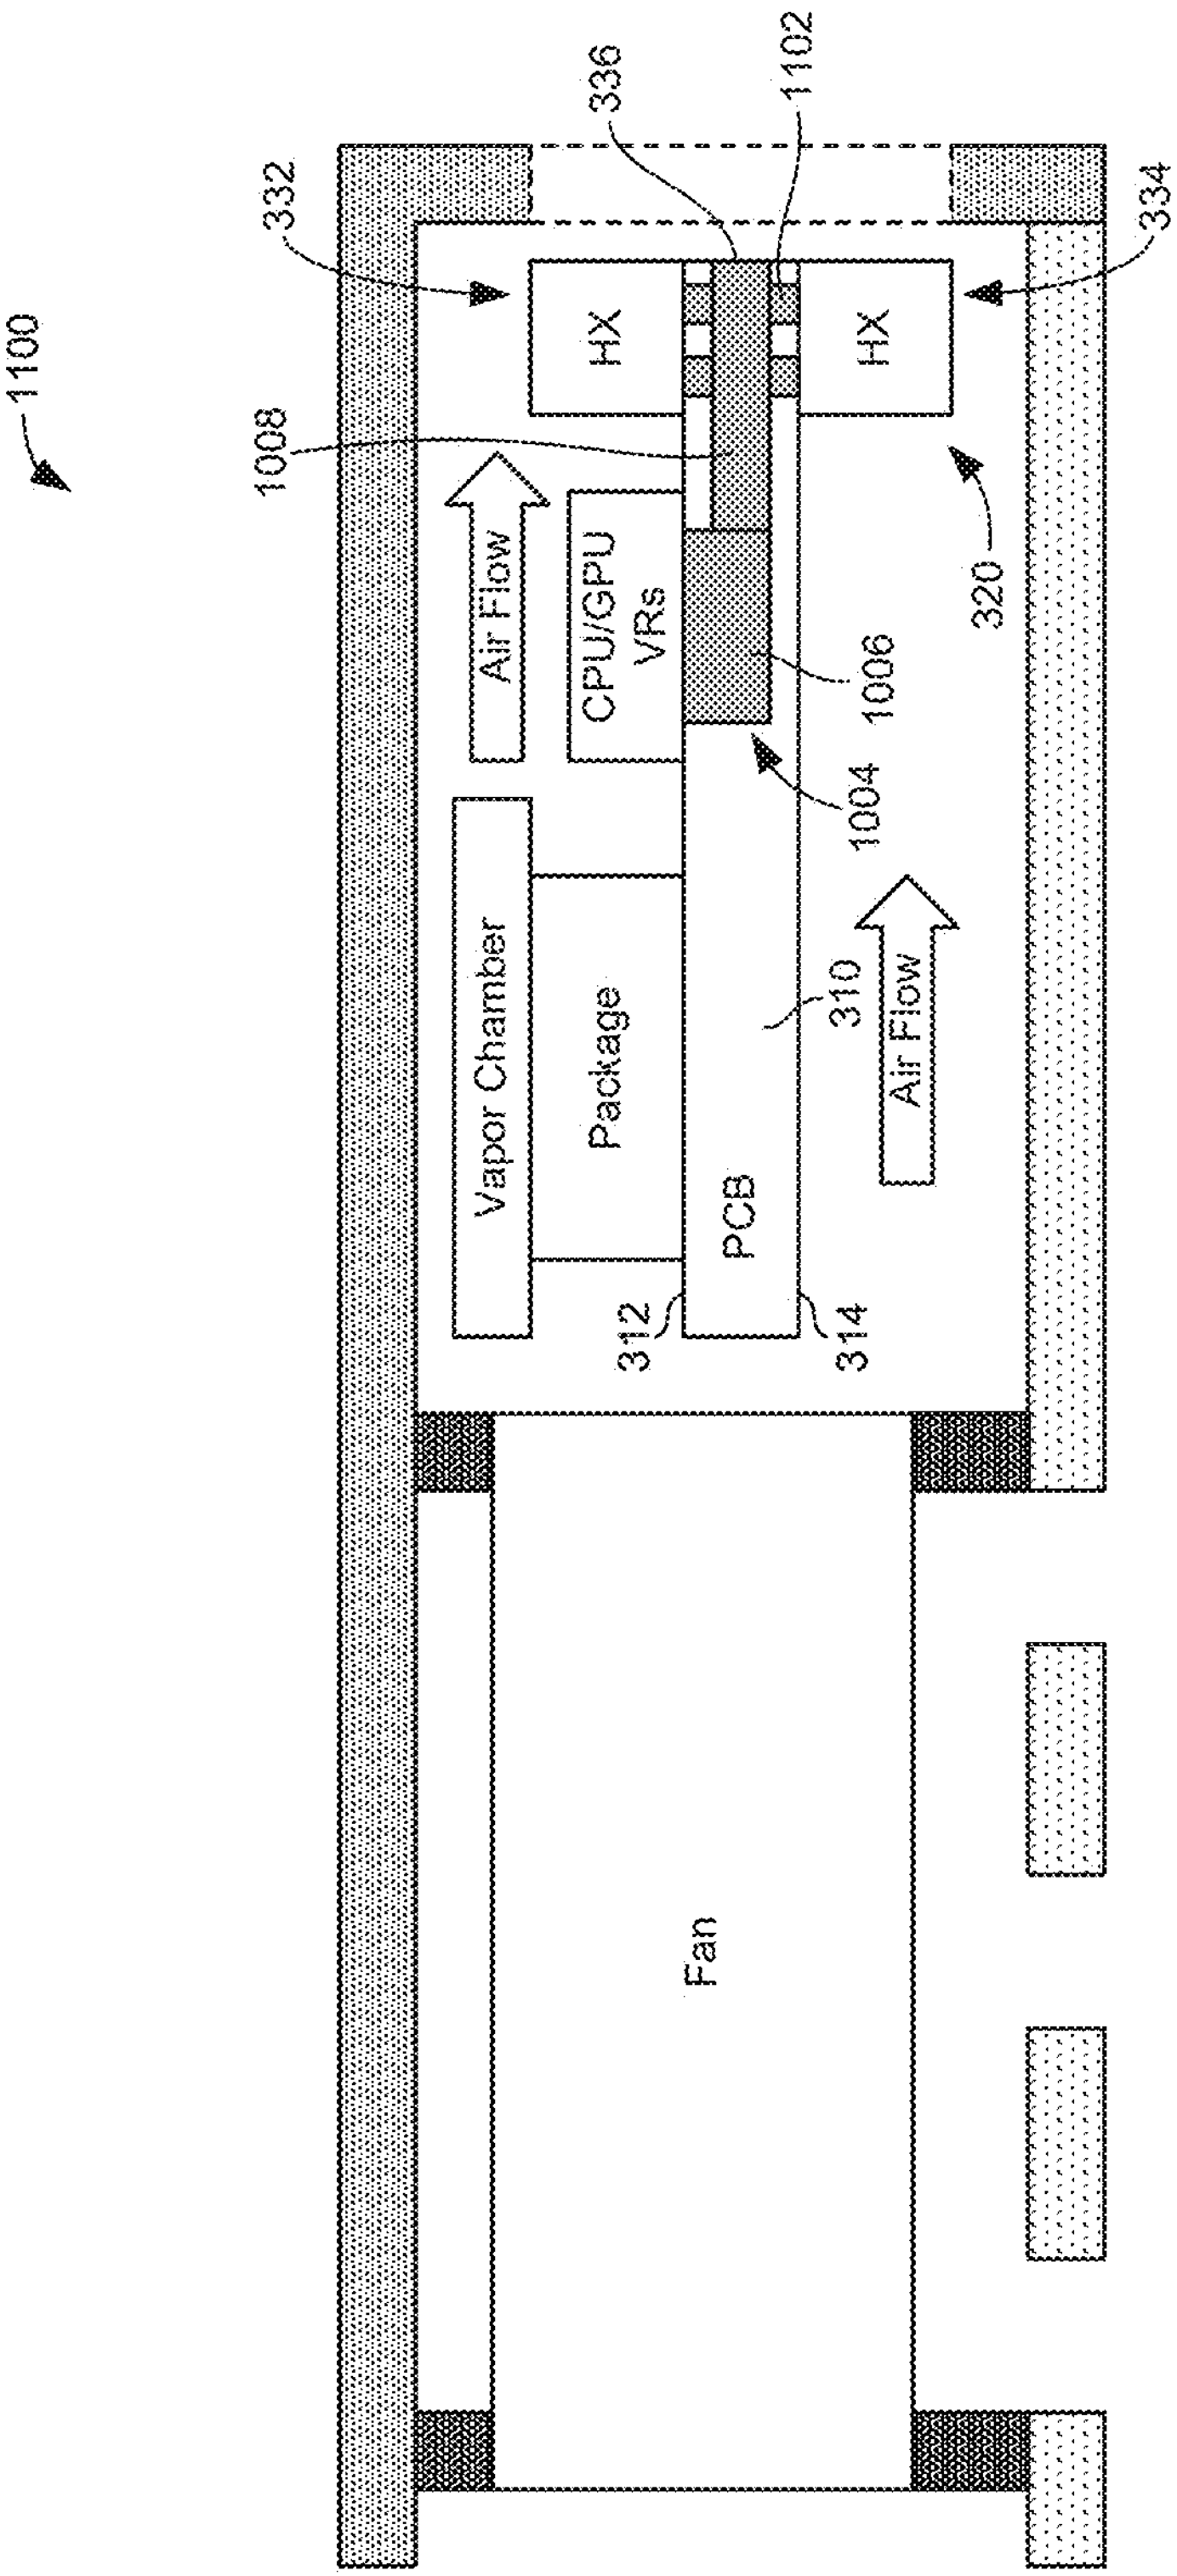FIELD OF THE DISCLOSURE

[0001] This disclosure relates generally to electronic cooling systems and, more particularly, to heat exchangers on circuit boards.

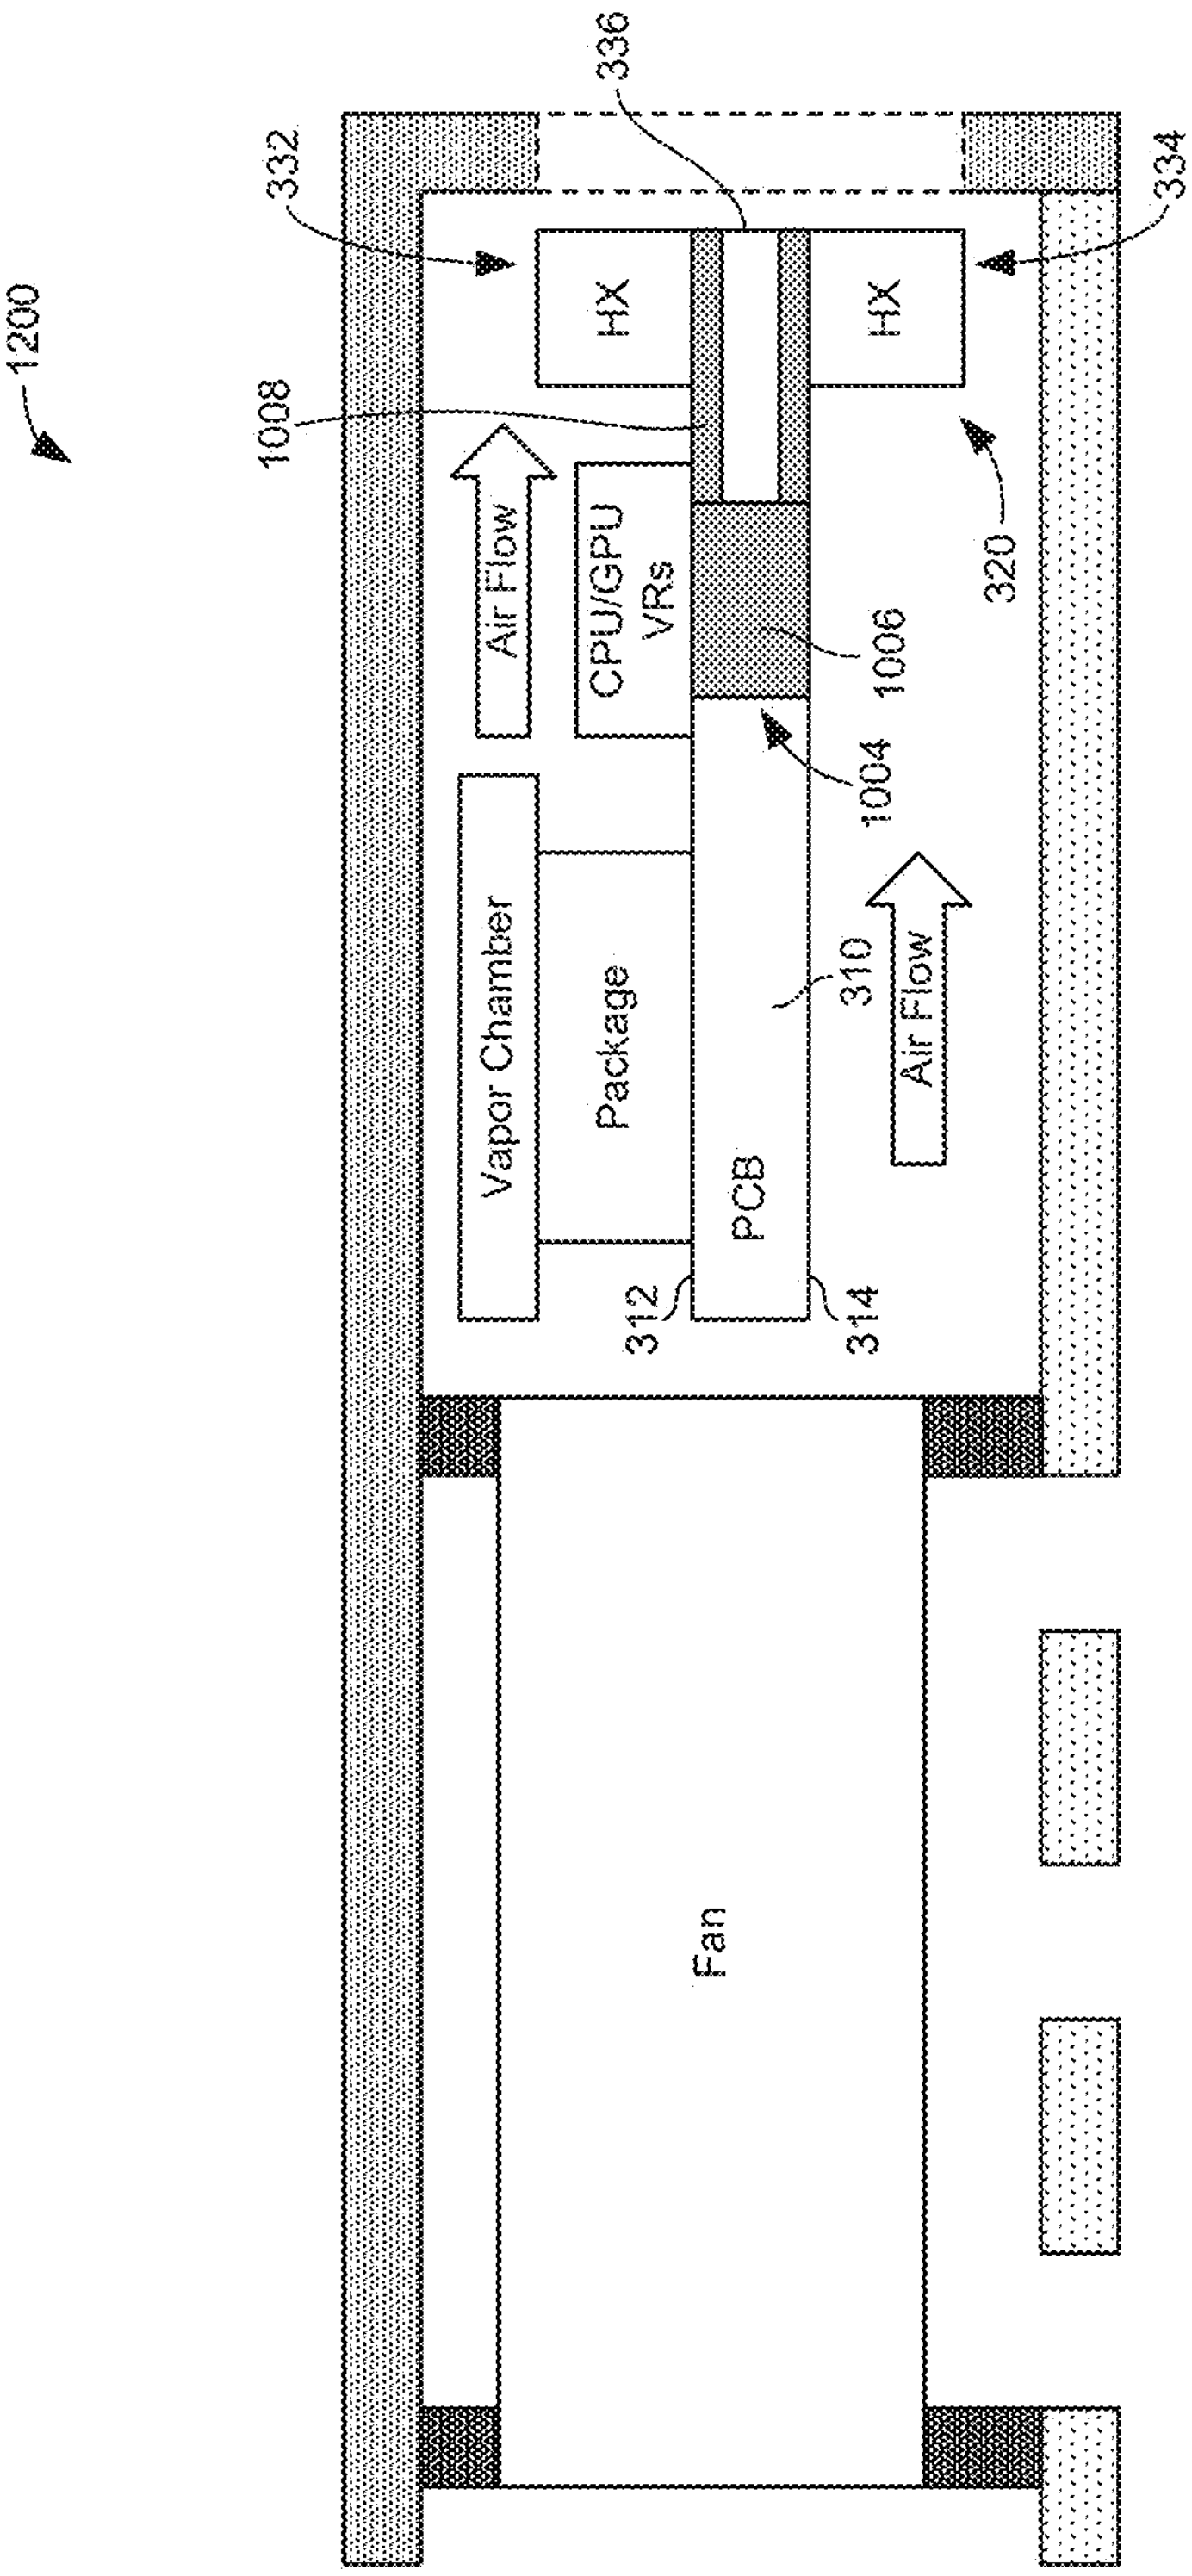BACKGROUND

[0002] Many electrical components such as integrated circuit packages produce heat when in operation. Accordingly, many electronic devices containing such components implement fans to force air across the heat producing electrical components to draw away heat and cool the system. In some cases, an array of fins (e.g., as part of a heat sink or other heat exchanger (e.g., a stacked heat exchanger)) is thermally coupled to the heat producing component and positioned in the flow path of the forced air. As a result, the heat exchanger draws heat from the electrical component and the fins provide increased surface area to transfer the heat to the air to facilitate the cooling of the system

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] FIG. **1** is a front view of an example computing device constructed in accordance with teachings disclosed herein.

[0004] FIG. **2** is a back view of the example computing device of FIG. **1**.

[0005] FIG. **3** is a schematic diagram of a cross-sectional view of the example computing device of FIGS. **1** and **2**.

[0006] FIG. **4** is an isometric view of another example computing device constructed in accordance with teachings disclosed herein.

[0007] FIG. **5** is an isometric view of the example computing device of FIG. **4** with the external chassis or housing removed to expose internal components of the example computing device.

[0008] FIG. **6** is an enlarged view of a portion of the example heat exchanger of the example computing device of FIG. **5**.

[0009] FIG. **7** is an enlarged cross-sectional view of a portion of the example heat exchanger of the example computing device of FIG. **6**.

[0010] FIG. **8** is another example computing device constructed in accordance with teachings disclosed herein.

[0011] FIG. **9** illustrates an example tab at the end of the example clip supporting the example heat exchanger of FIG. **8**.

[0012] FIG. **10** is another example computing device constructed in accordance with teachings disclosed herein.

[0013] FIG. **11** is another example computing device constructed in accordance with teachings disclosed herein.

[0014] FIG. **12** is another example computing device constructed in accordance with teachings disclosed herein.

[0015] In general, the same reference numbers will be used throughout the drawing(s) and accompanying written description to refer to the same or like parts. The figures are not necessarily to scale. Instead, the thickness of the layers or regions may be enlarged in the drawings. Although the figures show layers and regions with clean lines and boundaries, some or all of these lines and/or boundaries may be idealized. In reality, the boundaries and/or lines may be unobservable, blended, and/or irregular.

DETAILED DESCRIPTION

[0016] Many computing devices include one or more fans to help cool the processor and/or other integrated circuits in the device. Providing adequate heat transfer to cool a system is particularly challenging in portable computing devices such as tablets and laptops because of the limited space for fans and other cooling system components. One approach to cooling heat producing electrical components (e.g., integrated circuit packages) in such computing devices is through the implementation of a hyperbaric cooling system. In hyperbaric cooling systems, one or more fans draw cool air from an external environment through an inlet in the chassis or housing of the computing device, thereby creating significant air pressure within the housing. The high pressure causes the hot air to be blown through one or more outlets. As the air is being forced through the housing, the air draws heat from the heat producing components thereby cooling the system.

[0017] A significant factor contributing to the effectiveness or efficiency of a hyperbaric cooling system is the open-air ratio of the outlet for the hot air. As used herein, an open-air ratio is a measure of the free or open space within the cross-sectional area of an outlet compared to the overall cross-sectional area of the outlet. The open-air ratio is often expressed as a percentage. If the outlet is defined by an opening with no obstructions, the open-air ratio will be 100%. However, in many instances, the outlet is covered by (and/or includes) a grill or mesh to block larger particles or objects (e.g., a user's fingers) from passing through the opening. In such instances, the open-air ratio will be less than 100% because the overall area of the outlet is partially obstructed by the grill or mesh. Thus, a higher open-air ratio corresponds to a greater portion of the overall cross-sectional area of the outlet being open or unobstructed, which leads to better heat transfer because of the larger area through which the hot air can pass through the outlet and dissipate heat from the heat producing components within the computing device.

[0018] In known laptops that implement hyperbaric cooling systems, the hot air outlet is often an elongate opening that extends along an edge of the base of the chassis or housing of the laptop. Often, the chassis includes ribs that extend across the elongate opening to provide structural support and/or to block external objects (e.g., a user's fingers) from being inserted into the computing device (e.g., to protect the user and to protect the internal components). These ribs provide an obstruction across the outlet, thereby reducing the open-air ratio of the outlet. The impact of such ribs on the open-air ratio depends on the size and spacing of the ribs. In some instances, the ribs are spaced apart with an intervening gap of no more than 1.0 millimeter (mm) to meet safety requirements with the thickness of the ribs typically ranging from 1.0 mm to 2.0 mm depending on the material used for the ribs. Such outlet designs have an open-air ratio of approximately 45%. In some instances, the ribs can be spaced farther apart with a separate mesh positioned behind and/or between the ribs. Frequently, the individual strands or wires of the mesh are much finer (e.g., thinner) than the ribs so as to obstruct less of the cross-sectional area of the outlet. For instance, some metal meshes have an open-air ratio of approximately 62%. When such meshes are combined with the ribs across an outlet provided for structural support, the overall open-air ratio can be between 50% and 55%.

[0019] Some known laptops use an array of heat exchanger fins instead of a mesh or grill. That is, the fins are arranged with a spacing of no more than 1.0 mm apart to meet safety requirements without the need for a separate wire mesh. Further, in some instances, the heat exchanger fins may be thermally coupled to the heat producing electrical components to draw heat from such components and further facilitate heat transfer to the forced air as it passes between the fins and through the outlet. Some known laptop designs that use heat exchanger fins achieve an open-air ratio up to 71%. While this approach provides an improved open-air ratio relative to a wire mesh implementation, it comes at the cost of space within the housing because of the width of the fins relative to the negligible thickness of a mesh. In particular, some known devices implement heat exchanger fins having a width of approximately 6 mm. As a result, there is a loss in space available for a circuit board to support components and/or to route signals between such components. For example, assuming the heat exchanger fins (and associated outlet) extend 154 mm along an edge of the circuit board, there is a total loss of 924 square millimeters (6 mm×154 mm).

[0020] Examples disclosed herein implement an outlet design that achieves an open-air ratio of more than 71% (e.g., at least 72%, at least 73%, at least 74%, at least 75%, at least 76%, at least 77%, etc.). This is achieved using an array of heat exchanger fins as discussed above. However, unlike existing techniques that sacrifice board space for the fins, examples disclosed herein do not affect the size of a circuit board. This is possible because the fins do not extend continuously the full distance across the outlet and, instead, attach to one or both sides of the circuit board along the edge of the board. In some examples, the fins on either side of the circuit board are thermally coupled by a thermally conductive connection that wraps around the edge of the circuit board. While the presence of the fins on one or both sides of the circuit board prevent other components from being mounted to the circuit board at that location, the internal space within the circuit board remains available to provide electrical routing between components mounted at other locations on the circuit board. This additional space for electrical routing within a circuit board can reduce the complexity and, thus, the cost of manufacturing the circuit board. In some examples, at least some of the internal space within the circuit board includes a thermally conductive slug or heat pipe that facilitates the thermal coupling of heat producing components on the circuit board with the heat exchanger fins to improve heat transfer to the forced air passing through the fins. Additionally or alternatively, in some examples, the fins are thermally coupled to the heat producing components by way of a vapor chamber external to the circuit board.

[0021] FIG. **1** illustrates a front view of an example computing device **100** constructed in accordance with teachings disclosed herein. FIG. **2** illustrates a back view of the example computing device **100** of FIG. **1**. In the illustrated example, the computing device **100** is a laptop computer that implements one or more fans to facilitate the cooling of heat producing components (e.g., electronic components) during operation. In other examples, the computing device **100** can be any other type of electronic device that cools heat producing components (e.g., electronic components) using forced air blown by one or more fans.

[0022] The example computing device **100** of FIG. **1** includes a chassis or housing **102** that includes a lid **104** and a base **106**. In some examples, the lid **104** includes an A cover **108** and a B cover **110**. A display screen **112** is disposed in the B cover **110** of the lid **104**. In some examples, the display screen **112** is a touch sensitive display (e.g., a touchscreen). In some examples, the base **106** includes a C cover **114** and a D cover **116**. In this example, a keyboard **118** and a touchpad **120** are disposed in the C cover **114**. In some examples, the lid **104** is rotatably coupled to the base **106** via a hinge to enable the lid **104** to be moved (e.g., opened and closed) relative to the base **106**.

[0023] In the illustrated example the base **106** of the housing **102** contains heat producing components such as, for example, one or more integrated circuit packages and/or other electronic components. In some examples, the integrated circuit packages include and/or correspond to chips, microchips, a semiconductor substrate coupling multiple circuit elements, a system on chip (SoC), programmable circuitry including one or more programmable microprocessors such as Central Processor Units (CPUs), Field Programmable Gate Arrays (FPGAs), Graphics Processor Units (GPUs), Digital Signal Processors (DSPs), XPUs, Network Processing Units (NPUs), one or more microcontrollers, Application Specific Integrated Circuits (ASICs), etc. In this example, excess heat produced by such electronic components is dissipated by the flow of forced air blown by one or more fans in the base **106** as detailed further below. Accordingly, in some examples, the base **106** includes one or more air openings that serve as inlets to intake cool (e.g., ambient) air from the environment surrounding the computing device **100**. Further, in some examples, the base **106** includes one or more openings that serve as outlets to expel hot air that has been heated due to the transfer of heat from the heat producing components to the air.

[0024] More particularly, in this example, the base **106** includes an opening or outlet **122** positioned at a center (e.g., a center outlet) of a rear edge **124** of the base **106**. As shown in the illustrated example, the outlet **122** is elongate along the rear edge **124** with a length that is considerably greater than its height. In some examples, the outlet **122** can be different sizes and/or at different locations from what is shown in the illustrated example. For instance, in some examples, the outlet **122** may be shorter or longer than what is shown in FIG. **2**. In some examples, there may be more than one outlet spaced apart along the rear edge **124** of the base **106**. Additionally or alternatively, in some examples, the outlet **122** (and/or one or more other outlet(s)) may be positioned on one or both side edges **126**, **128** of the base **106**. Further, in some examples, the outlet **122** (and/or one or more other outlet(s)) may be on the underside of the computing device **100** (in the D cover **116**). In other examples, the outlet **122** can be at any other suitable location on the computing device **100**. In the illustrated example of FIGS. **1** and **2**, the inlet(s) for ambient air are not visible because they are on the underside of the computing device **100**. In other examples, the inlet(s) can additionally or alternatively be on the side edges **126**, **128**, the rear edge **124**, and/or at any other suitable location.

[0025] In some examples, the outlet **122** includes one or more ribs **130** distributed along the length of the outlets to provide structural support to the outlet **122**. In some examples, the ribs **130** are an integral portion of the housing **102**. That is, in some examples, the ribs **130** are part of the

C cover **114** and/or the D cover **116**. In some examples, the ribs **130** are spaced relatively close together to prevent objects from entering into the housing **102** through the outlet **122** (e.g., objects larger than the spacing of the ribs **130**). In some examples, the spacing of the ribs **130** is not important to block objects from entering the housing **102** because a separate mesh or grill extends across the gaps between the ribs **130**. More particularly, in examples, disclosed herein, such a mesh or grill is implemented by an array of heat exchanger fins (e.g., the heat exchanger fins **322** shown in FIG. **3**) positioned within the base **106** adjacent the outlet **122** as discussed in further detail below.

[0026] The outlet **122** has an open-air ratio defined by the proportion or percentage of the overall area of the outlet **122** that is unobstructed by any object. The overall area of the outlet **122** corresponds to the height of the outlet **122** multiplied by the width or length of the outlet. Obstructions within the outlet affecting the open-air ratio include the ribs **134** and the heat exchanger fins **322** positioned along the length of the outlet **122**. The thickness and spacing of the ribs **134** as well as the thickness and spacing of the fins **322** determine the open-air ratio for the outlet **122** as discussed further below.

[0027] FIG. **3** is a schematic diagram of a cross-sectional view of the example computing device **100** of FIGS. **1** and **2**. More particularly, FIG. **3** illustrates a cross-sectional view of a portion of the base **106** showing the rear edge **124** of the base **106** by the outlet **122**. For purposes of clarity, the ribs **130** shown in FIG. **2** are omitted in FIG. **3**. FIG. **3** shows internal components between the C cover **114** and the D cover **116**. In this example, the rear edge **124** of the base **106** is defined by the C cover **114** that extends downward toward the edge to the D cover **116**, which is limited to the bottom or underside of the base **106**. Thus, as shown in FIG. **3**, the outlet **122** is in the C cover **114**. In other examples, the rear edge **124** is defined by the D cover **116** that extends upwards toward the C cover **114**. In such examples, the outlet **122** is in the D cover **116**. In other examples, both the C cover **114** and the D cover **116** may define portions of the rear edge **124** and, thus, portions of the outlet **122**.

[0028] As shown in the illustrated example of FIG. **3**, the computing device **100** includes a fan **302** positioned adjacent one or more openings or inlets **304** on the underside of the base **106** (e.g., in the D cover **116**). As mentioned above, in some examples, the inlets **304** can be positioned at any other suitable location on the base **106**. In this example, the fan **302** is relatively flat or thin (to fit within the relatively thin space between the C and D covers **114**, **116**) and held in place by one or more gaskets **306**. The fan **302** draws air from an external environment through the inlets **304** and into the housing of the base **106**, thereby increasing the pressure inside the base **106** (e.g., a hyperbaric condition) to produce a flow of forced air (air flow **308**) towards the outlet **122**. As shown in the illustrated example, the air flow **308** extends across a circuit board **310** (e.g., a printed circuit board (PCB)). More particularly, in this example, the air flow **319** travels across a first (top) surface **312** of the circuit board **310** as well as a second (bottom) surface **314** of the circuit board **310**. In other examples, the air flow **308** may travel predominately (e.g., exclusively) across one of the surfaces **312**, **314** of the circuit board **310**.

[0029] As shown in FIG. **3**, as the air flow **308** travels towards the outlet **122**, the air flow **308** passes over one or more heat producing components **316** (e.g., an integrated circuit package) to cool the components by drawing away heat produced therefrom. Further, in this example, the air flow **308** passes across a vapor chamber **318** thermally coupled to the heat producing component **316**. The vapor chamber **318** draws heat away from the heat producing component **316** and then transfers at least some of the heat to the air flow **308** to be dissipated to the external environment after the air is expelled through the outlet **122**. In some examples, as represented in FIG. **3**, the vapor chamber **318** is also thermally coupled to a heat exchanger **320** to pass heat from the heat producing component **316** to the heat exchanger **320**.

[0030] In some examples, the vapor chamber **318** includes a metal exterior that is electrically coupled to the fins **322** (also made of metal). In some such examples, the vapor chamber **318** and/or the fins **322** are grounded on the circuit board to define a closed metal shield that can mitigate radio frequency interference (RFI) and/or electromagnetic interference (EMI). Further, in some such examples, a metal mesh with gaps less than approximately 2 mm (e.g., less than 1 mm) is electrically coupled to the heat exchanger fins **322** and/or the vapor chamber **318** to improve the RFI/EMI mitigation.

[0031] In the illustrated example of FIG. **3**, the heat exchanger **320** includes an array of heat exchanger fins **322** aligned with the direction of the air flow **308** at a position adjacent to and upstream of the outlet **122** so that the air flow sequentially passes through the heat exchanger **320** and then out through the outlet **122**. Thus, in this example, the heat exchanger **320** includes a first (upstream) side **324** corresponding to leading (upstream) edges **326** of the fins **322** and a second (downstream) side **328** corresponding to trailing (downstream) edges **330** of the fins **322**. That is, the fins **322** extend in in a direction aligned with the direction of the air flow **308** and transverse to the first and second sides **324**, **328** of the heat exchanger **320**. As shown in FIG.

[0032] **3**, the first side **324** of the heat exchanger **320** (and the leading edges **326** of the associated fins **322**) face toward the heat producing component **316** and away from the outlet **122**. By contrast, the second side **328** of the heat exchanger **320** (and the trailing edges **330** of the associated fins **322**) face away from the heating producing component **316** and toward the outlet **122**. Due to this arrangement, before the air flow **308** reaches the opening, the air flow **308** passes through the fins **322**. As a result, the forced air will draw heat away from the fins **322** to further facilitate the dissipation of heat generated by the heat producing component **316**.

[0033] In the illustrated example of FIG. **3**, the heat exchanger **320** includes a first portion **332** on the first surface **312** of the circuit board **310** and a second portion **334** on the second surface **314** of the circuit board **310**. That is, unlike known cooling systems that position a heat exchanger beyond the outer edge of a circuit board, in the illustrated example of FIG. **3**, the circuit board **310** extends between the two portions **332**, **334** of the heat exchanger **320** with an outer edge **336** of the circuit board **310** closer to the second side **328** of the heat exchanger **320** than the outer edge **336** is to the first side **324** of the heat exchanger **320**. An advantage of arranging the heat exchanger **320** on the surfaces **312**, **314** of the circuit board **310** is that it enables an increase in the size of the circuit board **310**. While this extra board space does not provide space for components to be mounted to the board **310** (because that is where the heat exchanger **320** is located), it at least provides extra space for electrical routing within the board **310**, thereby reducing the cost and/or complexity of the design of the circuit board **310**. That is, as shown in the illustrated example of FIG. **3**, the circuit board **310** includes electrical routing **338** (e.g., electrical circuit path(s), trace(s), via(s), reference plane(s), etc.) at locations laterally between the first and second sides **324**, **328** of the heat exchanger **320** (e.g., between the first and second portions **332**, **334** of the heat exchanger **320**). In other words, the electrical routing **338** extends closer to the outlet **122** (and closer to the outer edge **336** of the circuit board **310**) than the first (upstream) side **324** of the heat exchanger **320** is to the outlet **122** (and the outer edge **336** of the circuit board **310**).

[0034] In some examples, one of the portions **332**, **334** of the heat exchanger **320** may be omitted. That is, in some examples, the heat exchanger is positioned on only one surface **312**, **314** of the circuit board **310** (e.g., when the computing device **100** is designed so that the air flow **308** predominately (e.g., exclusively) travels across the corresponding surface **312**, **314** of the circuit board **310**). Further, in some examples, other components shown in FIG. **3** may be omitted and/or in different locations than shown in the illustrated example. For instance, in some examples, the heat producing component **316** (along with the vapor chamber **318**) may be on the opposite side of the circuit board **310** (e.g., on the second surface **314** facing the D cover **116** instead of on the first surface **312** facing the C cover **114**. In some examples, multiple heat producing components **316** may be on one or both surfaces **312**, **314** of the circuit board **310**. Likewise, in some examples, multiple vapor chambers **318** may be positioned on one or both sides of the circuit board **310**. In some examples, the vapor chamber **318** is omitted.

[0035] FIG. **4** is an isometric view of another example computing device **400** constructed in accordance with teachings disclosed herein. The computing device **400** of FIG. **4** is an example implementation of the example computing device **100** of FIGS. **1-3**. Accordingly, the reference numerals used in FIGS. **1-3** are used for the same or similar features shown in FIG. **4** and the description of those features provided above applies equally to the corresponding features shown in FIG. **4**. In the illustrated example of FIG. **4**, the rear edge **124** of the base **106** is shown with the lid **104** in a closed position against the base **106**. As shown in FIG. **4**, the rear edge **124** of the base **106** includes the opening or outlet **122** that is supported by a plurality of ribs **130**. Through the ribs **130**, an array of the fins **322** of the heat exchanger **320** are visible in FIG. **4**. The heat exchanger **320** and the array of fins **322** are shown more clearly in the illustrated example of FIG. **5**.

[0036] FIG. **5** is an isometric view of the example computing device **400** of FIG. **4** except that the computing device has been inverted or flipped over and the external chassis or housing **102** (e.g., the A cover **108**, the B cover **110**, the C cover **114**, and the D cover **116**) has been removed to expose the internal components. Specifically, FIG. **5** shows the fan **302** (e.g., two fans in this example), the vapor chamber **318**, the circuit board **310** (underneath the vapor chamber **318**), and the heat exchanger **320** extending along the outer edge **336** of the circuit board **310**. As shown in the illustrated example of FIGS. **4** and **5**, the heat exchanger **320** (defined by an array of fins **322**) extends along a substantial portion (all, substantially all, a majority, etc.) of the length of the outlet **122**. As shown in FIG. **4**, the pitch or spacing **402** of the fins **322** is smaller than the pitch or spacing **404** of the ribs **130**. In some examples, the spacing **402** of the fins **322** is less than or equal to **1.0** mm to serve the function of a grill or mesh between the ribs **130** that satisfies safety requirements to block or prevent small objects from entering through the outlet **122**. In some examples, the spacing **402** of the fins is significantly less than 1.0 mm (e.g., less than or equal to 0.8 mm, less than or equal to 0.5 mm, less than or equal to 0.2 mm, etc.) to enable more fins to fit along the length of the opening and increase the total surface area across which the air flow **308** passes to increase heat transfer. Inasmuch as the ribs **130** do not need to be relied on to block small objects, there is less need to position the ribs **130** close together. As a result, fewer ribs **130** are needed across the length of the outlet **122** and, therefore, the proportion of the opening of the outlet **122** blocked by the ribs **130** can be reduced to increase the open-air ratio of the outlet **122**. In some examples, the pitch **404** of the ribs **130** is at least 3.0 mm or more (e.g., at least 5 mm, at least 7 mm, at least 10 mm, etc.). In some examples, the open-air ratio of the outlet **122** is greater than 71% (e.g., at least 72%, at least 73%, at least 74%, at least 75%, at least 76%, at least 77%, etc.). This open-air ratio is higher than other known cooling systems and testing has shown that such an open-air ratio provides an improvement in the outgoing flow rate of the air and a corresponding improvement in the cooling efficiency of the system.

[0037] FIG. **6** is an enlarged view of a portion of the heat exchanger **320** of the example computing device **400** shown in FIG. **5**. FIG. **7** is an enlarged cross-sectional view of a portion of the heat exchanger **320** of the example computing device **400** shown in FIG. **6**. As shown in the illustrated examples, the heat exchanger **320** includes an array of individual fins **322** distributed along the outer edge **336** of the circuit board **310**. Further, in this example, the fins **322** protrude away from both surfaces **312**, **314** of the circuit board **310** and are orientated in a direction that extends transverse to the outer edge **336** of the board **310** (e.g., in a direction aligned with the air flow **308** shown in FIG. **3**). In some examples, the individual fins **322** include corresponding outer flanges **602** at distal ends of the fins **322** farthest away from the circuit board **310**. In some examples, the outer flanges **602** extend a distance corresponding to the spacing **402** of the fins **322** to enclose air passageways between adjacent ones of the fins **322**. In some examples, the outer flanges **602** collectively define an outer surface **604** of the heat exchanger **320**. In some examples, a continuous plate extends across the distal ends of the fins **322** in addition to or instead of the outer flanges **602** to define the outer surface **604**.

[0038] In some examples, the outer surface **604** of the heat exchanger **320** facilitates thermal coupling of the heat exchanger **320** with the vapor chamber **318** (partially cutaway in the illustrated example). In some examples, the outer surface **604** and the vapor chamber **318** are in direct contact. In some examples, a thermal interface material (TIM) is positioned between the outer surface **604** and the vapor chamber **318**. In some examples the outer flanges **602** (and/or the corresponding continuous plate) are omitted. In some examples, the vapor chamber **318** is spaced apart from (e.g., not thermally coupled to) the heat exchanger **320**. In some such examples, the heat producing component **316** may still be thermally coupled to the heat exchanger through other means. More particularly, in some examples, the heat producing component **316** is thermally coupled to the heat exchanger via a heat transfer path within the circuit board **310** as discussed further below in connection with FIGS. **10-12**.

[0039] In some examples, the individual fins **322** include corresponding inner flanges **606** at proximal ends of the fins **322** closest to the circuit board **310**. In some examples, the inner flanges **606** extend a distance corresponding to the spacing **402** of the fins **322** to enclose the air passageways between adjacent ones of the fins **322**. In some examples, a continuous plate extends across the proximal ends of the fins **322** in addition to or instead of the inner flanges **606**. In some examples, the inner flanges **606** (and/or a corresponding continuous plate) enables the heat exchanger **320** to be coupled to the circuit board **310**. The heat exchanger **320** of the illustrated example can be coupled to the circuit board **310** in any suitable manner (e.g., using surface mount technology (SMT), soldering, thermal bonding, clamping, screwing, etc.). In some examples, the heat exchanger **320** is in direct contact with the circuit board **310**. In some examples, a thermal interface material (TIM) is positioned between the heat exchanger **320** and the circuit board **310**. In some examples the inner flanges **606** (and/or the corresponding continuous plate) are omitted.

[0040] As discussed above, in some examples, the heat exchanger **320** includes a first portion **332** on the first surface **312** of the circuit board **310** and a second portion **334** on the second (opposite) surface **314** of the circuit board **310**. As shown in the illustrated example of FIG. **6**, the first portion **332** includes a first array of the fins **322** and the second portion **334** includes a second array of the fins **322**. In this example, the fins **322** are the same size and spaced apart by the same distance on both surfaces of the circuit board **310**. However, in some examples, the fins **322** on one surface of the board **310** may be larger (e.g., if there is more clearance on one side than the other) and/or spaced apart at a different pitch than the fins **322** on the other surface of the board **310**. In some examples, individual ones of the fins **322** include and/or are associated with a corresponding edge flange **608** that extends across (e.g., wraps around) the outer edge **336** of the circuit board **310**. In some examples, the edge flanges **603** facilitate the thermal coupling of the fins **322** on either side of the circuit board **310**. In some examples, a continuous plate extending the length of multiple (e.g., all) of the fins **322** in the array may be used to wrap around the outer edge **336** of the circuit board **310** in addition to or instead of the outer flanges **602**. In some examples, the edge flanges **608** (and/or the corresponding continuous plate) are omitted.

[0041] FIG. **8** is an enlarged cross-sectional view of another example computing device **800** constructed in accordance with teachings disclosed herein. The computing device **800** of FIG. **8** is another example implementation of the example computing device **100** of FIGS. **1-3** that is similar to the example computing device **400** of FIGS. **4-7** except as otherwise noted below. Thus, similar reference numerals used in FIGS. **1-7** are used for similar features shown in FIG. **8** and the description of those features provided above applies equally to the corresponding features shown in FIG. **8**. In the illustrated example of FIG. **8**, the array of fins **322** are coupled to a clip **802** that extends along the length of the heat exchanger **320** to enable the heat exchanger **320** to be removably coupled to the circuit board **310**. In some examples, the clip **802** is flexible (e.g., is a spring clip) that can be expanded from a free position (indicated by the dashed lines **804** in FIG. **8**) to fit over the outer edge **336** of the circuit board **310** into a mounted position (indicated by the solid lines in FIG. **8**). In such examples, when attached to the circuit board **310**, the flexible nature of the clip **802** produces a compressive force (e.g., a clamping force) on the opposing surfaces **312**, **314** of the circuit board **310** to hold the heat exchanger **320** in place. In some examples, to prevent the clip **802** from slipping off the circuit board **310**, the clip **802** includes one or more arms or tabs **902** including a hole through which the clip **802** can be secured to the circuit board **310** via a threaded fastener **904** as shown in FIG. **9**. Specifically, in the illustrated example of FIG. **9**, the tab **902** extends beyond the end of the heat exchanger **320**. In other examples, the clip **802** includes one or more tabs positioned between the ends of the heat exchanger **320**. In some such examples, the tab(s) extend in a direction away from the outer edge **336** of the circuit board **310**.

[0042] FIG. **10** is another example computing device **1000** constructed in accordance with teachings disclosed herein. The computing device **1000** of FIG. **10** is similar to the example computing device **100** of FIGS. **1-3** except as otherwise noted below. Accordingly, the reference numerals used in FIGS. **1-3** are used for the same or similar features shown in FIG. **10** and the description of those features provided above applies equally to the corresponding features shown in FIG. **10**. In the illustrated example of FIG. **10**, the computing device **1000** includes the same heat producing component **316** as shown in FIG. **3** as well as a second heat producing component **1002**. In this example, the second heat producing component **1002** corresponds to one or more voltage regulators (VRs) for a CPU and/or a GPU. However, in other examples, the second heat producing component **1002** can be any other suitable electronic device (e.g., video random access memory (VRAM) for a GPU, an integrated circuit, etc.). Although two heat producing components **316**, **1002** are shown in FIG. **10**, in other examples, any other suitable number heat producing components may be employed.

[0043] In the illustrated example of FIG. **10**, the first heat producing component **316** is thermally coupled to the vapor chamber **318**. However, unlike in FIG. **3**, the vapor chamber **318** in the illustrated example of FIG. **10** is spaced apart from the heat exchanger **320**. Thus, in this example, the first heat producing component **316** is not thermally coupled to the heat exchanger **320**. Separating the vapor chamber **318** from the heat exchanger **320** enables the air flow **308** to pass between the vapor chamber **318** and the heat exchanger **320** to provide a different flow pattern that may facilitate thermal cooling depending on the design of the computing device **1000**. In other examples, the vapor chamber **318** extends to and is thermally coupled with the heat exchanger **320**. In some such examples, the vapor chamber **318** is also thermally coupled to the second heat producing component **1002**. In some examples, the vapor chamber **318** is thermally coupled to the second heat producing component **1002** but physically separated from (e.g., not thermally coupled to) the heat exchanger **320**.

[0044] Regardless of whether the vapor chamber **318** (and, thus, the first heating producing component **316**) is thermally coupled to the heat exchanger **320**, in this example, the second heat producing component **1002** is thermally coupled to the heat exchanger **320**. More particularly, in this example, the second heat producing component **1002** is thermally coupled to the heat exchanger **320** via a heat transfer path **1004** defined within the circuit board **310**. That is, in this example, the heat transfer path **1004** is between the opposing first and second surfaces **312**, **314** of the circuit board **310**. As shown in FIG. **10**, the heat transfer path **1004** is thermally coupled to the second heat producing component **1002** and extends to the outer edge **336** of the circuit board **310**. The first and second portions **332**, **334** of the heat exchanger **320** are thermally coupled to either side of the heat transfer path **1004**.

[0045] In some examples, the heat transfer path **1004** includes a heat extracting element **1006** positioned inside the circuit board **310** adjacent to (e.g., below) the second heating producing component **1002**. In some examples, the heat extracting element **1006** is implemented by at least one of a metal (e.g., copper) slug or a heat pipe. In some examples, multiple copper slugs and/or multiple heat pipes may be employed. The heat extracting element **1006** is thermally coupled to the heat exchanger **320** via a metal (e.g., copper) layer **1008** in the printed circuit board. In some examples, the metal layer **1008** corresponds to one or more metal layers used for electrical routing throughout the circuit board **310**. That is, in some examples, the metal layer **1008** includes multiple layers of metal separated by one or more dielectric layers. In other examples, the metal layer **1008** is a solid body of metal thicker than the metal layers used for electrical routing in the circuit board **310**. In some examples, the metal layer **1008** is an integral extension of the heat extracting element **1006**. In some examples, as shown in FIG. **10**, the metal layer extends out to and defines the outer edge **336** of the circuit board **310**, while other layers in the circuit board **310** (e.g., on either side of the metal layer **1008**) extend up to but not beyond the first (upstream) side **324** of the heat exchanger **320**. Thus, as shown in the illustrated example, the first and second portions **332**, **334** of the heat exchanger **320** are closer to one another than the outer surfaces **312**, **314** of the circuit board **310**. However, as shown in the illustrated example, at least a part of the circuit board **310** (corresponding to the metal layer **1008**) is disposed between the first and second portions **332**, **334** of the heat exchanger **320**.

[0046] In other examples, the two portions **332**, **334** of the heat exchanger **320** are positioned on the outer surfaces **312**, **314** of the circuit board **310** as shown in the example computing device **1100** of FIG. **11**. In such examples, the metal layer **1008** is thermally coupled to the heat exchanger **320** via one or more metal slugs or vias **1102** extending through outer layers of the circuit board **310**. In this manner, the space within the outer layers of the circuit board **310** between the portions **332**, **334** of the heat exchanger **320** remain available for electrical routing as discussed above in connection with the electrical routing **338** shown in FIG. **3**. In other examples, the metal layer **1008** thermally coupling the heat extracting element **1006** to the heat exchanger **320** is implemented by a layer of metal extending along one or both outer surfaces **312**, **314** of the circuit board **310** as shown in the example computing device **1200** of FIG. **12**. In such examples, the layers of the circuit board **310** toward the middle (e.g., between the layers of metal associated with the metal layer **1008** in FIG. **12**) that are overlapped by the heat exchanger **320** (e.g., between the two portions **332**, **334** of the heat exchanger **32**) can be used for electrical routing as discussed above in connection with the electrical routing **338** shown in FIG. **3**.

[0047] "Including" and "comprising" (and all forms and tenses thereof) are used herein to be open ended terms. Thus, whenever a claim employs any form of "include" or "comprise" (e.g., comprises, includes, comprising, including, having, etc.) as a preamble or within a claim recitation of any kind, it is to be understood that additional elements, terms, etc., may be present without falling outside the scope of the corresponding claim or recitation. As used herein, when the phrase "at least" is used as the transition term in, for example, a preamble of a claim, it is open-ended in the same manner as the term "comprising" and "including" are open ended. The term "and/or" when used, for example, in a form such as A, B, and/or C refers to any combination or subset of A, B, C such as (1) A alone, (2) B alone, (3) C alone, (4) A with B, (5) A with C, (6) B with C, or (7) A with B and with C. As used herein in the context of describing structures, components, items, objects and/or things, the phrase "at least one of A and B" is intended to refer to implementations including any of (1) at least one A, (2) at least one B, or (3) at least one A and at least one B. Similarly, as used herein in the context of describing structures, components, items, objects and/or things, the phrase "at least one of A or B" is intended to refer to implementations including any of (1) at least one A, (2) at least one B, or (3) at least one A and at least one B. As used herein in the context of describing the performance or execution of processes, instructions, actions, activities, etc., the phrase "at least one of A and B" is intended to refer to implementations including any of (1) at least one A, (2) at least one B, or (3) at least one A and at least one B. Similarly, as used herein in the context of describing the performance or execution of processes, instructions, actions, activities, etc., the phrase "at least one of A or B" is intended to refer to implementations including any of (1) at least one A, (2) at least one B, or (3) at least one A and at least one B.

[0048] As used herein, singular references (e.g., "a", "an", "first", "second", etc.) do not exclude a plurality. The term "a" or "an" object, as used herein, refers to one or more of that object. The terms "a" (or "an"), "one or more", and "at least one" are used interchangeably herein. Furthermore, although individually listed, a plurality of means, elements, or actions may be implemented by, e.g., the same entity or object. Additionally, although individual features may be included in different examples or claims, these may possibly be combined, and the inclusion in different examples or claims does not imply that a combination of features is not feasible and/or advantageous.

[0049] As used herein, unless otherwise stated, the term "above" describes the relationship of two parts relative to Earth. A first part is above a second part, if the second part has at least one part between Earth and the first part. Likewise, as used herein, a first part is "below" a second part when the first part is closer to the Earth than the second part. As noted above, a first part can be above or below a second part with one or more of: other parts therebetween, without other parts therebetween, with the first and second parts touching, or without the first and second parts being in direct contact with one another.

[0050] As used in this patent, stating that any part (e.g., a layer, film, area, region, or plate) is in any way on (e.g., positioned on, located on, disposed on, or formed on, etc.) another part, indicates that the referenced part is either in contact with the other part, or that the referenced part is above the other part with one or more intermediate part(s) located therebetween.

[0051] As used herein, connection references (e.g., attached, coupled, connected, and joined) may include intermediate members between the elements referenced by the connection reference and/or relative movement between those elements unless otherwise indicated. As such, connection references do not necessarily infer that two elements are directly connected and/or in fixed relation to each other. As used herein, stating that any part is in "contact" with another part is defined to mean that there is no intermediate part between the two parts.

[0052] Unless specifically stated otherwise, descriptors such as "first," "second," "third," etc., are used herein without imputing or otherwise indicating any meaning of priority, physical order, arrangement in a list, and/or ordering in any way, but are merely used as labels and/or arbitrary names to distinguish elements for ease of understanding the disclosed examples. In some examples, the descriptor "first" may be used to refer to an element in the detailed description, while the same element may be referred to in a claim with a different descriptor such as "second" or "third." In such instances, it should be understood that such descriptors are used merely for identifying those elements distinctly within the context of the discussion (e.g., within a claim) in which the elements might, for example, otherwise share a same name.

[0053] As used herein, "approximately" and "about" modify their subjects/values to recognize the potential presence of variations that occur in real world applications. For example, "approximately" and "about" may modify dimensions that may not be exact due to manufacturing tolerances and/or other real world imperfections as will be understood by persons of ordinary skill in the art. For example, "approximately" and "about" may indicate such dimensions may be within a tolerance range of +/−10% unless otherwise specified herein.

[0054] As used herein, the phrase "in communication," including variations thereof, encompasses direct communication and/or indirect communication through one or more intermediary components, and does not require direct physical (e.g., wired) communication and/or constant communication, but rather additionally includes selective communication at periodic intervals, scheduled intervals, aperiodic intervals, and/or one-time events.

[0055] As used herein, "programmable circuitry" is defined to include (i) one or more special purpose electrical circuits (e.g., an application specific circuit (ASIC)) structured to perform specific operation(s) and including one or more semiconductor-based logic devices (e.g., electrical hardware implemented by one or more transistors), and/or (ii) one or more general purpose semiconductor-based electrical circuits programmable with instructions to perform specific functions(s) and/or operation(s) and including one or more semiconductor-based logic devices (e.g., electrical hardware implemented by one or more transistors). Examples of programmable circuitry include programmable microprocessors such as Central Processor Units (CPUs) that may execute first instructions to perform one or more operations and/or functions, Field Programmable Gate Arrays (FPGAs) that may be programmed with second instructions to cause configuration and/or structuring of the FPGAs to instantiate one or more operations and/or functions corresponding to the first instructions, Graphics Processor Units (GPUs) that may execute first instructions to perform one or more operations and/or functions, Digital Signal Processors (DSPs) that may execute first instructions to perform one or more operations and/or functions, XPUs, Network Processing Units (NPUs), one or more microcontrollers that may execute first instructions to perform one or more operations and/or functions and/or integrated circuits such as Application Specific Integrated Circuits (ASICs). For example, an XPU may be implemented by a heterogeneous computing system including multiple types of programmable circuitry (e.g., one or more FPGAs, one or more CPUs, one or more GPUs, one or more NPUs, one or more DSPs, etc., and/or any combination(s) thereof), and orchestration technology (e.g., application programming interface (s) (API(s)) that may assign computing task(s) to whichever one(s) of the multiple types of programmable circuitry is/are suited and available to perform the computing task(s).

[0056] As used herein integrated circuit/circuitry is defined as one or more semiconductor packages containing one or more circuit elements such as transistors, capacitors, inductors, resistors, current paths, diodes, etc. For example an integrated circuit may be implemented as one or more of an ASIC, an FPGA, a chip, a microchip, programmable circuitry, a semiconductor substrate coupling multiple circuit elements, a system on chip (SoC), etc.

[0057] From the foregoing, it will be appreciated that example systems, apparatus, articles of manufacture, and methods have been disclosed that improve the efficiency of hyperbaric cooling systems of computing devices by increasing the open-air ratio of an air flow outlet through the use of heat exchanger fins along the outlet rather than thicker meshes, grills, and/or ribs. In some examples, the fins are positioned on one or both opposing surfaces of a circuit board so that the circuit board can extend out towards an outer side of the fins facing the outlet. As a result, no board space is lost by the placement of the fins, thereby providing additional space for electrical routing within the circuit board (e.g., at regions overlapped by the fins). Further, in some examples, the fins are thermally coupled to heat producing components within the computing device to facilitate the dissipation of heat. This thermal coupling can be achieved through a heat transfer path defined within a circuit board and/or via a vapor chamber external to the circuit board.

[0058] Disclosed systems, apparatus, articles of manufacture, and methods are accordingly directed to one or more improvement(s) in the operation of a machine such as a computer or other electronic and/or mechanical device.

[0059] Further examples and combinations thereof include the following:

[0060] Example 1 includes an apparatus comprising a housing including an air flow outlet, a circuit board, and a heat exchanger extending along an edge of the circuit board, the heat exchanger including a first side and a second side opposite the first side, the first side facing away from the outlet, the second side facing toward the outlet, wherein the edge of the circuit board is closer to the second side of the heat exchanger than the edge is to the first side of the heat exchanger.

[0061] Example 2 includes the apparatus of example 1, wherein the

[0062] heat exchanger includes fins extending transverse to the first and second sides of the heat exchanger.

[0063] Example 3 includes the apparatus of example 2, wherein adjacent ones of the fins are spaced apart at a pitch of less than or equal to about 1 millimeter.

[0064] Example 4 includes the apparatus of any one of examples 1-3, wherein the second side of the heat exchanger is adjacent to the outlet to block objects from entering the housing through the outlet.

[0065] Example 5 includes the apparatus of any one of examples 1-4, wherein the outlet and the heat exchanger define an open-air ratio greater than about 71%.

[0066] Example 6 includes the apparatus of any one of examples 1-5, further including an electronic component on the circuit board, the circuit board defining a heat transfer path between the electronic component and the heat exchanger.

[0067] Example 7 includes the apparatus of example 6, wherein the heat transfer path includes at least one of a copper slug or a heat pipe.

[0068] Example 8 includes the apparatus of any one of examples 6 or 7, wherein the heat transfer path includes a metal layer extending between outer surfaces of the circuit board.

[0069] Example 9 includes the apparatus of example 8, wherein the circuit board includes an electrical circuit path within a region of the circuit board overlapped by a portion of the heat exchanger, the electrical circuit path between the metal layer and the portion of the heat exchanger.

[0070] Example 10 includes the apparatus of example 8, wherein the circuit board includes an electrical circuit path within a region of the circuit board overlapped by a portion of the heat exchanger, the metal layer between the electrical circuit path and the portion of the heat exchanger.

[0071] Example 11 includes the apparatus of any one of examples 1-10, wherein the heat exchanger includes a first portion and a second portion, the first portion on a first surface of the circuit board and the second portion on a second surface of the circuit board, the first surface opposite the second surface, the first portion opposite the second portion.

[0072] Example 12 includes the apparatus of example 11, wherein the heat exchanger wraps around the edge of the circuit board.

[0073] Example 13 includes the apparatus of any one of examples 1-12, wherein the heat exchanger includes a clip to removably couple the heat exchanger to the circuit board.

[0074] Example 14 includes the apparatus of any one of examples 1-13, wherein the heat exchanger includes a tab, a threaded fastener to extend through the tab to couple the heat exchanger to the circuit board.

[0075] Example 15 includes the apparatus of any one of examples 1-14, further including an electronic component on the circuit board, and a vapor chamber thermally coupled to the electronic component and thermally coupled to the heat exchanger.

[0076] Example 16 includes an apparatus comprising a circuit board, a heat producing component on the circuit board, and an array of fins overlapping a region of the circuit board, the region defining an outer edge of the circuit board, individual fins of the array of fins orientated to extend between the heat producing component and the outer edge of the circuit board to enable a flow of air to sequentially pass across the heat producing component and between adjacent fins.

[0077] Example 17 includes the apparatus of example 16, wherein the circuit board includes electrical routing within the region of the circuit board overlapped by the array of fins.

[0078] Example 18 includes the apparatus of example 16, wherein the heat producing component is thermally coupled to the array of fins through the circuit board.

[0079] Example 19 includes a laptop comprising, a circuit board supporting electronic circuitry, a housing including an outlet, a fan to blow air across the electronic circuitry and out through the outlet, and a heat exchanger including an array of fins distributed along an outer edge of the circuit board, the heat exchanger along a length of the outlet, the fins including upstream edges facing away from the outlet and downstream edges facing towards the outlet, the outer edge of the circuit board closer to the outlet than the upstream edges of the fins are to the outlet.

[0080] Example 20 includes the laptop of example 19, wherein the circuit board includes a metal layer extending between the electronic circuitry and the heat exchanger, the metal layer thermally coupled to the heat exchanger.

[0081] The following claims are hereby incorporated into this Detailed Description by this reference. Although certain example systems, apparatus, articles of manufacture, and methods have been disclosed herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers all systems, apparatus, articles of manufacture, and methods fairly falling within the scope of the claims of this patent.

What is claimed is:

1. An apparatus comprising:

a housing including an outlet for air flow;

a circuit board in the housing; and

a heat exchanger extending along an edge of the circuit board, the heat exchanger including a first side and a second side opposite the first side, the first side facing away from the outlet, the second side facing toward the outlet, wherein the edge of the circuit board is closer to the second side of the heat exchanger than the edge is to the first side of the heat exchanger.

2. The apparatus of claim **1**, wherein the heat exchanger includes fins extending transverse to the first and second sides of the heat exchanger.

3. The apparatus of claim **2**, wherein adjacent ones of the fins are spaced apart at a pitch of less than or equal to about **1** millimeter.

4. The apparatus of claim **1**, wherein the second side of the heat exchanger is adjacent to the outlet to block objects from entering the housing through the outlet.

5. The apparatus of claim **1**, wherein the outlet and the heat exchanger define an open-air ratio greater than about 71%.

6. The apparatus of claim **1**, further including an electronic component on the circuit board, the circuit board defining a heat transfer path between the electronic component and the heat exchanger.

7. The apparatus of claim **6**, wherein the heat transfer path includes at least one of a copper slug or a heat pipe.

8. The apparatus of claim **6**, wherein the heat transfer path includes a metal layer extending between outer surfaces of the circuit board.

9. The apparatus of claim **8**, wherein the circuit board includes an electrical circuit path within a region of the circuit board overlapped by a portion of the heat exchanger, the electrical circuit path between the metal layer and the portion of the heat exchanger.

10. The apparatus of claim **8**, wherein the circuit board includes an electrical circuit path within a region of the circuit board overlapped by a portion of the heat exchanger, the metal layer between the electrical circuit path and the portion of the heat exchanger.

11. The apparatus of claim **1**, wherein the heat exchanger includes a first portion and a second portion, the first portion on a first surface of the circuit board and the second portion on a second surface of the circuit board, the first surface opposite the second surface, the first portion opposite the second portion.

12. The apparatus of claim **11**, wherein the heat exchanger wraps around the edge of the circuit board.

13. The apparatus of claim **1**, wherein the heat exchanger includes a clip to removably couple the heat exchanger to the circuit board.

14. The apparatus of claim **1**, wherein the heat exchanger includes a tab, a threaded fastener to extend through the tab to couple the heat exchanger to the circuit board.

15. The apparatus of claim **1**, further including;

an electronic component on the circuit board; and

a vapor chamber thermally coupled to the electronic component and thermally coupled to the heat exchanger.

16. An apparatus comprising:

a circuit board;

a heat producing component on the circuit board; and

an array of fins overlapping a region of the circuit board, the region defining an outer edge of the circuit board, individual fins of the array of fins orientated to extend between the heat producing component and the outer edge of the circuit board to enable a flow of air to sequentially pass across the heat producing component and between adjacent fins.

17. The apparatus of claim **16**, wherein the circuit board includes electrical routing within the region of the circuit board overlapped by the array of fins.

18. The apparatus of claim **16**, wherein the heat producing component is thermally coupled to the array of fins through the circuit board.

19. A laptop comprising,

a circuit board supporting electronic circuitry;

a housing including an outlet;

a fan to blow air across the electronic circuitry and out through the outlet; and

a heat exchanger including fins distributed along an outer edge of the circuit board, the heat exchanger along a length of the outlet, the fins including upstream edges facing away from the outlet and downstream edges facing towards the outlet, the outer edge of the circuit board closer to the outlet than the upstream edges of the fins are to the outlet.

20. The laptop of claim **19**, wherein the circuit board includes a metal layer extending between the electronic circuitry and the heat exchanger, the metal layer thermally coupled to the heat exchanger.

* * * * *