



US012392294B2

(12) **United States Patent**  
**Sheridan**

(10) **Patent No.:** **US 12,392,294 B2**

(45) **Date of Patent:** **Aug. 19, 2025**

(54) **GAS TURBINE ENGINE WITH FRONT  
SUPPORT ARRANGEMENT**

(71) Applicant: **RTX CORPORATION**, Farmington,  
CT (US)

(72) Inventor: **William G. Sheridan**, Southington, CT  
(US)

(73) Assignee: **RTX CORPORATION**, Farmington,  
CT (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/929,956**

(22) Filed: **Oct. 29, 2024**

(65) **Prior Publication Data**

US 2025/0052204 A1 Feb. 13, 2025

**Related U.S. Application Data**

(63) Continuation of application No. 18/107,671, filed on  
Feb. 9, 2023, now Pat. No. 12,158,110, which is a  
(Continued)

(51) **Int. Cl.**  
**F02C 7/36** (2006.01)  
**F01D 5/02** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **F02C 7/36** (2013.01); **F01D 5/02**  
(2013.01); **F01D 15/12** (2013.01); **F01D**  
**25/16** (2013.01);  
(Continued)

(58) **Field of Classification Search**

CPC .... F02C 7/36; F02C 7/06; F02C 3/107; F02C  
3/04; F01D 15/12; F01D 25/16; F01D  
25/162; F05D 2260/40311

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2,154,532 A 4/1939 Ryder  
2,258,792 A 10/1941 New  
(Continued)

**FOREIGN PATENT DOCUMENTS**

CA 2612031 A1 5/2008  
EP 0791383 A1 8/1997  
(Continued)

**OTHER PUBLICATIONS**

QCSEE the aerodynamic and preliminary mechanical design of the  
QCSEE OTW fan. (1975). NASA-CR-134841. Feb. 1, 1975. pp.  
1-74.

(Continued)


*Primary Examiner* — Steven M Sutherland

(74) *Attorney, Agent, or Firm* — Carlson, Gaskey & Olds,  
P.C.

(57) **ABSTRACT**

A gas turbine engine includes a propulsor section including  
a propulsor having blades extending from a propulsor hub,  
and a propulsor shaft that drives the propulsor hub. A  
compressor section includes a first compressor having a  
rotatable compressor hub. A speed reduction device drives  
the compressor hub and the propulsor through a connection  
established axially forward of the epicyclic gear system  
relative to an engine longitudinal axis. The epicyclic gear  
system is straddled by forward and aft bearings that engage  
a carrier of the speed reduction device.

**18 Claims, 3 Drawing Sheets**

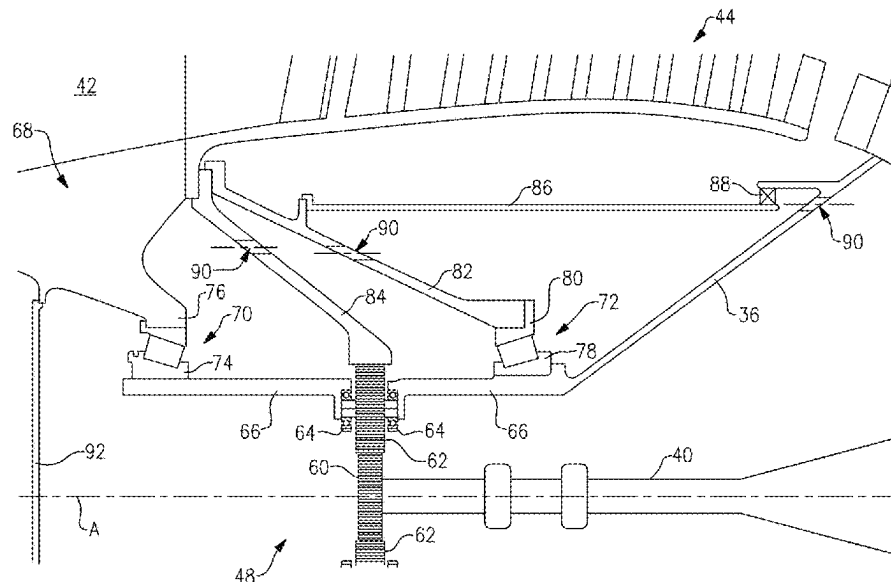

**Related U.S. Application Data**

continuation of application No. 17/218,369, filed on Mar. 31, 2021, now Pat. No. 11,578,665, which is a continuation of application No. 16/203,088, filed on Nov. 28, 2018, now Pat. No. 11,008,947, which is a continuation of application No. 14/633,244, filed on Feb. 27, 2015, now Pat. No. 10,280,843.

(60) Provisional application No. 61/949,331, filed on Mar. 7, 2014.

**(51) Int. Cl.**

**F01D 15/12** (2006.01)

**F01D 25/16** (2006.01)

**F02C 3/04** (2006.01)

**F02C 3/107** (2006.01)

**F02C 7/06** (2006.01)

**(52) U.S. Cl.**

CPC ..... **F01D 25/162** (2013.01); **F02C 3/04** (2013.01); **F02C 3/107** (2013.01); **F02C 7/06** (2013.01); **F05D 2220/32** (2013.01); **F05D 2230/60** (2013.01); **F05D 2260/40311** (2013.01)

**(56) References Cited**

## U.S. PATENT DOCUMENTS

2,936,655 A 5/1960 Peterson et al.  
3,021,731 A 2/1962 Stoeckicht  
3,194,487 A 7/1965 Tyler et al.  
3,287,906 A 11/1966 McCormick  
3,303,713 A 2/1967 Hicks  
3,352,178 A 11/1967 Lindgren et al.  
3,412,560 A 11/1968 Gaubatz  
3,664,612 A 5/1972 Skidmore et al.  
3,747,343 A 7/1973 Rosen  
3,754,484 A 8/1973 Roberts  
3,765,623 A 10/1973 Donelson et al.  
3,820,719 A 6/1974 Clark et al.  
3,843,277 A 10/1974 Ehrich  
3,892,358 A 7/1975 Gisslen  
3,932,058 A 1/1976 Harner et al.  
3,935,558 A 1/1976 Miller et al.  
3,988,889 A 11/1976 Chamay et al.  
4,130,872 A 12/1978 Haloff  
4,220,171 A 9/1980 Ruehr et al.  
4,240,250 A 12/1980 Harris  
4,284,174 A 8/1981 Salvana et al.  
4,289,360 A 9/1981 Zirin  
4,478,551 A 10/1984 Honeycutt, Jr. et al.  
4,649,114 A 3/1987 Miltenburger et al.  
4,696,156 A 9/1987 Burr et al.  
4,722,357 A 2/1988 Wynosky  
4,979,362 A 12/1990 Vershure, Jr.  
5,058,617 A 10/1991 Stockman et al.  
5,102,379 A 4/1992 Pagluica et al.  
5,141,400 A 8/1992 Murphy et al.  
5,317,877 A 6/1994 Stuart  
5,361,580 A 11/1994 Ciokajlo et al.  
5,389,048 A 2/1995 Carlson  
5,433,674 A 7/1995 Sheridan et al.  
5,447,411 A 9/1995 Curley et al.  
5,466,198 A 11/1995 McKibbin et al.  
5,524,847 A 6/1996 Brodell et al.  
5,634,767 A 6/1997 Dawson  
5,677,060 A 10/1997 Terentjeva et al.  
5,685,797 A 11/1997 Barnsby et al.  
5,778,659 A 7/1998 Duesler et al.  
5,857,836 A 1/1999 Stickler et al.  
5,915,917 A 6/1999 Eveker et al.  
5,975,841 A 11/1999 Lindemuth et al.  
5,985,470 A 11/1999 Spitsberg et al.  
6,223,616 B1 5/2001 Sheridan

6,315,815 B1 11/2001 Spadaccini et al.  
6,318,070 B1 11/2001 Rey et al.  
6,381,948 B1 \* 5/2002 Klingels ..... F02C 7/36  
416/129  
6,387,456 B1 5/2002 Eaton, Jr. et al.  
6,467,252 B1 10/2002 Payling et al.  
6,517,341 B1 2/2003 Brun et al.  
6,607,165 B1 8/2003 Manteiga et al.  
6,709,492 B1 3/2004 Spadaccini et al.  
6,732,502 B2 5/2004 Seda et al.  
6,814,541 B2 11/2004 Evans et al.  
6,883,303 B1 4/2005 Seda  
6,964,155 B2 11/2005 McCune et al.  
7,021,042 B2 4/2006 Law  
7,056,259 B2 6/2006 Fox  
7,219,490 B2 5/2007 Dev  
7,297,086 B2 11/2007 Fox  
7,328,580 B2 2/2008 Lee et al.  
7,374,403 B2 5/2008 Decker et al.  
7,591,754 B2 9/2009 Duong et al.  
7,632,064 B2 12/2009 Somanath et al.  
7,662,059 B2 2/2010 McCune  
7,694,505 B2 4/2010 Schilling  
7,806,651 B2 10/2010 Kennepohl et al.  
7,824,305 B2 11/2010 Duong et al.  
7,828,682 B2 11/2010 Smook  
7,882,693 B2 2/2011 Schilling  
7,926,260 B2 4/2011 Sheridan et al.  
7,997,868 B1 8/2011 Liang  
8,075,443 B2 12/2011 Cunliffe et al.  
8,192,323 B2 6/2012 Fox  
8,205,432 B2 6/2012 Sheridan  
8,261,527 B1 9/2012 Stearns et al.  
8,430,788 B2 4/2013 Fox et al.  
9,726,083 B2 8/2017 Sheridan  
10,287,914 B2 5/2019 Schwarz et al.  
2006/0228206 A1 10/2006 Decker et al.  
2007/0084185 A1 4/2007 Moniz et al.  
2007/0087892 A1 4/2007 Orlando et al.  
2008/0003096 A1 1/2008 Kohli et al.  
2008/0006018 A1 1/2008 Sheridan et al.  
2008/0116009 A1 5/2008 Sheridan et al.  
2008/0120839 A1 5/2008 Schilling  
2008/0317588 A1 12/2008 Grabowski et al.  
2009/0056343 A1 3/2009 Suciu et al.  
2009/0304518 A1 12/2009 Kodama et al.  
2009/0314881 A1 12/2009 Suciu et al.  
2010/0105516 A1 4/2010 Sheridan et al.  
2010/0148396 A1 6/2010 Xie et al.  
2010/0212281 A1 8/2010 Sheridan  
2010/0218483 A1 9/2010 Smith  
2010/0331139 A1 12/2010 McCune  
2011/0159797 A1 6/2011 Beltman et al.  
2011/0206498 A1 8/2011 McCooey  
2011/0293423 A1 12/2011 Bunker et al.  
2012/0102971 A1 5/2012 McCune et al.  
2012/0124964 A1 5/2012 Hasel et al.  
2012/0192570 A1 8/2012 McCune et al.  
2012/0272762 A1 11/2012 Sheridan  
2012/0275904 A1 11/2012 McCune et al.  
2012/0277055 A1 11/2012 Sheridan  
2013/0023378 A1 1/2013 McCune et al.  
2013/0053202 A1 2/2013 Ghanime et al.  
2013/0186058 A1 7/2013 Sheridan et al.

## FOREIGN PATENT DOCUMENTS

EP 1142850 A1 10/2001  
EP 2360391 A1 8/2011  
GB 1516041 A 6/1978  
GB 2041090 A 9/1980  
GB 2426792 A 12/2006  
WO 2007038674 A1 4/2007

## OTHER PUBLICATIONS

QCSEE under-the-wing engine composite fan blade design. (1975).  
NASA-CR-134840. May 1, 1975. pp. 1-51.

(56)

**References Cited****OTHER PUBLICATIONS**

- QCSEE under-the-wing engine composite fan blade final design test report. (1977). NASA-CR-135046. Feb. 1, 1977. pp. 1-55.
- QCSEE under-the-wing engine composite fan blade preliminary design test report. (1975). NASA-CR-134846. Sep. 1, 1975. pp. 1-56.
- QCSEE under-the-wing engine digital control system design report. (1978). NASA-CR-134920. Jan. 1, 1978. pp. 1-309.
- Quiet clean general aviation turbofan (QCGAT) technology study final report vol. I. (1975). NASA-CR-164222. Dec. 1, 1975. pp. 1-186.
- Ramsden, J.M. (Ed). (1978). The new European airliner. Flight International, 113(3590). Jan. 7, 1978. pp. 39-43.
- Ratna, D. (2009). Handbook of thermoset resins. Shawbury, UK: iSmithers. pp. 187-216.
- Rauch, D. (1972). Design study of an air pump and integral lift engine ALF-504 using the Lycoming 502 core. Prepare for NASA. Jul. 1972. pp. 1-182.
- Reshotko, M., Karchmer, A., Penko, P.F. and McArdle, J.G. (1977). Core noise measurements on a YF-102 turbofan engine. NASA TM X-73587. Prepared for Aerospace Sciences Meeting sponsored by the American Institute of Aeronautics and Astronautics. Jan. 24-26, 1977.
- Reynolds, C.N. (1985). Advanced prop-fan engine technology (APET) single- and counter-rotation gearbox/pitch change mechanism. Prepared for NASA. NASA CR-168114 (vol. I). Jul. 1985. pp. 1-295.
- Riegler, C., and Bichlmaier, C. (2007). The geared turbofan technology—Opportunities, challenges and readiness status. Proceedings CEAS. Sep. 10-13, 2007. Berlin, Germany. pp. 1-12.
- Rolls-Royce M45H. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 24, 2010.
- Rotordynamic instability problems in high-performance turbomachinery. (1986). NASA conference publication 2443. Jun. 2-4, 1986.
- Roux, E. (2007). Turbofan and turbojet engines database handbook. Editions Elodie Roux. Blagnac: France, pp. 1-595.
- Salemme, C.T. and Murphy, G.C. (1979). Metal spar/superhybrid shell composite fan blades. Prepared for NASA. NASA-CR-159594. Aug. 1979. pp. 1-127.
- Sargisson, D.F. (1985). Advanced propfan engine technology (APET) and single-rotation gearbox/pitch change mechanism. NASA Contractor Report-168113. R83AEB592. Jun. 1, 1985. pp. 1-476.
- Savelle, S.A. and Garrard, G.D. (1996). Application of transient and dynamic simulations to the U.S. Army T55-L-712 helicopter engine. The American Society of Mechanical Engineers. Presented Jun. 10-13, 1996. pp. 1-8.
- Schaefer, J.W., Sagersen, D.R., and Stakolich, E.G. (1977). Dynamics of high-bypass-engine thrust reversal using a variable-pitch fan. Technical Report prepared for NASA. NASA-TM-X-3524. May 1, 1977. pp. 1-33.
- Seader, J.D. and Henley, E.J. (1998). Separation process principles. New York, NY: John Wiley & Sons, Inc. pp. 722-726 and 764-771.
- Shah, D.M. (1992). MoSi<sub>2</sub> and other silicides as high temperature structural materials. Superalloys 1992. The Minerals, Metals, & Materials Society. pp. 409-422.
- Shorter Oxford English Dictionary, 6th Edition. (2007), vol. 2, N-Z, pp. 1888.
- Silverstein, C.C., Gottschlich, J.M., and Meininger, M. The feasibility of heat pipe turbine vane cooling. Presented at the International Gas Turbine and Aeroengine Congress and Exposition, the Hague, Netherlands. Jun. 13-16, 1994. pp. 1-7.
- Singh, A. (2005). Application of a system level model to study the planetary load sharing behavior. Journal of Mechanical Design. vol. 127. May 2005. pp. 469-476.
- Singh, B. (1986). Small engine component technology (SECT) study. NASA CR-175079. Mar. 1, 1986. pp. 1-102.
- Singh, R. and Houser, D.R. (1990). Non-linear dynamic analysis of geared systems. NASA-CR-180495. Feb. 1, 1990. pp. 1-263.
- Smith, C.E., Hirschcron, R., and Warren, R.E. (1981). Propulsion system study for small transport aircraft technology (STAT). Final report. NASA-CR-165330. May 1, 1981. pp. 1-216.
- Smith-Boyd, L. and Pike, J. (1986). Expansion of epicyclic gear dynamic analysis program. Prepared for NASA. NASA CR-179563. Aug. 1986. pp. 1-98.
- Sowers, H.D. and Coward, W.E. (1978). QCSEE over-the-wing (OTW) engine acoustic design. NASA-CR-135268. Jun. 1, 1978. pp. 1-52.
- Spadaccini, L.J., and Huang, H. (2002). On-line fuel deoxygenation for coke suppression. ASME, Jun. 2002. pp. 1-7.
- Spadaccini, L.J., Sobel, D.R., and Huang, H. (2001). Deposit formation and mitigation in aircraft fuels. Journal of Eng. for Gas Turbine and Power, vol. 123. Oct. 2001. pp. 741-746.
- Sundaram, S.K., Hsu, J-Y., Speyer, R.F. (1994). Molten glass corrosion resistance of immersed combustion-heating tube materials in soda-lime-silicate glass. J. Am. Ceram. Soc. 77(6). pp. 1613-1623.
- Sundaram, S.K., Hsu, J-Y., Speyer, R.F. (1995). Molten glass corrosion resistance of immersed combustion-heating tube materials in e-glass. J. Am. Ceram. Soc. 78(7). pp. 1940-1946.
- Sutliff, D. (2005). Rotating rake turbofan duct mode measurement system. NASA TM-2005-213828. Oct. 1, 2005. pp. 1-34.
- Suzuki, Y., Morgan, P.E.D., and Niihara, K. (1998). Improvement in mechanical properties of powder-processed MoSi<sub>2</sub> by the addition of Sc<sub>2</sub>O<sub>3</sub> and Y<sub>2</sub>O<sub>3</sub>. J. Am. Ceram. Soc. 81(12). pp. 3141-3149.
- Sweetman, B. and Sutton, O. (1998). Pratt Whitney's surprise leap. Interavia Business & Technology, 53.621, p. 25.
- Taylor, W.F. (1974). Deposit formation from deoxygenated hydrocarbons. I. General features. Ind. Eng. Chem., Prod. Res. Develop., vol. 13(2). 1974. pp. 133-138.
- Taylor, W.F. (1974). Deposit formation from deoxygenated hydrocarbons. II. Effect of trace sulfur compounds. Ind. Eng. Chem., Prod. Res. Dev., vol. 15(1). 1974. pp. 64-68.
- Taylor, W.F. and Frankenfeld, J.W. (1978). Deposit formation from deoxygenated hydrocarbons. 3. Effects of trace nitrogen and oxygen compounds. Ind. Eng. Chem., Prod. Res. Dev., vol. 17(1). 1978. pp. 86-90.
- Technical Data. Teflon. WS Hampshire Inc. Retrieved from: [http://catalog.wshampshire.com/Asset/psg\\_teflon\\_ptfe.pdf](http://catalog.wshampshire.com/Asset/psg_teflon_ptfe.pdf).
- Technical Report. (1975). Quiet Clean Short-haul Experimental Engine (QCSEE) UTW fan preliminary design. NASA-CR-134842. Feb. 1, 1975. pp. 1-98.
- Technical Report. (1977). Quiet Clean Short-haul Experimental Engine (QCSEE) Under-the-Wing (UTW) final design report. NASA-CR-134847. Jun. 1, 1977. pp. 1-697.
- Thulin, R.D., Howe, D.C., and Singer, I.D. (1982). Energy efficient engine: High pressure turbine detailed design report. Prepared for NASA. NASA CR-165608. pp. 1-178.
- Tong, M.T., Jones, S.M., Haller, W.J., and Handschuh, R.F. (2009). Engine conceptual design studies for a hybrid wing body aircraft. NASA/TM-2009-215680. Nov. 1, 2009. pp. 1-15.
- Trembley, Jr., H.F. (1977). Determination of effects of ambient conditions on aircraft engine emissions. ALF 502 combustor rig testing and engine verification test. Prepared for Environmental Protection Agency. Sep. 1977. pp. 1-256.
- Tsirlin, M., Pronin, Y.E., Florina, E.K., Mukhametov, S. Kh., Khatsernov, M.A., Yun, H.M., . . . Kroke, E. (2001). Experimental investigation of multifunctional interphase coatings on SiC fibers for non-oxide high temperature resistant CMCs. High Temperature Ceramic Matrix Composites. 4th Int'l Conf. on High Temp. Ceramic Matrix Composites. Oct. 1-3, 2001. pp. 149-156.
- Tummers, B. (2006). DataThief III. Retrieved from: <https://datathief.org/DatathiefManual.pdf> pp. 1-52.
- Turbomeca Aubisque. Jane's Aero-engines, Aero-engines—Turbofan. Nov. 2, 2009.
- Turner, M. G., Norris, A., and Veres, J.P. (2004). High-fidelity three-dimensional simulation of the GE90. NASA/TM-2004-212981. pp. 1-18.
- Type Certificate Data Sheet No. E6NE. Department of Transportation Federal Aviation Administration. Jun. 7, 2002. pp. 1-10.
- U.S. Appl. No. 14/307,587, filed Jun. 18, 2014, Titled Load Balanced Journal Bearing Pin, 21 pages.

(56)

**References Cited****OTHER PUBLICATIONS**

- U.S. Department of Transportation: Federal Aviation Administration Advisory Circular, Runway overrun prevention, dated: Nov. 6, 2007, p. 1-8 and Appendix 1 pp. 1-15, Appendix 2 pp. 1-6, Appendix 3 pp. 1-3, and Appendix 4 pp. 1-5.
- U.S. Department of Transportation: Federal Aviation Administration Advisory Circular, Standard operating procedures for flight deck crewmembers, Dated: Feb. 27, 2003, p. 1-6 and Appendices.
- U.S. Department of Transportation: Federal Aviation Administration Type Certificate Data Sheet No. E6WE. Dated: May 9, 2000. p. 1-9.
- Vasudevan, A.K. and Petrovic, J.J. (1992). A comparative overview of molybdenum disilicide composites. *Materials Science and Engineering*, A155, 1992. pp. 1-17.
- Waters, M.H. and Schairer, E.T. (1977). Analysis of turbofan propulsion system weight and dimensions. NASA Technical Memorandum. Jan. 1977. pp. 1-65.
- Webster, J.D., Westwood, M.E., Hayes, F.H., Day, R.J., Taylor, R., Duran, A., . . . Vogel, W.D. (1998). Oxidation protection coatings for C/SiC based on yttrium silicate. *Journal of European Ceramic Society* vol. 18. 1998. pp. 2345-2350.
- Wendus, B.E., Stark, D.F., Holler, R.P., and Funkhouse, M.E. (2003). Follow-on technology requirement study for advanced subsonic transport. Technical Report prepared for NASA. NASA/CR-2003-212467. Aug. 1, 2003. pp. 1-47.
- Whitaker, R. (1982). ALF 502: plugging the turbofan gap. *Flight International*, p. 237-241, Jan. 30, 1982.
- Wie, Y.S., Collier, F.S., Wagner, R.D., Viken, J.K., and Pfenniger, W. (1992). Design of a hybrid laminar flow control engine nacelle. AIAA-92-0400. 30th Aerospace Sciences Meeting & Exhibit. Jan. 6-9, 1992. pp. 1-14.
- Wikipedia. Stiffness. Retrieved Jun. 28, 2018 from: <https://en.wikipedia.org/wiki/Stiffness>.
- Wikipedia. Torsion spring. Retrieved Jun. 29, 2018 from: [https://en.wikipedia.org/wiki/Torsion\\_spring](https://en.wikipedia.org/wiki/Torsion_spring).
- Wilfert, G. (2008). Geared fan. Aero-Engine Design: From State of the Art Turbofans Towards Innovative Architectures, von Karman Institute for Fluid Dynamics, Belgium, Mar. 3-7, 2008. pp. 1-26.
- Willis, W.S. (1979). Quiet clean short-haul experimental engine (QCSEE) final report. NASA/CR-159473 pp. 1-289.
- Winn, A. (Ed). (1990). Wide Chord Fan Club. *Flight International*, 4217(137). May 23-29, 1990. pp. 34-38.
- Wright, G.H. and Russell, J.G. (1990). The M.45SD-02 variable pitch geared fan engine demonstrator test and evaluation experience. *Aeronautical Journal*, vol. 84(836). Sep. 1980. pp. 268-277.
- Xie, M. (2008). Intelligent engine systems: Smart case system. NASA/CR-2008-215233. pp. 1-31.
- Xu, Y., Cheng, L., Zhang, L., Ying, H., and Zhou, W. (1999). Oxidation behavior and mechanical properties of C/SiC composites with Si—MoSi<sub>2</sub> oxidation protection coating. *J. of Mat. Sci.* vol. 34. 1999. pp. 6009-6014.
- Zalud, T. (1998). Gears put a new spin on turbofan performance. *Machine Design*, 70(20), p. 104.
- Zamboni, G. and Xu, L. (2009). Fan root aerodynamics for large bypass gas turbine engines: Influence on the engine performance and 3D design. Proceedings of ASME Turbo Expo 2009: Power for Land, Sea and Air. Jun. 8-12, 2009, Orlando, Florida, USA. pp. 1-12.
- Zhao, J.C. and Westbrook, J.H. (2003). Ultrahigh-temperature materials for jet engines. *MRS Bulletin*. vol. 28(9). Sep. 2003. pp. 622-630.
- Hendricks, E.S. and Tong, M.T. (2012). Performance and weight estimates for an advanced open rotor engine. NASA/TM-2012-217710. pp 1-13.
- Hess, C. (1998). Pratt Whitney develops geared turbofan. *Flug Revue* 43(7). Oct. 1998.
- Hill, P.G., Peterson, C.R. (1965). *Mechanics and thermodynamics of propulsion*. Addison-Wesley Publishing Company, Inc. pp. 307-308.
- Hill, P.G., Peterson, C.R. (1992). *Mechanics and thermodynamics of propulsion*, 2nd Edition. Addison-Wesley Publishing Company, Inc. pp. 400-406.
- Holcombe, V. (2003). Aero-Propulsion Technology (APT) task V low noise ADP engine definition study. NASA CR-2003-212521. Oct. 1, 2003. pp. 1-73.
- Honeywell Learjet 31 and 35/36 TFE731-2 to 2C Engine Upgrade Program. Sep. 2005. pp. 1-4.
- Honeywell LF502. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 9, 2012.
- Honeywell LF502. Jane's Aero-engines, Aero-engines—Turbofan. Aug. 17, 2016.
- Honeywell LF507. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 9, 2012.
- Honeywell Sabreliner 65 TFE731-3 to -3D Engine Upgrade Program. Oct. 2005. pp. 1-4.
- Honeywell TFE731. Jane's Aero-engines, Aero-engines—Turbofan. Jul. 18, 2012.
- Honeywell TFE731 Pilot Tips. pp. 1-143.
- Honeywell TFE731-5AR to -5BR Engine Conversion Program. Sep. 2005. pp. 1-4.
- Horikoshi, S. and Serpone, N. (2013). Introduction to nanoparticles. *Microwaves in nanoparticle synthesis*. Wiley-VCH Verlag GmbH & Co. KGaA. pp. 1-24.
- Howard, D.F. (1976). QCSEE preliminary under the wing flight propulsion system analysis report. NASA CR-134868. Feb. 1, 1976. pp. 1-260.
- Howe, D.C. and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study. NASA CR-174942. May 1, 1985. pp. 174.
- Howe, D.C., and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study. NASA-CR-174942. May 1985. University of Washington dated Dec. 13, 1990. pp. 1-14.
- Howe, D.C., and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study. NASA-CR-174942. May 1985. pp. 1-60.
- Huang, H., Sobel, D.R., and Spadaccini, L.J. (2002). Endothermic heat-sink of hydrocarbon fuels for scramjet cooling. AIAA/ASME/SAE/ASEE, Jul. 2002. pp. 1-7.
- Hughes, C. (2002). Aerodynamic performance of scale-model turbofan outlet guide vanes designed for low noise. Prepared for the 40th Aerospace Sciences Meeting and Exhibit. Reno, NV. NASA/TM-2001-211352. Jan. 14-17, 2002. pp. 1-38.
- Hughes, C. (2010). Geared turbofan technology. NASA Environmentally Responsible Aviation Project. Green Aviation Summit. NASA Ames Research Center. Sep. 8-9, 2010. pp. 1-8.
- Ivchenko-Progress AI-727M. Jane's Aero-engines, Aero-engines—Turbofan. Nov. 27, 2011.
- Ivchenko-Progress D-436. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 8, 2012.
- Ivchenko-Progress D-727. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 7, 2007.
- Jacobson, N.S. (1993). Corrosion of silicon-based ceramics in combustion environments. *J. Am. Ceram. Soc.* 76 (1). pp. 3-28.
- Jeng, Y.-L., Lavernia, E.J. (1994). Processing of molybdenum disilicide. *J. of Mat. Sci.* vol. 29. 1994. pp. 2557-2571.
- Johnston, R.P. and Hemsworth, M.C. (1978). Energy efficient engine preliminary design and integration studies. Jun. 1, 1978. pp. 1-28.
- Johnston, R.P., Hirschhorn, R., Koch, C.C., Neitzel, R.E., and Vinson, P.W. (1978). Energy efficient engine: Preliminary design and integration study—final report. NASA CR-135444. Sep. 1978. pp. 1-401.
- Jorgensen, P.J., Wadsworth, M.E., and Cutler, I.B. (1961). Effects of water vapor on oxidation of silicon carbide. *J. Am. Ceram. Soc.* 44(6). pp. 248-261.
- Kahn, H., Tayebi, N., Ballarini, R., Mullen, R.L., Heuer, A.H. (2000). Fracture toughness of polysilicon MEMS devices. *Sensors and Actuators* vol. 82. 2000. pp. 274-280.
- Kandebo, S.W. (1998). Geared-Turbofan engine design targets cost, complexity. *Aviation Week & Space Technology*, 148(8). p. 34-5.

(56)

## References Cited

## OTHER PUBLICATIONS

- Kandebo, S.W. (1998). Pratt Whitney launches geared turbofan engine. *Aviation Week & Space Technology*, 148(8). p. 32-4.
- Kaplan, B., Nicke, E., Voss, C. (2006). Design of a highly efficient low-noise fan for ultra-high bypass engines. *Proceedings of GT2006 for ASME Turbo Expo 2006: Power for Land, Sea and Air*. Barcelona, SP. May 8-11, 2006. pp. 1-10.
- Kasuba, R. and August, R. (1984). Gear mesh stiffness and load sharing in planetary gearing. *American Society of Mechanical Engineers, Design Engineering Technical Conference*, Cambridge, MA. Oct. 7-10, 1984. pp. 1-6.
- Kerrebrock, J.L. (1977). *Aircraft engines and gas turbines*. Cambridge, MA: The MIT Press, p. 11.
- Knip, Jr., G. (1987). Analysis of an advanced technology subsonic turbofan incorporating revolutionary materials. *NASA Technical Memorandum*. May 1987. pp. 1-23.
- Kojima, Y., Usuki, A., Kawasumi, M., Okada, A., Fukushima, Y., Kurauchi, T., and Kamigaito, O. (1992). Mechanical properties of nylon 6-clay hybrid. *Journal of Materials Research*, 8(5), 1185-1189.
- Kollar, L.P. and Springer, G.S. (2003). *Mechanics of composite structures*. Cambridge, UK: Cambridge University Press, p. 465.
- Krantz, T.L. (1990). Experimental and analytical evaluation of efficiency of helicopter planetary stage. *NASA Technical Paper*. Nov. 1990. pp. 1-19.
- Krenkel, W., Naslain, R., and Schneider, H. Eds. (2001). *High temperature ceramic matrix composites* pp. 224-229. Weinheim, DE: Wiley-VCH Verlag GmbH.
- Kurzke, J. (2001). GasTurb 9: A program to calculate design and off-design performance of gas turbines. Retrieved from: <https://www.scribd.com/document/92384867/GasTurb9Manual>.
- Kurzke, J. (2008). Preliminary Design, Aero-engine design: From state of the art turbofans towards innovative architectures. pp. 1-72.
- Kurzke, J. (2009). Fundamental differences between conventional and geared turbofans. *Proceedings of ASME Turbo Expo: Power for Land, Sea, and Air 2009*, Orlando, Florida. pp. 145-153.
- Kurzke, J. (2012). GasTurb 12: Design and off-design performance of gas turbines. Retrieved from: <https://www.scribd.com/document/153900429/GasTurb-12>.
- Langston, L. and Faghri, A. Heat pipe turbine vane cooling. Prepared for Advanced Turbine Systems Annual Program Review. Morgantown, West Virginia. Oct. 17-19, 1995. pp. 3-9.
- Lau, K., Gu, C., and Hui, D. (2005). A critical review on nanotube and nanotube/nanoclay related polymer composite materials. *Composites: Part B* 37(2006) 425-436.
- Leckie, F.A. and Dal Bello, D.J. (2009). Strength and stiffness of engineering systems. *Mechanical Engineering Series*. Springer. pp. 1-10, 48-51.
- Leckie F.A., et al., "Strength and Stiffness of Engineering Systems," *Mechanical Engineering Series*, Springer, 2009, pp. 1-3.
- Lee, K.N. (2000). Current status of environmental barrier coatings for Si-Based ceramics. *Surface and Coatings Technology* 133-134, 2000. pp. 1-7.
- Declaration of Reza Abhari, In re U.S. Pat. No. 8,448,895, Executed Nov. 28, 2016, pp. 1-81.
- Declaration of Reza Abhari. In re U.S. Pat. No. 8,695,920, claims 1-4, 7-14, 17 and 19, Executed Nov. 29, 2016, pp. 1-102.
- Declaration of Reza Abhari. In re U.S. Pat. No. 8,695,920. Executed Nov. 30, 2016, pp. 1-67.
- Declaration of Reza Abhari, Ph.D. In re U.S. Pat. No. 8,844,265, Executed Jun. 28, 2016, pp. 1-91.
- Defeo, A. and Kulina, M. (1977). Quiet clean short-haul experimental engine (QCSEE) main reduction gears detailed design final report. Prepared for NASA. NASA-CR-134872. Jul. 1977. pp. 1-157.
- Dickey, T.A. and Dobak, E.R. (1972). The evolution and development status of ALF 502 turbofan engine. *National Aerospace Engineering and Manufacturing Meeting*. San Diego, California. Oct. 2-5, 1972. pp. 1-12.
- Drago, R.J. (1974). Heavy-lift helicopter brings up drive ideas. *Power Transmission Design*. Mar. 1987. pp. 1-15.
- Drago, R.J. and Margasahayam, R.N. (1987). Stress analysis of planet gears with integral bearings; 3D finite-element model development and test validation. 1987 MSC NASTRAN World Users Conference. Los Angeles, CA. Mar. 1987. pp. 1-14.
- Dudley, D.W., Ed. (1954). *Handbook of practical gear design*. Lancaster, PA: Technomic Publishing Company, Inc. pp. 3.96-3.102 and 8.12-8.18.
- Dudley, D.W., Ed. (1962). *Gear handbook*. New York, NY: McGraw-Hill. pp. 14-17 (TOC, Preface, and Index).
- Dudley, D.W., Ed. (1962). *Gear handbook*. New York, NY: McGraw-Hill. pp. 3.14-3.18 and 12.7-12.21.
- Dudley, D.W., Ed. (1994). *Practical gear design*. New York, NY: McGraw-Hill. pp. 119-124.
- Edkins, D.P., Hirschkron, R., and Lee, R. (1972). TF34 turbofan quiet engine study. Final Report prepared for NASA. NASA-CR-120914. Jan. 1, 1972. pp. 1-99.
- Edwards, T. and Zabarnick, S. (1993). Supercritical fuel deposition mechanisms. *Ind. Eng. Chem. Res.* vol. 32. 1993. pp. 3117-3122.
- El-Sayad, A.F. (2008). *Aircraft propulsion and gas turbine engines*. Boca Raton, FL: CRC Press. pp. 215-219 and 855-860.
- European Examination Report for Application No. EP15158231.9, dated Dec. 15, 2016, 6 pages.
- Extended European Search Report for Application No. EP15158231.9, dated Jul. 28, 2015, 7 pages.
- Extended European Search Report for Application No. EP18192320.2, dated Nov. 15, 2018, 9 pages.
- Faghri, A. (1995). *Heat pipe and science technology*. Washington, D.C.: Taylor & Francis. pp. 1-60.
- Falchetti, F., Quiniou, H., and Verdier, L. (1994). Aerodynamic design and 3D Navier-Stokes analysis of a high specific flow fan. *ASME*. Presented at the International Gas Turbine and Aeroengine Congress and Exposition. The Hague, Netherlands. Jun. 13-16, 1994. pp. 1-10.
- File History for U.S. Appl. No. 12/131,876.
- Fisher, K., Berton, J., Guynn, M., Haller B., Thurman, D., and Tong, M. (2012). NASA's turbofan engine concept study for a next-generation single-aisle transport. Presentation to ICAO's noise technology independent expert panel. Jan. 25, 2012. pp. 1-23.
- Fledderjohn, K.R. (1983). The TFE731-5: Evolution of a decade of business jet service. *SAE Technical Paper Series. Business Aircraft Meeting & Exposition*. Wichita, Kansas. Apr. 12-15, 1983. pp. 1-12.
- Frankenfeld, J.W. and Taylor, W.F. (1980). Deposit fromation from deoxygenated hydrocarbons. 4. Studies in pure compound systems. *Ind. Eng. Chem., Prod. Res. Dev.*, vol. 19(1). 1978. pp. 65-70.
- Garret TFE731 Turbofan Engine (Cat C). Chapter 79: Lubrication System. TTFE731 Issue 2. 2010. pp. 1-24.
- Gates, D. Bombardier flies at higher market. *Seattle Times*. Jul. 13, 2008. pp. C6.
- Gibala, R., Ghosh, A.K., Van Aken, D.C., Srolovitz, D.J., Basu, A., Chang, H., . . . Yang, W. (1992). Mechanical behavior and interface design of MoSi<sub>2</sub>-based alloys and composites. *Materials Science and Engineering*, A155, 1992. pp. 147-158.
- Gliebe, P.R. and Janardan, B.A. (2003). Ultra-high bypass engine aeroacoustic study. NASA/CR-2003-21252. GE Aircraft Engines, Cincinnati, Ohio. Oct. 2003. pp. 1-103.
- Gliebe, P.R., Ho, P.Y., and Mani, R. (1995). UHB engine fan and broadband noise reduction study. NASA CR-198357. Jun. 1995. pp. 1-48.
- Grady, J.E., Weir, D.S., Lamoureux, M.C., and Martinez, M.M. (2007). Engine noise research in NASA's quiet aircraft technology project. *Papers from the International Symposium on Air Breathing Engines (ISABE)*. 2007.
- Gray, D.E. (1978). Energy efficient engine preliminary design and integration studies. NASA-CP-2036-PT-1. Nov. 1978. pp. 89-110.
- Gray, D.E. (1978). Energy efficient engine preliminary design and integration studies. Prepared for NASA. NASA CR-135396. Nov. 1978. pp. 1-366.
- Gray, D.E. and Gardner, W.B. (1983). Energy efficient engine program technology benefit/cost study—vol. 2. NASA CR-174766. Oct. 1983. pp. 1-118.

(56)

## References Cited

## OTHER PUBLICATIONS

- Greitzer, E.M., Bonnefoy, P.A., Delaroseblanco, E., Dorbian, C.S., Drela, M., Hall, D.K., Hansman, R.J., Hileman, J.I., Liebeck, R.H., Levegren, J. (2010). N+3 aircraft concept designs and trade studies, final report. vol. 1. Dec. 1, 2010. NASA/CR-2010-216794/VOL1. pp. 1-187.
- Griffiths, B. (2005). Composite fan blade containment case. Modern Machine Shop. Retrieved from: <http://www.mmsonline.com/articles/composite-fan-blade-containment-case> pp. 1-4.
- Growneneweg, J.F. (1994). Fan noise research at NASA. NASA-TM-106512. Prepared for the 1994 National Conference on Noise Control Engineering. Fort Lauderdale, FL. May 1-4, 1994. pp. 1-10.
- Growneneweg, J.F. (1994). Fan noise research at NASA. Noise-CON 94. Fort Lauderdale, FL. May 1-4, 1994. pp. 1-10.
- Gunston, B. (Ed.) (2000). *Jane's aero-engines*, Issue seven. Coulsdon, Surrey, UK: Jane's Information Group Limited. pp. 510-512.
- Guyann, M. D., Berton, J.J., Fisher, K. L., Haller, W.J., Tong, M. T., and Thurman, D.R. (2009). Analysis of turbofan design options for an advanced single-aisle transport aircraft. American Institute of Aeronautics and Astronautics. pp. 1-13.
- Guyann, M. D., Berton, J.J., Fisher, K. L., Haller, W.J., Tong, M. T., and Thurman, D.R. (2011). Refined exploration of turbofan design options for an advanced single-aisle transport. NASA/TM-2011-216883. pp. 1-27.
- Guyann, M.D., Berton, J.J., Fisher, K.L., Haller, W.J., Tong, M.T., and Thurman, D.R. (2009). Engine concept study for an advanced single-aisle transport. NASA/TM-2009-215784. pp. 1-97.
- Haldenbrand, R. and Norgren, W.M. (1979). Airesearch QCGAT program [quiet clean general aviation turbofan engines]. NASA-CR-159758. pp. 1-199.
- Hall, C.A. and Crichton, D. (2007). Engine design studies for a silent aircraft. *Journal of Turbomachinery*, 129, 479-487.
- Han, J., Dutta, S., and Ekkad, S.V. (2000). Gas turbine heat transfer and cooling technology. New York, NY: Taylor & Francis. pp. 1-25, 129-157, and 160-249.
- Haque, A. and Shamsuzzoha, M., Hussain, F., and Dean, D. (2003). S20-glass/epoxy polymer nanocomposites: Manufacturing, structures, thermal and mechanical properties. *Journal of Composite Materials*, 37 (20), 1821-1837.
- Hazlett, R.N. (1991). Thermal oxidation stability of aviation turbine fuels. Philadelphia, PA: ASTM. pp. 1-163.
- Heidelberg, L.J., and Hall, D.G. (1992). Acoustic mode measurements in the inlet of a model turbofan using a continuously rotating rake. AIAA-93-0598. 31st Aerospace Sciences Meeting. Reno, NV. Jan. 11-14, 1993. pp. 1-30.
- Heidelberg, L.J., and Hall, D.G. (1992). Acoustic mode measurements in the inlet of a model turbofan using a continuously rotating rake. NASA-TM-105989. Prepared for the 31st Aerospace Sciences Meeting. Reno, NV. Jan. 11-14, 1993. pp. 1-30.
- Heingartner, P., MBA, D., Brown, D. (2003). Determining power losses in the helical gear mesh; Case Study. ASME 2003 Design Engineering Technical Conferences. Chicago, IL. Sep. 2-6, 2003. pp. 1-7.
- Hemighaus, G., Boval, T., Bacha, J., Barnes, F., Franklin, M., Gibbs, L., . . . Morris, J. (2007). Aviation fuels: Technical review. Chevron Products Company. pp. 1-94. Retrieved from: [https://www.cgabusinessdesk.com/document/aviation\\_tech\\_review.pdf](https://www.cgabusinessdesk.com/document/aviation_tech_review.pdf).
- 2003 NASA seal/secondary air system workshop. (2003). NASA/CP-2004-212963/VOL1. Sep. 1, 2004. pp. 1-408.
- About Gas Turb. Retrieved Jun. 26, 2018 from: <http://gasturb.de/about-gasturb.html>.
- Adamson, A.P. (1975). Quiet Clean Short-Haul Experimental Engine (QCSEE) design rationale. Society of Automotive Engineers. Air Transportation Meeting. Hartford, CT. May 6-8, 1975. pp. 1-9.
- Aerospace Information Report. (2008). Advanced ducted propulsor in-flight thrust determination. SAE International AIR5450. Aug. 2008. p. 1-392.
- Agarwal, B.D and Broutman, L.J. (1990). Analysis and performance of fiber composites, 2nd Edition. John Wiley & Sons, Inc. New York: New York. pp. 1-11, 13-23, 26-33, 50-51, 56-58, 60-61, 64-71, 87-89, 324-329, 436-437.
- AGMA Standard (1997). Design and selection of components for enclosed gear drives. Alexandria, VA: American Gear Manufacturers Association. pp. 1-48.
- AGMA Standard (1999) Flexible couplings—Mass elastic properties and other characteristics. Alexandria, VA: American Gear Manufacturers Association. pp. 1-46.
- AGMA Standard (2006). Design manual for enclosed epicyclic gear drives. Alexandria, VA: American Gear Manufacturers Association. pp. 1-104.
- Ahmad, F. and Mizramoghadam, A.V. (1999). Single v. two stage high pressure turbine design of modern aero engines. ASME. Prestend at the International Gast Turbine & Aeroengine Congress & Exhibition. Indianapolis, Indiana. Jun. 7-10, 1999. pp. 1-9.
- Amezket, M., Iriarte, X., Ros, J., and Pintor, J. (2009). Dynamic model of a helical gear pair with backlash and angle-varying mesh stiffness. *Multibody Dynamics 2009, ECCOMAS Thematic Conference*. 2009. pp. 1-36.
- Anderson, N.E., Loewenthal, S.H., and Black, J.D. (1984). An analytical method to predict efficiency of aircraft gearboxes. NASA Technical Memorandum prepared for the Twentieth Joint Propulsion Conference. Cincinnati, OH. Jun. 11-13, 1984. pp. 1-25.
- Anderson, R.D. (1985). Advanced Propfan Engine Technology (APET) definition study, single and counter-rotation gearbox/pitch change mechanism design. NASA CR-168115. Jul. 1, 1985. pp. 1-289.
- Avco Lycoming Division. ALF 502L Maintenance Manual. Apr. 1981. pp. 1-118.
- Aviadvigatel D-110. *Jane's Aero-engines, Aero-engines—Turbofan*. Jun. 1, 2010.
- Awker, R.W. (1986). Evaluation of propfan propulsion applied to general aviation. NASA CR-175020. Mar. 1, 1986. pp. 1-140.
- Baker, R.W. (2000). Membrane technology and applications. New York, NY: McGraw-Hill. pp. 87-153.
- Berton, J.J. and Guyann, M.D. (2012). Multi-objective optimization of a turbofan for an advanced, single-aisle transport. NASA/TM-2012-217428. pp. 1-26.
- Bessarabov, D.G., Jacobs, E.P., Sanderson, R.D., and Beckman, I.N. (1996). Use of nonporous polymeric flat-sheet gas-separation membranes in a membrane-liquid contactor: experimental studies. *Journal of Membrane Sciences*, vol. 113. 1996. pp. 275-84.
- Bloomer, H.E. and Loeffler, I.J. (1982). QCSEE over-the-wing engine acoustic data. NASA-TM-82708. May 1, 1982. pp. 1-558.
- Bloomer, H.E. and Samanich, N.E. (1982). QCSEE under-the-wing engine acoustic data. NASA-TM-82691. May 1, 1982. pp. 1-28.
- Bloomer, H.E. and Samanich, N.E. (1982). QCSEE under-the-wing engine-wing-flap aerodynamic profile characteristics. NASA-TM-82890. Sep. 1, 1982. pp. 1-48.
- Bloomer, H.E., Loeffler, I.J., Kreim, W.J., and Coats, J.W. (1981). Comparison of NASA and contractor results from aeroacoustic tests of QCSEE OTW engine. NASA Technical Memorandum 81761. Apr. 1, 1981. pp. 1-30.
- Bornstein, N. (1993). Oxidation of advanced intermetallic compounds. *Journal de Physique IV*, 1993, 03 (C9), pp. C9-367-C9-373.
- Brennan, P.J. and Kroliczek, E.J. (1979). Heat pipe design handbook. Prepared for National Aeronautics and Space Administration by B & K Engineering, Inc. Jun. 1979. pp. 1-348.
- Brines, G.L. (1990). The turbofan of tomorrow. *Mechanical Engineering: The Journal of the American Society of Mechanical Engineers*, 108(8), 65-67.
- Bucknell, R.L. (1973). Influence of fuels and lubricants on turbine engine design and performance, fuel and lubricant analyses. Final Technical Report, Mar. 1971-Mar. 1973. pp. 1-252.
- Bunker, R.S. (2005). A review of shaped hole turbine film-cooling technology. *Journal of Heat Transfer* vol. 127. Apr. 2005. pp. 441-453.
- Carney, K., Pereira, M. Revilock, and Matheny, P. (2003). Jet engine fan blade containment using two alternate geometries. 4th European LS-DYNA Users Conference. pp. 1-10.

(56)

**References Cited****OTHER PUBLICATIONS**

- Chapman J.W., et al., "Control Design for an Advanced Geared Turbofan Engine", AIAA Joint Propulsion Conference 2017, Jul. 10, 2017-Jul. 12, 2017, Atlanta, GA, pp. 1-12.
- Cheryan, M. (1998). Ultrafiltration and microfiltration handbook. Lancaster, PA: Tecomic Publishing Company, Inc. pp. 171-236.
- Ciepluch, C. (1977). Quiet clean short-haul experimental engine (QCSEE) under-the-wing (UTW) final design report. Prepared for NASA. NASA-CP-134847. Retrieved from: <https://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19800075257.pdf>.
- Clarke, D.R. and Levi, C.G. (2003). Materials design for the next generation thermal barrier coatings. Annual. Rev. Mater. Res. vol. 33. 2003. pp. 383-417.
- Cramoisi, G. Ed. (2012). Death in the Potomac: The crash of Air Florida Flight 90. Air Crash Investigations. Accident Report NTSB/AAR-82-8. p. 45-47.
- Cusick, M. (1981). Avco Lycoming's ALF 502 high bypass fan engine. Society of Automotive Engineers, Inc. Business Aircraft Meeting & Exposition. Wichita, Kansas. Apr. 7-10, 1981. pp. 1-9.
- Daggett, D.L., Brown, S.T., and Kawai, R.T. (2003). Ultra-efficient engine diameter study. NASA/CR-2003-212309. May 2003. pp. 1-52.
- Dalton, III., W.N. (2003). Ultra high bypass ratio low noise engine study. NASA/CR-2003-212523. Nov. 2003. pp. 1-187.
- Daly, M. Ed. (2008). Jane's Aero-Engine. Issue Twenty-three. Mar. 2008. p. 707-12.
- Daly, M. Ed. (2010). Jane's Aero-Engine. Issue Twenty-seven. Mar. 2010. p. 633-636.
- Damerau, J. (2014) What is the mesh stiffness of gears Screen shot of query submitted by Vahid Dabbagh, answered by Dr. Jochan Damerau, Research General Manager at Bosch Corp., Japan. Retrieved from: [https://www.researchgate.net/post/What\\_is\\_the\\_mesh\\_stiffness\\_of\\_gears](https://www.researchgate.net/post/What_is_the_mesh_stiffness_of_gears).
- Darrah, S. (1987). Jet fuel deoxygenation. Interim Report for Period Mar. 1987-Jul. 1988. pp. 1-22.
- Dassault Falcon 900EX Easy Systems Summary. Retrieved from: <http://www.smartcockpit.com/docs/F900EX-Engines.pdf> pp. 1-31.
- Datasheet. CF6-80C2 high-bypass turbofan engines. Retrieved from <https://geaviation.com/sites/default/files/datasheet-CF6-80C2.pdf>.
- Datasheet. CFM56-5B for the Airbus A320ceo family and CFM56-7B for the Boeing 737 family. <https://www.cfmaeroengines.com/>.
- Datasheet. Genx™ high bypass turbofan engines. Retrieved from: <https://www.geaviation.com/sites/default/files/datasheet-genx.pdf>.
- Davies, D. and Miller, D.C. (1971). A variable pitch fan for an ultra quiet demonstrator engine. 1976 Spring Convention: Seeds for Success in Civil Aircraft Design in the Next Two Decades. pp. 1-18.
- Davis, D.G.M. (1973). Variable-pitch fans: Progress in Britain. Flight International. Apr. 19, 1973. pp. 615-617.
- Decker, S. and Clough, R. (2016). GE wins shot at voiding pratt patent in jet-engine clash. Bloomberg Technology. Retrieved from: <https://www.bloomberg.com/news/articles/2016-06-30/ge-wins-shot-to-invalidate-pratt-airplane-engine-patent-in-u-s>.
- Declaration of Dr. Magdy Attia, In re U.S. Pat. No. 8,313,280, Executed Oct. 21, 2016, pp. 1-88.
- Declaration of Dr. Magdy Attia, In re U.S. Pat. No. 8,517,668, Executed Dec. 8, 2016, pp. 1-81.
- Declaration of John Eaton, Ph.D. In re U.S. Pat. No. 8,689,568, Executed Mar. 28, 2016, pp. 1-87.
- Levintan, R.M. (1975). Q-Fan demonstrator engine. Journal of Aircraft. vol. 12(8). Aug. 1975. pp. 658-663.
- Lewicki, D.G., Black, J.D., Savage, M., and Coy, J.J. (1985). Fatigue life analysis of a turboprop reduction gearbox. NASA Technical Memorandum. Prepared for the Design Technical Conference (ASME). Sep. 11-13, 1985. pp. 1-26.
- Liebeck, R.H., Andrastek, D.A., Chau, J., Girvin, R., Lyon, R., Rawdon, B.K., Scott, P.W. et al. (1995). Advanced subsonic airplane design & economics studies. NASA CR-195443. Apr. 1995. pp. 1-187.
- Litt, J.S. (2018). Sixth NASA Glenn Research Center propulsion control and diagnostics (PCD) workshop. NASA/CP-2018-219891. Apr. 1, 2018. pp. 1-400.
- Lord, W.K., MacMartin, D.G., and Tillman, T.G. (2000). Flow control opportunities in gas turbine engines. American Institute of Aeronautics and Astronautics. pp. 1-15.
- Lynwander, P. (1983). Gear drive systems: Design and application. New York, New York: Marcel Dekker, Inc. pp. 145, 355-358.
- MacIsaac, B. and Langston, R. (2011). Gas turbine propulsion systems. Chichester, West Sussex: John Wiley Sons, Ltd. pp. 260-265.
- Mancuso, J.R. and Corcoran, J.P. (2003). What are the differences in high performance flexible couplings for turbomachinery Proceedings of the Thirty-Second Turbomachinery Symposium. 2003. pp. 189-207.
- Manual. Student's Guide to Learning SolidWorks Software. Dassault Systemes—SolidWorks Corporation. pp. 1-156.
- Matsumoto, T., Toshiro, U., Kishida, A., Tsutomu, F., Maruyama, I., and Akashi, M. (1996). Novel functional polymers: Poly (dimethylsiloxane)-polyamide multiblock copolymer. VII. Oxygen permeability of aramid-silicone membranes in a gas-membrane-liquid system. Journal of Applied Polymer Science, vol. 64(6). May 9, 1997. pp. 1153-1159.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 223-234, 462-479, 517-520, 757-767, and 862-864.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 85-87, 95-104, 121-123, 223-234, 242-245, 278-285, 303-309, 323-326, 462-479, 517-520, 563-565, 630-632, 668-670, 673-675, 682-685, 697-705, 726-727, 731-732, 802-805, 828-830 and appendices.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 85-87, 95-104, 121-123, 223-234, 242-245, 278-285, 303-309, 323-326, 462-479, 517-520, 563-565, 630-632, 673-675, 682-685, 697-699, 703-705, 802-805, 862-864, and 923-925.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 8-15.
- Mavris, D.N., Schutte, J.S. (2016). Application of deterministic and probabilistic system design methods and enhancements of conceptual design tools for Era project final report. NASA/CR-2016-219201. May 1, 2016. pp. 1-240.
- McArdle, J.G. and Moore, A.S. (1979). Static test-stand performance of the YF-102 turbofan engine with several exhaust configurations for the Quiet Short-Haul Research Aircraft (QSRA). Prepared for NASA. NASA-TP-1556. Nov. 1979. pp. 1-68.
- McCracken, R.C. (1979). Quiet short-haul research aircraft familiarization document. NASA-TM-81149. Nov. 1, 1979. pp. 1-76.
- McCune, M.E. (1993). Initial test results of 40,000 horsepower fan drive gear system for advanced ducted propulsion systems. AIAA 29th Joint Conference and Exhibit. Jun. 28-30, 1993. pp. 1-10.
- McMillian, A. (2008) Material development for fan blade containment casing. Abstract. p. 1. Conference on Engineering and Physics: Synergy for Success 2006. Journal of Physics: Conference Series vol. 105. London, UK. Oct. 5, 2006.
- Meier N. (2005) Civil Turbojet/Turbofan Specifications. Retrieved from <http://jet-engine.net/civtfspec.html>.
- Merriam-Webster's collegiate dictionary, 10th Ed. (2001). p. 1125-1126.
- Merriam-Webster's collegiate dictionary, 11th Ed. (2009). p. 824.
- Meyer, A.G. (1988). Transmission development of Textron Lycoming's geared fan engine. Technical Paper. Oct. 1988. pp. 1-12.
- Middleton, P. (1971). 614: VFW's jet feederliner. Flight International. Nov. 4, 1971. p. 725, 729-732.
- Misel, O.W. (1977). QCSEE main reduction gears test program. NASA CR-134669. Mar. 1, 1977. pp. 1-222.
- Moxon, J. How to save fuel in tomorrow's engines. Flight International. Jul. 30, 1983. 3873(124). pp. 272-273.
- Muhlstein, C.L., Stach, E.A., and Ritchie, R.O. (2002). A reaction-layer mechanism for the delayed failure of micron-scale polycrystalline silicon structural films subjected to high-cycle fatigue loading. Acta Materialia vol. 50. 2002. pp. 3579-3595.

(56)

**References Cited****OTHER PUBLICATIONS**

Munt, R. (1981). Aircraft technology assessment: Progress in low emissions engine. Technical Report. May 1981. pp. 1-171.

Nanocor Technical Data for Epoxy Nanocomposites using Nanomer 1.30E Nanoclay. Nnanor, Inc. Oct. 2004.

NASA Conference Publication. (1978). CTOL transport technology. NASA-CP-2036-PT-1. Jun. 1, 1978. pp. 1-531.

NASA Conference Publication. Quiet, powered-lift propulsion. Cleveland, Ohio. Nov. 14-15, 1978. pp. 1-420.

Neitzel, R., Lee, R., and Chamay, A.J. (1973). Engine and installation preliminary design. Jun. 1, 1973. pp. 1-333.

Neitzel, R.E., Hirschkron, R. and Johnston, R.P. (1976). Study of unconventional aircraft engines designed for low energy consumption. NASA-CR-135136. Dec. 1, 1976. pp. 1-153.

Newton, F.C., Liebeck, R.H., Mitchell, G.H., Mooiweer, M.A., Platte, M.M., Toogood, T.L., and Wright, R.A. (1986). Multiple Application Propfan Study (MAPS): Advanced tactical transport. NASA CR-175003. Mar. 1, 1986. pp. 1-101.

Norton, M. and Karczub, D. (2003). Fundamentals of noise and vibration analysis for engineers. Press Syndicate of the University of Cambridge. New York: New York. p. 524.

Oates, G.C. (Ed). (1989). Aircraft propulsion systems and technology and design. Washington, D.C.: American Institute of Aeronautics, Inc. pp. 341-344.

Parametric study of STOL short-haul transport engine cycles and operational techniques to minimize community noise impact. NASA-CR-114759. Jun. 1, 1974. pp. 1-397.

Parker, R.G. and Lin, J. (2001). Modeling, modal properties, and mesh stiffness variation instabilities of planetary gears. Prepared for NASA. NASA/CR-2001-210939. May 2001. pp. 1-111.

Petrovic, J.J., Castro, R.G., Vaidya, R.U., Peters, M.I., Mendoza, D., Hoover, R.C., and Gallegos, D.E. (2001). Molybdenum disilicide

materials for glass melting sensor sheaths. Ceramic Engineering and Science Proceedings. vol. 22(3). 2001. pp. 59-64.

Press release. The GE90 engine. Retrieved from: <https://www.geaviation.com/commercial/engines/ge90-engine>; <https://www.geaviation.com/press-release/ge90-engine-family/ge90-115b-fan-completing-blade-testing-schedule-first-engine-test>; and <https://www.geaviation.com/press-release/ge90-engine-family/ge90-composite-fan-blade-revolution-turns-20-years-old>.

Product Brochure. Garrett TFE731. Allied Signal. Copyright 1987. pp. 1-24.

Pyrograf-III Carbon Nanofiber. Product guide. Retrieved Dec. 1, 2015 from: [http://pyrografproducts.com/Merchant5/merchant.mvc?Screen=cp\\_nanofiber](http://pyrografproducts.com/Merchant5/merchant.mvc?Screen=cp_nanofiber).

QCSEE ball spline pitch-change mechanism whirligig test report. (1978). NASA-CR-135354. Sep. 1, 1978. pp. 1-57.

QCSEE hamilton standard cam/harmonic drive variable pitch fan actuation system derail design report. (1976). NASA-CR-134852. Mar. 1, 1976. pp. 1-172.

QCSEE main reduction gears bearing development program final report. (1975). NASA-CR-134890. Dec. 1, 1975. pp. 1-41.

QCSEE over-the-wing final design report. (1977). NASA-CR-134848. Jun. 1, 1977. pp. 1-460.

QCSEE over-the-wing propulsion system test report vol. III—mechanical performance. (1978). NASA-CR-135325. Feb. 1, 1978. pp. 1-112.


QCSEE Preliminary analyses and design report. vol. I. (1974). NASA-CR-134838. Oct. 1, 1974. pp. 1-337.

QCSEE preliminary analyses and design report. vol. II. (1974). NASA-CR-134839. Oct. 1, 1974. pp. 340-630.


QCSEE the aerodynamic and mechanical design of the QCSEE under-the-wing fan. (1977). NASA-CR-135009. Mar. 1, 1977. pp. 1-137.


\* cited by examiner



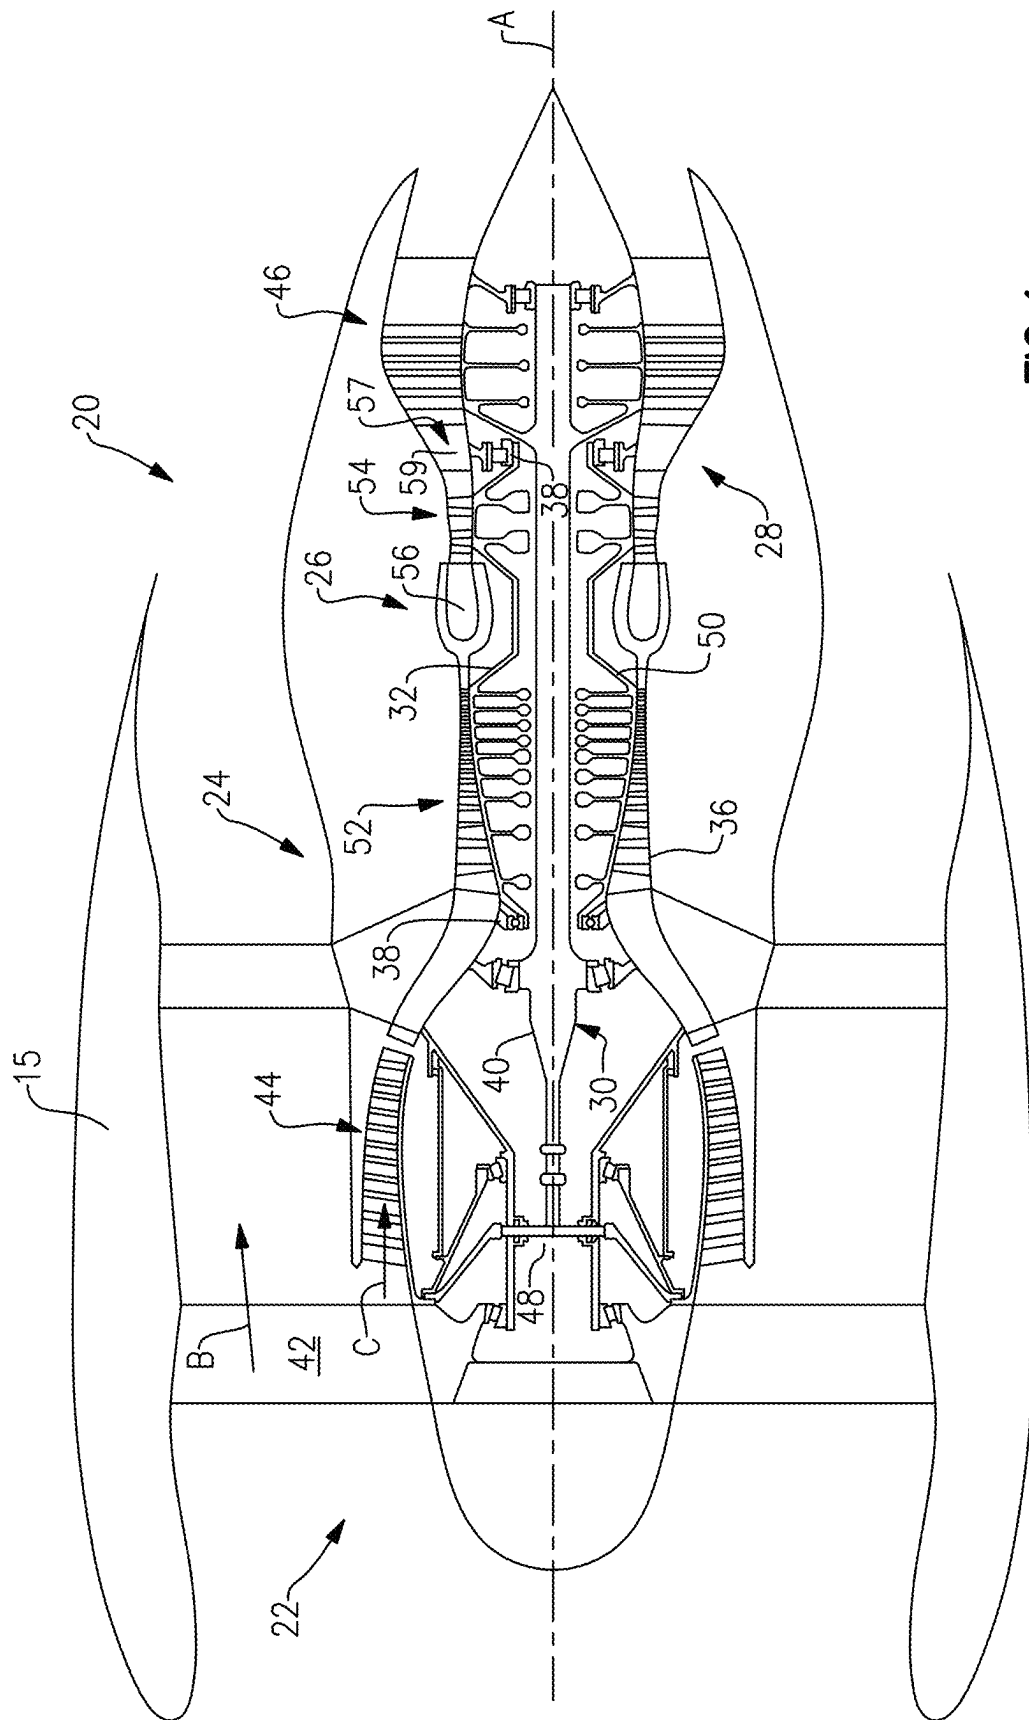

**FIG. 1**

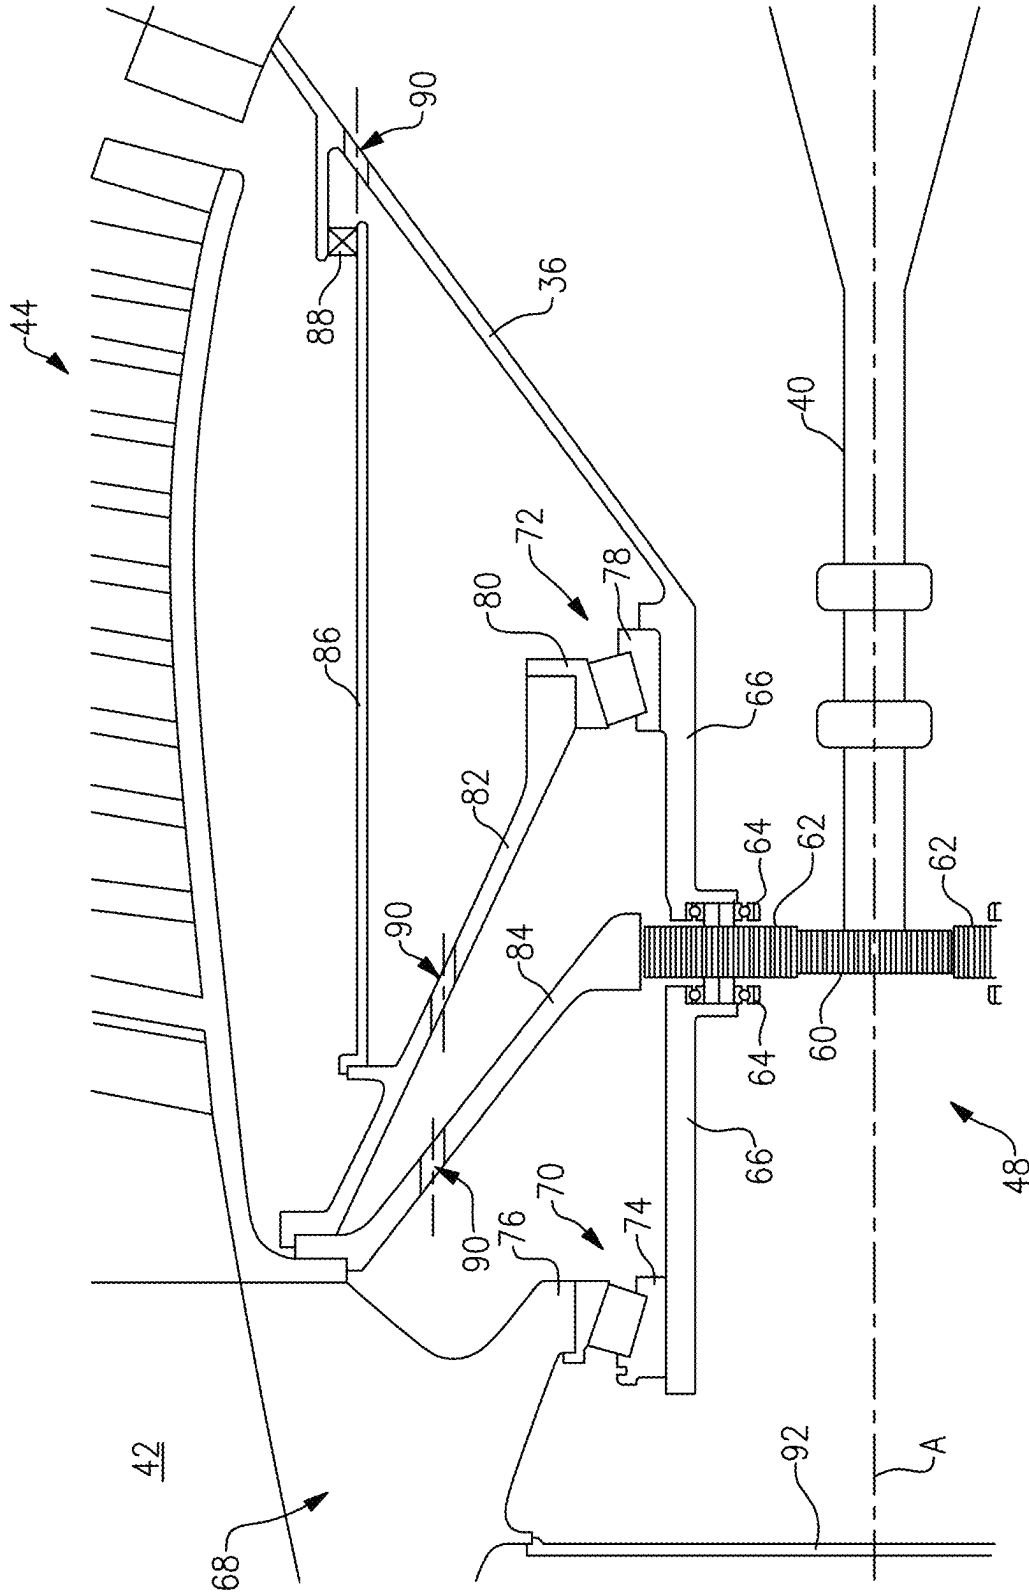

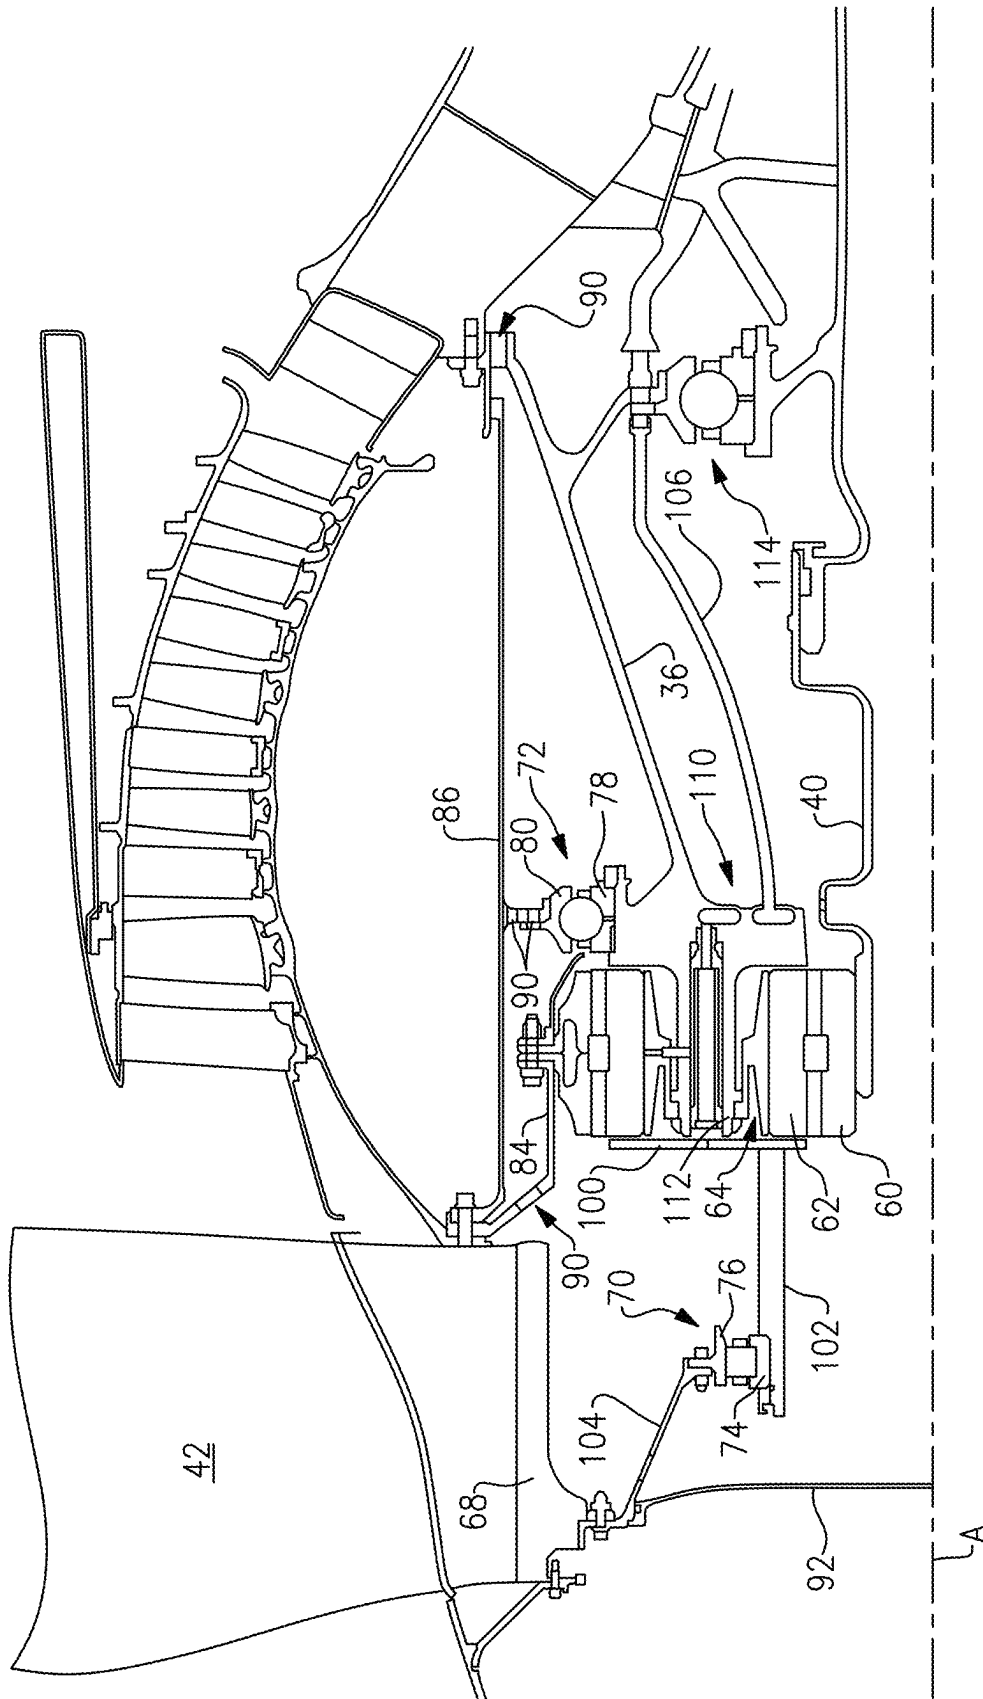

**FIG. 3**

1

# **GAS TURBINE ENGINE WITH FRONT SUPPORT ARRANGEMENT**

## **CROSS-REFERENCE TO RELATED APPLICATIONS**

This disclosure is a continuation of U.S. application Ser. No. 18/107,671 filed Feb. 9, 2023, which is a continuation of U.S. application Ser. No. 17/218,369 filed Mar. 31, 2021, which is a continuation of U.S. application Ser. No. 16/203,088 filed Nov. 28, 2018, which is a continuation of U.S. application Ser. No. 14/633,244 filed on Feb. 27, 2015, now US Granted U.S. Pat. No. 10,280,843 issued May 7, 2019, which claims priority to U.S. Provisional Application No. 61/949,331, which was filed on Mar. 7, 2014 and is incorporated herein by reference.

## **BACKGROUND**

A gas turbine engine typically includes a fan section, a compressor section, a combustor section and a turbine section. Air entering the compressor section is compressed and delivered into the combustion section where it is mixed with fuel and ignited to generate a high-energy exhaust gas flow. The high-energy exhaust gas flow expands through the turbine section to drive the compressor and the fan section. The compressor section typically includes low and high pressure compressors, and the turbine section includes low and high pressure turbines.

A speed reduction device such as an epicyclic gear assembly may be utilized to drive the fan section such that the fan section may rotate at a speed different than the turbine section so as to increase the overall propulsive efficiency of the engine. In such engine architectures, a shaft driven by one of the turbine sections provides an input to the epicyclic gear assembly that drives the fan section at a reduced speed such that both the turbine section and the fan section can rotate at closer to optimal speeds.

The epicyclic gear assembly includes bearings that support rotation of gears. Loads incurred during operation can disrupt a desired relative alignment between gears and therefore the gear assembly may be supported on structures designed to accommodate such loads.

Although geared architectures improve propulsive efficiency, they present different challenges that can reduce any efficiency gains. Accordingly, turbine engine manufacturers continue to seek further improvements to engine performance including improvements to thermal, transfer and propulsive efficiencies.

## **SUMMARY**

In one exemplary embodiment, a gas turbine engine includes a nacelle, and a bypass flow path in a bypass duct within the nacelle of the turbofan engine. A fan section includes a fan with fan blades. The fan section drives air along the bypass flow path. A fan shaft drives a fan that has fan blades and the fan rotates about a central longitudinal axis of the turbofan engine. A speed reduction device includes an epicyclic gear system. A turbine section is connected to the fan section through the speed reduction device and the turbine section rotates about the central longitudinal axis. A first fan bearing for supporting rotation of the fan hub is located axially forward of the speed reduction device. A second fan bearing for supporting rota-

2

tion of the fan hub is located axially aft of the speed reduction device. A first outer race of the first fan bearing is fixed relative to the fan hub.

In a further embodiment of any of the above, the second fan bearing includes an outer race. The outer race of the first fan bearing and the outer race of the second fan bearing are fixed relative to the fan hub and rotate with the fan hub in the same direction.

In a further embodiment of any of the above, an inner race of the first fan bearing is fixed from rotation relative to an engine static structure. An inner race of the second fan bearing is fixed from rotation relative to the engine static structure.

In a further embodiment of any of the above, the epicyclic gear system includes a sun gear, star gears, a ring gear mechanically attached to the fan section, and a carrier. The carrier is fixed from rotation relative to the engine static structure.

In a further embodiment of any of the above, the first fan bearing and the second fan bearing include at least one of roller bearings, ball bearings, or tapered bearings. Each of the star gears include a star gear bearing.

In a further embodiment of any of the above, the carrier includes multiple flexible posts for mounting each of the star gears and the star gear bearing.

In a further embodiment of any of the above, the first fan bearing is at least partially axially aligned with a fan blade of the fan section.

In a further embodiment of any of the above, a carrier is fixed from rotation relative to an engine static structure without a static flexible mount.

In a further embodiment of any of the above, an inner race of the first fan bearing is fixed from rotation relative to a carrier. The carrier is fixed from rotation relative to an engine static structure.

In a further embodiment of any of the above, a high pressure compressor with a compression ratio of at least 20:1 and a fan bypass ratio greater than 10.

In a further embodiment of any of the above, a compressor section is configured to rotate with the fan section. The compressor section includes a five stage low pressure compressor with a compression ratio of at least 2:1.

In a further embodiment of any of the above, a rotating compartment wall is configured to rotate with the compressor section and form a seal with an engine static structure.

In a further embodiment of any of the above, the speed reduction device is located radially inward from a first compressor. The speed reduction device is axially aligned with the first compressor.

In another exemplary embodiment, a fan drive gear module includes a sun gear and a multitude of intermediate gears surrounding the sun gear. A carrier supports the multitude of intermediate gears. The carrier is configured to support a fan hub with a first fan bearing located on a first side of the carrier and a second fan bearing located on a second opposite side of the carrier. The carrier is configured to be fixed from rotation relative to an engine static structure without a static flexible mount. An outer race of the first fan bearing and an outer race of the second fan bearing are fixed relative to the fan hub and rotate with the fan hub in the same direction.

In a further embodiment of any of the above, an inner race of the first fan bearing is fixed from rotation relative to a carrier. The carrier is fixed from rotation relative to the engine static structure.

In a further embodiment of any of the above, each of the multitude of intermediate gears include an intermediate gear

bearing. The carrier includes multiple flexible posts for mounting each of the multitude of intermediate gears and the intermediate gear bearing.

In a further embodiment of any of the above, a ring gear is fixed relative to the fan hub and the first fan bearing and the second fan bearing include at least one of roller bearings, ball bearings, or tapered bearings.

In another exemplary embodiment, a method of designing a gas turbine engine includes coupling a speed reduction device between a fan hub and a low pressure turbine drive shaft. A first fan bearing is positioned axially forward of the speed reduction device. An outer race of the first fan bearing is fixed relative to the fan hub and rotates with the fan hub relative to an engine static structure. A second fan bearing is positioned axially aft of the speed reduction device. An outer race of the second fan bearing is fixed relative to the fan hub and rotates in the same rotational direction as the outer race of the first fan bearing.

In a further embodiment of any of the above, an inner race of the first fan bearing and an inner race of the second fan bearing is positioned fixed to a carrier and fixed from rotation relative to the engine static structure.

In a further embodiment of any of the above, a ring gear of the speed reduction device relative to the fan hub is fixed to allow the ring gear to rotate with the fan hub. The first fan bearing and the second fan bearing include at least one of roller bearings, ball bearings, or tapered bearings.

The various features and advantages of this disclosure will become apparent to those skilled in the art from the following detailed description. The drawings that accompany the detailed description can be briefly described as follows.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of an example gas turbine engine.

FIG. 2 is a schematic view of an example geared architecture.

FIG. 3 is a schematic view of another example geared architecture.

#### DETAILED DESCRIPTION

FIG. 1 schematically illustrates a gas turbine engine 20. The gas turbine engine 20 is disclosed herein as a two-spool turbofan that generally incorporates a fan section 22, a compressor section 24, a combustor section 26 and a turbine section 28. Alternative engines might include an augmentor section (not shown) among other systems or features. The fan section 22 drives air along a bypass flow path B in a bypass duct defined within a nacelle 15, while the compressor section 24 drives air along a core flow path C for compression and communication into the combustor section 26 then expansion through the turbine section 28. Although depicted as a two-spool turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to use with two-spool turbofans as the teachings may be applied to other types of turbine engines including three-spool architectures.

The exemplary engine 20 generally includes a low speed spool 30 and a high speed spool 32 mounted for rotation about an engine central longitudinal axis A relative to an engine static structure 36 via several bearing systems 38. It should be understood that various bearing systems 38 at various locations may alternatively or additionally be pro-

vided, and the location of bearing systems 38 may be varied as appropriate to the application.

The low speed spool 30 generally includes an inner shaft 40 that interconnects a fan 42, a first (or low) pressure compressor 44 and a first (or low) pressure turbine 46. The inner shaft 40 is connected to the fan 42 through a speed change mechanism, which in exemplary gas turbine engine 20 is illustrated as a geared architecture 48 to drive the fan 42 at a lower speed than the low speed spool 30. The high speed spool 32 includes an outer shaft 50 that interconnects a second (or high) pressure compressor 52 and a second (or high) pressure turbine 54. A combustor 56 is arranged in exemplary gas turbine 20 between the high pressure compressor 52 and the high pressure turbine 54. A mid-turbine frame 57 of the engine static structure 36 is arranged generally between the high pressure turbine 54 and the low pressure turbine 46. The mid-turbine frame 57 further supports bearing systems 38 in the turbine section 28. The inner shaft 40 and the outer shaft 50 are concentric and rotate via bearing systems 38 about the engine central longitudinal axis A which is collinear with their longitudinal axes.

The core airflow is compressed by the low pressure compressor 44 with a compression ratio of at least 2:1 then the high pressure compressor 52, mixed and burned with fuel in the combustor 56, then expanded over the high pressure turbine 54 and low pressure turbine 46. The mid-turbine frame 57 includes airfoils 59 which are in the core airflow path C. The turbines 46, 54 rotationally drive the respective low speed spool 30 and high speed spool 32 in response to the expansion. It will be appreciated that each of the positions of the fan section 22, compressor section 24, combustor section 26, turbine section 28, and fan drive gear system 48 may be varied. For example, gear system 48 may be located aft of combustor section 26 or even aft of turbine section 28, and fan section 22 may be positioned forward or aft of the location of gear system 48.

The engine 20 in one example is a high-bypass geared aircraft engine. In a further example, the engine 20 bypass ratio is greater than about six (6), with an example embodiment being greater than about ten (10), the geared architecture 48 is an epicyclic gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3 and the low pressure turbine 46 has a pressure ratio that is greater than about five. In one disclosed embodiment, the engine 20 bypass ratio is greater than about ten (10:1), the fan diameter is significantly larger than that of the low pressure compressor 44, and the low pressure turbine 46 has a pressure ratio that is greater than about five 5:1. Low pressure turbine 46 pressure ratio is pressure measured prior to inlet of low pressure turbine 46 as related to the pressure at the outlet of the low pressure turbine 46 prior to an exhaust nozzle. The geared architecture 48 may be an epicycle gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3:1. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine and that the present invention is applicable to other gas turbine engines including direct drive turbofans.

A significant amount of thrust is provided by the bypass flow B due to the high bypass ratio. The fan section 22 of the engine 20 is designed for a particular flight condition—typically cruise at about 0.8 Mach and about 35,000 feet. The flight condition of 0.8 Mach and 35,000 ft (10,668 meters), with the engine at its best fuel consumption—also known as “bucket cruise Thrust Specific Fuel Consumption (TSFC)” —is the industry standard parameter of lbm of

## 5

fuel being burned divided by lbf of thrust the engine produces at that minimum point. "Low fan pressure ratio" is the pressure ratio across the fan blade alone, without a Fan Exit Guide Vane ("FEGV") system. The low fan pressure ratio as disclosed herein according to one non-limiting embodiment is less than about 1.45. "Low corrected fan tip speed" is the actual fan tip speed in ft/sec divided by an industry standard temperature correction of  $[(T_{\text{am}} - 518.7^{\circ}\text{R})]^{0.5}$ . The "Low corrected fan tip speed" as disclosed herein according to one non-limiting embodiment is less than about 1150 ft/second (350.5 meters/second).

FIG. 2 illustrates the inner shaft 40 driving the geared architecture 48 to turn the fan 42 and the low pressure compressor 44 together at the same rotational speed. The inner shaft 40 is connected with a sun gear 60 in the geared architecture 48. The sun gear 60 is surrounded by star gears 62 mounted on star gear bearing assemblies 64 attached to a static carrier 66. The static carrier 66 allows the star gears 62 to rotate around an axis of each star gear 62 but not around and engine axis A. The static carrier 66 is fixed relative to the engine static structure 36 on the gas turbine engine 20.

The geared architecture 48 is located radially inward and axially aligned with the low pressure compressor 44 to shorten the overall length of the gas turbine engine 20.

A fan hub 68 is supported by a forward fan bearing 70 and an aft fan bearing 72. The forward fan bearing 70 includes an inner race 74 fixed to the static carrier 66 and an outer race 76 fixed to the fan hub 68. The forward fan bearing 70 supports radial and thrust loads from a forward end of the fan hub 68.

The aft fan bearing 72 includes an inner race 78 attached to the static carrier 66, which is connected with the engine static structure 36, and an outer race 80 is attached to a rotating aft support 82. The aft fan bearing 72 supports an aft end of the fan hub 68 and carries radial loads from the fan 42.

A rotatable ring gear 84 turns the fan hub 68 and the low pressure compressor 44 at the same rotational speed. A rotating compartment wall 86 extends from the rotating aft support 82 and is sealed against the engine static structure 36 with an oil seal 88.

Scavenged oil passes through holes 90 extending through the ring gear 84, the rotating aft support 82, and the engine static structure 36 to direct oil towards the forward and aft fan bearing 70 and 72 and the geared architecture 48. A rotating cover 92 aids in retaining and directing the oil towards the forward fan bearing 70, the aft fan bearing 72, and the geared architecture 48 and to prevent the need for carbon seals.

FIG. 3 illustrates another example geared architecture 148. The geared architecture 148 is similar to the geared architecture 48 shown in FIG. 2 except where shown in FIG. 3 or described below.

A static carrier 110 includes an oil baffle 100 extending from a forward end and a cylindrical support 102 for supporting the forward fan bearing 70. An oil feed tube 106 supplies oil to the static carrier 110 and the rest of geared architecture 148. A multitude of flexible shafts 112 extend from the static carrier 110 to support the star gears 62 and the respective star gear bearing assemblies 64. The flexibility of the shafts 112 support torsional loads from the star gears 62 and star gear bearing assemblies 64 and allow the star gears 62 to be isolated from the engine static structure 36 such that a static flexible mount is not necessary to mount the geared architecture 148.

## 6

The forward fan bearing 70 in this example includes a roller bearing with the inner race 74 mounted to the cylindrical support 102 and the outer race 76 rotatably attached to the fan hub 68 through a hub support 104. Although a roller bearing is illustrated in this example for the forward fan bearing 70, a ball bearing or a tapered bearing could also be utilized.

The aft fan bearing 72, such as a ball bearing, is mounted on an aft side of the geared architecture 148 opposite from the forward bearing 70. Although a ball bearing is illustrated in this example for the aft fan bearing 72, a roller bearing or a tapered bearing could also be utilized.

The forward fan bearing 70 and the aft fan bearing 72 straddle the geared architecture 148 to greatly reduce misalignment imparted on the geared architecture 148. This eliminates the need for a flexible coupling on the geared architecture 148 to combat misalignment forces acting on the gears.

An inner shaft bearing 114 attached to the engine static structure 36 supports a forward end of the inner shaft 40 and carries both radial and thrust loads. Since the fan 42 imparts a forward thrust load and low pressure turbine 46 imparts an aft thrust load on the inner shaft 40, the opposing loads are generally cancelled out by the aft fan bearing 72 and the inner shaft bearing 114 both being attached to the engine static structure 36.

The gas turbine engine 20 is designed by attaching the geared architecture 48 or 148 device to the fan hub 68 and the inner shaft 40. The forward fan bearing 70 is positioned forward of the geared architecture 48 or 148 with the first outer race 76 connected to the fan hub 68. The aft fan bearing 72 is positioned aft of the geared architecture 48 or 148. The inner race 74 and the inner race 78 are attached to the static carrier (66 or 110). The ring gear 85 from the geared architecture 48 or 148 is connected to the fan hub 68.

The preceding description is exemplary rather than limiting in nature. Variations and modifications to the disclosed examples may become apparent to those skilled in the art that do not necessarily depart from the essence of this disclosure. The scope of legal protection given to this disclosure can only be determined by studying the following claims.

What is claimed is:

1. A gas turbine engine comprising:

- a propulsor section including a propulsor having blades extending from a propulsor hub;
- a propulsor shaft that drives the propulsor hub, the propulsor rotatable about an engine longitudinal axis;
- a compressor section including a first compressor and a second compressor, the first compressor including a plurality of stages and a rotatable compressor hub, and the second compressor having a greater number of stages than the first compressor;
- a speed reduction device including an epicyclic gear system, wherein the epicyclic gear system includes a gear reduction ratio greater than 2.3, wherein the epicyclic gear system includes a sun gear, a plurality of intermediate gears, a carrier supporting the intermediate gears and the propulsor hub, and a ring gear, and wherein the speed reduction device drives the rotatable compressor hub and the propulsor through a connection established axially forward of the epicyclic gear system relative to the engine longitudinal axis; and
- a turbine section including a first turbine and a second turbine, wherein the second turbine drives the propulsor through the epicyclic gear system;

7

wherein the epicyclic gear system is straddled by forward and aft bearings that engage the carrier.

2. The gas turbine engine as recited in claim 1, wherein: the second turbine includes a greater number of stages than the first turbine; and  
the first turbine drives the second compressor.

3. The gas turbine engine as recited in claim 2, wherein the second turbine includes an inlet, an outlet and a turbine pressure ratio of greater than 5:1, and the turbine pressure ratio is pressure measured prior to the inlet as related to pressure at the outlet prior to an exhaust nozzle.

4. The gas turbine engine as recited in claim 3, wherein: the first compressor includes three stages; and a portion of the rotatable compressor hub extends axially forward of the epicyclic gear system to the connection.

5. The gas turbine engine as recited in claim 4, wherein: the first compressor includes a compression ratio of at least 2:1; and  
the second compressor includes a compression ratio of at least 20:1.

6. The gas turbine engine as recited in claim 4, wherein the speed reduction device turns the propulsor and the first compressor at a common rotational speed.

7. The gas turbine engine as recited in claim 2, wherein: the carrier is fixed relative to an engine static structure; the ring gear establishes an output of the speed reduction device that drives the propulsor hub through the connection; and  
the forward and aft bearings support rotation of the propulsor hub.

8. The gas turbine engine as recited in claim 7, wherein: the carrier includes an oil baffle extending from a forward portion of the carrier;  
an oil feed tube is adapted to supply oil to the carrier, and the oil feed tube extends from the carrier to a position axially aft of the aft bearing relative to the engine longitudinal axis; and  
the aft bearing is radially aligned with the ring gear relative to the engine longitudinal axis, and the aft bearing is situated on an outer periphery of the carrier.

9. The gas turbine engine as recited in claim 7, wherein: the ring gear drives the propulsor hub and the first compressor through the connection;  
a shaft interconnects the second turbine and an input of the sun gear; and  
the forward bearing is axially forward of the shaft relative to the engine longitudinal axis.

10. The gas turbine engine as recited in claim 7, wherein the speed reduction device turns the propulsor and the first compressor at a common rotational speed.

11. The gas turbine engine as recited in claim 7, wherein: the first compressor abuts the propulsor hub at an interface, and the connection is established at the interface; and  
the forward bearing is axially aligned with the propulsor hub relative to the engine longitudinal axis.

12. The gas turbine engine as recited in claim 7, wherein the ring gear includes a first ring gear portion and a second ring gear portion having respective radially extending flanges connected to the propulsor shaft.

13. The gas turbine engine as recited in claim 1, wherein the propulsor section is a fan section, the propulsor is a fan, and an outer housing surrounds the fan to define a bypass duct.

8

14. The gas turbine engine as recited in claim 13, wherein: the fan section delivers a portion of air into the compressor section, and a portion of air into the bypass duct, and a bypass ratio, which is defined as a volume of air passing to the bypass duct compared to a volume of air passing into the compressor section, is greater than 10 at cruise at 0.8 Mach and 35,000 feet; and  
the fan has a fan pressure ratio of less than 1.45 across the blades alone at cruise at 0.8 Mach and 35,000 feet.

15. The gas turbine engine as recited in claim 1, wherein: the turbine section includes a mid-turbine frame arranged between the first turbine and the second turbine with respect to the engine longitudinal axis, the mid-turbine frame supports a bearing, and the mid-turbine frame includes airfoils in a core airflow path.

16. A gas turbine engine comprising:  
a propulsor section including a propulsor having blades extending from a propulsor hub;  
a propulsor shaft that drives the propulsor, the propulsor rotatable about an engine longitudinal axis;  
a compressor section including a first compressor and a second compressor, wherein the first compressor includes a plurality of stages;  
a speed reduction device including an epicyclic gear system, wherein the epicyclic gear system includes a gear reduction ratio greater than 2.3, and wherein the epicyclic gear system includes a sun gear, a plurality of intermediate gears, a carrier supporting the intermediate gears and the propulsor hub, and a ring gear; and  
a turbine section including a first turbine and a second turbine, wherein the second turbine drives the propulsor through the epicyclic gear system;  
wherein the epicyclic gear system is straddled by forward and aft bearings that engage the carrier;  
wherein the speed reduction device turns the propulsor and the first compressor at a common rotational speed;  
wherein the propulsor section is a fan section, the propulsor is a fan, an outer housing surrounds the fan to define a bypass duct; and  
wherein the fan section delivers a portion of air into the compressor section, and a portion of air into the bypass duct, and a bypass ratio, which is defined as a volume of air passing to the bypass duct compared to a volume of air passing into the compressor section, is greater than 10 at cruise at 0.8 Mach and 35,000 feet.

17. The gas turbine engine as recited in claim 16, wherein: the first compressor includes three stages, and the second compressor includes a greater number of stages than the first compressor;  
the first compressor includes a compression ratio of at least 2:1;  
the second compressor includes a compression ratio of at least 20:1; and  
the second turbine includes a greater number of stages than the first turbine.

18. The gas turbine engine as recited in claim 16, wherein: the carrier is fixed relative to an engine static structure; the ring gear drives the propulsor hub through the propulsor shaft; and  
the forward and aft bearings support rotation of the propulsor hub.

\* \* \* \* \*