

(12) United States Patent

Nuanes et al.

(54) LOW DUSTING, SMALL CLUMPING HIGHLY ABSORPTIVE ANIMAL LITTER

(71) Applicant: THE CLOROX COMPANY, Oakland, CA (US)

(72) Inventors: Anisa M. Nuanes, Pleasanton, CA

(US); Jacob L. Orlowicz, Pleasanton, CA (US); Robert W. Peugh,

Pleasanton, CA (US); Donald K. Swatling, Pleasanton, CA (US); Ahmed

Drief, Pleasanton, CA (US)

Assignee: THE CLOROX COMPANY, Oakland,

CA (US)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-

claimer.

(21) Appl. No.: 18/422,760

(22)Filed: Jan. 25, 2024

Prior Publication Data (65)

> US 2024/0157327 A1 May 16, 2024

Related U.S. Application Data

- (63) Continuation of application No. 17/112,779, filed on Dec. 4, 2020, now Pat. No. 11,918,969.
- (60) Provisional application No. 62/944,504, filed on Dec. 6, 2019.
- (51) Int. Cl. B01J 20/00

(2006.01)

A01K 1/015 U.S. Cl.

(2006.01)

CPC B01J 20/00 (2013.01); A01K 1/0154 (2013.01)

US 12,390,787 B2 (10) **Patent No.:**

(45) Date of Patent:

*Aug. 19, 2025

(58) Field of Classification Search

CPC B01J 20/00; A01K 1/0154 See application file for complete search history.

(56)**References Cited**

U.S. PATENT DOCUMENTS

29,783 A 8/1860 Harris 33,983 A 12/1861 Cauhaupe 4/1962 Sawyer et al. 3,029,783 A

(Continued)

FOREIGN PATENT DOCUMENTS

2546538 A1 11/2007 CA CA 2955705 A1 1/2022

(Continued)

OTHER PUBLICATIONS

Extended European Search Report received for EP Patent Application No. 21175668.9, mailed on Dec. 3, 2021, 6 pages.


Primary Examiner — Brian A McCaig

(74) Attorney, Agent, or Firm — Workman Nydegger

(57)ABSTRACT

Animal litter comprising composite particles including powdered sodium bentonite and powdered activated carbon, agglomerated together into the composite particles, wherein the animal litter has a particle size distribution of 16/50 mesh (i.e., 300 µm to 1180 µm in size). The litter may include non-composite, granular clay particles (e.g., granular sodium bentonite) having the same particle size distribution (16/50 mesh). Such particle size characteristics significantly reduce dusting, without the need for a de-dusting agent, reduce clump depth and/or reduce clump width at the bottom of the clump (both acting to reduce risk of clumps sticking to the bottom of the litter box) and result in more efficient use of the litter in clumping (reduced clump weight) by increasing absorbency.

24 Claims, 3 Drawing Sheets



☐ "Control" Composite Particles - 8/40

□ Ex. 1 - 100% Composite Particles - 16/50

□ Ex. 2 - 50% Composite Particles - 16/50

US 12,390,787 B2 Page 2

(56)	Referen	ces Cited	5,207,830			Cowan et al.
IIS P	PATENT	DOCUMENTS	5,210,112 5,230,305		5/1993 7/1993	
0.5.1	2 11 12 1 1	DOCOMENTS	5,232,627		8/1993	Burba et al.
3,059,615 A	10/1962	Kuceski et al.	5,238,470		8/1993	Tolles et al.
/ /		Komakine	5,250,491 5,276,000		10/1993	Yan Matthews et al.
3,789,797 A 3,821,346 A	2/1974 6/1974	Brewer	5,279,259			Rice et al.
3,892,846 A		Wortham	5,295,456	A	3/1994	Lawson
3,898,324 A		Komakine	5,303,676			Lawson
	11/1975		5,304,527 5,317,990			Dimitri Hughes
		Owen et al. Corbett et al.	5,318,953			Hughes
4,085,704 A	4/1978		5,320,066		6/1994	
4,187,803 A		Valenta	5,325,816 5,329,880			Pattengill et al. Pattengill et al.
4,256,728 A 4,263,873 A		Nishino et al. Christianson	5,339,769			Toth et al.
4,275,684 A		Kraemer et al.	5,345,787			Piltingsrud
	12/1981		5,359,961 5,361,719		11/1994 11/1994	Goss et al.
	10/1982	Stapley Colborn et al.	5,386,803			Hughes
4,437,429 A		Goldstein et al.	5,389,325			Bookbinder et al.
4,506,628 A	3/1985	Stockel	5,407,442			Karapasha
4,517,308 A		Ehlenz et al.	5,421,291 5,450,817			Lawson et al. Haehn et al.
4,560,527 A 4,565,794 A		Harke et al. de Buda	5,452,684			Elazier-Davis et al.
4,568,453 A		Lowe, Jr.	5,458,091		10/1995	Pattengill et al.
4,591,581 A		Crampton et al.	5,469,809			Coleman
4,607,594 A		Thacker	5,480,584 5,503,111			Urano et al. Hughes
4,621,011 A 4,638,763 A		Fleischer et al. Greenberg	5,529,022		6/1996	
4,640,225 A		Yananton	5,538,932			Yan et al.
4,641,605 A		Gordon	5,542,374 5,566,642		8/1996 10/1996	Palmer, Jr.
4,657,881 A 4,664,843 A		Crampton et al. Burba et al.	5,577,463			Elazier-Davis et al.
4,671,208 A	6/1987		5,579,722	A		Yamamoto et al.
4,677,086 A		Mccue et al.	5,609,123			Luke et al.
		Rosenfeld	5,634,431 5,638,770			Reddy et al. Peleties
4,721,059 A 4,756,273 A		Lowe et al. Yananton	5,647,300		7/1997	
	12/1988		5,648,306	A		Haehn et al.
4,824,810 A		Lang et al.	5,655,480			Steckel
4,837,020 A		Mise et al.	5,664,523 5,680,830			Ochi et al. Kawaguchi et al.
4,844,010 A 4,866,023 A		Ducharme et al. Ritter et al.	5,691,270		11/1997	Miller
4,869,204 A	9/1989	Yananton	5,735,232		4/1998	Lang et al.
		Ducharme et al.	5,736,481 5,736,485		4/1998 4/1998	Miller et al.
4,914,066 A 4,920,090 A		Woodrum Ritter et al.	5,740,761		4/1998	Lee et al.
4,949,672 A		Ratcliff et al.	5,743,213		4/1998	
5,005,115 A	4/1991	Schauder	5,762,023 5,775,259		6/1998 7/1998	
5,005,520 A 5,013,335 A		Michael Marcus	5,806,462		9/1998	
5,014,650 A		Sowle et al.	5,826,543			Raymond et al.
5,018,482 A	5/1991	Stanislowski et al.	5,836,263			Goss et al.
5,019,254 A		Abrevaya et al.	5,860,391 5,863,858			Maxwell et al. Miller et al.
5,032,549 A 5,062,383 A	11/1991	Lang et al. Nelson	5,901,661		5/1999	Pattengill et al.
5,079,201 A		Chu et al.	5,927,049		7/1999	
5,094,189 A		Aylen et al.	5,944,704 5,970,915			Guarracino et al. Schlueter et al.
5,094,190 A 5,100,600 A		Ratcliff et al. Keller et al.	5,975,019			Goss et al.
5,101,771 A	4/1992		5,992,351	Α	11/1999	
5,109,805 A		Baldry et al.	6,015,547		1/2000	
5,129,365 A		Hughes Stanislowski et al.	6,019,063 6,025,319			Haubensak et al. Surutzidis et al.
5,135,743 A 5.143.023 A	8/1992 9/1992		6,030,565		2/2000	
5,146,877 A	9/1992	Jaffee et al.	6,039,004			Goss et al.
	10/1992		6,080,908 6,089,189			Guarracino et al. Goss et al.
5,176,107 A 5,176,108 A		Buschur Jenkins et al.	6,089,189			Jaffee et al.
5,176,108 A 5,176,879 A		White et al.	6,101,978			Steckel
5,183,010 A	2/1993	Raymond et al.	6,194,065		2/2001	
5,183,655 A	2/1993		6,206,947			Evans et al.
5,188,064 A 5,193,489 A	2/1993 3/1993		6,216,634 6,220,206			Kent et al. Sotillo et al.
5,196,473 A		Valenta et al.	6,260,511		7/2001	
5,204,310 A	4/1993	Tolles et al.	6,276,300	В1	8/2001	Lewis et al.
5,206,207 A	4/1993	Tolles	6,287,550	В1	9/2001	Trinh et al.

US 12,390,787 B2 Page 3

(5.0)			D 4	GU. I		2002/0121700		7/2002	TT7 1
(56)			Referen	ces Cited		2003/0131799			Wong et al.
			D. (CDD) YO	DOCED COME		2003/0148100			Greene et al.
		U.S.	PATENT	DOCUMENTS		2005/0005869			Fritter et al.
						2006/0042553			Venezio
	6,294,118			Huber et al.		2011/0185977	A1	8/2011	Dixon et al.
	6,308,658		10/2001			2012/0260860	A1 1	0/2012	Drief et al.
	6,319,342		11/2001			2012/0318205	A1 1	2/2012	Kuras et al.
	6,354,243			Lewis et al.		2013/0239901	A1	9/2013	Pechera et al.
	6,371,050			Mochizuki		2013/0266657			Trajkovska
	6,405,677			McPherson et al.		2013/0269623			Lawson
	6,405,678		6/2002	Ikegami et al.		2013/0205023			Miller et al.
	6,426,325			Dente et al.					
	6,472,343			Mccrae et al.		2015/0181831			Huck et al.
	6,499,984	BI		Ghebre-Sellassie et al	l.	2018/0064059			Brown et al.
	6,543,385			Raymond et al.		2019/0297835			Cortner et al.
	6,578,521			Raymond et al.		2019/0320612	A1 1	0/2019	Nga et al.
	6,740,406			Hu et al.		2020/0329661	A1 1	0/2020	Li
	6,860,234 6,962,129		11/2005	Raymond et al.		2021/0169037	A1	5/2021	Nuanes et al.
	7,429,421			Greene et al.					
	7,429,421			Bracilovic		FO	REIGN	PATE	NT DOCUMENTS
	7,856,946			Burckbuchler, Jr.		10	TULIOIT	17111	IVI DOCUMENTS
	8,156,896			Wadams et al.		EP	057330	13 A I	12/1993
	8,273,676			Falcone et al.		EP	06125		8/1994
	8,584,617			Greene et al.		EP	071680		6/1996
	8,720,375	B2		Miller et al.		EP	07593		2/1997
	8,722,031			Lawson et al.		EP	082320		2/1998
	8,733,288			Winkleman et al.		EP	08855		12/1998
	8,881,681		11/2014			EP	057976		8/1999
	8,904,963			Dixon et al.		EP	13466		9/2003
	9,010,273	B2		Adamy et al.			62-2399		10/1987
	9,072,276	B2		Pechera et al.			04-2876		10/1992
	9,119,374			Bracilovic et al.		JP	06-0146	59 A	1/1994
	9,283,540			Fritter et al.		JP	06-34330	52 A	12/1994
	9,398,754			Zhang et al.		JP	07-04120)2	8/1996
	9,986,714	B2	6/2018	Huck et al.		JP	10-26243	32 A	10/1998
1	0,383,308	B2	8/2019	Nga et al.		WO	90/0909	9 A1	8/1990
1	11,918,969	B2		Nuanes et al.		WO	96/0212	29 A1	2/1996
200	1/0018308	A1	8/2001	Quick et al.		WO	98/1229	1 A2	3/1998
200	1/0049514	A1	12/2001	Dodge et al.		WO	98/2720	51 A2	6/1998
200	2/0000207	$\mathbf{A}1$		Ikegami et al.		WO	99/3333	35 A2	7/1999
200	2/0007800	$\mathbf{A1}$	1/2002	Ochi et al.		WO	99/407		8/1999
200	2/0014209	$\mathbf{A}1$	2/2002	Bloomer		WO	99/4570		9/1999
200	2/0054919	$\mathbf{A1}$		Hochwalt et al.		WO	00/3702		6/2000
	2/0117117			Raymond et al.		WO	01/191		3/2001
	2/0153311			Farquhar Davidson		WO	02/566		7/2002
	2/0183201			Barnwell et al.		WO	02/6049		8/2002
	3/0051673		3/2003	Raymond et al.		WO	03/327		4/2003
200	3/0072733	Al	4/2003	McGee et al.		WO	03/6579	06 A2	8/2003

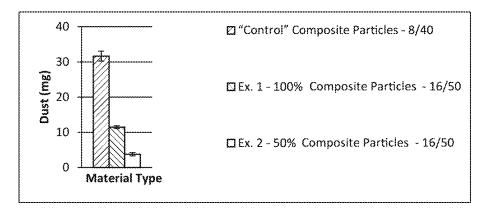


FIG. 1

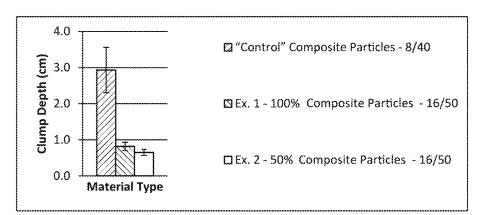


FIG. 2

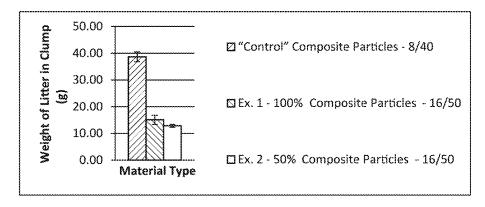
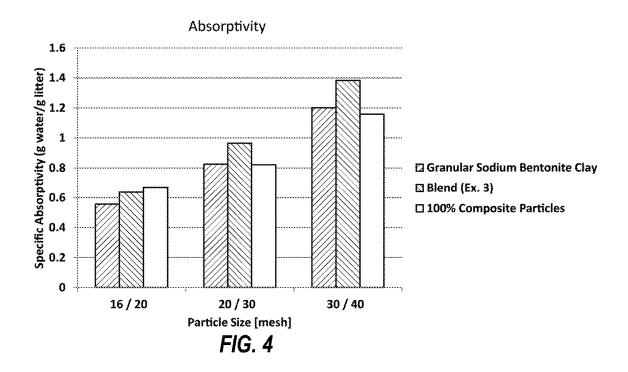


FIG. 3





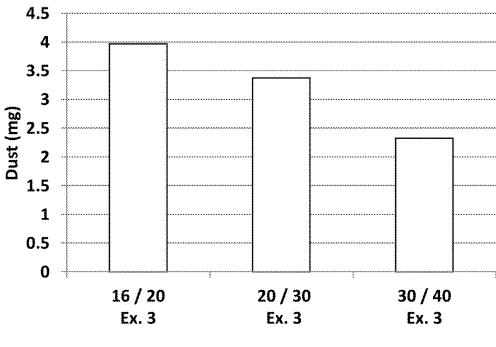


FIG. 5

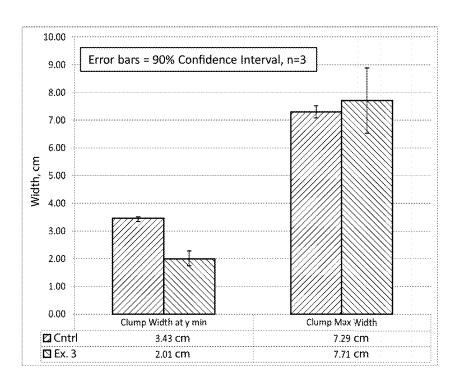


FIG. 6



FIG. 7A



FIG. 7B

LOW DUSTING, SMALL CLUMPING HIGHLY ABSORPTIVE ANIMAL LITTER

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 17/112,779 filed Dec. 4, 2020, which claims the benefit of and priority to U.S. Provisional Patent Application No. 62/944,504 filed Dec. 6, 2019, which is herein incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

1. The Field of the Invention

The present invention relates to litter for use by domestic animals. For example, such litter is typically employed by pet owners to absorb urine and collect feces.

2. Description of Related Art

Many people enjoy the company of one or more domestic pets. Litter boxes are typically provided for the use of such animals in the collection of urine and feces. Such a litter box 25 is typically filled with an absorbent granular material (e.g., sand and/or clay), which aids in collecting the bodily wastes produced by pets. Some existing litter products provide "clumping" capability, by which the litter particles clump together when wetted (e.g., by urine). Sodium bentonite clay is often used in such clumping litter products. While clumping characteristics allow a user to easily remove used clumped litter portions, leaving adjacent unused litter product in the litter box for future use, existing clumping litters also tend to form clump geometries that often extend deep into the litter box, often adhering to the bottom of the litter box, making it difficult to remove such clumps.

Another problem with existing sodium bentonite clay litters is the inability to effectively control malodors. Clay has very poor odor-control qualities, and inevitably waste 40 build-up leads to severe malodor production.

Another difficulty with existing litter products is a tendency for litter to generate dust while the litter is being poured or otherwise handled. The smallest particles (i.e. fines) produce dust that can be a significant dissatisfies to the 45 consumer when pouring or scooping the litter.

It would be an advancement in the art to provide litter products that were specifically configured to provide clumping, but where the clumps formed were less likely to adhere to the litter box. It would be a further advancement if the formation of clumps were more efficient (e.g., reducing clump weight for a given weight of water or urine dosed on the litter, resulting in increased consumer usage provided for a given weight of litter). It would also be advantageous if this could be achieved while reducing dusting characteristics, without requiring use of a synthetic de-dusting agent, such as polytetrafluoroethylene (PTFE), lignosulfate or mineral oil, while also providing superior odor control.

BRIEF SUMMARY OF THE INVENTION

Applicant has surprisingly found that improved dusting characteristics, and more efficient use of the litter during clumping (e.g., reduced clump depth and decreased clump weight when wetted with a given volume of urine, water or other liquid) can be achieved by adjusting the mesh size of particles included within the litter product. For example, a

2

typical litter product includes litter particles with mesh size ranging from 8 mesh down to 40 mesh or from 12 mesh down to 40 mesh. By way of example, particles that will pass through 8 mesh are sized 2.36 mm (2360 μ m) or less, while particles that will not pass through a 40 mesh are sized larger than 0.425 mm (425 μ m). Such a particle size distribution is routinely referred to within the art as 8/40. Similarly, a 12/40 particle size distribution refers to a particle size distribution including particles with sizes ranging from larger than 0.425 mm (425 μ m) up to 1.7 mm (1700 μ m).

Applicant has discovered that by adjusting the particle size distribution to 16/50 (0.3 mm (300 μm) to 1.18 mm (1180 μm)), significant improvements are obtained in reducing dusting, in achieving increased absorbency for more efficient clumping, and in significantly reducing the clump depth and/or clump width at the bottom of the clump (where sticking to the litter box may occur). More efficient clumping means that the consumer is able to get longer usage from a given weight of litter (as clumps formed by dosing the litter with a given volume of liquid weigh less). Reduced clump depth and reduced clump width at the bottom of the clump reduces the risk that the clump formed will stick to the bottom of the litter box.

The present litter products may exhibit excellent, low dusting characteristics without inclusion of a de-dusting agent, such as PTFE, lignosulfonate or mineral oil.

It is surprising that increasing the smaller particle or so-called fines content in a litter product (e.g., by moving the small particle cut-off from 40 mesh to 50 mesh) would somehow result in decreased dusting, although such a result is shown by the data provided herein.

One embodiment according to the present invention is directed to an animal litter comprising composite particles, including powdered sodium bentonite and powdered activated carbon ("PAC"), agglomerated together, where the animal litter ranges in size from 0.3 mm or 300 μ m (50 mesh) to 1.18 mm or 1180 μ m (16 mesh).

Another embodiment according to the present invention is directed to an animal litter comprising composite particles, including powdered sodium bentonite and powdered activated carbon ("PAC"), dry blended with granular sodium bentonite, where the animal litter ranges in size from 0.3 mm or 300 μm (50 mesh) to 1.18 mm or 1180 μm (16 mesh).

Another embodiment according to the present invention is directed to an animal litter comprising composite particles, including powdered sodium bentonite and powdered activated carbon ("PAC"), where the animal litter ranges in size from 0.3 mm or 300 µm (50 mesh) to 1.18 mm or 1180 µm (16 mesh), and the litter is void of a de-dusting agent.

Another embodiment according to the present invention is directed to an animal litter comprising a blend of granular clay material and composite particles and the composite particles include powdered sodium bentonite and powdered activated carbon agglomerated together into the composite particles. The animal litter ranges in size from 300 µm to 1180 µm (16 to 50 mesh) and the composite particles are present in the blend in an amount of about 30% by weight or more and the granular clay material is present in an amount of about 70% by weight of the blend. The blend exhibits an absorbency that is at least about 40% greater than a litter product having a particle size distribution of 8/40 mesh (425 µm to 2360 µm).

Further features and advantages of the present invention will become apparent to those of ordinary skill in the art in view of the detailed description of preferred embodiments below.

BRIEF DESCRIPTION OF THE DRAWINGS

To further clarify the above and other advantages and features of the present invention, a more particular description of the invention will be rendered by reference to specific 5 embodiments thereof which are illustrated in the drawings located in the specification. It is appreciated that these drawings depict only typical embodiments of the invention and are therefore not to be considered limiting of its scope. The invention will be described and explained with additional specificity and detail through the use of the accompanying drawings.

FIG. 1 shows results of a gravimetric dust measurement test for two litter products according to the present invention, as compared to a comparative litter product.

FIG. 2 shows results of a clump depth measurement test for two litter products according to the present invention, as compared to a comparative litter product.

FIG. 3 shows results of a test measuring the weight of litter in a clump for two litter products according to the ²⁰ present invention, as compared to a comparative litter product.

FIG. 4 charts specific absorbency (g water/g litter) for various subset particle size distributions, for 3 different litter configurations (granular sodium bentonite clay, 100% engineered composite particles, and a blend of engineered composite particles and granular sodium bentonite clay).

FIG. 5 shows results of another gravimetric dust measurement test for the various subset particle size distributions, for the litter composition of FIG. 4 including a blend of engineered composite particles and granular sodium bentonite clay.

FIG. **6** shows results of a clump width measurement test at the bottom of the clump (where sticking to the bottom of the litter box would occur), as well as maximum clump 35 width, demonstrating how the present litter compositions tend to form a clump shape resembling an "upside down hat" shape, rather than the typical "hockey puck" shape exhibited by clumps formed under similar conditions, with a comparative litter composition.

FIGS. 7A and 7B illustrate side views, or cross-sectional views of the shape of representative clumps, that form from both of such litter products of FIG. 6. The 8/40 "control" litter product clump is shown in FIG. 7A, while the 16/50 litter product clump is shown in FIG. 7B.

DETAILED DESCRIPTION

I. Definitions

Before describing the present invention in detail, it is to be understood that this invention is not limited to particularly exemplified systems or process parameters that may, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular 55 embodiments of the invention only, and is not intended to limit the scope of the invention in any manner.

All publications, patents and patent applications cited herein, whether supra or infra, are hereby incorporated by reference in their entirety to the same extent as if each 60 individual publication, patent or patent application was specifically and individually indicated to be incorporated by reference.

The term "comprising," which is synonymous with "including," "containing," or "characterized by," is inclusive 65 or open-ended and does not exclude additional, unrecited elements or method steps.

4

The term "consisting essentially of" limits the scope of a claim to the specified materials or steps "and those that do not materially affect the basic and novel characteristic(s)" of the claimed invention.

The term "consisting of" as used herein, excludes any element, step, or ingredient not specified in the claim.

It must be noted that, as used in this specification and the appended claims, the singular forms "a", "an" and "the" include plural referents unless the content clearly dictates otherwise. Thus, for example, reference to a "filler" includes one, two or more such fillers.

Unless otherwise stated, all percentages, ratios, parts, and amounts used and described herein are by weight.

Numbers, percentages, ratios, or other values stated herein may include that value, and also other values that are about or approximately the stated value, as would be appreciated by one of ordinary skill in the art. As such, all values herein are understood to be modified by the term "about". A stated value should therefore be interpreted broadly enough to encompass values that are at least close enough to the stated value to perform a desired function or achieve a desired result, and/or values that round to the stated value. The stated values include at least the variation to be expected in a typical manufacturing process, and may include values that are within 10%, within 5%, within 1%, etc. of a stated value

Some ranges may be disclosed herein. Additional ranges may be defined between any values disclosed herein as being exemplary of a particular parameter. All such ranges are contemplated and within the scope of the present disclosure.

In the application, effective amounts are generally those amounts listed as the ranges or levels of ingredients in the descriptions, which follow hereto. Unless otherwise stated, amounts listed in percentage ("%'s") are in weight percent (based on 100% active) of any composition.

The phrase "free of", "void of" or similar phrases if used herein means that the composition or article comprises 0% of the stated component, that is, the component has not been intentionally added. However, it will be appreciated that such components may incidentally form thereafter, under some circumstances, or such component may be incidentally present, e.g., as an incidental contaminant.

The phrase "substantially free of", "substantially void of" or similar phrases as used herein means that the composition or article preferably comprises 0% of the stated component, although it will be appreciated that very small concentrations may possibly be present, e.g., through incidental formation, contamination, or even by intentional addition. Such components may be present, if at all, in amounts of less than 1%, less than 0.5%, less than 0.25%, less than 0.1%, less than 0.05%, less than 0.005%, less than 0.005%, less than 0.001%, or less than 0.0001%. In some embodiments, the compositions or articles described herein may be free or substantially free from any specific components not mentioned within this specification.

Particle size ranges and distributions as described herein are determined by typical screening methods known to those of skill in the art.

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention pertains. Although a number of methods and materials similar or equivalent to those described herein can

be used in the practice of the present invention, the preferred materials and methods are described herein.

II. Introduction

The present invention relates to litter products, including composite absorbent particles that comprise powdered sodium bentonite and powdered activated carbon "PAC", where the particles of the litter composition are screened to exhibit particular size characteristics, which have been 10 found by Applicant to provide for more efficient clumping (i.e., use less litter mass when forming a clump), reduced clump depth and/or clump width at a bottom of the clump (reducing risk of the formed clump adhering to the bottom of the litter box), and/or reduced dusting characteristics. In 15 particular, Applicant has surprisingly found that by adjusting the lower cut-off threshold for particle size so as to accommodate smaller particles than are typically included (e.g., using a lower limit of 50 mesh (300 µm) rather than 40 mesh upper cut-off threshold for particle size (excluding the relatively larger particles typically included in a litter product), e.g., using an upper limit of 16 mesh (1180 μm) rather than 8 mesh (2360 μ m) or 12 mesh (1700 μ m), that these benefits can be achieved.

It is particularly surprising that significant reductions in dust generation are achieved when pouring the novel litter compared to a conventional litter product that includes a de-dusting agent, such as PTFE or mineral oil. Accordingly, a de-dusting agent is not required in the present litter 30 composition to achieve the reduction in dust generation.

For example, the litter products described herein may exhibit reductions in dust levels (e.g., in a gravimetric dust test, or a visual dust test) of 40% or more, or 50% or more, as compared to existing litter products, without inclusion of 35 a de-dusting agent. Similarly, the litter products may exhibit reductions in clump depth (i.e., penetration depth of the liquid in a litter) of 40% or more, or 50% or more, reductions in clump width at the bottom of the clump of 25% or more, or 35% or more, and reductions in clump weight of 40% or 40 more, or 50% or more, as compared to existing litter products. All of such can be achieved by simply adjusting the particle size characteristics of the litter particles included in the litter.

Such litter products have been shown to exhibit more 45 efficient clumping characteristics (e.g., shallower clump depth and lower clump weight), allowing the given amount of litter (e.g., 20 lb or 25 lb container) to be used for a longer period of time, which reduces the frequency that a pet owner must replace the litter within a litter box, how often they are 50 required to repurchase new litter, and reducing the amount of litter that ends up in waste streams.

III. Exemplary Litter Products and their Components

a. Composite Particles

A composite particle is a discrete particle formed by the agglomeration of smaller component particles. By way of example, components that may be included in such com- 60 posite particles include, but are not limited to, powdered sodium bentonite, PAC and optional powdered fillers.

Composite particles can be formed using a high shear or other agglomeration process including, but not limited to, a pin mixer, a pelletizer, an extruder or the like where the 65 agglomeration process is used to form the discrete composite particles. A pin mixer is a pin-type, high speed, condi-

tioning and micro-pelletizing device that converts small particles (i.e., powders) into larger, discrete agglomerates ("composite particles") through the action of high speed and the addition of a binder, which can be a simple binder such as water.

Such agglomeration processes and the composite particles they produce are described in Applicant's U.S. Pat. No. 9,283,540, herein incorporated by reference in its entirety. Such processes are also described in Applicant's U.S. Pat. No. 10,383,308, also incorporated herein by reference in its entirety.

All components used in forming the composite particles typically are of initially very small particle sizes, so as to be accurately described as powders. They are smaller than "granular" materials that may be dry blended with the composite particles. Particles this small contribute to dusting and/or tracking problems. Inclusion of the powdered components within the composite particle provides the individual components without inclusion as separate and dis-(425 µm)), particularly when coupled with narrowing the 20 crete very small particles dry blended in the litter composition.

> The composite particles contain (relative to each other) approximately the same level of the various components used to form such particles. Furthermore, such composite particles typically do not include a core and shell structure, but a relatively homogenous distribution of the powder components from which the composite particle is formed.

> The composite particles are larger than their constituent components and have particle sizes ranging from about 300 μ m (0.3 mm) to about 1180 μ m (1.18 mm) (i.e., 16/50 mesh). i. Powdered Sodium Bentonite

> The composite particles can include powdered sodium bentonite. The powdered sodium bentonite has particle sizes as described herein, which are significantly smaller than granular sodium bentonite. Inclusion of the powdered sodium bentonite within the composite particle aids in binding and clumping of the litter composition. The powdered sodium bentonite used to form the composite particles have particle sizes of less than 40 mesh (0.4 mm) (400 µm). ii. Powdered Activated Carbon (PAC)

> The composite particles can include a powdered activated carbon (PAC) component. Powdered activated carbon is a fine black powder made from wood or other carbon-containing materials (e.g., coconut, coal, etc.) that have been exposed to high temperatures in a reduced or oxygen free environment and treated, or activated, to increase the material's surface area by heating in the presence of an oxidizing gas or other chemicals. The result is a highly porous fine powder with particle sizes as described herein, which material is capable of absorbing odor causing volatile compounds.

The inclusion of PAC or a similar odor control agent in the composite particle increases the odor control properties of the present litter compositions. For example, PAC particles 55 used in forming such composite particles have a particle size ranging from about 40 μm to about 150 μm. Inclusion of the PAC within the composite particle provides excellent odor control properties, without inclusion of separate and discrete very small particles dry blended in the litter composition. For this reason, the present litter compositions include higher amounts of PAC than is typically included in litter compositions, such as greater than 1% of the litter composition. Normally, such a high PAC content would be wasteful because the loose small particles can segregate. In the present embodiments, the high PAC content works in tandem with greater absorbency and increased efficiency to provide longer lasting litter with superior odor control. By

providing a substantially uniform composition from one composite particle to the next, the odor control efficacy of the carbon is not sacrificed because the distribution of the PAC within the composite particles is maximized and surface area is increased.

PAC content is greater than 1%, greater than 1% to about 3%, and greater than 1% to about 5%, by weight of the composite particles or by weight of the litter composition as a whole. The PAC used to form the composite particles have particle sizes of about 40 μm to about 150 μm (0.04 mm to 100.15 mm).

iii. Powdered Fillers

The composite particles can optionally include a powdered filler material. Such a powdered filler is typically a non-absorbent material that is more readily available than 15 sodium bentonite clay and replaces a portion of the more expensive or scarce clay. Examples of filler materials include, but are not limited to inorganic, mineral materials such as limestone, dolomite, calcite, calcium carbonates, sand, shale, gravel, and slate. The powdered filler used to 20 form the composite particles have particle sizes of less than 40 mesh (0.4 mm) (400 µm). Powdered filler content is about 20% to about 50% by weight of the composite particles. b. Granular Sodium Bentonite

Granular sodium bentonite is characterized by larger 25 particle sizes than powdered sodium bentonite. Sodium bentonite clay is either (a) mined, crushed and sieved or (b) processed by methods known in the industry to achieve a suitable particle size (e.g., a 16/50 particle size distribution). Sodium bentonite expands when wet, absorbing as much as 30 several times its dry mass in water and known in the industry as a "swelling" clay. Sodium bentonite particles exhibit gel-like qualities when wet that promote clumping of the sodium bentonite particles when liquid (such as urine) is applied. Hence, its application in animal litters. The granular 35 sodium bentonite may be dry blended with the composite particles. Within such a blend, random and relatively consistent particle distribution of discrete particles of the two or more types exist throughout the mixture. The granular sodium bentonite particles are the same size as the compos-40 ite particles. Accordingly, the granular sodium bentonite has particle sizes ranging from about 300 µm (0.3 mm) to about 1180 µm (1.18 mm) (i.e., 16/50 mesh).

c. Dry Blends Including the Composite Particles

The composite particles could be dry blended with other 45 granular materials, such as granular sodium bentonite, to form the litter product in any desired weight ratio. By way of example, a blending ratio of composite particles to sodium bentonite may range from about 10:1 to about 1:10, from about 5:1 to about 1:5, from about 3:1 to about 1:3, or 50 from about 2:1 to about 1:2. In an embodiment, blending may be at about a 50/50 mix (i.e., 1:1 weight ratio). In another embodiment, blending may be at about a 30/70 mix (i.e., 1:3 weight ratio). In yet another embodiment, blending may be at about a 70/30 mix (i.e., 3:1 weight ratio). Stated 55 another way, blending of the granular material with the composite particles may be such that either component may be present from about 20% to about 80% by weight, from about 30% to about 70% by weight, from about 40% to about 60% by weight and from about 50% to 50% by weight. 60 d. Particle Size Distribution and Low Dusting Characteris-

A particle size distribution of 16/50 has been found to work particularly well, and inclusion of particles larger than 16 mesh (e.g., 8 to 14 mesh) may result in increased fines 65 generation as the larger particles are believed to rub against one another, generating fines (dust) through attrition. With-

8

out being bound by theory, it is theorized that by excluding such larger particles, less attrition occurs between the particles, and less dusty fines are present in the final product, e.g., after shipping to a retailer or consumer. Exclusion of the larger particle sizes may be at least partially responsible for the reduced dust generation exhibited by the present litter compositions, e.g., as compared to a litter having a particle size distribution of 12/40 or 8/40.

The same may be said for a slight change to the bottom end cut-off. For example, at least some of the benefits described herein may be obtained at a lower end cut-off of, for example, 50 mesh (300 μm), rather than 40 mesh (425 μm). That said, with such a lower cut-off, one would expect increased dust generation as compared to a 40 mesh cut-off. The fact that lower dusting is achieved by including smaller particles or fines is surprising. Smaller particles are lighter and more likely to become airborne, which contribute to dust generation.

In an embodiment, the litter composition may be free or substantially free of fine particles that would pass through a size 100 mesh (e.g., 0.150 mm or 150 µm sieve opening). For example, as manufactured, or after shipping to a retailer or consumer, the composition may not include more than about 10%, more than about 5%, more than about 4%, more than about 3%, more than about 2.5%, more than about 2%, more than about 1.5%, or more than about 1% of such fines. The presence of such fines can lead to increased dust and poor tracking characteristics. For example, such lightweight fines adhere to the cat's or other pet's fur when in the litter box, and are "tracked out" or carried out on the pet, as it leaves the litter box. Such adhered fines then fall off the pet, e.g., onto the floors, carpets, walls, furniture and the like surrounding the litter box. Such tracking is undesirable. In addition, such fines contribute to dust generation when pouring such a litter product. While some amount of fines smaller than the lower end cut-off (e.g., 50 mesh) may eventually form due to attrition of larger particles, the present litter products have been found to provide for excellent low dusting characteristics, even without inclusion of a de-dusting agent, such as PTFE, lignosulfonate or mineral oil.

By way of example, the litter product may generate no more than about 25 g, no more than about 20 g, no more than about 15 g, or no more than about 10 g of dust in a gravimetric dust measurement, with a 850 cc litter sample.

Mesh sizes and particle sizes will be familiar to those of skill in the art. Various mesh size characteristics are shown below in Table 1.

TABLE 1

Sieve Size (mm)	Opening (µm)	U.S. Standard Mesh Size
5.60	5600	3.5
4.75	4750	4
4.00	4000	5
3.35	3350	6
2.80	2800	7
2.36	2360	8
2.00	2000	10
1.70	1700	12
1.40	1400	14
1.18	1180	16
1.00	1000	18
0.85	850	20
0.71	710	25
0.60	600	30
0.50	500	35

Sieve Size (mm)	Opening (µm)	U.S. Standard Mesh Size	
0.425	425	40	
0.355	355	45	
0.300	300	50	
0.25	250	60	
0.212	212	70	
0.180	180	80	
0.15	150	100	
0.125	125	120	
0.105	105	140	
0.090	90	170	
0.075	75	200	

While particle size distributions of 8/40 or 12/40 have been routinely selected in the art, Applicant has found there are significant benefits associated with selecting 16/50, in terms of significantly reduced dust generation, and increased absorbency, so as to provide reduced clump depth, improved clump geometry (i.e., reduced clump width at the bottom of the clump), and overall more efficient use of the litter in clumping. These results are further enhanced when at least a portion of the litter is comprised of engineered, composite 25 particles.

e. Clumping Characteristics

By way of example, the litter product may exhibit a clump depth of no more than about 2 cm, no more than about 1.5 cm, no more than about 1.25 cm, or no more than about 1 30 cm (e.g., 0.5 cm to 1 cm) when dosed with 10 g of water.

By way of example, the litter product may exhibit a clump weight of no more than about 30 g, or no more than about 30 g, or no more than about 20 g (e.g., 20 to 30 g) when dosed with 10 g of water, including 35 the water weight. When including just the litter weight, the clump weight of litter in the clump may be no more than about 20 g, no more than about 15 g, or no more than about 10 g (e.g., 10 g to 20 g) when dosed with 10 g of water, excluding the water weight.

Stated another way, the present litter product may exhibit an absorbency that is higher than a comparable litter composition, having a standard particle size distribution (e.g., 8/40 mesh, or 12/40 mesh). For example, the litter product may exhibit an absorbency that is at least 30%, at least 40%, 45 at least 45%, at least 50%, at least 60%, at least 70%, at least 80%, at least 90%, or at least 100% higher than an otherwise comparable litter product having a 8/40 (or 12/40) mesh particle size distribution. A doubling of absorption corresponds to a reduction in clump weight of about 50%. The experimental results below show clump weight reductions of greater than 50%, such that it will be apparent that absorbency of the present litter composition can be increased 100% or more, as compared to litter compositions having more typical particle size distributions.

IV. Examples and Experimental Results

a. Gravimetric Dust Measurement

The gravimetric dust measurement test measures the 60 tendency of a litter product to generate dust during a consistent pouring from a specific height and duration. Two 850 cc samples of each litter product to be tested were weighed out. Filter paper of a standardized measurement (e.g., 9"x4") was provided, and its initial weight recorded. 65 The gravimetric dust measurement unit consists of an enclosure which is fitted with a drop funnel and slide gate

10

assembly used to drop the litter into a vessel in the enclosure. An external fan is used to pull air, with the dust from the enclosure though filter paper holder assembly. The filter paper was placed into the sample holder on the gravimetric dust measurement unit, and the litter product to be tested was poured into the cone at the top of the gravimetric dust measurement unit. The vacuum fan of the gravimetric dust unit was activated, and after 5 seconds, the lever under the cone was opened, allowing the litter in the cone to fall. The 10 vacuum was allowed to run for 30 seconds after the lever was opened (35 seconds total). After shutting off the vacuum fan, the sample holder was opened, and the filter paper removed. The filter paper including dust captured therein is reweighed. The difference between the initial weight and the final weight (in mg) is the amount of dust generated for the 850 cc sample.

Three different litter samples were tested, each with multiple repetitions. The results for the gravimetric dust measurement are shown in FIG. 1. The comparative example "control", had a size distribution of 8/40 and is a litter product comprised of composite particles, as described in Applicant's U.S. Pat. No. 10,383,308. The two litter products (Example 1 and Example 2) are exemplary of the present invention include a litter product comprised entirely (i.e., 100%) of composite particles, otherwise similar to the control, but with a 16/50 particle size distribution. This litter product is referred to as Example 1 in the Figures. As compared to the control, Example 1 included some additional smaller particles (those that would pass through a 40 mesh, but not a 50 mesh), as well as excluding some of the larger particles that were included in the control (those that would pass through an 8 mesh, but not a 16 mesh). The litter product of Example 2 had the same 16/50 particle size distribution as Example 1, but the composite particles had been blended at a 1:1 weight ratio with granular sodium bentonite, forming a salt/pepper blend of the granular sodium bentonite and the composite particles. Both the granular sodium bentonite and the composite particles have the same 16/50 particle size distribution. In other words, the blended litter product as a whole had a 16/50 particle size distribution. As shown in FIG. 1, both Examples 1 and 2 exhibit significantly improved dusting characteristics as compared to the comparative example "control", with Example 1 showing a dust reduction of 64%, and Example 2 showing a dust reduction of 88% as compared to the control. This is the case, even where the comparative example included a PTFE de-dusting agent, while neither of Examples 1 or 2 included any such de-dusting agent.

b. Clump Depth and Clump Weight Measurements

Three litter samples were tested, each with multiple reps. The results for the clump depth measurement are shown in FIG. 2. As in the gravimetric dust measurement, the comparative example "control", having a size distribution of 8/40 is a litter product comprised of composite particles, as 55 described in Applicant's U.S. Pat. No. 10,383,308. The same Example 1 and Example 2 litter products were tested as compared to the comparative example "control". To determine clump depth, the litter box was filled with the litter to be tested to a depth of 3-4 inches. The litter was leveled, so as to present a flat surface in the litter box. The litter being tested was dosed with 10 mL (10 g) of water using a pipette. Once the clumps solidified, they were removed from the litter box, and the depth of the clump was measured with a ruler. Each litter product tested included 6 reps. The weight of each clump was also determined, and recorded. The mass of litter in each clump was also determined, by subtracting out the 10 g of liquid dosed for each clump. As shown in

50

11

FIG. 2, both of Examples 1 and 2 exhibit significantly reduced clump depth values as compared to the comparative example "control", with Example 1 showing a clump depth reduction of 72%, and Example 2 showing a clump depth reduction of 78% compared to the control.

The weight of the clumps is shown in FIG. 3. Both of Examples 1 and 2 exhibit significantly reduced clump weight values as compared to the comparative example "control", with Example 1 showing a clump weight reduction of 48%, and Example 2 showing a clump weight reduction of 53%. For mass of litter in the clump (i.e., after subtracting out the 10 g of water used to form each clump), Example 1 showed a reduction in litter in the clump of 61%, while Example 2 showed a reduction in litter in the clump of 67%. Table 2 below shows a summary of the data for 15 dusting, clump depth, clump weight, and litter in the clump for Examples 1-2 as compared to the comparative example "control".

12 TABLE 4A

	Ex. 3-16/50	Comparative Commercially Available Litter Example - 8/40	% Improvement
Specific Absorbency (g urine/g litter)	0.66	0.34	91%
Gravimetric Dust (mg)	6.8	24	72%
Visual Dust Level	61	119	49%

For the absorbency test, a programmable peristaltic pump is used to dispense 35 mL (nominally 36 g) of synthetic cat urine on the litter. Prior to each test, the peristaltic pump is calibrated and the actual mass of dispensed urine is recorded. This may vary between about 35 and 40 g. The urine is allowed to absorb into the litter and the clump is allowed to strengthen such that it may be removed in one

TABLE 2

	Comparative Example "Control"-100% Composite Particles-8/40	Ex. 1-100% Composite Particles- 16/50	Ex. 1 Percent Reduction from Control	Ex. 2-50% Composite Particles- 16/50	Ex. 2 Percent Reduction from Control
Dust (mg)	31.7	11.5	64%	3.8	88%
Clump Depth (cm)	2.9	0.8	72%	0.7	78%
Clump Weight (g)	48.7	25.1	48%	22.8	53%
Litter in Clump (g)	38.7	15.1	61%	12.8	67%

Compositional characteristics of the tested litter products were as shown below in Table 3.

TABLE 3

	Comparative Example "Control"-100% Composite Particles-8/40	Ex. 1-100% Composite Particles- 16/50	Ex. 2-50% Composite Particles- 16/50
Limestone (%)	0-70	0-50 (40)	0-25 (20)
PAC (%)	<1	1.5-3 (3)	1.5-3 (3)
Sodium Bentonite (%)	30-98.5	47-98.5 (57)	72-98.5 (77)

The composite particles in Example 2 were substantially identical to those in Example 1. The difference in litter products being that in Example 2, those composite particles were mixed with granular sodium bentonite at a 1:1 weight ratio. In both Example 1 and Example 2, odor control of the 55 30-50% engineered composite particles, with the balance litter product was found to be comparable or improved, compared to the comparative example "control", and far superior to that of a litter product consisting of granular sodium bentonite.

By way of further example, absorbency using cat urine, gravimetric dust measurement, and a visual dust measurement were conducted for an additional exemplary litter composition (Example 3) having 16/50 particle size distribution, as compared to a conventional commercially available 8/40 particle size distribution litter product. The results are shown in Table 4A below.

piece. This absorption and strengthening typically takes between 3 and 5 seconds. The mass of the wet clump is then measured. The dry mass of litter used is calculated by 35 subtracting the known mass of urine dispensed. Further calculation may be then be conducted to calculate the specific absorbency of a litter defined as grams of urine absorbed per gram of litter. The gravimetric and visual dust measurements were conducted as described herein. The 40 compositional characteristics for Example 3 and the comparative example in Table 4A are shown below, in Table 4B.

TABLE 4B

	Ex. 3-16/50	Comparative Commercially Avilable Example-8/40
Sodium Bentonite (%)	95.38%	68.08%
Limestone (%)	0%	30%
PAC (%)	1.55%	0.25%
Dedusting Agent	2.55%	1.06%
Other	2%	0.5%

The Example 3 litter is comprised of approximately being granular sodium bentonite particles. The comparative example is comprised of approximately 15-25% engineered composite particles, with the balance including granular sodium bentonite particles. Even though Example 3 includes a de-dusting agent, other examples included herein illustrate that such is not required to still achieve significantly improved low dusting characteristics, as compared to conventional litter products.

The visual dust level was evaluated as follows. A high speed black and white camera was used to capture images of litter being dropped into a litter box. Image analysis was used to assess the level of dust in each frame. The litter was

riffle split to ensure representative sampling. Two 64 oz samples were portioned out by volume. Samples were loaded into an automated hopper above a light box. Once the measurement program was started, the hopper was opened, allowing litter to fall into the view of the camera below. The 5 camera recorded data for 60 seconds. The numerical result as reported in Table 4A was generated by taking the mean value of dust as measured by the brightness on a scale of 0 to 255 of each captured pixel in the output image. Litter dust is substantially lighter than the black background of the light 10 box, and it is possible to measure very small quantities of dust. The analysis frame is chosen manually such that it is the first frame in which a falling stream of litter is no longer captured by the camera. This represents a state of maximum airborne dust while removing measurement error from fall- 15 ing macroscopic litter particles.

Average particle size for the comparative control product (with a particle size distribution of 8/40) was 1009 p m (1.009 mm), while average particle size for example 3 (with a particle size distribution of 16/50) was 635 um, so that the 20 average particle size for example 3 (16/50) was 59% smaller than the 8/40 comparative example. As described herein, the significantly smaller average particle size of the present litter products provides significantly improved absorbency and significantly reduced dust levels.

FIG. 4 charts specific absorbency (in g of water per g of litter) for various subset particle size distributions, for 3 different litter configurations, specifically for 100% granular sodium bentonite, for 100% engineered composite particles, and for a blend of engineered composite particles and 30 granular sodium bentonite, such as in example 3 above. As shown in FIG. 4, absorbency increases with decreasing particle size. For example, the subset or "cut" of particles with a 16/20 particle size distribution have the lowest absorbency, while the subset or "cut" of particles with a 35 30/40 particle size distribution have the highest absorbency. The even smaller particles (e.g., subset or "cut" of particles with a 40/50 particle size distribution) would have even higher absorbency than the 30/40 subset or "cut".

The other interesting and surprising result shown in the 40 data of FIG. 4 is that the engineered composite particles, and blends including such composite particles, exhibit the highest absorbency. It is particularly interesting that the blend of composite particles and granular sodium bentonite exhibits the very highest absorbency (even higher than the 100% 45 engineered composite particles, with the same particle size distribution). There is a noticeable synergy exhibited in the results of FIG. 4, as one would expect the blend of composite and simple screened granular sodium bentonite particles to exhibit absorbency between that provided by these 50 two components, alone. FIG. 4 shows that this is not the case (particularly for the 20/30 and 30/40 particle size subsets), but that the blend exhibits absorbency that is higher than either component alone. Based on the data shown in FIG. 4, the 40/50 subset portion of the claimed 16/50 particle size 55 distribution would also be expected to exhibit synergistically elevated specific absorptivity.

FIG. 5 also shows results that were surprising to Applicant. In particular, FIG. 5 shows gravimetric dust measurements, for various subsets of the 16/50 particle size distri- 60 bution, for a blend of composite particles and granular sodium bentonite (e.g., the blend of Example 3). As shown in FIG. 5, less dust generation is provided by use of smaller particles. For example, the 16/20 particles (the largest parin a gravimetric dust measurement as described herein. As shown in FIG. 5, the 20/30 subset of particles generate less

14

dust (between 3 and 3.5 mg), even though such particles are smaller, and the 30/40 subset of particles only generate between 2 and 2.5 mg of dust. It is surprising that the smaller particles actually generate less dust than the larger particles. Table 5 below shows additional gravimetric dust measurement values for various particle size subsets, including some subsets that are larger than the 16 mesh minimum size of a 16/50 particle size distribution. It is readily apparent that the larger particle sizes result in significantly greater dust generation, which characteristic is surprising, as it was thought that the smaller particles would be responsible for relatively greater dust generation. The litter product that was the subject of the testing shown in Table 5 is for a litter product comprised of a blend of composite particles and granular sodium bentonite clay particles as described herein sprayed with a FTFE de-dusting agent (e.g., similar or identical to the composition of Example 3 as shown in Table 4B). The blend included 30-50% composite particles, with the other 50-70% being granular sodium bentonite clay particles. To reach the above particle size brackets or subsets, all litter went through a sieving process. Gravimetric dust testing was then conducted as described above. Bulk samples of 6/25 and 16/50 litter of substantially the same composition as Ex. 3 were screened using a Sweco vibratory separator. Each 25 subset of material e.g., 10/16 was mixed and riffle split to ensure homogeneity.

TABLE 5

Particle Size Subset	Gravimetric Dust (mg)	
6/10	11.1	
10/16	4.6	
16/20	4.0	
20/30	3.4	
30/40	2.3	

In order to better understand the dusting characteristics of the present litter products characterized by the 16/50 particle size distribution as compared to a conventional 8/40 particle size distribution, another gravimetric dust measurement was conducted, but in which both litter compositions were intentionally dosed with 2.5 wt % sodium bentonite clay dust particles (200 mesh, 75 µm), to see how such addition of dust fines would affect the gravimetric dust measurement. An initial baseline gravimetric dust measurement was first obtained (e.g., using the same methodology described herein), after which both litter products were dosed with the 2.5 wt % of 200 mesh (75 µm) dust particles. After thorough mixing of the dust dosage into the litter products, the litter products were retested for gravimetric dust. The results are shown in Table 6.

TABLE 6

	Comparative Commercially Available Example-8/40	Ex. 3-16/50
Initial Dust (mg)	29.5	6.5
Dust after Dosing	115.5	48.1
Change in Dust (mg)	86	41.6

As compared to the comparative example, Example 3 ticles in the 16/50 distribution) generate nearly 4 mg of dust 65 exhibited a 52% lower increase in measured gravimetric dust despite having the same amount of dust spiked into the product. While perhaps not completely understood, the use

of the smaller particle litter (16/50 distribution compared to 8/40 distribution) results in significantly better suppression of existing dust. While perhaps not completely understood, the use of the smaller particle litter (16/50 distribution compared to 8/40 distribution) results in significantly better suppression of existing dust. The use of such smaller particles is somehow able to act as a very effective de-dusting agent, without addition of traditional de-dusting agents, such as PTFE, lignosulfonate or mineral oils.

The clumping shape characteristics of the 8/40 comparative example and the 16/50 example 4 litter product were also evaluated. FIGS. 7A and 7B illustrate side views, or cross-sectional views of the shape of representative clumps, that form from both of such litter products. The 8/40 "control" litter product clump is shown in FIG. 7A, while the 15 16/50 litter product clump is shown in FIG. 7B. Each were dosed in a similar manner as described herein with a predetermined amount of liquid (e.g., 10 g or 20 g), and allowed to clump.

The clump shape difference between the two litter prod- 20 ucts is significant, where the clump of FIG. 7A exhibits a generally hockey puck type shape, with relatively consistent width to the clump, at the top, middle and bottom. The clump of FIG. 7B, on the other hand, is significantly different in shape, e.g., resembling an upside down hat, with 25 a wide "brim" at the top of the clump, and a significantly narrower width at a "dome" portion, at the bottom of the clump. This difference in shape is important, as there is a tendency with existing litter product clumps to strongly stick to the bottom of the litter box, when the clump forms as in 30 FIG. 7A, with the bottom of such a hockey puck shape in contact with the bottom of the litter box. Because the width and surface area associated with the bottom of such a clump is relatively high at the bottom of the clump, a strong bond forms between the bottom of such clump, and the bottom of 35 the litter box. On the other hand, a clump shape such as seen in FIG. 7B exhibits a significantly smaller width and surface area at its bottom "dome", which reduces the tendency of such a litter product to strongly bond to the bottom of the litter box. For example, even if the "dome" portion of the 40 clump contacts the bottom of the box, this contact surface area or contact width with the bottom of the litter box is significantly less, such that a far weaker bond results, allowing the clump to be broken free of the bottom of the box much easier, if such bonding occurs at all.

For clumps such as those seen in FIGS. 7A-7B, FIG. 6 charts clump width at the bottom of the clump (i.e., y axis minimum value), where sticking to the bottom of the litter box would occur. FIG. 6 also shows the maximum clump width, demonstrating how the present litter products with a 50 16/50 particle size distribution tend to form a clump shape that is narrower at the bottom, and wider at the top, rather than the typical hockey puck shape which exhibits similar width at the bottom (y axis minimum value) as at all other y axis locations throughout the clump. For example, FIG. 6 55 shows how the 16/50 litter product exhibits a width at the bottom of the clump (y axis minimum) of only 2.01 cm, while the bottom of the clump formed from the 8/40 litter product is far wider, e.g., 3.43 cm. Such equates to a width reduction of 41%. The surface area reduction will be even 60 greater, as surface area relates to the width as a squared function. In an embodiment, width at the bottom of the clump may be reduced by at least 20%, at least 25%, at least 30%, or at least 35%. Such narrower width to the clump bottom greatly reduces the tendency of the clumps to 65 strongly bond to the bottom of the litter box. Such measurements can be taken in a variety of ways (e.g., image capture,

16

followed by measurement of the relevant regions, use of calipers, etc.). The measurements reported in FIG. 6 were made on color plane extracted images using National Instruments Vision Assistant "Clamp Rake" tool for edge detection at maximum width, based on manually drawn regions of interest at the y-axis minimum and for the whole clump. The error bars in FIG. 6 are for a 90% confidence interval.

Many litter products add an oil (e.g., mineral oil or the like), in an effort to reduce formation of such clumps that would strongly bond to the bottom of the litter box. The present litter products are able to minimize or reduce such bonding to the bottom of the litter box without the need for any such oil or other bond weakening agents, by adjusting the particle size distribution of the litter particles as described herein (e.g., specifically by ensuring that the litter has a particle size distribution of 16/50, rather than 8/40).

By way of example, analysis of the bonding surface area at the bottom of clumps such as those shown in FIGS. 7A-7B, and analyzed in conjunction with FIG. 6, show an average surface area at the bottom of the clump of 184.4 mm² for an example such as that seen in FIG. 7B, for a litter composition having the present inventive particle size distribution of 16/50. By comparison, the comparative 8/40 litter composition (FIG. 7A) exhibited an average surface area at the bottom of the clump of 371.6 mm². Such differences represent about a 50% reduction in bonding surface area, which is very significant, as the inventive litter compositions have far less tendency to strongly bond to the bottom of the litter box during typical use, by comparison. In an embodiment, bonding surface area at the bottom of the clump may be reduced by at least 20%, at least 25%, at least 30%, at least 35%, at least 40%, or at least 45% as compared to a conventional 8/40 litter composition. Stated another way, with dosing and testing parameters similar to those used in conjunction with FIGS. 6 and 7A-7B, bonding surface area at the bottom of the present clumps may be no more than 325 mm², no more than 300 mm², no more than 250 mm², no more than 225 mm², or no more than 200 mm².

Without departing from the spirit and scope of the invention, one of ordinary skill can make various changes and modifications to the invention to adapt it to various usages and conditions. As such, these changes and modifications are properly and intended to be, within the full range of equivalence of the following claims.

The invention claimed is:

- 1. An animal litter comprising:
- composite particles including powdered sodium bentonite and powdered filler agglomerated together into the composite particles, wherein the powdered sodium bentonite included in the composite particles has a size of less than $400 \ \mu m$;
- wherein the animal litter ranges in size from about 300 μ m to about 1180 μ m (16/50 mesh);
- wherein the animal litter exhibits an absorbency that is at least 40% greater than an otherwise identical litter product having a particle size distribution of about 425 µm to about 2360 µm (8/40 mesh).
- 2. The animal litter of claim 1, wherein the animal litter further comprises granular sodium bentonite dry mixed with the composite particles, wherein both the granular sodium bentonite and the composite particles have a particle size distribution of 16/50 mesh.
- 3. The animal litter of claim 2, wherein composite particles comprise about 20% to about 80% by weight of the animal litter.

- **4.** The animal litter of claim **2**, wherein composite particles comprise about 30% to about 70% by weight of the animal litter
- 5. The animal litter of claim 1, wherein the powdered filler is an inorganic filler material.
- 6. The animal litter of claim 1, wherein the powdered filler comprises at least one of powdered activated carbon, limestone, dolomite, calcite, calcium carbonates, sand, shale, gravel, or slate.
- 7. The animal litter of claim 6, wherein the powdered filler 10 is present in an amount of greater than 1% by weight of the animal litter.
- **8**. The animal litter of claim **6**, wherein the powdered filler is present in an amount that is greater than 1% and no more than about 1.5% by weight of the animal litter.
- **9**. The animal litter of claim **6**, wherein the powdered filler is present in an amount that is greater than 1% and no more than about 5% by weight of the animal litter.
- 10. The animal litter of claim 1, wherein the animal litter exhibits low dusting characteristics of no more than about 20 mg as measured in a gravimetric dust measurement with an 850 cc animal litter sample, while being void of de-dusting agents.
- 11. The animal litter of claim 1, wherein the animal litter exhibits a clump depth of no more than about 2 cm upon 25 dosing with 10 g of water or urine.
- 12. The animal litter of claim 1, wherein the animal litter exhibits a clump depth of no more than about 1.5 cm upon dosing with 10 g of water or urine.
- 13. The animal litter of claim 1, wherein the animal litter 30 exhibits a clump depth of from about 0.5 cm to about 1 cm upon dosing with 10 g of water or urine.
- **14**. The animal litter of claim **1**, wherein the animal litter exhibits a clump weight of no more than about 30 g upon dosing with 10 g of water or urine.
- 15. The animal litter of claim 1, wherein the animal litter exhibits a clump weight of no more than about 25 g upon dosing with 10 g of water or urine.
- **16.** The animal litter of claim **1**, wherein the animal litter exhibits a clump weight of from about 20 g to about 30 g 40 upon dosing with about 10 g of water or urine.
- 17. The animal litter of claim 1, wherein the powdered filler included in the composite particles has a size of less than $400 \mu m$.
- **18**. The animal litter of claim 1, wherein the powdered 45 filler comprises powdered activated carbon, wherein the powdered activated carbon included in the composite particles has a size of no more than about 150 µm.

18

- 19. The animal litter of claim 1, wherein the composite particles do not include a core and shell structure, but a substantially homogenous distribution of the powdered sodium bentonite and powdered filler.
 - 20. An animal litter comprising:
 - a blend of granular clay material and composite particles; wherein the composite particles include powdered sodium bentonite and powdered filler agglomerated together into the composite particles, wherein the powdered sodium bentonite included in the composite particles has a size of less than 400 µm;
 - wherein the animal litter ranges in size from about 300 μ m to about 1180 μ m (16 to 50 mesh);
 - wherein the composite particles are present in the blend in an amount of about 20% to about 50% by weight and the granular clay material is present in an amount of about 50% to about 80% by weight of the blend;
 - wherein the blend exhibits an absorbency that is at least 40% greater than an otherwise identical litter product having a particle size distribution of about 425 μm to about 2360 μm (8/40 mesh).
- 21. The animal litter of claim 20, wherein the granular clay material comprises granular sodium bentonite.
- 22. The animal litter of claim 20, wherein the powdered filler comprises at least one of powdered activated carbon, limestone, dolomite, calcite, calcium carbonates, sand, shale, gravel, or slate.
- 23. The animal litter of claim 22, wherein the powdered filler is present in an amount of greater than 1% by weight of the animal litter.
 - 24. An animal litter comprising:
 - composite particles including powdered sodium bentonite and powdered filler agglomerated together into the composite particles, wherein the powdered filler comprises at least one of powdered activated carbon, limestone, dolomite, calcite, calcium carbonates, sand, shale, gravel, or slate, wherein the powdered filler is present in an amount that is greater than 1% and no more than about 5% by weight of the animal litter;
 - wherein the animal litter ranges in size from about 300 μ m to about 1180 μ m (16/50 mesh);
 - wherein the animal litter exhibits an absorbency that is at least 40% greater than an otherwise identical litter product having a particle size distribution of about 425 µm to about 2360 µm (8/40 mesh).

* * * * *