



US012390041B2

(12) **United States Patent**  
**Rivera**

(10) **Patent No.:** **US 12,390,041 B2**

(45) **Date of Patent:** **\*Aug. 19, 2025**

(54) **BREWING MATERIAL LID AND  
CONTAINER FOR A BEVERAGE BREWER**

(71) Applicant: **Adrian Rivera Maynez Enterprises,  
Inc.**, Whittier, CA (US)

(72) Inventor: **Adrian Rivera**, Whittier, CA (US)

(73) Assignee: **Adrian Rivera Maynez Enterprises,  
Inc.**, La Mirada, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-  
claimer.

(21) Appl. No.: **18/372,910**

(22) Filed: **Sep. 26, 2023**

(65) **Prior Publication Data**

US 2024/0389782 A1 Nov. 28, 2024

**Related U.S. Application Data**

(63) Continuation of application No. 18/202,810, filed on  
May 26, 2023, now Pat. No. 11,805,934.

(51) **Int. Cl.**  
**A47J 31/06** (2006.01)  
**B65D 85/804** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **A47J 31/0668** (2013.01); **A47J 31/0689**  
(2013.01); **B65D 85/8046** (2013.01); **B65D**  
**85/8049** (2020.05)

(58) **Field of Classification Search**  
CPC ..... A47J 31/0668; A47J 31/0689; B65D  
85/8049; B65D 85/8046  
USPC ..... 99/295  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

1,377,316 A	5/1921	Clermont
2,234,397 A	3/1941	Bentz
2,242,684 A	5/1941	Stuart
2,407,118 A	9/1946	Waters

(Continued)

**FOREIGN PATENT DOCUMENTS**

CN	2615077 Y	5/2004
DE	102011012860 A1	12/2012

(Continued)

**OTHER PUBLICATIONS**

Keurig® My K-Cup® Reusable Coffee Filter, <https://www.keurig.com/My-K-Cup%C2%AE-Reusable-Coffee-Filter/p/My-K-Cup-Universal-Reusable-Coffee-Filter#>.

(Continued)


*Primary Examiner* — Jimmy Chou

(74) *Attorney, Agent, or Firm* — IP Strategies

(57) **ABSTRACT**

A brewing material container for a beverage brewer includes a receptacle and a lid. The receptacle is configured to receive and hold beverage brewing material and to be placed in a brewing chamber of the beverage brewer, and includes a base, and a sidewall extending from the base and terminating in an open end. The lid is configured to engage with the open end of the sidewall to at least partially cover the open end. The lid includes a number of lid openings configured to receive a corresponding respective number of injection nozzles of the beverage brewer. The receptacle base and/or the receptacle sidewall includes a receptacle opening configured to allow fluid flow from an interior of the receptacle to an exterior of the receptacle.

**30 Claims, 24 Drawing Sheets**

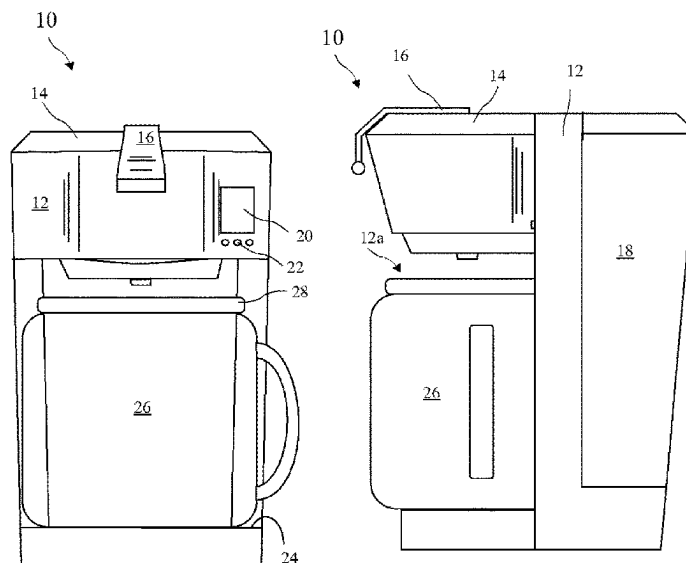

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

2,433,815	A	12/1947	Laforge	5,335,589	A	8/1994	Yerves, Jr. et al.
2,443,520	A	6/1948	Schwartz et al.	5,343,799	A	9/1994	Fond
2,546,874	A	3/1951	Siegrist	5,347,916	A	9/1994	Fond et al.
3,022,411	A	2/1962	Soper et al.	5,363,745	A	11/1994	Lin
3,115,822	A	12/1963	Totten	5,398,596	A	3/1995	Fond
3,120,170	A	2/1964	Garte	5,401,328	A	3/1995	Schmitz
3,136,241	A	6/1964	Price	5,403,605	A	4/1995	Smith et al.
3,199,682	A	8/1965	Scholtz	5,406,882	A	4/1995	Shaanan
3,224,360	A	12/1965	Wickenberg et al.	5,463,932	A	11/1995	Olson
3,316,388	A	4/1967	Wickenberg et al.	5,490,448	A	2/1996	Weller et al.
3,336,857	A	8/1967	Knodt et al.	5,526,733	A	6/1996	Klawuhn et al.
3,384,004	A	5/1968	Perlman et al.	5,531,152	A	7/1996	Gardosi
3,403,617	A	10/1968	Lampe	5,562,941	A	10/1996	Levy
3,405,630	A	10/1968	Weber, III	5,582,730	A	12/1996	Hugentobler
3,583,308	A	6/1971	Williams	5,582,731	A	12/1996	Gianfranco
3,592,126	A	7/1971	Dombrowik	5,635,233	A	6/1997	Levinson
3,607,297	A	9/1971	Fasano	5,636,563	A	6/1997	Oppermann et al.
3,695,168	A	10/1972	Van Brunt	5,649,412	A	7/1997	Binacchi
3,713,377	A	1/1973	Arnett et al.	5,669,287	A	9/1997	Jefferson, Jr. et al.
3,757,670	A	9/1973	Laama et al.	5,676,041	A	10/1997	Glucksman et al.
3,844,206	A	10/1974	Weber	5,775,206	A	7/1998	St-Gelais
3,948,157	A	4/1976	Layre	5,829,340	A	11/1998	Yang
3,958,502	A	5/1976	Vitous	5,840,189	A	11/1998	Sylvan et al.
4,052,318	A	10/1977	Krebs	5,865,094	A	2/1999	Kealy
4,086,848	A	5/1978	Hahn	5,870,943	A	2/1999	Levi et al.
4,143,590	A	3/1979	Kasakoff	5,887,510	A	3/1999	Porter
4,152,464	A	5/1979	Brody et al.	D407,602	S	4/1999	Patel
4,164,644	A	8/1979	Remsnyder et al.	5,895,672	A	4/1999	Cooper
D255,313	S	6/1980	Elkerbout	5,897,899	A	4/1999	Fond
4,221,670	A	9/1980	Ziemek	5,910,205	A	6/1999	Patel
4,253,385	A	3/1981	Illy	5,913,964	A	6/1999	Melton
4,286,515	A	9/1981	Baumann et al.	5,924,563	A	7/1999	Salysers
4,510,853	A	4/1985	Takagi	5,931,329	A	8/1999	Wu
4,550,024	A	10/1985	le Granse	5,932,260	A	8/1999	Soughan
4,603,621	A	8/1986	Roberts	6,065,609	A	5/2000	Lake
4,653,390	A	3/1987	Hayes	6,079,315	A	6/2000	Beaulieu et al.
4,656,932	A	4/1987	Kopp	D431,423	S	10/2000	Ohm et al.
4,676,396	A	6/1987	Mamolou	6,136,352	A	10/2000	Silverstein et al.
4,703,687	A	11/1987	Wei	6,138,551	A	10/2000	Bauer et al.
4,704,954	A	11/1987	Mollenhoff	6,189,438	B1	2/2001	Bielfeldt et al.
4,706,555	A	11/1987	Nakamura et al.	6,202,542	B1	3/2001	Melton
4,721,835	A	1/1988	Welker	RE37,173	E	5/2001	Jefferson, Jr. et al.
4,735,719	A	4/1988	Benedict	6,227,102	B1	5/2001	Sham et al.
4,739,697	A	4/1988	Roberts	6,231,909	B1	5/2001	Levinson
4,800,089	A	1/1989	Scott	6,250,209	B1	6/2001	Pope
4,832,845	A	5/1989	Hendretti	6,253,662	B1	7/2001	Zelson
4,833,979	A	5/1989	Garulli et al.	6,263,781	B1	7/2001	Calagui
4,836,592	A	6/1989	Roberts	6,273,293	B1	8/2001	Carlson
4,848,815	A	7/1989	Molloy	D454,433	S	3/2002	Peter
4,858,523	A	8/1989	Helbling	6,440,256	B1	8/2002	Gordon et al.
4,865,737	A	9/1989	McMichael	6,499,388	B2	12/2002	Schmed
4,882,982	A	11/1989	Muttoni	D474,110	S	5/2003	Sweeney
4,957,217	A	9/1990	Ritson	D474,111	S	5/2003	Lazaris
4,967,648	A	11/1990	Helbling	6,589,577	B2	7/2003	Lazaris et al.
4,986,172	A	1/1991	Hunnicut, Jr.	6,606,938	B2	8/2003	Taylor
4,995,310	A	2/1991	van der Lijn et al.	6,607,762	B2	8/2003	Lazaris et al.
4,998,463	A	3/1991	Precht et al.	6,645,537	B2	11/2003	Sweeney et al.
5,000,082	A	3/1991	Lassota	6,655,260	B2	12/2003	Lazaris et al.
5,012,059	A	4/1991	Boatman	6,658,989	B2	12/2003	Sweeney et al.
5,012,629	A	5/1991	Rehman et al.	6,662,955	B1	12/2003	Lassota
5,028,328	A	7/1991	Long	6,688,490	B2	2/2004	Carlson
5,046,409	A	9/1991	Henn	6,708,600	B2	3/2004	Winkler et al.
5,072,660	A	12/1991	Helbling	6,727,484	B2	4/2004	Policappelli
5,097,984	A	3/1992	Meisner et al.	6,740,345	B2	5/2004	Cai
5,120,439	A	6/1992	McFarlin	6,758,130	B2	7/2004	Sargent et al.
5,123,335	A	6/1992	Aselu	6,777,007	B2	8/2004	Cai
5,171,457	A	12/1992	Acuff et al.	6,786,136	B2	9/2004	Cirigliano et al.
5,190,653	A	3/1993	Herrick et al.	6,832,542	B2	12/2004	Hu et al.
5,197,374	A	3/1993	Fond	6,843,165	B2	1/2005	Stoner
5,233,914	A	8/1993	English	D502,362	S	3/2005	Lazaris et al.
5,242,702	A	9/1993	Fond	6,904,840	B1	6/2005	Pfeifer et al.
5,265,517	A	11/1993	Gilbert	6,948,420	B2	9/2005	Kirschner et al.
5,287,797	A	2/1994	Grykiewicz et al.	6,968,775	B2	11/2005	Burrows et al.
5,298,267	A	3/1994	Gruenbacher	7,047,870	B2	5/2006	Gantt et al.
5,325,765	A	7/1994	Sylvan et al.	7,081,263	B2	7/2006	Albrecht
				7,131,369	B2	11/2006	Gantt et al.
				7,165,488	B2	1/2007	Bragg et al.
				7,318,374	B2	1/2008	Guerrero
				7,320,274	B2	1/2008	Castellani

(56)

## References Cited

## U.S. PATENT DOCUMENTS

D567,021	S	4/2008	Bach et al.	2006/0230944	A1	10/2006	Neace et al.
7,377,089	B2	5/2008	Rapparini	2006/0236871	A1	10/2006	Ternite et al.
7,387,063	B2	6/2008	Vu et al.	2006/0254428	A1	11/2006	Glucksman et al.
7,461,587	B2	12/2008	Guerrero	2007/0148290	A1	6/2007	Ternite et al.
7,703,381	B2	4/2010	Liverani et al.	2007/0151460	A1	7/2007	Beck
7,730,829	B2	6/2010	Hammad	2007/0175334	A1	8/2007	Halliday et al.
7,836,819	B2	11/2010	Suggi Liverani et al.	2007/0186784	A1	8/2007	Liverani et al.
7,946,217	B2	5/2011	Favre et al.	2007/0277677	A1	12/2007	Roberg
8,047,127	B2	11/2011	Lin	2009/0057332	A1	3/2009	Arzola
8,087,347	B2	1/2012	Halliday et al.	2009/0229470	A1	9/2009	Dorfmueller
8,221,813	B2	7/2012	Boul	2009/0229471	A1	9/2009	Lun et al.
8,327,754	B2	12/2012	Kirschner et al.	2010/0047419	A1	2/2010	Boul
D677,120	S	3/2013	DeMiglio et al.	2010/0083843	A1	4/2010	Denisart et al.
D688,095	S	8/2013	DeMiglio et al.	2010/0288131	A1	11/2010	Kilber et al.
8,561,524	B2 *	10/2013	DeMiglio ..... A47J 31/0689	2010/0303964	A1	12/2010	Beaulieu et al.
			99/305	2011/0073607	A1	3/2011	Fu et al.
D694,579	S	12/2013	Khubani	2011/0209623	A1	9/2011	Leung et al.
8,707,855	B2 *	4/2014	DeMiglio ..... A47J 31/0689	2011/0274802	A1	11/2011	Rivera
			99/279	2012/0058226	A1	3/2012	Winkler et al.
8,720,320	B1	5/2014	Rivera	2012/0097602	A1	4/2012	Tedford
9,023,412	B2	5/2015	Doleac et al.	2012/0118880	A1	5/2012	Wnek
9,149,149	B2	10/2015	Oh	2012/0148709	A1	6/2012	Kamerbeek et al.
9,232,871	B2	1/2016	Rivera	2012/0207895	A1	8/2012	Rivera
9,232,872	B2	1/2016	Rivera	2012/0207896	A1	8/2012	Rivera
9,271,597	B2	3/2016	Rivera	2012/0258210	A1	10/2012	Wong et al.
9,402,501	B1 *	8/2016	Vu ..... A47J 31/407	2012/0276264	A1	11/2012	Rivera
9,795,243	B2	10/2017	Rivera	2012/0285330	A1 *	11/2012	Demiglio ..... A47J 31/0689
9,844,292	B2	12/2017	Rivera				99/279
9,907,425	B2	3/2018	Rivera	2012/0285334	A1	11/2012	Demiglio et al.
10,071,851	B2	9/2018	Vu	2012/0308688	A1	12/2012	Peterson et al.
10,154,751	B2	12/2018	DeMiglio et al.	2012/0321748	A1	12/2012	Otto et al.
10,252,854	B2	4/2019	Vu	2012/0328739	A1	12/2012	Nocera
10,336,531	B2	7/2019	Trombetta et al.	2013/0017303	A1	1/2013	Vu
10,450,130	B2	10/2019	Hansen	2013/0025466	A1	1/2013	Fu et al.
10,450,131	B2	10/2019	Norton et al.	2013/0055903	A1	3/2013	Deuber
D927,250	S	8/2021	Kruger et al.	2013/0095212	A1	4/2013	Beer
11,534,017	B2	12/2022	DeMiglio et al.	2013/0156897	A1	6/2013	Goldstein
2001/0043954	A1	11/2001	Sweet	2013/0340626	A1	12/2013	Oh
2002/0005367	A1	1/2002	Zelson	2014/0004231	A1	1/2014	Norton et al.
2002/0023543	A1	2/2002	Schmed	2014/0008368	A1	1/2014	Severini
2002/0035929	A1	3/2002	Kanba et al.	2014/0124435	A1	5/2014	Jackson
2002/0048621	A1	4/2002	Boyd et al.	2014/0141128	A1	5/2014	Trombetta et al.
2002/0059870	A1	5/2002	Walters, Jr. et al.	2014/0245893	A1	9/2014	Vu
2002/0078831	A1	6/2002	Cai	2014/0245895	A1 *	9/2014	DeMiglio ..... A47J 31/0689
2002/0144604	A1	10/2002	Winkler et al.				99/323
2002/0148356	A1	10/2002	Lazaris et al.	2014/0287105	A1	9/2014	Husband et al.
2002/0148358	A1	10/2002	Sweeney et al.	2015/0050391	A1	2/2015	Rapparini
2003/0006185	A1	1/2003	Hepler	2015/0068404	A1 *	3/2015	Rivera ..... A47J 31/4492
2003/0041739	A1	3/2003	Cai				99/323
2003/0167928	A1	9/2003	Mulle et al.	2015/0173555	A1	6/2015	Sumiyoshi et al.
2003/0200872	A1	10/2003	Lin	2015/0175347	A1	6/2015	Empl
2003/0213370	A1	11/2003	Hammad et al.	2016/0016727	A1	1/2016	Katz
2003/0222089	A1	12/2003	Hale	2016/0029833	A1	2/2016	Lin
2003/0226449	A1	12/2003	Carasso et al.	2016/0068336	A1	3/2016	Biesheuvel et al.
2004/0005384	A1	1/2004	Cai	2016/0157660	A1	6/2016	Rivera
2004/0020368	A1	2/2004	Cai	2016/0206133	A1	7/2016	Rivera
2004/0020922	A1	2/2004	Alves	2016/0311608	A1	10/2016	Accursi
2004/0045443	A1	3/2004	Lazaris et al.	2017/0036854	A1	2/2017	Doglioni Majer
2004/0118290	A1	6/2004	Cai	2017/0158422	A1	6/2017	Andreae et al.
2004/0182247	A1	9/2004	Guerrero	2017/0251861	A1 *	9/2017	DeMiglio ..... A23F 5/262
2004/0244600	A1	12/2004	Lalanne-Eygun	2017/0258260	A1	9/2017	Hsu
2005/0051478	A1	3/2005	Karanikos et al.	2018/0116444	A1	5/2018	Rivera
2005/0115415	A1	6/2005	Arrick	2018/0162634	A1	6/2018	De Ruvo
2005/0160918	A1	7/2005	Winstanley et al.	2018/0290821	A1 *	10/2018	Domenighini ..... A47J 31/0689
2005/0172819	A1	8/2005	Chen et al.	2019/0000262	A1 *	1/2019	Vu ..... A47J 31/407
2005/0223904	A1	10/2005	Laigneau et al.	2020/0245805	A1	8/2020	DeMiglio et al.
2005/0236323	A1	10/2005	Oliver et al.	2021/0127889	A1 *	5/2021	Sasena ..... A47J 31/0689
2005/0257695	A1	11/2005	Dobranski et al.				
2005/0266122	A1	12/2005	Franceschi				
2005/0284303	A1	12/2005	Zell et al.				
2006/0019000	A1	1/2006	Zanetti				
2006/0107841	A1	5/2006	Schifferle				
2006/0159815	A1	7/2006	Crook et al.				
2006/0174769	A1	8/2006	Favre et al.				
2006/0196364	A1	9/2006	Kirschner				

## FOREIGN PATENT DOCUMENTS

EP	1183195	A1	3/2002
EP	1364605	B1	11/2005
EP	1837294	B1	7/2008
EP	2580145	B1	5/2015
KR	100535744	B1	1/2006
NZ	248659	A	12/1994
WO	2005/092160	A1	10/2005

(56)

**References Cited**

## FOREIGN PATENT DOCUMENTS



WO	2008125256	A1	10/2008
WO	2009011982	A1	1/2009
WO	2010094026	A1	8/2010

## OTHER PUBLICATIONS


My-Kap lid for K-Cup, [https://www.amazon.com/My-Kap-Kaps-K-Cups-Brush-2-45-Ounce/dp/B0076I4OGK/ref=cm\\_cr\\_ar\\_p\\_d\\_product\\_top?ie=UTF8](https://www.amazon.com/My-Kap-Kaps-K-Cups-Brush-2-45-Ounce/dp/B0076I4OGK/ref=cm_cr_ar_p_d_product_top?ie=UTF8).

Perfect Pod EZ-Cup, <https://www.perfectpod.com/products/ez-cup-2>.



\* cited by examiner

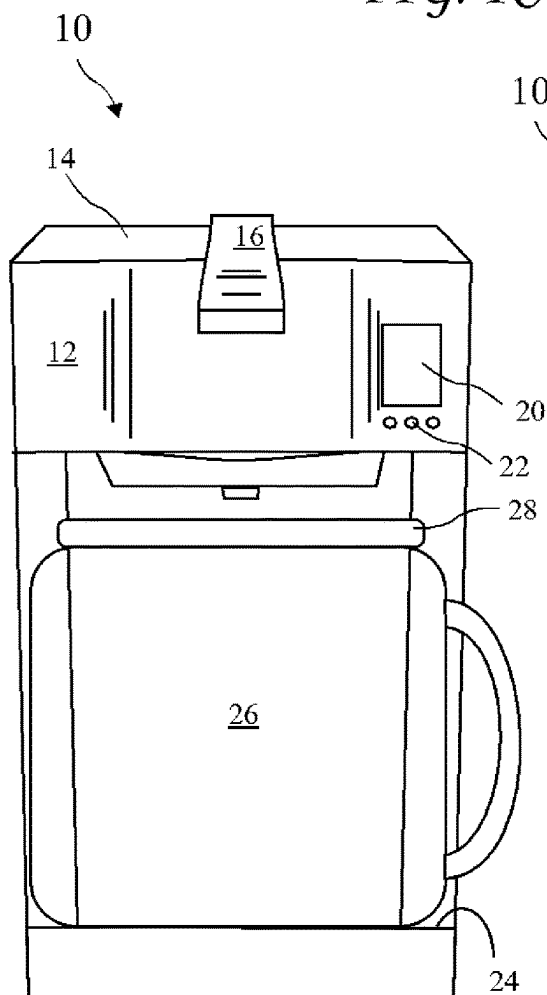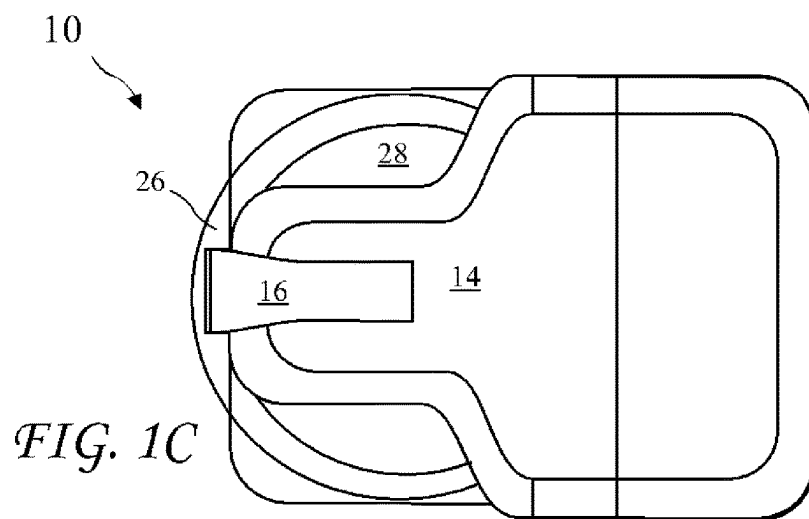

*FIG. 1A*

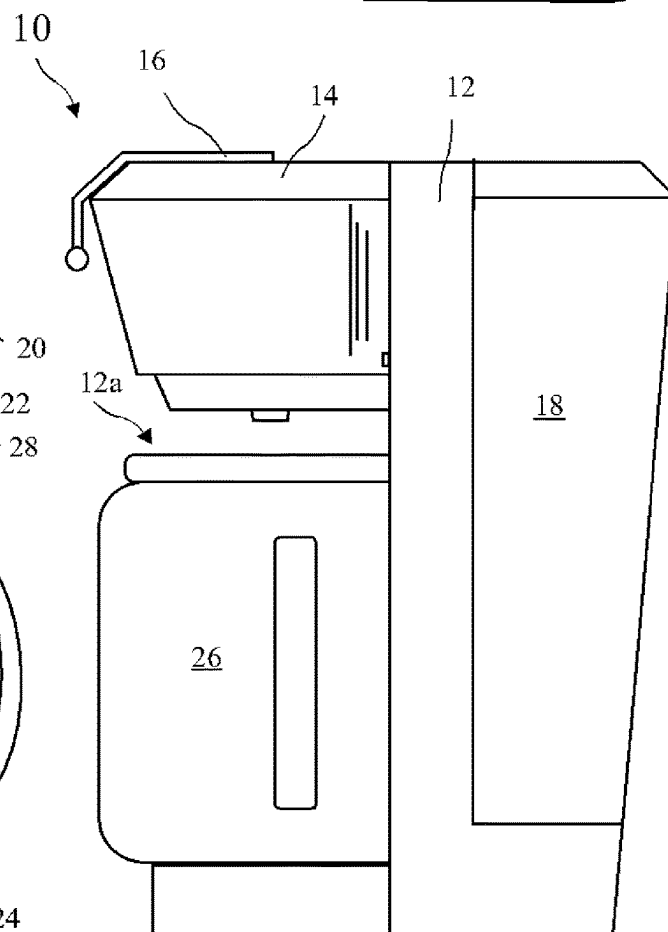

*FIG. 1B*

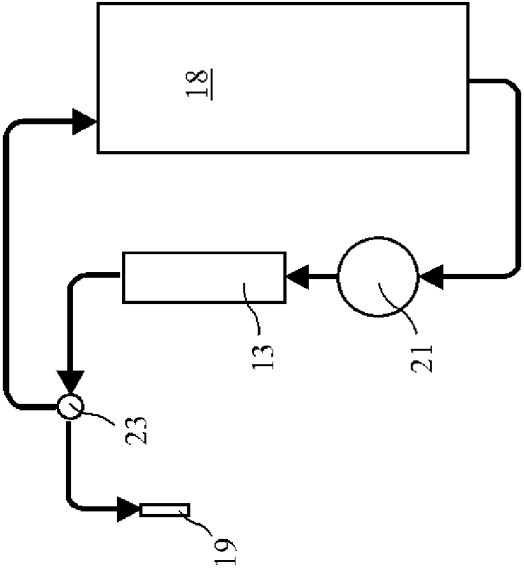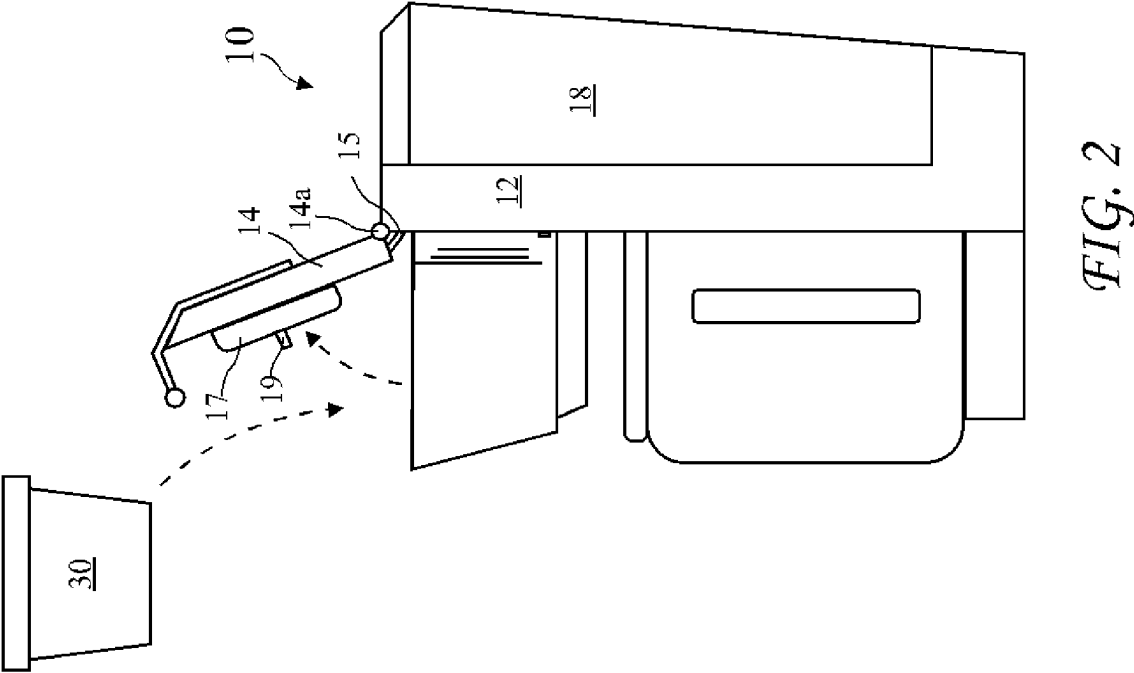

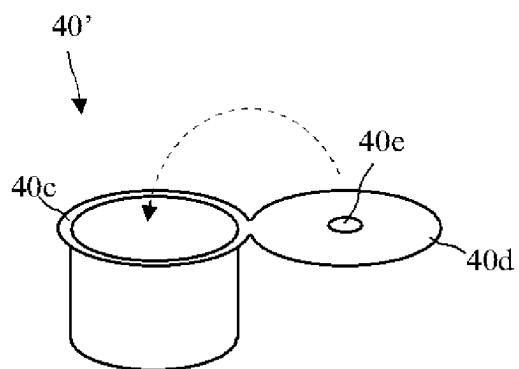


FIG. 4




FIG. 5B

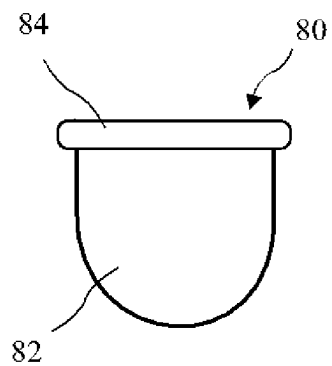


FIG. 5A




FIG. 6A




FIG. 6B




FIG. 6C




FIG. 7

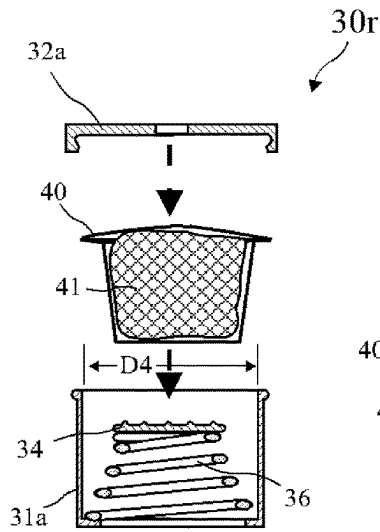


FIG. 8A

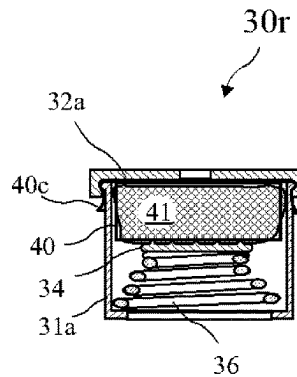


FIG. 8B

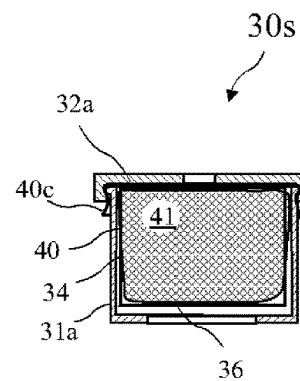


FIG. 9



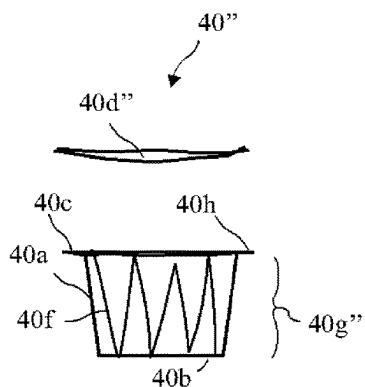


FIG. 10A

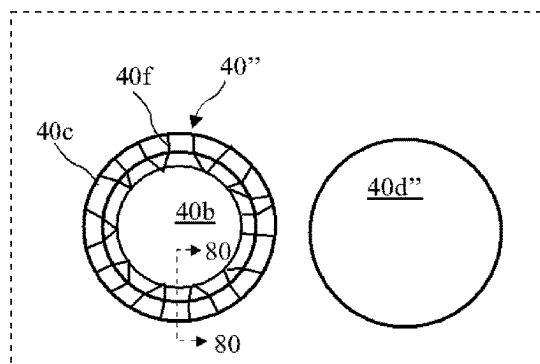


FIG. 10B

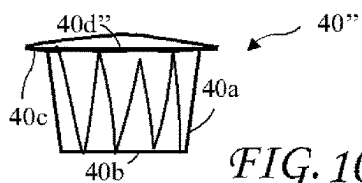


FIG. 10C

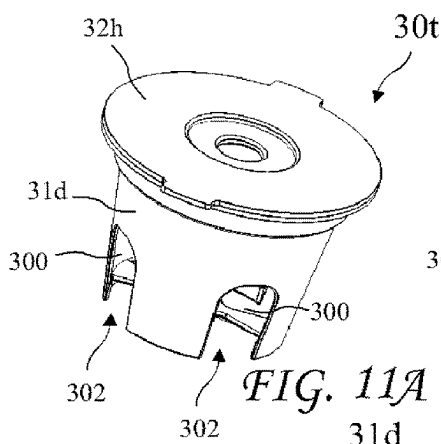


FIG. 11A

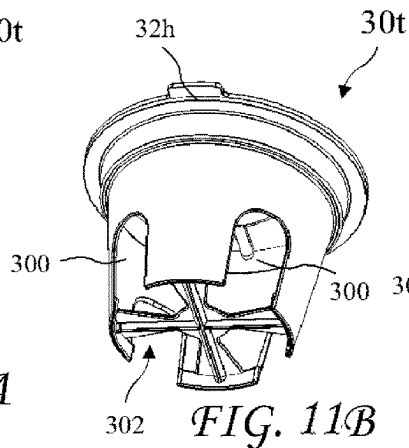


FIG. 11B

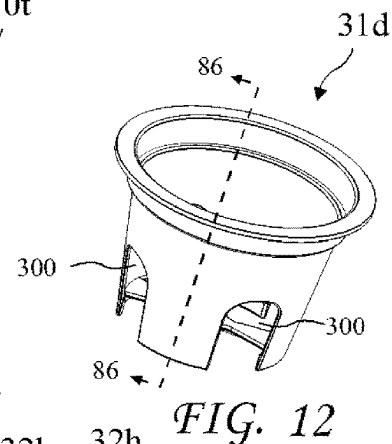


FIG. 12

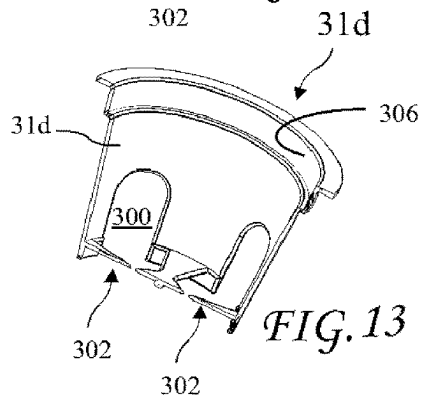


FIG. 13

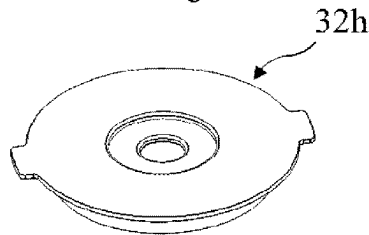


FIG. 14A


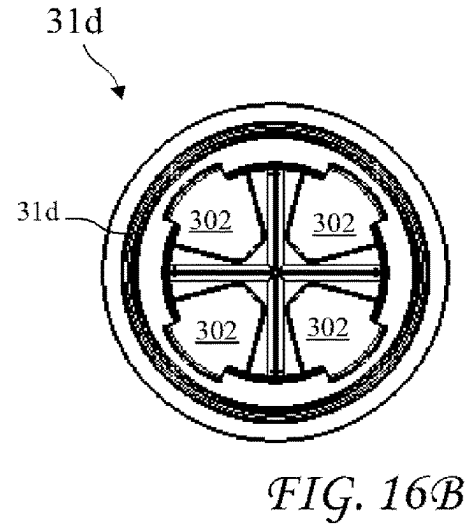
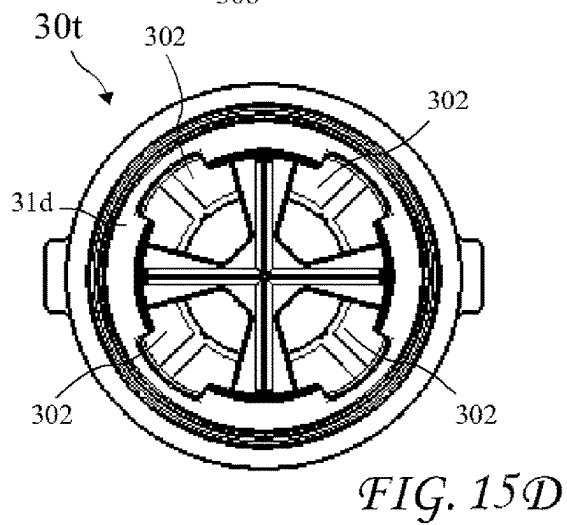
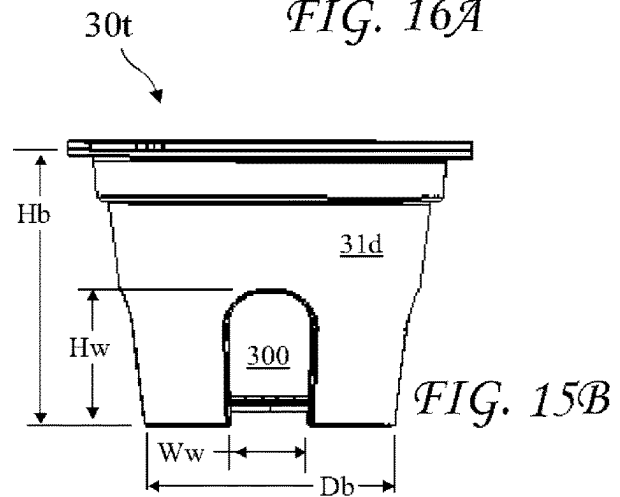
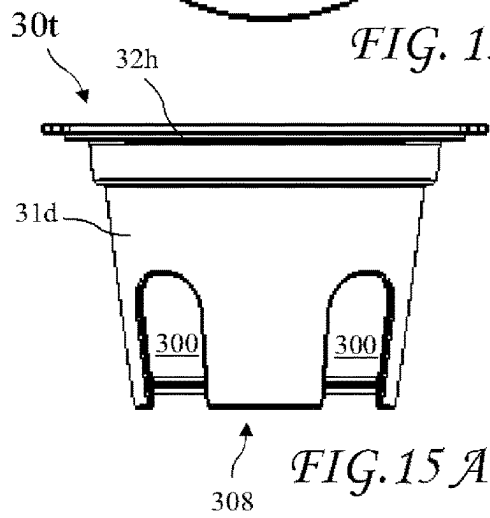
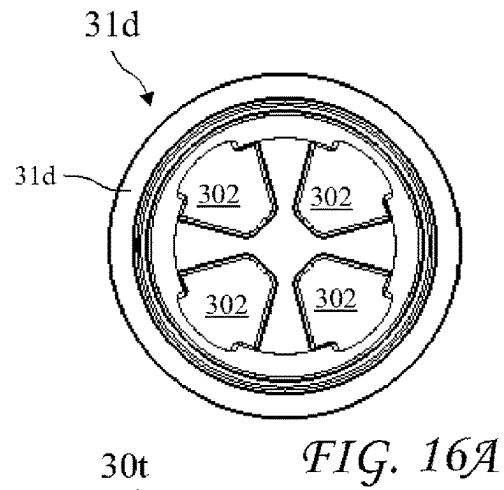
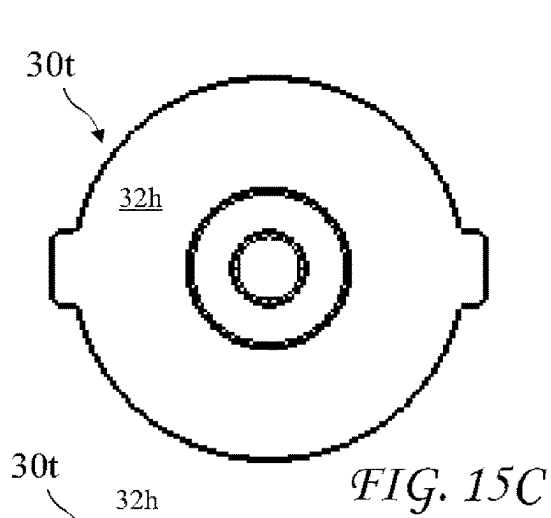


FIG. 14B



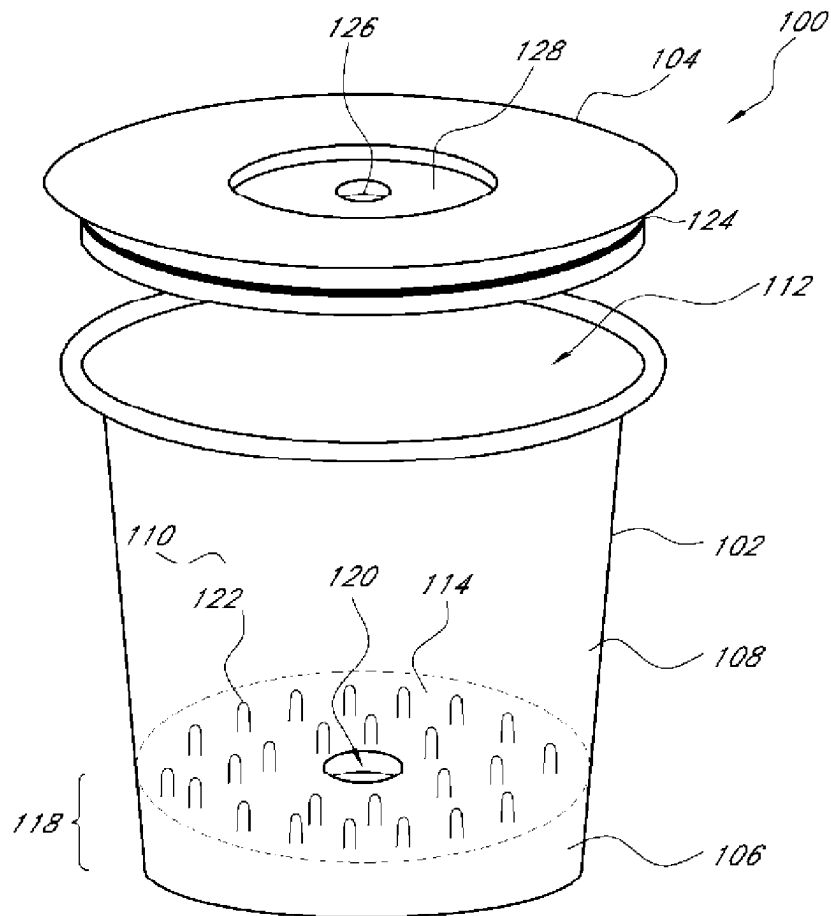


FIG. 17A

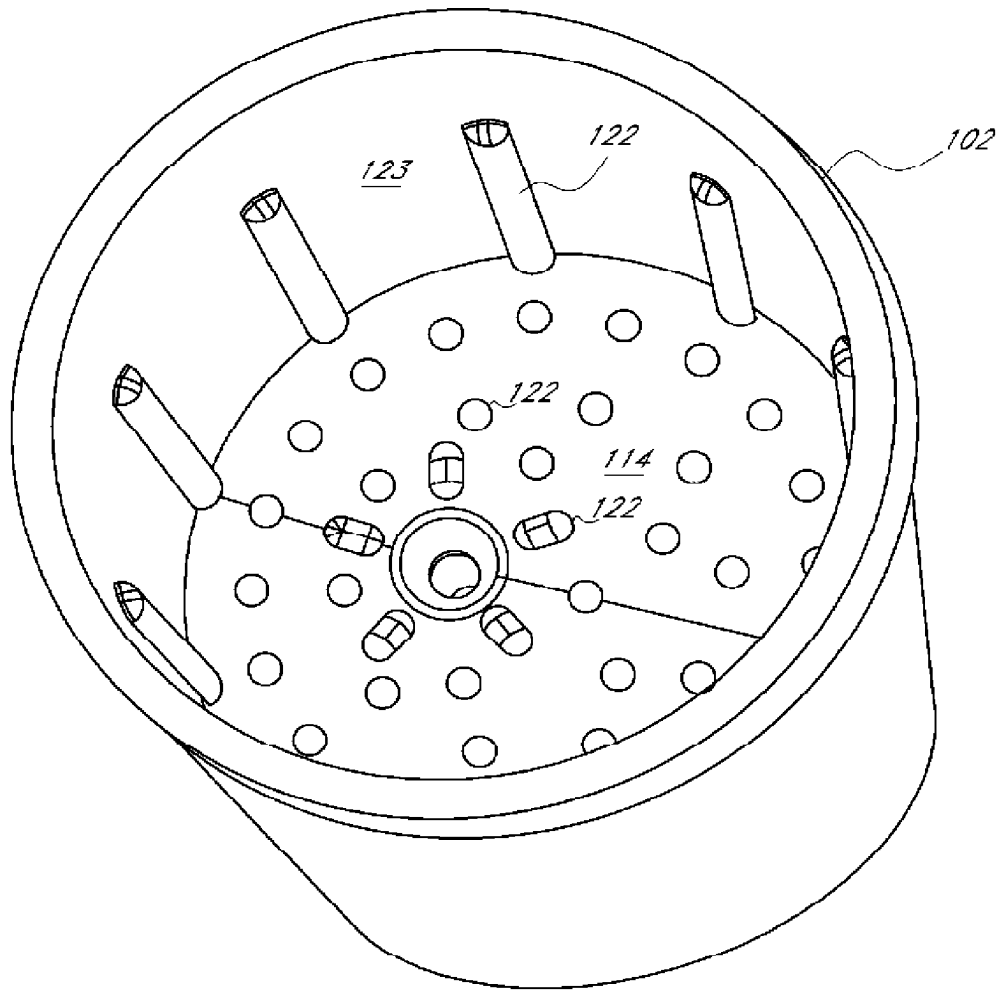


FIG. 17B

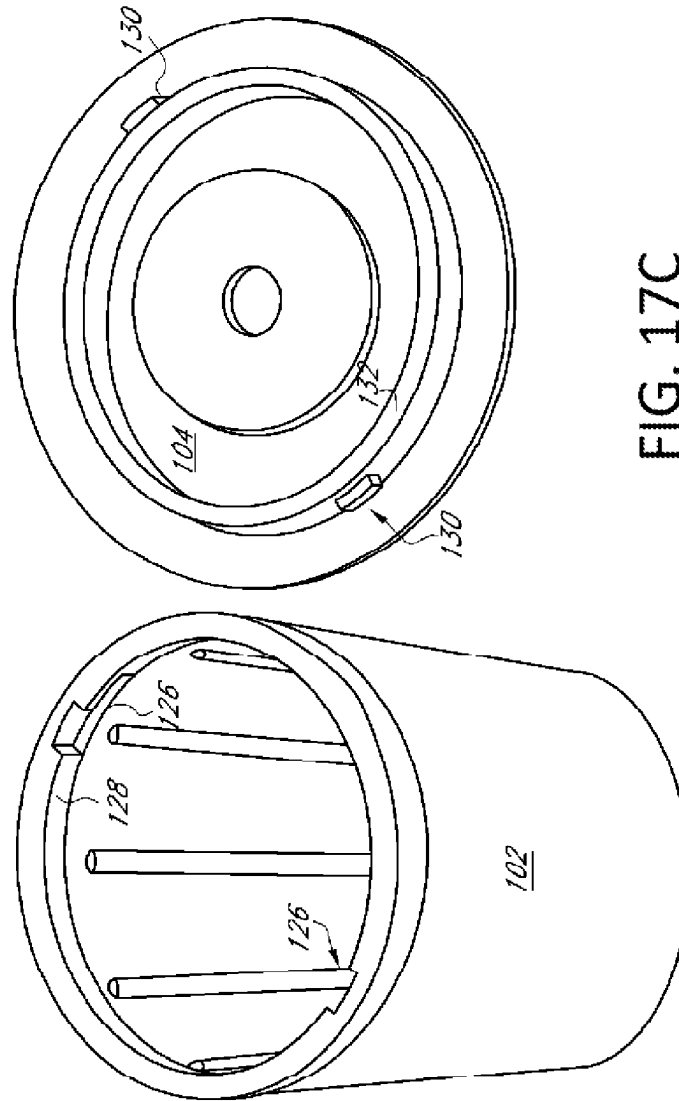


FIG. 17C

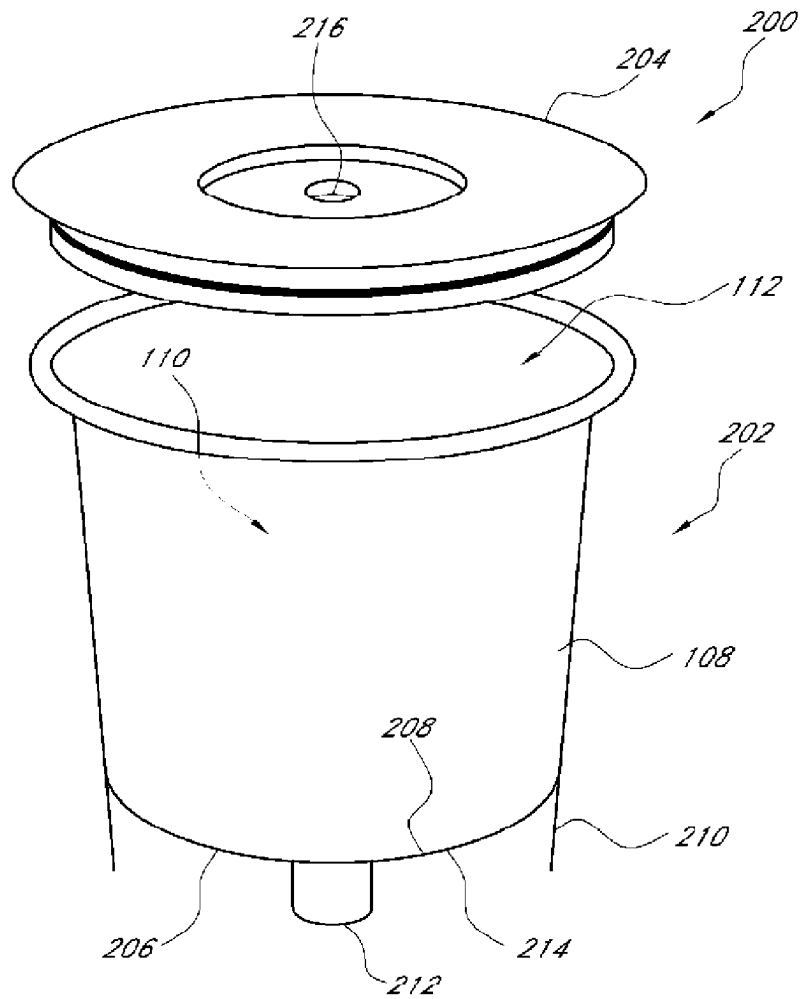


FIG. 18

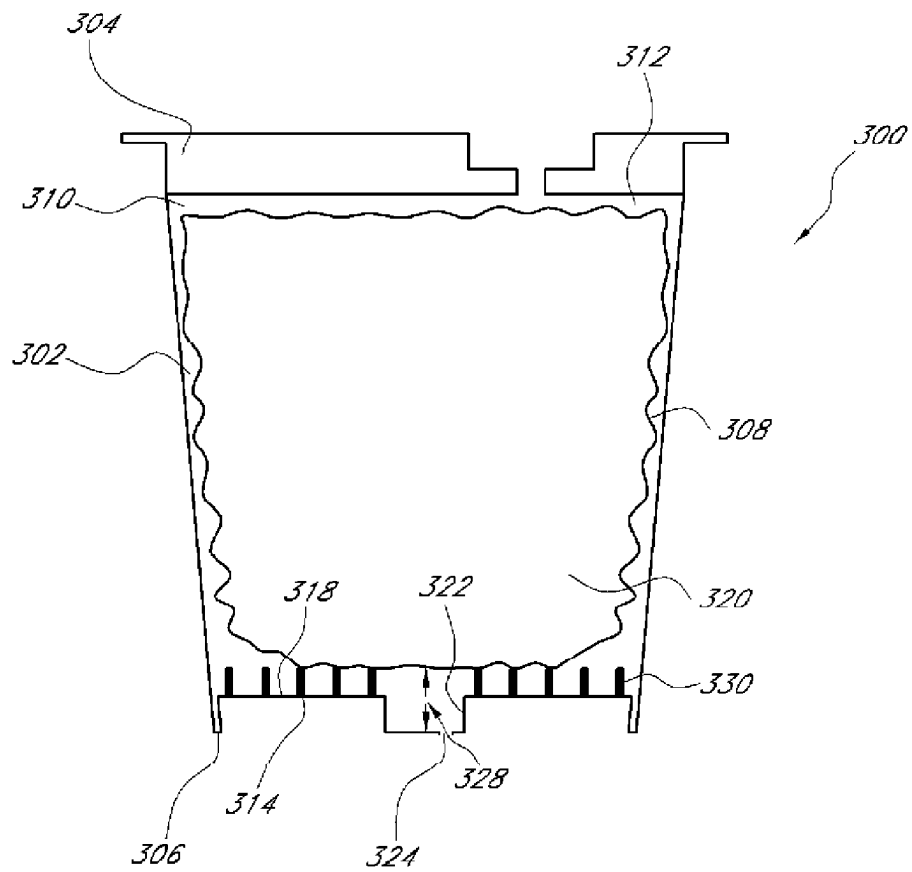


FIG. 19A

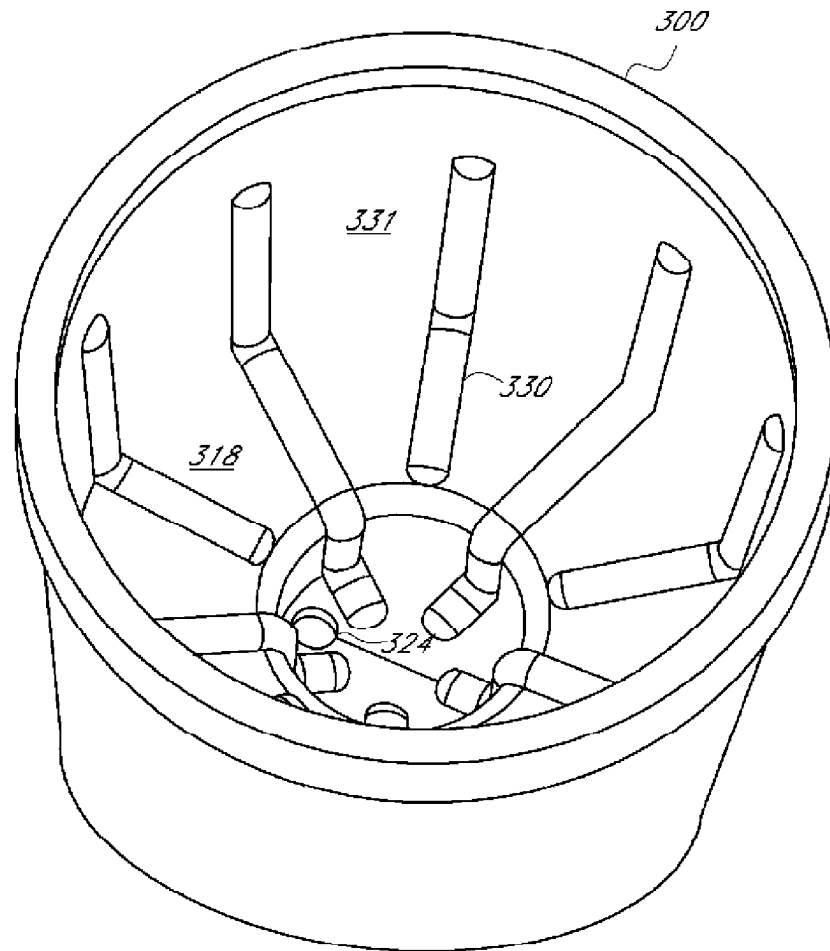


FIG. 19B



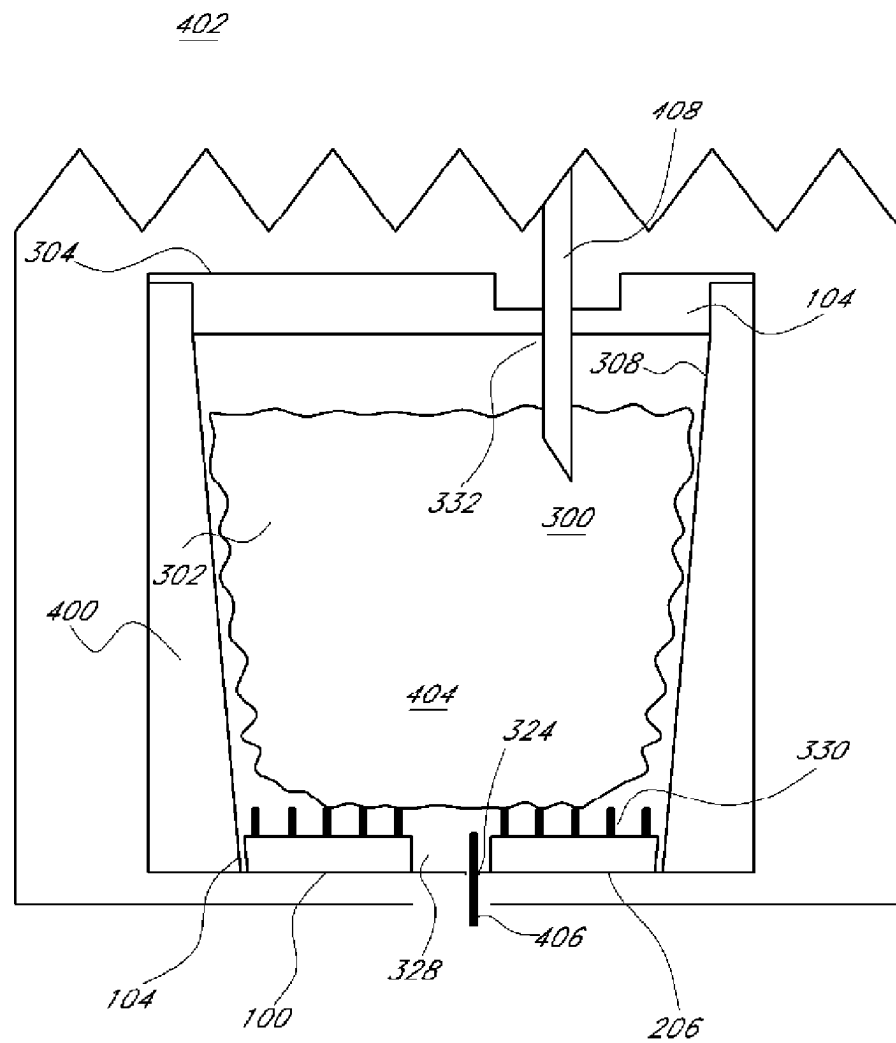


FIG. 20

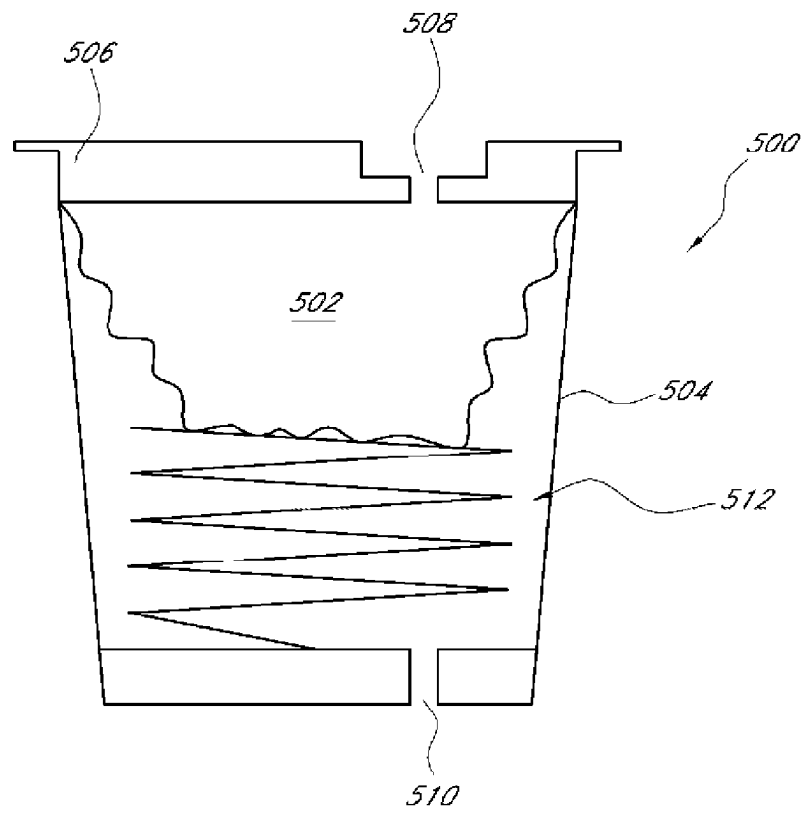


FIG. 21

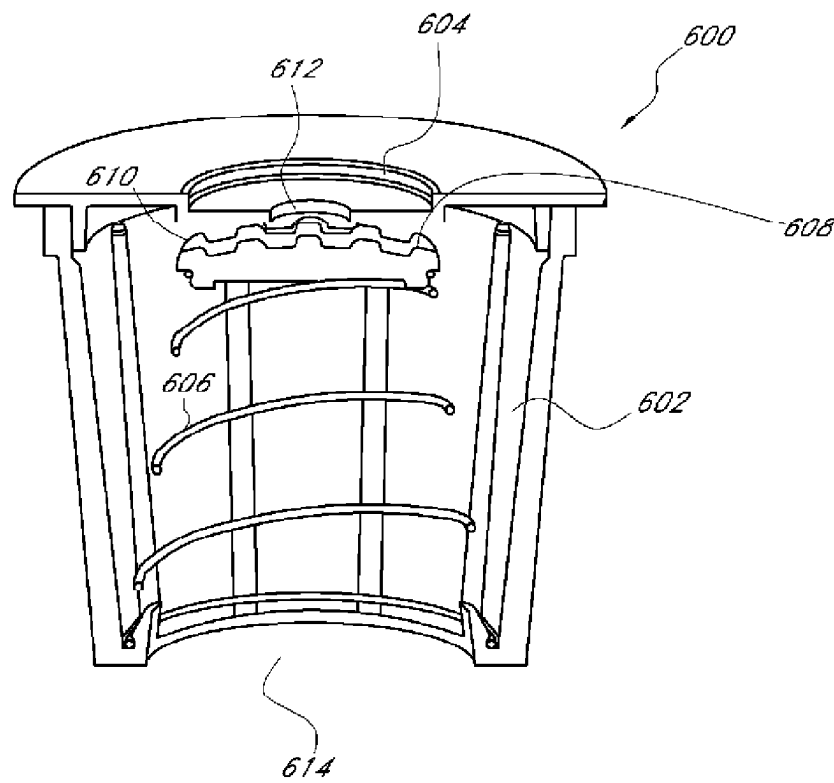


FIG. 22

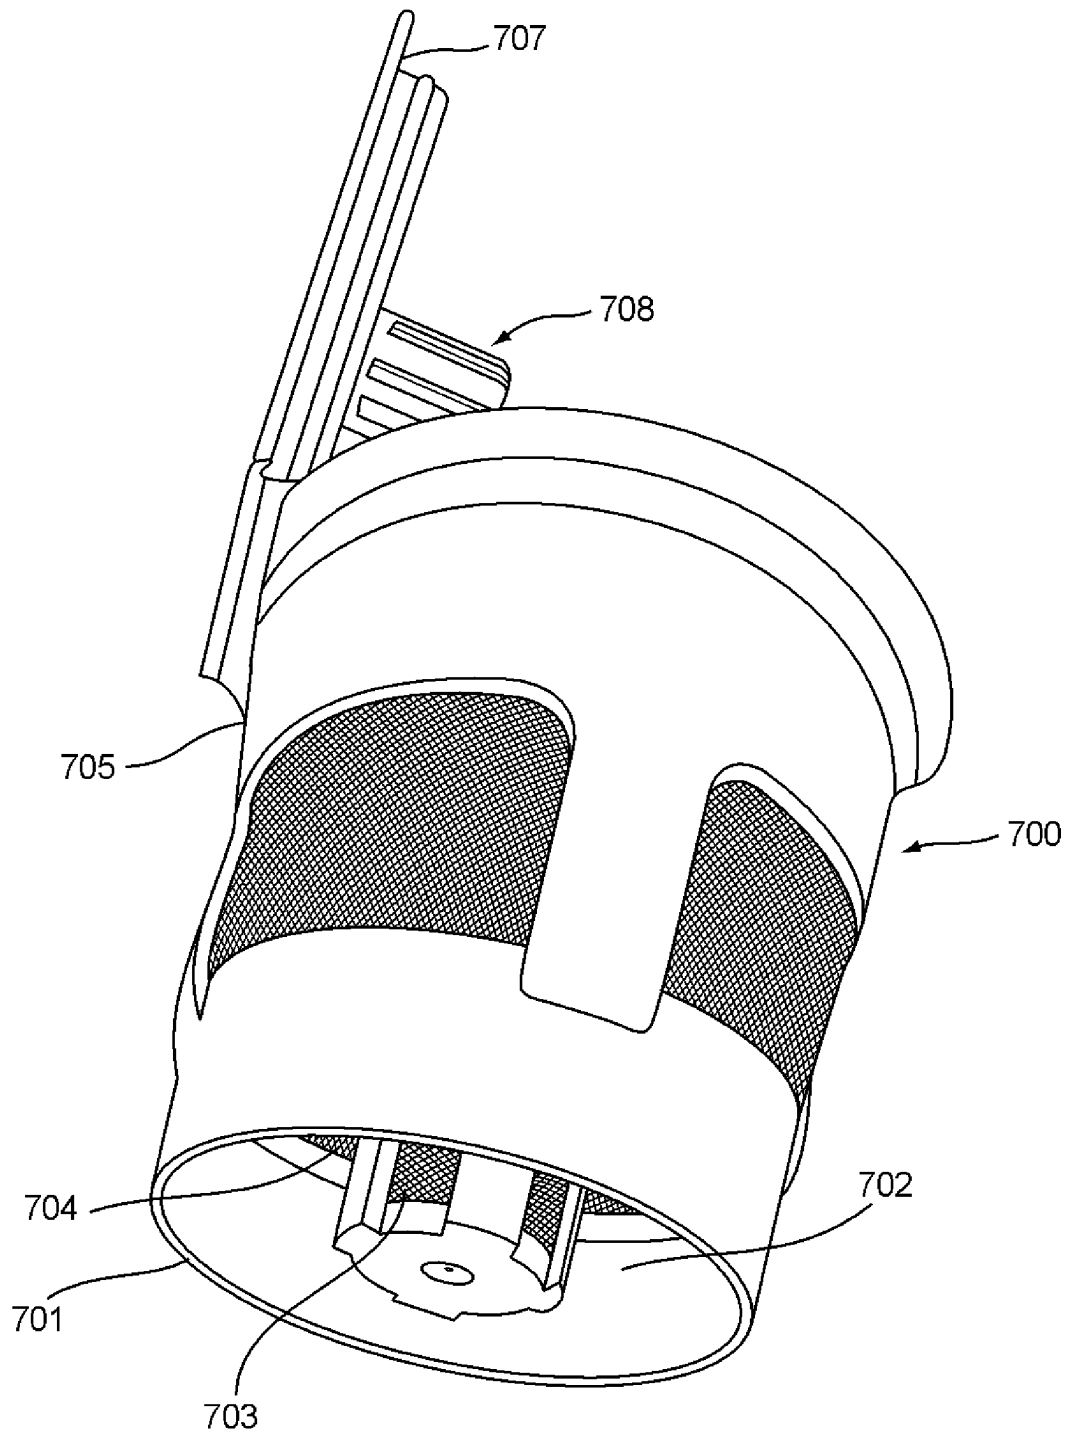


FIG. 23

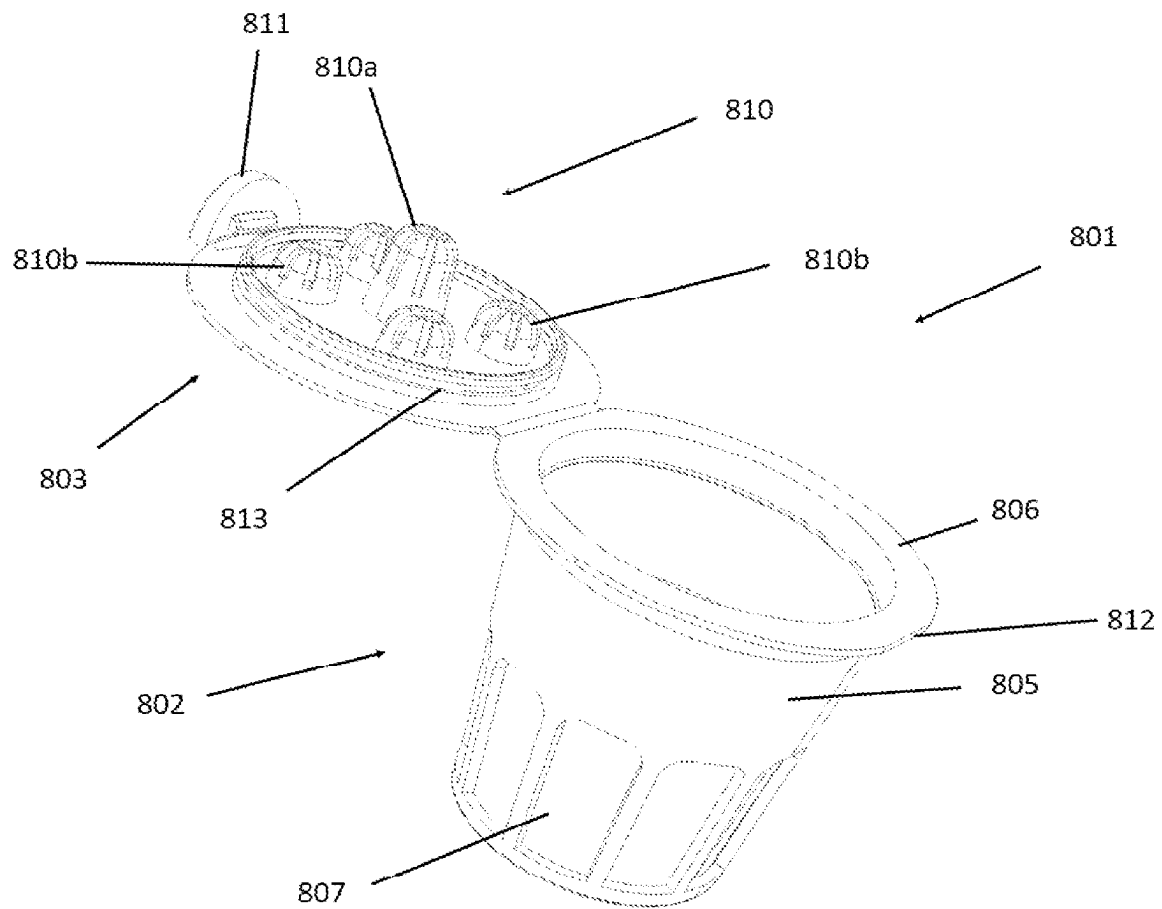


FIG. 24

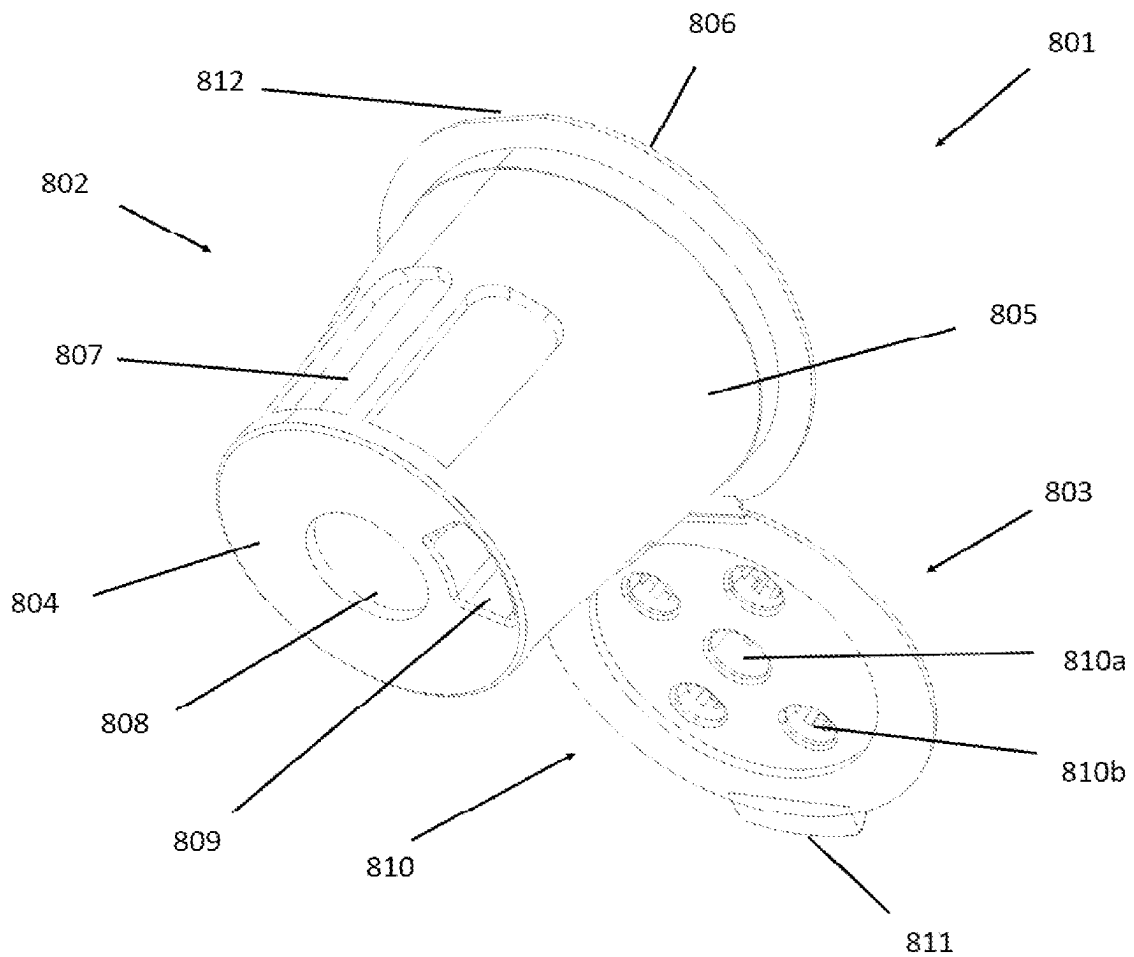


FIG. 25

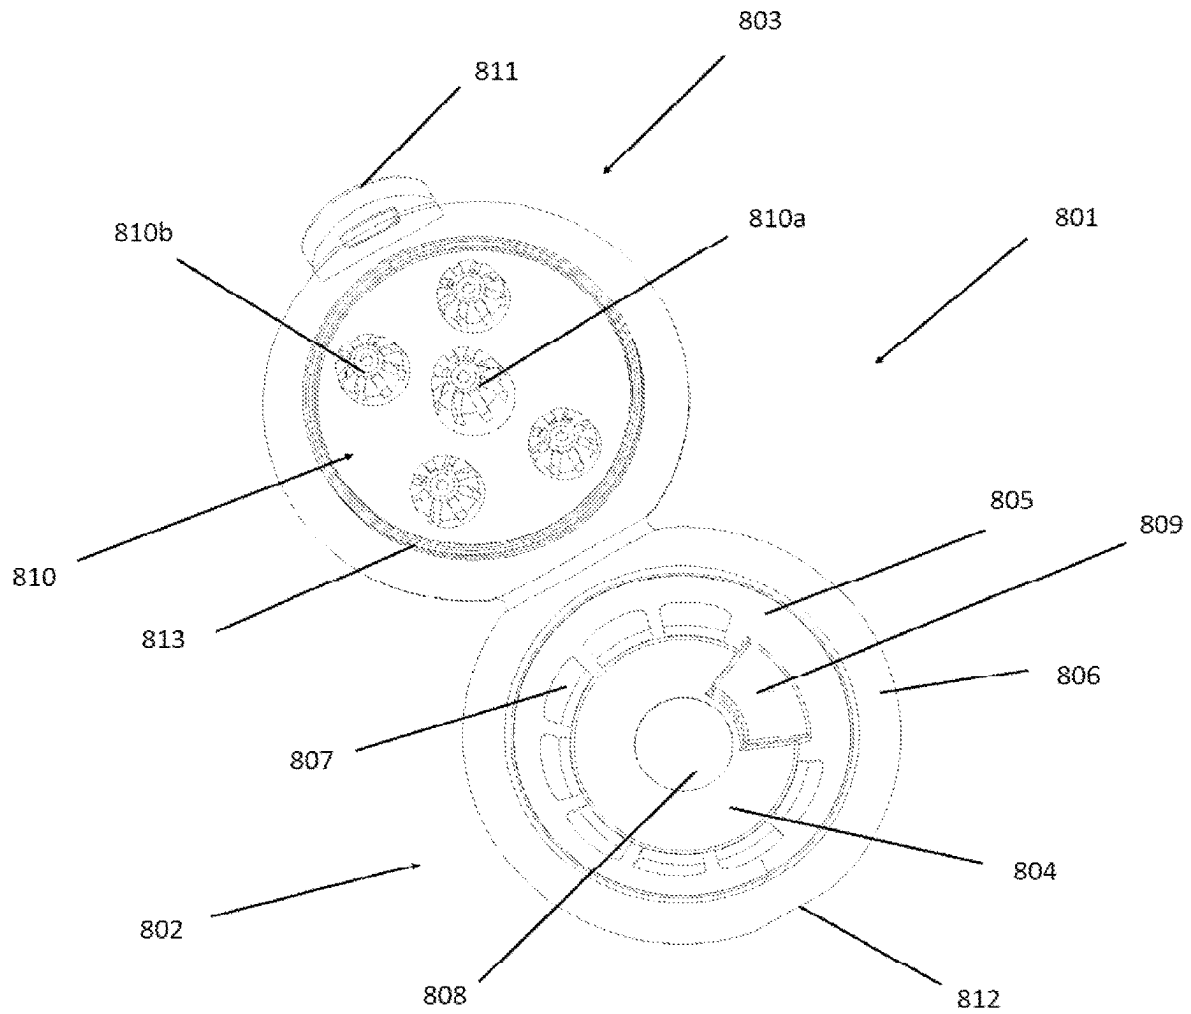


FIG. 26

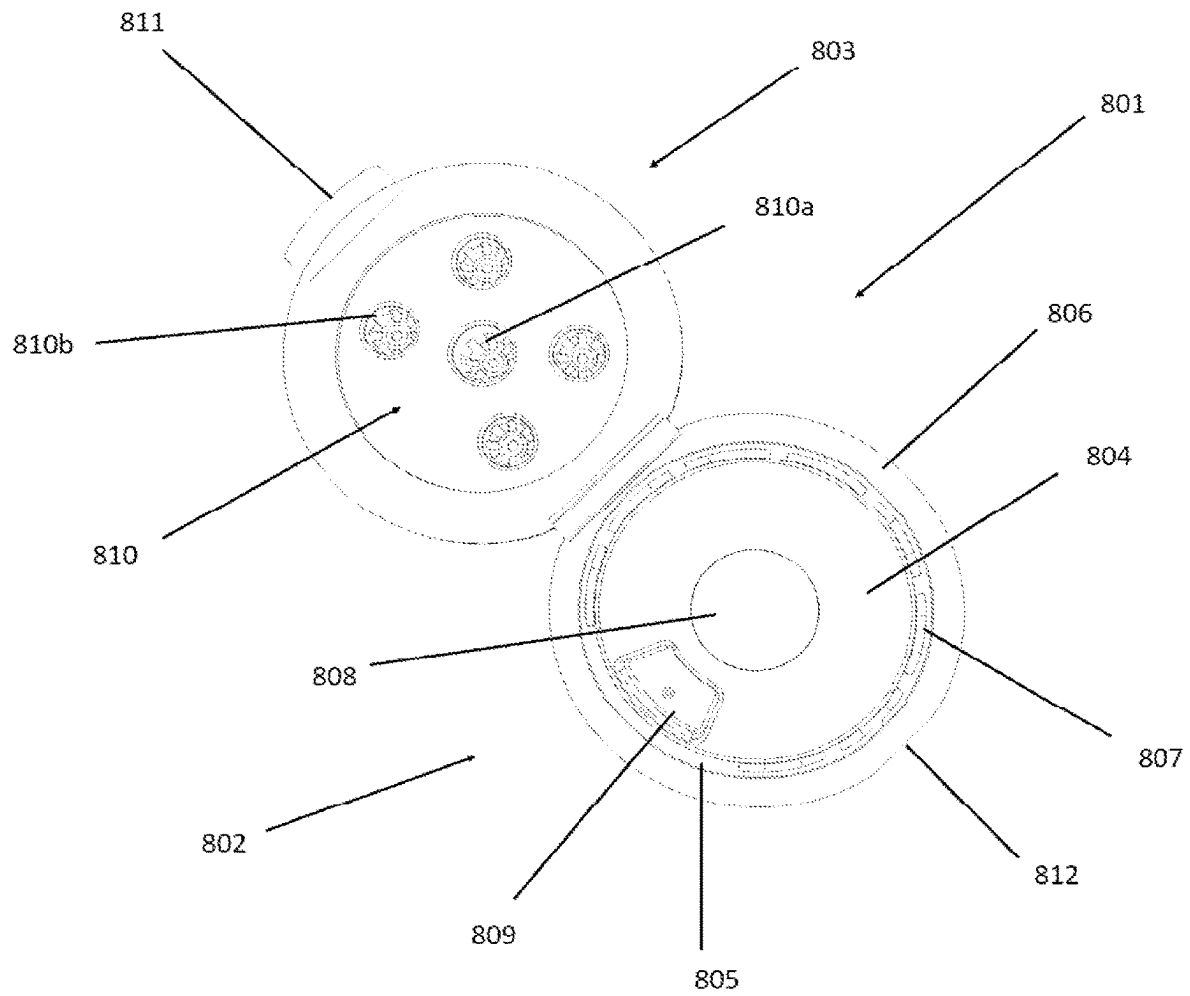


FIG. 27



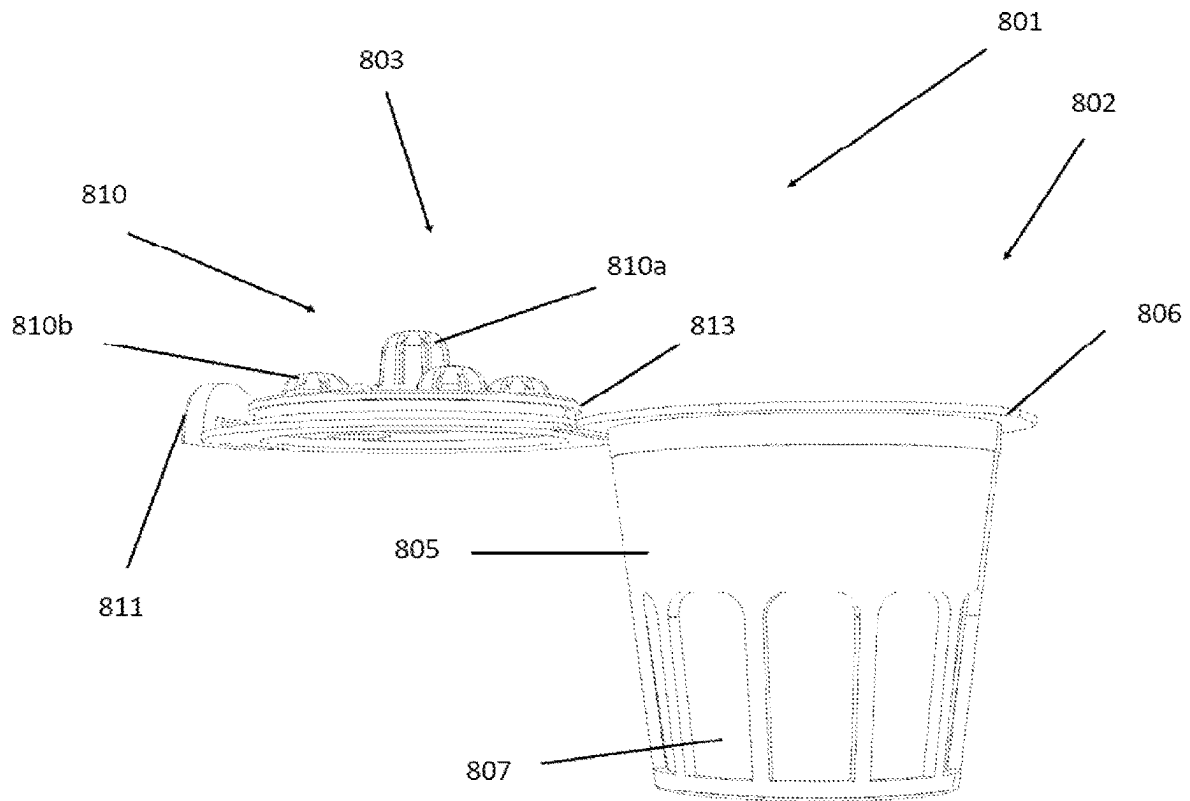


FIG. 28

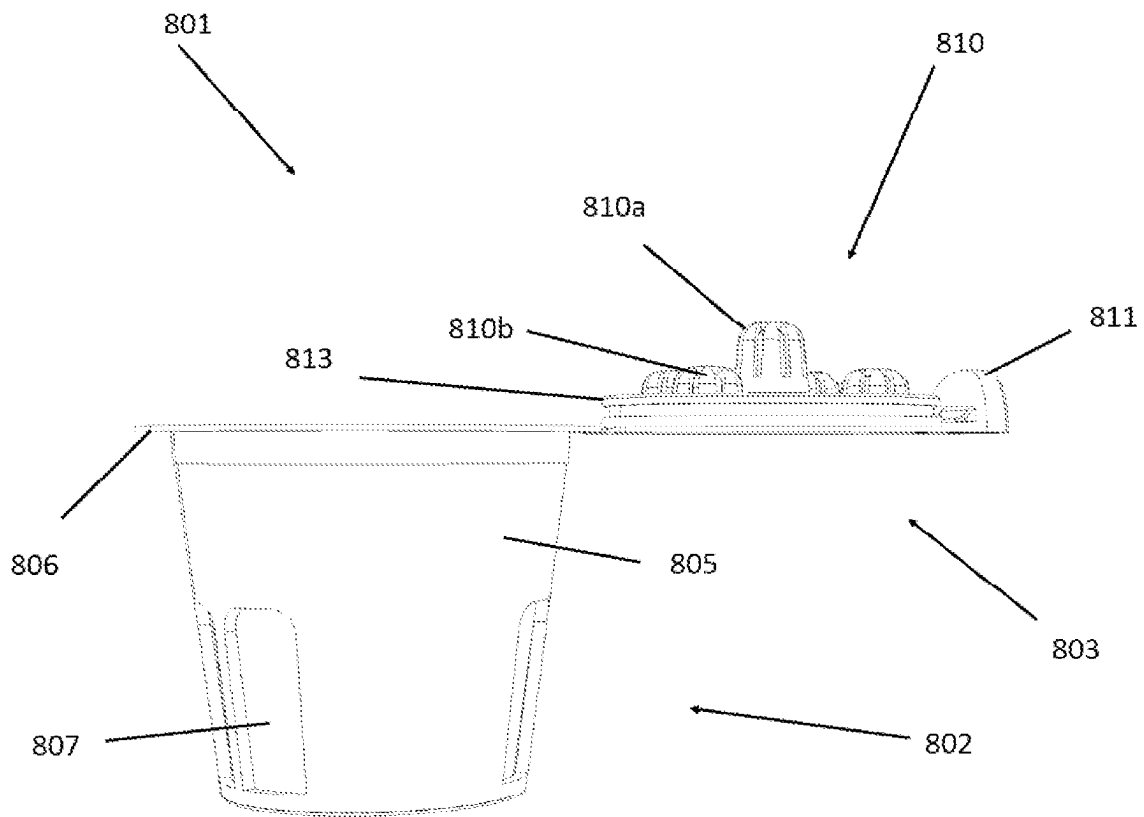


FIG. 29

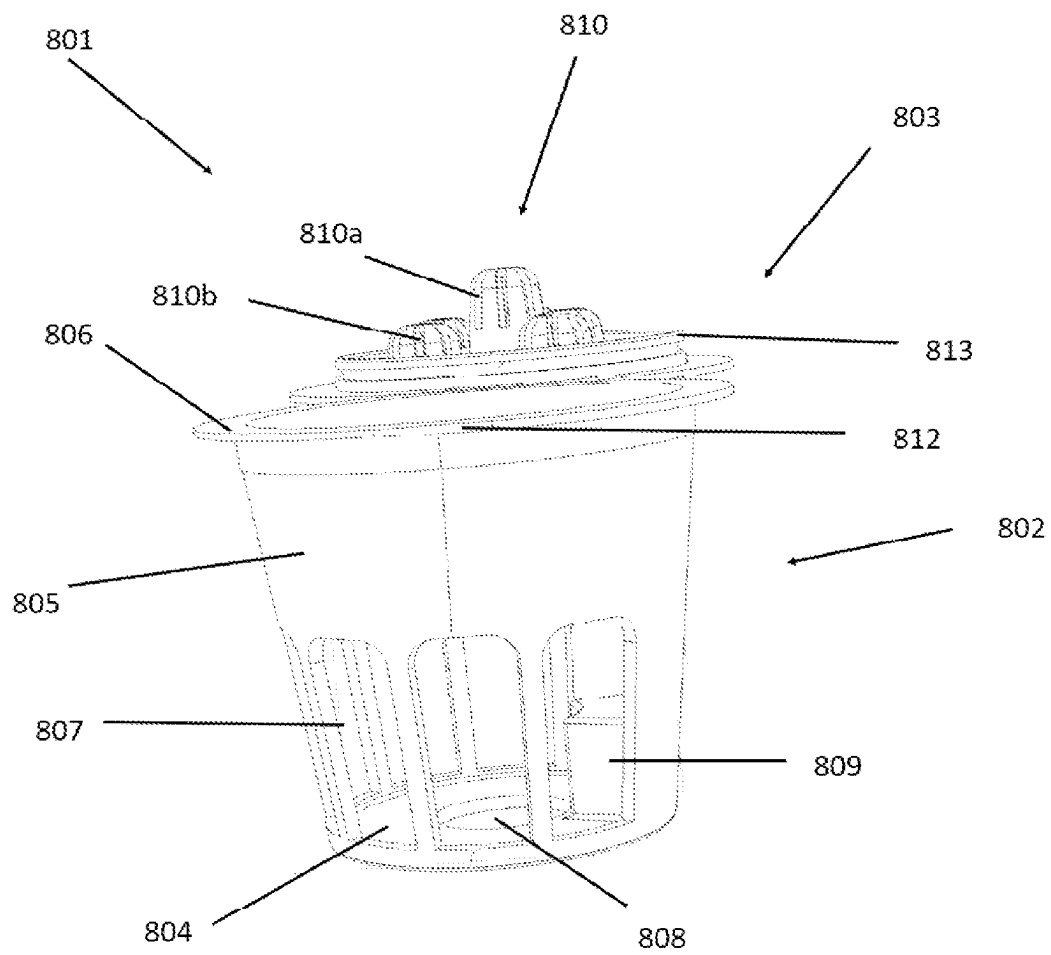


FIG. 30

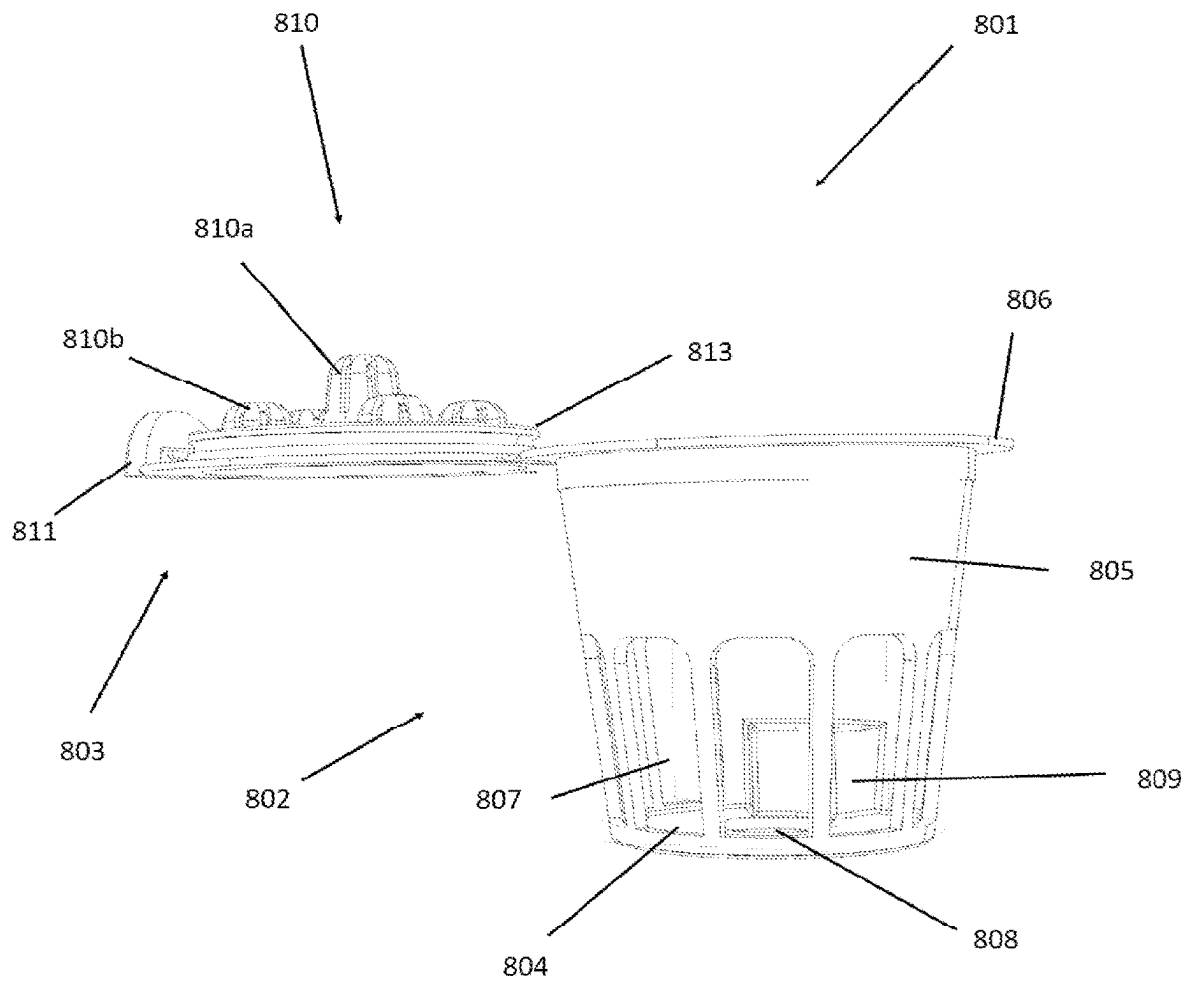


FIG. 31

## BREWING MATERIAL LID AND CONTAINER FOR A BEVERAGE BREWER

### CROSS-REFERENCE TO RELATED APPLICATIONS

This is a continuation of co-pending U.S. patent application Ser. No. 18/202,810, which was filed on May 26, 2023; which in turn is a continuation of co-pending U.S. patent application Ser. No. 17/084,827, which was filed on Oct. 30, 2020, which claims priority from U.S. Provisional Application for Patent No. 63/094,867, which was filed on Oct. 21, 2020; the disclosures of all of which are incorporated herein in their entireties.

This is also related to U.S. patent application Ser. No. 15/855,776, which was filed on Dec. 27, 2017; U.S. patent application Ser. No. 15/790,398, which was filed on Oct. 23, 2017; U.S. patent application Ser. No. 12/960,496, which was filed on Dec. 4, 2010; U.S. patent application Ser. No. 11/777,831, which was filed on Jul. 13, 2007; U.S. patent application Ser. No. 14/276,919, which was filed on May 13, 2014 and issued on Sep. 12, 2017 as U.S. Pat. No. 9,756,974; U.S. patent application Ser. No. 13/436,667, which was filed on Mar. 30, 2012 and issued on Mar. 1, 2016 as U.S. Pat. No. 9,271,597; U.S. patent application Ser. No. 13/436,690, which was filed on Mar. 30, 2012 and issued on Jan. 12, 2016 as U.S. Pat. No. 9,232,871; U.S. patent application Ser. No. 13/546,875, which was filed on Jul. 11, 2012 and issued on Jan. 12, 2016 as U.S. Pat. No. 9,232,872; and U.S. patent application Ser. No. 17/514,451, which was filed on Oct. 29, 2021; the disclosures of all of which are incorporated herein in their entireties.

### FIELD OF THE INVENTION

This invention generally relates to accessories for beverage brewers, and more particularly, relates to an adapter assembly configured to provide operative compatibility between a beverage brewer and a beverage brewing material.

### BACKGROUND OF THE INVENTION

Various types of beverage brewers, including single-serve beverage brewers, have been developed and are popular for home brewing of coffee and other beverages. These machines are generally designed with brewing chambers adapted to receive a small packet, pod, or cartridge of ground coffee or other beverage brewing material. After the beverage packet is placed in the brewing chamber, the machine injects hot water into the packet to produce a quantity, often a single serving, of freshly brewed beverage. Some machines have brewing chambers configured to receive pods that are small, flattened disk-shaped filter packages of beverage material, while other machines are configured to accommodate larger, cup-shaped beverage filter cartridges, or cartridges having other configurations.

One particular type of beverage brewer designed to accommodate a beverage filter cartridge is manufactured and sold by Keurig Inc. of Wakefield, MA. The machine has a brewing chamber dimensioned to receive cartridges such as those sold under the brand K-Cup®. These cartridges are configured in the form of a container having a permeable filter packet containing a dry beverage medium such as ground coffee beans, which is disposed in the interior of the container. The machine also has upper and lower puncture needles. In operation, the upper needle punctures the top lid

of the cartridge and injects pressurized water through the opening onto the beverage medium while the lower needle punctures the bottom of the cartridge to create an outlet for outflow of the brewed beverage. A recent model, the K-Supreme, has multiple upper injection needles or nozzles to provide hot water to the brewing material.

The configuration of the brewing chamber of the above-described beverage brewer inherently limits the use of the machine to disposable cartridges. Use of these machines results in waste in the form of a disposed cartridge for each brewed beverage. The amount of trash generated by users of these cartridges multiplies quickly. Another consequence is that users of this machine or similar brewers designed for similar cartridges would have to purchase a different machine to brew beverage from pods made for other brands. The use of multiple machines can be costly and inconvenient, and can cause inefficient use of counter space. Thus, there is a need for an apparatus and method for modifying beverage brewers configured for cartridges so that they can also be used to brew beverages from off-brand pods.

Additionally, conventional automated pod brewers typically include a brewing chamber adapted to receive an individual pod. During the brewing process, hot water is injected into the brewing chamber across the surface of the pod while brewed beverage is directed to flow out of an outlet into a cup. Some brewed beverage connoisseurs believe that brewed beverage brewed using pod brewers does not have as good flavor extraction as brewed beverage brewed by baristas who usually tamp or compact the beverage brewing material prior to brewing. Thus, there is a need for an improved pod brewing system.

Further, conventional automated pod brewers are not designed to brew brewed beverage or other beverages from loose grounds. A user of such a brewer is limited in selection to the beverage brewing material available for sale in pods, and beverage brewers configured for cartridges limit users to beverage brewing material available for purchase in cartridges. Often, the selection of beverages is limited to coffee, although tea, herbal beverages, yerba maté, and other brewed beverages and infusions are popular and could be brewed using such a machine if an alternative to the pre-packaged cartridges would be available. A brewed beverage drinker who likes a brewed beverage that is only available as loose grounds or as whole beans also cannot brew this brewed beverage in one of these types of brewers.

### BRIEF SUMMARY OF THE INVENTION

According to an aspect of the invention, a brewing material container for a beverage brewer includes a receptacle and a lid. The receptacle is configured to receive and hold beverage brewing material and to be placed in a brewing chamber of the beverage brewer, and includes a base, and a sidewall extending from the base and terminating in an open end. The lid is configured to engage with the open end of the sidewall to at least partially cover the open end. The lid includes a number of lid openings configured to receive a corresponding respective number of injection nozzles of the beverage brewer. The receptacle base and/or the receptacle sidewall includes a receptacle opening configured to allow fluid flow from an interior of the receptacle to an exterior of the receptacle.

The lid openings can be, for example, through-holes. The lid can also include dispersion bays arranged at the through-holes and configured to protrude toward an interior of the receptacle when the lid engages with the open end of the sidewall to at least partially cover the open end. The

3

dispersion bays can be configured to protrude from a surface of the at the through-holes, and include apertures. For example, at least some of the apertures can be shaped as slots.

The receptacle can include a mesh material arranged to cover at least the receptacle opening.

The receptacle opening can include a base opening in the base of the receptacle.

The receptacle opening can include a number of sidewall openings in the sidewall of the receptacle.

The receptacle can include a recessed portion in which the base and the sidewall of the receptacle are recessed inward toward an interior of the receptacle. In the recessed portion, the base can be recessed at least partially toward the open end of the receptacle, and the sidewall can be recessed at least partially toward a center of the base. The recessed portion can form a protrusion into the interior of the receptacle, and a corresponding enclosure on an exterior of the receptacle. The enclosure can be configured to receive an outflow nozzle of the beverage brewer and to isolate the outflow nozzle from the interior of the receptacle.

The receptacle can include a rim at least partially surrounding a periphery of the open end of the sidewall.

The lid can be hingedly connected to the receptacle.

According to another aspect of the invention, a brewing material container for a beverage brewer includes holding means for receiving and holding beverage brewing material and for placement in a brewing chamber of the beverage brewer. The holding means includes base means, and sidewall means for extending from the base means and terminating in an open end. The brewing material container also includes covering means for engaging with the open end of the sidewall means and at least partially covering the open end. The covering means includes a number of cover receiving means for receiving a corresponding respective plurality of injection nozzles of the beverage brewer. The base means and/or the sidewall means includes fluid flow means for allowing fluid flow from an interior of the holding means to an exterior of the holding means.

The cover receiving means can include through-holes. The cover receiving means can also include dispersion means arranged at the through-holes, for protruding toward an interior of the holding means when the covering means engages with the open end of the sidewall means to at least partially cover the open end. The dispersion means can include flow control means for allowing fluid to pass through the dispersion means and for directing flow of the fluid toward the interior of the holding means.

The holding means can include screen means for covering at least the fluid flow means to allow fluid flow from the interior of the holding means to the exterior of the holding means while retaining the beverage brewing material in the interior of the holding means.

The holding means can include recessed isolation means for receiving an outflow nozzle of the beverage brewer and for isolating the outflow nozzle from the interior of the holding means. The recessed isolation means is defined by a portion of the holding means in which the base means and the sidewall means are recessed inward toward an interior of the holding means.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a front view of an exemplary beverage brewer according to the invention.

FIG. 1B is a side view of an exemplary beverage brewer according to the invention.

4

FIG. 1C is a top view of an exemplary beverage brewer according to the invention.

FIG. 2 is a side view of an exemplary beverage brewer with an open lid allowing placement of a brewing material holder according to the invention.

FIG. 3 is a functional diagram of an exemplary beverage brewer.

FIG. 4 is a perspective view of an exemplary filter paper cup.

FIG. 5A is a side view of an exemplary filter cup according to the invention.

FIG. 5B is a top view of an exemplary filter cup according to the invention.

FIG. 6A shows a side view of an exemplary filter paper cup according to the invention.

FIG. 6B shows a top view of an exemplary filter paper cup according to the invention.

FIG. 6C shows a side view of an exemplary filter paper cup.

FIG. 7 shows a cross-sectional view of an exemplary filter paper cup taken along line 80-80 of FIG. 6B.

FIG. 8A is a cross-sectional side view of an exemplary brewing material holder according to the invention.

FIG. 8B is a cross-sectional side view of an exemplary brewing material holder according to the invention.

FIG. 9 shows a cross-sectional view of an exemplary brewing material holder according to the invention.

FIG. 10A shows a side view of an exemplary filter paper cup with a separate receptacle and paper lid according to the invention.

FIG. 10B shows a top view of an exemplary filter paper cup with a separate receptacle and paper lid according to the invention.

FIG. 10C shows a side view of an exemplary filter paper cup.

FIG. 11A shows a top and side view of an exemplary brewing material holder according to the invention.

FIG. 11B shows a bottom and side view of an exemplary brewing material holder according to the invention.

FIG. 12 shows a top and side view of an exemplary brewing material holder according to the invention.

FIG. 13 shows a cross-sectional view of an exemplary brewing material holder according to the invention taken along line 86-86 of FIG. 12.

FIG. 14A is a top view of a lid of an exemplary brewing material holder according to the invention.

FIG. 14B is a bottom view of a lid of an exemplary brewing material holder according to the invention.

FIG. 15A shows a side view of an exemplary brewing material holder according to the invention.

FIG. 15B shows a side view of an exemplary brewing material holder according to the invention.

FIG. 15C shows a top view of an exemplary brewing material holder according to the invention.

FIG. 15D shows a bottom side view of an exemplary brewing material holder according to the invention.

FIG. 16A shows a top view of an exemplary brewing material holder according to the invention, with the lid removed.

FIG. 16B shows a bottom side view of an exemplary brewing material holder according to the invention, with the lid removed.

FIG. 17A is a schematic illustration of an exemplary pod adaptor assembly according to the invention.

FIG. 17B is a schematic illustration of an exemplary receptacle of the pod adaptor assembly of FIG. 17A.

5

FIG. 17C is a schematic illustration of an exemplary receptacle of the pod adaptor assembly of FIG. 17A.

FIG. 18 is a schematic illustration of an exemplary pod adaptor assembly according to the invention.

FIG. 19A is a schematic illustration of an exemplary pod adaptor assembly according to the invention.

FIG. 19B is a schematic illustration of an exemplary receptacle of the pod adaptor assembly of FIG. 19A.

FIG. 20 is a schematic illustration of an exemplary pod adaptor assembly of FIG. 19 used in combination with a beverage brewer having upper and lower puncturing devices.

FIG. 21 is a schematic illustration of an exemplary pod adaptor assembly according to the invention.

FIG. 22 is a cross-sectional view of an exemplary pod brewing chamber according to the invention.

FIG. 23 is an illustration of another embodiment of the invention.

FIG. 24 is an isometric top view of an exemplary beverage brewing container according to the invention.

FIG. 25 is an isometric bottom view of an exemplary beverage brewing container according to the invention.

FIG. 26 is a top view of an exemplary beverage brewing container according to the invention.

FIG. 27 is a bottom view of an exemplary beverage brewing container according to the invention.

FIG. 28 is a side view of an exemplary beverage brewing container according to the invention.

FIG. 29 is a side view of an exemplary beverage brewing container according to the invention.

FIG. 30 is an isometric view of an exemplary beverage brewing container according to the invention.

FIG. 31 is a side view of an exemplary beverage brewing container according to the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

The following description is not to be taken in a limiting sense, but is presented for the purpose of describing one or more preferred embodiments of the invention. The scope of the invention should be determined with reference to the claims.

With reference to FIGS. 1A-1C, an exemplary beverage brewer 10 includes a body 12, an opening lid 14, a lid handle 16, a water container 18, a display 20, controls 22, a platform 24 and a mouth 12a. A brewed beverage pitcher 26 can be arranged on the platform 24 inside the mouth 12a and has a pitcher lid 28. The beverage brewer 10 provides a flow of hot water through beverage brewing material to produce a brewed beverage. The flow of water can be heated by one of any known mechanisms, for example, through the use of an electrical heating coil or a conductive coating on tubing carrying the water.

With reference to FIG. 2, the beverage brewer 10 lid 14 can be opened to allow placement of a brewing material holder 30 according to the invention inside the brewing chamber of the beverage brewer 10. The lid 14 includes a lid hinge 14a and a water tube 15, which carries heated water into the lid 14. A pad 17 is arranged on a bottom surface of the lid 14 and presses against the brewing material holder 30 when the lid 14 is closed, and in cooperation with other elements, tamps beverage brewing material contained in the brewing material holder 30. A nozzle 19 extending down from the closed lid 14 directs the flow of hot water into the brewing material holder 30.

6

Referring to FIG. 3, in general a beverage brewer 10 includes a water tank 18, a water pump 21, a heater 13, a check valve 23, and a nozzle 19. The water heater 13 can include a heating coil or a resistive coating or any other mechanism for heating water. The check valve 23 limits the water pressure at the nozzle 19 by returning some of the water flow to the water tank 18. While a water pump 21 is shown to provide a flow of water to the nozzle 19, other mechanisms can be used to provide a forced flow of water.

The brewing material holder can be used with a filter paper cup to hold the beverage brewing material. A perspective view of an exemplary filter paper cup 40' with a folding cup lid 40d is shown in FIG. 4. The cup lid 40d can be folded over the rim 40c to reduce or prevent beverage brewing material from escaping during tamping or brewing. The lid 40d can also include a perforation 40e centered on the lid 40d to allow the nozzle 19 to enter and/or inject the hot flow of water into the beverage brewing material 41, but the lid 40d need not include the perforation 40e. The filter paper cup 40' can be used in the beverage brewing material containers described herein, and can be used in a beverage brewing machine having a cavity for receiving the filter paper cup 40'. While the cup 40' is preferably made from filter paper, the cup can also be made from a reusable mesh, such as a nylon or metal mesh.

Referring to FIGS. 5A and B, an exemplary filter cup 80 includes a ring 84 made of a material sufficiently strong to hold shape while in the brewing machine during the process of brewing a beverage. Filter material 82 is attached to the ring 84. The filter cup 80 can be insertable into the brewing material holder or directly into the brewing chamber as a replacement for the filter paper cup 40.

Referring to FIGS. 6A-6C, and a cross-sectional view taken along line 80-80 of FIG. B shown in FIG. 7, the lid 40d of an exemplary filter paper cup 40 can be folded over the cup 40 and sealed after loose brewing material 41 is placed into the cup. The filter paper cup 40 includes a receptacle 40g formed from a bottom 40b, sides 40a, and a rim (for example, and annular rim) 40c, and a cover (or lid) 40d configured to close the receptacle 40g to hold brewing material in the filter paper cup 40. The filter paper cup 40 can be constructed using heat and/or moisture to form permanent folds (or pleats) 40f in the sides 40a and rim 40c of the filter paper cup 40 to add strength and rigidity to the filter paper cup 40 so that the filter paper cup 40 retains its shape after forming, and preferably, adhesive is applied to the rim 40c and/or the sides 40a to retain the pleats and add strength and rigidity to the filter paper cup 40. Preferably, the filter paper cup 40 is constructed from heat-sealable filter paper having a heat-reacting film on at least one side, which film causes the pleats to adhere to adjacent pleats when heat is applied following forming. The pleats in the rim 40c are generally continuations of the pleats in the sides 40a. The filter paper cup 40 can alternatively be corrugated to retain shape. The filter paper cup 40 thus has structure for maintaining a substantially (that is, within the ability of the paper to maintain a shape) frustoconical or cylindrical shape.

As mentioned above, the filter paper cup 40 can have, for example, a frusto-conical shape or a cylindrical shape, for example, having a base diameter D1, an inner top diameter D2, an outer top diameter (the diameter of the rim) D3, and a height H. For particular applications to be suitable for use in a conventional brewing machine, the diameter D1 can be approximately 1.25 inches, the diameter D2 can be approximately 1.625 inches, the diameter D3 can be approximately 2.125 inches, and the height H can be approximately one inch. The rim 40c in this case is therefore approximately

0.25 inches wide, and the lid **40d** has approximately the same diameter **D3** as the rim **40c**.

The filter paper cup **40** can be sold or otherwise provided in an empty state for filling by a user, or as a pre-packaged single-serving (or larger) beverage brewing material pod. When provided for filling by the user, the filter paper cup **40** is preferably provided with the cover **40d** attached to the rim **40c** of the receptacle **40g**. For example, the filter paper cup **40** can be made from a single piece of filter paper cut into two circular portions attached by a hinge **40h**, or by two separately cut pieces of filter paper attached at the hinge **40h**. The filter paper cup **40** can be provided as two pieces, in which case the cover **40d** is detached from the receptacle **40g**, but this can be more difficult to use. A user can seal the cover **40d** to the rim **40c** of the receptacle **40g**, or the cover **40d** can be held to the receptacle **40g** by sandwiching the filter paper cup **40** between a holder lid **32a** and holder body **31**. When the filter paper cup **40** is sold as a ready-to-use pod containing brewing material, the pod is generally fabricated using filter paper off two separate rolls as described below.

An exemplary pod holder **30r** with a tamping spring **36** and bottom tamper **34**, the filter paper cup **40** containing a portion of beverage brewing material **41**, and the holder lid **32a** ready to attach to a holder body **31a** is shown in FIG. **8A**, and with the holder lid attached to the holder body with the rim of the filter paper cup sandwiched between the lid and brewing material holder and the tamping spring and bottom tamper pushing the filter paper cup against the lid according to the invention is shown in FIG. **8B**. The rim **40c** is arranged on a top edge of the holder body **31** and is sandwiched between the holder lid **32a** and body **31a** when the lid **32a** is attached to the body **31a**, thereby holding the filter paper cup **40** against the holder lid **32a** while a needle inserted through the holder lid **32a** will puncture the folding paper lid **40d** and inject hot water into the filter paper cup **40**. Thus the brewing material **41** can be retained in the filter paper cup **40** solely by attaching a lid **32a** of the pod holder **30r** to the base **31a** of the pod holder to sandwich the rim **40c** of the filter paper cup **40** and the outer edge of the cover **40d** between the lid of the pod holder to the base of the pod holder.

The inside diameter **D4** of the mouth of the pod holder **30r** can be approximately the same size as the Diameter **D2** of the filter paper cup **40**, for example, approximately 1.625 inches, thereby facilitating the capture and sandwiching of the rim **40c** and edge of the cover **40d** between the holder lid **32a** and body **31a**. Sandwiching of the rim **40c** and edge of the cover **40d** between the holder lid **32a** and body **31a** both seals the brewing material in the filter paper cup **40** to prevent or restrict the escape of the brewing material from the filter paper cup **40** during brewing and provides a taut cover **40d** facilitating puncturing the cover **40d** by a needle used to inject heated water into the filter paper cup **40** during brewing. The body **31a** can have a cylindrical or frusto-conical shape, or any other shape that would function advantageously in the brewing chamber.

Another exemplary embodiment of the brewing material holder **30s** is shown in FIG. **9**. The brewing material holder **30a** is similar to the brewing material holder **30s** but omits the tamping spring **36** and bottom tamper **34**.

A filter paper cup **40"** with separate receptacle **40g"** and paper lid **40d"** is shown in FIGS. **10A-C**. The filter paper cup **40"** includes the features of the filter paper cup **40**, except the lid **40d"** is not hingedly attached to the receptacle **40g"** and is a separate piece. Further, the receptacle **40g"** can be used in the beverage brewer without the lid **40d"**.

An exemplary brewing material holder **30t** with a lid **32h** is shown in FIGS. **11A** and **B**, with a lid **32h** removed in FIG. **12**, and in cross-section with the lid **32h** removed, taken along line **86-86** of FIG. **12**, in FIG. **13**. The base **31d** includes multiple side windows **350** and multiple bottom windows **352**, for example four side windows **350** and bottom windows **352**. The windows **350** and **352** allow unrestricted flow from a filter material receptacle **40g"** (see FIG. **10C**) arranged inside the base **31d**, and allow portions of the filter material receptacle **40g"** to expand into and through the windows **350** and **352**. Alternatively, the windows **350** and **352** can be covered with a mesh material, such as nylon or metal mesh, in which case a filter material receptacle **40g"** is not necessary.

An exemplary lid **32h** of the brewing material holder **30t** is shown in FIGS. **14A** and **B**. The lid **32h** includes a round skirt **354** which cooperates with an annular interior surface **356** of the base **31d** to sandwich the filter material receptacle **40g"**, retaining the filter material receptacle **40g"** in the base **31d**.

Additional views of the brewing material holder **30t** are shown in FIGS. **15A-D**, and views with the lid **32h** removed are shown in FIGS. **16A** and **B**. The brewing material holder **30t** can be fabricated to any dimensions, such as an exemplary embodiment in which the base **31d** has a height **Hb** of about 1.45 inches and a base bottom diameter **Db** of about 1.35 inches; wall windows **350** with a height **Hw** of between 0.5 inches and one inch, such as about 0.72 inches measured to a peak of an arched opening, and a window width **Ww** of between 0.3 inches and 0.7 inches, such as about 0.45 inches.

An exemplary method for manufacturing the filter paper cups includes providing filter paper to a machine and forming a receptacle in the filter paper. Heat and/or steam is used to make the filter paper retain the receptacle shape. The receptacle and the lid are then cut out. To manufacture a pod according to the invention, the receptacle is filled with brewing material, which can be tamped in the receptacle. The lid is positioned over the receptacle and the lid is attached to the receptacle. The pod can be nitrogen flushed and sealed. Either the filter paper cups or the completed pods can be manufactured, for example, in printing press or assembly line style.

Although the invention is described above as placing loose beverage brewing material in a brewing material holder, the invention can also be practiced by placing prepackaged beverage brewing material, for example a beverage brewing material pod, into the brewing material holder. Further, although the brewing material holder is generally described as having a snap-on lid, a screw-on lid can also be used, and in general the various elements of different embodiments described above can be mixed to provide combinations of elements that are intended to be included within the scope of the invention.

Further, although a filter paper cup has been described, a filter cup made of nylon mesh or metal mesh is equally suitable, and any brewing material holder or combination of beverage brewer and brewing material holder including a filter chamber that holds beverage brewing material as described above is intended to be included within the scope of the invention regardless of the specific filter material. Further, those skilled in the art will recognize that the features and elements of the various described embodiments of the invention disclosed herein can be combined to provide various combinations, all of which combinations are intended to be included within the scope of the invention.



As discussed above, a conventional brewing cartridge includes a pierceable shell and contains brewing material held in the cartridge by filter material. An upper needle, or liquid injector probe, of the beverage brewer penetrates the top of the shell, and a bottom needle element, typically offset from the center, penetrates the shell from below when the brewing chamber is closed on the cartridge. The upper needle enters the brewing cartridge and contacts the brewing material, whereas the lower needle pierces the shell but typically avoids contact with the brewing material. A cartridge-style, beverage brewer sold under the brand Keurig is configured to use a brewing cartridge sold under the brand K-Cup. The K-Cup brewing cartridges have a frusto-conical shape, a height of about 1-3/4 inches, a top rim having a diameter of about 2 inches, a diameter just below the top rim of about 1.8 inches, and a base having a diameter of about 1.43 inches.

FIG. 17A illustrates a pod adaptor assembly 100 of an embodiment of the invention. As shown in FIG. 17A, the pod adaptor assembly 100 generally includes a cup-shaped, that is, truncated cone-shaped, receptacle 102, and a cover 104 adapted to sealingly engage with the receptacle 102. The receptacle 102 has a substantially circular base 106 and sidewalls 108 extending upward from the base 106 to define a housing 110 having an upper opening 112. The base 106 has an interior surface 114 and an exterior surface 116, which are separated by a distance 118 so that the interior surface 114 is elevated above the exterior surface by the distance. Preferably, the distance 118 is between about 1 and 20 mm. For example, in a particular exemplary embodiment the distance is about 10 mm. Although some embodiments of the pod assembly utilize a cup-shaped receptacle, the receptacle can assume other shapes and configurations such as square or cylindrical without departing from the spirit and scope of the invention.

As also shown in FIG. 17A, a passageway 120 is formed in the base 106 of the receptacle 102, extending between the interior and exterior surfaces 114, 116 of the base 106. The passageway 120 is configured to receive a needle-like structure that is typically mounted in the beverage brewer to puncture the bottom of a disposable cup-shaped filter. The location of the passageway 120 relative to the base 106 is preferably selected to match the relative location of the needle-like structure in the brewer. In a particular embodiment, the passageway 120 is slightly off-center from the base to correspond to the location of the needle. In operation, the needle-like structure is designed to move upward toward the bottom of the base 104 of the receptacle a first distance so as to puncture the bottom of the cup-shaped filter. To prevent the needle-like structure from hitting against the base of the receptacle or piercing the beverage pod inside the receptacle, the passageway 120 allows the needle-like structure to move freely without jamming against the receptacle or the pod. The passageway 120 also serves the purpose of providing an outlet for brewed beverage to flow out of the receptacle into a drinking or serving vessel. In one embodiment, the passageway 120 is substantially circular and has a diameter of about 5 mm and a length of about 10 mm.

As FIG. 17A further shows, a plurality of spaced-apart protrusions 122 are formed across the interior surface 114 of the base. The protrusions 122 collectively provide a plurality of spaced-apart raised surfaces for the pod to rest against. When the pod is placed inside the receptacle and is resting against the protrusions, the gaps between the pod and the interior surface 114 of the base allow brewed beverage to flow unobstructed from the pod down through the passageway 120. In one implementation, the protrusions can be

configured in the manner shown in FIG. 17B. As shown in FIG. 17B, the protrusions 122 comprise a plurality of circular and oval-shaped protrusions extending upward from the lower surface 114 of the receptacle 102. In some implementations, a plurality of ribs 122 are also arranged to extend outwardly from an interior side surface 123 of the receptacle 102.

As also shown in FIG. 17A, the cover 104 of the assembly 100 has a circular configuration and a seal 124 sized to sealingly engage the cover 104 to the receptacle opening 112 in a manner known in the art. The cover 104 has an opening 126 configured to accommodate a liquid inlet probe or other inlet port from the brewer. The liquid inlet probe is typically used to pierce the cup-shaped filter cartridge and introduce pressurized hot water into the cartridge. In certain embodiments, the cover 104 also has a circular recessed section 128 disposed concentrically around the opening 126. The circular recessed section 128 is adapted to mate with a correspondingly shaped circular protrusion formed on the brewer. The cover 104 includes a rim resting on a top edge of the receptacle 102 at the top of the sidewall 108. In some embodiments, the rim extends radially beyond the top edge.

In certain embodiments, the assembly 100 further includes a locking mechanism adapted to lock the cover in place relative to the receptacle. FIG. 17C illustrates one example of such locking mechanism. As shown in FIG. 17C, a plurality of notches 126 are formed in the interior rim of the receptacle. The notches 126 are configured to engage with mating protrusions 130 formed on an interior rim 132 of the cover 104. When the cover 104 is positioned over the opening of the receptacle 102, the protrusions 130 on the interior rim 132 of the cover preferably slidably engage with the notch so as to lock the cover in place. It will be appreciated that other locking mechanisms known in the art can also be used to lock the cover in place.

FIG. 18 illustrates a pod adaptor assembly 200 of another embodiment of the invention. The pod adaptor assembly 200 generally includes a cup-shaped receptacle 202 adapted to receive a pod and a cover 204 adapted to sealingly engage with the receptacle 202. The receptacle 202 has a base 206 having a downwardly sloping interior surface 208 supported by a plurality of legs 210. A passageway 212 extends downwardly from the exterior surface 214 of the base. The passageway 212 is adapted to guide and allow the needle-like structure from the brewer to extend upward without hitting against the receptacle or piercing the pod inside the receptacle. The passageway 212 also permits outflow of the brewed beverage from the receptacle. In one embodiment, the passageway 212 has a diameter of about 5 mm and a length of about 1 mm to 20 mm. The location of the passageway 212 relative to the base 206 is preferably selected to correspond to the location of the upward-moving needle in the brewer. In one embodiment, the passageway 212 is offset by about 1-5 mm from the center of the base. As also shown in FIG. 18, the cover 204 of the assembly 200 has an opening 216 formed therethrough, which is adapted to allow insertion of a liquid inlet probe from the brewer.

FIG. 19A is a schematic illustration of a pod adaptor assembly 300 of another embodiment of the invention. The pod adaptor assembly 300 generally includes a receptacle 302 and a cover 304 adapted to sealingly engage with the receptacle 302. The receptacle 302 has a substantially circular base 306 and sidewalls 308 extending upward from the base 306 defining a housing 310 having an upper opening 312. The base 306 has an annular raised portion 314 extending upward from a lower surface 316 of the base and an opening 324 formed in a portion of the base that is not

## 11

raised. The raised portion **314** provides a raised support surface **318** for a pod **320** so that the pod **320** does not contact and possibly block the opening **324** for brewed beverage to flow through. Preferably, the lower surface of the pod **320** is also elevated from the opening **324** by a distance **328** that is calculated to accommodate the upward extension of the puncture needle in the brewer during operation. In one embodiment, the distance **328** is between about 5 to 20 mm. In certain embodiments, a plurality of spaced-apart protrusions **330** are formed on the raised support surface **318**, the protrusions **330** providing upward support for the pod **320**. The gaps between the protrusions facilitate flow of brewed beverage from the pod toward the opening **324**.

FIG. **19B** illustrates radially-extending protrusions **330** of one implementation for the receptacle **300** of FIG. **19A**. As shown in FIG. **19B**, the protrusions **330** comprise a plurality of spaced-apart ribs disposed on an interior side wall **331** and both the raised and non-raised interior surface portions **318**. As also shown in FIG. **19B**, the opening **324** is located at an offset from the center of the base of the receptacle. The location is selected to correspond to the location of the puncture needle when the assembly is placed in the brewing chamber of the brewer.

FIG. **20** is a schematic illustration of the pod adaptor assembly of FIG. **3A** used in conjunction with a single-serving beverage brewer in brewing a beverage pod. As shown in FIG. **4**, the pod adaptor assembly **300** is placed in a brewing chamber **400** of a single-serving brewer **402** known in the art and configured for brewing cup-shaped filter cartridges. In one embodiment, the single-serving brewer **402** is sold under the brand Keurig. As also shown in FIG. **20**, a beverage pod **404**, preferably containing beverage brewing material, is positioned inside the receptacle **302** of the assembly **100**. The pod **402** preferably fits snugly inside the receptacle **302** and rests against the protrusion **330**. In operation, a lower puncture needle **406** of the brewer extends upward through the passageway **116** of the receptacle **102**. As described above, the lower puncture needle **406** is designed to extend upward and puncture the bottom of a cup-shaped cartridge that is normally inside the brewing chamber. To adapt the brewer **402** for use in brewing beverage pods that do not need to be punctured, the opening **324** in the base of the receptacle allows the puncture needle **406** to extend into the receptacle and the distance **328** between the opening **324** and the pod **404** is dimensioned such that the puncture needle **406** does not contact and pierce the pod **404**. The distance advantageously provides an offset that accommodates the upward movement of lower puncture needle **406** without piercing the pod or damaging the needle. As also shown in FIG. **20**, a liquid inlet probe **408** is extended downwardly through an opening **332** formed in the cover **304** of the assembly **300**. In some embodiments, the pod **404** is positioned such that the liquid inlet probe **408** punctures the pod **404**. In other embodiments, the pod **404** is positioned such that the liquid inlet probe **408** does not puncture the pod.

FIG. **21** is a schematic illustration of another embodiment of the pod adaptor assembly **500** of the invention, showing a cross-section of the assembly when used with a beverage pod **502**. The pod adaptor assembly **500** includes a receptacle **504** and a cover **506** adapted to sealingly engage with the receptacle **504**. The assembly **500** further includes a biasing mechanism **512** adapted to elevate and press the pod **502** against the cover **506** when the cover is sealingly engaged with the receptacle **504**. In one implementation, the pressure applied against the pod advantageously compacts

## 12

the beverage brewing material in the pod which has a similar effect as tamping the beverage brewing material. In certain embodiments, the assembly has an inlet **508** for introducing pressurized hot water into the receptacle and an outlet **510** for allowing outflow of brewed beverage. In one implementation as shown in FIG. **21**, the inlet **508** is an opening formed in the cover **506** that is also adapted to receive a liquid inlet probe, which is part of a single-serving beverage brewers designed for cup-shaped cartridges. Also in the implementation shown in FIG. **21**, the outlet **510** includes an opening formed in the base of the receptacle to allow for outflow of brewed beverage from the receptacle as well as unobstructed upward extension of a puncture needle that is part of certain single-serving beverage brewers designed for cup-shaped cartridges. By pressing the pod up against the cover, the pod is also pressed up against the inlet **508** through which hot water flows into the chamber. This advantageously "traps" the hot water in the pod for a longer period of time and produces a stronger and more consistent brewed beverage. In addition to being an adaptor assembly for cup-shaped brewers, the receptacle having a biasing device as shown in FIG. **21** can also serve as a brewing chamber for pod brewers.

In one embodiment, the biasing mechanism **512** is a spring positioned inside the receptacle and extending upward from the base. The flexibility of the spring is advantageous because it provides an adjustable support surface that can accommodate and apply pressure against pods of a variety of different sizes. In cases of thicker or larger pods, the spring can be simply compressed more to accommodate the pods. The spring can push the pods of different thicknesses and sizes up against the hot water being introduced into the receptacle. It will also be appreciated that a variety of different biasing mechanisms can also be used to press the pod against the inlet hot water. For example, the biasing mechanism can be a spring attached to the interior of the cover. As described above, pushing the pod against the hot water inlet compacts the beverage brewing material and also causes much less water to escape from the pod during the brewing process. As a result, a much stronger and consistent cup of brewed beverage is produced.

FIG. **22** is a cross-sectional view of a pod brewing chamber **600** of an embodiment of the invention incorporating the novel biasing mechanism. The pod brewing chamber **600** includes a cup-shaped housing **602** and a cover **604**. Preferably, the housing **602** is sized to receive a circular beverage pod. In a particular exemplary embodiment, the housing **602** has a height of about 44.5 mm, a lower diameter of about 35 mm and an upper diameter of about 45.5 mm. As also shown in FIG. **22**, the brewing chamber **600** further includes a spring **606** extending upward from the bottom of the housing and a platform **608** attached to the upper end of the spring **606**. In one implementation, the platform **608** includes a circular support having ribs arranged in a spaced-apart configuration across the upper surface of the platform **608**. In operation, a beverage brewing material pod is inserted into the housing by being placed on the platform **608** and pressed downwardly until the pod is inside the housing and the cover **604** can be placed over the opening of the housing. As also shown in FIG. **22**, the cover **604** has an opening **612** through which hot water can be injected into the housing. The brewing chamber further includes a lower opening **614** for brewed beverage to flow out of the chamber.

The unique concept of providing a biasing mechanism to press a beverage brewing material pod against the hot water inlet in a pod brewer can be applied to a variety of different beverage brewing systems. Preferably, when the spring is

13

fully compressed, the force applied to a pod is preferably about 1.5 lb. The pressure range exerted against the pod can preferably range between 0 and 1.5 lbs. Thus, for example, a large pod will have more pressure exerted on it than a smaller pod, because the spring is compressed more. Moreover, the cross-section of the platform is preferably smaller than the diameter of the bottom so it can travel up and down the cup-shaped housing. In certain embodiments, the platform serves two functions by preventing the needle in certain single beverage brewers from perforating the pod from the bottom and also by pushing the pod evenly against the hot water inlet so when brewing the brewed beverage produced is consistent.

As described above, the pressure applied against the pod by the biasing mechanism compacts the beverage brewing material and serves the function of tamping the beverage brewing material. Thus, less beverage brewing material is required to be packaged in a pod to brew a cup of brewed beverage using the pod adapter of the invention. It will be appreciated that the biasing mechanism can also be incorporated in any of the pod adaptor assemblies described herein. The pod adaptor assembly of the invention can be made of a variety of different materials, including metal and plastics.

It should be apparent to those of skill in the art that the various embodiments of the invention as described herein can be used with loose grounds held by an open pouch made of water-permeable material. Such a pouch can be filled with beverage brewing material of the user's choice and inserted into the pod adapter in place of a pod as described above. The water-permeable pouch can include a lid made of like material, either provided separately or hingedly attached to the pouch. Alternatively, the pod adapter can include a screen over the lower opening, or on the sidewall, so that loose grounds can be placed directly into the pod adapter for brewing, without the need for a pod or water-permeable pouch.

In summary, a beverage brewing container according to the invention is configured to replace a brewing cartridge in a brewing chamber of a beverage brewer, and preferably is made of material that allows it to be reusable. The container is positionable within the brewing chamber and is configured to hold brewing material while brewed by the beverage brewer. Depending on the particular embodiment or the needs of the user, the brewing material can be sealed in a pod, can be loosely placed in a pouch made of water-permeable material, or can be placed directly into the beverage brewing container. The brewing material can be beverage brewing material, or any other material, ground or otherwise, that can be used to produce a beverage by flowing a liquid through it.

The beverage brewing container includes a receptacle configured to receive and support the brewing material, and a cover. The receptacle includes a passageway, a base, and at least one sidewall. The passageway, for example, can be arranged in the base of the receptacle, but can be arranged in the sidewall instead, or in addition if more than one passageway is advantageous. The passageway provides fluid communication between an interior of the receptacle and the brewing chamber, that is, allows the brewed beverage to flow from the container into the brewing chamber of the beverage brewer. The passageway can have a serpentine arrangement, or can be wholly unobstructed, to provide direct flow.

The base of the receptacle has an interior surface and an exterior surface and is configured to avoid contact with the needle-like structure of the beverage brewer. The at least one

14

sidewall extends upward from the interior surface of the base and is also configured to avoid contact with the needle-like structure. The cover is adapted to sealingly engage with a top edge of the at least one sidewall and includes an opening. Thus, the container can accept input fluid through the opening in the cover to allow the beverage material to be brewed, and can provide the corresponding outflow of fluid through the passageway. Because contact with the needle-like structure of the beverage brewer is avoided, the outflow substantially avoids the needle-like structure, which would normally accept the outflow. By avoiding the needle, the outflow can proceed elsewhere into the brewing chamber or directly into a mug or other vessel used to serve the beverage.

As shown in FIG. 23, the receptacle 700 can also include an extension 701 extending from the exterior surface of the base such that at least a portion of the base is raised a predetermined distance above the brewing chamber when the lower end of the extension 701 is in contact with the brewing chamber. As shown, the extension 701 can extend from a periphery of the base. Alternatively, or in addition, an extension 702 can extend from an interior portion of the base. In the latter case, the extension can include one or more apertures 703 at least partially covered by a screen material. This would allow loose grounds to be placed directly in the receptacle 700 for brewing, without the need for a pod or water-permeable pouch. The apertured extension 702 can be included as the passageway described above, or can be included in addition to the passageway, to provide an additional avenue for beverage outflow. With or without the extension, the passageway likewise can include a screen 704, to allow for brewing of loose grounds.

In addition to or in place of the inner extension 702 and/or the passageway 704, at least one portion of the sidewall 705 can include an aperture 706 that is at least partially covered by a screen material. This would allow for outflow from the receptacle 700 for a beverage brewed from loose grounds.

The cover 707 can include a perforated bay 708 extending into the receptacle from the opening of the cover. The inflow fluid received through the bay 708 is dispersed onto the grounds in a manner that would depend in part on the character of the perforations in the bay 708. For example, the perforations shown in FIG. 23 are thin apertures arranged in a longitudinal direction with respect to the length of the bay 708. However, it is contemplated that circumferential apertures, round holes, or any other manner of perforation can be advantageously used.

With reference to FIGS. 24-31, an exemplary beverage brewing container 801 according to the invention is configured to be disposed within a brewing chamber of a beverage brewer and to hold brewing material while brewed by the beverage brewer. The container 801 includes a receptacle 802 configured to receive the brewing material, and a lid 803. The receptacle 802 includes a base 804, and at least one sidewall 805 extending from the base and terminating in an open end preferably having a rim 806.

The receptacle 802 is configured to hold beverage brewing material during the brewing process in order to brew a beverage. In order to provide fluid communication from an interior of the receptacle 802 to an exterior of the receptacle 802 (such as into a brewing chamber or directly into a serving or drinking container), either the sidewall 805 or the base 804 or both can have openings to allow brewed beverage to pass out of the receptacle 802. These openings can be covered in a mesh, screen, or other liquid-permeable material configured to retain the brewing material while allowing liquid to pass through. For example, the sidewall

15

**805** can include one or more sidewall openings **807**, and/or the base **804** can include one or more base openings **808**. The base **804** and/or sidewall **805** can also include a recessed enclosure **809** that is configured to accommodate and isolate an outflow nozzle or needle of the brewing machine, preventing outflow from the receptacle **802** through the outflow needle, which is kept outside of the receptacle **802**. Of course, instead of the recessed enclosure **809**, any accommodation for the outflow nozzle or needle of the brewing machine, such as those described above, can be provided instead.

The lid **803** is configured to engage with the rim **806** to close off the open end of the sidewall **805**. The lid **803** includes one or more openings **810** that are configured to accommodate the injection nozzle(s) or needle(s) providing water to the receptacle **802**. These openings **810** can be simple through-holes, or can include apertured, for example slotted, dispersion bays as shown, configured to disperse the received water, or can have any other configuration that accommodates the injection nozzles and provides the water to the interior of the receptacle **802**. The lid **802** can be hingedly attached to the receptacle **802** as shown in the exemplary embodiment, or can be attached in some other manner, or can be completely detachable as a separate element.

Five such openings are shown in the exemplary embodiment, but the openings **810** can be provided in any number, so as to be suitable for use with brewing machines having any number of injection nozzles. Also, the openings **810** can have uniform configurations, or can be configured differently to accommodate different configurations of injection nozzles or to provide different dispersion profiles into the beverage brewing material, for example by having bays that have different sizes, different shapes, and/or different aperture configurations. For example, the exemplary embodiment shown includes a larger opening **810a** and four smaller openings **810b**, configured as dispersion bays. In this configuration, one opening **810a** is larger and includes a larger bay and therefore can accommodate a larger main injection nozzle, and the other openings **810b** can accommodate smaller injection nozzles. One or more of the openings or bays can be provided that are wide enough to accommodate more than one injection nozzle if desired, or a single opening or bay can be provided that is wide enough to accommodate all of the injection nozzles.

Alternatively, and entire portion of the lid can be recessed to accommodate multiple injection nozzles, or all of the injection nozzles, and the recess can include one or more openings or bays arranged so as to control the dispersion of water onto the brewing material regardless of the geometrical arrangement of the injection nozzles.

Thus, the container **801** is configured to accept input fluid through the opening(s) **810** and to provide a corresponding outflow of fluid through the sidewall opening(s) **807** and/or base opening(s) **808**, while avoiding a lower needle of the beverage brewer.

The lid **803** can also include a closure element **811**, for example configured to latch at a contour **812** in the rim **806**, in order to secure the lid during the brewing process. The lid **803** can also include a seal **813** configured to engage the rim in a fluid-tight manner.

In use, beverage brewing material can be placed in the receptacle **802**, the lid **803** can be closed over the open end of the receptacle **802** onto the rim **806**, and the container **801** can be placed into the chamber of a beverage brewer. When the brewer is actuated, injection needles or nozzles will be received by one or more of the lid openings **810** and will

16

inject water into the interior of the receptacle **802**, either directly or through dispersion protrusions or bays, where it will wet and soak the beverage brewing material to brew a beverage. The recessed enclosure **809** or other configuration will prevent an outflow of the brewed beverage through the outflow needle or nozzle of the brewer, and the beverage will instead flow out through the base opening(s) **808** and/or sidewall opening(s) **807** and eventually into a drinking or serving container.

The invention has been described by way of example and in terms of preferred embodiments. However, it is to be understood that the invention is not strictly limited to the particularly disclosed embodiments. To the contrary, various modifications, as well as similar arrangements, are included within the spirit and scope of the invention. The scope of the appended claims, therefore, should be accorded the broadest possible interpretation so as to encompass all such modifications and similar arrangements.

I claim:

1. A brewing material container for a beverage brewer, comprising:

a receptacle; and

a lid;

wherein the receptacle is configured to receive and hold beverage brewing material and to be placed in a brewing chamber of the beverage brewer, and includes:

a base, and

a sidewall extending from the base and terminating in an open end;

wherein the base is arranged in a raised position above a lower end of the sidewall to accommodate an outflow nozzle of the beverage brewer below the base; and

wherein the lid is configured to engage with the open end of the sidewall, and includes a plurality of lid through-holes configured to receive a corresponding respective plurality of injection nozzles of the beverage brewer.

2. The container of claim 1, wherein the receptacle includes a receptacle opening configured to allow fluid flow out of the receptacle from an interior of the receptacle.

3. The container of claim 1, wherein the receptacle base includes the receptacle opening.

4. The container of claim 1, wherein the receptacle sidewall includes the receptacle opening.

5. The container of claim 1, wherein the through-holes include a central through-hole arranged at a center of the surface of the lid, and a plurality of other through-holes arranged around the central through-hole.

6. The container of claim 5, wherein the other through-holes are arranged around the central through-hole in an arrangement corresponding to an arrangement of the injection nozzles of the beverage brewer.

7. The container of claim 5, wherein:

each said other through-hole is arranged on a circle about the central through-hole; and

the other through-holes are not equally spaced on the circle.

8. The container of claim 5, wherein the plurality of other through-holes are four other through-holes.

9. The container of claim 1, wherein the receptacle includes a mesh material arranged to cover at least the receptacle opening.

10. The container of claim 1, wherein the receptacle opening includes a plurality of sidewall openings in the sidewall of the receptacle.

17

11. The container of claim 1, wherein the receptacle base is configured to avoid an outflow nozzle of the beverage brewer at a portion of an exterior periphery of the receptacle base.

12. The container of claim 11, wherein the receptacle includes an aperture in the portion of the exterior periphery of the receptacle base.

13. The container of claim 1, wherein the receptacle sidewall is configured to avoid an outflow nozzle of the beverage brewer at a portion of an exterior periphery of the receptacle sidewall.

14. The container of claim 13, wherein the sidewall forms an outer enclosure wall at the portion of the exterior periphery of the sidewall to at least partially enclose the portion of the exterior periphery of the sidewall.

15. The container of claim 13, further comprising an outer enclosure wall at the portion of the exterior periphery of the sidewall to at least partially enclose the portion of the exterior periphery of the sidewall.

16. A brewing material container for a beverage brewer, comprising:

holding means for receiving and holding beverage brewing material and for being placed in a brewing chamber of the beverage brewer; and

covering means for engaging with an open end of the holding means;

wherein the holding means includes:

base means, and

sidewall means extending from the base means and terminating in the open end;

wherein the base means is arranged in a raised position above a lower end of the sidewall means to accommodate an outflow nozzle of the beverage brewer below the base means; and

wherein the covering means includes a plurality of cover receiving means for receiving a corresponding respective plurality of injection nozzles of the beverage brewer.

17. The container of claim 16, wherein the holding means includes fluid flow means for allowing fluid flow out of the holding means from an interior of the holding means.

18. The container of claim 16, wherein the base means includes the fluid flow means.

19. The container of claim 16, wherein the sidewall means includes the fluid flow means.

18

20. The container of claim 16, wherein the plurality of cover receiving means include a central cover receiving means arranged at a center of the covering means, and a plurality of other cover receiving means arranged around the central cover receiving means.

21. The container of claim 20, wherein the plurality of other cover receiving means are arranged around the central cover receiving means in an arrangement corresponding to an arrangement of the injection nozzles of the beverage brewer.

22. The container of claim 20, wherein:

each said other cover receiving means is arranged on a circle about the central cover receiving means; and the other cover receiving means are not equally spaced on the circle.

23. The container of claim 20, wherein the plurality of other cover receiving means are four other cover receiving means.

24. The container of claim 16, wherein the holding means includes mesh means for covering at least the fluid flow means.

25. The container of claim 16, wherein the fluid flow means includes a plurality of sidewall means openings in the sidewall means.

26. The container of claim 16, wherein the base means includes the means for avoiding the outflow nozzle of the beverage brewer at a portion of an exterior periphery of the base means.

27. The container of claim 26, wherein the holding means includes an aperture in the portion of the exterior periphery of the base means.

28. The container of claim 16, wherein the sidewall means includes the means for avoiding the outflow nozzle of the beverage brewer at a portion of an exterior periphery of the sidewall means.

29. The container of claim 28, wherein the sidewall means forms outer enclosure wall means at the portion of the exterior periphery of the sidewall means, for at least partially enclosing the portion of the exterior periphery of the sidewall means.

30. The container of claim 28, further comprising outer enclosure wall means at the portion of the exterior periphery of the sidewall means, for at least partially enclosing the portion of the exterior periphery of the sidewall means.

\* \* \* \* \*