



US 20250257962A1

(19) **United States**

(12) **Patent Application Publication**  
**Philbin et al.**

(10) **Pub. No.: US 2025/0257962 A1**

(43) **Pub. Date: Aug. 14, 2025**

(54) **AMMUNITION MAGAZINE AND FOLLOWER**

(71) Applicants: **Kevin Philbin**, Popielow (PO); **Scott Richard Gherardini**, Hoffman Estates, IL (US); **Michael Burke Irwin**, Bagdad, KY (US)

(72) Inventors: **Kevin Philbin**, Popielow (PO); **Scott Richard Gherardini**, Hoffman Estates, IL (US); **Michael Burke Irwin**, Bagdad, KY (US)

(21) Appl. No.: **19/172,456**

(22) Filed: **Apr. 7, 2025**

**Related U.S. Application Data**

(62) Division of application No. 18/479,812, filed on Oct. 2, 2023, now Pat. No. 12,270,621, which is a division of application No. 17/149,313, filed on Jan. 14, 2021, now Pat. No. 11,859,936.


(60) Provisional application No. 62/961,328, filed on Jan. 15, 2020, provisional application No. 62/984,294, filed on Mar. 2, 2020, provisional application No. 63/059,853, filed on Jul. 31, 2020.

**Publication Classification**



(51) **Int. Cl.**  
**F41A 9/70** (2006.01)  
**F41A 17/38** (2006.01)  
(52) **U.S. Cl.**  
CPC ..... **F41A 9/70** (2013.01); **F41A 17/38** (2013.01)

(57) **ABSTRACT**




The present disclosure provides ammunition magazines and followers for use in a firearm, such as an AR15 or M16 firearm, that prevent contact between the bullet portion of a cartridge and interior surfaces of the firearm's receiver portion during transfer of the cartridge from the magazine to the firearm's chamber.

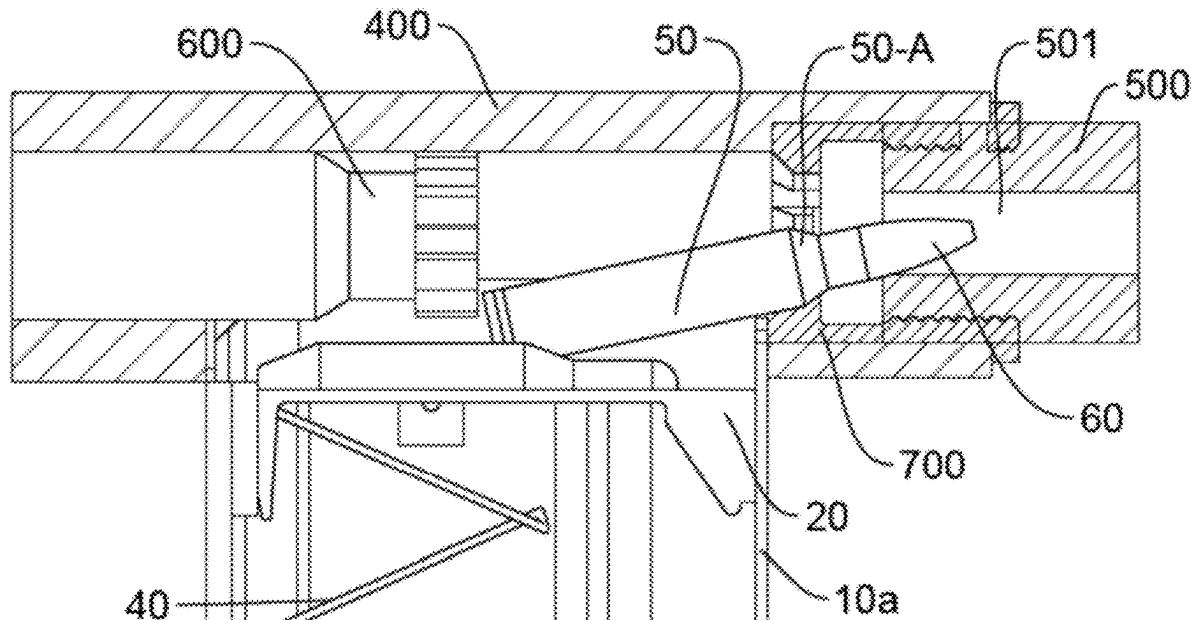


**FIG. 1**

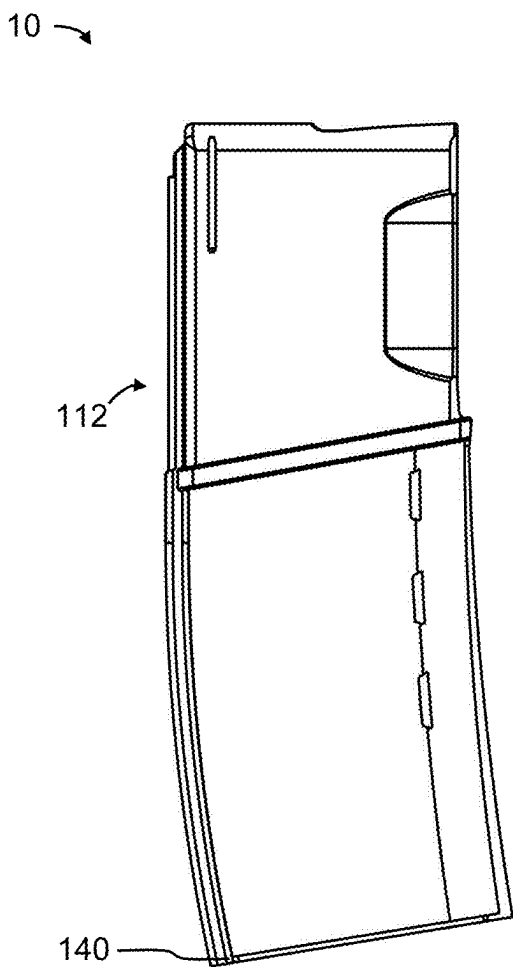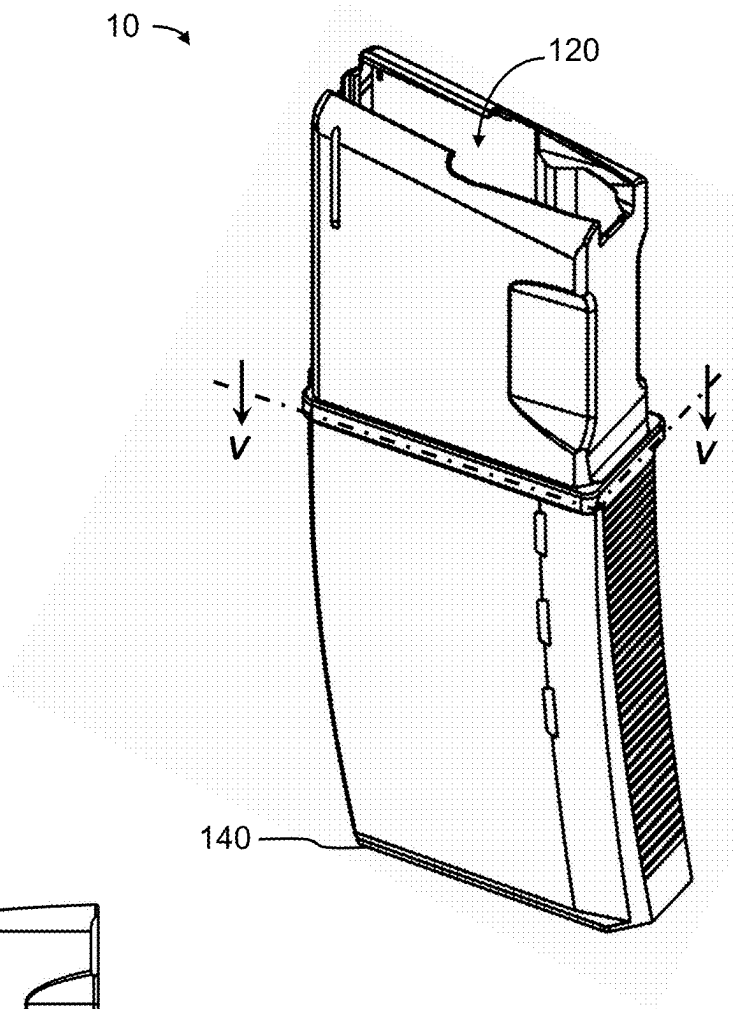


**FIG. 2**

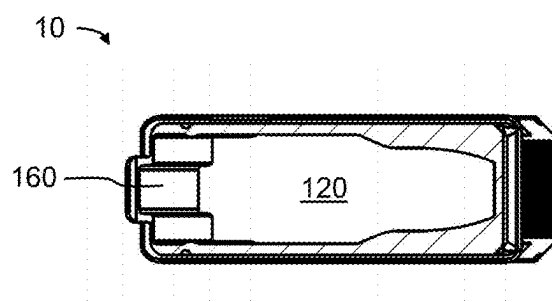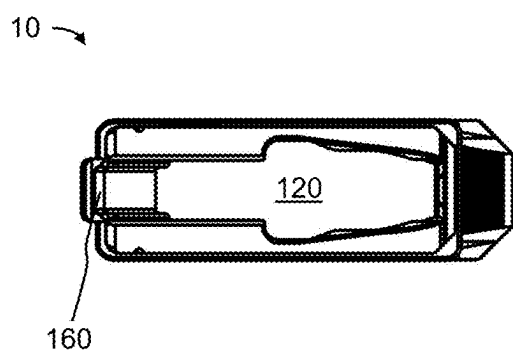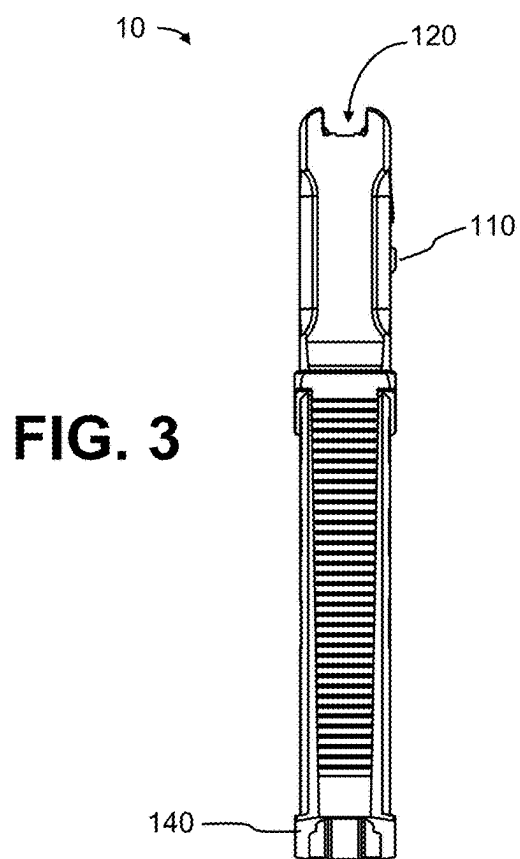


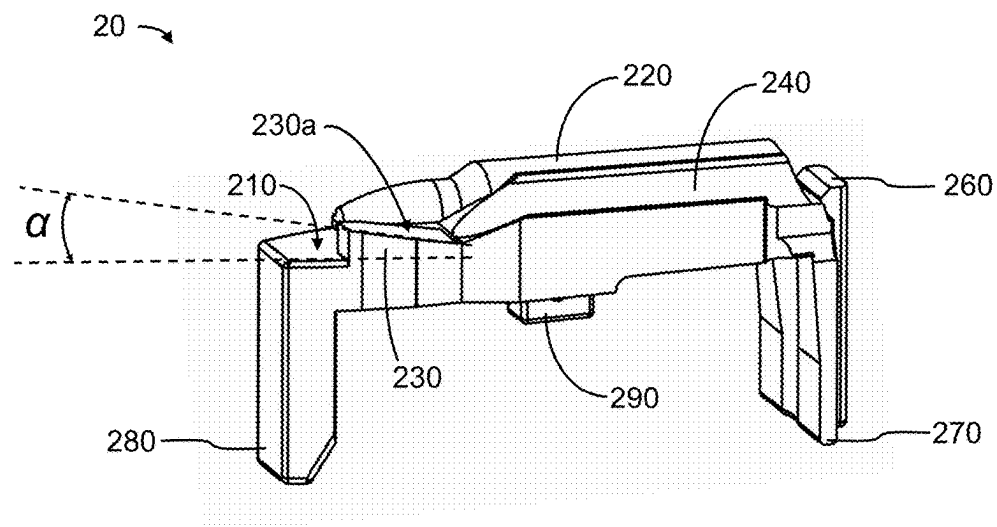

**FIG. 6**

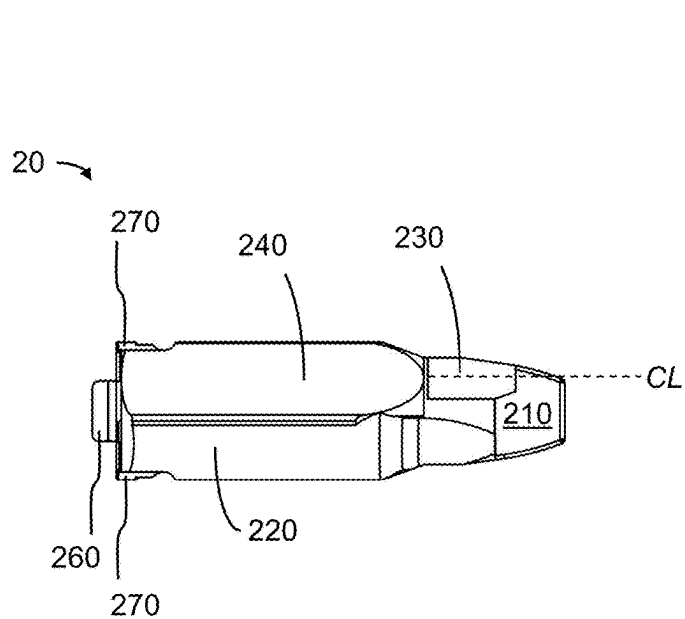

**FIG. 7**

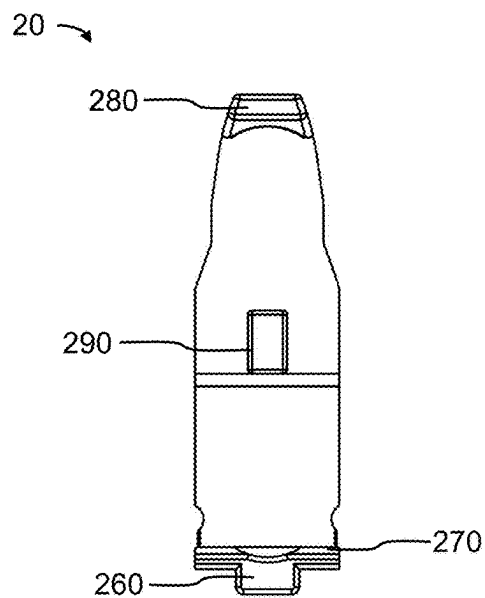

**FIG. 8**



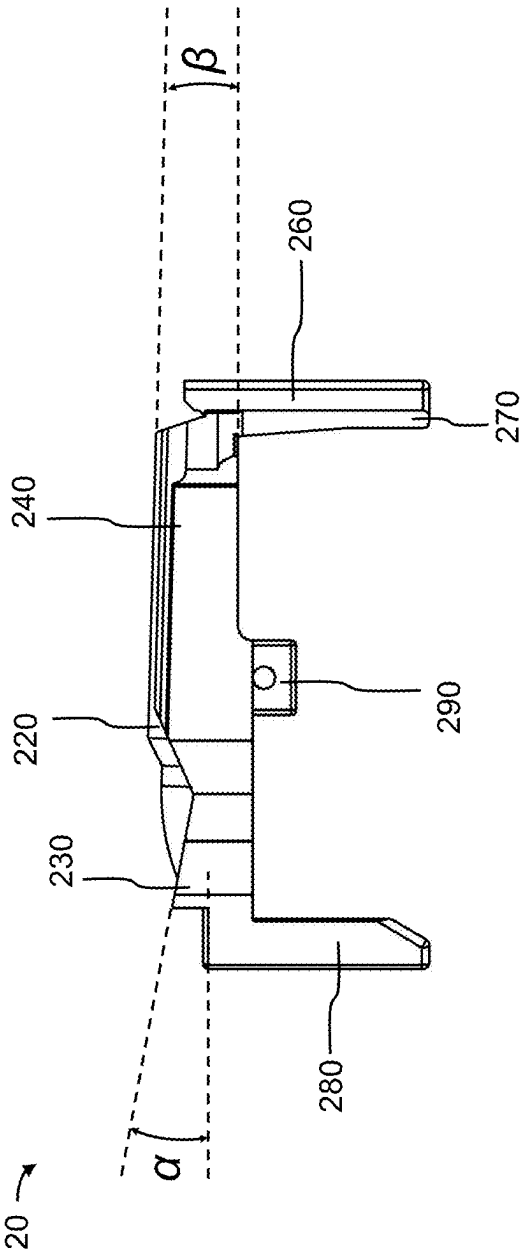


FIG. 9

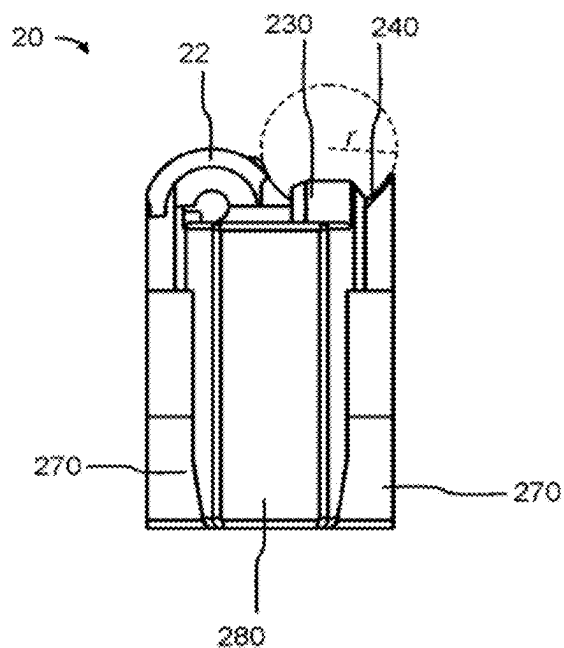

**FIG. 10**

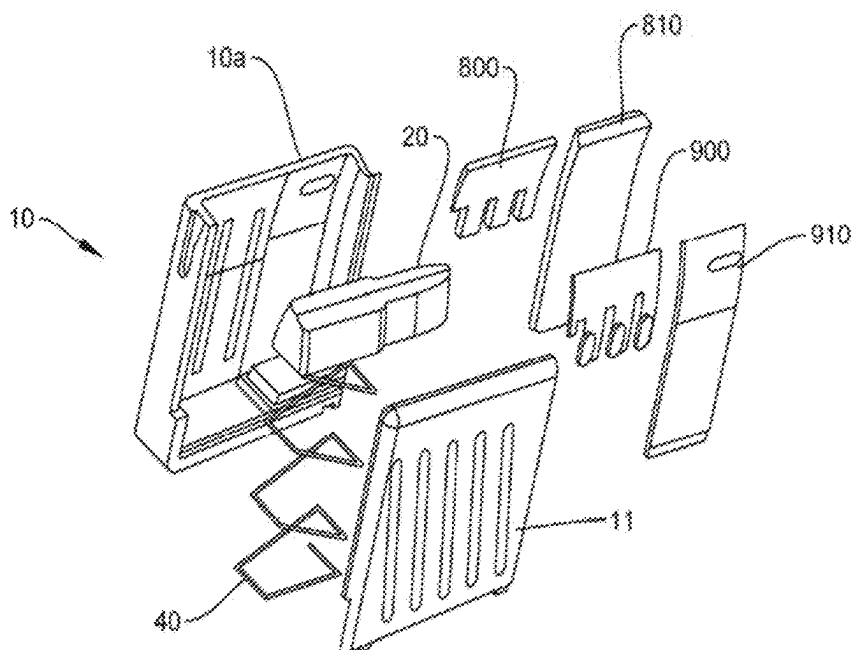

**FIG. 11**

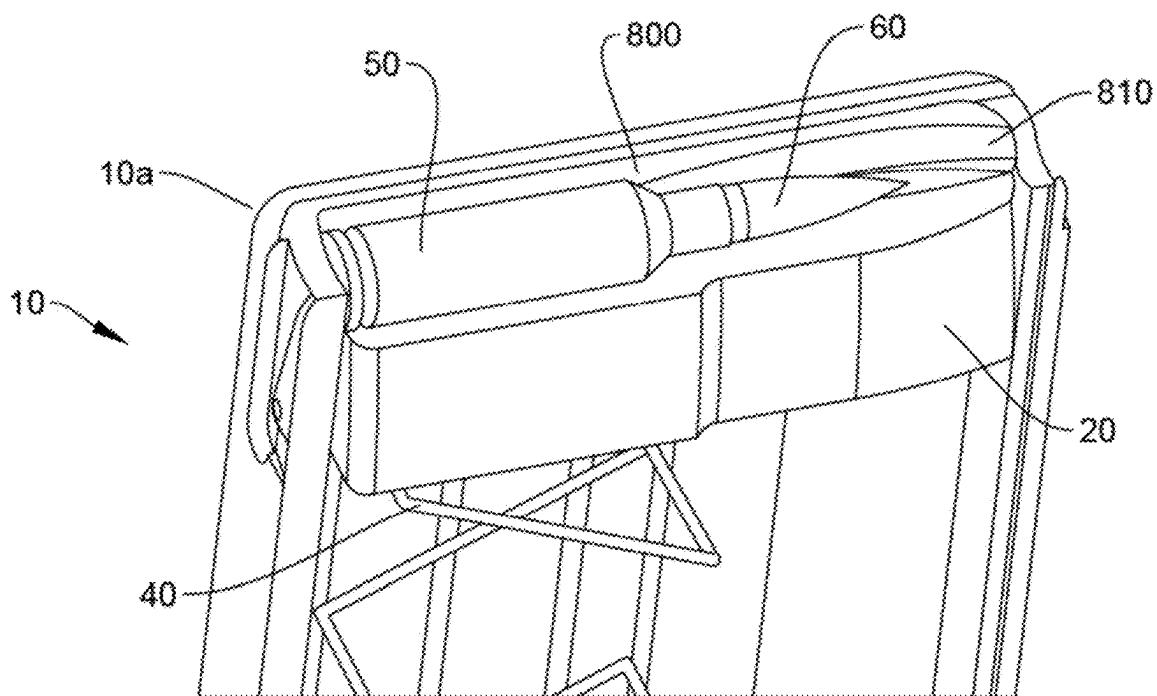


FIG. 12

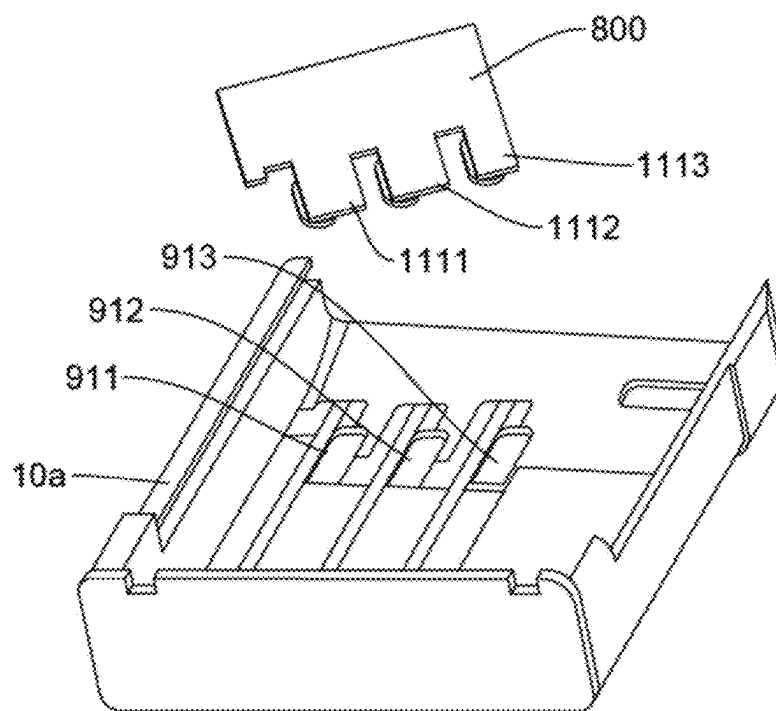


FIG. 13

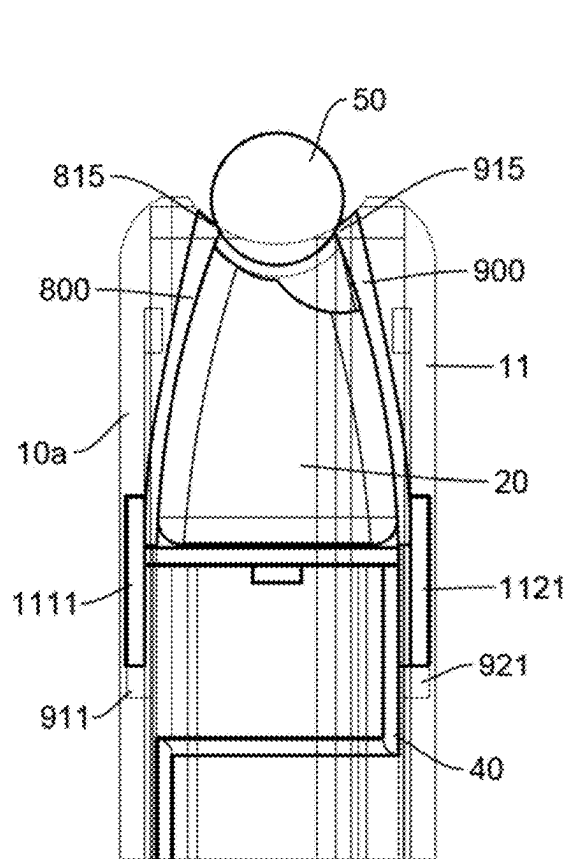


FIG. 14

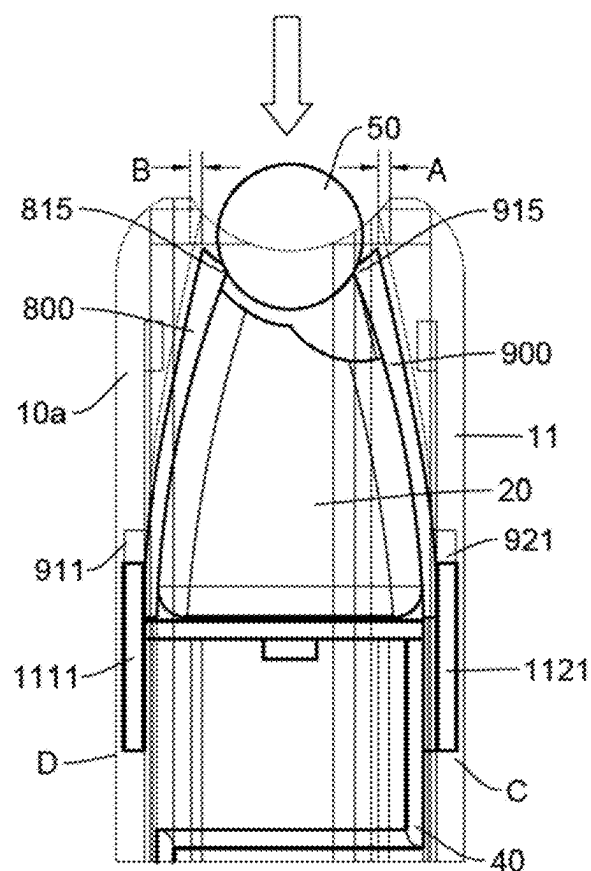


FIG. 15

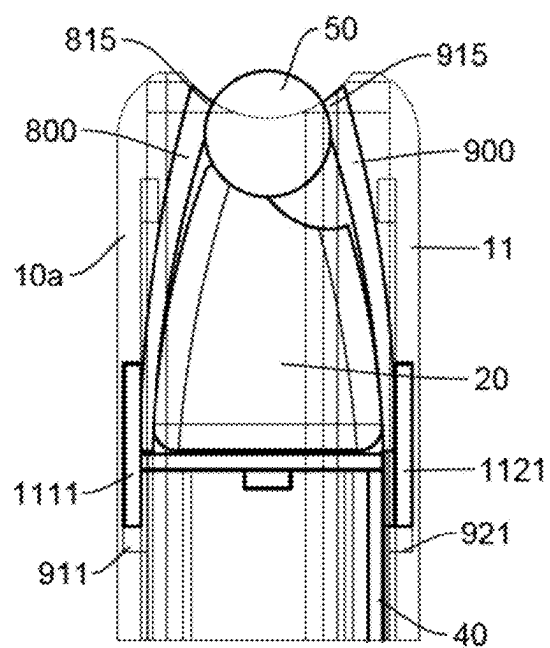


FIG. 16



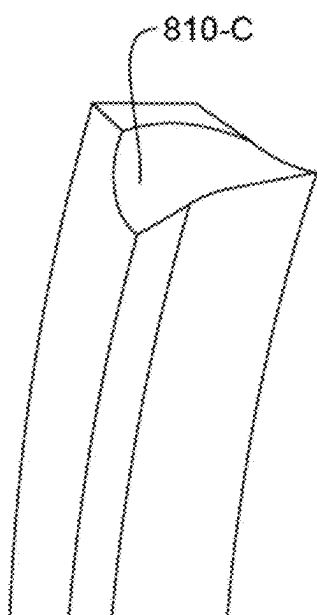


FIG. 17A

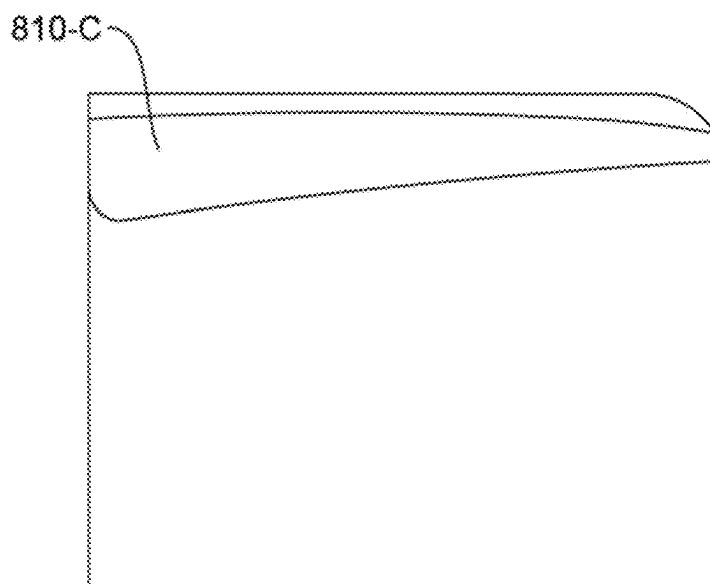


FIG. 17B

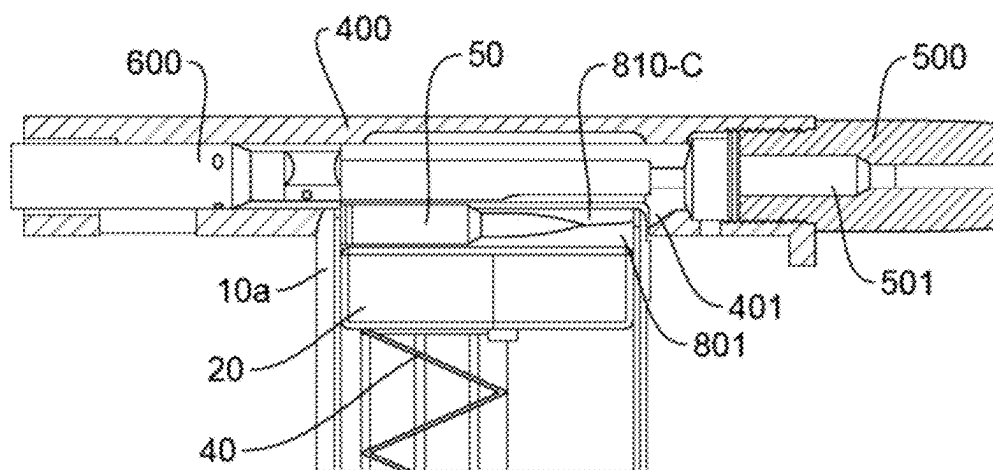


FIG. 18

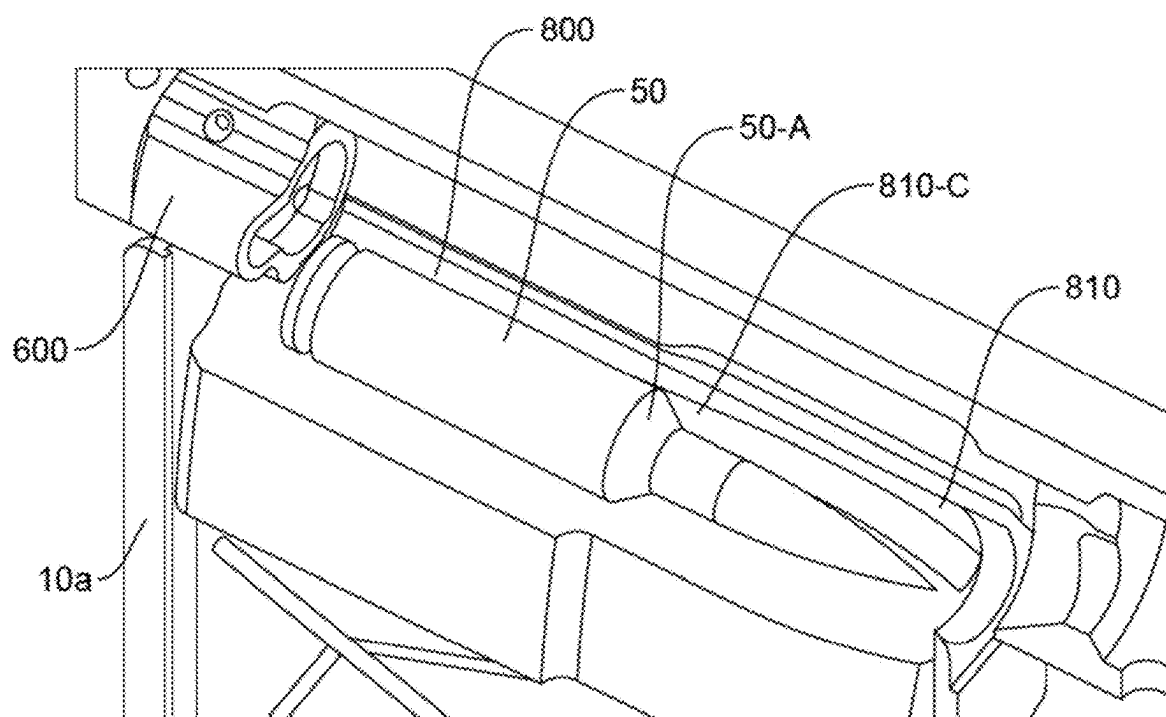


FIG. 19

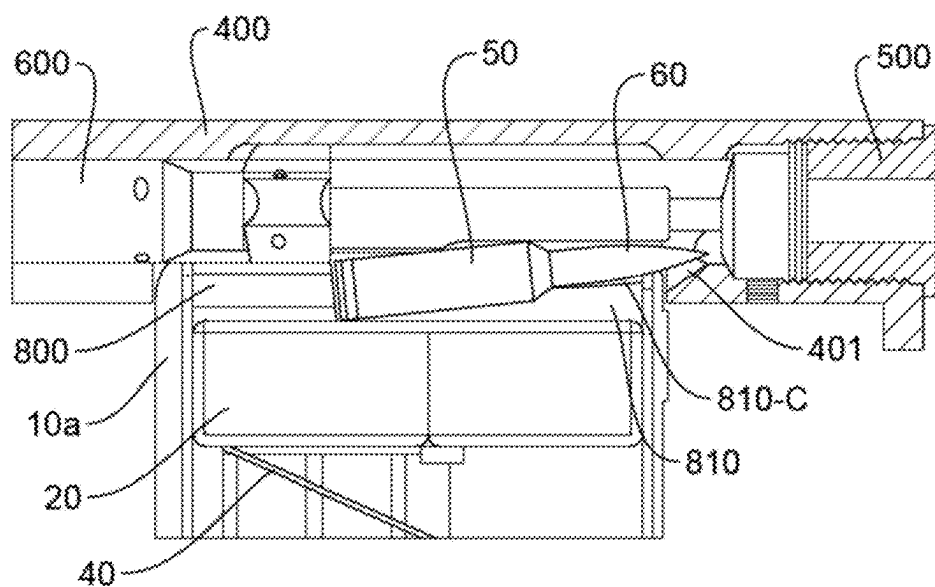


FIG. 20

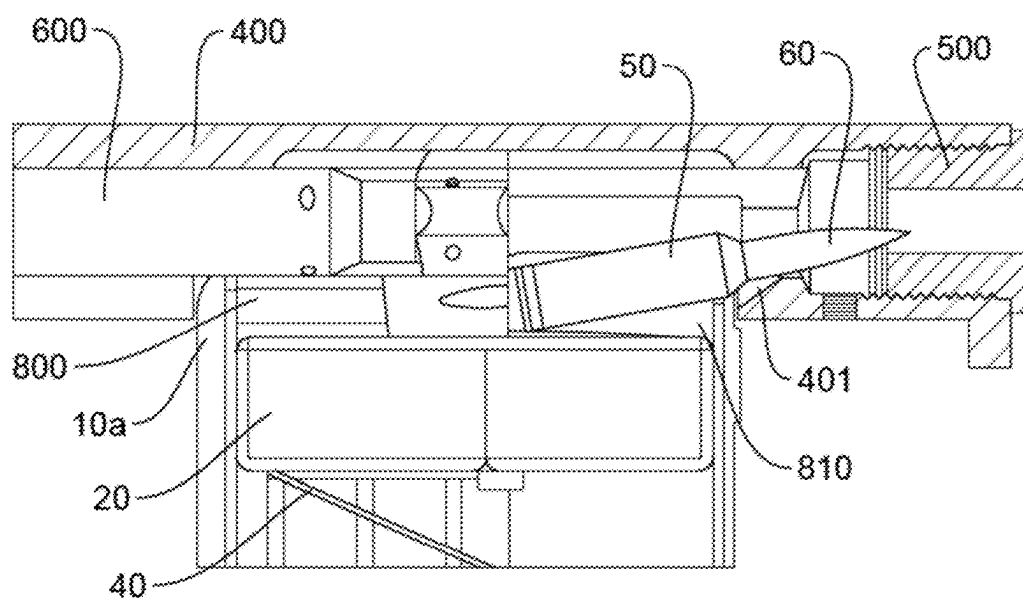


FIG. 21

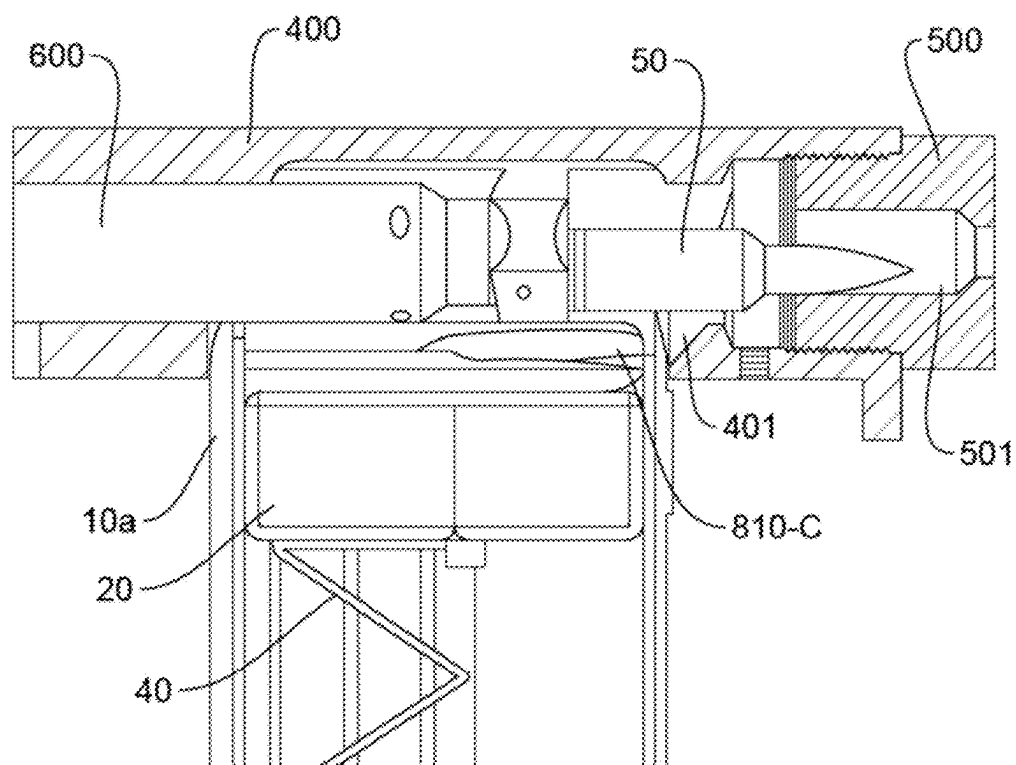


FIG. 22

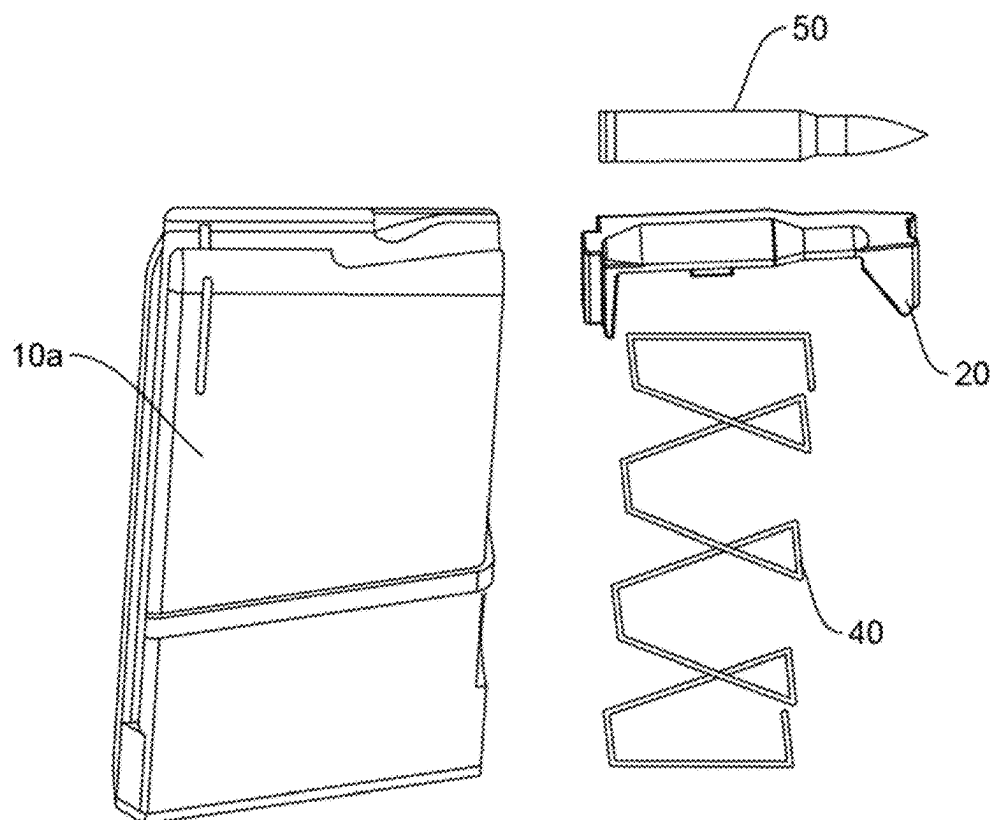


FIG. 23

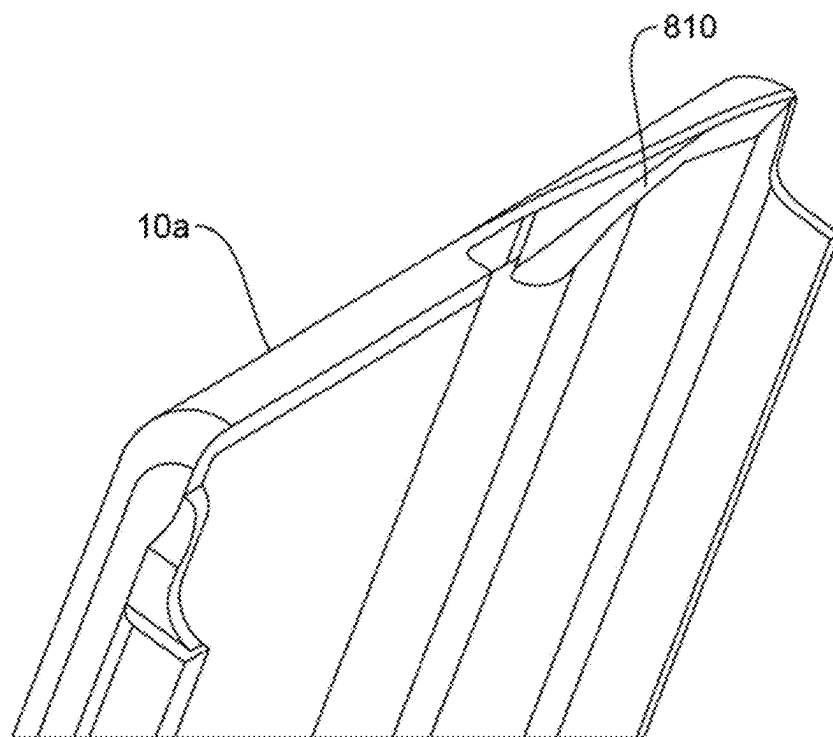


FIG. 24

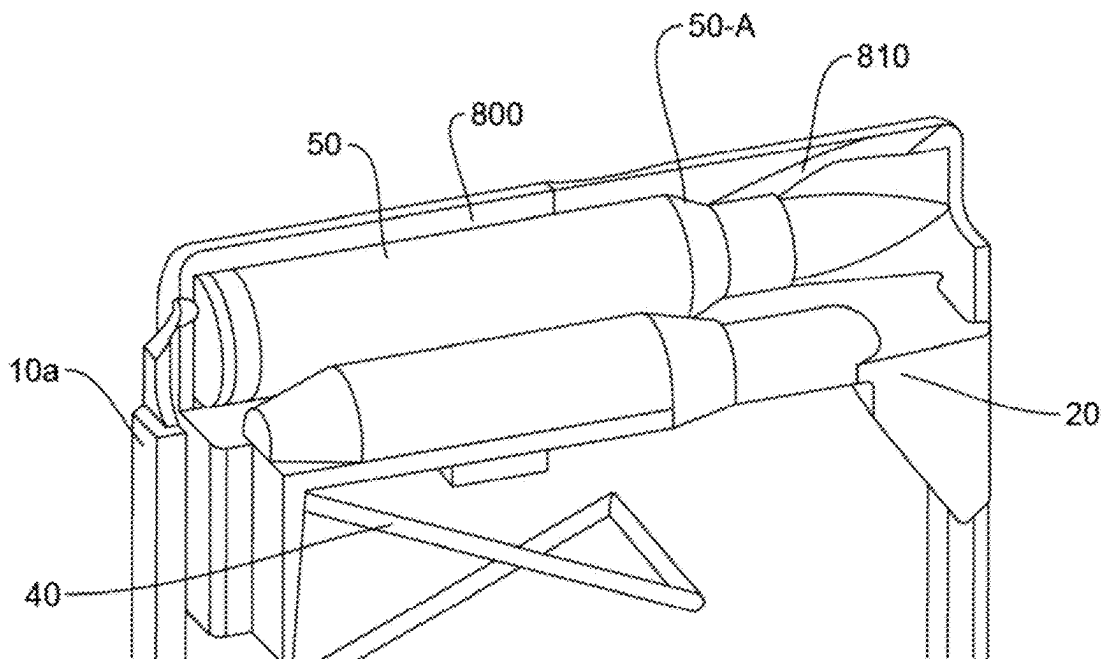


FIG. 25

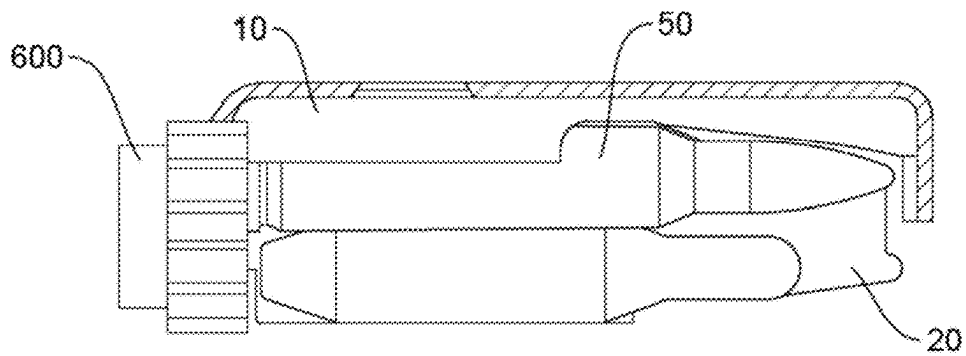


FIG. 26

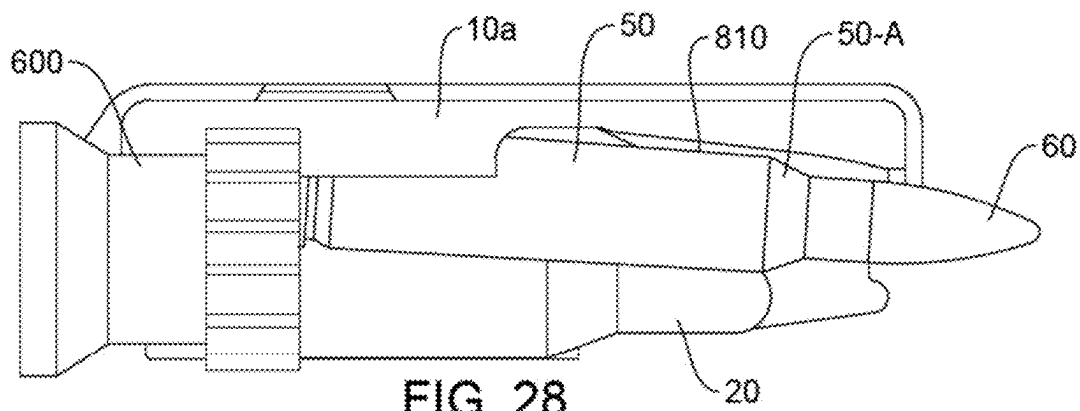


FIG. 28

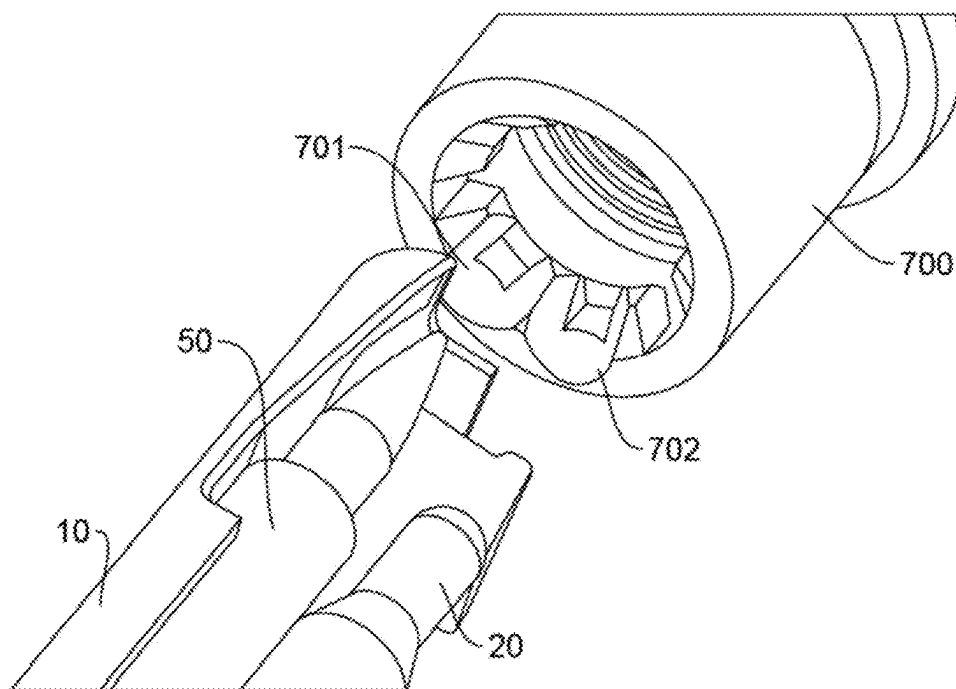


FIG. 27

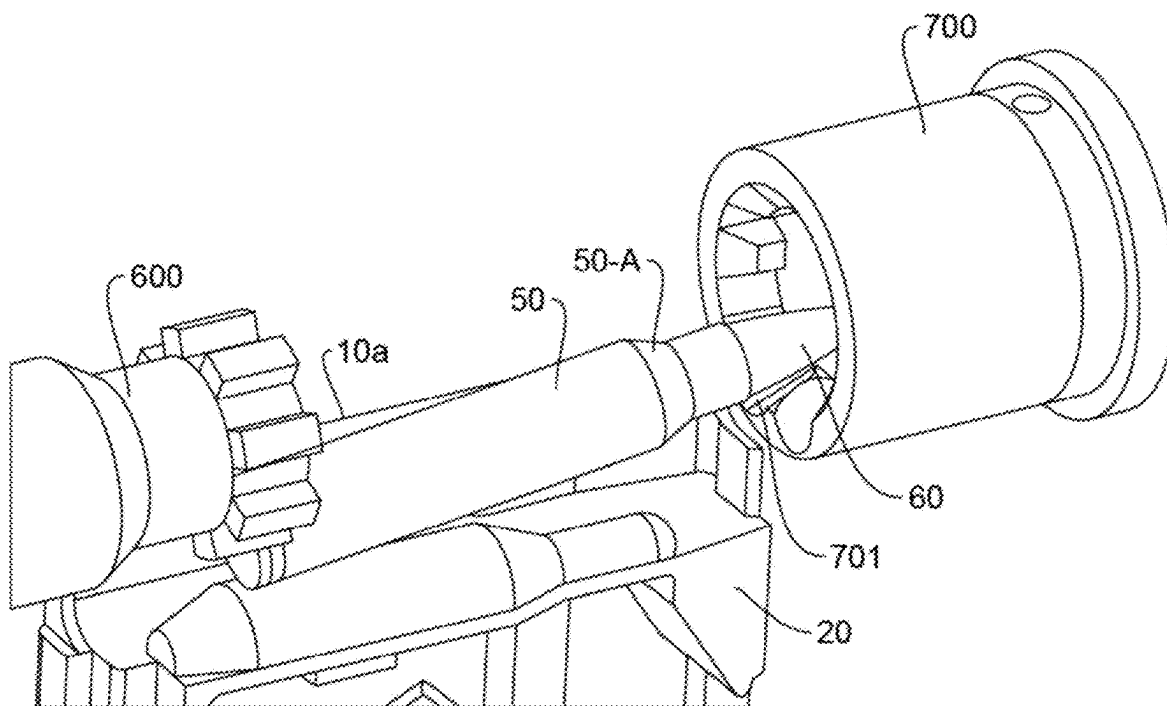


FIG. 29

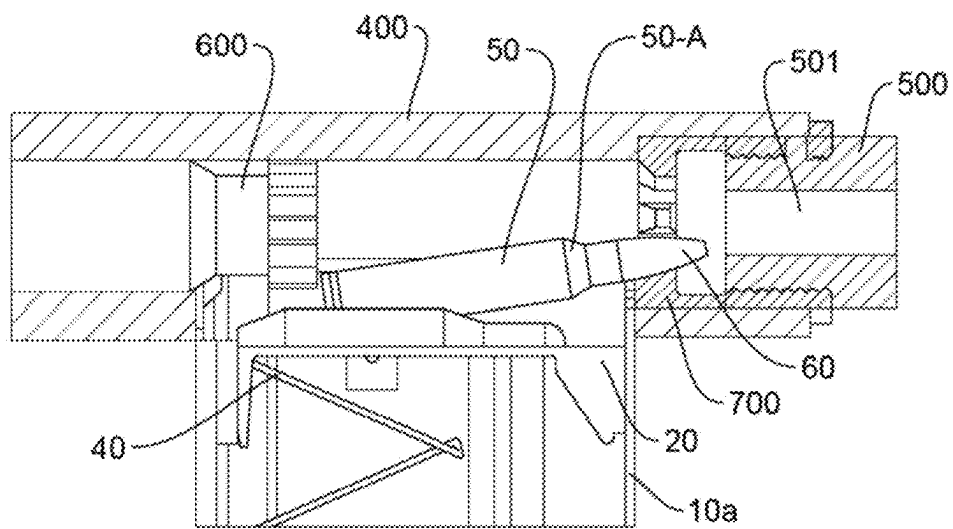


FIG. 30

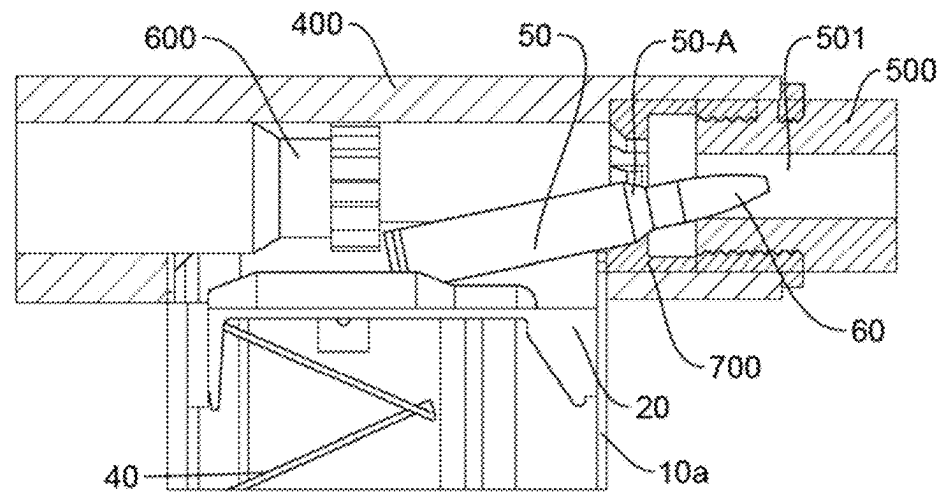


FIG. 31

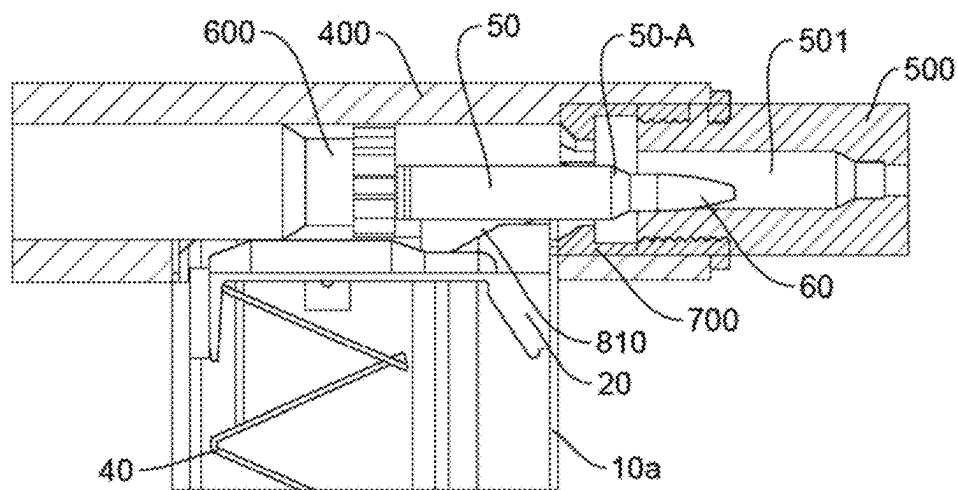


FIG. 32

## AMMUNITION MAGAZINE AND FOLLOWER

### PRIORITY CLAIM

[0001] This application is a Division of application Ser. No. 18/479,812, filed on Oct. 2, 2023, which is a Division of application Ser. No. 17/149,313 filed on Jan. 14, 2021, now Pat. No. 11,859,936 which claims priority to U.S. Provisional Patent Application Ser. No. 62/961,328 filed Jan. 15, 2020, and entitled “MAGAZINE BOX FOR A FIREARM,” U.S. Provisional Patent Application Ser. No. 62/984,294 filed Mar. 2, 2020, and entitled “DOUBLE ROW MAGAZINE BOX FOR A FIREARM,” and U.S. Provisional Patent Application Ser. No. 63/059,853 filed Jul. 31, 2020, and entitled “AMMUNITION MAGAZINE AND FOLLOWER,” the entirety of each of which is incorporated herein by reference and relied upon.

### BACKGROUND

[0002] Firearms, and especially rapid-feed semiautomatic rifles, are prone to cartridge misfeed issues. A firearm's failure to feed can be caused by one or more of dozens of different factors. A need persists for ammunition magazines that conveniently reduce or eliminate cartridge misfeeds.

### SUMMARY

[0003] The present disclosure provides single stack and double stack ammunition magazines and followers for use with any bottleneck shaped ammunition cartridge, such as a 5.7×30 cartridge, a 0.223 cartridge, or a 5.56 cartridge, and in any firearm, such as an AR15 or M16 firearm.

[0004] In some embodiments, the present disclosure provides an ammunition magazine configured to bottom-feed a plurality of ammunition cartridges into an upper receiver of a firearm, the ammunition magazine comprising: a magazine housing including a catch and a floor plate receiver; a spring within the magazine housing; a floor plate retainer disposed at a bottom end of the spring; a floor plate disposed at a bottom end of the magazine housing and reversibly mated with the floor plate retainer; and a magazine follower disposed at a top end of the spring, the magazine follower including: a cartridge-shaped protrusion on a top surface, a ramp on the top surface and disposed adjacent to the cartridge-shaped protrusion, a front leg disposed on a distal end of the magazine follower, and a rear leg disposed generally opposite the front leg.

[0005] In other embodiments, the present disclosure provides a magazine follower comprising: a cartridge-shaped protrusion on a top surface, a ramp on the top surface and disposed adjacent to the cartridge-shaped protrusion, a front leg disposed on a distal end of the magazine follower, and a rear leg disposed generally opposite the front leg.

[0006] In still other embodiments, the present disclosure provides an ammunition magazine comprising a magazine follower configured to orient all ammunition cartridges housed therewithin at an angle of about 0.2° to about 5° relative to a longitudinal axis of an associated chamber.

[0007] In other embodiments, the present disclosure provides a magazine follower configured to orient a first ammunition cartridge housed within an associated ammunition magazine at an angle of about 2° to about 20° relative to a top surface of the magazine follower.

[0008] In other embodiments, the present disclosure provides a single stack ammunition magazine comprising: a magazine housing base including: a left-hand feed ramp insert, a left-hand feed lip insert including a plurality of tabs, and a plurality of key seat slotted pockets configured to slidably mate with the tabs of the left-hand feed lip insert; a removable plate including: a right-hand feed ramp insert, a right-hand feed lip insert including a plurality of tabs, and a plurality of key seat slotted pockets to slidably mate with the tabs of the right-hand feed lip insert; a magazine spring disposed within a magazine housing defined by the magazine housing base and the removable plate; and a magazine follower disposed at a top end of the magazine spring.

[0009] In other embodiments, the present disclosure provides a double stack ammunition magazine comprising: a magazine housing base having an integrated left-hand feed ramp insert; a removable magazine box plate having an integrated right-hand feed ramp insert; a magazine spring disposed within a magazine housing defined by the magazine housing base and the removable magazine box plate; and a magazine follower disposed at a top end of the magazine spring.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 shows a perspective view of an ammunition magazine housing consistent with one embodiment of the present disclosure.

[0011] FIG. 2 shows a side plan view of the ammunition magazine of FIG. 1.

[0012] FIG. 3 shows a front plan view of the ammunition magazine of FIG. 1.

[0013] FIG. 4 shows a top plan view of the ammunition magazine of FIG. 1.

[0014] FIG. 5 shows a cross-sectional view of the ammunition magazine of FIG. 1.

[0015] FIG. 6 shows a perspective view of a follower consistent with one embodiment of the present disclosure.

[0016] FIG. 7 shows a top plan view of the follower of FIG. 6.

[0017] FIG. 8 shows a bottom plan view of the follower of FIG. 6.

[0018] FIG. 9A shows a side plan view of the follower of FIG. 6.

[0019] FIG. 9B shows a side plan view of the follower of FIG. 6 relative to an upper receiver of a firearm.

[0020] FIG. 10 shows a front plan view of the follower of FIG. 6.

[0021] FIG. 11 shows an exploded view of a magazine housing consistent with one embodiment of the present disclosure.

[0022] FIG. 12 shows a side view of the interior of a magazine housing consistent with one embodiment of the present disclosure.

[0023] FIG. 13 shows a side view of the interior of a magazine housing and a left-hand feed lip insert consistent with one embodiment of the present disclosure.

[0024] FIG. 14 shows a rear sectional view of the magazine housing of FIG. 11.

[0025] FIG. 15 shows a rear sectional view of the magazine housing of FIG. 11.

[0026] FIG. 16 shows a rear sectional view of the magazine housing of FIG. 11.



[0027] FIG. 17A shows a rear view of a left-hand feed ramp insert consistent with an embodiment of the present disclosure.

[0028] FIG. 17B shows a front view of the left-hand feed ramp insert of FIG. 17A.

[0029] FIG. 18 shows a magazine housing and receiver assembly in accordance with one embodiment of the present disclosure.

[0030] FIG. 19 shows a top plan view of a magazine housing and receiver assembly in accordance with one embodiment of the present disclosure.

[0031] FIG. 20 shows a magazine housing and receiver assembly in accordance with one embodiment of the present disclosure.

[0032] FIG. 21 shows a magazine housing and receiver assembly in accordance with one embodiment of the present disclosure.

[0033] FIG. 22 shows a magazine housing and receiver assembly in accordance with one embodiment of the present disclosure.

[0034] FIG. 23 is an exploded view of a magazine housing consistent with one embodiment of the present disclosure.

[0035] FIG. 24 is a side view of the interior of a magazine housing consistent with one embodiment of the present disclosure.

[0036] FIG. 25 is a side view of the interior of a magazine housing consistent with one embodiment of the present disclosure.

[0037] FIG. 26 is a top view of the interior of a magazine housing and a bolt consistent with one embodiment of the present disclosure.

[0038] FIG. 27 is a perspective view of a magazine housing and a barrel extension consistent with one embodiment of the present disclosure.

[0039] FIG. 28 is a top view of a magazine housing and a bolt consistent with one embodiment of the present disclosure.

[0040] FIG. 29 is a side view of a magazine housing, bolt, and barrel extension consistent with one embodiment of the present disclosure.

[0041] FIG. 30 is a side view of a magazine housing and receiver assembly in accordance with one embodiment of the present disclosure.

[0042] FIG. 31 is a side view of a magazine housing and receiver assembly in accordance with one embodiment of the present disclosure.

[0043] FIG. 32 is a side view of a magazine box and receiver assembly in accordance with one embodiment of the present disclosure.

#### DETAILED DESCRIPTION

[0044] In general, the present disclosure provides ammunition magazines and followers that enable feeding ammunition cartridges into a bolt assembly of a firearm without enabling contact between the bullet portion of the cartridge and an interior surface of the receiver portion of the firearm. Use of ammunition magazines and followers consistent with those disclosed herein significantly reduces or even prevents cartridge misfeed errors and the dangers associated therewith.

[0045] Referring now specifically to FIGS. 1-10, ammunition magazines consistent with the present disclosure include a magazine housing 10 and a follower 20. The follower 20 is disposed within a cavity 120 of the magazine

housing, and is configured to force one or more ammunition cartridges towards the top end of the magazine housing 10 and into an upper receiver of a firearm (not shown).

[0046] In some embodiments, the magazine housing 10 includes a catch 110 on its outer face; the catch 110 is configured to selectably mate with the magazine catch of a firearm's lower receiver (not shown) to secure the ammunition magazine to the lower receiver.

[0047] The cavity 120 is sized to accommodate two stacked, overlapping columns of ammunition rounds (e.g., a "double-stack" magazine). For example, a magazine housing 10 consistent with the present disclosure may include a cavity 120 sized and shaped to contain a double-stacked arrangement of 0.223 ammunition rounds and/or a double-stacked arrangement of 5.56 ammunition rounds. In another embodiment, the present disclosure may include a cavity 120 sized and shaped for a single nonoverlapping column of ammunition rounds.

[0048] In some embodiments, the magazine housing 10 further includes a tail recess 160 extending vertically through the magazine housing 10. The tail recess 160, when present, is disposed near the proximal end 112 of the magazine housing 10, and enables the follower 20 (described in more detail below) travels vertically through the magazine housing 10 smoothly.

[0049] The magazine housing 10 further includes a floor plate receiver 140 at the bottom of the magazine housing 10. The floor plate receiver 140 enables the floor plate (not shown) to slidably mate to the bottom of the magazine housing 10.

[0050] Referring now to FIGS. 6-10, a follower 20 consistent with the present disclosure and for use with a magazine housing 10 includes a cartridge-shaped protrusion 220, a ramp 230, optionally a front leg 280, and optionally a rear leg 270.

[0051] The top surface 210 contacts a first layer of ammunition rounds (not shown) within the cavity 120, and includes a cartridge-shaped protrusion 220 and a ramp 230. In some embodiments, the cartridge-shaped protrusion 220 includes a contour similar to that of an ammunition round, or a portion thereof.

[0052] In some embodiments, the top surface of the cartridge-shaped protrusion 220 is disposed at an angle  $\beta$  relative to the top surface 210 of the follower 20. In such embodiments, the angle  $\beta$  may be about 0.2° to about 5°, for example about 0.2°, about 0.3°, about 0.4°, about 0.5°, about 0.6°, about 0.7°, about 0.8°, about 0.9°, about 1°, about 1.1°, about 1.2°, about 1.3°, about 1.4°, about 1.5°, about 1.6°, about 1.7°, about 1.8°, about 1.9°, about 2°, about 2.1°, about 2.2°, about 2.3°, about 2.4°, about 2.5°, about 2.6°, about 2.7°, about 2.8°, about 2.9°, about 3°, about 3.1°, about 3.2°, about 3.3°, about 3.4°, about 3.5°, about 3.6°, about 3.7°, about 3.8°, about 3.9°, about 4°, about 4.1°, about 4.2°, about 4.3°, about 4.4°, about 4.5°, about 4.6°, about 4.7°, about 4.8°, about 4.9°, or about 5°. In some embodiments, the angle  $\beta$  is about 1.2° to about 2°. In some embodiments, the angle  $\beta$  is about 1.4° to about 1.8°. In some embodiments, the angle  $\beta$  is about 1.5°.

[0053] The ramp 230 is disposed near the distal end of the follower 20. The ramp 230 is configured to force the bullet-side tip of an ammunition cartridge upwards and towards the center of the chamber of an upper receiver (not shown) when the ammunition cartridge is advanced out of the magazine housing 10. In some embodiments, the ramp

**230** is configured such that the bullet portion of the cartridge does not contact an interior surface of the receiver of the firearm until the bullet portion reaches the barrel of the firearm. The ramp **230** is defined by an attack angle  $\alpha$  measured between the surface of the ramp **230** and the surface **210** of the follower **20**. The attack angle  $\alpha$  may vary depending on the make and model of the firearm, the upper receiver, and/or the cartridge to be used with the ammunition magazine. For example, the attack angle  $\alpha$  for a ramp **230** of a follower **20** consistent with the present disclosure for use with a 5.7×30 bottleneck round may be about 11° to about 12°, such as about 11.5°. In another non-limiting example, the attack angle  $\alpha$  for the ramp **230** of a follower **20** consistent with the present disclosure for use with a 5.56 caliber cartridge may be about 10° to about 11°, such as about 10.6°. More generally, however, the attack angle  $\alpha$  is about 2° to about 20°, for example about 2°, about 3°, about 4°, about 5°, about 6°, about 7°, about 8°, about 9°, about 10°, about 11°, about 12°, about 13°, about 14°, about 15°, about 16°, about 17°, about 18°, about 19°, or about 20°. In some embodiments, the attack angle  $\alpha$  is about 11°. In some embodiments, the attack angle  $\alpha$  is about 10.6°. In some embodiments, the attack angle  $\alpha$  is about 2.5° to about 20°. In some embodiments, the attack angle  $\alpha$  is about 10° to about 12°. In some embodiments, the attack angle  $\alpha$  is about 16°.

**[0054]** Measured another way, depicted representatively in FIG. 9B, the ramp **230** defines a guidance angle  $\gamma$  between the ramp surface **230a** and the longitudinal axis Ba of the barrel B of the upper receiver UR sufficient that the bullet portion of the cartridge does not contact an interior surface of the barrel extension Be of the upper receiver UR until the bullet portion reaches the barrel B. The guidance angle  $\gamma$  may vary depending on the make and model of the firearm, the upper receiver, and/or the cartridge to be used with the ammunition magazine. For example, the guidance angle  $\gamma$  for a ramp **230** of a follower **20** consistent with the present disclosure for use with a 5.7×30 bottleneck round may be about 11° to about 12°, such as about 11.5°. In another non-limiting example, the guidance angle  $\gamma$  for use with a 5.56 caliber cartridge may be about 10° to about 11°, such as about 10.6°. More generally, however, the guidance angle  $\gamma$  is about 2° to about 20°, for example about 2°, about 3°, about 4°, about 5°, about 6°, about 7°, about 8°, about 9°, about 10°, about 11°, about 12°, about 13°, about 14°, about 15°, about 16°, about 17°, about 18°, about 19°, or about 20°. In some embodiments, the guidance angle  $\gamma$  is about 11°. In some embodiments, the guidance angle  $\gamma$  is about 10.6°. In some embodiments, the guidance angle  $\gamma$  is about 2.5° to about 20°. In some embodiments, the guidance angle  $\gamma$  is about 10° to about 12°. In some embodiments, the guidance angle  $\gamma$  is about 16°.

**[0055]** In some embodiments, the ramp **230** includes a concave top surface **230a** and/or a longitudinal channel **230a** oriented parallel to the longitudinal length of the ammunition cartridge and configured to align the ammunition cartridge with a center line CL of the ramp **230** and towards the chamber as the ammunition cartridge is advanced into the chamber. In some embodiments, the shoulder of the last ammunition cartridge within the magazine **10** contacts and slides along the concave top surface **230a** as the last ammunition cartridge is advanced into the chamber, but the bullet portion of the ammunition cartridge does not contact the ramp **230**. In some embodiments, the bullet portion of the

ammunition cartridge also does not contact a feed ramp of the lower receiver, but instead is forced into the chamber without contacting any interior surface of the lower receiver. **[0056]** In some embodiments, a channel **240** is disposed proximal to the ramp **230** and is configured to align the ammunition cartridge with the center line CL of the ramp **230**. The channel **240**, when present, includes an interior radius orthogonal to the longitudinal length of an associated ammunition cartridge and approximately the same radius as or slightly larger than the outer radius of the ammunition cartridge.

**[0057]** The tail fin **260** slidably mates with the tail recess **160**. The tail fin **260** generally has a width of about 25% to about 50% of the overall width of the magazine housing **10**, for example about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, or about 50% of the overall width of the magazine housing **10**.

**[0058]** In operation, the first loaded ammunition round is inserted laterally to contact the ramp **230**, and is held to one side of the cavity **120** due to the cartridge-shaped protrusion **220** contacting the ammunition round casing. The second loaded ammunition round contacts both the first loaded ammunition round and the cartridge-shaped protrusion **220**, and is held to the other side of the cavity **120**.

**[0059]** As shown best in FIGS. 9A-9B, the follower **20** may also include a spring hook **290** between the front leg **280** and the rear leg **270**. The spring hook **290**, when present, reversibly mates with the top end of the spring **250**.

**[0060]** In some embodiments, the present disclosure provides a magazine housing **10** and associated follower **20** that, together with a spring, form an ammunition magazine. The follower **20** is disposed within a cavity **120** of the magazine housing, and is configured to force one or more ammunition cartridges towards the top end of the magazine housing **10** and into an upper receiver of a firearm (not shown). The magazine housing **10** includes a catch **110** on its outer face, a cavity **120** in which the follower **20** and an associated spring **250** are disposed, a tail recess **160** extending vertically through the magazine housing **10**, and a floor plate receiver **140**; while the follower **20** includes a cartridge-shaped protrusion **220** and a ramp **230** disposed on its top surface **210**, a front leg **280**, a rear leg **270**, and a tail fin **260** disposed on the rear leg **270**. The upper surface of the cartridge-shaped protrusion **220** is disposed at an angle  $\beta$  of about 1.4-1.8° relative to the top surface **210** of the follower **20**, while the top surface of the ramp **230** is disposed at an angle  $\alpha$  of about 10-16° relative to the top surface **210** of the follower **20**. The follower **20** and its ramp **230** operate to direct cartridges loaded within the cavity **120** of the ammunition magazine into substantially the center of a chamber of a lower receiver (not shown) without the bullet portion of the cartridge contacting an inner surface of the lower receiver until the bullet portion enters the barrel of the firearm.

**[0061]** In some embodiments, such as those generally consistent with FIGS. 1-10, the ammunition magazine is configured to hold two stacks of cartridges that are partially interlaced (e.g., a double stack configuration).

**[0062]** In other embodiments, the ammunition magazine is configured to hold a single stack of cartridges, each resting on top of the cartridge below (e.g., a single stack configura-

ration). In such embodiments, the follower **20** includes the ramp **230** and optionally the channel **240**, but does not include the cartridge-shaped protrusion **220**. The ramp **230** and, if present, the channel **240** are disposed mid-way laterally across the width of the follower surface **210**, rather than being offset towards one side of the follower surface **210** as shown in the double stack embodiment depicted specifically in FIGS. **1-10**.

[**0063**] Regardless of whether the ammunition magazine enables a single stack or a double stack configuration of loaded cartridges, the magazine housing **10** and the follower **20** cooperate to enable feeding of an ammunition cartridge from the cavity **120** into a chamber of an upper receiver without enabling contact between the bullet portion of the cartridge and the feed ramp of the upper receiver (not shown). By reducing or eliminating contact between the ammunition cartridge and the feed ramp, damage to the cartridge—and therefore risk and rate of cartridge misfeed and misfire—is also reduced or eliminated. In some embodiments, the rate of cartridge misfeed and misfire associated with an ammunition magazine of the present disclosure is reduced by at least about 50% compared to an ammunition magazine including a follower inconsistent with the present disclosure, for example by about 50%, by about 55%, by about 60%, by about 65%, by about 70%, by about 75%, by about 80%, by about 85%, by about 90%, by about 95%, by about 96%, by about 97%, by about 98%, by about 99%, or by about 100%.

[**0064**] Referring now to FIG. **11-13**, an alternative embodiment is shown of a magazine housing, intended to be mounted into a rifle receiver of a firearm. In one embodiment the magazine housing includes a base **10a**, a removable plate **11**, a left-hand feed lip insert **800** and a right-hand feed lip insert **900**; a left-hand feed ramp insert **810** and a right-hand feed ramp insert **910**; a magazine follower **20** and a spring **40**.

[**0065**] Referring specifically to FIG. **12**, a left-hand feed lip insert **800** and left-hand feed ramp insert **810** are disposed on the inside of the base **10a**. A right-hand feed lip insert **900** and right-hand feed ramp **910** are disposed on the inside of a removable housing plate **11** (not shown), which is substantially a mirror image of the magazine housing base **10a** illustrated in FIG. **12**. The removable housing plate **11** including the right-hand feed lip insert **900** and the right-hand feed ramp **910** reversibly mates with the magazine housing base piece **10a** including the left-hand feed lip insert **800** and the left-hand feed ramp **810** to define a magazine housing. A magazine follower **20** is disposed within the magazine housing, and is pressurized by a spring **40** configured to elevate a cartridge **50** against left-hand feed lip insert **800** and right-hand feed lip insert **900**. The left-hand feed lip insert **800** and the right-hand feed lip insert **900** cooperate to hold the cartridge in place generally in midway between the outer wall of the magazine housing base **10a** and the outer wall of the removable housing plate **11**.

[**0066**] Referring now to FIG. **13**, the magazine housing base **10a** may in some embodiments include one or more key seat slotted pockets **911**, **912**, **913** disposed in the left inner side wall to accept and mate with tabs **1111**, **1112**, **1113** respectively of the left-hand feed lip insert **800**. In such embodiments, the key seat slotted pockets **911**, **912**, **913** are configured to accept tabs **1111**, **1112**, **1113** such that the tabs **1111**, **1112**, **1113** are slidably engaged with the magazine housing base **10a** to enable smooth and reliable up-and-

down movement of the left-hand feed lip insert **800** within the magazine housing. Similarly, the magazine housing plate **11** may include one or more key seat slotted pockets **921**, **922**, **923** disposed on the interior of magazine housing plate **11** to accept tabs **1121**, **1122**, **1123** of the right-hand lip insert **900**. Key seat slotted pockets **921**, **922**, **923** are configured to slidably mate with tabs **1121**, **1122**, **1123** to enable smooth and reliable up-and-down movement of the right-hand feed-lip insert **900** within the magazine housing.

[**0067**] Referring now to FIGS. **14-16**, a rear cutaway view of one embodiment of a magazine of the present disclosure shows an assembled magazine box **10** holding a cartridge **50** in position between the left-hand feed lip insert **800** and the right-hand feed lip insert **900**.

[**0068**] Referring specifically to FIG. **14**, a rear view of an assembled magazine box shows the left-hand feed lip insert **800** and the right-hand feed lip insert **900** in their topmost positions of the magazine housing **10**. The magazine housing base **10a** and removable plate **11** are shown assembled for use as magazine housing **10**. Magazine follower **20** raises the cartridge into position between left-hand feed lip insert **800** and right-hand feed lip insert **900** due to upward pressure from follower spring **40**. The key seat slotted pocket **911** of the magazine housing base **10a** and the key seat slotted pocket **921** of the removable plate **11** both have empty clearances at bottom locations with the left-hand feed lip insert **800** and the right-hand feed lip **900** both in their topmost positions. Cartridge **50** is shown at the magazine top opening, resting on inside corners **815** and **915** of left-hand feed lip insert **800** and right-hand feed lip insert **900**, respectively.

[**0069**] FIG. **15** shows a cartridge **50** pressed downward (arrow) against inside corners **815** and **915** of left-hand feed lip insert **800** and right-hand feed lip insert **900**, respectively. Magazine follower **20** and spring **40** are also shown moving away from cartridge **50** in a downward direction (arrow). When the cartridge **50** is pressed against inside corners **815** and **915** of left-hand feed lip insert **800** and right-hand feed lip insert **900** respectively, any empty clearance remaining for key seat slotted pocket **911** is filled by the tab **1111** until the left-hand feed lip insert **800** reaches location D. Simultaneously, the key seat slotted pocket **921** is filled by the tab **1121** until the right-hand feed lip **900** reaches location C. Upon discontinuation travel of the left-hand feed lip insert **800** and the right-hand feed lip insert **900**, continued downward pressure of cartridge **50** will cause left-hand feed lip insert **800** and right-hand feed lip insert **900**, both of flexible construction, to widen into positions B and A as shown in FIG. **15**. When the left-hand feed lip insert **800** flexes to position B and the right-hand feed lip insert **900** flexes to position A, the cartridge **50** may pass by inside corners **815** and **915** and into the interior of the magazine housing.

[**0070**] As shown in FIG. **16**, a cartridge **50** has already been forced beyond the inside corner **815** of the left-hand feed lip and the inside corner **915** of the right-hand feed lip insert **900**. The cartridge **50** is retained in this configuration until the bolt of a firearm forces the cartridge **50** from the magazine into a chamber, or until another cartridge **50** is forced into the magazine on top of the first cartridge **50**. In some embodiments, both the left-hand feed lip **800** and the right-hand feed lip **900** are sufficiently flexible to enable their respective side walls to relax from their flexed positions A/B (FIG. **15**) to prevent cartridge **50** from exiting the top of the magazine opening. The flexible characteristics of

the left-hand feed lip **800** and the right-hand feed lip **900** also enable the cartridge **50** to be gently but firmly secured approximately centrally between the magazine housing base **10a** and the removable housing plate **11** (e.g., laterally central). Decompression of spring **40** will elevate the magazine follower **20**, pressing the cartridge **50** into the inner surfaces of the left-hand feed lip insert **800** and the right-hand feed lip insert **900** to allow both to be elevated into their top-most position.

[0071] The process of loading cartridges as described above may be repeated until the magazine housing **10** reaches full capacity. In one embodiment, loading cartridges **50** from top to bottom is improved by the elasticity of both the left-hand feed lip insert **800** and the right-hand feed lip insert molding to the cartridge **50** holding the cartridge **50** in the desired location. Another improvement provided by the elastic material of the left-hand feed lip insert **800** and right-hand feed lip insert **900** is the prevention of scoring to any surfaces of cartridges **50** during use.

[0072] In some embodiments, the left-hand feed lip insert **800** and the right-hand feed lip insert **900** cooperate to position the top-most cartridge **50** substantially centrally between the left-hand feed lip insert **800** and the right-hand feed lip insert **900**, reducing the rate of cartridge misfeeds into the chamber of an associated lower receiver/firearm.

[0073] Referring now to FIGS. **17A-17B**, the left-hand feed lip insert may in some embodiments include a ramping surface **810-C**. A right-hand feed ramp **910** (e.g., consistent with that shown in FIG. **11**) may be substantially a mirror image of the left-hand feed ramp insert **810** shown in FIGS. **17A-17B**, and may include a ramping surface **910-C** (not shown). The ramping surfaces **800-C/900-C**, when present, improve alignment of the cartridge **50** while the bolt forces the cartridge **50** into a chamber.

[0074] Referring now specifically to FIGS. **18-22**, in some embodiments a magazine housing assembly **10** including a base **10a**, a left-hand feed lip insert **800**, left-hand feed ramp insert **810**, a right-hand feed lip insert **900** (not shown for clarity), a right-hand feed ramp insert **910** (not shown for clarity), a magazine follower **20**, and a spring **40**, is assembled to form a magazine box, which is then mounted onto a receiver **400**.

[0075] Receiver **400** is shown in cutaway view for clarity, and includes a bolt **600** configured to move towards the barrel **500** to force cartridges **50** from the magazine box into the firing chamber **501** of barrel **500**. In one embodiment, the receiver **400** also includes an integral feed ramp **401** to further assist in guiding the cartridge **50** into position in the firing chamber **501**.

[0076] Referring now to FIG. **19**, the bolt **600** is in a retracted position (away from the barrel **500**). When the bolt is in this retracted position, cartridge **50** is forced upward into position between the left-hand feed lip insert **800** and the right-hand feed lip insert **900**. After the cartridge **50** is elevated to this position, the bolt **600** may be moved towards the chamber **501** to slidably engage the cartridge **50**. As the bolt **600** continues to advance towards the barrel **500**, the shoulder **50-A** of cartridge **50** contacts the ramping surface **810-C** of left-hand feed ramp insert **810** and the ramping surface **910-C** of the right-hand feed ramp insert **910** (not shown for clarity). Continued forward movement of the bolt **600** continues to force the cartridge **50** along the ramping surface **810-C** of the left-hand feed ramp insert **810** and along the ramping surface **910-C** of the right-hand feed ramp

insert **910** (not shown), forcing the bullet **60** portion of the cartridge **50** to move past the feeding ramp **401** without contacting the feeding ramp **401**. As bolt **600** continues to advance, the cartridge **50** continues to slide towards the barrel **500**, releasing cartridge **50** from the left-hand feeding lip insert **800** and its ramping surface **810-C**, and from the right-hand feeding lip insert **900** and its ramping surface **910-C** (not shown).

[0077] Upon release of the cartridge **50** into the chamber **501**, the bolt **600** retracts and the next cartridge **50** available in the magazine **10** will be forced upward to the left-hand feeding lip insert **800** and the right-hand feeding lip insert **900** (not shown) and into position for loading into the chamber **401**. Upon retraction of the bolt **600**, the spent cartridge **50** is ejected from the receiver **400** and the next cartridge **50** available in the magazine **10** can repeat the cycle described above, with each cartridge **50** contacting the left-hand feed ramp surface **810** and the right-hand feed ramp surface **910** as each cartridge is forced from the magazine **10** into the chamber **401**, until all cartridges **50** in the magazine **10** have been expended. In some embodiments, no bullet portion **60** of cartridges **50** within a magazine **10** contact inner surfaces of the firearm before the bullet portions **60** are expelled through the barrel of the firearm (at which point the bullet portions **60** may each contact inner surfaces of the barrel). Magazines **10** consistent with the present disclosure operate to prevent the bullet portions **60** of cartridges **50** from disruption, damage, or scoring during the process of transferring the cartridge **50** and its associated bullet portion **60** from the magazine **10** to the chamber **401**. Further, the left-hand feed ramp **810** and right-hand feed-ramp **910** inserts comprise, consist, or consist essentially of a flexible material, such as rubber, plastic, foam, polymer, or a combination thereof, substantially reduce or prevent scoring to the cartridge case during the loading process.

[0078] Referring specifically to FIGS. **23-29**, another embodiment of a magazine **10** consistent with the present disclosure includes a magazine housing base **10a**, a follower **20**, and a spring **40**. Also, shown in FIG. **23** is a bottle-neck style cartridge **50** consistent with the type of ammunition round used by at least one embodiment of the present disclosure. The magazine **10** of may have a double row or double-stack design as shown in FIGS. **23-29**. In another embodiment, the magazine housing **10** may be configured to hold only a single row of cartridges **50**.

[0079] FIG. **24** illustrates a magazine housing base **10a** including a left-hand feed ramp surface **810** integrally formed as a protrusion on the inner surface of magazine housing base **10a**. Similarly, right-hand feed ramp surface **910** is a substantially mirror-image of the left-hand feed ramp surface **810**, and is also integrally formed on the inner surface of the opposite half of the magazine housing base **10a** (not shown for clarity), which may be substantially a mirror image of the illustrated half of the magazine housing base **10a**.

[0080] As shown in FIG. **25**, cartridge **50** is loaded into magazine **10** by compressing the magazine follower **20** and the magazine spring **40** downward. When the follower **20** and the spring **40** are compressed, the cartridge **50** is held against the left-hand feed lip **800** and the right-hand feed lip **900** (not shown). Cartridge **50** may have a conventional bottle neck design including a shoulder **50-A** that contacts the feed ramp surfaces **810/910**. An additional cartridge **50** loaded into the magazine **10** will depress the initial cartridge

50 into the interior of magazine 10 along with the follower 20 by further compressing the spring 40. As shown in FIG. 26, the bolt 600 of a firearm initially contacts the rear surface of the cartridge 50 when advancing towards the chamber 501. FIG. 27 shows a magazine housing 10 aligning a cartridge 50 with a barrel extension 700 that includes a left-hand loading slot 701 and a right-hand loading slot 702. Loading slots 701 and 702 are configured to help guide a cartridge from a conventional double-stack ammunition magazine into the chamber 501.

[0081] FIG. 28 is an isometric view of FIG. 27, and illustrates the cartridge 50 being advanced by the bolt 600 until the cartridge shoulder 50-A contacts the feed ramp surfaces 810/910 of the magazine 10. The feed ramp surfaces 810/910 guide cartridge shoulder 50-A away from the outer walls of the magazine 10 and towards the center of the chamber 501 such that the bullet 60 does not contact the loading slots 701 and 702 of the barrel extension 700, or any other interior surface of the barrel extension 700.

[0082] Referring specifically to FIG. 30-32, a magazine 10 is shown mounted to a receiver 400 with its bolt 600 pushing the cartridge 50 along the surface of feed ramps 810/910 to guide the cartridge 50 and its bullet 60 through the barrel extension 700 and into the chamber 501 of the barrel 500. The bullet 60 of the cartridge 50 does not contact interior surfaces of the barrel extension 700 as it is forced into the firing chamber 501 of barrel 500. Upon retraction of the bolt 600, the spent cartridge 50 is ejected from the receiver 400 and the next cartridge 50 available in the magazine 10 can repeat the cycle described above, with each successive cartridge 50 alternately contacting the left-hand feed ramp surface 810 and the right-hand feed ramp surface 910, until all of the cartridges 50 in the magazine 10 have been expended. In such embodiments, all cartridges 50 in a double-stack magazine 10 consistent with the present disclosure are expelled from the magazine 10 without disruption or scoring of the bullets 60 during the loading process.

[0083] In some embodiments, the present disclosure provides an ammunition magazine configured to bottom-feed a plurality of ammunition cartridges into an upper receiver of a firearm, the ammunition magazine comprising: a magazine housing including a catch and a floor plate receiver; a spring within the magazine housing; a floor plate retainer disposed at a bottom end of the spring; a floor plate disposed at a bottom end of the magazine housing and reversibly mated with the floor plate retainer; and a magazine follower disposed at a top end of the spring, the magazine follower including: a cartridge-shaped protrusion on a top surface, a ramp on the top surface and disposed adjacent to the cartridge-shaped protrusion, a front leg disposed on a distal end of the magazine follower, and a rear leg disposed generally opposite the front leg. In some embodiments, the ammunition round is a 0.223 inch round. In some embodiments, the ammunition round is a 5.56 mm round. In some embodiments, the magazine follower further comprises a tail fin configured to slide vertically within a tail recess of the magazine housing. In some embodiments, the ramp is configured to enable a cartridge to be fed from the ammunition magazine to a chamber of an upper receiver of a firearm without enabling a bullet portion of the cartridge to contact a feed ramp of the upper receiver.

[0084] In some embodiments, the present disclosure provides a magazine follower comprising: a cartridge-shaped protrusion on a top surface, a ramp on the top surface and

disposed adjacent to the cartridge-shaped protrusion, a front leg disposed on a distal end of the magazine follower, and a rear leg disposed generally opposite the front leg. In some embodiments, the magazine follower further comprises a tail fin disposed adjacent the rear leg and configured to slidably mate with a tail recess of a magazine housing. In some embodiments, the ramp is configured to enable a cartridge to be fed from the ammunition magazine to a chamber of an upper receiver of a firearm without enabling a bullet portion of the cartridge to contact a feed ramp of the upper receiver.

[0085] In some embodiments, the present disclosure provides an ammunition magazine comprising a magazine follower configured to orient all ammunition cartridges housed therewithin at an angle of about 0.2° to about 5° relative to a longitudinal axis of an associated chamber. In some embodiments, the angle is about 1.5°. In some embodiments, the magazine follower does not contact a bullet portion of the ammunition cartridges. In some embodiments, a bullet portion of the ammunition cartridges do not contact a feed ramp proximate to the associated chamber. In some embodiments, the follower includes a ramp on its top surface, and wherein the ramp is configured to orient a first ammunition cartridge housed within the ammunition magazine at an angle of about 2° to about 20° relative to the top surface.

[0086] In some embodiments, the present disclosure provides a magazine follower configured to orient a first ammunition cartridge housed within an associated ammunition magazine at an angle of about 0.2° to about 5° relative to a top surface of the magazine follower. In some embodiments, the magazine follower comprises a ramp on its top surface, wherein the ramp is configured to orient the first ammunition cartridge housed within the associated ammunition magazine at an angle of about 0.2° to about 5° relative to the top surface. In some embodiments, the follower is configured to not contact a bullet portion of the ammunition cartridge. In some embodiments, the ramp includes a concave top surface and/or a groove oriented along its longitudinal length.

[0087] In some embodiments, the ammunition cartridge is a shouldered cartridge. In some embodiments, the ammunition cartridge is a 0.223 cartridge, a 5.7×30 cartridge, a 5.56 cartridge.

[0088] In some embodiments, the present disclosure provides a single stack magazine comprising a magazine housing base including a left-hand feed ramp insert, a left-hand feed lip insert including a plurality of tabs, and a plurality of key seat slotted pockets configured to slidably mate with the tabs of the left-hand feed lip insert; a removable plate including a right-hand feed ramp insert, a right-hand feed lip insert including a plurality of tabs, and a plurality of key seat slotted pockets to slidably mate with the tabs of the right-hand feed lip insert; a magazine spring disposed within a magazine housing defined by the magazine housing base and the removable plate; and a magazine follower disposed at a top end of the magazine spring. In some embodiments, the base includes key seat slotted pockets to accept corresponding tabs of a left-hand feed lip insert allowing up and down movement of the left-hand feed lip insert. In some embodiments, the left-hand feed lip comprises an elastic material. In some embodiments, the key seat slotted pockets are configured to cooperate with the tabs of the right-hand feed lip insert to enable up-and-down movement of the right-hand feed lip insert within the magazine housing. In some embodiments, the right-hand feed lip insert comprise an

elastic material. In some embodiments, the magazine is configured to enable top-loading of an ammunition cartridge into the magazine housing. In some embodiments, the magazine follower comprises a top surface including a cartridge-shaped protrusion and a ramp disposed adjacent to the cartridge-shaped protrusion. In some embodiments, the cartridge has a common bottle-neck design including a shoulder. In some embodiments, the left-hand feed ramp insert and the right-hand feed ramp insert each contact a shoulder of an ammunition cartridge to guide the cartridge into a chamber without enabling a bullet portion of the cartridge to contact an inner surface of the chamber.

**[0089]** In some embodiments, the present disclosure provides a double stack ammunition magazine comprising a magazine housing base having an integrated left-hand feed ramp; a removable magazine box plate having an integrated right-hand ramp insert; a magazine spring disposed within a magazine housing defined by the magazine housing base and the removable magazine box plate; and a magazine follower disposed at a top end of the magazine spring. In some embodiments, the right-hand ramp inserts and the left-hand ramp inserts are each configured to guide a cartridge including a bullet portion from the magazine housing into a barrel extension without the bullet portion contacting an interior surface of the barrel extension. In some embodiments, the right-hand feed ramp insert and the left-hand feed ramp insert each contact a shoulder of the cartridge to guide the cartridge into a chamber without enabling a bullet portion of the cartridge to contact an inner surface of the chamber. In some embodiments, the barrel extension includes a right-hand loading slot and a left-hand loading slot configured to guide a cartridge from the magazine into a chamber. In some embodiments, the left-hand feed ramp insert is configured to contact a shoulder of a cartridge, but not a bullet portion of the cartridge, upon the cartridge being advanced towards the barrel extension by a bolt. In some embodiments, the right-hand feed ramp insert is configured to contact a shoulder of a cartridge, but not a bullet portion of the cartridge, upon the cartridge being advanced towards the barrel extension by a bolt. In some embodiments, the cartridge has a common bottle-neck design including a shoulder.

**[0090]** While the present disclosure has been shown and described herein by illustrating the results and advantages over the prior art, the disclosure is not limited to those specific embodiments. Thus, the forms of the disclosure shown and described herein are to be taken as illustrative only and other embodiments may be selected by one having ordinary skill in the art without departing from the scope of the present invention.

What is claimed is:

1. An ammunition magazine comprising a magazine follower configured to orient all ammunition cartridges housed therewithin at an angle of about  $0.2^\circ$  to about  $5^\circ$  relative to a longitudinal axis of an associated chamber.

2. The ammunition magazine of claim 1, wherein the angle is about  $1.5^\circ$ .

3. The ammunition magazine of claim 1, wherein the magazine follower does not contact a bullet portion of the ammunition cartridges.

4. The ammunition magazine of claim 1, wherein a bullet portion of the ammunition cartridges do not contact a feed ramp proximate to the associated chamber.

5. The ammunition magazine of claim 1, wherein the follower includes a ramp on its top surface, and wherein the ramp is configured to orient a first ammunition cartridge housed within the ammunition magazine at an angle of about  $2^\circ$  to about  $20^\circ$  relative to the longitudinal axis of the associated chamber.

6. A magazine follower configured to orient a first ammunition cartridge housed within an associated ammunition magazine at an angle of about  $2^\circ$  to about  $20^\circ$  relative to a top surface of the magazine follower.

7. The magazine follower of claim 6 comprising a ramp on its top surface, wherein the ramp is configured to orient the first ammunition cartridge housed within the associated ammunition magazine at an angle of about  $2^\circ$  to about  $20^\circ$  relative to the top surface.

8. The magazine follower of claim 6, wherein the follower is configured to not contact a bullet portion of the ammunition cartridge.

9. The magazine follower of claim 7, wherein the ramp includes a concave top surface and/or a groove oriented along its longitudinal length.

10. The magazine follower of claims 6, wherein the ammunition cartridge is a shouldered cartridge.

11. The magazine follower of claim 10, wherein the ammunition cartridge is a 0.223 cartridge or a 5.56 cartridge.

12. A double stack ammunition magazine comprising:

- a) a magazine housing base having an integrated left-hand feed ramp insert;
- b) a removable magazine box plate having an integrated right-hand feed ramp insert;
- c) a magazine spring disposed within a magazine housing defined by the magazine housing base and the removable magazine box plate; and
- d) a magazine follower disposed at a top end of the magazine spring.

13. The double stack ammunition magazine of claim 12, wherein the right-hand feed ramp insert and the left-hand ramp insert are each configured to guide a cartridge including a bullet portion from the magazine housing into a barrel extension without the bullet portion contacting an interior surface of the barrel extension.

14. The double stack ammunition magazine of claim 13, wherein the right-hand feed ramp insert and the left-hand feed ramp insert each contact a shoulder of the cartridge to guide the cartridge into a chamber without enabling a bullet portion of the cartridge to contact an inner surface of the chamber.

15. The double stack ammunition magazine of claim 13, wherein the barrel extension includes a right-hand loading slot and a left-hand loading slot configured to guide a cartridge from the magazine into a chamber.

16. The double stack ammunition magazine of claim 12, wherein the left-hand feed ramp insert is configured to contact a shoulder of a cartridge, but not a bullet portion of the cartridge, upon the cartridge being advanced towards the barrel extension by a bolt.

17. The double stack ammunition magazine of claim 12, wherein the right-hand feed ramp insert is configured to contact a shoulder of a cartridge, but not a bullet portion of the cartridge, upon the cartridge being advanced towards the barrel extension by a bolt.

18. The magazine of claim 12, wherein the cartridge has a common bottle-neck design including a shoulder.

**19.** The ammunition magazine of claim **12**, wherein the ramp is configured to enable a cartridge to be fed from the ammunition magazine to a chamber of an upper receiver of a firearm without enabling a bullet portion of the cartridge to contact a feed ramp of the upper receiver.

\* \* \* \* \*