



(12) **United States Patent**  
**Heath et al.**

(10) **Patent No.:** **US 12,390,866 B2**  
(45) **Date of Patent:** **\*Aug. 19, 2025**

(54) **HOLE SAW WITH HEX SIDEWALL HOLES**  
(71) Applicant: **Milwaukee Electric Tool Corporation**,  
Brookfield, WI (US)

(72) Inventors: **Peter Russell Heath**, Wauwatosa, WI  
(US); **Bryan C. Ward**, Wauwatosa, WI  
(US); **Steven W. Hyma**, Milwaukee,  
WI (US)

(73) Assignee: **Milwaukee Electric Tool Corporation**,  
Brookfield, WI (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-  
claimer.

(21) Appl. No.: **18/501,800**

(22) Filed: **Nov. 3, 2023**

(65) **Prior Publication Data**  
US 2024/0058875 A1 Feb. 22, 2024

#### **Related U.S. Application Data**

(63) Continuation of application No. 17/495,008, filed on  
Oct. 6, 2021, now Pat. No. 11,845,134, which is a  
continuation of application No. 16/518,326, filed on  
Jul. 22, 2019, now Pat. No. 11,148,212, which is a  
continuation of application No.  
PCT/US2019/041175, filed on Jul. 10, 2019.

(60) Provisional application No. 62/696,141, filed on Jul.  
10, 2018.

(51) **Int. Cl.**  
**B23B 51/04** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **B23B 51/0467** (2022.01); **B23B 51/0473**  
(2013.01); **Y10T 408/8953** (2015.01)

(58) **Field of Classification Search**  
CPC ..... B23B 51/0453; B23B 51/0467; B23B  
51/0469; B23B 51/0473; Y10T 408/8953  
See application file for complete search history.

#### (56) **References Cited**

##### U.S. PATENT DOCUMENTS

118,806 A	9/1871	Lafferty et al.
308,842 A	12/1884	Hunt
1,123,730 A	1/1915	Greenfield
1,629,581 A	5/1927	Machlet

(Continued)

##### FOREIGN PATENT DOCUMENTS

CN	2303698	1/1999
CN	201799668	4/2011

(Continued)

##### OTHER PUBLICATIONS

U.S. Appl. No. 29/656,110, filed Jul. 10, 2018, Heath et al.

(Continued)


*Primary Examiner* — Eric A. Gates

(74) *Attorney, Agent, or Firm* — Reinhart Boerner Van  
Deuren s.c.

#### (57) **ABSTRACT**

A hole saw including a plurality of sidewall openings is provided. The sidewall openings are shaped and grouped in patterns that improve debris ejection of the hole saw and that allow for easy access to the interior of the hole saw for manual debris removal by the user. The opening groups are space from each other by larger uninterrupted areas such that the hole saw has a high strength despite the number and size of openings provided in the saw sidewall.

**19 Claims, 14 Drawing Sheets**

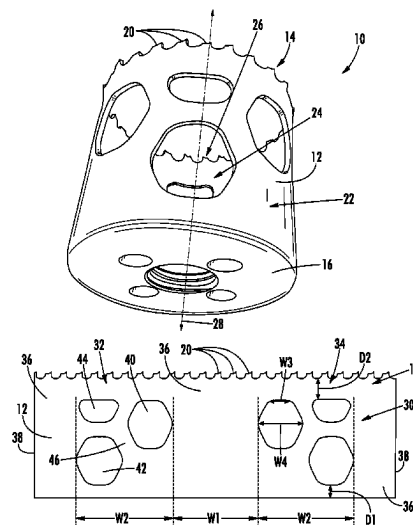

(56)

## References Cited

## U.S. PATENT DOCUMENTS

2,015,339	A	9/1935	Ellingham	5,076,741	A	12/1991	Littlehorn
2,062,257	A	11/1936	Douglas et al.	5,096,341	A	3/1992	Despres
2,237,901	A	4/1941	Chun	5,098,234	A	3/1992	Judkins et al.
2,319,528	A	5/1943	Barbour et al.	5,115,796	A	5/1992	Schweickhardt
2,349,400	A	5/1944	Wendell	5,145,018	A	9/1992	Schimke et al.
2,412,433	A	12/1946	Taylor	5,171,111	A	12/1992	Kishimoto
2,427,085	A	9/1947	Allison	D332,492	S	1/1993	Rosenberg et al.
2,444,099	A	6/1948	Hennessey, Jr.	D334,016	S	3/1993	Jonsson
2,473,077	A	6/1949	Starbuck, Jr.	5,205,685	A	4/1993	Herbert
2,615,245	A	10/1952	Schaumleffel	D342,270	S	12/1993	Kwang
2,662,428	A	12/1953	Mueller	5,273,380	A	12/1993	Musacchia
2,680,898	A	6/1954	Diosi, Sr.	5,288,183	A	2/1994	Chaconas et al.
2,754,864	A	7/1956	Elsy	5,291,806	A	3/1994	Bothum
2,779,361	A	1/1957	McKiff	5,316,416	A	5/1994	Kim
2,800,812	A	7/1957	Mueller et al.	5,353,552	A	10/1994	Hemmings
2,923,180	A	2/1960	Dunn	5,392,759	A	2/1995	Kwang
2,951,683	A	9/1960	Tilden	5,415,504	A	5/1995	Wolf et al.
2,969,122	A	1/1961	Steffes	5,435,672	A	7/1995	Hall et al.
3,025,917	A	3/1962	Knoblauch	5,451,128	A	9/1995	Hattersley
3,074,392	A	1/1963	Fisher	D363,294	S	10/1995	Ellis
3,162,067	A	12/1964	Koons et al.	5,466,100	A	11/1995	Ahluwalia
3,265,104	A	8/1966	Gallo, Sr.	D372,485	S	8/1996	Stone et al.
3,331,455	A	7/1967	Anderson, Jr. et al.	5,556,399	A	9/1996	Huebner
3,374,696	A	3/1968	Trevathan	D376,809	S	12/1996	Stone et al.
3,382,743	A	5/1968	Trevathan	5,649,796	A	7/1997	Durney
3,494,348	A	2/1970	Lindblad	5,651,646	A	7/1997	Banke et al.
3,495,359	A	2/1970	Smith et al.	5,690,452	A	11/1997	Baublits
3,647,310	A	3/1972	Morse	5,700,113	A	12/1997	Stone et al.
3,778,179	A	12/1973	Rivas	D391,974	S	3/1998	Brutscher
3,824,026	A	7/1974	Gaskins	D392,297	S	3/1998	Brutscher
3,836,278	A	9/1974	McInnes	D394,663	S	5/1998	Stone et al.
3,870,431	A	3/1975	Luckenbi, II et al.	5,762,498	A	6/1998	Gonzalez
3,880,546	A	4/1975	Segal	5,803,677	A	9/1998	Brutscher et al.
3,920,350	A	11/1975	Southall	5,810,524	A	9/1998	Wirth, Jr. et al.
3,973,862	A	8/1976	Segal	5,816,754	A	10/1998	Shallenberger
3,976,387	A	8/1976	Segal	5,842,820	A	12/1998	Lee et al.
3,997,279	A	12/1976	Porter	5,888,036	A	3/1999	Arai et al.
4,072,441	A	2/1978	LaPointe	D408,424	S	4/1999	Schmotzer
4,077,737	A	3/1978	Morse	5,904,454	A	5/1999	Washer
4,078,458	A	3/1978	Berendzen	5,931,615	A	8/1999	Wiker
4,101,238	A	7/1978	Reibetanz et al.	5,934,845	A	8/1999	Frey
4,147,464	A	4/1979	Watson et al.	5,980,169	A	11/1999	Hinch
4,148,593	A	4/1979	Clark	6,007,279	A	12/1999	Malone, Jr.
4,189,015	A	2/1980	Acker et al.	D419,576	S	1/2000	Burcher et al.
4,201,502	A	5/1980	Skendrovic	6,036,410	A	3/2000	Shun'ko
4,203,692	A	5/1980	Jensen	6,050,754	A	4/2000	Thomas
4,225,275	A	9/1980	Elliott	6,113,321	A	9/2000	Mulroy et al.
4,303,357	A	12/1981	Makar	6,126,367	A	10/2000	Reed
4,330,229	A	5/1982	Croydon	6,152,815	A	11/2000	Meerdink et al.
4,442,811	A	4/1984	Shimamura et al.	6,167,792	B1	1/2001	Korb et al.
D278,065	S	3/1985	Sydrowski et al.	D438,219	S	2/2001	Brutscher
4,527,449	A	7/1985	Sydrowski et al.	6,190,097	B1	2/2001	Thomas
4,529,341	A	7/1985	Greene	6,206,616	B1	3/2001	Smith et al.
D282,369	S	1/1986	de Villiers	6,267,542	B1	7/2001	Salmon
4,565,471	A	1/1986	Negishi et al.	6,269,722	B1	8/2001	Hellbergh
4,568,227	A	2/1986	Hogg	6,273,652	B1	8/2001	Wirth, Jr. et al.
4,582,458	A	4/1986	Korb et al.	D447,495	S	9/2001	Strobel et al.
4,595,321	A	6/1986	Van Dalen	6,341,925	B1	1/2002	Despres
4,605,347	A	8/1986	Jodock et al.	D455,446	S	4/2002	Collins
4,741,651	A	5/1988	Despres	6,409,436	B1	6/2002	Despres
4,755,087	A	7/1988	Parent	6,419,428	B2	7/2002	Ajimi et al.
4,759,667	A	7/1988	Brown	6,428,250	B2	8/2002	Giebmanns
4,760,643	A	8/1988	Juma	6,431,289	B1	8/2002	Potter et al.
D303,118	S	8/1989	Cox	6,443,674	B1	9/2002	Jaconi
4,906,146	A	3/1990	Bowling	6,564,887	B2	5/2003	Hong
4,961,674	A	10/1990	Wang et al.	6,588,310	B2	7/2003	Lee et al.
4,968,189	A	11/1990	Pidgeon	6,588,992	B2	7/2003	Rudolph
4,968,193	A	11/1990	Chaconas et al.	6,599,063	B1	7/2003	Capstran
5,007,777	A	4/1991	Itokazu	D478,105	S	8/2003	Morton et al.
D317,455	S	6/1991	Martin	D478,106	S	8/2003	Morton et al.
5,025,871	A	6/1991	Stewart et al.	D478,339	S	8/2003	Morton et al.
5,049,010	A	9/1991	Oakes	D478,919	S	8/2003	Morton et al.
5,061,126	A	10/1991	Cain et al.	6,619,413	B2	9/2003	Hamilton et al.
D321,894	S	11/1991	Harris	6,641,338	B2	11/2003	Despres
5,069,584	A	12/1991	Obermeier et al.	6,641,395	B2	11/2003	Kumar et al.
				6,652,203	B1	11/2003	Risen, Jr.
				6,676,342	B2	1/2004	Mast et al.
				6,676,711	B2	1/2004	Omi
				6,698,981	B1	3/2004	Beno et al.

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

6,705,807	B1	3/2004	Rudolph et al.	7,892,235	B2	2/2011	Ellis
6,746,187	B2	6/2004	Alm	D634,343	S	3/2011	Burke, III
6,786,684	B1	9/2004	Ecker	7,913,601	B2	3/2011	Petts et al.
D497,547	S	10/2004	Kumakura et al.	7,934,893	B2	5/2011	Gillissen
6,817,428	B1	11/2004	Miyanaga	7,938,600	B1	5/2011	Griep et al.
6,817,936	B1	11/2004	Skeem et al.	7,959,371	B2	6/2011	Keightley
6,820,519	B2	11/2004	Lefebvre	7,967,535	B2	6/2011	Eiserer et al.
6,857,831	B2	2/2005	Davis	7,988,389	B2	8/2011	Miebach
6,857,832	B2	2/2005	Nygard	8,042,613	B2	10/2011	Hallundbaek et al.
6,863,529	B2	3/2005	Strong et al.	8,052,356	B2	11/2011	Singh
D504,446	S	4/2005	Kobayashi	D659,176	S	5/2012	Novak et al.
6,884,245	B2	4/2005	Spranza	D664,574	S	7/2012	Burke, III
6,890,132	B1	5/2005	Baron et al.	8,328,474	B2	12/2012	Pangerc et al.
6,890,133	B2	5/2005	Singh et al.	8,328,476	B2	12/2012	O'Keefe et al.
6,893,194	B2	5/2005	Jones et al.	D687,472	S	8/2013	Novak et al.
D507,585	S	7/2005	Held	D690,334	S	9/2013	Zielonka et al.
6,939,092	B2	9/2005	Korb et al.	D692,470	S	10/2013	Novak et al.
6,945,414	B1	9/2005	Stevens et al.	8,573,907	B2	11/2013	Kalomeris et al.
6,945,850	B2	9/2005	Perrey	8,579,554	B2	11/2013	Novak et al.
6,948,574	B2	9/2005	Cramer et al.	8,579,555	B2	11/2013	Novak et al.
6,988,859	B2	1/2006	Borschert et al.	8,646,601	B2	2/2014	Green et al.
7,001,116	B2	2/2006	Kozak	D701,544	S	3/2014	Novak et al.
D516,594	S	3/2006	Morton	D706,845	S	6/2014	Richter
7,017,465	B2	3/2006	Dion et al.	D708,650	S	7/2014	Richter
7,018,143	B2	3/2006	Moore	8,790,052	B2	7/2014	Baratta
D519,531	S	4/2006	Kobashi	D711,441	S	8/2014	Novak et al.
D523,398	S	6/2006	Ellis	8,840,344	B2	9/2014	Stenman
D526,670	S	8/2006	Ibey	11,148,212	B2	10/2021	Heath et al.
7,112,016	B2	9/2006	Nordlin	11,845,134	B2 *	12/2023	Heath ..... B23B 51/0467
D529,525	S	10/2006	Waldron et al.	12,059,734	B2 *	8/2024	Heath ..... B23B 51/04
7,127,923	B2	10/2006	Biederman et al.	2002/0037201	A1	3/2002	Despres
7,140,451	B2	11/2006	Yoshimizu et al.	2003/0103822	A1	6/2003	Wirth et al.
7,160,064	B2	1/2007	Jasso	2003/0133765	A1	7/2003	Capriotti
7,175,372	B2	2/2007	Davis	2003/0146024	A1	8/2003	Cramer et al.
7,201,543	B2	4/2007	Muhlfriedel et al.	2003/0177645	A1	9/2003	Flury et al.
D544,892	S	6/2007	Watson et al.	2004/0179911	A1	9/2004	Keightlev
7,237,291	B2	7/2007	Redford	2005/0031422	A1	2/2005	Tseng
7,237,984	B1	7/2007	Guzda et al.	2005/0105981	A1	5/2005	Byrley et al.
7,237,986	B2	7/2007	Anjanappa et al.	2007/0020056	A1	1/2007	Burdick
7,246,975	B2	7/2007	Corso et al.	2007/0059113	A1	3/2007	Capstran
D551,269	S	9/2007	Burke, III	2007/0160435	A1	7/2007	Chao
7,264,428	B2	9/2007	Cossette	2008/0166195	A1	7/2008	Gentry et al.
7,267,514	B2	9/2007	Wetzel et al.	2008/0181738	A1	7/2008	Capriotti et al.
7,275,898	B2	10/2007	Malagnino et al.	2008/0187405	A1	8/2008	Nordlin
7,306,411	B2	12/2007	Mabuchi et al.	2009/0035082	A1	2/2009	Singh
D559,874	S	1/2008	Kobayashi	2009/0044674	A1	2/2009	Neitzell
D560,699	S	1/2008	Omi	2009/0216235	A1	8/2009	Ellis
D571,835	S	6/2008	Concari et al.	2009/0222009	A1	9/2009	Ellis
D573,165	S	7/2008	Grundvig	2009/0279972	A1	11/2009	Novak et al.
D575,808	S	8/2008	Zeiler et al.	2009/0326539	A1	12/2009	Neumeyer et al.
7,438,509	B1	10/2008	Wong et al.	2010/0028098	A1	2/2010	Shaffer
D580,462	S	11/2008	Liao et al.	2010/0034608	A1	2/2010	Nordlin et al.
7,476,067	B2	1/2009	Borschert et al.	2010/0080665	A1	4/2010	Keightley
D585,919	S	2/2009	Cantlon	2010/0086372	A1	4/2010	Werner
D585,920	S	2/2009	Liao et al.	2010/0092256	A1	4/2010	Khangar et al.
7,488,146	B2	2/2009	Brunson	2010/0145341	A1	6/2010	Ranck et al.
D588,175	S	3/2009	Morton	2010/0278601	A1	11/2010	Beynon
D588,884	S	3/2009	Burke, III	2010/0310332	A1	12/2010	Serba
7,513,718	B1	4/2009	Arnold	2011/0038679	A1	2/2011	Kozak
7,520,703	B2	4/2009	Rempel	2011/0052340	A1	3/2011	Kozak
7,556,459	B2	7/2009	Rempel	2011/0073337	A1	3/2011	Milbourne et al.
7,637,703	B2	12/2009	Khangar et al.	2011/0170965	A1	7/2011	Novak et al.
D608,801	S	1/2010	Evatt et al.	2011/0170966	A1	7/2011	Novak et al.
D608,802	S	1/2010	Ibarra et al.	2011/0170967	A1	7/2011	Novak et al.
7,658,136	B2	2/2010	Rempel et al.	2011/0170969	A1	7/2011	Novak et al.
7,658,576	B1	2/2010	Buzdum et al.	2011/0170970	A1	7/2011	Kalomeris et al.
7,661,913	B2	2/2010	Nordlin	2011/0170971	A1	7/2011	Novak et al.
7,665,935	B1	2/2010	Garrick et al.	2011/0170972	A1	7/2011	Zielonka et al.
7,674,078	B1	3/2010	Buzdum et al.	2012/0155979	A1	6/2012	Khangar et al.
D615,839	S	5/2010	Richter et al.	2012/0247834	A1	10/2012	Buxbaum et al.
7,766,583	B2	8/2010	Kozak	2014/0023446	A1	1/2014	Piller et al.
7,824,137	B2	11/2010	Vasudeva et al.	2014/0112728	A1	4/2014	Baratta
7,850,405	B2	12/2010	Keightley	2014/0158569	A1	6/2014	Green et al.
D630,656	S	1/2011	Lambert et al.	2014/0271007	A1	9/2014	Richter
7,871,224	B2	1/2011	Dost et al.	2015/0239051	A1	8/2015	Novak et al.
				2016/0354846	A1	12/2016	Heffernan
				2017/0066064	A1	3/2017	Novak et al.
				2017/0157681	A1	6/2017	Parendo et al.
				2017/0232530	A1	8/2017	Novak et al.

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

2018/0272441 A1 9/2018 Novak et al.  
 2020/0282474 A1 9/2020 Bek et al.  
 2021/0146455 A1 5/2021 Piller

## FOREIGN PATENT DOCUMENTS


DE 2845123 4/1980  
 DE 3214209 10/1983  
 DE 9204681 8/1992  
 DE 29907717 8/1999  
 DE 20201300 7/2003  
 DE 20318529 4/2005  
 DE 102005012026 9/2006  
 EP 0612575 8/1994  
 EP 0792705 9/1997  
 EP 0965407 12/1999  
 EP 2070618 6/2009  
 EP 2138255 12/2009  
 GB 911093 11/1962  
 GB 1476437 6/1977  
 GB 2040741 9/1980  
 GB 1589293 5/1981  
 GB 2338438 12/1999  
 GB 2451947 2/2009  
 JP S5689414 A 7/1981  
 JP S5987338 A 5/1984  
 JP S59131806 9/1984  
 JP H04171108 6/1992

JP H0525013 4/1993  
 JP H07124809 A 5/1995  
 JP 3019727 1/1996  
 JP H09192912 7/1997  
 JP 2003200415 7/2003  
 JP 2005-144568 6/2005  
 JP 2008018490 1/2008  
 KR 2012039417 4/2012  
 NL 9400753 12/1995  
 WO WO9015683 12/1990  
 WO WO9731743 A1 9/1997  
 WO WO0009284 2/2000  
 WO WO2008064409 6/2008  
 WO WO 2011/088268 7/2011  
 WO WO2011088269 7/2011

## OTHER PUBLICATIONS

Inter Partes Review No. 2015-01461, "Petition for Inter Partes Review of U.S. Pat. No. 8,579,554", dated Jun. 22, 2015 (56 pages).  
 Inter Partes Review No. 2015-01461, "Petitioner Exhibit 1002 Declaration of James Pangerc", dated Jun. 22, 2015 (11 pages).  
 International Search Report and Written Opinion for International Application No. PCT/US2019/041175, dated Oct. 24, 2019, 13 pages.  
 Makita Industrial Power Tools, 1998-1999 General Catalog (1998) ISO9002, p. 96.  
 Makita Industrial Power Tools, 2003-2004 General Catalog (2003) 2 pages.

\* cited by examiner

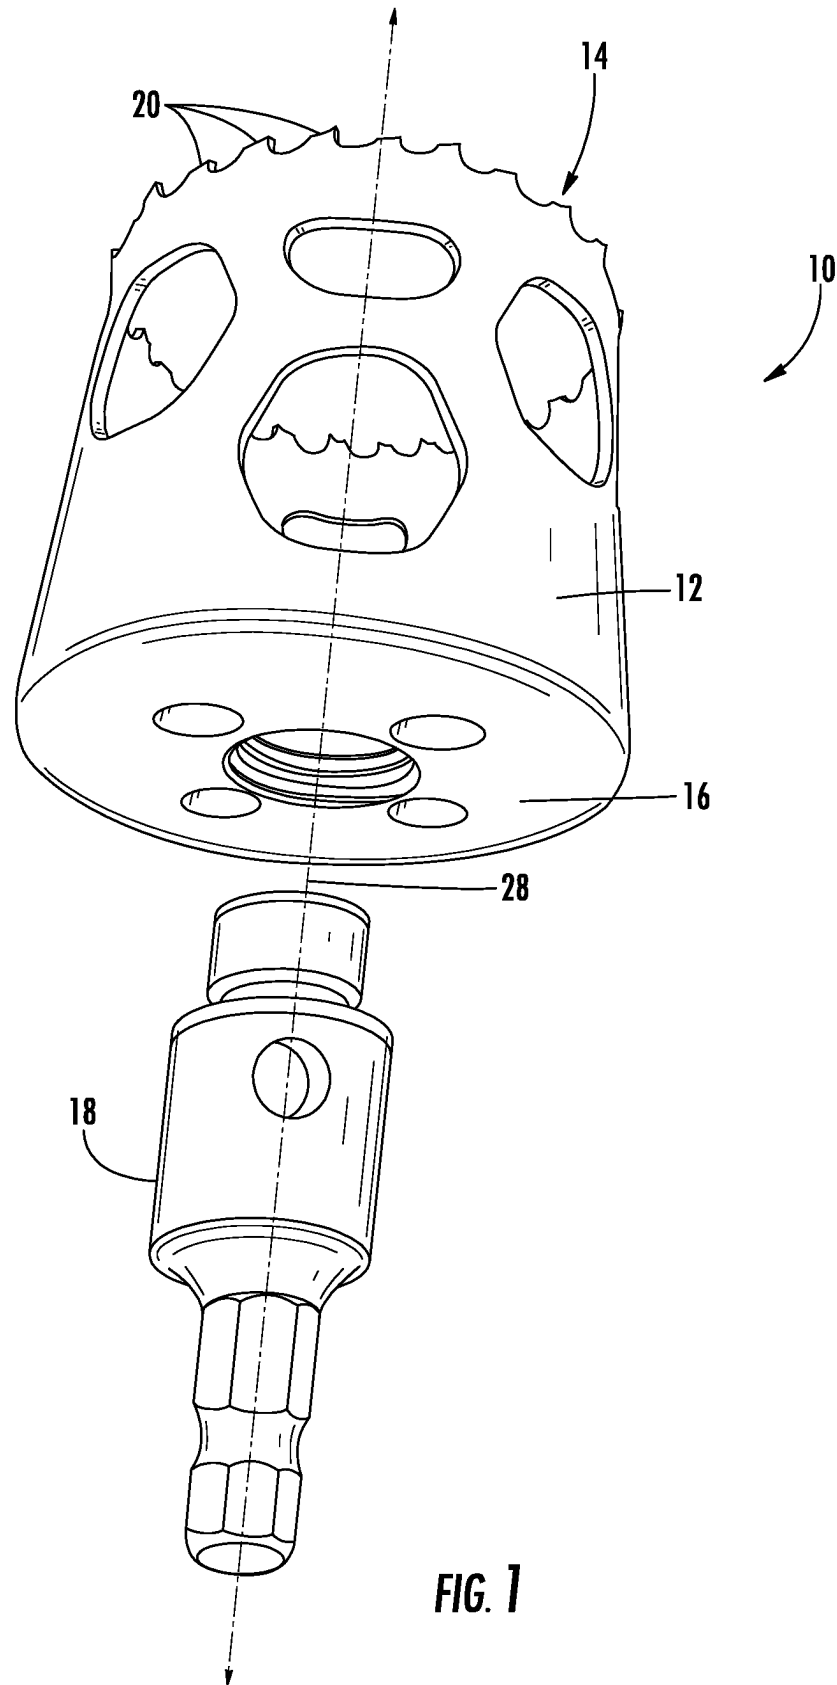

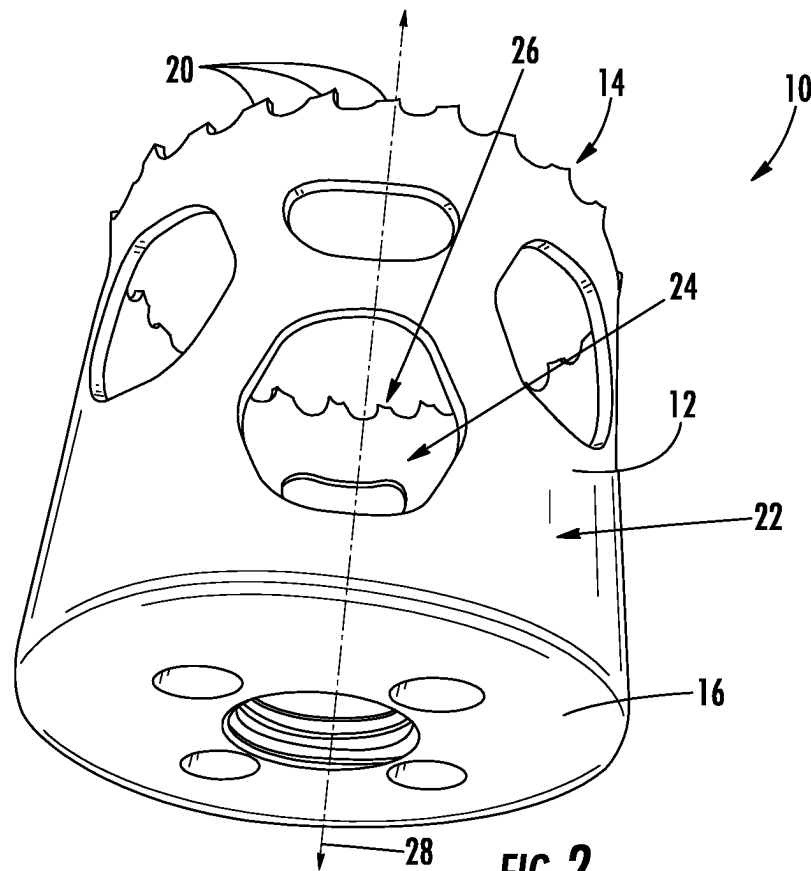


FIG. 2

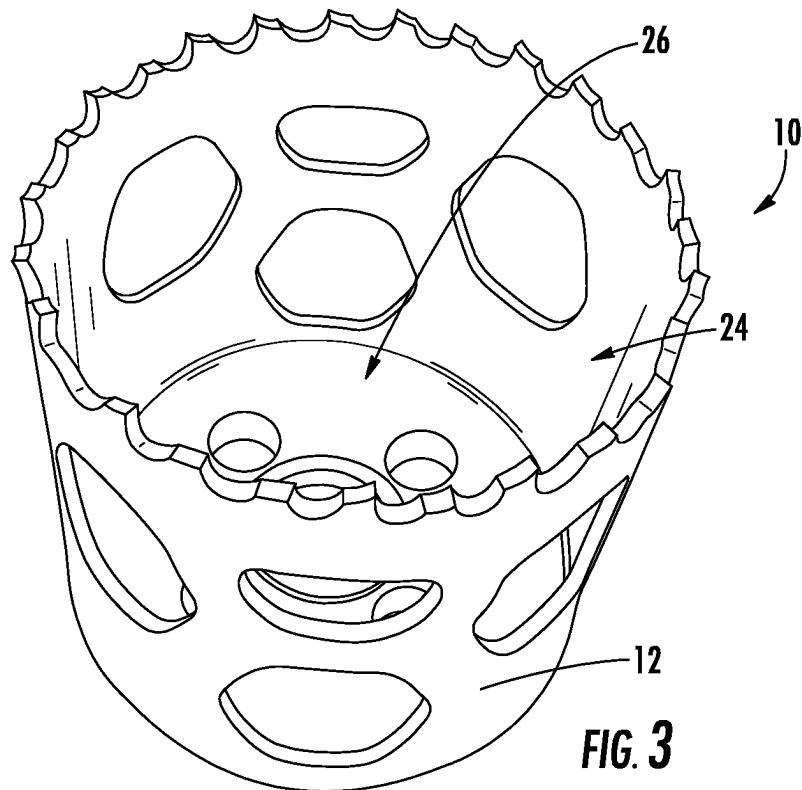


FIG. 3

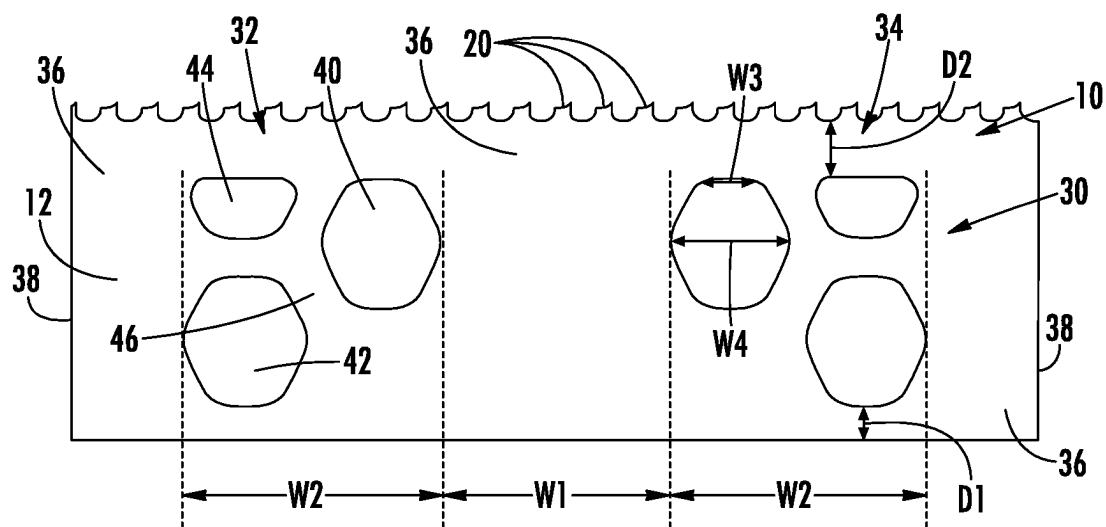


FIG. 4

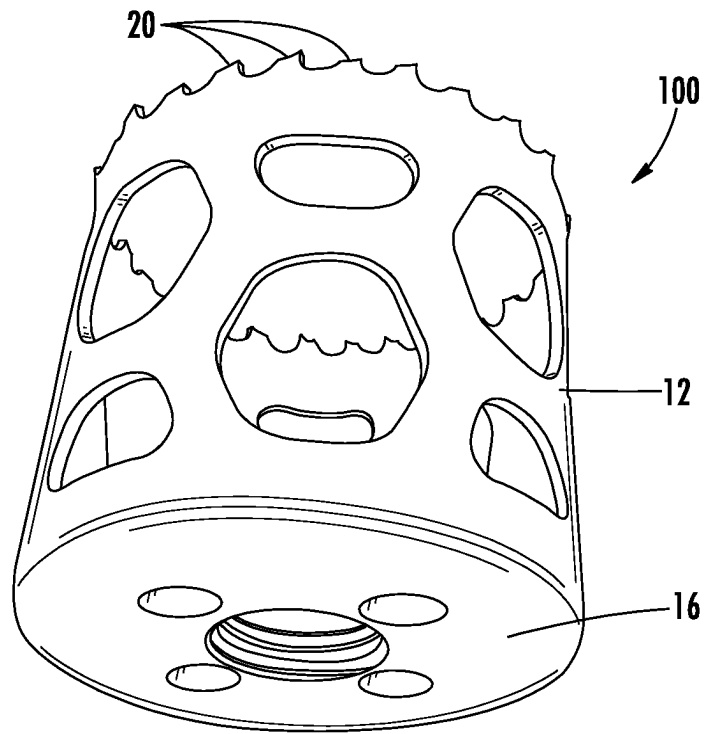


FIG. 5

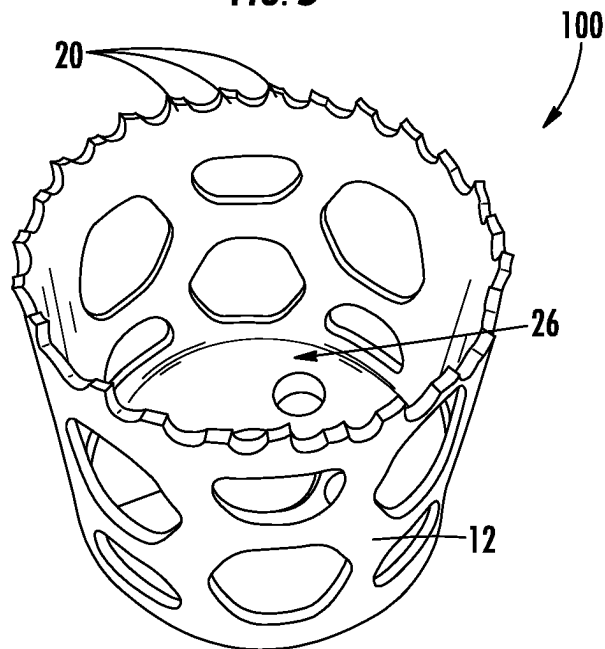


FIG. 6



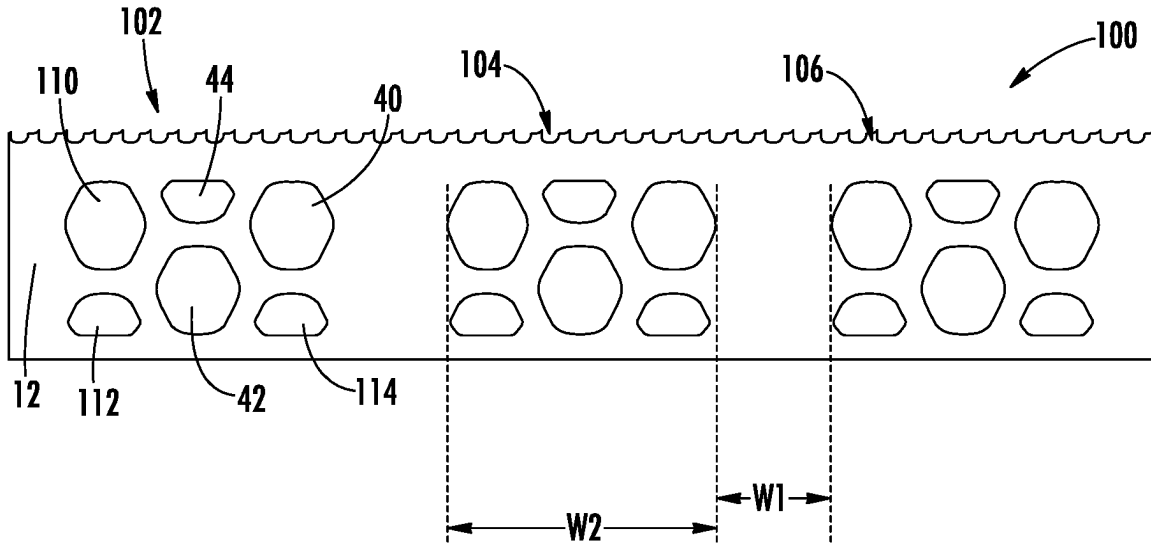


FIG. 7



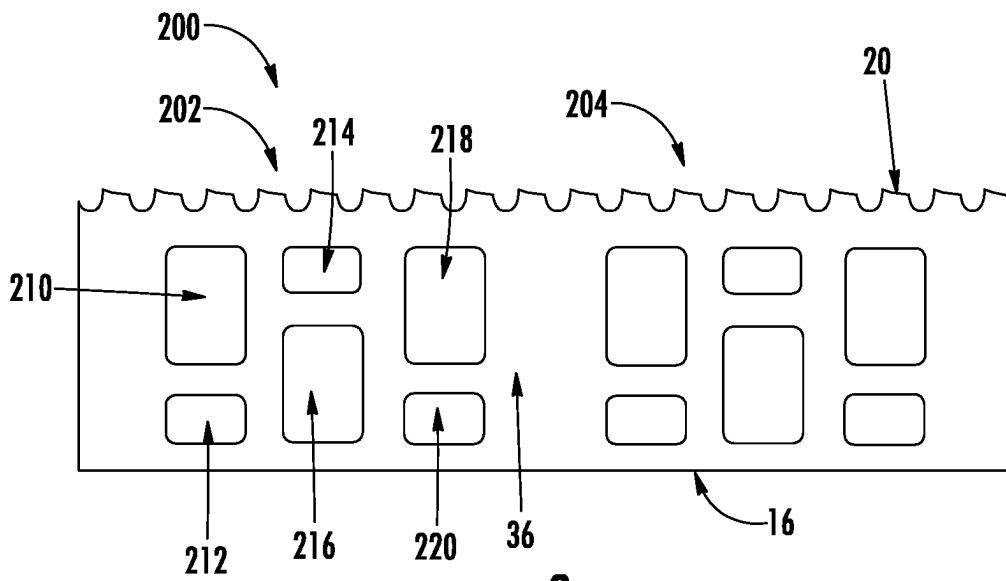


FIG. 8

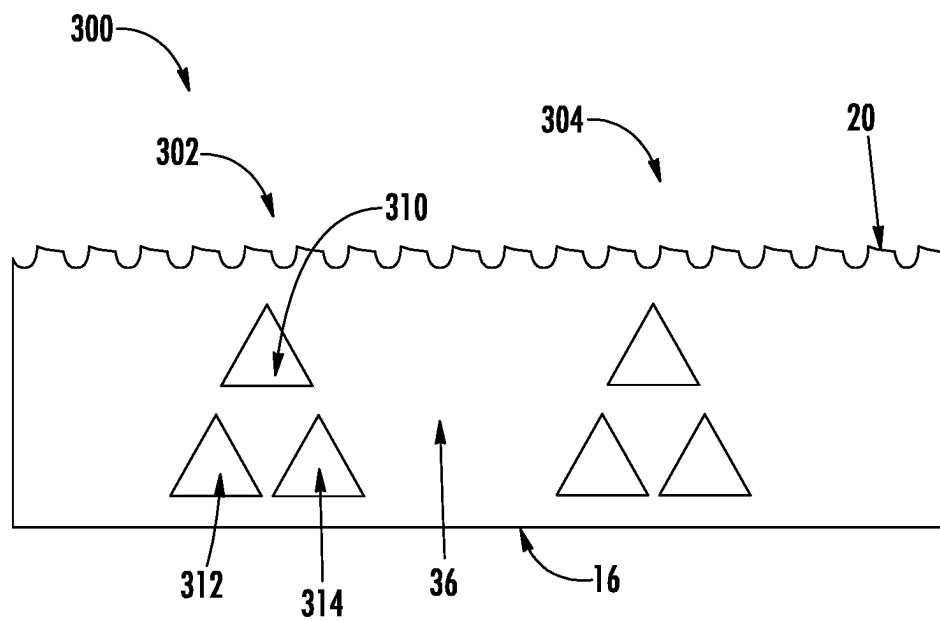

**FIG. 9**

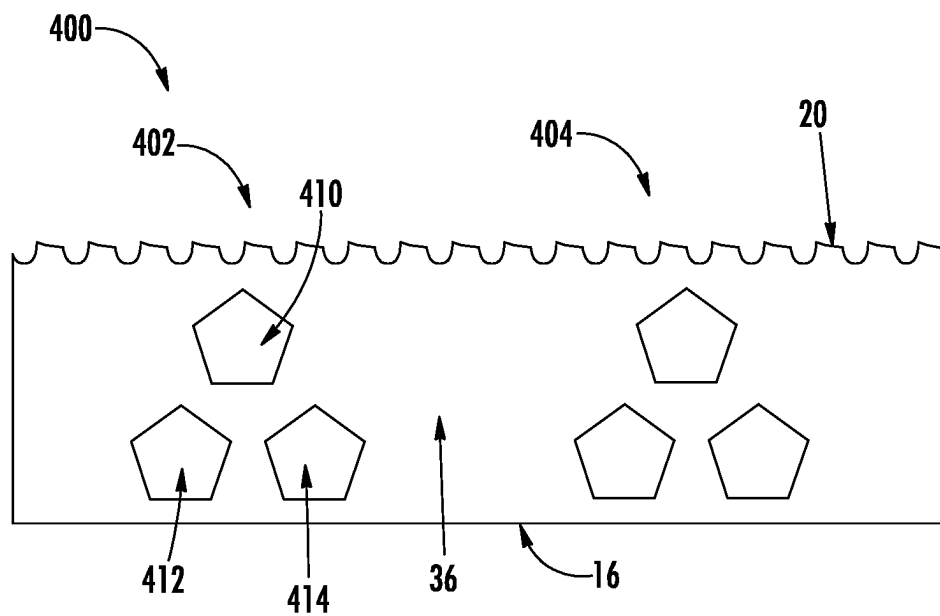

**FIG. 10**

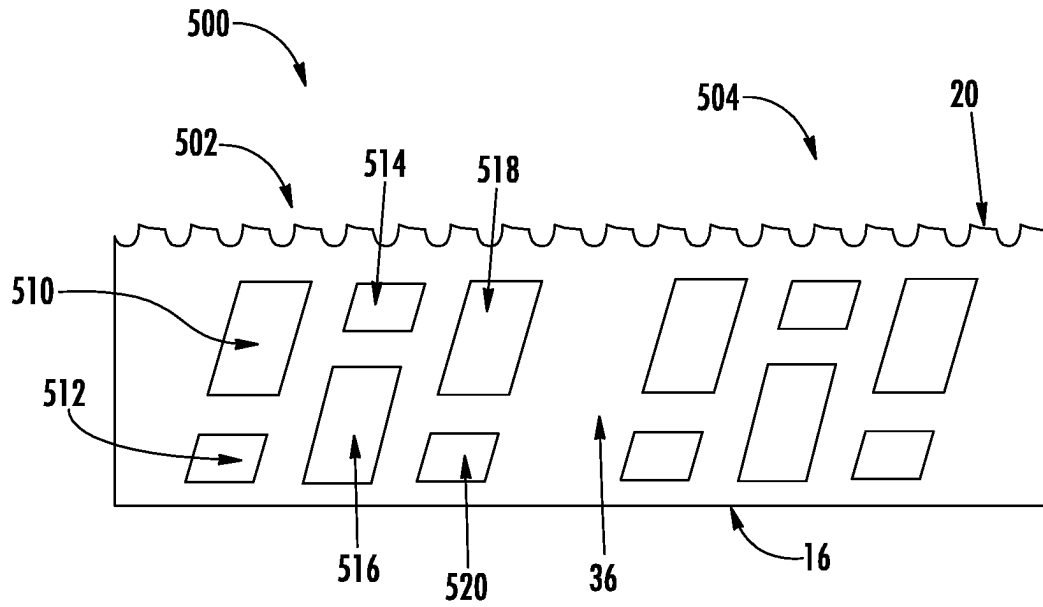


FIG. 11

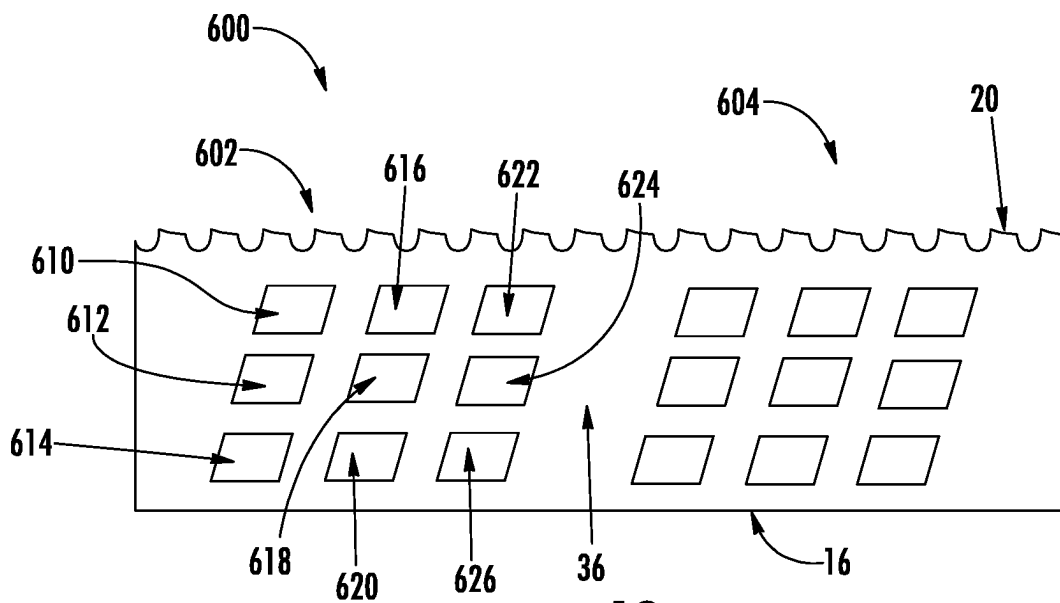


FIG. 12

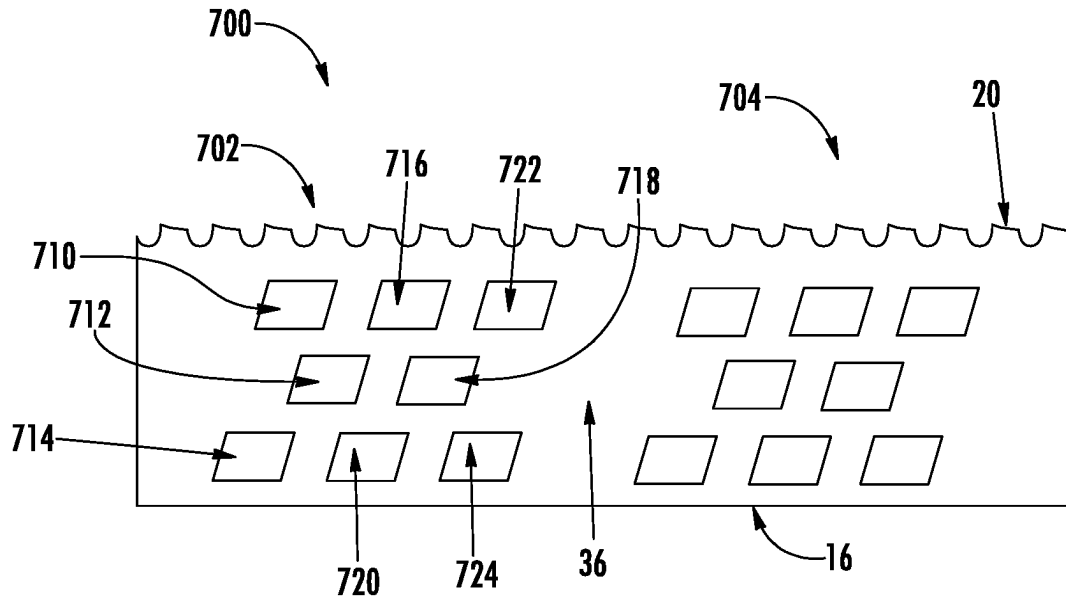


FIG. 13

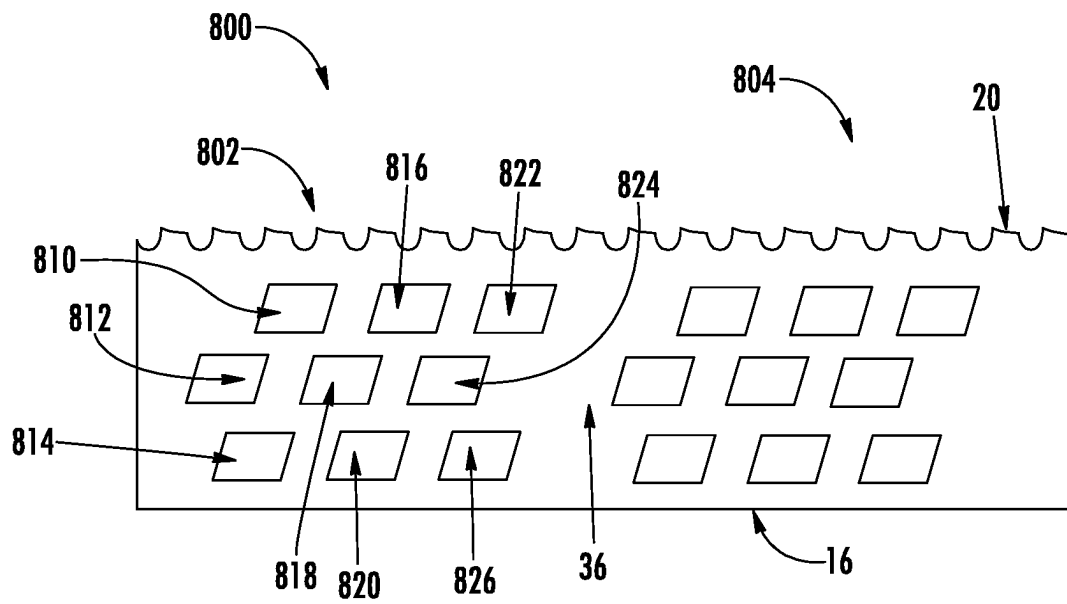


FIG. 14

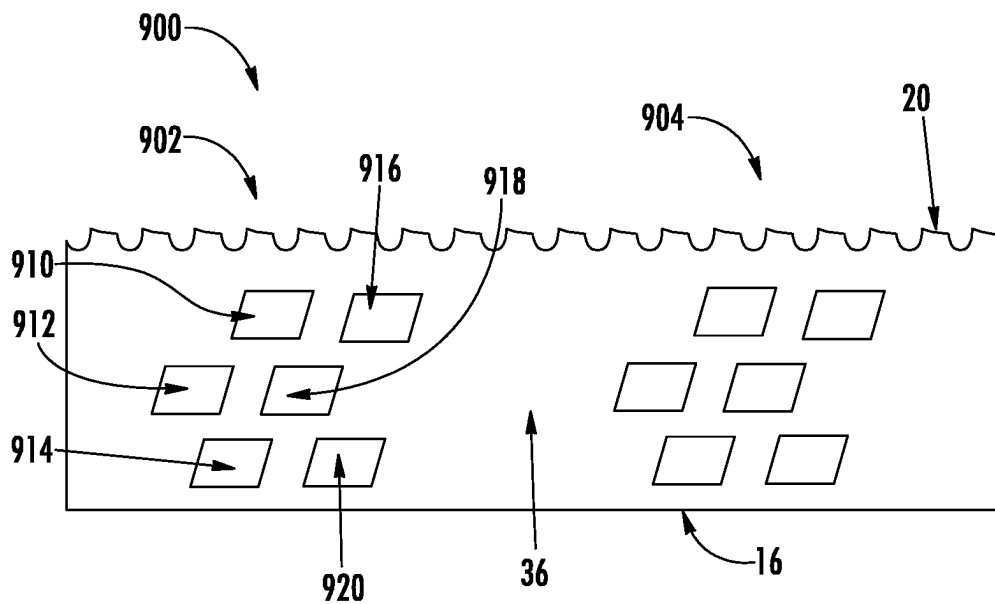


FIG. 15



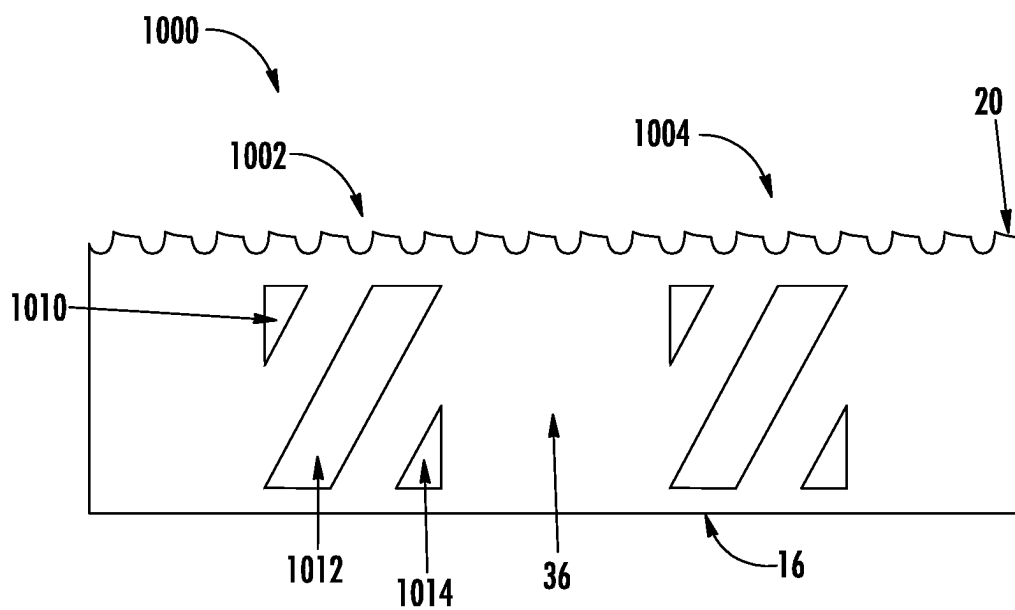




FIG. 16

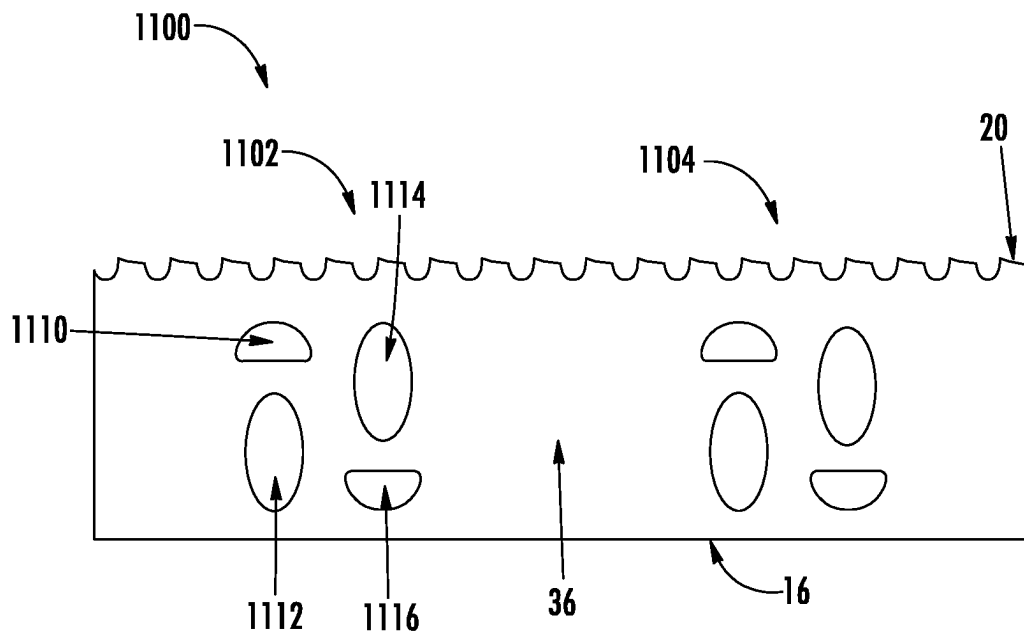

**FIG. 17**

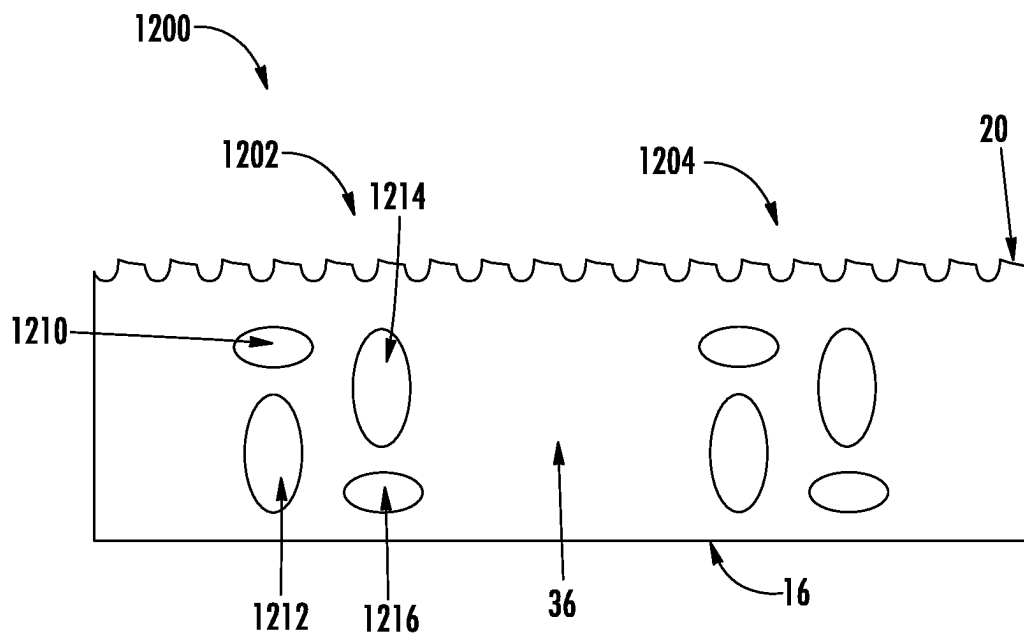

**FIG. 18**

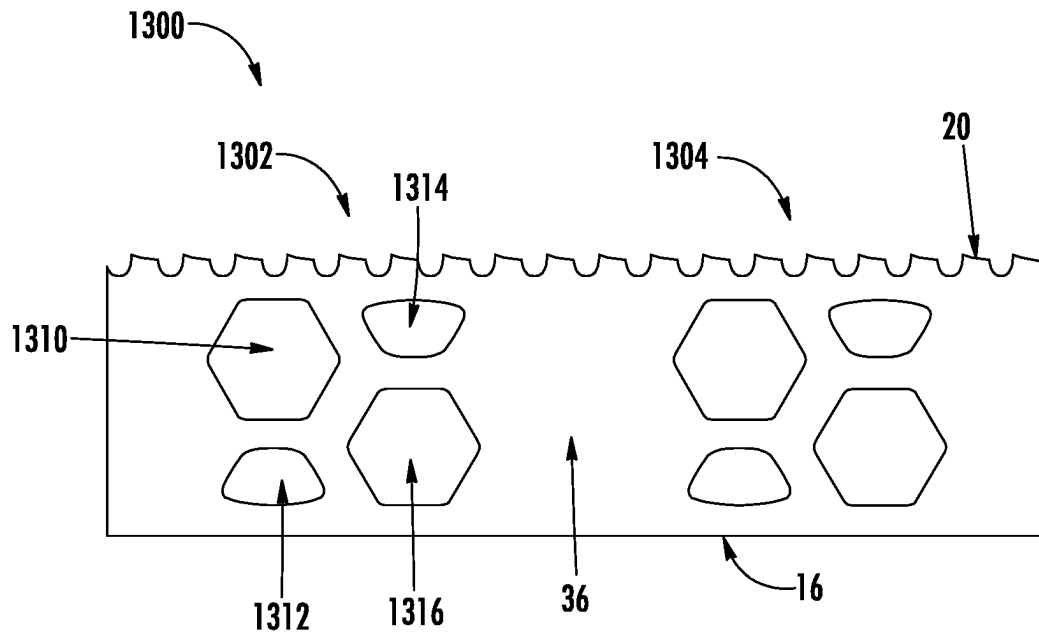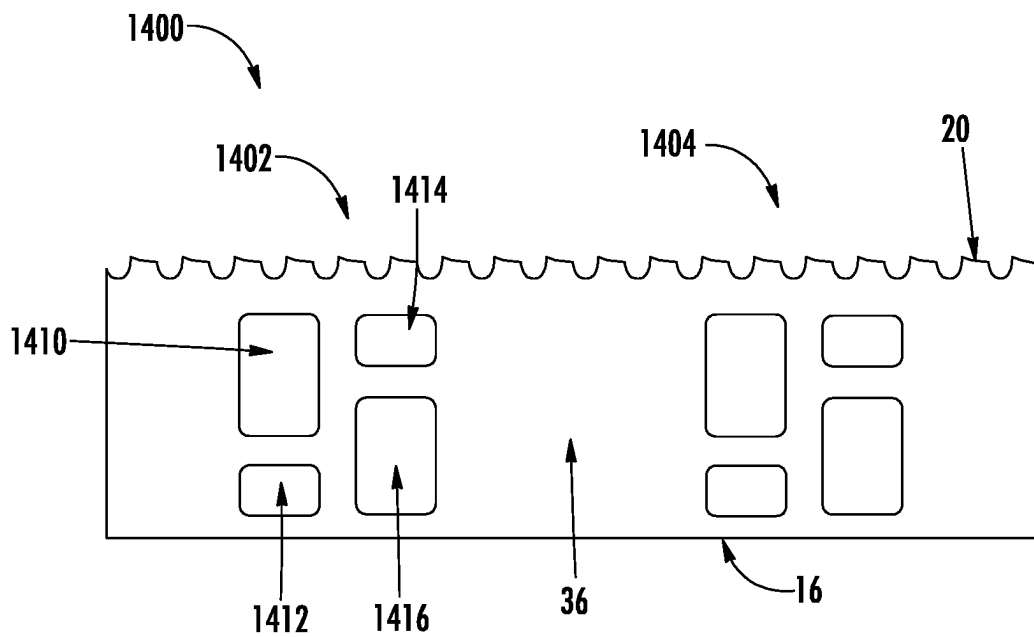**FIG. 19****FIG. 20**

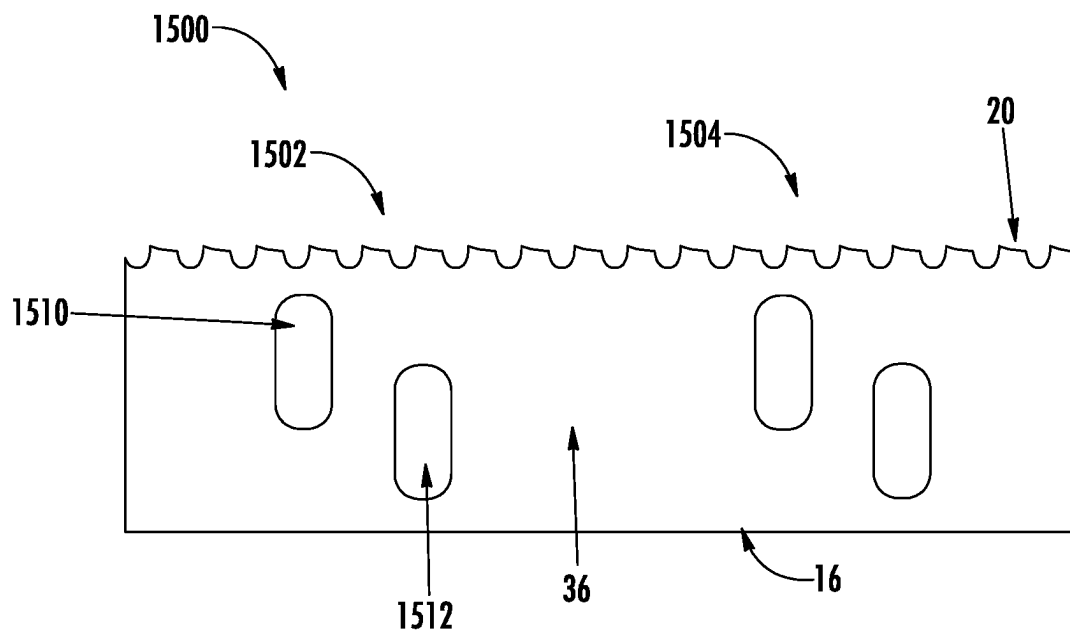


FIG. 21



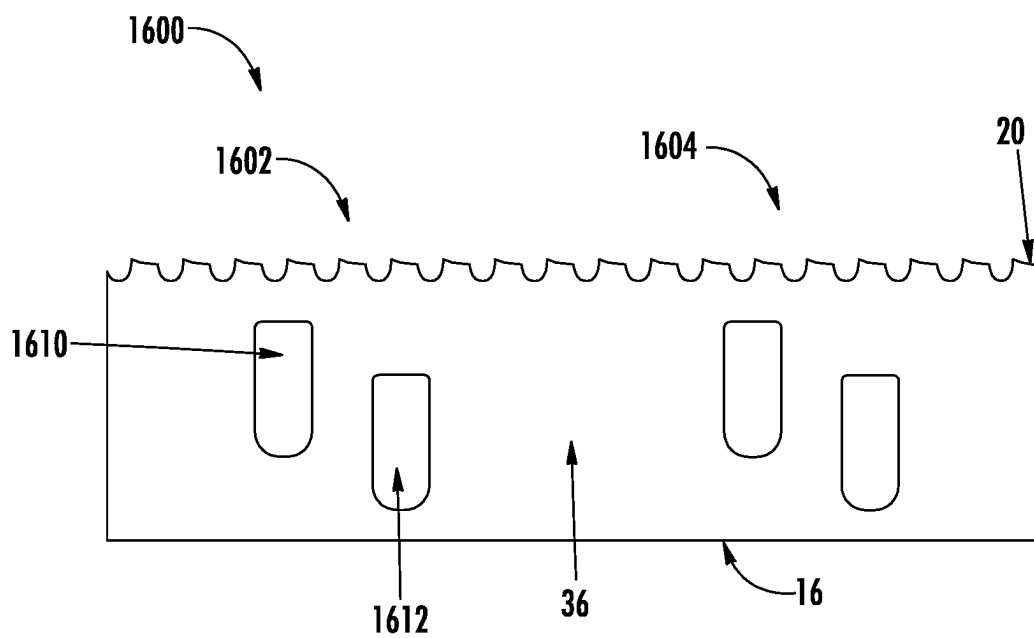


FIG. 22




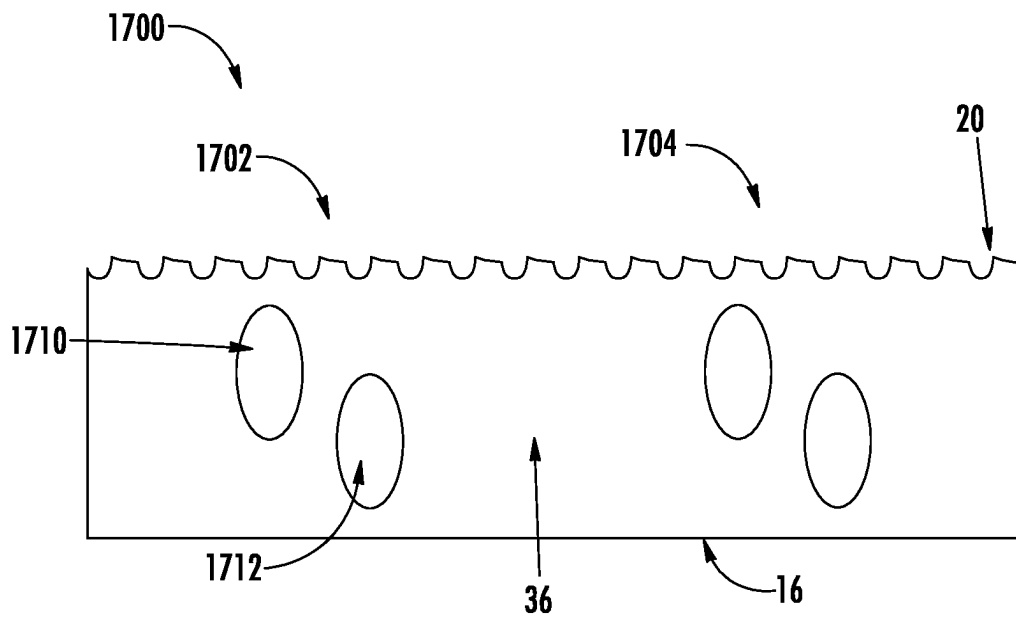


**FIG. 23**

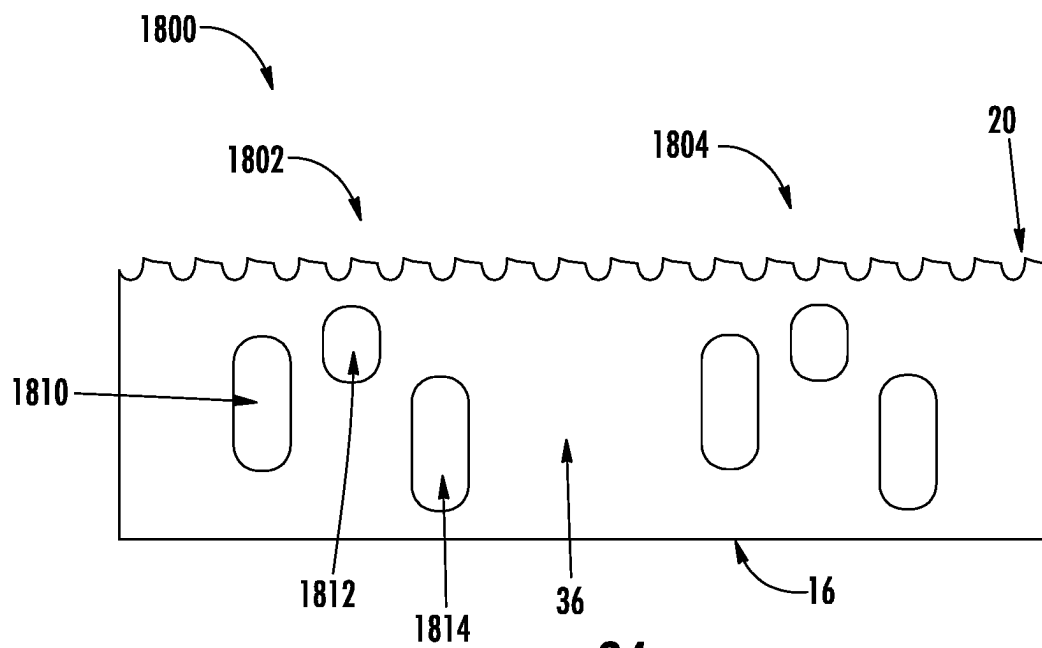

**FIG. 24**

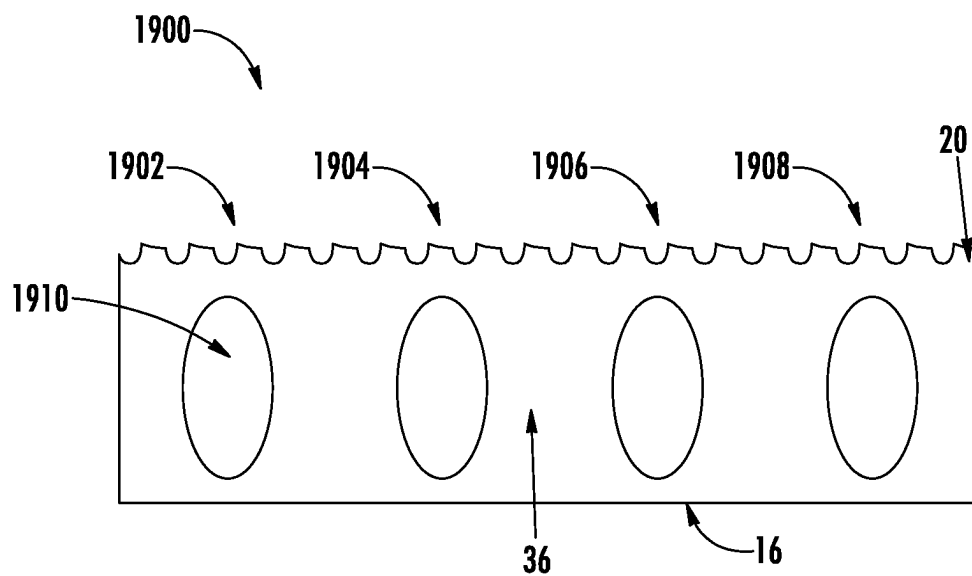

**FIG. 25**

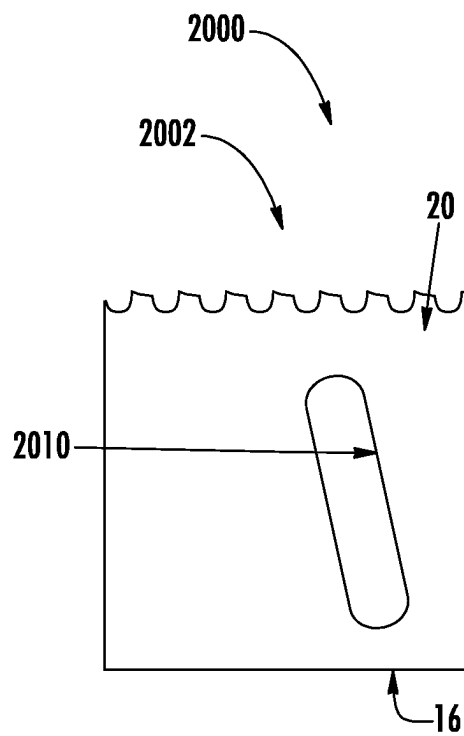

**FIG. 26**

**HOLE SAW WITH HEX SIDEWALL HOLES****CROSS-REFERENCE TO RELATED PATENT APPLICATIONS**

The present application is a continuation of U.S. application Ser. No. 17/495,008, filed on Oct. 6, 2021, which is a continuation of U.S. application Ser. No. 16/518,326, filed Jul. 22, 2019, which issued as U.S. Pat. No. 11,148,212 on Oct. 19, 2021, which is a continuation of International Application No. PCT/US2019/041175, filed Jul. 10, 2019, which claims the benefit of and priority to U.S. Provisional Application No. 62/696,141, filed Jul. 10, 2018, the content of which are incorporated herein by reference in their entireties.

**BACKGROUND OF THE INVENTION**

The present invention relates generally to the field of tools. The present invention relates specifically to a hole saw having a plurality of sidewall openings. In general, a hole saw includes a cylindrical structure with cutting teeth at one end of the cylinder. In use, the hole saw spins at a high rate of speed, cutting a hole in a work piece that has a size and shape that generally matches the size and shape of the cylindrical structure.

**SUMMARY OF THE INVENTION**

One embodiment of the disclosure relates to a hole saw including a body, such as a cylindrical saw body, and an end cap. The saw body includes a cutting edge at a first end of the saw body, and a second end of the saw body is coupled to an outer section of the end cap. The cylindrical saw body includes an outer surface and an inner surface defining a hollow internal area. The cylindrical saw body includes a first group of openings extending between the outer surface and the inner surface, a second group of openings extending between the outer surface and the inner surface, and an uninterrupted area located between the first group of openings and the second group of openings. In specific embodiments, the hole saw side wall openings have a non-circular shape and specifically, all of the hole saw side wall openings have a non-circular shape.

In specific embodiments, the first group of openings includes a first opening and a second opening, and the second group of openings includes a first opening and a second opening. In specific embodiments, the first opening and second opening of the first group are spaced from each other in the circumferential direction such that the first opening is not located above the second opening in the longitudinal direction. In a specific embodiment, the first opening and second opening of the second group are spaced from each other in the circumferential direction such that the first opening is not located above the second opening in the longitudinal direction.

Additional features and advantages will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from the description or recognized by practicing the embodiments as described in the written description and claims hereof, as well as the appended drawings. It is to be understood that both the foregoing general description and the following detailed description are exemplary.

The accompanying drawings are included to provide a further understanding and are incorporated in and constitute a part of this specification. The drawings illustrate one or

more embodiments and together with the description serve to explain principles and operation of the various embodiments.

**BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is a perspective view of a hole saw and arbor, according to an exemplary embodiment.

FIG. 2 is a perspective view from below of a hole saw, according to an exemplary embodiment.

FIG. 3 is a perspective view from above of the hole saw of FIG. 2, according to an exemplary embodiment.

FIG. 4 is a side plan view of the sidewall of the hole saw of FIG. 2 prior to shaping to the cylindrical structure shown in FIG. 5, according to an exemplary embodiment.

FIG. 5 is a perspective view from below of a hole saw, according to another exemplary embodiment.

FIG. 6 is a perspective view from above of the hole saw of FIG. 5, according to exemplary embodiment.

FIG. 7 is a side plan view of the sidewall of the hole saw of FIG. 5 prior to shaping to the cylindrical structure shown in FIG. 5, according to an exemplary embodiment.

FIG. 8 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 9 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 10 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 11 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 12 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 13 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 14 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 15 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 16 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 17 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 18 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 19 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 20 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 21 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 22 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

3

FIG. 23 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 24 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 25 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

FIG. 26 is a side plan view of the sidewall of a hole saw prior to shaping to a cylindrical structure, according to an exemplary embodiment.

#### DETAILED DESCRIPTION

Referring generally to the figures, various embodiments of a hole cutter or hole saw including a plurality of sidewall openings are shown. In general, a hole saw includes a cylindrical sidewall, a cutting end having cutting teeth at one end of the cylindrical sidewall and an end cap at the other end of the cylindrical sidewall. As will be generally understood, the end cap includes a mounting structure that mounts to a driving device (e.g., a power tool) that drives the hole saw in rotation to cut a hole in a workpiece. In various embodiments, the sidewall of the hole saw discussed herein includes a pattern of multiple sidewall openings strategically positioned and sized to provide improved functionality while still providing sufficient strength to the hole saw. In specific embodiments, the hole saw discussed herein specifically includes side wall openings having non-circular shapes, and in at least some embodiments, Applicant believes that non-circular shaped sidewall openings may allow for improved debris removal through the provision of leverage points or corner.

As will generally be understood, during use of the hole saw, some portion of cut material (e.g., saw dust, chips, a plug of the material being cut, etc.) material enters the central cavity of the hole saw. Some of this material eventually exits the hole saw through the sidewall holes by being ejected during spinning of the hole saw. Other material is manually removed by pushing or prying the material out by insertion of a tool through the sidewall openings. In general and as will be discussed in more detail below, the sidewall openings are positioned in a pattern surrounding the entire circumference of the sidewall such that no matter what position the saw is in when it is spinning, one of the openings is easily accessible by the user for debris removal without further rotation of the saw blade. Further, the sidewall openings are relatively large and numerous allowing the user to conveniently access the interior of the hole saw blade with a tool (e.g., a screw driver) to dig or pry a plug/debris out from the hole saw center. In addition, Applicant believes that because the hole patterns shown herein increase ejection of debris during cutting, the ease of plug removal is increased because there is less saw dust and chips remaining in the interior of the hole saw blocking plug removal.

While generally increasing the size and number of the sidewall holes of the hole saw blade increases ease of access for debris removal, the hole saw sidewall also provides strength and rigidity to the hole saw blade. The sidewall opening designs discussed herein strike a balance between strength and debris removal accessibility that Applicant believes provide higher levels of accessibility and strength than achieved with prior designs. Further, the sidewall opening pattern is arranged such that there are relatively large uninterrupted portions of the sidewall located between

4

hole groupings which increase strength and also provide locations for weld seam location and placement of information (e.g., product information, logos, etc.).

Referring to FIG. 1, a hole saw, such as hole saw 10, is shown according to an exemplary embodiment. Hole saw 10 includes a sidewall, shown as cylindrical body 12, a cutting end 14 at a first end of body 12 and an end cap 16 coupled to the opposite, second end of body 12. In general, end cap 16 is a disc of metal material that may be coupled to body 12 via a coupling structure such as a weld. In various embodiments, end cap 16 includes a central mounting portion for coupling to a tool attachment structure, shown as arbor 18. As will be generally understood, arbor 18 facilitates coupling of hole saw 10 to a driving device (e.g., an impact driver, power drill driver, etc.) which drives hole saw 10 during cutting.

As shown in FIG. 1, cutting end 14 includes a plurality of teeth 20 that extend around cutting end 14. Teeth 20 may be formed in a wide variety of designs for different cutting applications. In specific embodiments, teeth 20 and cylindrical body 12 are formed from a single, contiguous, continuous piece of metal material in which teeth 20 are formed.

Referring to FIGS. 2-4, details of cylindrical body 12 are shown and described. Cylindrical body 12 is a cylindrical wall of material (e.g., metal material) that has an exterior surface 22 and an interior surface 24. Cylindrical body 12 is a substantially hollow cylinder such that a hollow internal area 26 is defined by interior surface 24 of body 12. Hole saw 10 defines a longitudinal axis 28 that extends lengthwise through hole saw 10, perpendicular to end cap 16 and perpendicular to a plane defined by cutting end 14. As will be explained in more detail below, the pattern and geometry of the openings in body 12 discussed herein provide for easy debris removal while also providing a sidewall having sufficiently high strength.

Referring to FIG. 4, body 12 of hole saw 10 is shown prior to shaping to the cylindrical shape shown in FIGS. 2 and 3 to more clearly depict the opening shape and pattern. As noted above, hole saw 10 includes a plurality of openings 30 that are shaped and arranged in a pattern around hole saw 10. In the specific embodiment of FIG. 4, openings 30 are arranged in a first group 32 and a second group 34 with relatively large areas 36 of uninterrupted portions of body 12 located between groups 32 and 34. To form the cylindrical shape of hole saw 10, body 12 is wrapped to a cylindrical shape and free edges 38 of body 12 are welded together to form the cylindrical body shown in FIGS. 2 and 3.

In general, large areas 36 and opening groups 32 and 34 are sized and positioned to provide a variety of functional benefits to hole saw 10. As shown in FIG. 4, hole groups 32 and 34 are evenly spaced circumferentially along body 12 such that when formed to a cylindrical shape, body 12 is substantially symmetrical. Similarly, the solid spaces are also positioned symmetrically around the circumference to provide dynamic balancing. This provides balance to hole saw 10 important to a rotary tool to limit/prevent shaking and vibration during use. In addition, this positioning ensures that one of the opening groups 32 or 34 is generally facing the user regardless of the rotational position when hole saw 10 stops spinning, allowing the user easy access through one of openings 30 into internal area 26 for debris removal.

Still referring to FIG. 4, uninterrupted areas 36 have a circumferential length or width, W1, and each opening group 32 and 34 have a circumferential length or width, W2. As will be understood, the absolute value of W1 and W2 will vary based on the diameter of a particular hole saw and on

the number of hole groups located around body 12. In addition, hole saw 10 may include more than two hole groups or hole groups with different numbers of holes as needed for different sized hole saws. However, in specific embodiments, W1 and W2 are substantially equal to each other, and specifically are within 50%, more specifically within 30%, and even more specifically within 20% of each other. Applicant has found that this relative sizing between uninterrupted areas 36 and opening groups 32 and 34 provides balance, sufficient strength and easy debris removal access to hollow internal area 26. Further, this relative sizing ensures that uninterrupted areas 36 are also large enough to provide areas to place logos or product information.

In various embodiments, each opening group includes a plurality of openings that are distributed both in the circumferential/width direction and in the longitudinal direction. In general, Applicant has found that an arrangement including multiple openings within each opening group 32 and 34 provides sufficient interior access for debris removal while also ensuring sufficient metal material is located within the area including the hole group to provide structural support to the hole saw. In addition to debris removal, in at least some of the embodiments discussed herein, hole saw 10 includes two or more hole groups extending around at least 50% of the circumference of hole saw 10. In other words, in such arrangements, the sum of W2 for all hole groups is greater than 50% of the circumference of hole saw 10. Such hole patterns allow for chip ejection around at least 50% of the circumference of the hole saw. Because chips are developed all around the circumference of the hole saw during cutting, the hole patterns discussed herein provide areas for chip ejection around a significant portion of the hole saw circumference, which is believed to improve hole saw performance.

In the specific embodiment shown in FIG. 4, each opening group 32 and 34 includes three openings, opening 40, opening 42 and opening 44. In this particular arrangement, openings 40 and 42 have the same shape as each other. Opening 40 is located closer to cutting teeth 20 than opening 42, and openings 40 and 42 are offset from each other in the circumferential/width direction such that an uninterrupted portion 46 of body 12 is located in the width direction between openings 40 and 42. In this arrangement, no portion of opening 40 is located between opening 42 and the cutting teeth in the longitudinal direction. In the specific embodiment shown, openings 40 and 42 are hexagonal in shape.

Opening 44 is smaller than both openings 40 and 42. In the specific embodiment shown, opening 44 has a shape that matches the shape of a lower portion of openings 40 and 42. Opening 44 is aligned with opening 42 in the longitudinal direction, and is located between cutting teeth 20 and opening 42. Applicant has found that by providing openings of various shapes and positioning within each opening group easy debris removal access to interior 26 is provided. In alternative embodiments, opening groups 32 and 34 do not include the smaller opening 44, and only include openings 40 and 42.

Specifically, within each opening group 32 and 34, Applicant has determined that a ratio of open area to solid area relates to the balance between debris removal and strength. In specific embodiments, the total area of opening groups is determined by W2 times the longitudinal length of body 12, where W2 is the circumferential length or width measured between widest lateral edges of openings within the group. In various embodiments, the ratio of the area of openings within each group to the total group area is between 20% and 80% and more specifically is between 40% and 60%.

In addition to the shape and distribution within each opening group, openings 40, 42 and 44 are sized and shaped to allow for easy insertion of a tool (e.g., a screw driver) through the openings to facilitate removing or prying of a plug or other cutting debris from interior 26. Thus, the upper and lower edges of openings 40, 42 and/or 44 having a circumferential length or width, W3, that is large enough to permit insertion of a standard flat head screw driver. Openings 40, 42 and 44 are also shaped such that their width dimension increases to circumferential length or width, W4, that is greater than W3. In various embodiments, W4 is between 125% of W3 and 300% of W3 and specifically W4 is two times W3. In a specific embodiment, W3 is between 0.25 inches and 0.5 inches.

In various embodiments, hole groups 32 and 34 are positioned relative to cutting teeth 20 and to end cap 16 to improve performance of hole saw 10. For example, the lowest edge of the lowest hole of each hole group is spaced a short distance D1 from the weld joining end cap 16 to body 12. For example, D1 is a small distance to allow a tool to be inserted behind debris located adjacent end cap 16 within hole saw 10 to facilitate removal of the debris. In specific embodiments, D1 is between  $\frac{1}{16}$ <sup>th</sup> of an inch and  $\frac{1}{2}$  inch, specifically is between  $\frac{3}{16}$ <sup>th</sup> of an inch and  $\frac{4}{16}$ <sup>th</sup> of an inch and more specifically is  $\frac{3}{16}$ <sup>th</sup> of an inch.

As another example, the highest edge of the highest hole of each hole group is spaced a distance D2 from the valley or gullet between adjacent cutting teeth. In general, Applicant has determined that if D2 is too small the cutting teeth can be damaged or experience high wear during use and/or an undesirable degree of heat can be built up at the cutting edge of the hole saw. In specific embodiments, D2 is between  $\frac{1}{32}$ <sup>nd</sup> of an inch and 1 inch, specifically is between  $\frac{1}{32}$ <sup>nd</sup> inch and  $\frac{3}{16}$ <sup>th</sup> of an inch and more specifically is  $\frac{1}{4}$ <sup>th</sup> of an inch.

Referring to FIGS. 5-7, a hole saw 100 is shown according to an exemplary embodiment. Hole saw 100 is substantially the same as hole saw 10 except for the differences discussed herein. In general, hole saw 100 includes more opening groups and more openings within each group than hole saw 10. In specific embodiments, hole saw 100 has a larger diameter than hole saw 10 with the increased number of holes accounting for the larger size.

As shown in FIG. 7, hole saw 100 includes three opening groups, groups 102, 104 and 106. Each opening group 102, 104 and 106 is separated from adjacent groups via uninterrupted areas 36. Groups 102, 104 and 106 are substantially evenly spaced such that one group is located within each 120 degree section around the circumference of hole saw 100.

Each opening group 102, 104 and 106 has six openings rather than the three opening groups of hole saw 10. In particular, in addition to openings 40, 42 and 44, each group 102, 104 and 106 include openings 110, 112 and 114. As can be seen in FIG. 7, opening 110 has the same shape as openings 40 and 42 and is aligned with opening 40 in the circumferential direction and is spaced from both openings 40 and 42 in the circumferential/width direction.

Openings 112 and 114 have the same shape as opening 44. Openings 112 and 114 are located further from cutting teeth 20 than opening 44. Further, opening 112 is located on one side of opening 42 in the circumferential/width direction and opening 114 is located on the other side of opening 42 in the circumferential/width direction. In the specific embodiment shown, opening 112 is aligned with opening 110 in the longitudinal direction and is located between opening 110 and end cap 16. Similarly, in the specific embodiment

shown, opening **114** is aligned with opening **40** in the longitudinal direction and is located between opening **40** and end cap **16**.

In various embodiments, the number of opening groups located around the hole saw body changes based on the size of the hole saw. In various embodiments, the number of openings within each opening group and/or the size of each opening increase as the size of the hole saw increases. In a specific embodiment both the number of hole groups and the relative width of the hole group, **W2**, to the width of the solid space, **W1**, increases as the diameter of the hole saw increases. In specific embodiments, a three inch diameter hole saw includes three hole groups and three space solid areas. In specific embodiments, a four inch diameter hole saw includes four hole groups and four space solid areas. In addition, as shown in the embodiment of FIG. 7, **W2** is greater than **W1** and specifically is between 1 and 2 times **W1**. In some embodiments, **W2** is greater than **W1**, specifically **W2** is greater than 1.5 times **W1**, greater than 2.5 times **W1** or greater than 3 times **W1**. In a specific embodiment, the diameter of the hole saw is six inches and **W2** is 3.5 times **W1**.

Referring to FIG. 8, a hole saw **200** is shown according to an exemplary embodiment. Hole saw **200** is substantially the same as hole saw **10** and hole saw **100** except for the differences discussed herein. In general, hole saw **200** includes the same number of opening groups as hole saw **10** and the same number of openings within each opening group as hole saw **100**.

As shown in FIG. 8, hole saw **200** includes two opening groups, groups **202** and **204**. Each opening group **202** and **204** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **202** and **204** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **200**.

Each opening group **202** and **204** has six openings, similar to hole saw **100**. In particular, each opening group **202** and **204** includes openings **210**, **212**, **214**, **216**, **218**, and **220**. As can be seen in FIG. 8, opening **210** has a shape of a first rectangle. Openings **216** and **218** have the same shape as opening **210**. Opening **212** has a shape of a second rectangle, with a smaller height than, and a same width as, the first rectangle. Openings **214** and **220** have the same shape as opening **212**. Opening **210** is aligned with opening **218** in the circumferential direction and is spaced from both openings **216** and **218** in the circumferential/width direction. Openings **212**, **216**, and **220** are located further from cutting teeth **20** than openings **210**, **214**, and **218**.

Further, opening **210** is located on one side of opening **214** in the circumferential/width direction, and opening **218** is located on the other side of opening **214** in the circumferential/width direction. Similarly, opening **212** is located on one side of opening **216** in the circumferential/width direction, and opening **220** is located on the other side of opening **216** in the circumferential/width direction. In the specific embodiment shown, opening **212** is aligned with opening **210** in the longitudinal direction and is located between opening **210** and endcap **16**. Similarly, in the specific embodiment shown, opening **216** is aligned with opening **214** in the longitudinal direction and is located between opening **214** and endcap **16**. Similarly, in the specific embodiment shown, opening **220** is aligned with opening **218** in the longitudinal direction and is located between opening **218** and endcap **16**.

Referring to FIG. 9, a hole saw **300** is shown according to an exemplary embodiment. Hole saw **300** is substantially the

same as hole saw **10** except for the differences discussed herein. In general, hole saw **300** includes the same number of opening groups, and the same number of openings within each opening group, as hole saw **10**.

As shown in FIG. 9, hole saw **300** includes two opening groups, groups **302** and **304**. Each opening group **302** and **304** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **302** and **304** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **300**.

Each opening group **302** and **304** has three openings. In particular, each opening group **302** and **304** includes openings **310**, **312**, and **314**. As can be seen in FIG. 9, opening **310** has a shape of a triangle. Openings **312** and **314** have the same shape as opening **310**. In a specific embodiment, openings **310**, **312**, and **314** each have a shape of an equilateral triangle. Opening **312** is aligned with opening **314** in the circumferential/width direction and is spaced from both openings **310** and **314** in the circumferential/width direction. Openings **312** and **314** are located further from cutting teeth **20** than is opening **310**.

In the specific embodiment shown, openings **310**, **312**, and **314** each has an apex point facing towards cutting teeth **20**. The apex point of opening **310** is positioned midway between the apex points of openings **312** and **314**. Opening **310** is aligned in the longitudinal direction with openings **312** and **314**. Openings **312** and **314** are located between opening **310** and endcap **16**.

Referring to FIG. 10, a hole saw **400** is shown according to an exemplary embodiment. Hole saw **400** is substantially the same as hole saw **10** except for the differences discussed herein. In general, hole saw **400** includes the same number of opening groups, and the same number of openings within each opening group, as hole saw **10**.

As shown in FIG. 10, hole saw **400** includes two opening groups, groups **402** and **404**. Each opening group **402** and **404** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **402** and **404** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **400**.

Each opening group **402** and **404** has three openings. In particular, each opening group **402** and **404** includes openings **410**, **412**, and **414**. As can be seen in FIG. 10, opening **410** has a shape of a pentagon. Openings **412** and **414** have the same shape as opening **410**. In a specific embodiment, openings **410**, **412**, and **414** each have a shape of an equilateral pentagon. Opening **412** is aligned with opening **414** in the circumferential/width direction and is spaced from both openings **410** and **414** in the circumferential/width direction. Openings **412** and **414** are located further from cutting teeth **20** than opening **410**.

In the specific embodiment shown, openings **410**, **412**, and **414** each has an apex point facing towards cutting teeth **20**. The apex point of opening **410** is positioned midway between the apex points of openings **412** and **414**. Opening **410** is aligned in the longitudinal direction with openings **412** and **414**. Openings **412** and **414** are located between opening **410** and endcap **16**.

Referring to FIG. 11, a hole saw **500** is shown according to an exemplary embodiment. Hole saw **500** is substantially the same as hole saw **10** and hole saw **100** except for the differences discussed herein. In general, hole saw **500** includes the same number of opening groups as hole saw **10** and the same number of openings within each opening group as hole saw **100**.

As shown in FIG. 11, hole saw 500 includes two opening groups, groups 502 and 504. Each opening group 502 and 504 is separated from adjacent opening groups via uninterrupted areas 36. Opening groups 502 and 504 are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw 500.

Each opening group 502 and 504 has six openings, similar to hole saw 100. In particular, each opening group 502 and 504 includes openings 510, 512, 514, 516, 518, and 520. As can be seen in FIG. 11, opening 510 has a shape of a first parallelogram leaning upwards and right. In a specific embodiment, opening 510 has a shape of a first rhomboid. Openings 516 and 518 have the same shape as opening 510. Opening 512 has a shape of a second parallelogram leaning upwards and right, with a same width and a smaller height than the first parallelogram. In a specific embodiment, opening 512 has a shape of a second rhomboid. Openings 514 and 520 have the same shape as opening 512. Opening 510 is aligned with opening 518 in the circumferential direction and is spaced from both openings 516 and 518 in the circumferential/width direction. Openings 512, 516, and 520 are located further from cutting teeth 20 than are openings 510, 514, and 518.

Further, opening 510 is located on one side of opening 514 in the circumferential/width direction, and opening 518 is located on the other side of opening 514 in the circumferential/width direction. Similarly, opening 512 is located on one side of opening 516 in the circumferential/width direction, and opening 520 is located on the other side of opening 516 in the circumferential/width direction. In the specific embodiment shown, opening 512 is aligned with opening 510 in a diagonal direction of hole saw 500 and is located between opening 510 and endcap 16. Similarly, in the specific embodiment shown, opening 516 is aligned with opening 514 in the same diagonal direction as openings 510 and 512, and is located between opening 514 and endcap 16. Similarly, in the specific embodiment shown, opening 520 is aligned with opening 518 in the same diagonal direction as openings 510 and 512, and is located between opening 518 and endcap 16.

Referring to FIG. 12, a hole saw 600 is shown according to an exemplary embodiment. Hole saw 600 is substantially the same as hole saw 10 and hole saw 100 except for the differences discussed herein. In general, hole saw 600 includes the same number of opening groups as hole saw 10 and more openings within each opening group than both hole saw 10 and hole saw 100.

As shown in FIG. 12, hole saw 600 includes two opening groups, groups 602 and 604. Each opening group 602 and 604 is separated from adjacent opening groups via uninterrupted areas 36. Opening groups 602 and 604 are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw 600.

Each opening group 602 and 604 has nine openings, rather than the three openings of hole saw 10 or the six openings of hole saw 100. In particular, each opening group 602 and 604 includes openings 610, 612, 614, 616, 618, 620, 622, 624, and 626. As can be seen in FIG. 12, opening 610 has a shape of a parallelogram leaning upwards and right. In a specific embodiment, opening 610 has a shape of a rhomboid. Openings 612, 614, 616, 618, 620, 622, 624, and 626 have the same shape as opening 610. Opening 610 is aligned with openings 616 and 622 in the circumferential direction and is spaced from both openings 612 and 616 in the circumferential/width direction. Openings 610, 616, and

622 are located nearest the cutting teeth 20. Openings 612, 618, and 624 are located midway respectively between openings 610, 616, and 622 and openings 614, 620, and 626, which are nearest the endcap 16.

Further, opening 610 is located on one side of opening 616 in the circumferential/width direction, and opening 622 is located on the other side of opening 616 in the circumferential/width direction. Similarly, opening 612 is located on one side of opening 618 in the circumferential/width direction, and opening 624 is located on the other side of opening 618 in the circumferential/width direction. Similarly, opening 614 is located on one side of opening 620 in the circumferential/width direction, and opening 626 is located on the other side of opening 620 in the circumferential/width direction. In the specific embodiment shown, openings 612 and 614 are aligned with opening 610 in a diagonal direction of hole saw 600. Similarly, in the specific embodiment shown, openings 618 and 620 is aligned with opening 616 in the same diagonal direction as openings 610, 612, and 614. Similarly, in the specific embodiment shown, openings 624 and 626 are aligned with opening 622 in the same diagonal direction as openings 610, 612, and 614.

Referring to FIG. 13, a hole saw 700 is shown according to an exemplary embodiment. Hole saw 700 is substantially the same as hole saw 10 and hole saw 100 except for the differences discussed herein. In general, hole saw 700 includes the same number of opening groups as hole saw 10 and more openings within each opening group than both hole saw 10 and hole saw 100.

As shown in FIG. 13, hole saw 700 includes two opening groups, groups 702 and 704. Each opening group 702 and 704 is separated from adjacent opening groups via uninterrupted areas 36. Opening groups 702 and 704 are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw 700.

Each opening group 702 and 704 has eight openings, rather than the three openings of hole saw 10 or the six openings of hole saw 100. In particular, each opening group 702 and 704 includes openings 710, 712, 714, 716, 718, 720, 722, and 724. As can be seen in FIG. 13, opening 710 has a shape of a parallelogram leaning upwards and right. In a specific embodiment, opening 710 has a shape of a rhomboid. Openings 710, 712, 714, 716, 718, 720, 722, and 724 have the same shape as opening 710. Opening 710 is aligned with openings 716 and 722 in the circumferential/width direction. Openings 710, 716, and 722 are located nearest the cutting teeth 20. Openings 712 and 718 are located along the longitudinal direction midway between openings 710, 716, and 722 and openings 714, 720, and 724, which are nearest the endcap 16. Openings 712 and 718 are staggered midway centrally along the circumference of hole saw 700 between openings 710, 716, and 722 and openings 714, 720, and 724.

Further, opening 710 is located on one side of opening 716 in the circumferential/width direction, and opening 722 is located on the other side of opening 716 in the circumferential/width direction. Similarly, opening 714 is located on one side of opening 720 in the circumferential/width direction, and opening 724 is located on the other side of opening 720 in the circumferential/width direction. In the specific embodiment shown, opening 714 is aligned with opening 710 in a diagonal direction of hole saw 700. Similarly, in the specific embodiment shown, opening 716 is aligned with opening 720 in the same diagonal direction as openings 710 and 714. Similarly, in the specific embodiment

## 11

shown, opening 722 is aligned with opening 724 in the same diagonal direction as openings 710 and 714.

Referring to FIG. 14, a hole saw 800 is shown according to an exemplary embodiment. Hole saw 800 is substantially the same as hole saw 10 and hole saw 100 except for the differences discussed herein. In general, hole saw 800 includes the same number of opening groups as hole saw 10 and more openings within each opening group than both hole saw 10 and hole saw 100.

As shown in FIG. 14, hole saw 800 includes two opening groups, groups 802 and 804. Each opening group 802 and 804 is separated from adjacent opening groups via uninterrupted areas 36. Opening groups 802 and 804 are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw 800.

Each opening group 802 and 804 has nine openings, rather than the three openings of hole saw 10 or the six openings of hole saw 100. In particular, each opening group 802 and 804 includes openings 810, 812, 814, 816, 818, 820, 822, 824, and 826. As can be seen in FIG. 14, opening 810 has a shape of a parallelogram leaning upwards and right. In a specific embodiment, opening 810 has a shape of a rhomboid. Openings 812, 814, 816, 818, 820, 822, 824, and 826 have the same shape as opening 810. Opening 810 is aligned with openings 816 and 822 in the circumferential/width direction. Openings 810, 816, and 822 are located nearest the cutting teeth 20. Openings 812, 818, and 824 are located midway respectively between openings 810, 816, and 822 and openings 814, 820, and 826, which are nearest the endcap 16. Openings 812, 818, and 824 are staggered midway to the left along the circumference of hole saw 800 between openings 810, 816, and 822 and openings 814, 820, and 826.

Further, opening 810 is located on one side of opening 816 in the circumferential/width direction, and opening 822 is located on the other side of opening 816 in the circumferential/width direction. Similarly, opening 812 is located on one side of opening 818 in the circumferential/width direction, and opening 824 is located on the other side of opening 818 in the circumferential/width direction. Similarly, opening 814 is located on one side of opening 820 in the circumferential/width direction, and opening 826 is located on the other side of opening 820 in the circumferential/width direction. In the specific embodiment shown, opening 814 is aligned with opening 810 in a diagonal direction of hole saw 800. Similarly, in the specific embodiment shown, opening 820 is aligned with opening 816 in the same diagonal direction as openings 810 and 814. Similarly, in the specific embodiment shown, opening 826 is aligned with opening 822 in the same diagonal direction as openings 810 and 814.

Referring to FIG. 15, a hole saw 900 is shown according to an exemplary embodiment. Hole saw 900 is substantially the same as hole saw 10 and hole saw 100 except for the differences discussed herein. In general, hole saw 900 includes the same number of opening groups as hole saw 10 and the same number of openings within each opening group as hole saw 100.

As shown in FIG. 15, hole saw 900 includes two opening groups, groups 902 and 904. Each opening group 902 and 904 is separated from adjacent opening groups via uninterrupted areas 36. Opening groups 902 and 904 are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw 900.

## 12

Each opening group 902 and 904 has six openings, rather than the three openings of hole saw 10. In particular, each opening group 902 and 904 includes openings 910, 912, 914, 916, 918, and 920. As can be seen in FIG. 15, opening 910 has a shape of a parallelogram leaning upwards and right. In a specific embodiment, opening 910 has a shape of a rhomboid. Openings 910, 912, 914, 916, 918, and 920 have the same shape as opening 910. Opening 910 is aligned with opening 916 in the circumferential/width direction. Openings 910 and 916 are located nearest the cutting teeth 20. Openings 912 and 918 are located midway respectively between openings 910 and 916 and openings 914 and 920, which are nearest the endcap 16. Openings 912 and 918 are staggered midway to the left along the circumference of hole saw 900 between openings 910 and 916 and openings 914 and 920.

In the specific embodiment shown, opening 914 is aligned with opening 910 in a diagonal direction of hole saw 900. Similarly, in the specific embodiment shown, opening 920 is aligned with opening 916 in the same diagonal direction as openings 910 and 914.

Referring to FIG. 16, a hole saw 1000 is shown according to an exemplary embodiment. Hole saw 1000 is substantially the same as hole saw 10 except for the differences discussed herein. In general, hole saw 1000 includes the same number of opening groups, and the same number of openings within each opening group, as hole saw 10.

As shown in FIG. 16, hole saw 1000 includes two opening groups, groups 1002 and 1004. Each opening group 1002 and 1004 is separated from adjacent opening groups via uninterrupted areas 36. Opening groups 1002 and 1004 are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw 1000.

Each opening group 1002 and 1004 has three openings. In particular, each opening group 1002 and 1004 includes openings 1010, 1012, and 1014. As can be seen in FIG. 16, opening 1010 has a shape of a triangle. In a specific embodiment, opening 1010 has a shape of a scalene triangle. Opening 1014 has the same shape as opening 1010. Opening 1010 is positioned nearest the cutting teeth 20, and has a base facing the cutting teeth 20, and an apex point facing endcap 16. Opening 1010 has a hypotenuse facing opening 1012. Opening 1014 is positioned nearest endcap 16, and has a base facing endcap 16, and an apex point facing the cutting teeth 20. Opening 1014 has a hypotenuse facing opening 1012. Neither opening 1010 nor opening 1014 extends along the full longitudinal direction of hole saw 1000. Opening 1012 has a shape of a parallelogram leaning upwards and right. In a specific embodiment, opening 1012 has a shape of a rhomboid. Opening 1012 extends fully along a diagonal direction of hole saw 1000. Opening 1010 is located on one side of opening 1012, and opening 1014 is located on the other side of opening 1012.

Referring to FIG. 17, a hole saw 1100 is shown according to an exemplary embodiment. Hole saw 1100 is substantially the same as hole saw 10 except for the differences discussed herein. In general, hole saw 1100 includes the same number of opening groups as hole saw 10 and a greater number of openings within each opening group as hole saw 10.

As shown in FIG. 17, hole saw 1100 includes two opening groups, groups 1102 and 1104. Each opening group 1102 and 1104 is separated from adjacent opening groups via uninterrupted areas 36. Opening groups 1102 and 1104 are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw 1100.



## 13

Each opening group **1102** and **1104** has four openings, rather than the three openings of hole saw **10**. In particular, each opening group **1102** and **1104** includes openings **1110**, **1112**, **1114**, and **1116**. As can be seen in FIG. 17, opening **1110** has a shape of a semicircle. Opening **1116** has the same shape as opening **1110**. Opening **1112** has a shape of an ellipse, with larger dimensions than the semicircle. Opening **1114** has the same shape as opening **1112**. Opening **1110** is aligned with opening **1114** in the circumferential direction and is spaced from both openings **1112** and **1116** in the circumferential/width direction. Openings **1112** and **1116** are located further from cutting teeth **20** than are openings **1110** and **1114**.

Opening **1110** has a flat end facing towards endcap **16**. Opening **1116** has a flat end facing towards the cutting teeth **20**. Openings **1112** and **1114** both have a major axis aligned in the longitudinal direction. Opening **1110** and opening **1114** each has a tangent end that are aligned circumferentially facing the cutting teeth **20**. Similarly, opening **1112** and opening **1116** each has a tangent end that are aligned circumferentially facing endcap **16**.

In the specific embodiment shown, opening **1112** is aligned with opening **1110** in the longitudinal direction and is located between opening **1110** and endcap **16**. Similarly, in the specific embodiment shown, opening **1116** is aligned with opening **1114** in the longitudinal direction and is located between opening **1114** and endcap **16**.

Referring to FIG. 18, a hole saw **1200** is shown according to an exemplary embodiment. Hole saw **1200** is substantially the same as hole saw **1100** except for the differences discussed herein. In general, hole saw **1100** includes the same number of opening groups, and the same number of openings within each group opening, as hole saw **1100**.

As shown in FIG. 18, hole saw **1200** includes two opening groups, groups **1202** and **1204**. Each opening group **1202** and **1204** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1202** and **1204** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **1200**.

Each opening group **1202** and **1204** has four openings, similar to the four openings of hole saw **1100**. In particular, each opening group **1202** and **1204** includes openings **1210**, **1212**, **1214**, and **1216**. As can be seen in FIG. 18, opening **1210** has a shape of a first ellipse. Opening **1216** has the same shape as opening **1210**. Opening **1212** has a shape of a second ellipse, with smaller dimensions than the first ellipse. Opening **1214** has the same shape as opening **1212**. Opening **1210** is aligned with opening **1214** in the circumferential direction and is spaced from both openings **1212** and **1214** in the circumferential/width direction. Openings **1212** and **1216** are located further from cutting teeth **20** than are openings **1210** and **1214**.

Opening **1210** and opening **1216** each has a minor axis aligned in the longitudinal direction. Openings **1112** and **1114** both have a major axis aligned in the longitudinal direction. The minor axis of opening **1210** is aligned longitudinally with the major axis of opening **1212**, while the minor axis of opening **1216** is aligned longitudinally with the major axis of opening **1214**.

Referring to FIG. 19, a hole saw **1300** is shown according to an exemplary embodiment. Hole saw **1300** is substantially the same as hole saw **1100** except for the differences discussed herein. In general, hole saw **1300** includes the same number of opening groups, and the same number of openings within each opening group, as hole saw **1100**.

## 14

As shown in FIG. 19, hole saw **1300** includes two opening groups, groups **1302** and **1304**. Each opening group **1302** and **1304** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1302** and **1304** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **1300**.

Each opening group **1302** and **1304** has four openings, similar to the four openings of hole saw **1100**. In particular, each opening group **1302** and **1304** includes openings **1310**, **1312**, **1314**, and **1316**. As can be seen in FIG. 19, opening **1310** has a shape of a hexagon. Opening **1316** has the same shape as opening **1310**. Opening **1312** has a shape of a semi-hexagon with smaller dimensions than the hexagon, and has rounded corners, a rounded base edge, and a rounded top edge. Opening **1314** has the same shape as opening **1312**. The rounded base edge of opening **1312** faces towards endcap **16**, and the rounded top edge of opening **1312** faces towards cutting teeth **20**. The rounded base edge of opening **1314** faces towards cutting teeth **20**, and the rounded top edge of opening **1314** faces towards endcap **16**. Opening **1310** is aligned with opening **1314** in the circumferential direction and is spaced from both openings **1312** and **1316** in the circumferential/width direction. Openings **1312** and **1316** are located further from cutting teeth **20** than are openings **1310** and **1314**.

In the specific embodiment shown, opening **1312** is aligned with opening **1310** in the longitudinal direction and is located between opening **1310** and endcap **16**. Similarly, in the specific embodiment shown, opening **1316** is aligned with opening **1314** in the longitudinal direction and is located between opening **1314** and endcap **16**.

Referring to FIG. 20, a hole saw **1400** is shown according to an exemplary embodiment. Hole saw **1400** is substantially the same as hole saw **10** except for the differences discussed herein. In general, hole saw **1400** includes the same number of opening groups as hole saw **10** and a greater number of openings within each opening group than hole saw **10**.

As shown in FIG. 20, hole saw **1400** includes two opening groups, groups **1402** and **1404**. Each opening group **1402** and **1404** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1402** and **1404** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **1400**.

Each opening group **1402** and **1404** has four openings, rather than the three openings of hole saw **10**. In particular, each opening group **1402** and **1404** includes openings **1410**, **1412**, **1414**, and **1416**. As can be seen in FIG. 20, opening **1410** has a shape of a first rectangle. Opening **1416** has the same shape as opening **1410**. Opening **1412** has a shape of a second rectangle, with a smaller height than, and a same width as, the first rectangle. Opening **1414** has the same shape as opening **1412**. Opening **1410** is spaced from both openings **1412** and **1414** in the circumferential/width direction. Openings **1412** and **1416** are located further from cutting teeth **20** than are openings **1410** and **1414**.

In the specific embodiment shown, opening **1412** is aligned with opening **1410** in the longitudinal direction and is located between opening **1410** and endcap **16**. Similarly, in the specific embodiment shown, opening **1416** is aligned with opening **1414** in the longitudinal direction and is located between opening **1414** and endcap **16**.

Referring to FIG. 21, a hole saw **1500** is shown according to an exemplary embodiment. Hole saw **1500** is substantially the same as hole saw **10** except for the differences

## 15

discussed herein. In general, hole saw **1500** includes the same number of opening groups as hole saw **10** and fewer openings within each opening group as hole saw **10**.

As shown in FIG. **21**, hole saw **1500** includes two opening groups, groups **1502** and **1504**. Each opening group **1502** and **1504** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1502** and **1504** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **1500**.

Each opening group **1502** and **1504** has two openings, rather than the three openings of hole saw **10**. In particular, each opening group **1502** and **1504** includes openings **1510** and **1512**. As can be seen in FIG. **21**, opening **1510** has a shape of a slot. Opening **1512** has the same shape as opening **1510**. Opening **1510** and opening **1512** each has a pair of tangential ends, with a first tangential end facing towards the cutting teeth **20**, and a second tangential end facing towards endcap **16**. Openings **1510** and **1512** each has a major axis positioned longitudinally between the cutting teeth **20** and endcap **16**. Opening **1510** has a minor axis aligned horizontally with the first tangential end of opening **1512**. Opening **1512** has a minor axis aligned horizontally with the second tangential end of opening **1510**. Opening **1510** is spaced from opening **1512** in the circumferential/width direction.

Referring to FIG. **22**, a hole saw **1600** is shown according to an exemplary embodiment. Hole saw **1600** is substantially the same as hole saw **1500** except for the differences discussed herein. In general, hole saw **1600** includes the same number of opening groups, and the same number of openings within each opening group, as hole saw **1500**.

As shown in FIG. **22**, hole saw **1600** includes two opening groups, groups **1602** and **1604**. Each opening group **1602** and **1604** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1602** and **1604** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **1600**.

Each opening group **1602** and **1604** has two openings, similar to hole saw **1500**. In particular, each opening group **1602** and **1604** includes openings **1610** and **1612**. As can be seen in FIG. **22**, opening **1610** has a shape of a profile. Opening **1612** has the same shape as opening **1510**. Opening **1610** and opening **1612** each has a flat edge facing towards the cutting teeth **20**, a pair of parallel edges aligned longitudinally, and an arcuate edge facing towards endcap **16**. Opening **1612** is staggered longitudinally and circumferentially with respect to opening **1610**, with its arcuate edge closer to endcap **16**, and its flat edge further from the cutting teeth **20**. Opening **1610** is spaced from opening **1612** in the circumferential/width direction.

Referring to FIG. **23**, a hole saw **1700** is shown according to an exemplary embodiment. Hole saw **1700** is substantially the same as hole saw **1500** except for the differences discussed herein. In general, hole saw **1700** includes the same number of opening groups, and the same number of openings within each opening group, as hole saw **1500**.

As shown in FIG. **23**, hole saw **1700** includes two opening groups, groups **1702** and **1704**. Each opening group **1702** and **1704** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1702** and **1704** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **1700**.

Each opening group **1702** and **1704** has two openings, similar to hole saw **1500**. In particular, each opening group **1702** and **1704** includes openings **1710** and **1712**. As can be

## 16

seen in FIG. **23**, opening **1710** has a shape of an ellipse. Opening **1712** has the same shape as opening **1710**. Opening **1710** and opening **1712** each has a pair of tangential ends, with a first tangential end facing towards the cutting teeth **20**, and a second tangential end facing towards endcap **16**. Openings **1710** and **1712** each has a major axis positioned longitudinally between the cutting teeth **20** and endcap **16**. Opening **1710** has a minor axis aligned horizontally with the first tangential end of opening **1712**. Opening **1712** has a minor axis aligned horizontally with the second tangential end of opening **1710**. Opening **1710** is spaced from opening **1712** in the circumferential/width direction.

Referring to FIG. **24**, a hole saw **1800** is shown according to an exemplary embodiment. Hole saw **1800** is substantially the same as hole saw **10** except for the differences discussed herein. In general, hole saw **1800** includes the same number of opening groups, and the same number of openings within each opening group, as hole saw **10**.

As shown in FIG. **24**, hole saw **1800** includes two opening groups, groups **1802** and **1804**. Each opening group **1802** and **1804** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1802** and **1804** are evenly spaced such that one opening group is located within each 180 degree section around the circumference of hole saw **1800**.

Each opening group **1802** and **1804** has three openings. In particular, each opening group **1802** and **1804** includes openings **1810**, **1812**, and **1814**. As can be seen in FIG. **24**, opening **1810** has a shape of a first slot. Opening **1814** has the same shape as opening **1810**. Opening **1812** has a shape of a second slot, with smaller dimensions than the first slot. Opening **1810** is spaced from openings **1812** and **1814** in the circumferential/width direction. Opening **1810** is positioned closer to opening **1812** than opening **1812** is to opening **1814**. Openings **1810**, **1812**, and **1814** each has a pair of tangential ends, with a first tangential end facing the cutting teeth **20** and a second tangential end facing endcap **16**. Openings **1810**, **1812**, and **1814** each has a major axis aligned longitudinally between the cutting teeth **20** and endcap **16**. Opening **1810** has a center positioned midway between the cutting teeth **20** and endcap **16**. Opening **1812** has a center positioned closer to the cutting teeth **20**. Opening **1814** has a center positioned closer to endcap **16**.

Referring to FIG. **25**, a hole saw **1900** is shown according to an exemplary embodiment. Hole saw **1900** is substantially the same as hole saw **10** except for the differences discussed herein. In general, hole saw **1900** includes more opening groups, and fewer openings within each opening group, as hole saw **10**.

As shown in FIG. **25**, hole saw **1900** includes four opening groups, groups **1902**, **1904**, **1906**, and **1908**. Each opening group **1902**, **1904**, **1906**, and **1908** is separated from adjacent opening groups via uninterrupted areas **36**. Opening groups **1902**, **1904**, **1906**, and **1908** are evenly spaced such that one opening group is located within each 90 degree section around the circumference of hole saw **1900**.

Each opening group **1902**, **1904**, **1906**, and **1908** has one opening. In particular, each opening group **1902**, **1904**, **1906**, and **1908** includes opening **1910**. As can be seen in FIG. **25**, opening **1910** has a shape of an ellipse. Opening **1910** has a pair of tangential ends, with a first tangential end facing towards the cutting teeth **20**, and a second tangential end facing towards endcap **16**. Opening **1910** has a major axis positioned longitudinally between the cutting teeth **20** and endcap **16**.

Referring to FIG. **26**, a hole saw **2000** is shown according to an exemplary embodiment. Hole saw **2000** is substan-

17

tially the same as hole saw **10** except for the differences discussed herein. In general, hole saw **2000** includes fewer opening groups than hole saw **10**, and fewer openings within each opening group than hole saw **10**.

As shown in FIG. **26**, hole saw **2000** includes one opening group, group **2002**. Opening group **2002** is located within a section around the circumference of hole saw **2000**.

Opening group **2002** has one opening. In particular, opening group **2002** includes opening **2010**. As can be seen in FIG. **26**, opening **2010** has a shape of a slot. The slot of opening **2010** has a first tangent end leaning upward and left towards cutting teeth **20**, and a second tangent end leaning downward and right towards endcap **16**.

It should be understood that the figures illustrate the exemplary embodiments in detail, and it should be understood that the present application is not limited to the details or methodology set forth in the description or illustrated in the figures. It should also be understood that the terminology is for the purpose of description only and should not be regarded as limiting.

Further modifications and alternative embodiments of various aspects of the invention will be apparent to those skilled in the art in view of this description. Accordingly, this description is to be construed as illustrative only. The construction and arrangements, shown in the various exemplary embodiments, are illustrative only. Although only a few embodiments have been described in detail in this disclosure, many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter described herein. Some elements shown as integrally formed may be constructed of multiple parts or elements, the position of elements may be reversed or otherwise varied, and the nature or number of discrete elements or positions may be altered or varied. The order or sequence of any process, logical algorithm, or method steps may be varied or re-sequenced according to alternative embodiments. Other substitutions, modifications, changes and omissions may also be made in the design, operating conditions and arrangement of the various exemplary embodiments without departing from the scope of the present invention.

Unless otherwise expressly stated, it is in no way intended that any method set forth herein be construed as requiring that its steps be performed in a specific order. Accordingly, where a method claim does not actually recite an order to be followed by its steps or it is not otherwise specifically stated in the claims or descriptions that the steps are to be limited to a specific order, it is in no way intended that any particular order be inferred. In addition, as used herein the article "a" is intended to include one or more than one component or element, and is not intended to be construed as meaning only one.

For purposes of this disclosure, the term "coupled" means the joining of two components directly or indirectly to one another. Such joining may be stationary in nature or movable in nature. Such joining may be achieved with the two members and any additional intermediate members being integrally formed as a single unitary body with one another, or with the two members and any additional member being attached to one another. Such joining may be permanent in nature or alternatively may be removable or releasable in nature. Various embodiments of the invention relate to any combination of any of the features, and any such combination of features may be claimed in this or future applications.

18

Any of the features, elements, or components of any of the exemplary embodiments discussed above may be utilized alone or in combination with any of the features, elements, or components of any of the other embodiments discussed above.

In various exemplary embodiments, the relative dimensions, including angles, lengths and radii, as shown in the Figures are to scale. Actual measurements of the Figures will disclose relative dimensions, angles and proportions of the various exemplary embodiments. Various exemplary embodiments extend to various ranges around the absolute and relative dimensions, angles and proportions that may be determined from the Figures. Various exemplary embodiments include any combination of one or more relative dimensions or angles that may be determined from the Figures. Further, actual dimensions not expressly set out in this description can be determined by using the ratios of dimensions measured in the Figures in combination with the express dimensions set out in this description. In addition, in various embodiments, the present disclosure extends to a variety of ranges (e.g., plus or minus 30%, 20%, or 10%) around any of the absolute or relative dimensions disclosed herein or determinable from the Figures.

What is claimed is:

**1.** A hole saw comprising:

a saw body, comprising:

a first end;

a second end opposite the first end along an axis;

an outer surface extending circumferentially around the axis; and

an inner surface opposite the outer surface and defining a hollow internal area;

cutting teeth extending from the first end of the saw body;

an end cap coupled to the second end of the saw body;

an arbor configured to couple the hole saw to a driving tool, the arbor extending outward from the end cap in a direction opposite from the cutting teeth; and

a group of openings extending between the outer surface and the inner surface of the saw body, wherein the group of openings comprises:

a first discrete opening having a first shape; and

a second discrete opening having a second shape, wherein the second discrete opening is smaller than the first discrete opening, and the second discrete opening is located closer to the cutting teeth than the first discrete opening;

wherein the first shape is symmetrical in a longitudinal direction parallel to the axis;

wherein the second shape is asymmetrical in the longitudinal direction; and

wherein the saw body and the cutting teeth are formed from a single, contiguous, continuous piece of metal material.

**2.** The hole saw of claim **1**, wherein the first shape is symmetrical in a circumferential direction along the outer surface with respect to the axis, and wherein the second shape is symmetrical in the circumferential direction.

**3.** The hole saw of claim **1**, wherein the second discrete opening is aligned with the first discrete opening in a longitudinal direction such that the second discrete opening is between the first discrete opening and the cutting teeth.

**4.** The hole saw of claim **1**, wherein the group of openings is a first group of openings and further comprising:

a second group of openings extending between the outer surface and the inner surface of the saw body, wherein the second group of openings comprises:

19

a third discrete opening having the first shape; and  
a fourth discrete opening having the second shape.

5. The hole saw of claim 4, wherein an uninterrupted area is located between the first group of openings and the second group of openings, and wherein the uninterrupted area extends from the cutting teeth to the second end of the saw body.

6. The hole saw of claim 4, wherein a total circumferential width of both the first group of openings and the second group of openings combined is at least 50% of a total circumferential width of the saw body.

7. A hole saw comprising:

a saw body, comprising:

a first end;

a second end opposite the first end along an axis;

an outer surface extending circumferentially around the axis; and

an inner surface defining a hollow internal area;

cutting teeth extending from the first end of the saw body;

an end cap coupled to the second end of the saw body;

an arbor configured to couple the hole saw to a driving tool, the arbor extending outward from the end cap in a direction opposite from the cutting teeth;

a first group of at least two discrete openings extending between the outer surface and the inner surface of the saw body, the first group comprising:

a first discrete opening having a first shape; and

a second discrete opening having a second shape, wherein the second discrete opening is smaller than the first discrete opening, and the second discrete opening is located closer to the cutting teeth than the first discrete opening;

wherein the first shape is symmetrical in a circumferential direction along the outer surface with respect to the axis, and wherein the second shape is asymmetrical in a longitudinal direction parallel to the axis;

a second group of at least two discrete openings extending between the outer surface and the inner surface of the saw body, the second group comprising:

a third discrete opening having a third shape; and

a fourth discrete opening having a fourth shape, wherein the fourth discrete opening is smaller than the third discrete opening, and the fourth discrete opening is located closer to the cutting teeth than the third discrete opening; and

an uninterrupted area located between the first group of at least two discrete openings and the second group of at least two discrete openings, the uninterrupted area extending from the first end of the saw body to the second end of the saw body.

8. The hole saw of claim 7, wherein the uninterrupted area defines a first width and the first group of at least two discrete openings defines a second width, and wherein the first width and the second width are within 50% of each other.

9. The hole saw of claim 8, wherein the first width and the second width are within 30% of each other.

10. The hole saw of claim 7, wherein the first shape is symmetrical in the longitudinal direction.

11. The hole saw of claim 7, wherein the second shape matches a lower portion of the first shape.

12. The hole saw of claim 7, wherein the first shape and the third shape are the same size and shape as each other.

20

13. The hole saw of claim 12, wherein the second shape and the fourth shape have the same size and shape as each other.

14. The hole saw of claim 7, wherein the saw body and the cutting teeth are formed from a single, contiguous, continuous piece of metal material.

15. A hole saw comprising:

a saw body, comprising:

a first end;

a second end opposite the first end along a longitudinal axis;

an outer surface extending circumferentially around the longitudinal axis; and

an inner surface defining a hollow internal area;

cutting teeth extending from the first end of the saw body;

an end cap coupled to the second end of the saw body;

an arbor configured to couple the hole saw to a driving tool, the arbor extending outward from the end cap in a direction opposite from the cutting teeth;

a first group of at least two discrete openings extending between the outer surface and the inner surface of the saw body, the first group comprising:

a first discrete opening having a first shape; and

a second discrete opening having a second shape, the second discrete opening located closer to the cutting teeth than the first discrete opening;

a second group of at least two discrete openings extending between the outer surface and the inner surface of the saw body, the second group of at least two discrete openings spaced apart from the first group of at least two discrete openings in a circumferential direction along the outer surface with respect to the longitudinal axis, the second group comprising:

a third discrete opening having the first shape; and

a fourth discrete opening having the second shape; and an uninterrupted area located between the first group of at least two discrete openings and the second group of at least two discrete openings;

wherein the second shape matches a lower portion of the first shape;

wherein the second shape is defined in part by a flat edge that extends in the circumferential direction and faces the cutting teeth, a first width of the second shape measured along the flat edge; and

wherein the first width is greater than a second width of the second shape measured along an edge opposite from the flat edge and facing the second end of the saw body.

16. The hole saw of claim 15, wherein the fourth discrete opening is located closer to the cutting teeth than the third discrete opening.

17. The hole saw of claim 15, wherein the second shape is a smaller size than the first shape, and wherein the flat edge extends in the circumferential direction oriented perpendicular to the longitudinal axis of the hole saw.

18. The hole saw of claim 15, wherein the first shape is symmetrical in the circumferential direction, and wherein the second shape is symmetrical in the circumferential direction.

19. The hole saw of claim 15, wherein the first shape is symmetrical in a direction parallel to the longitudinal axis.

\* \* \* \* \*