



US 20250262425A1

(19) **United States**(12) **Patent Application Publication**
Corbett et al.(10) **Pub. No.: US 2025/0262425 A1**(43) **Pub. Date: Aug. 21, 2025**(54) **ANTI-SUCTION BLOOD PUMP INLET****Publication Classification**(71) Applicant: **ABIOMED, INC.**, Danvers, MA (US)(51) **Int. Cl.***A61M 60/422* (2021.01)*A61M 60/13* (2021.01)*A61M 60/226* (2021.01)*A61M 60/443* (2021.01)*A61M 60/857* (2021.01)(72) Inventors: **Scott C. Corbett**, Danvers, MA (US);
Ahmad El Katerji, Danvers, MA (US);
Charles DeLorenzo, Danvers, MA (US)(52) **U.S. Cl.**CPC *A61M 60/422* (2021.01); *A61M 60/13*
(2021.01); *A61M 60/226* (2021.01); *A61M*
60/443 (2021.01); *A61M 60/857* (2021.01)(73) Assignee: **ABIOMED, INC.**, Danvers, MA (US)(21) Appl. No.: **19/066,229**(22) Filed: **Feb. 28, 2025****Related U.S. Application Data**


(60) Continuation of application No. 18/433,742, filed on Feb. 6, 2024, now Pat. No. 12,263,334, which is a division of application No. 17/410,168, filed on Aug. 24, 2021, now Pat. No. 11,938,311, which is a continuation of application No. 15/694,134, filed on Sep. 1, 2017, now Pat. No. 11,123,541.

(60) Provisional application No. 62/382,471, filed on Sep. 1, 2016.

(57)

ABSTRACT

A heart pump assembly includes an impeller blade coupled to a rotor or a drive shaft, a cannula, a distal projection coupled to a distal end of the cannula and a blood inlet having a plurality of apertures. The plurality of apertures is radially oriented and disposed about a circumference of the cannula. The plurality of apertures includes at least a first ring of apertures which are proximal to the distal projection and a second ring of apertures which are proximal of the first ring of apertures. The plurality of apertures can allow the heart pump assembly to continue to function if anatomical structures or tissue become suctioned to a portion of the heart pump.

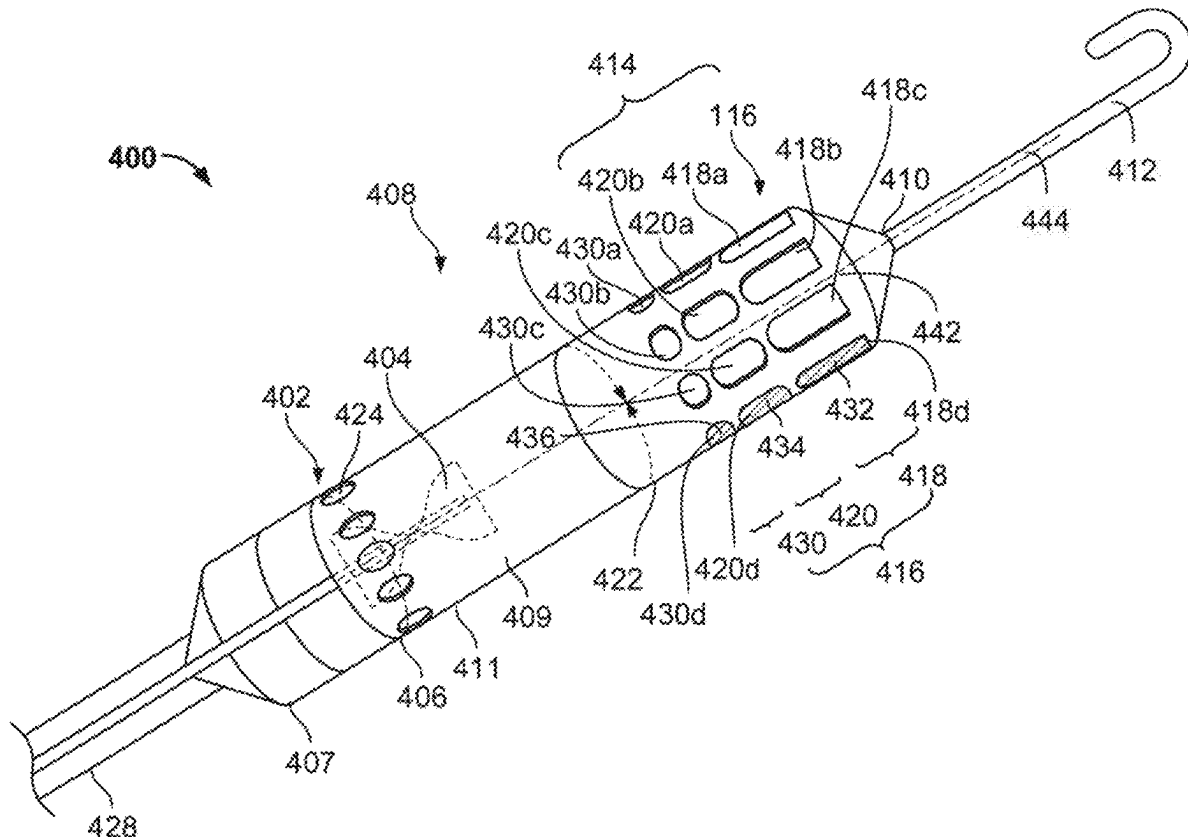

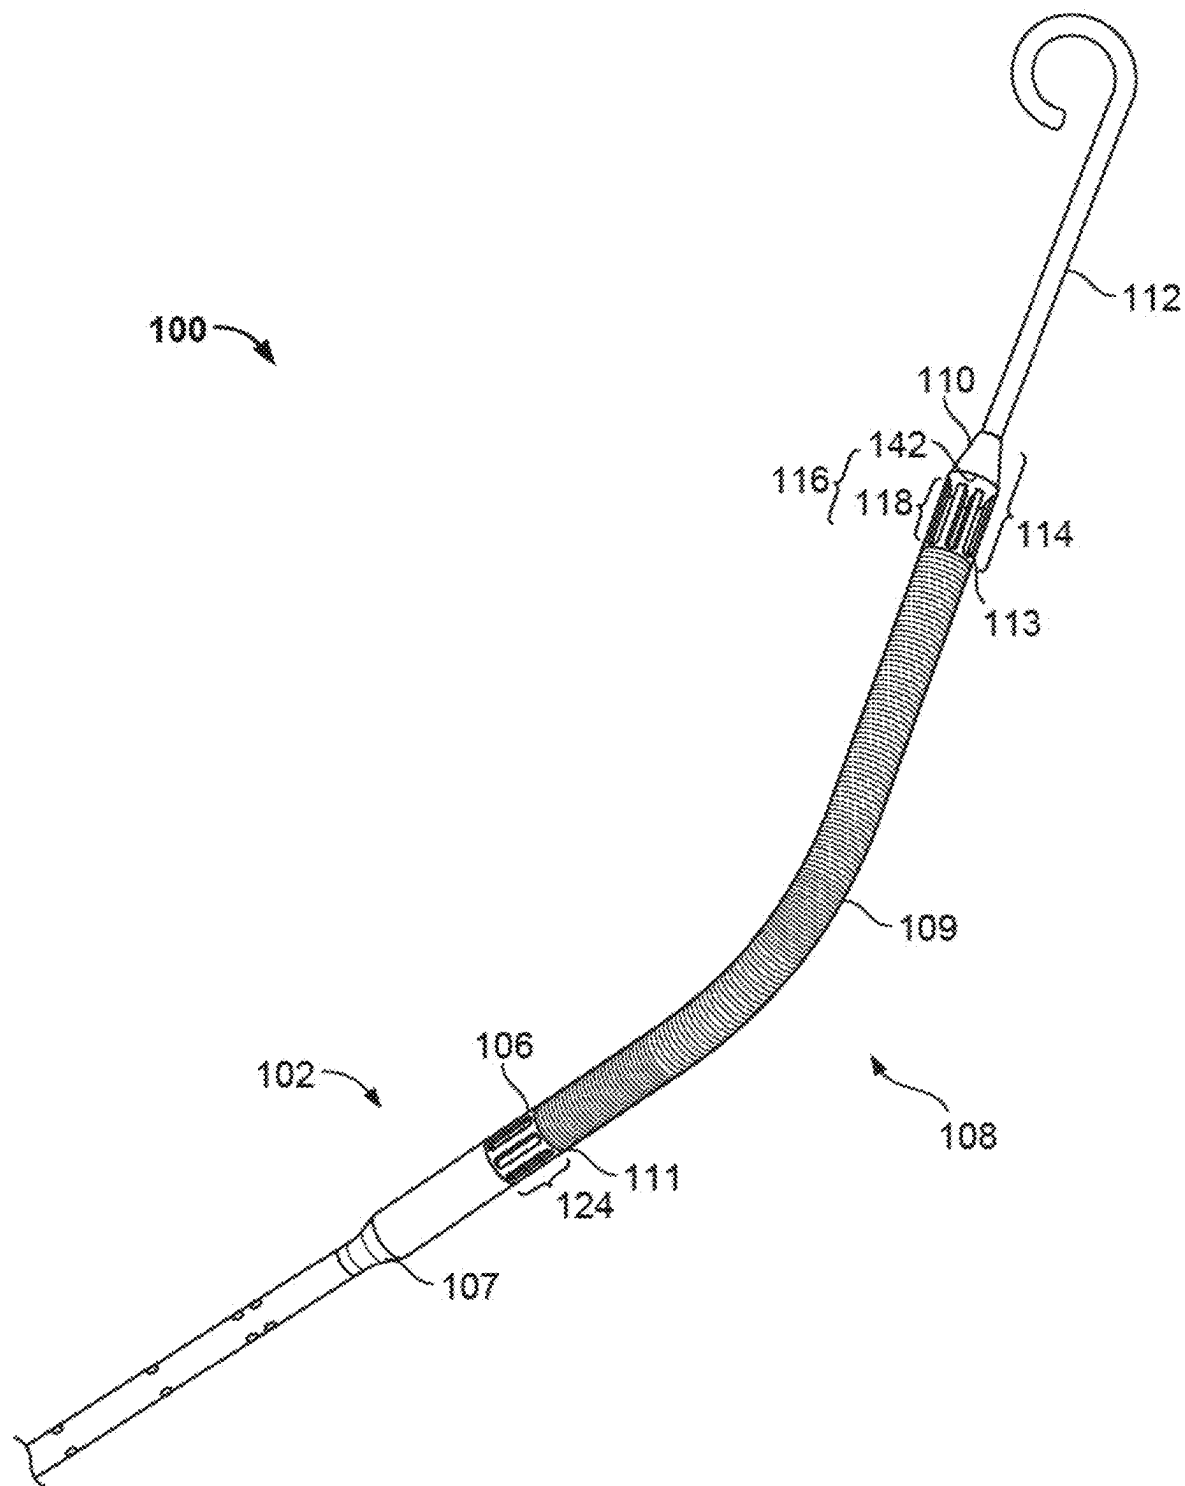


FIG. 1
(Prior Art)

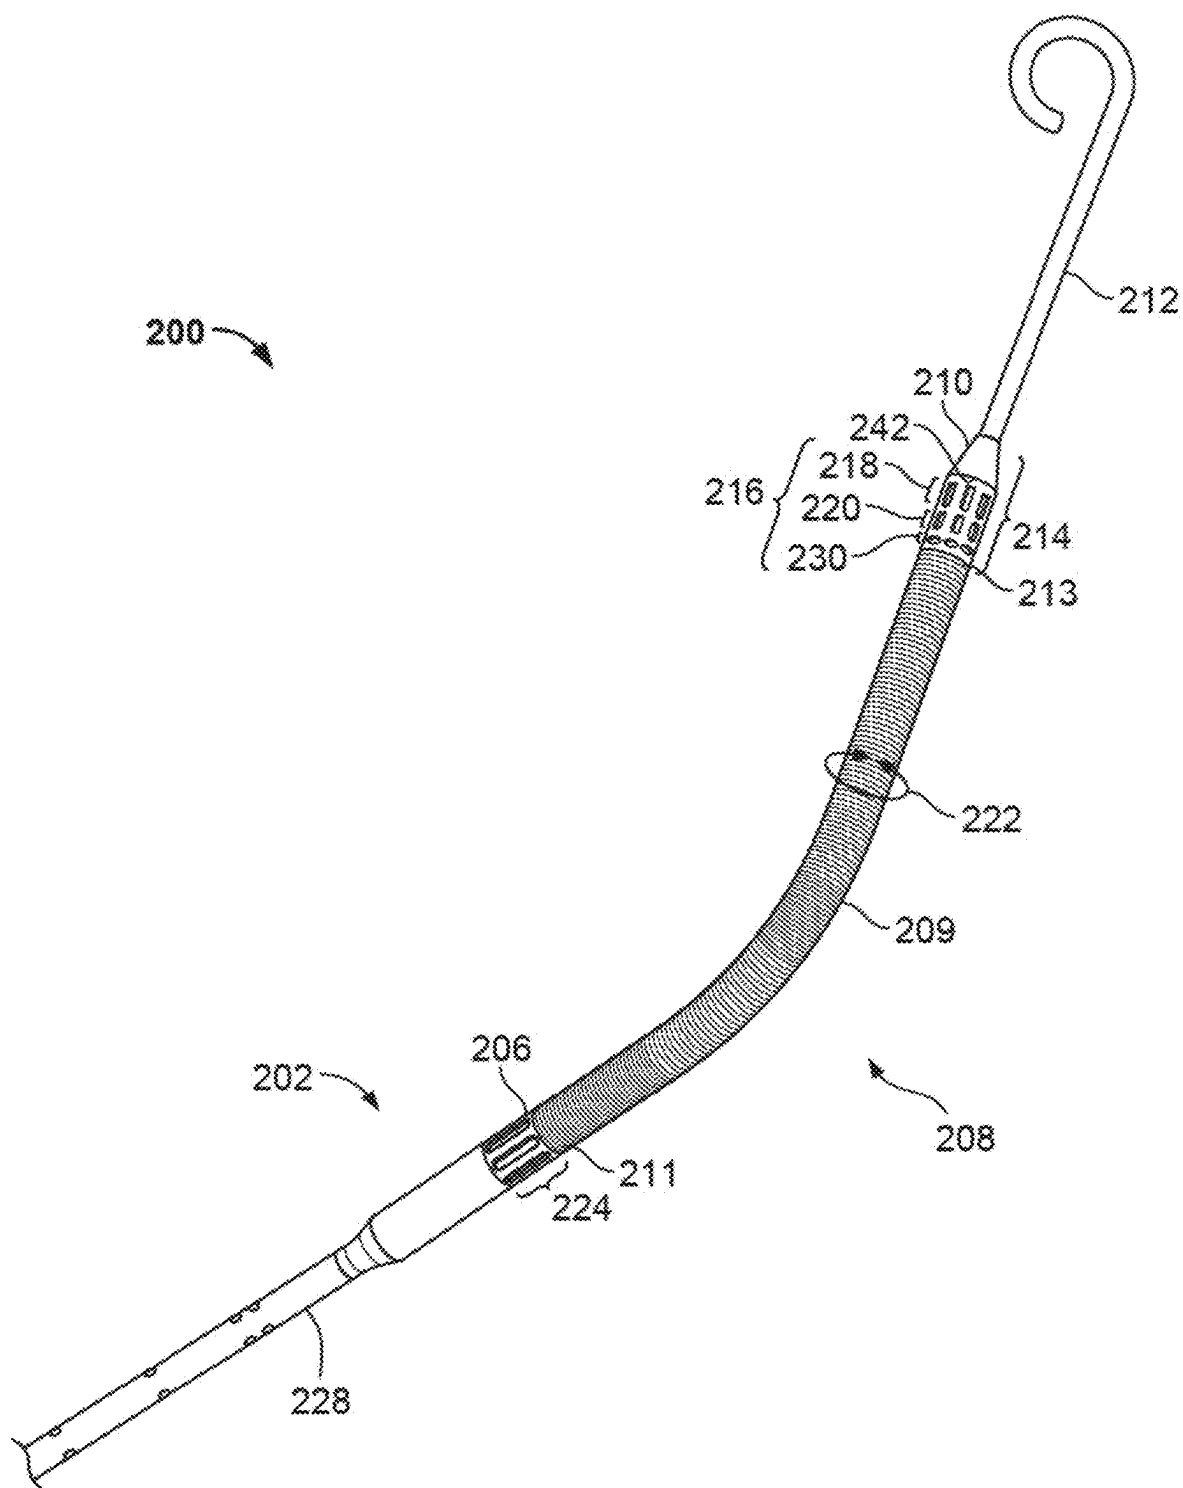
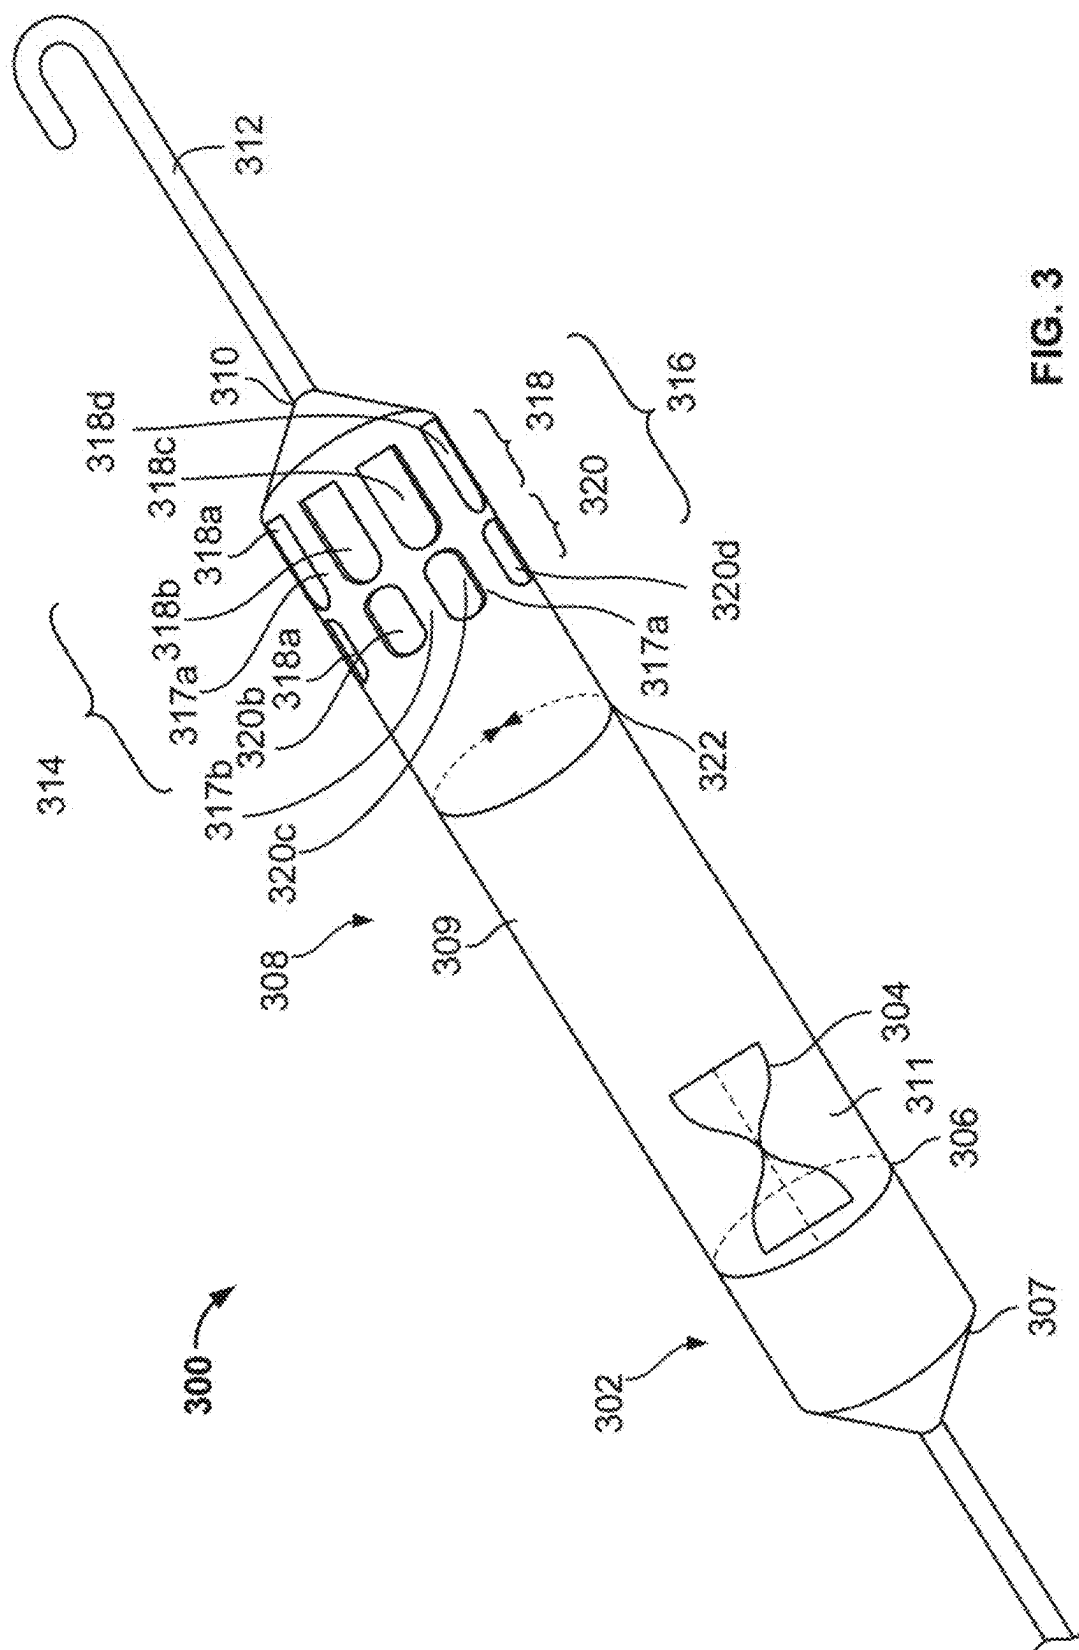


FIG. 2



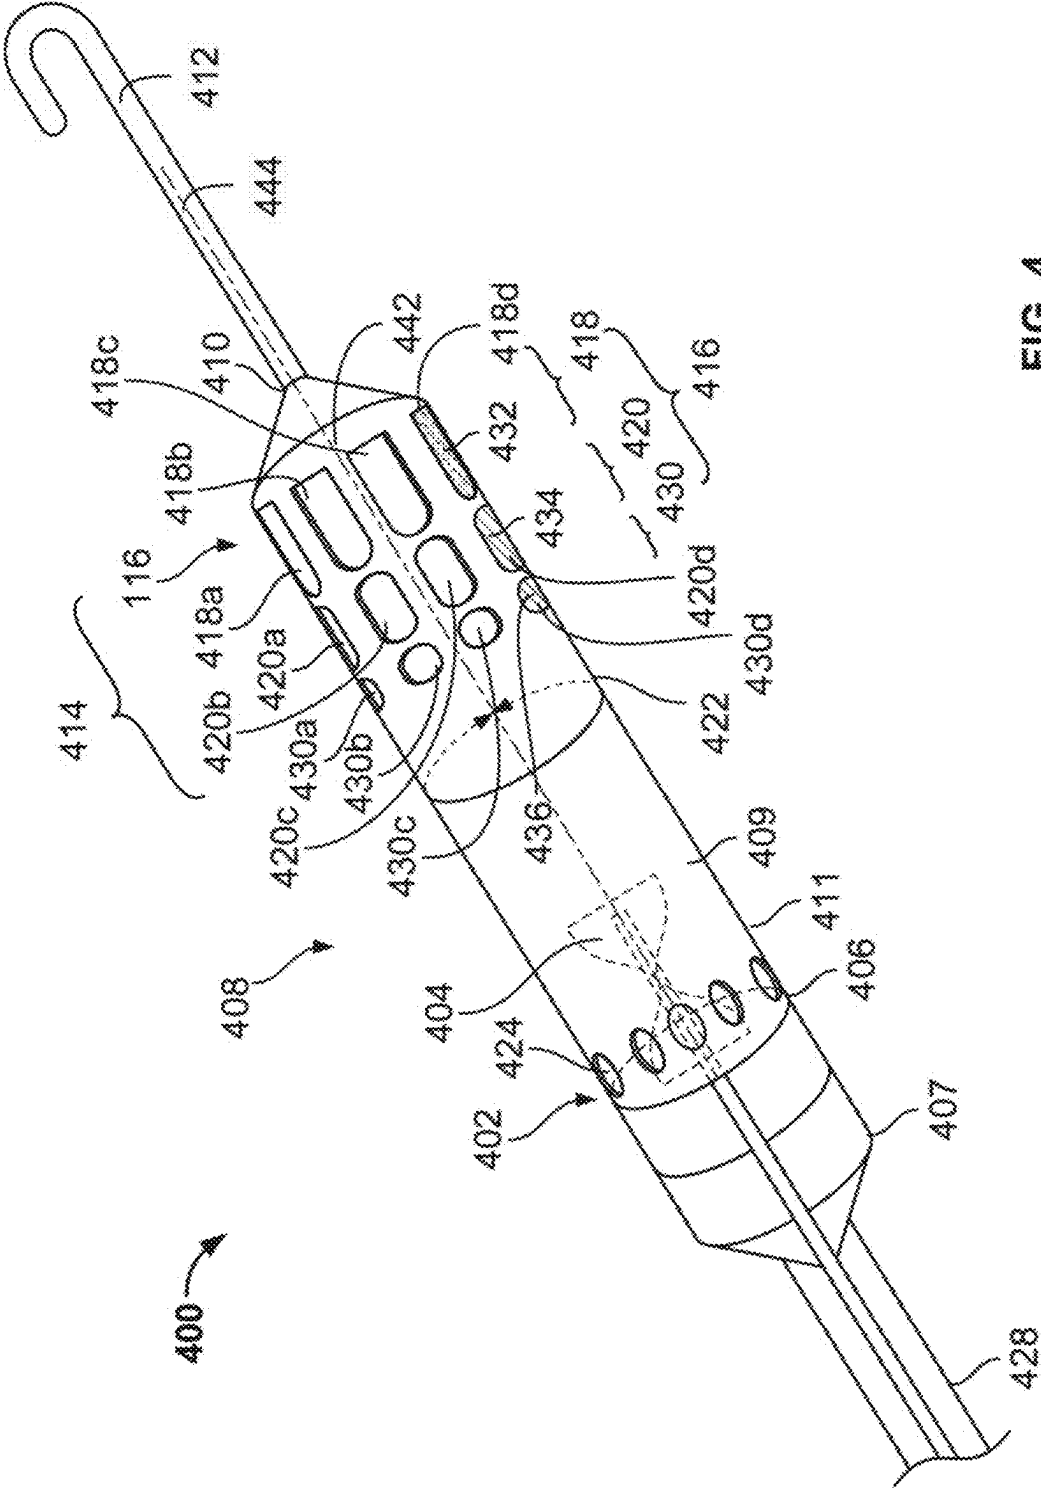
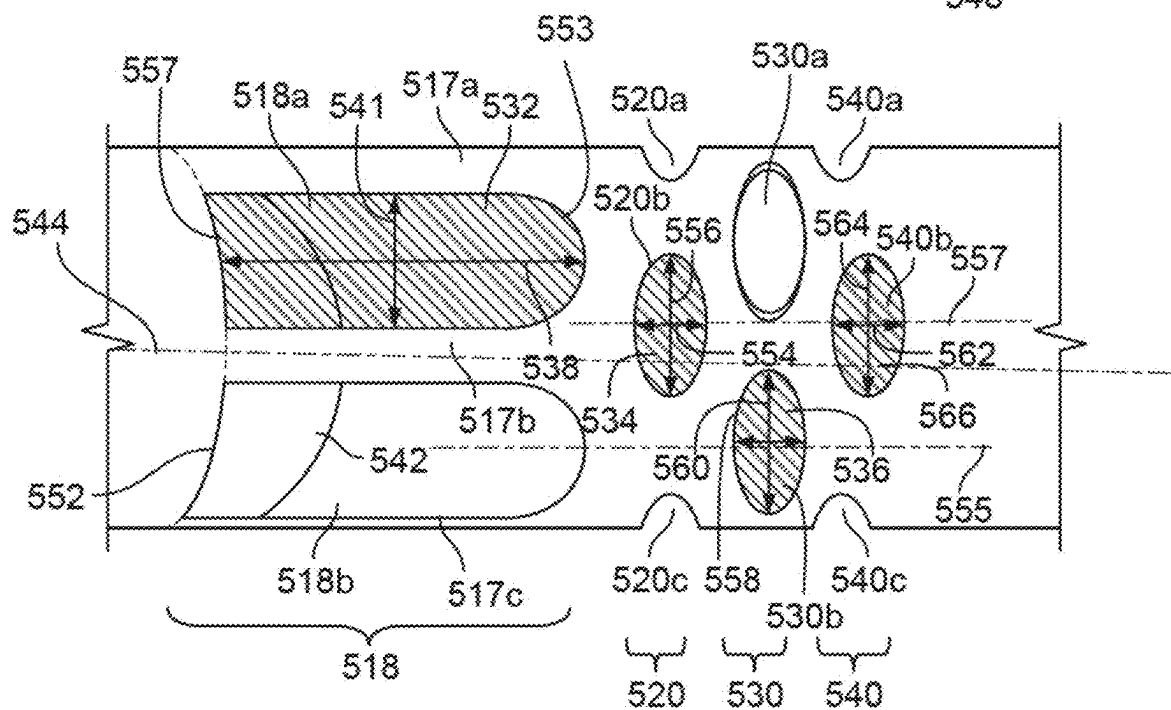
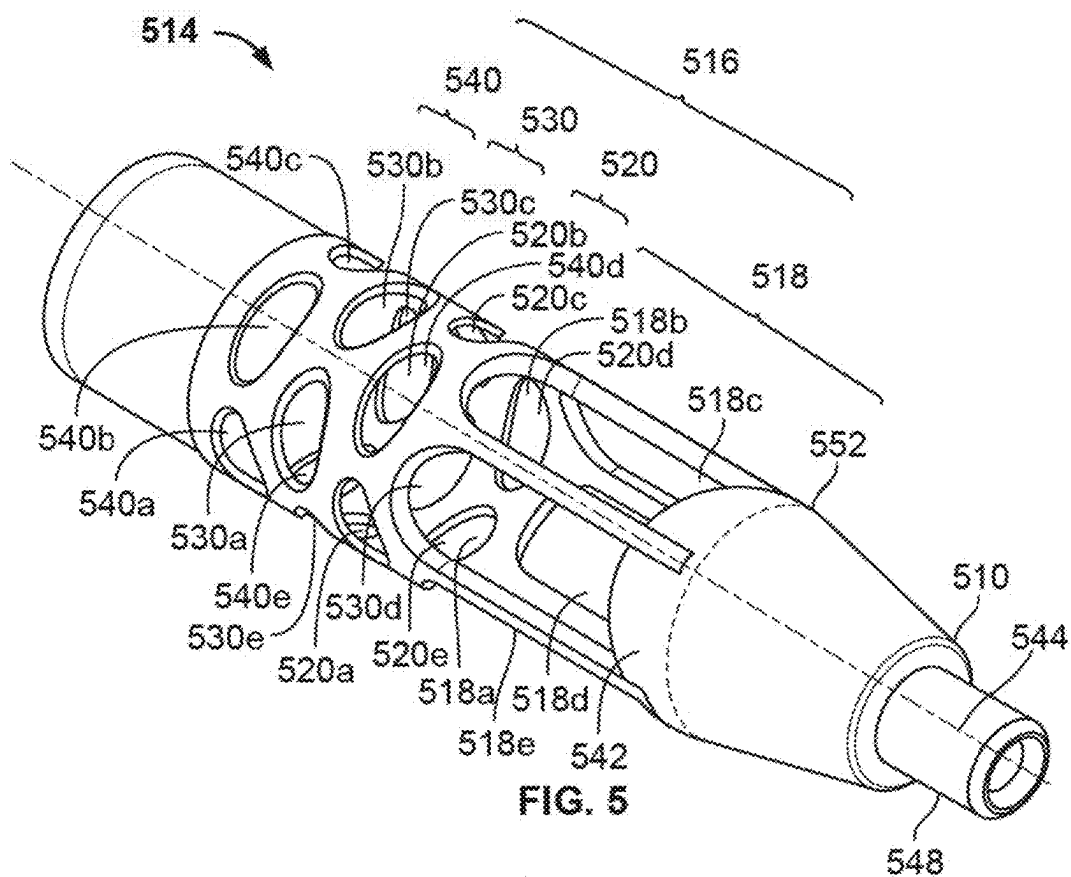


FIG. 4



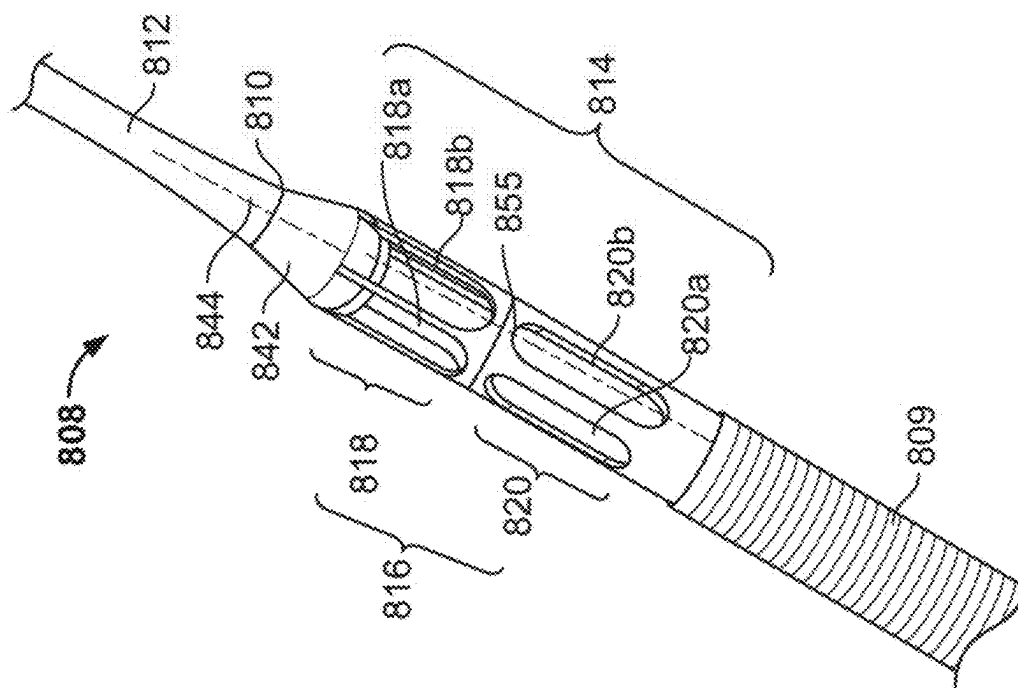


FIG. 8

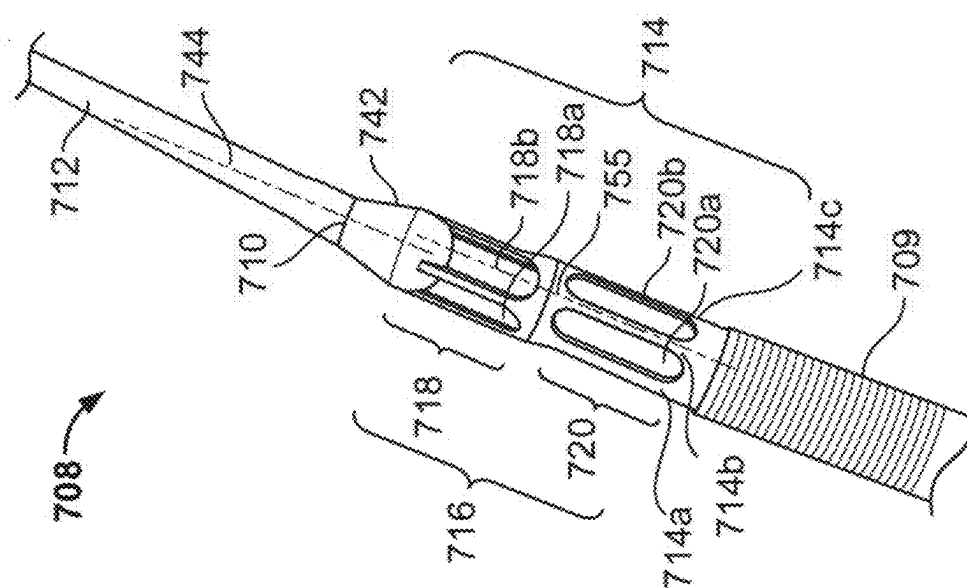


FIG. 7

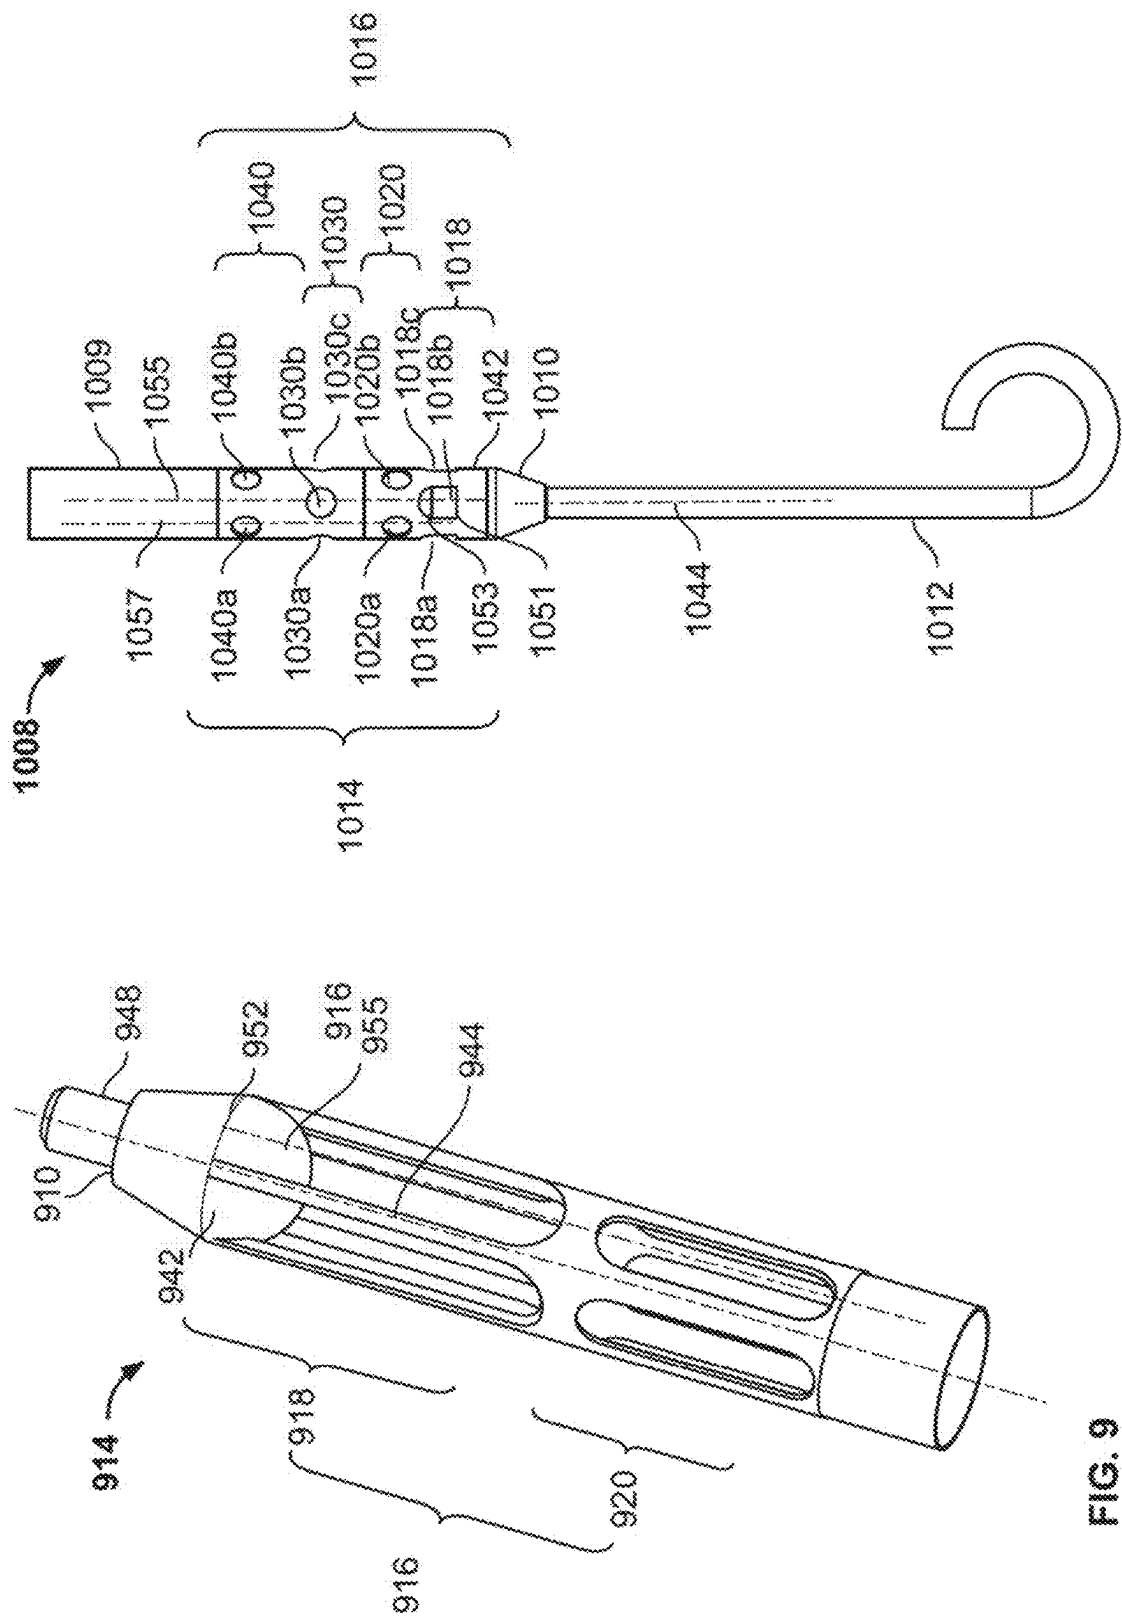


FIG. 10

FIG. 9

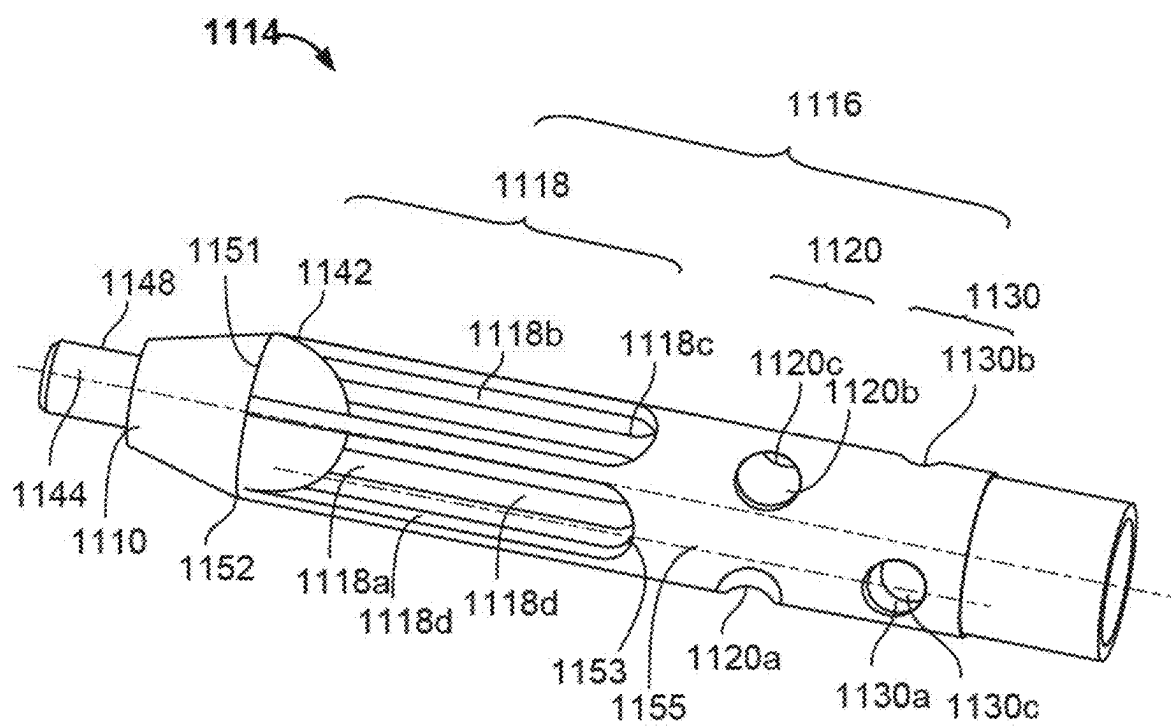


FIG. 11

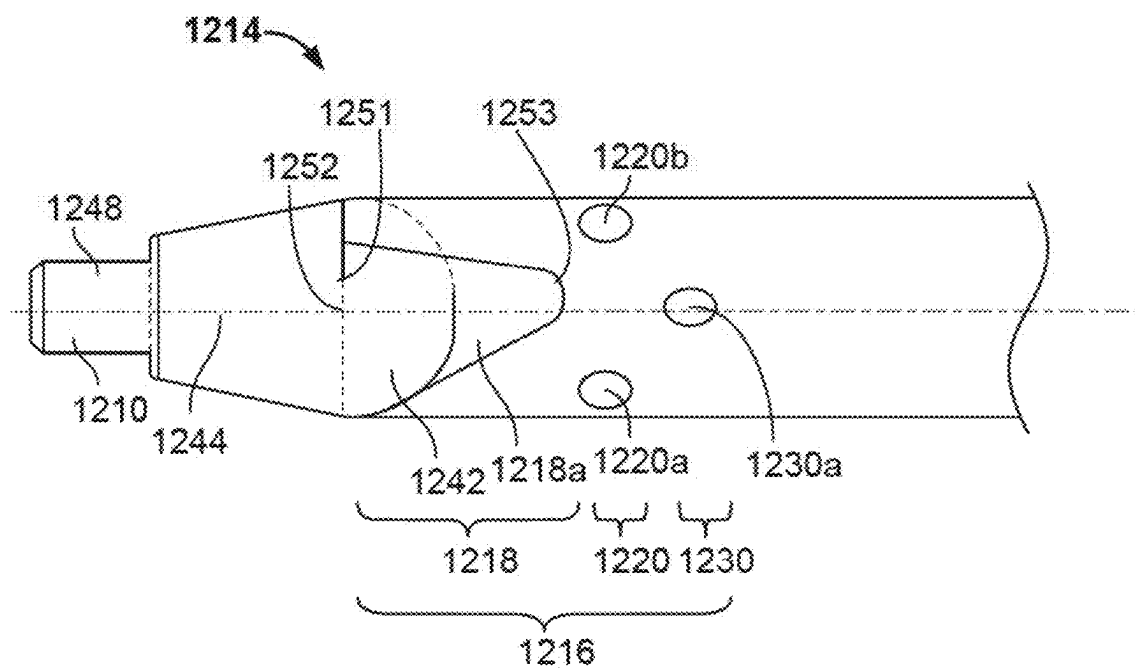


FIG. 12

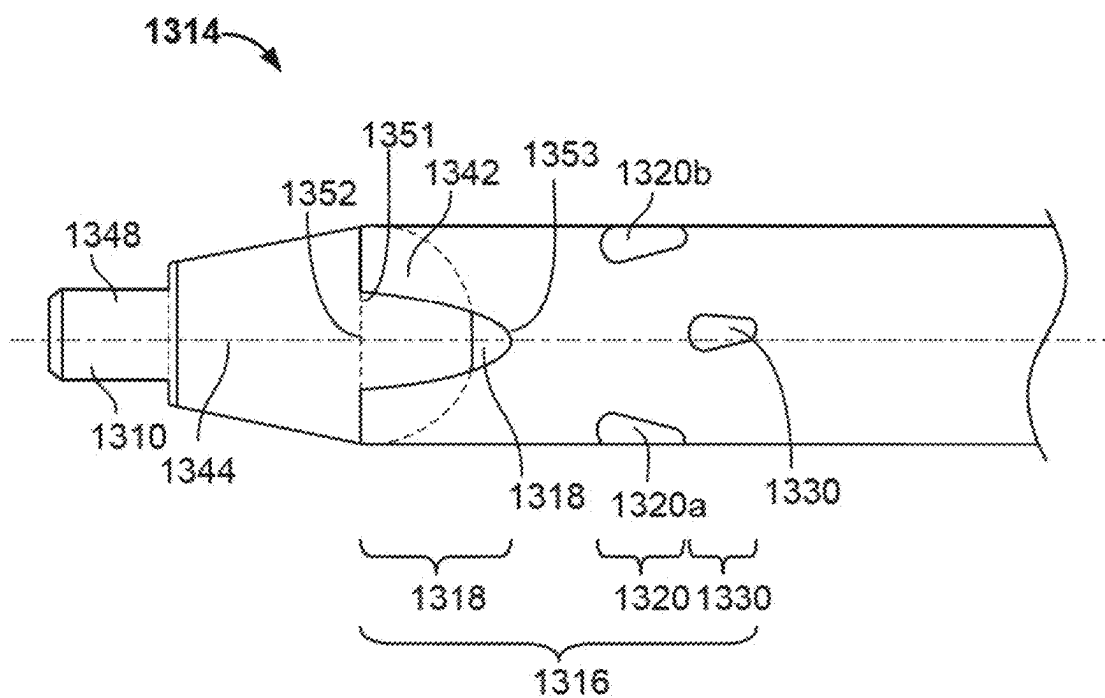


FIG. 13

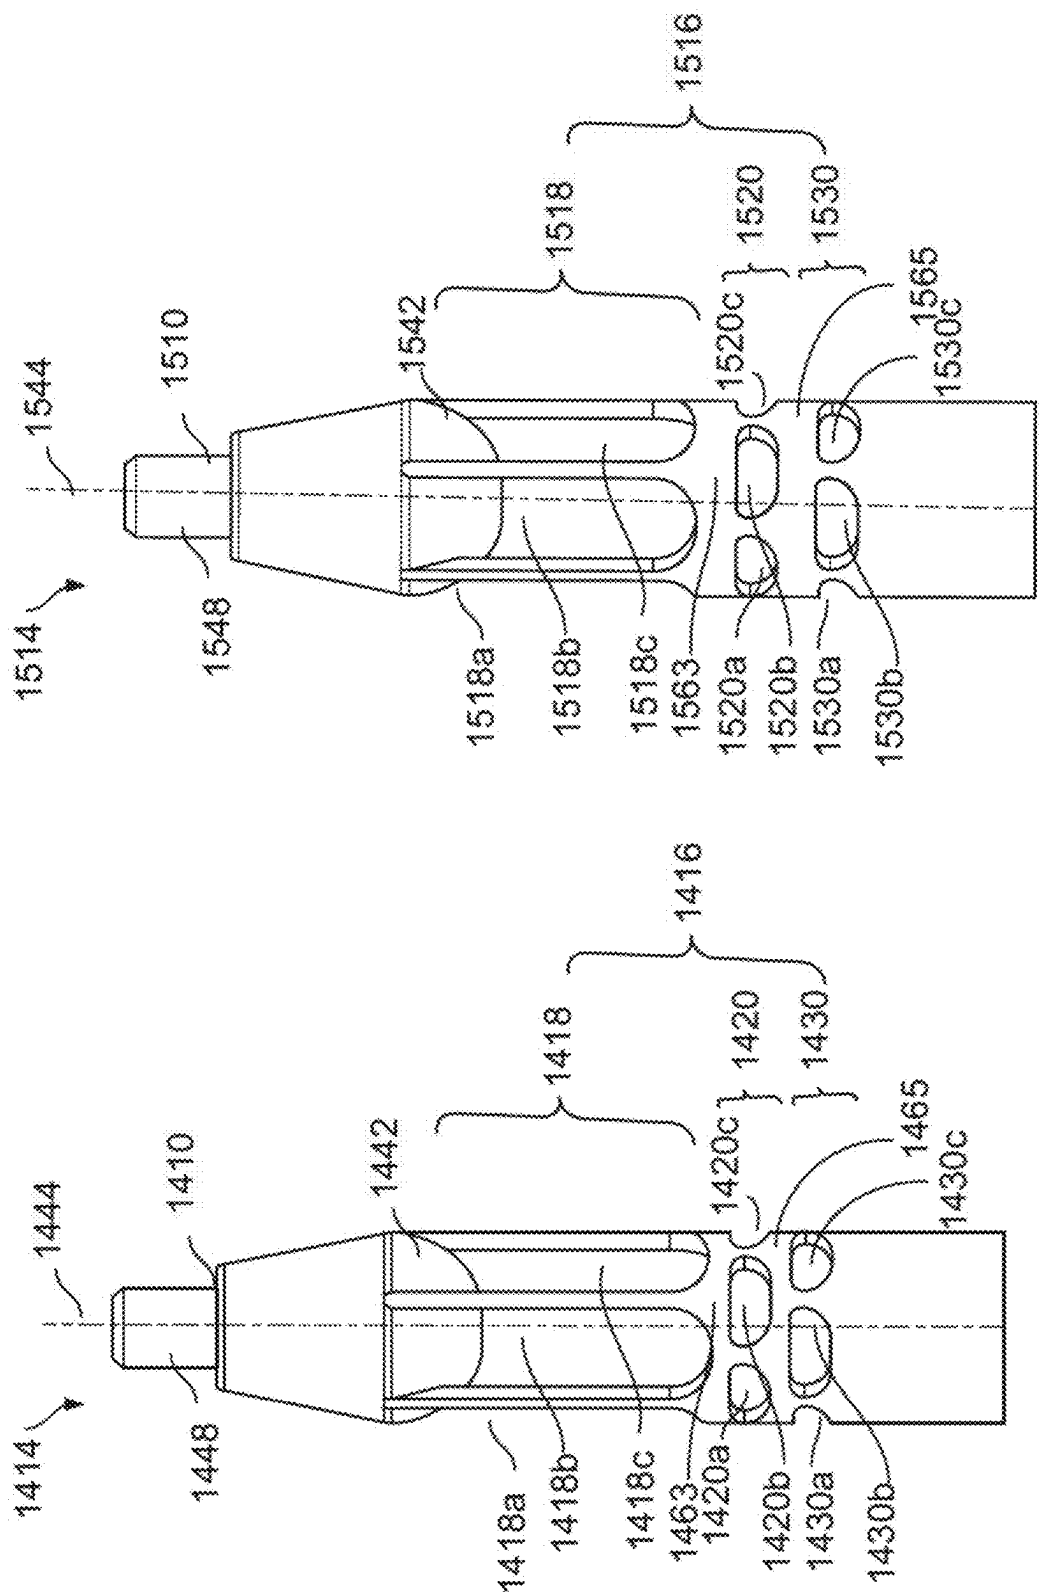
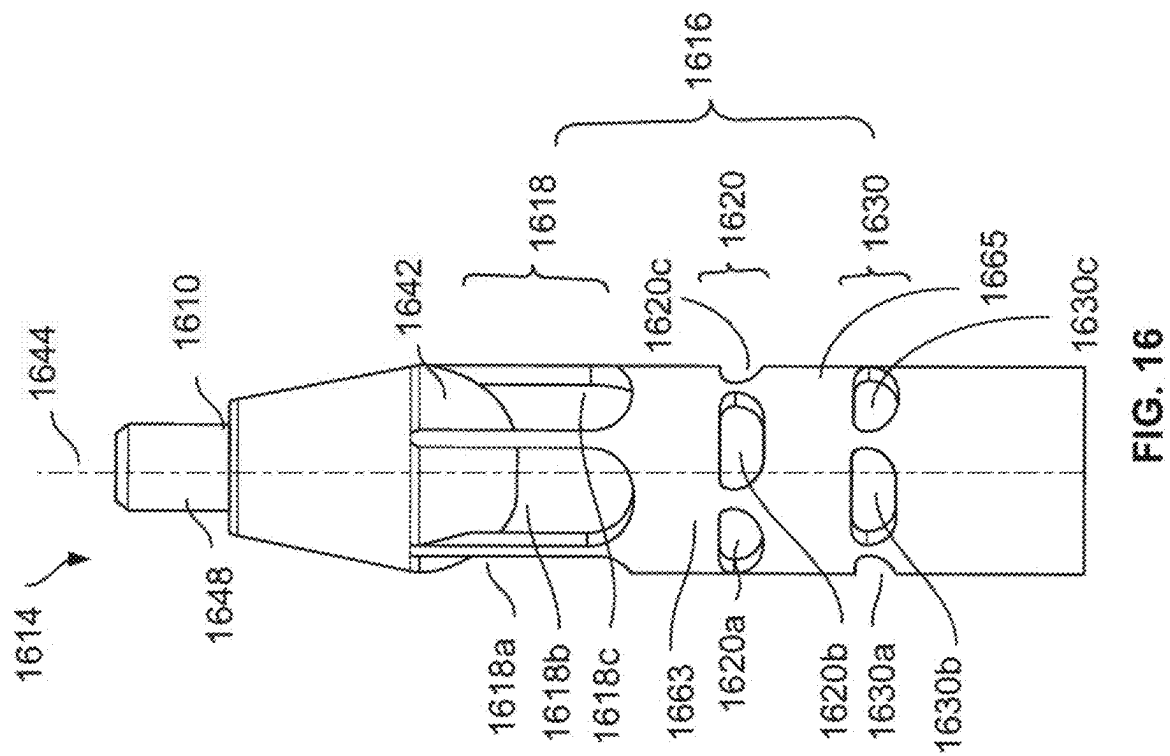
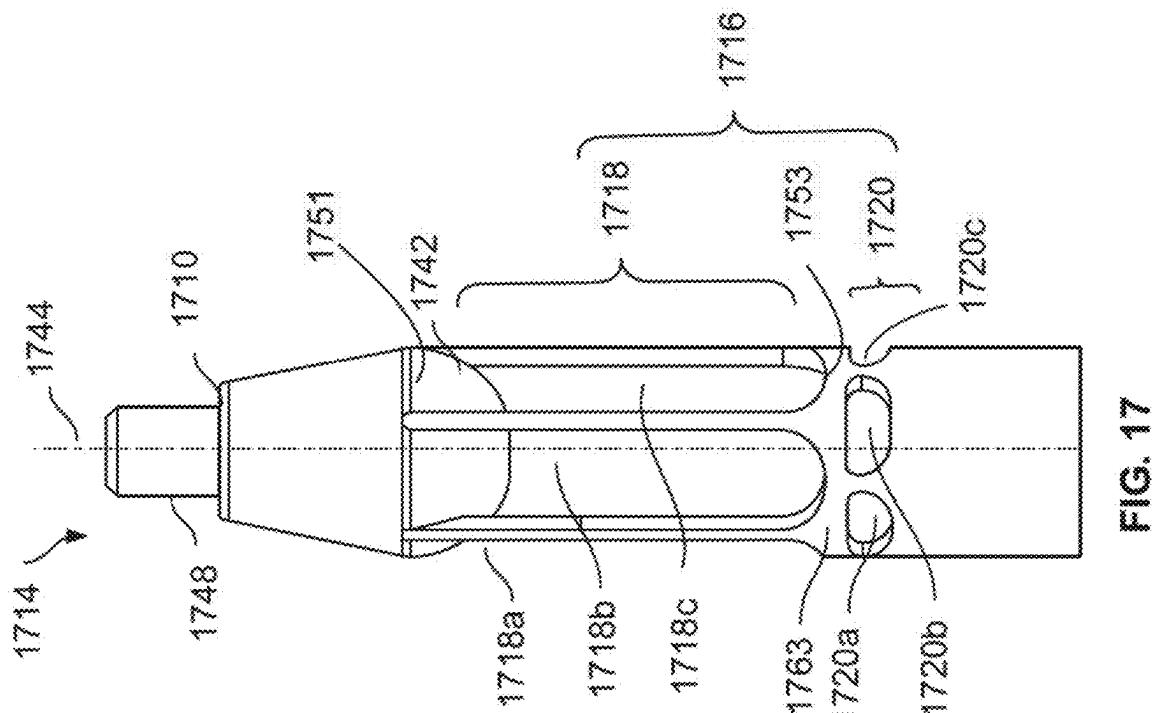
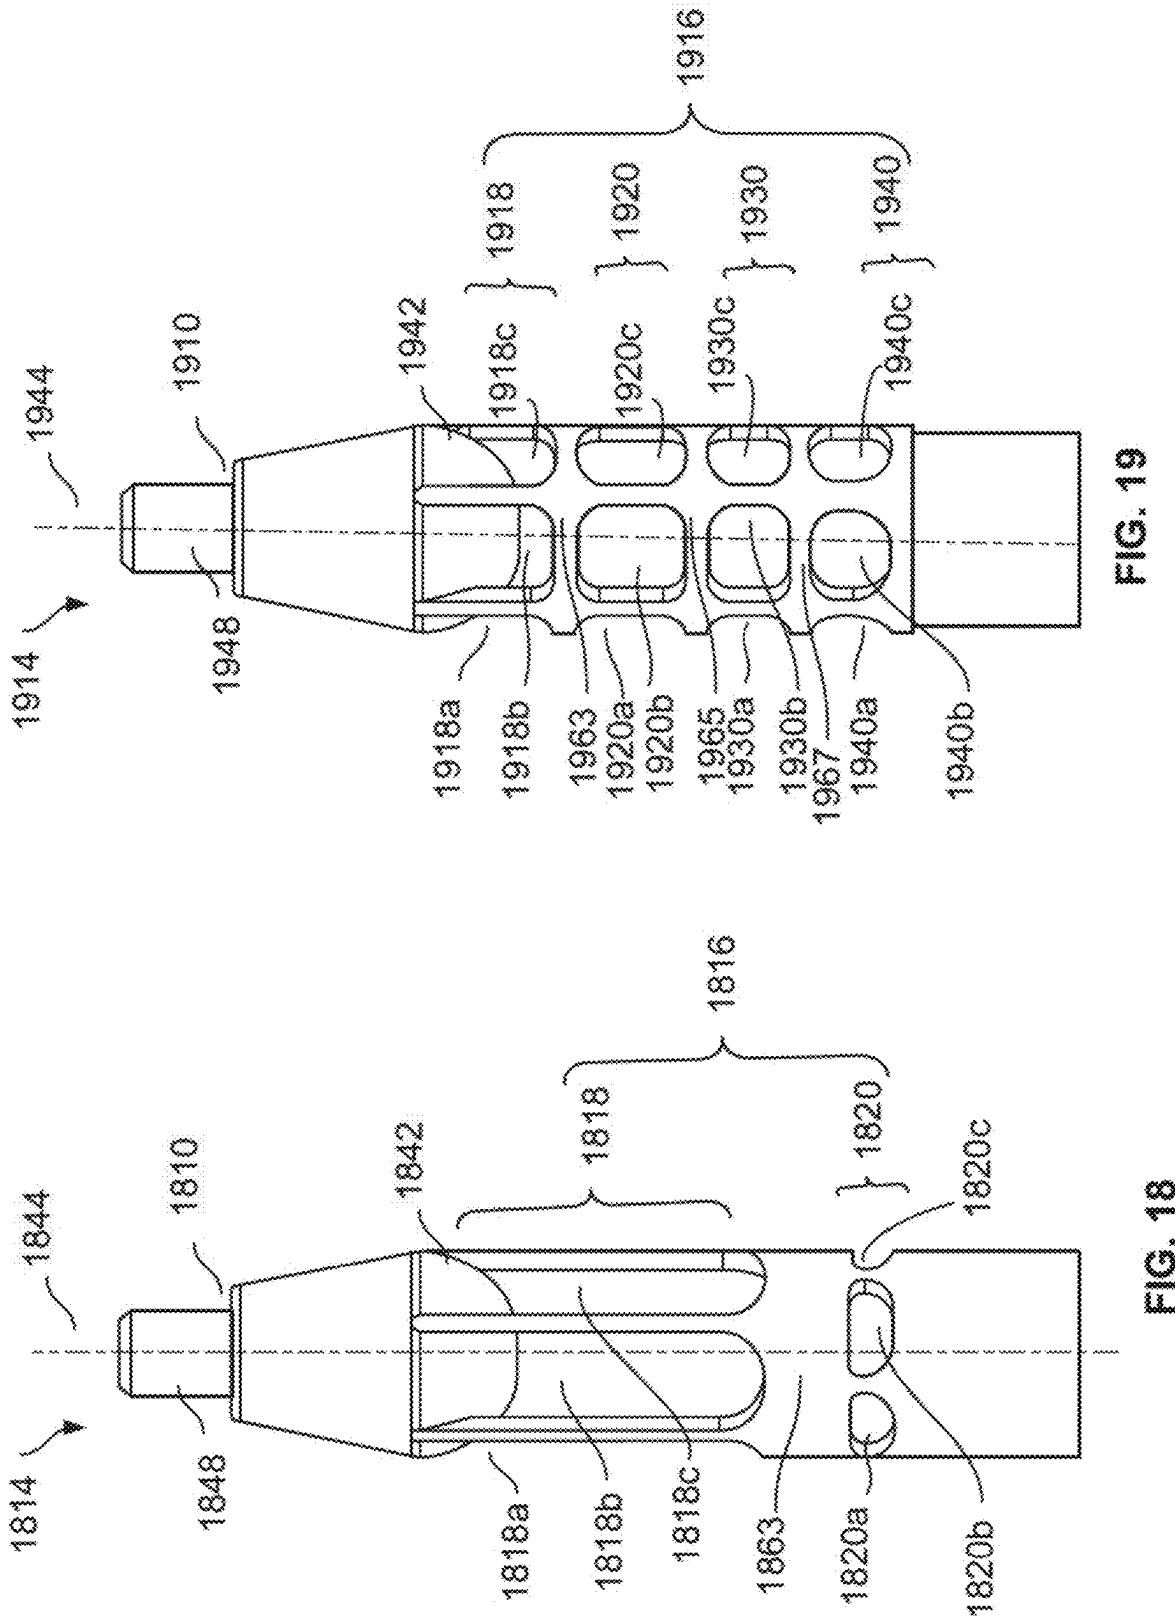
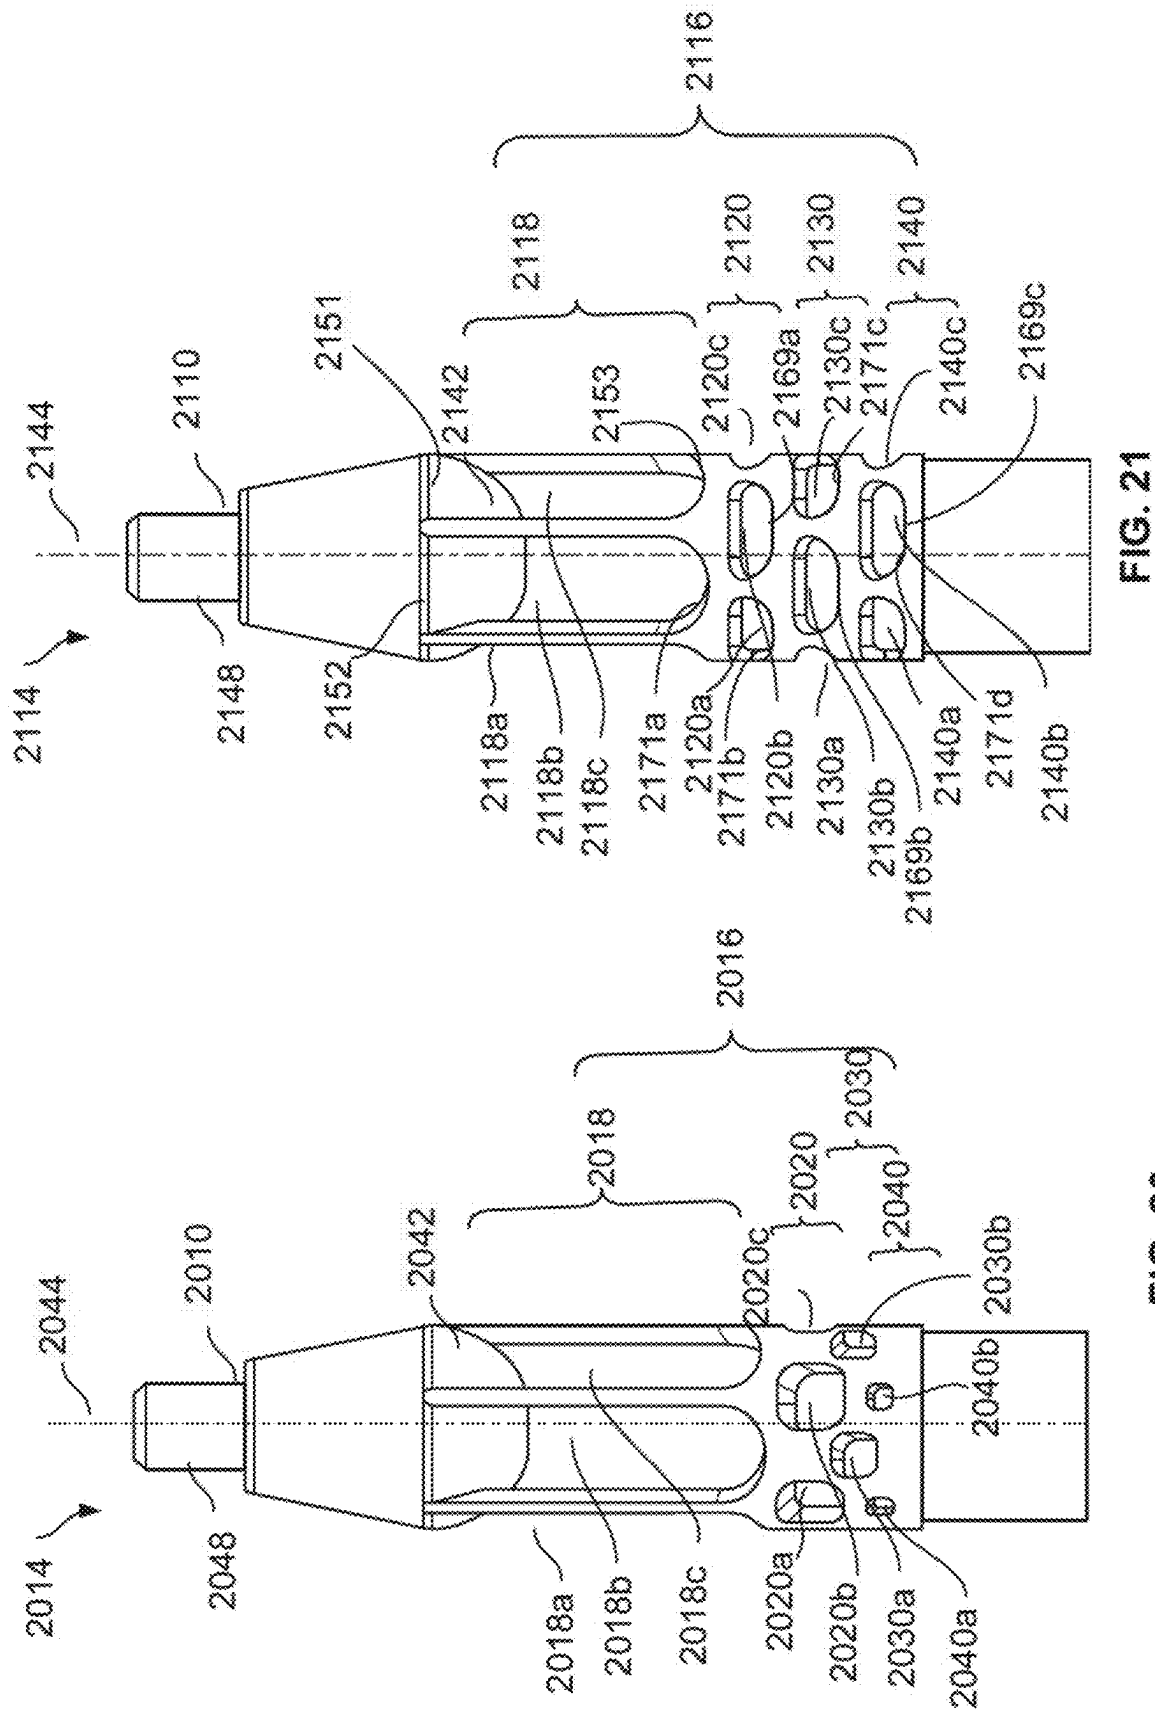




FIG. 15


FIG. 14







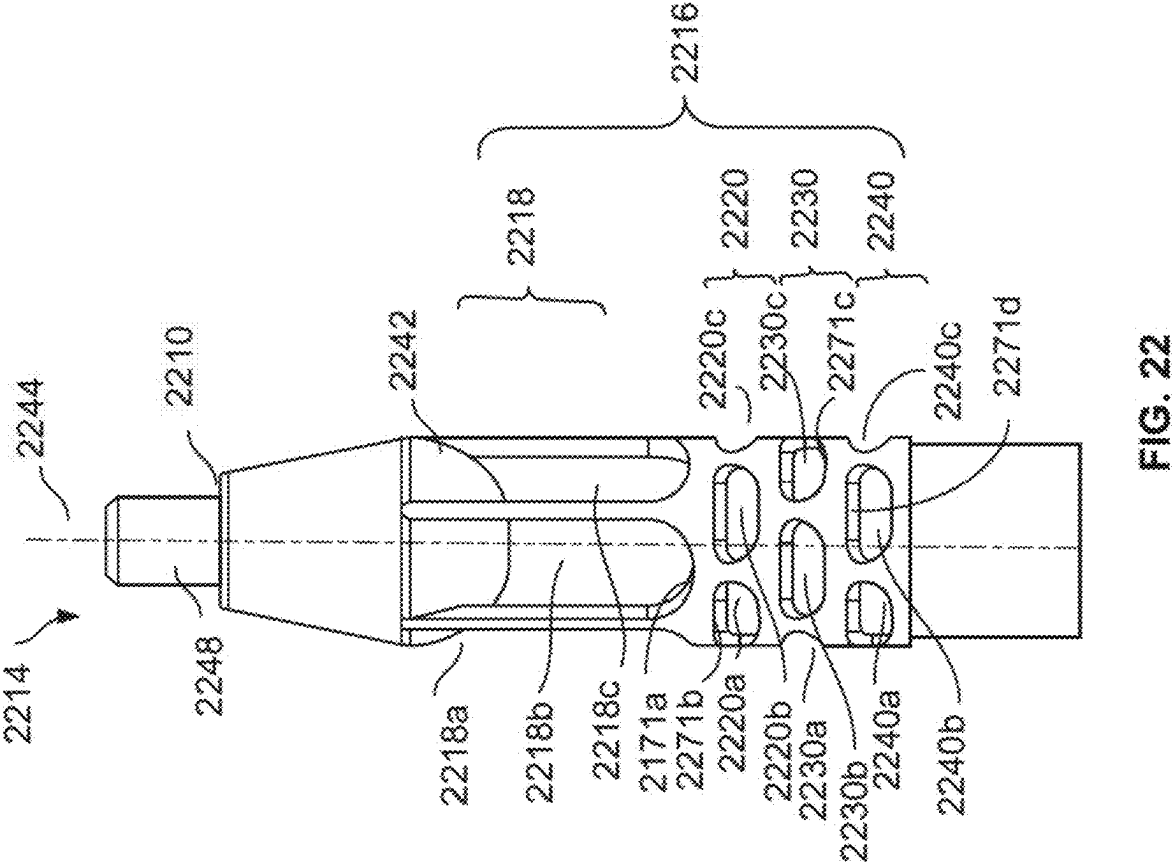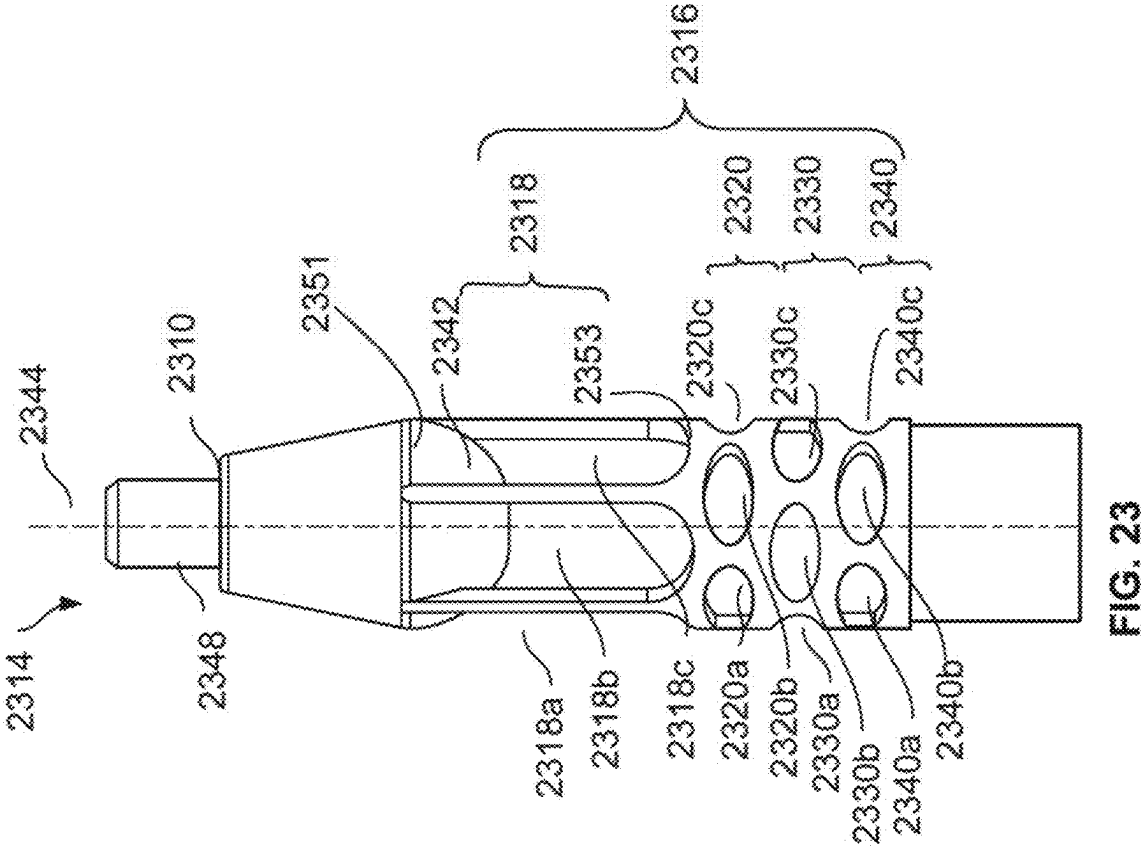

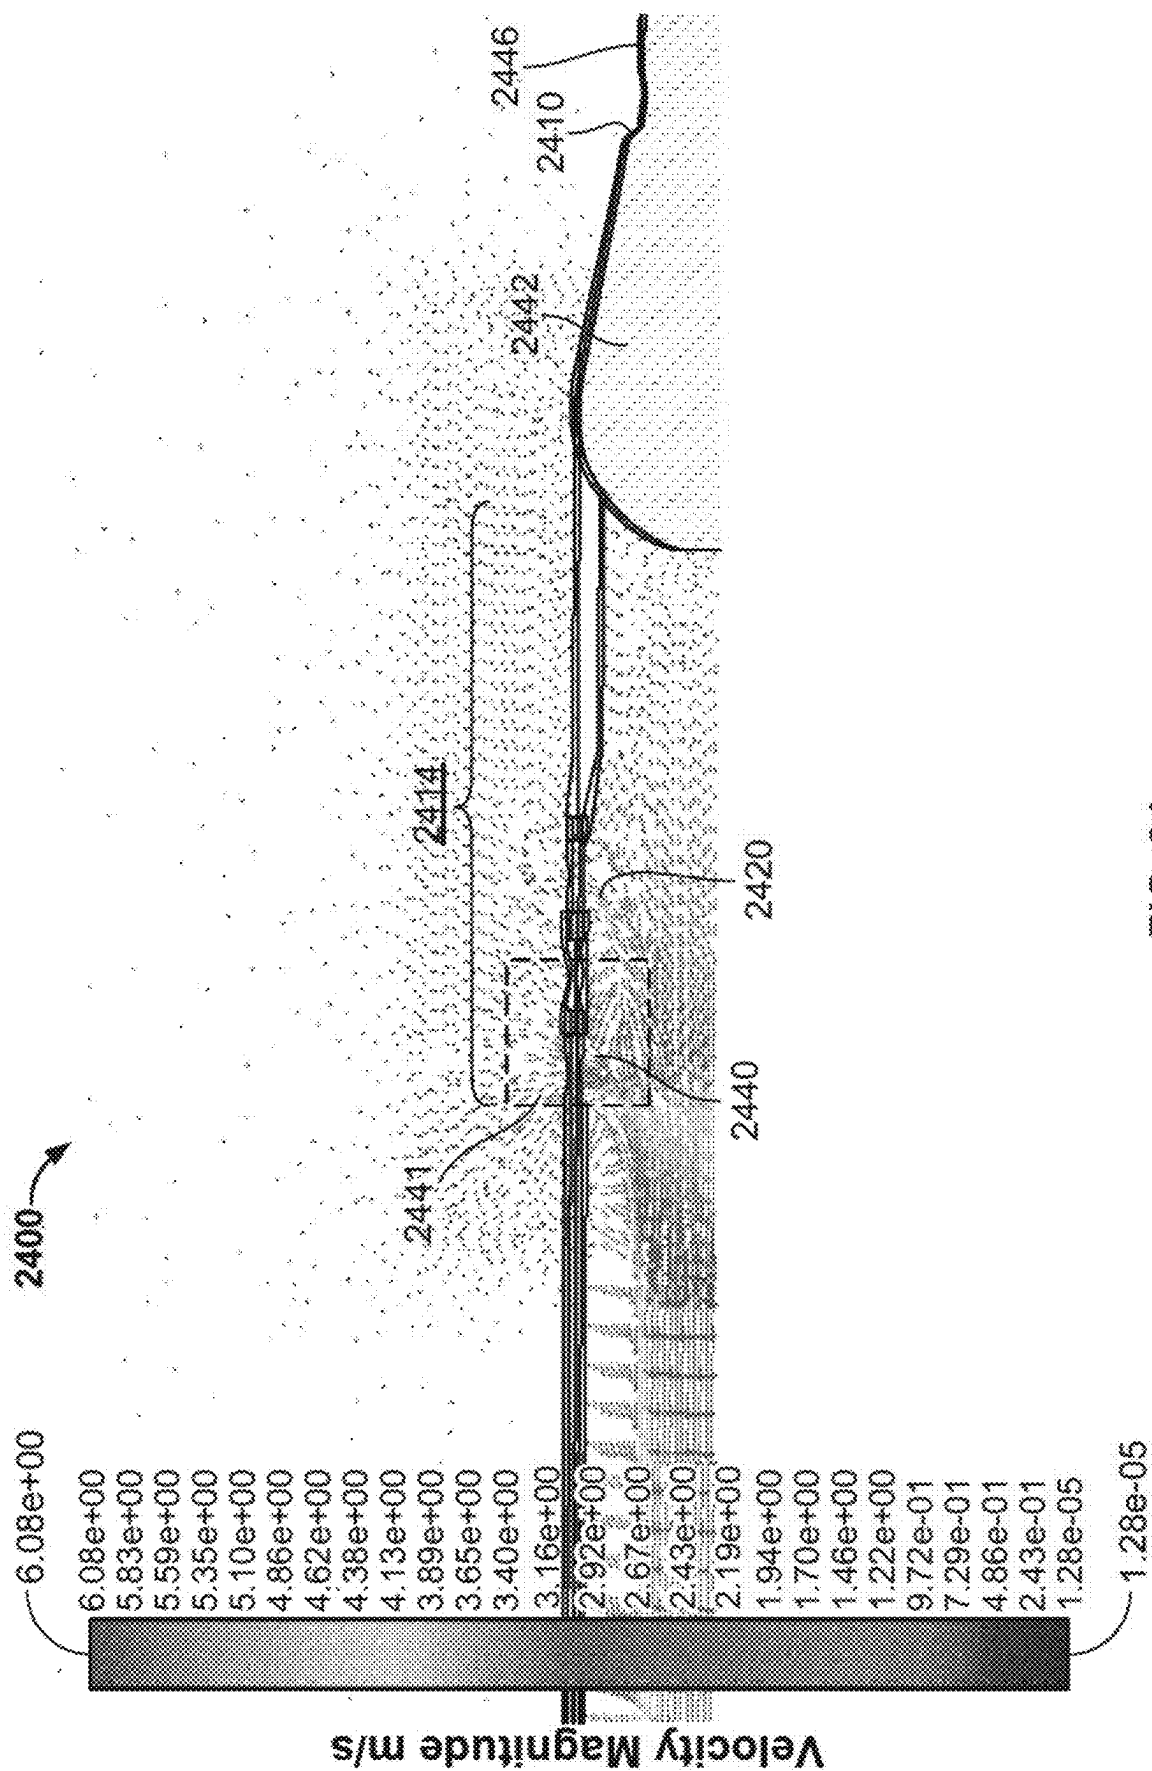

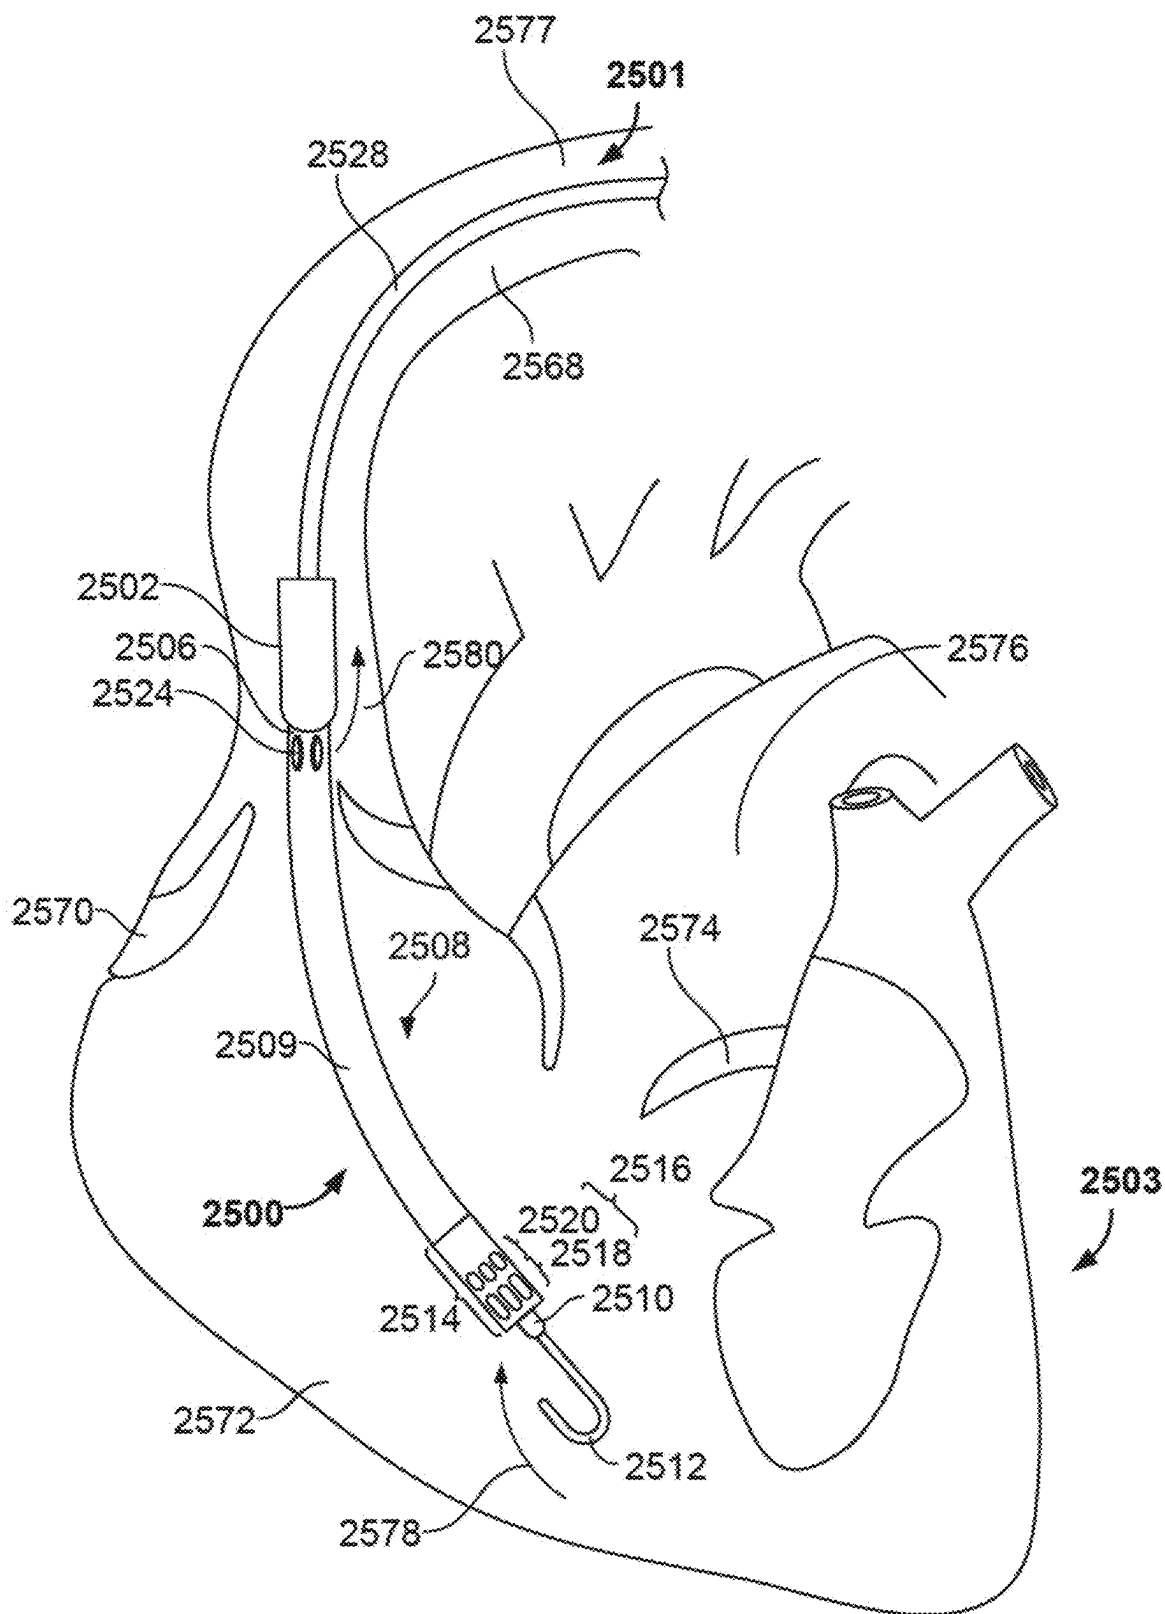


FIG. 25

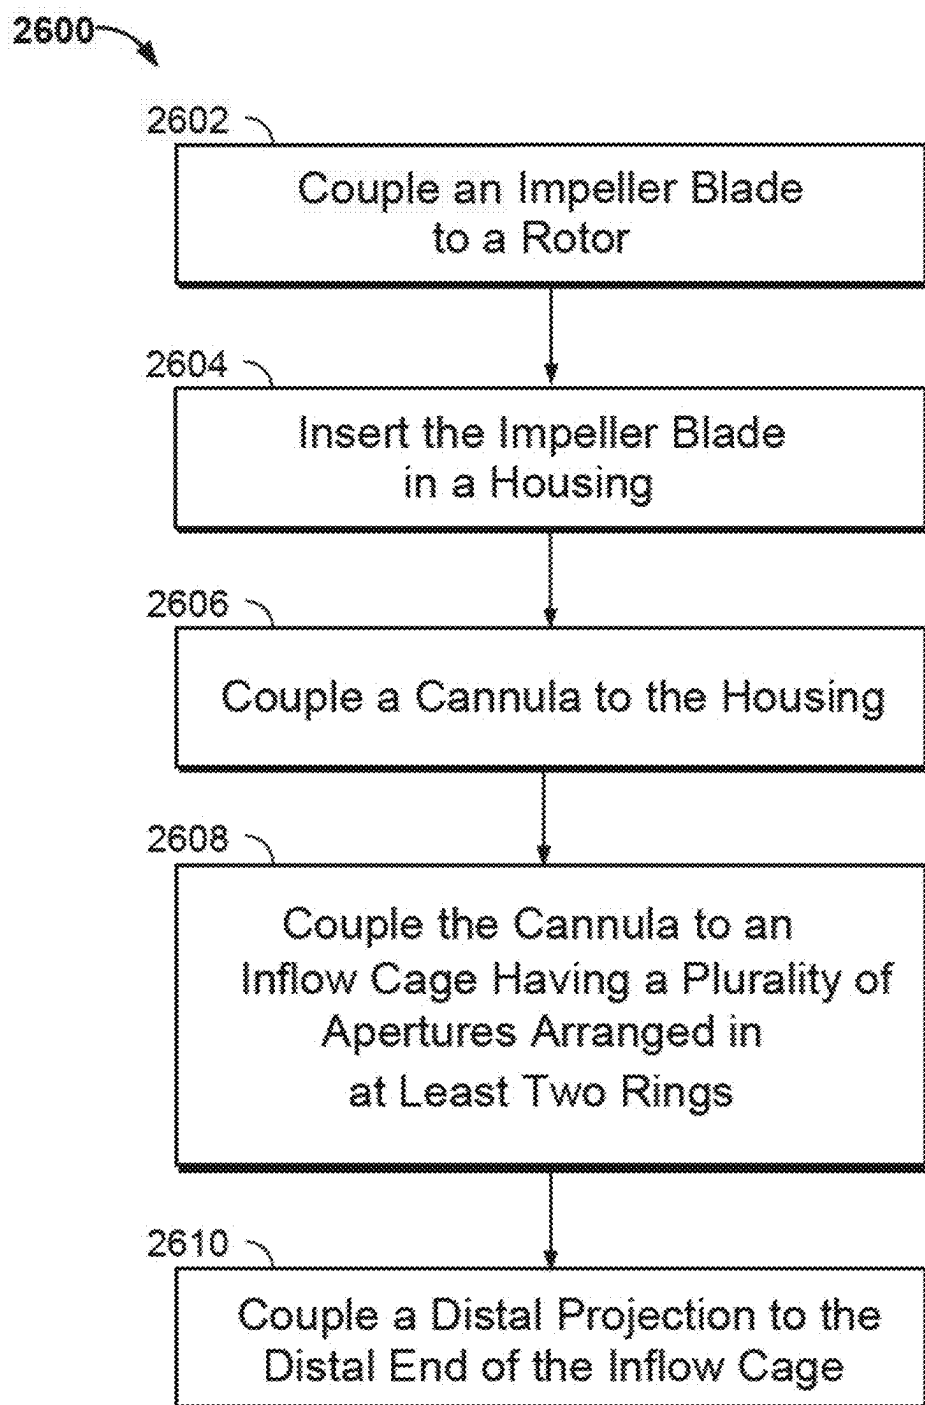


FIG. 26

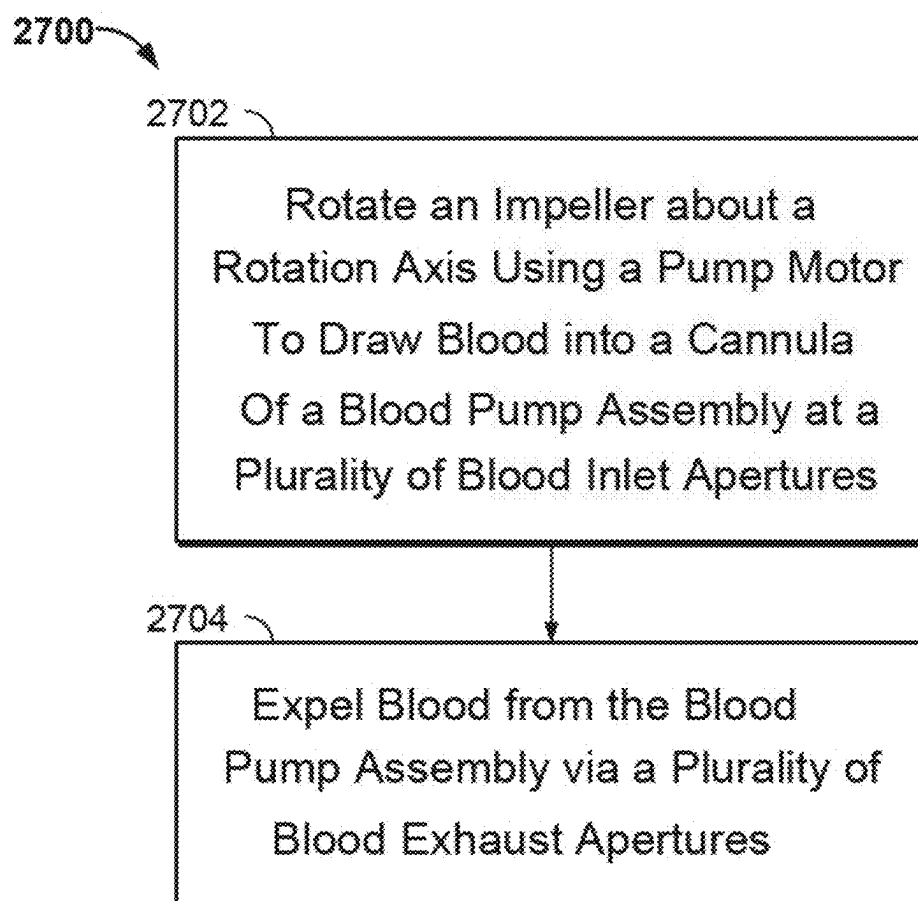


FIG. 27

ANTI-SUCTION BLOOD PUMP INLET**CROSS-REFERENCE TO RELATED APPLICATIONS**

[0001] The present application is a continuation of U.S. patent application Ser. No. 18/433,742, filed Feb. 6, 2024, which is a divisional of U.S. patent application Ser. No. 17/410,168, filed Aug. 24, 2021, now U.S. Pat. No. 11,938,311, which is a continuation of U.S. patent application Ser. No. 15/694,134, filed Sep. 1, 2017, now U.S. Pat. No. 11,123,541, which claims the benefit of U.S. Provisional Patent Application No. 62/382,471, filed Sep. 1, 2016, the disclosures of all of which are incorporated herein by reference in their entirety.

BACKGROUND

[0002] A heart pump, such as a percutaneous intracardiac heart pump assembly, can be introduced in the heart to deliver blood from the heart into an artery. When deployed in the heart, a heart pump assembly pulls blood from the left ventricle of the heart and expels blood into the aorta, or pulls blood from the right ventricle and expels blood into the pulmonary artery. Some heart pump assemblies pull blood through inflow apertures into a cannula and expel the blood from the cannula into the aorta through outflow apertures. Sometimes the inflow apertures suck against the interior of the ventricle in which they are located or against other structures such as the mitral valve and/or chordae. When this suction occurs, the flow of blood into the pump and/or through the cannula is blocked or impeded, lessening the assistance provided to the heart.

SUMMARY

[0003] Systems, devices, and methods described herein provide heart pump assemblies with improved inflow apertures. The inflow apertures are designed to prevent or reduce the tendency of the inflow aperture to suck against the interior of the heart or vascular system of a patient. In particular, the inflow apertures can prevent the pump inlet from sucking a valve leaflet (e.g., a leaflet of the mitral valve) into the inlet. This can reduce the risk of occlusion of the apertures to allow the pump to provide more blood pumping assistance to the heart. The improved apertures may also decrease the risk of damage to structures of the heart which may be suctioned to the pump.

[0004] The heart pump includes a plurality of inflow apertures. The inflow apertures can be disposed at a distal end portion of a cannula of the heart pump (e.g., in the case of pumps designed to assist the left ventricle). The inflow apertures can be arranged in two or more rings or rows that are offset from one another along a longitudinal axis of the pump. The use of multiple rings or rows of apertures, rather than a single ring of apertures, can allow each aperture to be smaller, which may reduce the risk that heart structures (e.g., valves) will enter the inlet through the apertures. Furthermore, the additional inflow apertures provide redundancy so that if one subset of the apertures is blocked, there are additional apertures through which blood can enter the pump. The outer edges of the apertures can be defined by struts coupled to the cannula. The struts can function as a screen to prevent the suction of valve leaflets against or into the pump.

[0005] In one aspect, a heart pump assembly includes a rotor, a motor coupled to the rotor, an impeller blade coupled to the rotor such that rotation of the rotor causes the impeller blade to rotate and pump blood, a cannula, a distal projection coupled to a distal end of the cannula, and a blood inlet including a plurality of apertures radially oriented and disposed about a circumference thereof. The plurality of apertures includes at least a first ring of apertures which are proximal to the atraumatic tip and a second ring of apertures which are proximal of the first ring of apertures.

[0006] In some implementations, a first aperture in the first ring of apertures has a greater area than an area of a second aperture in the second ring of apertures. In some implementations, the first apertures in the first ring of apertures and the second ring in the second ring of apertures are oblong. In some implementations, the heart pump assembly includes a third ring of apertures proximal of the second ring. In some implementations, the heart pump assembly includes a fourth ring of apertures proximal of the third ring.

[0007] In some implementations, the first aperture in the first ring of apertures and a third aperture in the third ring of apertures are aligned along an axis on a surface of the cannula parallel to a longitudinal axis of the cannula. In some implementations, the second aperture in the second ring of apertures is aligned with a fourth aperture in the fourth ring of apertures along the axis on the surface of the cannula parallel to the longitudinal axis of the cannula.

[0008] In some implementations, the first aperture in the first ring of apertures has a height measured parallel to the longitudinal axis of the cannula that is greater than a height of any of the second aperture, third aperture or fourth aperture. In some implementations, the height of the first apertures is less than 9 mm. In some implementations, the height of the second aperture is less than 3 mm. In some implementations, a width of the second aperture is less than 4 mm. In some implementations, an area of the first aperture is less than 20 mm². In some implementations, an area of the second aperture is less than 12 mm². In some implementations, the plurality of apertures is formed on an inflow cage that is coupled to the cannula. In some implementations, the inflow cage is comprised of stainless steel. In some implementations, the plurality of apertures is formed near a terminal end of the cannula.

[0009] In some implementations, some of the pluralities of apertures are oblong. In some implementations, some of the pluralities of apertures are round. In some implementations, some of the pluralities of apertures are tear-shaped with a rounded edge oriented at a distal end of the each of the apertures and a pointed edge oriented at a proximal side of each of the apertures. In some implementations, a first aperture in the first ring of apertures has a smaller area than a second aperture in the second ring of apertures. In some implementations, a first aperture in the first ring of apertures has the same area than a second aperture in the second ring of apertures. In some implementations, the distal end portion of the cannula comprises an inflow cage. In some implementations, a distal edge of the first aperture is formed by a base of the atraumatic tip.

[0010] In some implementations, each of the plurality of apertures is defined by an inner edge intersecting an interior of the cannula and an outer edge intersecting the surface of the cannula. In some implementations, the outer edge of each of the plurality of apertures is rounded. In some implementations, the outer edge of each of the plurality of

apertures is chamfered. In some implementations, the heart pump assembly is sized for percutaneous insertion.

[0011] In another aspect, a heart pump assembly includes a rotor, a motor coupled to the rotor, an impeller blade coupled to the rotor such that rotation of the rotor causes the impeller blade to rotate and pump blood, a cannula, and a blood inlet including a plurality of apertures radially oriented and disposed about a circumference thereof. The plurality of apertures includes at least a first ring of apertures and a second ring of apertures, the second ring being proximal of the first ring of apertures. In the plurality of apertures, each aperture of the first ring of apertures has a greater area than an aperture of the second ring of apertures.

[0012] In some implementations, the first apertures in the first ring of apertures and the second ring in the second ring of apertures are oblong. In some implementations, the heart pump assembly includes a third ring of apertures proximal of the second ring. In some implementations, the heart pump assembly includes a fourth ring of apertures proximal of the third ring. In some implementations, the first aperture in the first ring of apertures and a third aperture in the third ring of apertures are aligned along an axis on a surface of the cannula parallel to a longitudinal axis of the cannula. In some implementations, the second aperture in the second ring of apertures is aligned with a fourth aperture in the fourth ring of apertures along the axis on the surface of the cannula parallel to the longitudinal axis of the cannula.

[0013] In some implementations, the first aperture in the first ring of apertures has a height measured parallel to the longitudinal axis of the cannula that is greater than a height of any of the second aperture, third aperture or fourth aperture. In some implementations, the height of the first apertures is less than 9 mm. In some implementations, the height of the second aperture is less than 3 mm. In some implementations, a width of the second aperture is less than 4 mm. In some implementations, an area of the first aperture is less than 20 mm². In some implementations, the plurality of apertures is formed on an inflow cage that is coupled to the cannula. In some implementations, the inflow cage is comprised of stainless steel. In some implementations, the plurality of apertures is formed near a terminal end of the cannula.

[0014] In some implementations, each of the plurality of apertures is defined by an inner edge intersecting an interior of the cannula and an outer edge intersecting the surface of the cannula. In some implementations, the outer edge of each of the plurality of apertures is rounded. In some implementations, the outer edge of each of the plurality of apertures is chamfered. In some implementations, the heart pump assembly is sized for percutaneous insertion.

[0015] In another aspect, a method of manufacturing a heart pump assembly includes coupling an impeller blade to a rotor, inserting the impeller blade in a housing, coupling a cannula to the housing, and coupling an inflow cage including a plurality of apertures to the cannula. The plurality of apertures is radially oriented about a circumference of the inflow cage and the plurality of apertures are arranged in at least a first ring of apertures and a second ring of apertures proximal of the first ring of apertures.

[0016] In some implementations, the inflow cage comprises a third ring of apertures proximal of the second ring of apertures. In some implementations, the inflow cage comprises a fourth ring of apertures proximal of the third ring of apertures. In some implementations, each of the

plurality of apertures includes an outer edge formed by a tumbling process. In some implementations, the plurality of apertures is formed near a terminal end of the cannula. In some implementations the method also includes coupling a distal projection to the distal end of the inflow cage. The distal projection is distal to the plurality of apertures and a base of the distal projection forms a distal edge of the first ring of apertures.

[0017] In another aspect, a method of operating a heart pump assembly includes rotating an impeller about a rotation axis using a motor to draw blood into a cannula of a heart pump assembly at a plurality of blood inlet apertures, and expelling the blood from the heart pump assembly via a plurality of blood exhaust apertures disposed at a proximal end portion of the cannula proximal to the pump. The blood inlet apertures are radially oriented about a circumference of the cannula and arranged in at least two rings at a distal end of the cannula.

[0018] Variations and modifications will occur to those of skill in the art after reviewing this disclosure. The disclosed features may be implemented, in any combination and subcombination (including multiple dependent combinations and subcombinations), with one or more other features described herein. For example, although various specific arrangements of apertures are described herein, a heart pump assembly may be configured to have any number of apertures arranged in any suitable number of rings. Further, the apertures may have any suitable size, shape, or position. The various features described or illustrated above, including any components thereof, may be combined or integrated in other systems. Moreover, certain features may be omitted or not implemented.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The foregoing and other objects and advantages will be apparent upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which like reference characters refer to like parts throughout, and in which:

[0020] FIG. 1 shows an exemplary prior art heart pump assembly;

[0021] FIG. 2 shows a heart pump assembly including a plurality of apertures at a distal end portion, in accordance with example implementations;

[0022] FIG. 3 shows a heart pump assembly including a plurality of apertures arranged in rings at a distal end portion, in accordance with example implementations;

[0023] FIG. 4 shows a heart pump assembly including three rings of apertures at a distal end portion, in accordance with example implementations;

[0024] FIG. 5 shows a perspective view of a distal end portion of a heart pump assembly having four rings of apertures, in accordance with example implementations;

[0025] FIG. 6 shows a front view of a distal end portion of a heart pump assembly having four rings of apertures, in accordance with example implementations;

[0026] FIG. 7 shows a perspective view of a distal end portion of a heart pump assembly having two rotationally offset rings of apertures, in accordance with example implementations;

[0027] FIG. 8 shows a perspective view of a distal end portion of a heart pump assembly having two rotationally aligned apertures, in accordance with example implementations;

[0028] FIG. 9 shows a perspective view of a distal end portion of a heart pump assembly having a plurality of rotationally aligned apertures, in accordance with example implementations;

[0029] FIG. 10 shows a front view of a distal end portion of a heart pump assembly having a plurality of round apertures, in accordance with example implementations;

[0030] FIG. 11 shows a perspective view of a distal end portion of a heart pump assembly having an oblong distal aperture and a plurality of round apertures, in accordance with example implementations;

[0031] FIG. 12 shows a front view of a distal end portion of a heart pump assembly having a distal tear-shaped aperture and a plurality of round apertures, in accordance with example implementations;

[0032] FIG. 13 shows front view of a distal end portion of a heart pump assembly having a distal tear-shaped aperture and a plurality of tear-shaped apertures arranged in rings, in accordance with example implementations;

[0033] FIG. 14 shows a front view of a distal end portion of a heart pump assembly having an arrangement of apertures positioned in closely spaced rings, in accordance with example implementations;

[0034] FIG. 15 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures positioned in moderately spaced rings, in accordance with example implementations;

[0035] FIG. 16 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures positioned in widely spaced rings, in accordance with example implementations;

[0036] FIG. 17 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures positioned in a first ring of long apertures and a second ring of shorter apertures, in accordance with example implementations;

[0037] FIG. 18 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures positioned in a first ring of long apertures and a second ring of shorter apertures spaced apart from the first ring, in accordance with example implementations;

[0038] FIG. 19 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures positioned in four rings of similarly sized apertures, in accordance with example implementations;

[0039] FIG. 20 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures positioned in four rings of differently sized apertures, in accordance with example implementations;

[0040] FIG. 21 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures having chamfered edges, in accordance with example implementations;

[0041] FIG. 22 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures with rounded edges, in accordance with example implementations;

[0042] FIG. 23 shows a front view of a distal end portion of a heart pump assembly having an alternative arrangement of apertures, in accordance with example implementations;

[0043] FIG. 24 shows a plot displaying the predicted flow rate of a fluid through the plurality of apertures in an example arrangement, in accordance with example implementations;

[0044] FIG. 25 shows a percutaneous pump having a plurality of apertures at a distal end portion inserted into a blood vessel of a patient, in accordance with example implementations;

[0045] FIG. 26 is a flow chart of a method for manufacturing a heart pump having a plurality of apertures at a distal end portion, in accordance with example implementations; and

[0046] FIG. 27 is a flow chart of a method for use of a heart pump having a plurality of apertures at a distal end portion, in accordance with example implementations.

DETAILED DESCRIPTION

[0047] To provide an overall understanding of the systems, methods, and devices described herein, certain illustrative embodiments will be described. Although the embodiments and features described herein are described with reference to specific numbers, sizes, and shapes of apertures, it will be understood that the heart pump assembly may be configured to have any suitable number of apertures arranged in any number of rings, not limited to the arrangements described here. Additionally, the apertures may have any suitable size, shape, or position.

[0048] Systems, devices, and methods described herein provide heart pump assemblies with improved inflow apertures. The inflow apertures are designed to prevent or reduce the tendency of the inflow aperture to suck against the interior of the heart or vascular system of the patient. In particular, the inflow apertures can prevent the pump inlet from sucking a valve leaflet (e.g., a leaflet of the mitral valve) into the inlet. This can reduce the risk of occlusion of the apertures to allow the pump to provide more blood pumping assistance to the heart. The improved apertures may also decrease the risk of damage to structures of the heart which may be suctioned to the pump.

[0049] The heart pump includes a plurality of inflow apertures. The inflow apertures can be disposed at a distal end portion of a cannula of the heart pump (e.g., in the case of pumps designed to assist the left ventricle). The inflow apertures can be arranged in two or more rings or rows that are offset from one another along a longitudinal axis of the pump. The use of multiple rings or rows of apertures, rather than a single ring of apertures can allow each aperture to be smaller, which may reduce the risk that heart structures (e.g., valves) will enter the inlet through the apertures. Furthermore, the additional inflow apertures provide redundancy so that if one subset of the apertures is blocked, there are additional apertures through which blood can enter. The outer edges of the apertures can be defined by struts coupled to the cannula. The struts can function as a screen to prevent the suction of valve leaflets against or into the apertures.

[0050] FIG. 1 shows an exemplary prior art heart pump assembly 100. The heart pump assembly 100 includes a motor housing 102, a cannula assembly 108, a plurality of apertures 116, a plurality of blood exhaust outlets 124, and a projection or atraumatic tip 112. The cannula assembly 108 has a proximal end 111, a cannula body 109, an inflow cage 113, a distal end 110, a distal end portion 114, and a tear drop portion 142. The motor housing 102 has a proximal end 107 and a distal end 106. The plurality of apertures 116 are arranged in a single ring 118 in the inflow cage 113 at the distal end portion 114 of the cannula assembly 108. The

atraumatic tip 112 is coupled to the cannula assembly 108 at the distal end 110 of the cannula assembly 108 at the tear drop portion 142.

[0051] The heart pump assembly 100 pulls blood through the plurality of apertures 116 and into the cannula assembly 108. The pump expels the blood proximal of the proximal end 111 of the cannula assembly 108 through the plurality of blood exhaust apertures 124. The heart pump assembly 100 may be percutaneously inserted into the heart through the aorta. The plurality of apertures 116 may be positioned past the aortic valve in the left ventricle, in order to pull blood from the left ventricle and expel the blood into the aorta. Although the atraumatic tip 112 spaces the heart pump assembly 100 from the heart walls, in some instances the plurality of apertures 116 may be positioned near to the walls of the heart or various heart structures, such as the leaflets of the mitral valve. The plurality of apertures 116 each have a large area which may suction structures of the heart, such as valve leaflets against the apertures 116 and even through the apertures 116 into the cannula assembly 108. This can block some or all of the inflow of blood into the cannula assembly 108. When the flow of blood through the cannula assembly 108 is blocked, the support that the heart pump assembly 100 can provide to the heart is lessened.

[0052] FIG. 2 shows a modified heart pump assembly 200 having a plurality of apertures arranged into rings, according to certain implementations. The heart pump assembly 200 includes a motor housing 202, a cannula assembly 208, a plurality of apertures 216, a plurality of blood exhaust outlets 224, and an atraumatic tip 212. The cannula assembly 208 has a proximal end 206, a cannula body 209, an inflow cage 213, a distal end 210, a distal end portion 214, and a tear drop portion 242. The atraumatic tip 212 is coupled to the cannula assembly 208 at a distal end 210 of the cannula assembly 208 at the tear drop portion 242. The plurality of apertures 216 are arranged in the inflow cage 213 at the distal end portion 214 of the cannula assembly 208. The plurality of apertures 216 each have a smaller area relative to the plurality of apertures 116 shown in FIG. 1, and are arranged into multiple rings. The distal end portion 214 of the cannula assembly 208 includes a first ring 218 of apertures, a second ring 220 of apertures, and a third ring 230 of apertures. The inflow cage 213, including the plurality of apertures 216, is approximately the same length as in the inflow cage 113 of the prior art pump 100, but the plurality of apertures 216 includes more apertures which are smaller than those of the prior art pump 100.

[0053] The plurality of smaller apertures 216 arranged in rings 218, 220, and 230 reduces the tendency of the plurality of apertures 216 to suck against the interior of the heart of the patient. In particular, the multiple smaller apertures 216 prevent the heart pump assembly 200 from sucking a valve leaflet into the plurality of apertures 216. This can reduce the risk of occlusion of the apertures 216, thereby allowing the heart pump assembly 200 to provide more assistance to the heart. The apertures 216 may also decrease the risk of damage to structures of the heart which could otherwise be suctioned by the heart pump assembly 200. The heart pump assembly 200 can vary in any number of ways. For example, the embodiment of FIG. 2 and any of the other embodiments herein may exclude a motor housing. Instead, the motor can be configured to be positioned outside of a patient's body and can operatively couple to the rotor via a drive shaft or cable.

[0054] FIG. 3 shows an illustrative view of a heart pump assembly 300, such as heart pump assembly 200 in FIG. 2, including a plurality of apertures 316 at a distal end portion 314 according to some implementations. The heart pump assembly 300 includes a motor housing 302, an impeller blade 304, a cannula assembly 308, a plurality of apertures 316, and an atraumatic tip 312. The motor housing 302 has a distal end 306 and a proximal end 307. The impeller blade 304 is rotatable relative to the cannula assembly 308. The cannula assembly 308 includes a proximal end 311, a distal end 310, a distal end portion 314, a tear drop portion 342 and a cannula body 309 having a circumference 322. The cannula body 309 is coupled to the distal end 306 of the motor housing 302. The plurality of apertures 316 are arranged into a first ring 318 and a second ring 320. The first ring 318 is positioned at a distal end of the distal end portion 314 and the second ring 320 is positioned proximal of the first ring 318. In some implementations, the plurality of apertures 316 are formed in the distal end portion 314 of the cannula assembly 308. In certain implementations, the plurality of apertures 316 are formed in an inflow cage (not shown) which is distinct from, but coupled to, the distal end portion 314 of the cannula assembly 308. The plurality of apertures is separated by a plurality of struts, for example 317a-c. The atraumatic tip 312 is coupled to the distal end 310 of the cannula assembly 308.

[0055] The first ring 318 includes apertures 318a-c. The second ring 320 includes apertures 320a-c. Though the first ring 318 and the second ring 320 are shown with three apertures each (318a-c and 320a-c), the plurality of apertures 316 in the first ring 318 and in the second ring 320 can extend around the entire circumference 322 of the cannula body 309. The first ring 318 and the second ring 320 can each include any suitable number of apertures. In some implementations, the number of apertures in a first ring 318 or the second ring 320 is 3, 4, 5, 6, 7, 8, 9, 10 or any other suitable number of apertures. In some implementations, the number of apertures in the first ring 318 is the same as the number of apertures in the second ring 320, though this is not required. In some implementations, there are fewer apertures in the first ring 318 than in the second ring 320. In some implementations, there are more apertures in the first ring 318 than in the second ring 320.

[0056] The heart pump assembly 300 pulls blood into the cannula assembly 308 by the rotation of the impeller blade 304. The blood enters the cannula assembly 308 at the plurality of apertures 316 at the distal end portion 314 of the cannula assembly 308. The heart pump assembly 300 may be positioned in the heart in such a way that the mitral valve leaflets are proximate to the plurality of apertures 316, and in some instances, the mitral valve leaflets may be sucked against some of the plurality of apertures 316, temporarily blocking blood from entering at the plurality of apertures 316. Because the plurality of apertures 316 are small in size, the apertures 316 are less likely to allow a valve leaflet to enter the heart pump assembly 300 at an inlet. This keeps the interior of the cannula assembly 308 clear for the passage of blood. Furthermore, the struts 317a-c between the plurality of apertures 316 act as a screen to prevent the suctioning of valve leaflets and other tissues to the plurality of apertures 316. A valve leaflet or other portion of the anatomy that is suctioned against some of the plurality of apertures 316, or into the heart pump assembly 300, decreases the area through which blood can enter the cannula assembly 308,

potentially decreasing the flow rate of the blood through the heart pump assembly 300. The plurality of apertures 316 arranged at the distal end portion 314 of the cannula assembly 308 increases the likelihood that some of the plurality of apertures 316 will not be blocked. If a subset of the plurality of apertures 316 are blocked, blood can still enter the heart pump assembly 300 through the remainder of the plurality of apertures 316.

[0057] The plurality of apertures 316 are shown having an oblong shape. The plurality of apertures 316 may have any suitable shape to allow blood to enter the cannula assembly. For example, the plurality of apertures 116 can be oblong, oval, square, tear-shaped, round or any other suitable shape. The shape of the apertures 318a-c of the first ring 318 may differ from the shape of the apertures 320a-c of the second ring 320. In some implementations, edges of the plurality of apertures 316 are rounded or chamfered. Rounded apertures, or apertures with rounded edges, may decrease the risk of hemolysis or other damage to the blood as it enters the plurality of apertures 316. As shown, the apertures 318a-c of the first ring 318 each have a greater area relative to each of the apertures 320a-c of the second ring 320. In some implementations, the apertures 318a-c of the first ring 318 each have a smaller area relative to each of the apertures 320a-c of the second ring 320. In certain implementations, each of the apertures 318a-c of the first ring 318 has the same area as each of the apertures 320a-c of the second ring 320.

[0058] The atraumatic tip 312 coupled to the distal end 310 of the cannula assembly 308 spaces the plurality of apertures 316 from the inner surface of the heart. This spacing prevents the plurality of apertures 316 from suctioning to the walls of the heart, heart valves (e.g., the mitral valve), or any other anatomical structure in the heart. This can reduce the risk of blockage of the plurality of apertures 316 and may reduce or prevent damage to the heart tissues. The atraumatic tip 312 may be shaped as a flexible extension having a pigtail as shown in FIG. 3. In some implementations, the atraumatic tip 312 is configured as a straight extension or as a ball. In some implementations, the atraumatic tip 312 includes a lumen for the passage of a guidewire through the atraumatic tip 312.

[0059] In sum, both the atraumatic tip 312 and the arrangement of apertures 316 help prevent or reduce the risk of a pump inlet being occluded by the heart wall, valve leaflets, or other anatomical structures. The atraumatic tip 312 acts as a mechanical spacer to prevent suction of the apertures against the inner surface of the heart, while the arrangement of apertures 316 and struts 317a-c act as a screen to prevent entry of tissue into the apertures 316. Thus, the atraumatic tip 312 and the arrangement of the apertures 316 together help preserve proper functioning of the heart pump assembly 300.

[0060] FIG. 4 shows an illustrative view of a heart pump assembly 400, such as the heart pump assembly 200 in FIG. 2, including three rings of apertures at a distal end portion 414 of the cannula assembly 408. The heart pump assembly 400 includes a motor housing 402, an impeller blade 404, a catheter 428, a cannula assembly 408, blood exhaust outlets 424, a plurality of apertures 416, and an atraumatic tip 412. The cannula assembly 408 includes a proximal end 411, a distal end 410, a distal end portion 414, a tear drop portion 442, a longitudinal axis 444, and a cannula body 409 having a circumference 422. The motor housing 402 includes the

impeller blade 404 which is rotatable relative to the cannula assembly 408. Rotation of the impeller blade 404 creates suction through the cannula assembly 408. Blood enters the cannula assembly 408 at the plurality of apertures 416 disposed in the distal end portion 414 of the cannula assembly 408. The plurality of apertures 416 are arranged about the circumference 422 of the cannula body 409 in a first ring 418 having apertures 418a-d, a second ring 420 having apertures 420a-d, and a third ring 430 having apertures 430a-d. The first ring 418 is proximal to the distal end 410 of the cannula assembly 408. The second ring 420 is proximal of the first ring 418, and the third ring 430 is proximal of the second ring 420. The plurality of apertures 416 are separated by a plurality of struts 217a-c. Attached to the cannula assembly 408 at the tear drop portion 442 at the distal end 410 is the atraumatic tip 412.

[0061] Each of the plurality of apertures 416 has a height, a width, and an area. The plurality of apertures 416 can have a variety of sizes. The first ring 418 may have the aperture 418d having a larger area than the aperture 420d of the second ring or the aperture 430d of the third ring 430. The area of the aperture 418d of the first ring 418 may be less than 20 mm². In some implementations, the area of the aperture 418d of the first ring 218 is 0.5 mm², 1 mm², 5 mm², 10 mm², 15 mm², 18 mm², 20 mm², 23 mm², 25 mm² or any other suitable area. The area of the aperture 420d of the second ring 420 may be less than 12 mm². In some implementations, the area of the apertures 420d of the second ring 420 may be 0.25 mm², 0.5 mm², 1 mm², 2 mm², 5 mm², 10 mm², 12 mm², or any other suitable area. The area of the aperture 430d of the third ring 430 may be the same as the area of aperture 420d of the second ring. The height of the apertures 418b of the first ring 418 as measured along an axis parallel to the longitudinal axis 444 of the cannula assembly 408 may be less than 9 mm. In some implementations, the height of the aperture 418b of the first ring 418 is 0.5 mm, 1 mm, 3 mm, 5 mm, 6 mm, 9 mm, 10 mm, 12 mm, 15 mm or any other suitable height. The height of the aperture 420b of the second ring 420 as measured along an axis parallel to the longitudinal axis 444 of the cannula assembly 408 may be less than 3 mm. In some implementations, the height of the aperture 420b of the second ring 420 is 0.25 mm, 0.5 mm, 1 mm, 1.5 mm, 2 mm, 2.5 mm, 3 mm, 3.5 mm, 4 mm, 5 mm, 6 mm, or any other suitable height. A width of the aperture 420b of the second ring 420 measured transverse to the longitudinal axis 444 may be less than 4 mm. In some implementations, the width of the aperture 420b of the second ring 420 is 0.5 mm, 1 mm, 1.5 mm, 2 mm, 2.5 mm, 3 mm, 3.5 mm, 4 mm, 5 mm, 6 mm, 8 mm, or any other suitable width. In some implementations, a height and the width of aperture 430b is the same as the height and the width of aperture 420b.

[0062] The plurality of apertures 416 prevents the heart pump assembly 400 from failing due to the suction of a valve leaflet against a portion of the plurality of apertures 416. The plurality of apertures 416 arranged in rings 418, 420, and 430, reduces the tendency of the plurality of apertures 416 to suck heart structures against the inlets of the heart pump assembly 400. The multiple apertures 416, along with the struts 417a-c, prevent the heart pump assembly 400 from sucking a valve leaflet into the plurality of apertures 416, thereby reducing risk of blocking the apertures 416 and allowing the heart pump assembly 400 to continue to provide assistance to the heart. Furthermore, the plurality of

apertures **416** provide redundant inflow inlets for blood to enter even if one or more of the plurality of apertures **416** is blocked by a valve leaflet or other tissue.

[0063] In some implementations, a large portion of blood that enters the cannula assembly **408** enters through the most proximal of the plurality of apertures **416**, for example through the apertures **430a-c** of the third ring **430**. When one or more of the plurality of apertures **416** in the third ring **430** is blocked, a larger amount of blood may enter at the plurality of apertures **416** in the second ring **420** or the first ring **418**. Additional apertures provide additional inlets through which blood can enter the heart pump assembly. Additionally, the struts **417a-c** that define the plurality of apertures **416** can act as a screen to prevent the suction of tissue against, or into, the heart pump assembly **400**.

[0064] While FIG. 4 shows a heart pump assembly **400** having a plurality of apertures arranged in three rings, in some implementations there may be additional rings of apertures. For example, FIG. 5 shows a perspective view of a distal end portion **514** of a cannula assembly having four rings of apertures, and FIG. 6 shows a front view of the distal end portion **514** of the cannula assembly of FIG. 5. The distal end portion **514** includes a distal end **510**, an atraumatic tip connector **548**, a tear drop portion **542**, a longitudinal axis **544**, and a plurality of apertures **516** arranged in a first ring **518**, a second ring **520**, a third ring **530**, and a fourth ring **540**. The plurality of apertures **516** in the first ring **518** include apertures **518a-e** oriented radially around a circumference of the distal end portion **514**. The second ring **520** of apertures **520a-e**, the third ring **530** of apertures **530a-e**, and the fourth ring **540** of apertures **540a-e** are radially oriented around a circumference of the distal end portion **514**.

[0065] The first ring **518** of apertures **518a-e** has the largest height of the four rings of apertures. The first ring **518** of apertures **518a-e** has a distal edge **551** of each aperture which is defined by a portion **552** of the tear drop portion **542**. The tear drop portion **542** may be manufactured separately from the rest of the cannula assembly in which the rest of the plurality of apertures **516** are disposed, and may be joined to the cannula assembly (not shown) as part of the manufacturing process. As a result, the first ring **518** of apertures **518a-e** may be formed in the cannula assembly (or in the inflow cage, not shown) during the manufacture process as initially only having defined three sides, with a fourth, distal side left open. The fourth, distal edge **551** of each aperture **518a-e** is then defined by a portion **552** of the tear drop portion **542** when it is joined to the cannula assembly. The proximal edge **553** of the apertures **518a-e** is rounded, giving the apertures **518a-e** an oblong shape.

[0066] The apertures **520a-e** of the second ring **520** are rotationally offset from the apertures **518a-e** of the first ring, such that a line **555** drawn through the center of aperture **518b** parallel to the longitudinal axis **544** of the distal end portion **514** does not pass through a center of any of the apertures **520a-e** of the second ring **520**. In some implementations, the line **555** may pass through a portion of one of the apertures **520a-e**, but not the center of apertures **520a-e**. The apertures **530a-e** are rotationally aligned with the apertures **518a-e**, such that the line **555** passes through a center of the one of apertures **518a-e** and a center of one of the apertures **530a-e**. In particular, the line **555** passes through the center of aperture **518b** and the center of aperture **530b**. The line **555** does not pass through the center

of any of the apertures **540a-e** of the fourth ring **540**, as the apertures **540a-e** are rotationally offset from the apertures **518a-e** and the apertures **530a-e**. The apertures **520a-e** of the second ring **520** are rotationally aligned with the apertures **540a-e** of the fourth ring **540** such that the line **557** parallel to the longitudinal axis **544** of the distal end portion **514** passes through a center of aperture **520b** and **540b**. In some implementations, different rings of apertures may be rotationally aligned or offset. For example, in some implementations the apertures **518a-e** and **520a-e** of the first ring **518** and second ring **520**, respectively, may be rotationally aligned, while the apertures **530a-e** of the third ring **530** and apertures **540a-e** of the fourth ring **540** are not rotationally aligned with the first ring **518** and the second ring **520**. In some implementations, the apertures **518a-e** and the apertures **530a-e** are aligned, and the apertures **520a-e** and the apertures **540a-e** are rotationally offset from the first ring **518** and the third ring **530**. In some implementations, the second ring **520** and fourth ring **540** are rotationally offset from first ring **518** by different amounts such that a line **557** drawn through an aperture **520b** of the second ring **520** does not pass through a center of any aperture **540a-e** of the fourth ring **540**.

[0067] Each of the apertures **518a-e**, **520a-e**, **530a-e**, and **540a-e** of the plurality of apertures **516** has an associated height measured parallel to the longitudinal axis **544**, a width measured transverse to the longitudinal axis **544**, and an area. For example, aperture **518a** has a height **538** and a width **541**. Aperture **518a** also has an area **532** through which blood may pass. The aperture **520b** of the second ring **520** has a height **554**, a width **556** and an area **534**. The aperture **530b** of the third ring **530** has a height **558**, a width **560** and an area **536**. The aperture **540b** of the fourth ring **540** has a height **562**, a width **564** and an area **566**. In some implementations, the measurements including one or more of the height, the width and the area of the apertures in a particular ring are common to all the apertures in that ring, however this is not required. In some implementations, the measurements, including one or more of the height, width, and area, vary amongst the apertures in a particular ring. In some implementations, the apertures **520a-e** in the second ring **520**, the apertures **530a-e** in the third ring **530**, and the apertures **540a-e** in the fourth ring **540**, have the same measurements including one or more of the height, width and area. In some implementations, one or more of the height, width or area of the apertures vary between the apertures **520a-e** in the second ring **520**, the apertures **530a-e** in the third ring **530**, and the apertures **540a-e** in the fourth ring **540**. In some implementations, the combined areas of the apertures **518a-e** of the first ring **518**, the apertures **520a-e** in the second ring **520**, the apertures **530a-e** in the third ring **530**, and the apertures **540a-e** in the fourth ring **540** is equal to or greater than a cross-sectional area of the cannula assembly.

[0068] Despite the apertures **518a-e** of the first ring **518** having a larger area **532** than the apertures **520a-e** in the second ring **520**, the apertures **530a-e** in the third ring **530**, and the apertures **540a-e** in the fourth ring **540**, blood flows predominantly through the most proximal apertures of the plurality of apertures **516** due to the smaller pressure drop at these apertures. If all or a portion of the apertures **540a-e** of the fourth ring **540** are blocked by a valve leaflet, the blood may still flow through the rest of the apertures. The smaller areas of the apertures **520a-e** in the second ring **520**, the

apertures **530a-e** in the third ring **530**, and the apertures **540a-e** in the fourth ring **540**, and the struts **517a-c** between the inlets decreases the likelihood that the additional inlets will be blocked by a valve leaflet.

[0069] FIG. 7 shows a front view of a distal end portion **714** of a cannula assembly **708** having a plurality of apertures **716** which are arranged in two rotationally offset rings. The cannula assembly **708** includes a cannula body **709**, a distal end portion **714**, a distal end **710**, an atraumatic tip **712**, a tear drop portion **742**, a longitudinal axis **744**, a plurality of struts **717a-c**, and a plurality of apertures **716**. The plurality of apertures **716** is arranged in a first ring **718** of apertures **718a-b**, and a second ring **720** of apertures **720a-b**. The plurality of apertures **716** in the cannula assembly **708** are arranged such that the first ring **718** of apertures **718a-b** is rotationally offset from the second ring **720** of apertures **720a-b**. A line **755** drawn parallel to the longitudinal axis **744** of the cannula assembly **708** through a center of aperture **718a** of the first ring **718** does not pass through a center of any of apertures **720a-b** of the second ring **720**. The line **755** instead passes through the strut **717b** dividing aperture **720a** and aperture **720b** of the second ring **720**. Rotationally offset apertures may prevent a valve leaflet from completely blocking more than one of the apertures. For example, if a valve leaflet is suctioned to the cannula assembly **708** such that it covers aperture **718a** of the first ring **718**, the rotational offset of the second ring **720** of apertures **720a-b** may prevent the valve leaflet from blocking all of an additional aperture **720a** or **720b** of the second ring **720**.

[0070] While FIGS. 5, 6 and 7 show a distal end portion of a cannula assembly (for example, distal end portion **514** of FIG. 5 or distal end portion **714** of FIG. 7) with a plurality of rotationally offset apertures (for example, plurality of apertures **516** of FIG. 5 or plurality of apertures **716** of FIG. 7), FIG. 8 shows a perspective view of a distal end portion **814** of a cannula assembly **808** in which the plurality of apertures **816** are rotationally aligned with one another. FIG. 9 shows an alternative perspective view of the distal end portion **914** with a plurality of rotationally aligned apertures **916**. The cannula assembly **908** includes a cannula body **909**, a distal end portion **914**, a distal end **910**, an atraumatic tip **912**, a tear drop portion **942**, an atraumatic tip connector **948**, a longitudinal axis **944**, and a plurality of apertures **916**. The plurality of apertures **916** are arranged in a first ring **918** of apertures **918a-d**, and a second ring **920** of apertures **920a-d**. The plurality of apertures **916** in cannula assembly **908** are arranged such that the first ring **918** of apertures **918a-d** is rotationally aligned with the second ring **920** of apertures **920a-d**. A line **955** drawn parallel to the longitudinal axis **944** of the cannula assembly **908** through a center of aperture **918b** of the first ring **918** also passes through a center of apertures **920b** of the second ring **920**. Apertures **918a-d** and apertures **920a-d** are shown with a larger height than width such that the area of each aperture **918a-d** and **920a-d** is defined by an oval shape through which blood may enter the cannula assembly **908**. Rotationally aligned apertures may be simpler to machine in a cannula assembly **908** than offset apertures.

[0071] FIG. 10 shows a front view of a distal end portion **1014** of a cannula assembly **1008** having a plurality of round apertures **1016**, which are rotationally offset from each other. The cannula assembly **1008** of FIG. 10 includes a distal end **1010**, distal end portion **1014**, an atraumatic tip

connector **1048**, a tear drop portion **1042**, a longitudinal axis **1044**, an atraumatic tip **1012**, and a plurality of apertures **1016**. The plurality of apertures **1016** are disposed in a first ring **1018** of apertures **1018a-c**, a second ring **1020** of apertures **1020a-b**, a third ring **1030** of apertures **1030a-c**, and a fourth ring **1040** of apertures **1040a-b**. The apertures **1018a-c** of the first ring **1018** are oblong in shape. In particular, the first ring **1018** of apertures **1018a-c** are rounded on a proximal edge **1053** and have a distal edge **1051** defined by a portion of the tear drop portion **1042**. The apertures **1020a-b** in the second ring **1020**, the apertures **1030a-c** in the third ring **1030**, and the apertures **1040a-b** in the fourth ring **1040** are circular. The apertures **1018a-c** in the first ring **1018** and the apertures **1030a-c** in the third ring **1030** are rotationally aligned such that the line **1055** through a center of aperture **1018b** passes through a center of the aperture **1030b**. The apertures **1020a-b** in the second ring **1020** and the apertures **1040a-b** in the fourth ring **1040** are rotationally offset from the apertures **1018a-c** and the apertures **1030a-c**, but are rotationally aligned with each other such that a line **1057** through a center of the aperture **1020** parallel to the longitudinal axis **1044** of the cannula **1008** passes through a center of the aperture **1040a**. The plurality of apertures **1016** with circular shapes which are arranged in rings about the cannula assembly **1008** such that the apertures of each ring are rotationally offset from the apertures of the ring directly above or below it may decrease the likelihood that a valve leaflet will block multiple apertures.

[0072] While FIG. 10 shows a distal end portion **1014** of a cannula assembly **1008** having a first ring of apertures and three additional rings of round apertures, FIG. 11 shows a distal end portion **1114** of a cannula assembly having a first ring of apertures and only two additional rings of round apertures. The distal end portion **1114** of FIG. 11 includes a distal end **1110**, an atraumatic tip connector **1148**, a tear drop portion **1142**, a longitudinal axis **1144**, and a plurality of apertures **1116**. The plurality of apertures **1116** are disposed in a first ring **1118** of apertures **1118a-d**, a second ring **1120** of apertures **1120a-c**, and a third ring **1130** of apertures **1130a-c**. The apertures **1118a-e** of the first ring **1118** are oblong in shape and are defined on a distal edge **1151** by a portion **1152** of the tear drop portion **1142**. A proximal edge **1153** of the apertures **1118a-e** is rounded. The apertures **1120a-c** in the second ring **1120** and the apertures **1130a-c** in the third ring **1130** are circular. Like the plurality of apertures **1116** in FIG. 10, the rings of the plurality of apertures **1116** are rotationally offset. For example, the apertures **1118a-e** in the first ring **1118** and the apertures **1130a-c** in the third ring **1130** are rotationally aligned such that the line **1155** through a center of the aperture **1118b** passes through a center of the aperture **1130a**.

[0073] While FIGS. 10 and 11 show distal end portions having a plurality of circular and oblong apertures, FIG. 12 shows a front view of a distal end portion **1214** of a cannula assembly having a plurality of apertures **1216**, with a first ring **1218** having apertures **1218a** with a tear drop shape, while apertures in additional rings are circular. The distal end portion **1214** includes a distal end **1210**, an atraumatic tip connector **1248**, a tear drop portion **1242**, a longitudinal axis **1244**, and a plurality of apertures **1216**. The plurality of apertures **1216** are disposed in a first ring **1218** of aperture **1218a**, a second ring **1220** of apertures **1220a-b**, and a third ring **1230** of aperture **1230a**. Though a single aperture **1218a** and **1230a** are visible in FIG. 12, there may be multiple

apertures in each ring 1218, 1220, and 1230 disposed radially about the circumference of the distal end 1214 of the cannula assembly. The apertures 1218c in the first ring 1218 are tear-shaped such that a distal edge 1251 defined by a portion 1252 of the tear drop portion 1242 of the atraumatic tip connector 1248 is rounded and a proximal edge 1253 is pointed in a direction of blood flow through the cannula. The second ring 1220 of apertures 1220a-b, and the third ring 1230 of aperture 1230a are circular. In some implementations, one or both of the second ring 1220 of apertures 1220a-b, and the third ring 1230 of aperture 1230a are rotationally aligned with the first ring 1218 of apertures 1218a.

[0074] While FIG. 12 shows a first ring 1218 of tear-shaped apertures with apertures of other rings being circular, in some implementations all of the apertures are tear-shaped. For example, FIG. 13 shows a front view of a distal end portion 1314 having tear-shaped apertures in the first ring 1318 and a plurality of tear-shaped apertures arranged in a second ring 1320 and third ring 1330. The distal end portion 1314 includes a distal end 1310, an atraumatic tip connector 1348, a tear drop portion 1342, a longitudinal axis 1344, and a plurality of apertures 1316 disposed in a first ring 1318 of aperture 1318a, a second ring 1320 of apertures 1320a-b, and a third ring 1330 of aperture 1330a. As in FIG. 11, though a single aperture 1218a and 1230a are visible in the first ring 1218 and the third ring 1230 in FIG. 12, each ring may include a plurality of apertures disposed about the distal end portion 1214 of the cannula assembly. Similarly to the first ring 1218 of aperture 1218a of FIG. 12, the aperture 1318a in the first ring is tear-shaped with a rounded distal edge 1351 defined by the tear drop portion 1342 of the atraumatic tip connector 1348 and a proximal edge 1353 that is pointed along the longitudinal axis 1344. The apertures 1320a-b in the second ring 1320 and the apertures 1330a-c in the third ring 1330 are also tear-shaped, with each aperture having a rounded distal end and a pointed proximal end. The larger opening at a distal end tapering to the pointed opening at a proximal end may facilitate blood flow through the apertures and limit stagnation of the blood as it flows into the plurality of apertures 1316.

[0075] Variations in the number and size of the apertures in the distal end portion can alter the flow distribution of blood into the cannula. FIGS. 14-23 show further arrangements of apertures in a distal end portion of a cannula. All arrangements in FIGS. 14-23 show the plurality of apertures disposed on a similar portion of the distal end portion of the cannula, but the apertures vary in the shape, positioning, and relative size. FIG. 14 shows a front view of a distal end portion 1414 of a heart pump assembly having a plurality of apertures 1416 arranged into three rings of apertures according to certain implementations. The distal end portion 1414 includes a distal end 1410, an atraumatic tip connector 1448, a tear drop portion 1442, a longitudinal axis 1444, a plurality of apertures 1416, a first circumferential strut 1463 and a second circumferential strut 1465. The circumferential struts 1463 and 1465 run about a circumference of the distal end portion 1414 and divide the plurality of apertures 1416 into rings of apertures. The plurality of apertures 1416 are disposed in a first ring 1418 of apertures 1418a-c, a second ring 1420 of apertures 1420a-c, and a third ring 1430 of apertures 1430a-c. The first circumferential strut 1463 divides the first ring 1418 from the second ring 1420. The second circumferential strut 1465 divides the second ring

1420 from the third ring 1430. The apertures 1418a-c are defined on one side by the tear drop portion 1442. The apertures 1418a-c of the first ring 1418 are oblong in shape, each having a height that is larger than a width. The apertures 1420a-c of the second ring 1420 and apertures 1430a-c of the third ring 1430 are oblong, each having a width that is larger than a height. Additionally, apertures 1420a-c of the second ring 1420 and apertures 1430a-c of the third ring 1430 have a proximal edge which is rounded and a distal edge which is straight.

[0076] FIG. 15 shows a front view of a distal end portion 1514 of a cannula assembly according to certain implementations. The distal end portion 1514 includes a distal end 1510, an atraumatic tip connector 1548, a tear drop portion 1542, a longitudinal axis 1544, a plurality of apertures 1516, a first circumferential strut 1563 and a second circumferential strut 1565. The circumferential struts 1563 and 1565 run about a circumference of the distal end portion 1514 and divide the plurality of apertures 1516 into rings of apertures. The plurality of apertures 1516 are arranged into three rings of apertures, a first ring 1518 of apertures 1518a-c, a second ring 1520 of apertures 1520a-c, and a third ring 1530 of apertures 1530a-c. The first circumferential strut 1563 divides the first ring 1518 from the second ring 1520. The second circumferential strut 1565 divides the second ring 1520 from the third ring 1530. The apertures 1518a-c of the first ring 1518 are defined on one side by the tear drop portion 1542 and have a lesser height along the longitudinal axis 1544 than the apertures 1418a-c of the first ring 1418 in FIG. 14. The size and shape of apertures 1520a-c and apertures 1530a-c are the same as in FIG. 14. Additionally, the first circumferential strut 1563 between the first ring 1518 and second ring 1520 has a larger height in the direction of the longitudinal axis 1544 than the first circumferential strut 1463 dividing the first ring 1418 and second ring 1420 in FIG. 14. This may provide additional area which is non-sucking that can prevent suctioning of the valve leaflets to the cannula assembly according to certain implementations.

[0077] FIG. 16 shows a front view of a distal end portion 1614 according to certain implementations. The distal end portion 1614 includes a distal end 1610, an atraumatic tip connector 1648, a tear drop portion 1642, a longitudinal axis 1644, a plurality of apertures 1616, and a first circumferential strut 1663 and a second circumferential strut 1665. The circumferential struts 1663 and 1665 run about a circumference of the distal end portion 1614 and divide the plurality of apertures 1616 into rings of apertures. The plurality of apertures 1616 are arranged into three rings of apertures, a first ring 1618 of apertures 1618a-c, a second ring 1620 of apertures 1620a-c, and a third ring 1630 of apertures 1630a-c. The first circumferential strut 1663 divides the first ring 1618 from the second ring 1620. The second circumferential strut 1665 divides the second ring 1620 from the third ring 1630. The apertures 1618a-c of the first ring 1618 are defined on one side by the tear drop portion 1642. A height of the apertures 1618a-c of the first ring 1618 which is less than the height of the apertures 1518a-c of the first ring 1518 in FIG. 15. The size and shape of apertures 1620a-c and apertures 1630a-c are the same as in FIGS. 14 and 15, but the height of the apertures 1618a-c of the first ring 1618 is less than the height of the corresponding apertures in FIGS. 14 and 15. The first circumferential strut 1663 dividing the first ring 1618 from the second

ring 1620 is additionally greater in height along the longitudinal axis 1644 in the arrangement of FIG. 16 than in the corresponding circumferential struts 1463 and 1563 in FIG. 14 or 15.

[0078] FIG. 17 shows a front view of a distal end portion 1714 of a cannula assembly having a plurality of apertures 1716 arranged into two rings of apertures according to certain implementations. The distal end portion 1714 includes a distal end 1710, an atraumatic tip connector 1748, a tear drop portion 1742, a longitudinal axis 1744, a plurality of apertures 1716, and a circumferential strut 1763. The circumferential strut 1763 runs about a circumference of the distal end portion 1714 and divides the plurality of apertures 1716 into rings of apertures. The plurality of apertures 1716 are disposed in a first ring 1718 of apertures 1718a-c, and a second ring 1720 of apertures 1720a-c. The circumferential strut 1763 divides the first ring 1718 from the second ring 1720. The shape of the apertures 1718a-c of the first ring 1718 may be the same oblong shape defined at a distal edge 1751 by the tear drop portion 1742 as in FIGS. 14-16. The size and shape of the apertures 1720a-c of the second ring 1720 may be the same as in FIGS. 14-16. The apertures 1718a-c of the first ring 1718 and the apertures 1720a-c of the second ring 1720 are shown offset from one another. However, in some implementations, the apertures 1718a-c of the first ring 1718 are rotationally aligned with the apertures 1720a-c of the second ring 1720.

[0079] FIG. 18 shows a front view of a distal end portion 1814 of a cannula assembly having a plurality of apertures 1816 arranged into two rings of apertures according to certain implementations. The distal end portion 1814 of the cannula 1808 includes a distal end 1810, an atraumatic tip connector 1848, a tear drop portion 1842, a plurality of apertures 1816, and a circumferential strut 1863. The circumferential strut 1863 runs about a circumference of the distal end portion 1814 and divides the plurality of apertures 1816 into rings of apertures. The plurality of apertures 1816 are arranged into a first ring 1818 having apertures 1818a-c and a second ring 1820 having apertures 1820a-c. The circumferential strut 1863 divides the first ring 1818 from the second ring 1820. The apertures 1818a-c of the first ring 1818 are defined on one side by the tear drop portion 1842 and have a lesser height than the apertures 1718a-c of the distal end portion of FIG. 17. The area through which blood may enter the cannula assembly 1808 may be decreased in FIG. 18 as compared to FIG. 17. However, the circumferential strut 1863 1820 is greater in FIG. 18 than circumferential strut 1763 in FIG. 17. This increases the area over which there is no suction and may decrease the likelihood of suctioning a valve leaflet or other tissue to the cannula assembly.

[0080] FIGS. 19-23 show arrangements according to various implementations in which a distal end portion includes a plurality of apertures arranged in four rings. For example, FIG. 19 shows a front view of a distal end portion 1914 of a cannula assembly. The distal end portion 1914 includes a distal end 1910, an atraumatic tip connector 1948, a tear drop portion 1942, a longitudinal axis 1944, a plurality of apertures 1916, a first circumferential strut 1963, a second circumferential strut 1965, and a third circumferential strut 1967. The circumferential struts 1963, 1965, and 1967 run about a circumference of the distal end portion 1914 and divide the plurality of apertures 1916 into rings of apertures. The plurality of apertures 1916 is disposed in a first ring

1918 of apertures 1918a-c, a second ring 1920 of apertures 1920a-c, a third ring 1930 of apertures 1930a-c, and a fourth ring 1940 of apertures 1940a-c. The first circumferential strut 1963 divides the first ring 1918 from the second ring 1920. The second circumferential strut 1965 divides the second ring 1920 from the third ring 1930. The third circumferential strut 1967 divides the third ring 1930 from the fourth ring 1940. The apertures 1918a-c are defined on one side by the tear drop portion 1942. The respective heights of the apertures 1918a-c of the first ring 1918, the apertures 1920a-c of the second ring 1920, the apertures 1930a-c of the third ring 1930, and the apertures 1940a-c of the fourth ring 1940 are similar. The first circumferential strut 1963 has a similar height as the second circumferential strut 1965 which is also similar to a height of the third circumferential strut 1967. The area of the apertures 1918a-c of the first ring 1918 is similar to the areas of the apertures 1920a-c of the second ring 1920, the apertures 1930a-c of the third ring 1930, and the apertures 1940a-c of the fourth ring 1940. Though the apertures in the second ring 1920, the third ring 1930, and the fourth ring 1940 are shown in alignment with the apertures 1918a-c of the first ring, in some implementations the apertures can also be rotationally offset.

[0081] FIG. 20 shows a front view of a distal end portion 2014 of a cannula assembly 2008 having a plurality of apertures 2016 in which each ring of apertures has a different size and shape according to certain implementations. The distal end portion 2014 includes a distal end 2010, an atraumatic tip connector 2048, a tear drop portion 2042, a longitudinal axis 2044, and a plurality of apertures 2016. The plurality of apertures 2016 are disposed in a first ring 2018 of apertures 2018a-c, a second ring 2020 of apertures 2020a-b, a third ring 2030 of apertures 2030a-b, and a fourth ring 2040 of apertures 2040a-b. The apertures 2018a-c are defined on one side by the tear drop portion 2042. The apertures 2018a-c of the first ring 2018 have the greatest height of the plurality of apertures 2016. The apertures 2020a-b of the second ring 2020 have the next greatest height. The apertures 2030a-b of the third ring 2030 have the next greatest height. The apertures 2040a-b of the fourth ring 2040 are the smallest in height of the plurality of apertures 2016. The plurality of apertures 2016 are shown having rounded shapes; however, the plurality of apertures 2016 may have any suitable shape while maintaining the relationship between the heights. In some implementations, the height the apertures 2018a-c of the first ring 2018 is less than six times the height of the apertures 2020a-b of the second ring 2020. In some implementations, the height of the apertures 2020a-b of the second ring 2020 is less than three times the height of the apertures 2030a-b of the third ring 2030. In some implementations, the height of the apertures 2030a-b of the third ring 2030 is less than five times the height of the apertures 2040a-b of the fourth ring 2040.

[0082] In each of FIGS. 21-22 the apertures of the first ring have the same oblong shape and same size, and the apertures of the second, third and fourth rings have the same size and shape. In FIG. 21, a distal end portion 2114 includes a distal end 2110, an atraumatic tip connector 2148, a tear drop portion 2142, a longitudinal axis 2144, and a plurality of apertures 2116. The plurality of apertures 2116 are disposed in a first ring 2118 of apertures 2118a-c, a second ring 2120 of apertures 2120a-c, a third ring 2130 of aper-

tures **2130a-c**, and a fourth ring **2140** of apertures **2140a-c**. The apertures **2118a-c** of the first ring **2118** are oblong. In particular, the first ring **2118** of apertures **2118a-c** are rounded on a proximal edge **2153** and have a distal edge **2151** defined by a portion **2152** of tear drop portion **2142**. The apertures **2120a-c** in the second ring **2120** are the same shape and size as the apertures **2130a-c** in the third ring **2130** and as the apertures **2140a-c** in the fourth ring **2140**. The plurality of apertures **2116** in the second ring **2120**, the third ring **2130**, and the fourth ring **2140** are oblong, each having a width which is greater than a height as measured along a line parallel to the longitudinal axis **2144**. The plurality of apertures **2116** in the second ring **2120**, the third ring **2130**, and the fourth ring **2140** are rounded at their proximal edges **2169a-c** with the centers of the proximal edges **2153** and **2169a-c** being the proximal-most point of each aperture. Each aperture has an inner edge **2171a-d**. The inner edge **2171a-d** of each of the plurality of apertures **2116** is chamfered. The chamfer may be at an angle of 45 degrees or less relative to a line normal to the surface of the cannula assembly **108**. In some implementations, the chamfered inner edge **2171a-d** includes a chamfer of 10. degree., 20. degree., 30. degree., 40. degree., 50. degree., >50. degree., or any other suitable angle. The use of a chamfered inner edge **2171a-d** can reduce hemolysis of the blood as it enters the cannula assembly **2108**. Though the chamfered inner edge **2171a-d** is shown here in an arrangement having four rings of apertures, a chamfered inner edge may be used in any of the arrangements shown herein. In FIG. 22, as in FIG. 21, the distal end portion **2214** includes a distal end **2210**, an atraumatic tip connector **2248**, a tear drop portion **2242**, a longitudinal axis **2244**, and a plurality of apertures **2216** disposed in a first ring **2218** of apertures **2218a-c**, a second ring **2220** of apertures **2220a-c**, a third ring **2230** of apertures **2230a-c**, and a fourth ring **2240** of apertures **2240a-c**. Each of the plurality of apertures **2216** has an inner edge **2271a-d**, which is rounded. In some implementations, the rounded inner edge **2271a-d** includes a radius ranging from 40 microns to 105 microns. In some implementations, only an outward facing portion of the inner edge **2271a-d** is rounded. In some implementations, the rounding of the inner edge **2271a-d** is accomplished by polishing. In some implementations, the rounding of the inner edge **2271a-d** is accomplished by a tumbling process. Rounded edges may decrease hemolysis of the blood as it enters the cannula assembly **2208** through the plurality of apertures **2216**. Though the rounded inner edge **2271a-d** is shown here in an arrangement having four rings of apertures, a rounded inner edge may be used in any of the arrangements shown herein.

[0083] FIG. 23 shows a front view of a distal end portion **2314** of a cannula assembly. The distal end portion **2314** includes a distal end **2310**, an atraumatic tip connector **2348**, a tear drop portion **2342**, a longitudinal axis **2344**, and a plurality of apertures **2316**. The plurality of apertures is disposed in a first ring **2318** of apertures **2318a-c**, a second ring **2320** of apertures **2320a-c**, a third ring **2330** of apertures **2330a-c**, and a fourth ring **2340** of apertures **2340a-c**. The apertures **2318a-c** of the first ring **2318** have an oblong shape defined at a distal edge **2351** by the tear drop portion **2342**. The plurality of apertures **2320a-c**, **2330a-c**, and **2340a-c** of the second ring **2320**, third ring **2330**, and fourth ring **2340**, respectively, are oval in shape such that a width

is larger than a height, and all of the plurality of apertures in the second ring **2320**, third ring **2330**, and fourth ring **2340** are the same size.

[0084] FIG. 24 shows a plot **2400** displaying a predicted flow of fluid through the plurality of apertures to the arrangement of FIG. 23. The plot **2400** includes a cut-away of a distal end portion **2414** of a cannula assembly, a second aperture **2420**, a fourth aperture **2440**, and a box **2441** indicating a region of high flow. The plot shows the predicted flow of fluid through two apertures of a heart pump as shown in cross-section. The heart pump has a first, second, third, and fourth ring of apertures, though only an aperture of the second ring **2420** and fourth ring **2440** are visible, as the first ring **2418** and third ring **2430** are rotationally offset in the depicted implementation. Areas of higher velocities in the plot are depicted with longer lines, while areas of lower flow are shown with fewer lines. The velocity magnitude of the fluid flow ranges from 1.28×10^{-5} m/s (about 0 m/s) to 6.08 m/s. The highest volumetric flow rate (highlighted by the box **2441**) occurs at the most proximal apertures, in this case through the aperture **2440a** of the fourth ring **2440**. The high inflow of fluid into the cannula assembly **2408** at this point is due to the relatively higher-pressure gradient at this aperture. The blood is pulled from outside of the cannula assembly **2408**, through the apertures and into the cannula assembly **2408** where the blood flows to the downstream apertures (not shown).

[0085] FIG. 25 shows a percutaneous heart pump assembly **2500** having a plurality of apertures **2516** at a distal end portion **2514** inserted into a blood vessel **2501** of a patient. In particular, the heart pump assembly **2500** is introduced through a blood vessel **2501** of a patient and into a heart **2503**. The heart **2503** includes an aorta **2568**, aortic arch **2577**, aortic valve **2570**, left ventricle **2572**, left atrium **2576**, and mitral valve **2574**, as well as other structures. The heart pump assembly **2500** includes a catheter **2528**, a motor housing **2502**, a cannula assembly **2508**, a cannula body **2509**, a distal end portion **2514**, a proximal end **2506**, a distal end **2510**, an atraumatic tip **2512**, a plurality of apertures **2516**, and a plurality of blood exhaust outlets **2524**. The motor housing **2502** of the heart pump assembly **2500** is connected to a motor (not shown). The motor is internal to and integrated with the motor housing **2502**. In other implementations the motor is external to the body and connected to the pump via a drive shaft (not shown) within a catheter **2528** and in such an example the assembly **2508** may not include the motor housing **2502**. The cannula assembly **2508** is connected to a distal end of the motor housing **2502**. The distal end portion **2514** of the cannula assembly **2508** includes the plurality of apertures **2516** through which blood may enter the cannula assembly **2508**. The plurality of apertures **2516** are arranged into at least a first ring **2518** and a second ring **2520** of apertures which are radially oriented and disposed about a circumference of the cannula assembly **2508**. Though two rings of apertures are depicted here, any arrangement of apertures described herein may be used. In some implementations, the plurality of apertures **2516** is arranged into three, four, or more rings of apertures. The atraumatic tip **2512** is coupled to the distal end **2510** of the cannula assembly **2508**, distal of the plurality of apertures **2516**. Blood is pulled into the cannula assembly **2508** at the plurality of apertures **2516** along path **2578**. The blood passes through the cannula assembly **2508** and exits at the

plurality of blood exhaust outlets **2524** proximal to the motor housing **2502** via path **2580**.

[0086] The heart pump assembly **2500** may be introduced percutaneously during a cardiac procedure through the vascular system. Specifically, the heart pump assembly **2500** can be inserted percutaneously via a catheterization procedure through the femoral artery, into the ascending aorta **2568**, across the aortic valve **2570** and into the left ventricle **2572**. The heart pump assembly **2500** can be positioned in a heart **2503** of a patient such that the heart pump assembly is inserted over the aortic arch **2577**. The plurality of blood exhaust outlets **2524** may be positioned in the aorta **2568** above the aortic valve **2570**. The cannula assembly **2508** is positioned across the aortic valve **2570** such that the plurality of apertures **2516** through which blood enters is placed in the left ventricle **2572** of the heart **2503**. The atraumatic tip **2512** spaces the cannula assembly **2508** from the walls of the heart **2503** and prevents the plurality of apertures **2516** from suctioning to the walls of the heart **2503**.

[0087] In some instances, however, the positioning of the heart pump assembly **2500** places the plurality of apertures **2516** near the mitral valve leaflets **2574** at the entrance to the left atrium **2576**. This may be due to the individual anatomy of the particular heart **2503**. The mitral valve leaflets **2574** may be sucked by the suction of the pump towards the plurality of apertures **2516** and may become suctioned to some of the plurality of apertures **2516**, blocking the inflow of blood through the plurality of apertures **2516**. In some instances, in particular in pumps with large inlets, for example heart pump assembly **100** in FIG. 1, the mitral valve leaflets **2574** can be sucked through one of the plurality of apertures **2516** into the cannula assembly **2508** where the mitral valve leaflet **2574** blocks blood flow through the cannula. A plurality of apertures **2516** of a smaller size prevents the suctioning of the mitral valve leaflets to the plurality of apertures **2516**. Furthermore, the plurality of apertures **2516** allows blood flow through the cannula assembly **2508** to be maintained despite suction of the mitral valve leaflet **2574** or other tissue or debris to some of the plurality of apertures **2516**. In another embodiment (not shown) the heart pump assembly may be designed to support a patient's right heart. In certain aspects, the device may be inserted percutaneously through the femoral vein, into the right atrium or inserted via other techniques. With the device so positioned, the cannula of the assembly may extend across the tricuspid and pulmonic valves, and into the pulmonary artery. In this case, the plurality of apertures can be located on the inlet of the pump which is positioned in the inferior vena cava (IVC). As will be appreciated, such a device can include any of the configurations of apertures described above. The device may or may not include an atraumatic tip or projection.

[0088] FIG. 26 is a flow chart of a method for manufacturing a heart pump (e.g., heart pump assembly **200** of FIG. 2, heart pump assembly **400** of FIG. 4, heart pump assembly **2500** of FIG. 25, or any other suitable heart pump) having a plurality of apertures at a distal end portion, according to certain implementations. The method **2600** may be implemented to form a heart pump having any number of apertures at the distal end portion, disposed in any number of rings. The method **2600** may be implemented for manufacture of a heart pump assembly having apertures of any size or shape with straight, chamfered or rounded edges. In step **2602** an impeller blade is coupled to a rotor of a motor. The

impeller blade may have any suitable number of blades and may be rotated by a drive shaft connected to a motor. In some implementations, the motor is configured to be external to a patient during operation of the pump. In some implementations, the motor is integrated with the motor housing. In step **2604**, the impeller blade is inserted into a motor housing. In step **2606**, a cannula is coupled to the motor housing. The cannula may be attached to a distal end of the motor housing. In some implementations, the cannula is expandable. In some implementations, the cannula is self-expandable. In some implementations, the cannula may be comprised of a mesh, such as a nitinol mesh, covered by an elastic covering. In some implementations, the cannula may be comprised of a solid wire such as nitinol wire with a polymer cover or fabric.

[0089] In step **2608**, the cannula is coupled to an inflow cage which comprises a plurality of apertures. In some implementations, the inflow cage is comprised of stainless steel. The plurality of apertures may be of any number, shape, or size which is suitable for the passage of blood through the apertures in the inflow cage and into the cannula. The plurality of apertures is radially oriented about a circumference of the inflow cage. The plurality of apertures is arranged into at least a first ring of apertures and a second ring of apertures proximal of the first ring of apertures. The number of apertures in a ring is 3, 4, 5, 6, 7, 8, 9, 10 or any other suitable number of apertures. In some implementations, the number of apertures in the first ring is the same as the number of apertures in the second ring. The first ring of apertures extends to an end of the distal end portion of the inflow cage. In some implementations, the plurality of apertures additionally has more rings, including a third ring proximal of the second ring and a fourth ring proximal of the third ring. Each of the plurality of apertures may have an outer edge which in some implementations is formed or altered by a tumbling process.

[0090] The plurality of apertures may have a size, shape, number, or positioning which helps to prevent the suction of heart tissues including valve leaflets onto or into the plurality of apertures which blocks the inflow of blood to the pump, limiting efficiency of the heart pump. For example, in some implementations, the height of the first apertures is less than 9 mm. In some implementations, the height of the aperture of the first ring is 0.5 mm, 1 mm, 3 mm, 5 mm, 6 mm, 9 mm, 10 mm, 12 mm, 15 mm or any other suitable height. In some implementations, the height of the second aperture is less than 3 mm. In some implementations, the height of the aperture of the second ring is 0.25 mm, 0.5 mm, 1 mm, 1.5 mm, 2 mm, 2.5 mm, 3 mm, 3.5 mm, 4 mm, 5 mm, 6 mm, or any other suitable height. In some implementations, a width of the second aperture is less than 4 mm. In some implementations, the width of the apertures of the second ring is 0.5 mm, 1 mm, 1.5 mm, 2 mm, 2.5 mm, 3 mm, 3.5 mm, 4 mm, 5 mm, 6 mm, 8 mm, or any other suitable width. In some implementations, a height and width of an aperture in the third ring is the same as the height and width of an aperture in the second ring.

[0091] The area of each aperture may vary. In some implementations, the area of an aperture in the first ring is greater than the area of apertures in other rings. In some implementations, the area of the first aperture is less than 20 mm². In some implementations, the area of the aperture of the first ring is 0.5 mm², 1 mm², 5 mm², 10 mm², 15 mm², 18 mm², 20 mm², 23 mm², 25 mm² or any other suitable

area. The area of aperture of the second ring may be less than 12 mm². In some implementations, the area of the apertures of the second ring may be 0.25 mm², 0.5 mm², 1 mm², 2 mm², 5 mm², 10 mm², 12 mm², or any other suitable area.

[0092] The apertures may have inner edges which are straight, rounded or chamfered. In some implementations, the apertures have at least one chamfered edge. The chamfer may be at an angle of 45 degrees or less relative to a line normal to the surface of the inflow cage. In some implementations, the chamfered inner edge includes a chamfer of 10. degree., 20. degree., 30. degree., 40. degree., 50. degree., >50. degree., or any other suitable angle. The use of a chamfered inner edge can reduce hemolysis of the blood as it enters the inflow cage. In some implementations, the apertures have at least one rounded edge. In some implementations, the rounded inner edge includes a radius ranging from 40 microns to 105 microns.

[0093] In some implementations, the plurality of apertures is formed in a distal end portion of the cannula. In some implementations, the distal end portion of the cannula is comprised of stainless steel. The plurality of apertures formed in the cannula may be of any number, shape, or size which is suitable for the passage of blood through the apertures and into the cannula. The plurality of apertures may be radially oriented about a circumference of the cannula. The plurality of apertures is arranged into at least a first ring of apertures and a second ring of apertures proximal of the first ring of apertures. The number of apertures in a ring is 3, 4, 5, 6, 7, 8, 9, 10 or any other suitable number of apertures. In some implementations, the number of apertures in the first ring is the same as the number of apertures in the second ring. The first ring of apertures extends to an end of the distal end portion of the cannula. In some implementations, the plurality of apertures additionally has more rings, including a third ring proximal of the second ring and a fourth ring proximal of the third ring. Each of the plurality of apertures may have an outer edge which in some implementations is formed or altered by a tumbling process.

[0094] In step 2610, a distal projection is coupled to the distal end of the inflow cage. The distal projection or atraumatic tip is distal to the plurality of apertures. A base of the distal projection may form a distal edge of the plurality of apertures in the first ring of apertures. In some implementations, this step is optional and no distal projection is attached to the heart pump. In some implementations, the distal projection is configured as a pigtail. In some implementations, the distal projection is configured as a flexible projection or extension. The distal projection is an atraumatic tip configured to space the plurality of apertures on the inflow cage away from a wall of the heart. In some implementations, the distal projection includes a lumen through which a guidewire may be inserted. The distal projection provides mechanical lengthening of the cannula in order to prevent suction at the plurality of apertures to the tissues of the heart.

[0095] FIG. 27 shows a flow chart of a method for use of a heart pump (e.g., heart pump assembly 200 of FIG. 2, heart pump assembly 400 of FIG. 4, heart pump assembly 2500 of FIG. 25, or any other suitable heart pump) having a plurality of apertures at a distal end portion. The method 2700 may be implemented to form a heart pump having any number of apertures at the distal end portion, disposed in any number of rows. The method 2700 may be implemented for use of

a heart pump assembly having apertures of any size or shape with straight, chamfered or rounded edges. In step 2702, an impeller is rotated about a rotation axis using a pump motor to draw blood into a cannula of a heart pump assembly at a plurality of blood inlet apertures. The motor may be external to a patient and connected to the impeller by a drive shaft. Alternatively, the motor may be integrated into the pump and used internally. The blood inlet apertures may have any size, shape or number. The blood inlet apertures are radially oriented about a circumference of the cannula and are arranged in at least two rings at a distal end portion of the cannula. The size, shape, number, and position of the blood inlet apertures can be configured to decrease the occurrence of suctioning of heart tissues, valve leaflets and other debris to block the inlet apertures.

[0096] In step 2704, the blood is expelled from the heart pump assembly at a plurality of blood exhaust apertures disposed at a proximal end portion of the cannula proximal to the motor housing. The blood may be sucked into the cannula at the blood inlet apertures in the left ventricle and may be expelled from the blood exhaust apertures into the aorta above the aortic valve. The plurality of small inflow apertures prevents or reduces the tendency of the aperture to suck against heart structures or valve leaflets. The small apertures prevent the pump from sucking a leaflet into the inlet, allowing the pump to provide more assistance to the heart and decreasing potential damage to heart structures which may be suctioned to the pump.

[0097] The foregoing is merely illustrative of the principles of the disclosure, and the apparatuses can be practiced by other than the described embodiments, which are presented for purposes of illustration and not of limitation. It is to be understood that the apparatuses disclosed herein, while shown for use in percutaneous heart pumps, may be applied to apparatuses in other applications requiring a clear aperture for inflow.

[0098] Variations and modifications will occur to those of skill in the art after reviewing this disclosure. The disclosed features may be implemented, in any combination and subcombination (including multiple dependent combinations and subcombinations), with one or more other features described herein. The various features described or illustrated above, including any components thereof, may be combined or integrated in other systems. Moreover, certain features may be omitted or not implemented.

[0099] Examples of changes, substitutions, and alterations are ascertainable by one skilled in the art and could be made without departing from the scope of the information disclosed herein. All references cited herein are incorporated by reference in their entirety and made part of this application.

1.-40. (canceled)

41. A heart pump assembly comprising:

a rotor;

a motor coupled to the rotor;

an impeller blade coupled to the rotor such that rotation of the rotor causes the impeller blade to rotate and pump blood;

a catheter; and

a cannula assembly comprising a cannula body and a blood inlet including a plurality of apertures radially oriented and disposed about a constant circumference exterior portion of the blood inlet,

wherein the plurality of apertures include at least a first row of apertures spaced apart linearly about the con-

stant circumference exterior portion of the blood inlet and a second row of apertures spaced laterally from the first row of apertures on the constant circumference exterior portion of the blood inlet, wherein the second row of apertures are proximal of the first row of apertures such that the second row of apertures are closer to the catheter than the first row of apertures, and wherein apertures in the first row of apertures are oblong in shape and are rotationally offset from apertures in the second row of apertures, which are circular in shape.

42. The heart pump assembly of claim 41, wherein a first aperture in the first row of apertures and a second aperture in the second row of apertures are not aligned along an axis on a surface of the cannula body parallel to a longitudinal axis of the cannula body.

43. The heart pump assembly of claim 41, wherein the apertures in the first row of apertures are rounded on a proximal edge and have a distal edge defined by a tear drop portion of the cannula assembly, wherein the proximal edge is closer to the catheter than the distal edge.

44. The heart pump assembly of claim 41, wherein the plurality of apertures further comprises a third row of apertures proximal of the second row of apertures.

45. The heart pump assembly of claim 44, wherein the apertures in the first row of apertures are rotationally aligned with apertures in the third row of apertures.

46. The heart pump assembly of claim 44, wherein a first aperture in the first row of apertures and a third aperture in the third row of apertures are aligned along an axis on a surface of the cannula body parallel to a longitudinal axis of the cannula body.

47. The heart pump assembly of claim 44, wherein apertures in the third row of apertures are circular in shape.

48. The heart pump assembly of claim 44, wherein the plurality of apertures further comprises a fourth row of apertures proximal of the third row of apertures.

49. The heart pump assembly of claim 48, wherein apertures in the fourth row of apertures are circular in shape.

50. The heart pump assembly of claim 48, wherein the apertures in the second row of apertures are rotationally aligned with apertures in the fourth row of apertures.

51. The heart pump assembly of claim 48, wherein a second aperture in the second row of apertures and a fourth aperture in the fourth row of apertures are aligned along an axis on a surface of the cannula body parallel to a longitudinal axis of the cannula body.

52. The heart pump assembly of claim 50, wherein the apertures in the second row of apertures and the apertures in the fourth row of apertures are rotationally offset from the apertures in the first row of apertures and the apertures in the third row of apertures.

53. The heart pump assembly of claim 41, wherein each of the plurality of apertures is defined by an inner edge intersecting an interior of the cannula body and an outer edge intersecting an outer surface of the cannula body.

54. The heart pump assembly of claim 41, wherein each of the plurality of apertures is defined by an inner edge intersecting an interior of the cannula body and an outer edge intersecting an outer surface of the cannula body, and wherein the outer edge of each of the plurality of apertures is chamfered.

55. The heart pump assembly of claim 41, further comprising a distal projection coupled to a distal end of the cannula assembly.

56. The heart pump assembly of claim 41, wherein the heart pump assembly is sized for percutaneous insertion.

* * * * *