



(12) **United States Patent**
Hui et al.

(10) **Patent No.:** **US 12,395,798 B2**
(45) **Date of Patent:** ***Aug. 19, 2025**

(54) **METHOD OF MAKING A PIEZOELECTRIC MEMS DIAPHRAGM MICROPHONE**

(71) Applicant: **Skyworks Global Pte. Ltd.**, Singapore (SG)

(72) Inventors: **Yu Hui**, Merced, CA (US); **Kwang Jae Shin**, Yongin (KR)

(73) Assignee: **Skyworks Global Pte. Ltd.**, Singapore (SG)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 209 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/107,735**

(22) Filed: **Feb. 9, 2023**

(65) **Prior Publication Data**

US 2023/0283962 A1 Sep. 7, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/138,320, filed on Dec. 30, 2020, now Pat. No. 11,606,646, which is a (Continued)

(51) **Int. Cl.**
H04R 17/02 (2006.01)
B81B 3/00 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04R 17/02** (2013.01); **B81B 3/0072** (2013.01); **H04R 1/04** (2013.01); **H04R 7/10** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC . H04R 17/02; H04R 1/04; H04R 7/10; H04R 19/04; H04R 2201/003;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,657,517 B2 12/2003 Barber et al.
6,857,501 B1 * 2/2005 Han H04R 17/00 29/594

(Continued)

FOREIGN PATENT DOCUMENTS

CN 109495829 3/2019
CN 110545514 12/2019

(Continued)


Primary Examiner — Oyesola C Ojo

(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson & Bear, LLP

(57) **ABSTRACT**

A piezoelectric microelectromechanical systems diaphragm microphone can be mounted on a printed circuit board. The microphone can include a substrate with an opening between a bottom end of the substrate and a top end of the substrate. The microphone can have two or more piezoelectric film layers disposed over the top end of the substrate and defining a diaphragm structure. Each of the two or more piezoelectric film layers can have a predefined residual stress that substantially cancel each other out so that the diaphragm structure is substantially flat with substantially zero residual stress. The microphone can include one or more electrodes disposed over the diaphragm structure. The diaphragm structure is configured to deflect when the diaphragm is subjected to sound pressure via the opening in the substrate.

20 Claims, 18 Drawing Sheets

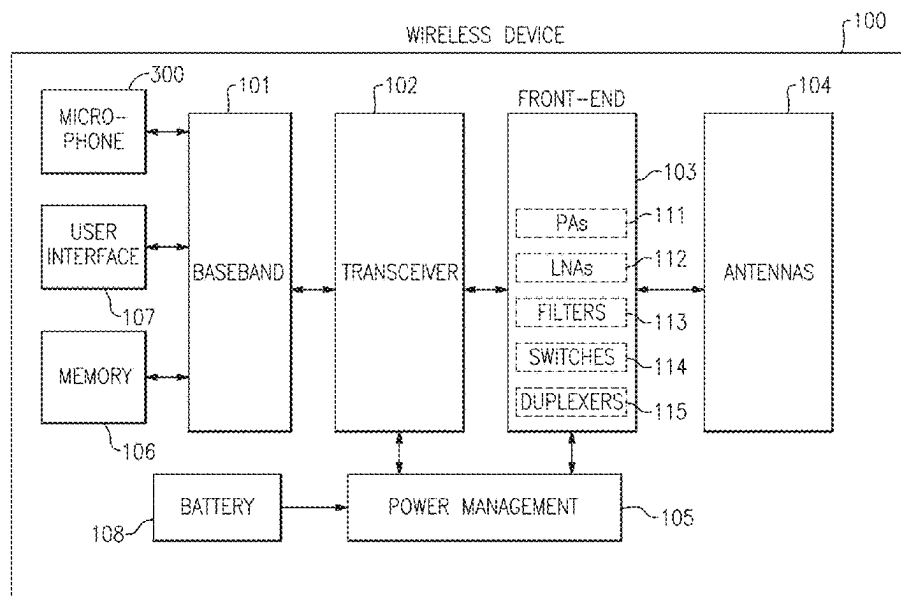

Related U.S. Application Data

- continuation of application No. 16/890,858, filed on Jun. 2, 2020, now Pat. No. 11,553,280.
- (60) Provisional application No. 62/857,701, filed on Jun. 5, 2019, provisional application No. 62/857,675, filed on Jun. 5, 2019.
- (51) **Int. Cl.**
H04R 1/04 (2006.01)
H04R 7/10 (2006.01)
H04R 19/04 (2006.01)
- (52) **U.S. Cl.**
CPC **H04R 19/04** (2013.01); *B81B 2201/0257* (2013.01); *B81B 2203/0127* (2013.01); *B81B 2203/019* (2013.01); *B81B 2203/04* (2013.01); *H04R 2201/003* (2013.01); *H04R 2420/07* (2013.01); *H04R 2499/11* (2013.01)
- (58) **Field of Classification Search**
CPC H04R 2420/07; H04R 2499/11; H04R 2430/20; B81B 3/0072; B81B 2201/0257; B81B 2203/0127; B81B 2203/019; B81B 2203/04; B81C 2201/0167
See application file for complete search history.

References Cited

U.S. PATENT DOCUMENTS

8,466,606 B2 * 6/2013 Chen H03H 9/02535
310/349

8,531,088 B2 9/2013 Grosh

8,582,788 B2 11/2013 Leidl et al.

9,029,963 B2 * 5/2015 Sparks H04R 17/02
257/416

9,055,372 B2 * 6/2015 Grosh H04R 31/003

9,386,379 B2 7/2016 Sparks

9,479,875 B2 * 10/2016 Hall H04R 17/02

9,516,421 B1 * 12/2016 Loeppert H04R 17/02

9,853,201 B2 * 12/2017 Grosh H10N 30/306

10,001,391 B1 6/2018 Littrell

10,170,685 B2 * 1/2019 Grosh H04R 17/00

10,356,531 B2 * 7/2019 Giusti H04R 19/04

10,825,982 B1 11/2020 Littrell et al.

11,099,078 B1 * 8/2021 Littrell G01K 1/14

11,553,280 B2 1/2023 Hui et al.

11,606,646 B2 3/2023 Hui et al.

2009/0116662 A1 5/2009 Wu

2014/0371631 A1 * 12/2014 Fontana H04R 1/46
600/586

2015/0255308 A1 * 9/2015 Lin C25D 9/04
438/479

2015/0266717 A1 9/2015 Okamoto et al.

2016/0258824 A1 9/2016 Fuji et al.

2018/0098139 A1 * 4/2018 Arevalo Carreno . H04R 31/006

2018/0138391 A1 5/2018 Grosh et al.

2019/0177155 A1 6/2019 Qian et al.

2020/0148532 A1 5/2020 Grosh et al.

2021/0021936 A1 1/2021 Hui et al.

2021/0120345 A1 4/2021 Hui et al.

FOREIGN PATENT DOCUMENTS

JP 2018 137297 8/2018

WO WO 2017/200219 11/2017

* cited by examiner

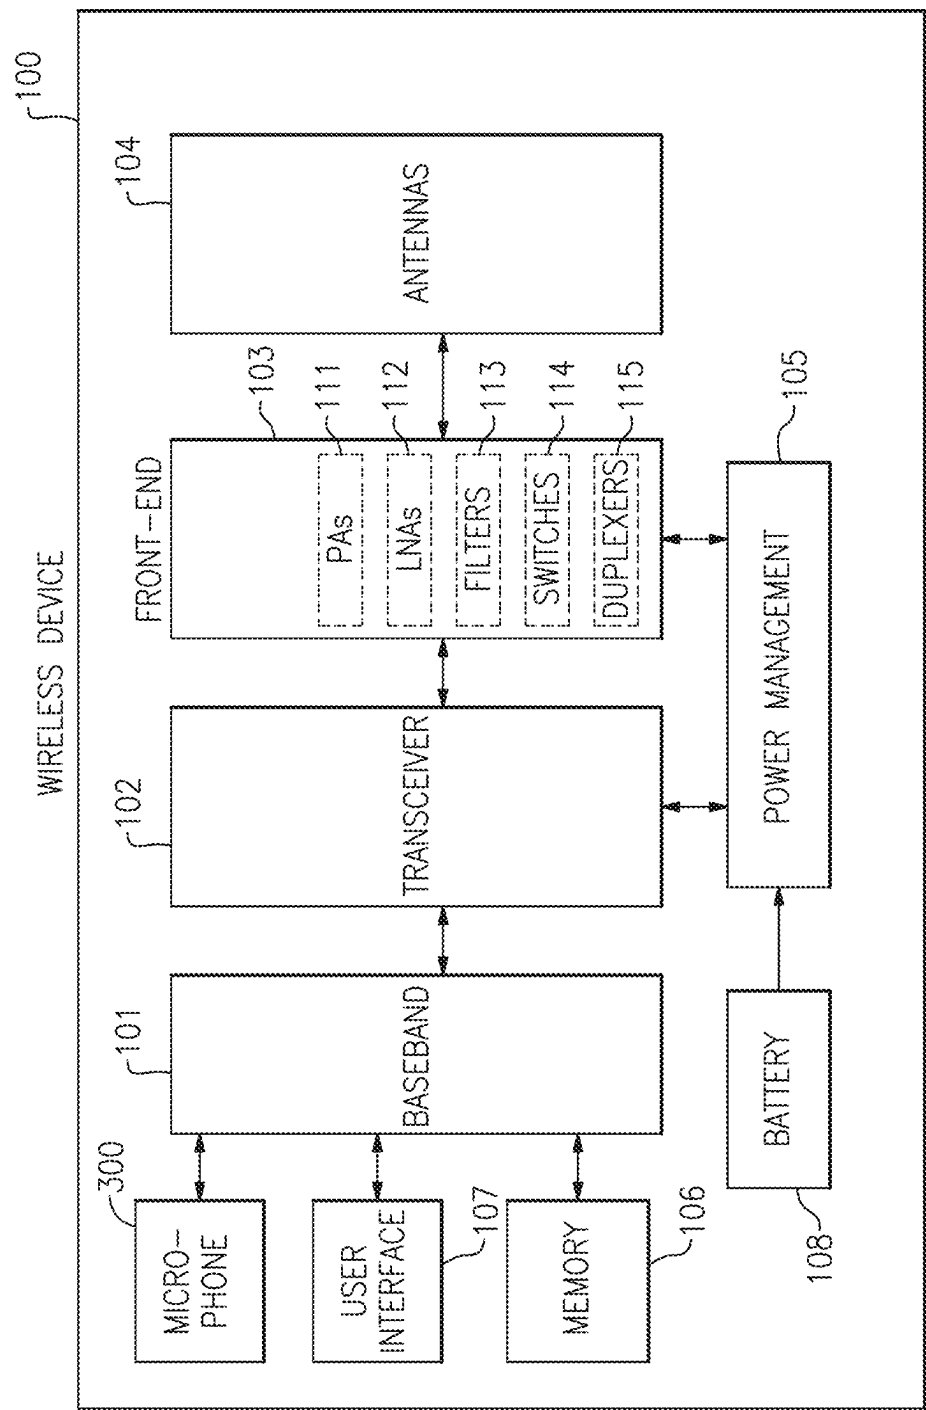


FIG.1

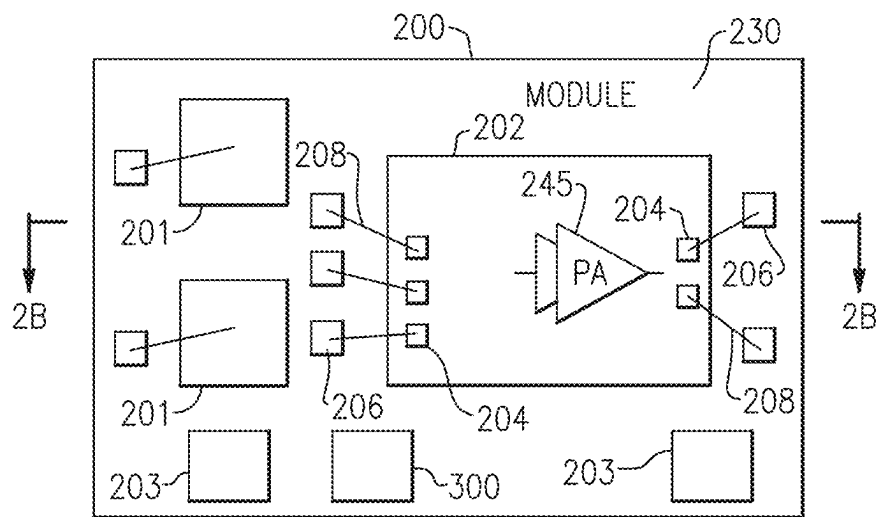


FIG. 2A

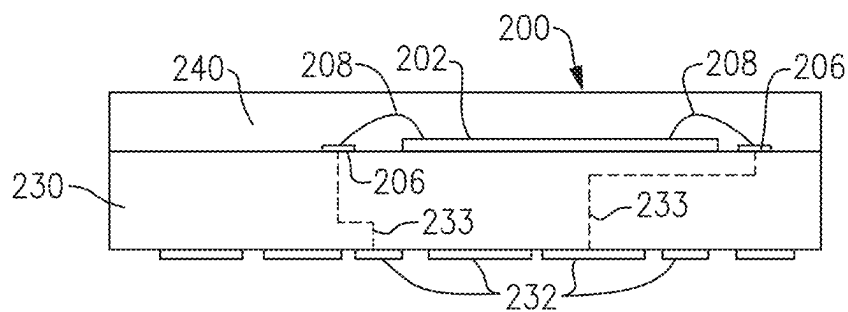


FIG. 2B

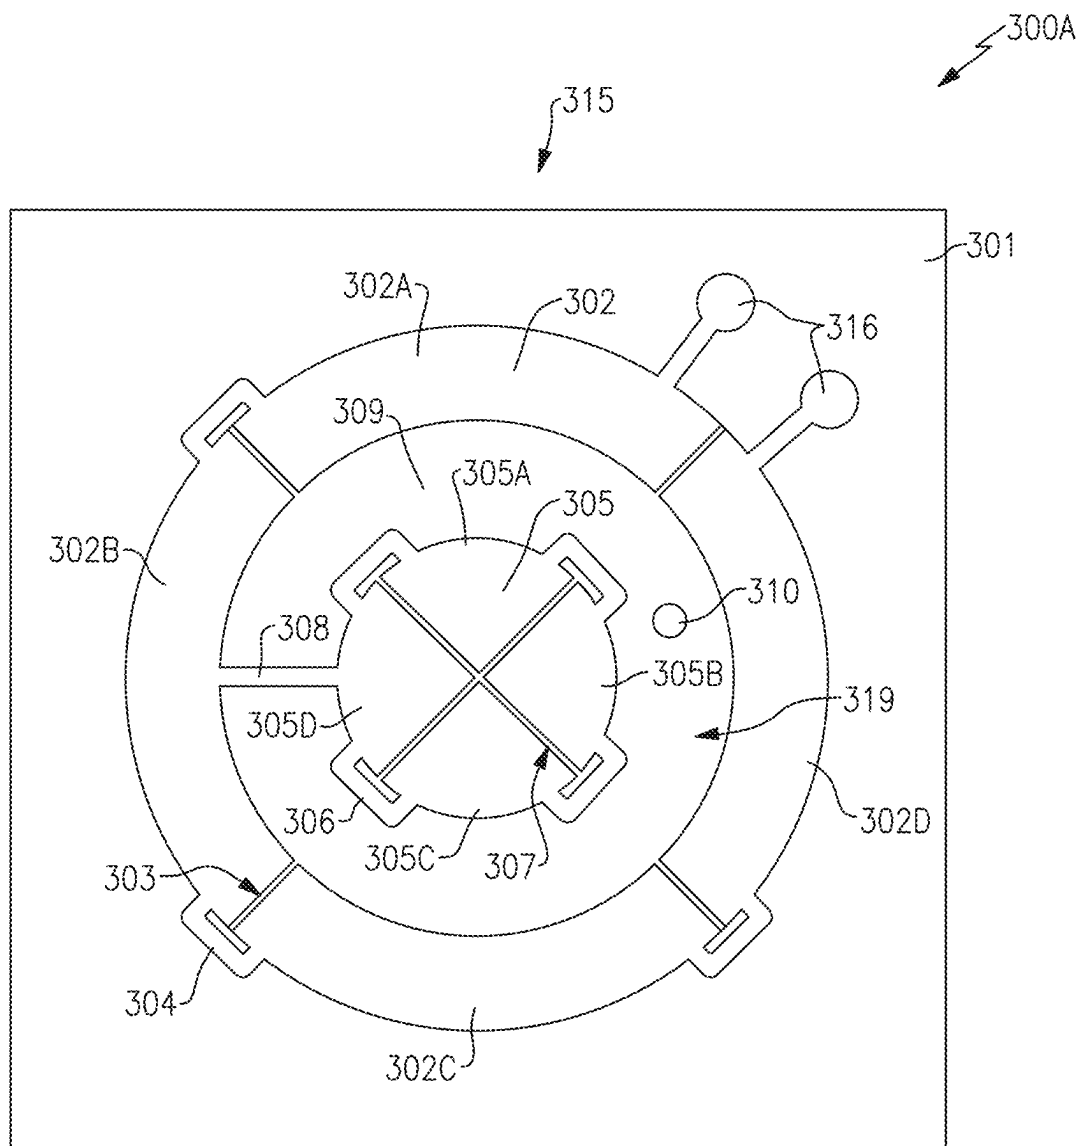


FIG. 3

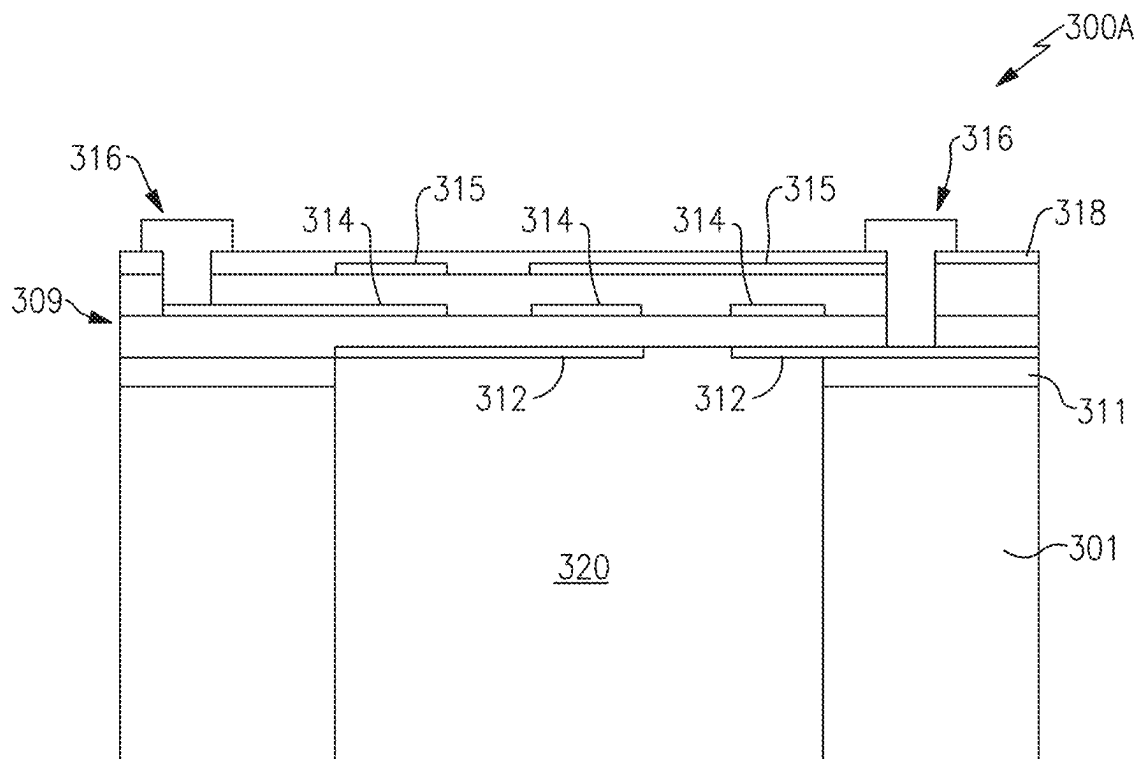


FIG. 4

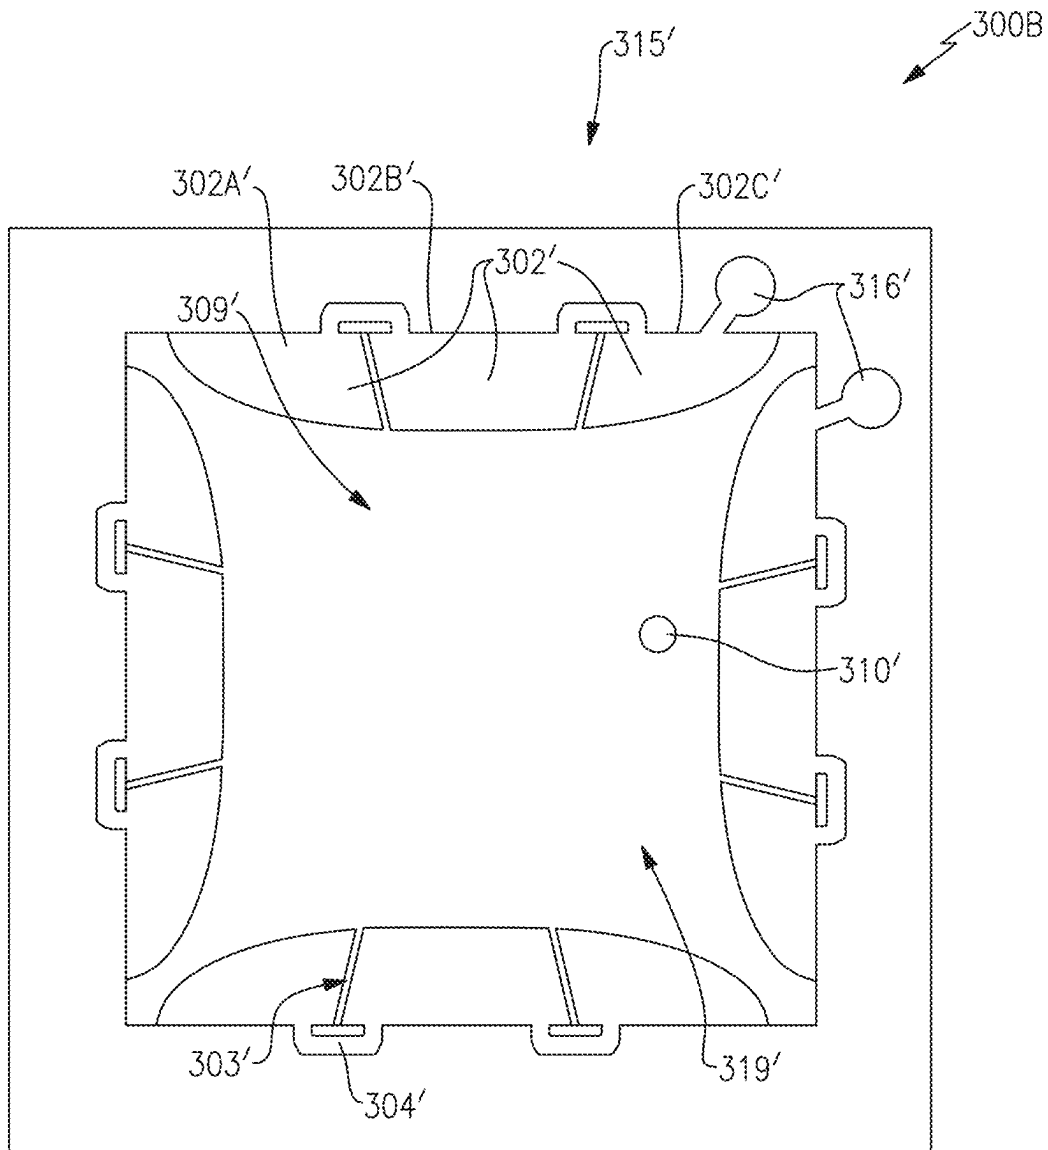


FIG. 5

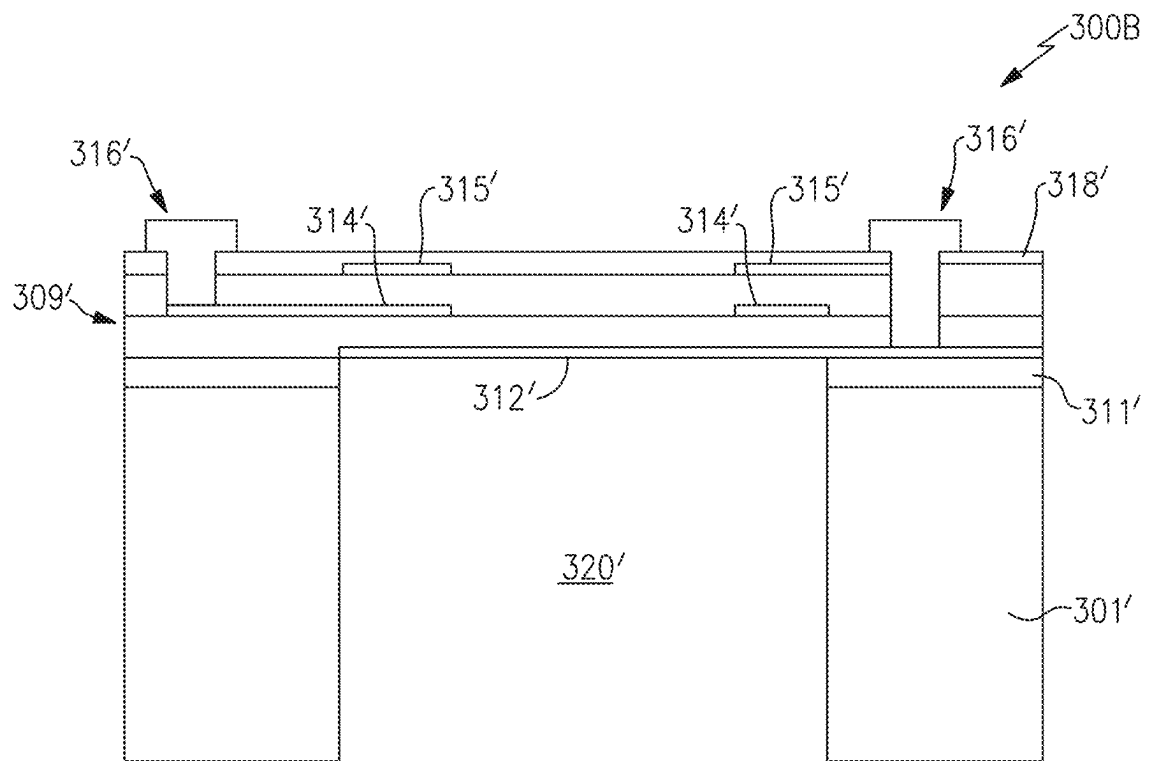


FIG.6

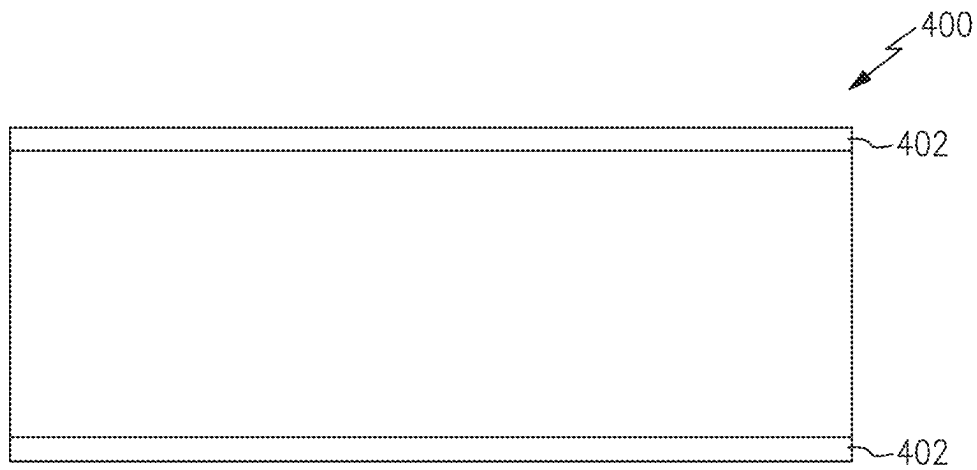


FIG. 7A

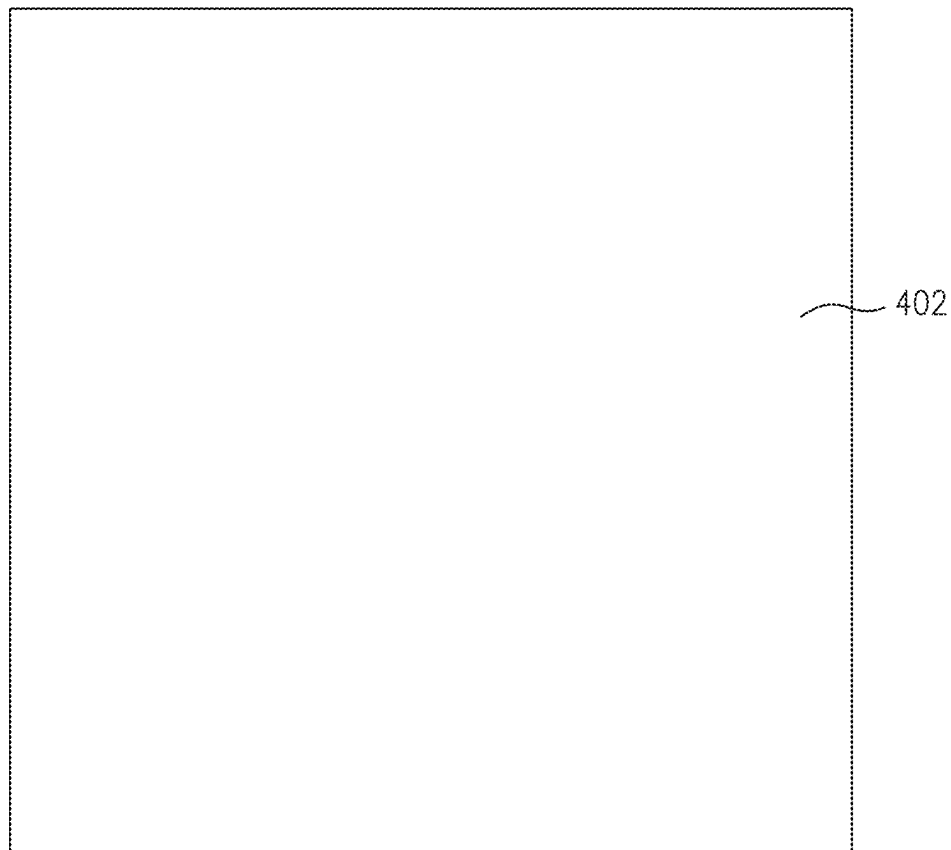


FIG. 7B

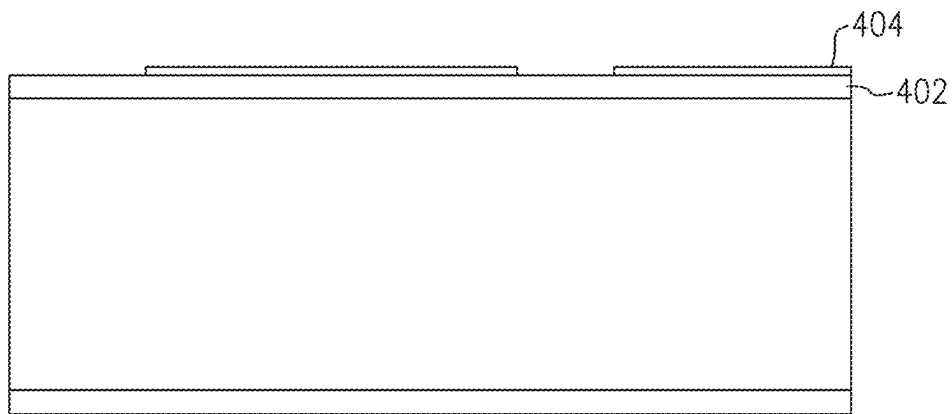


FIG. 8A

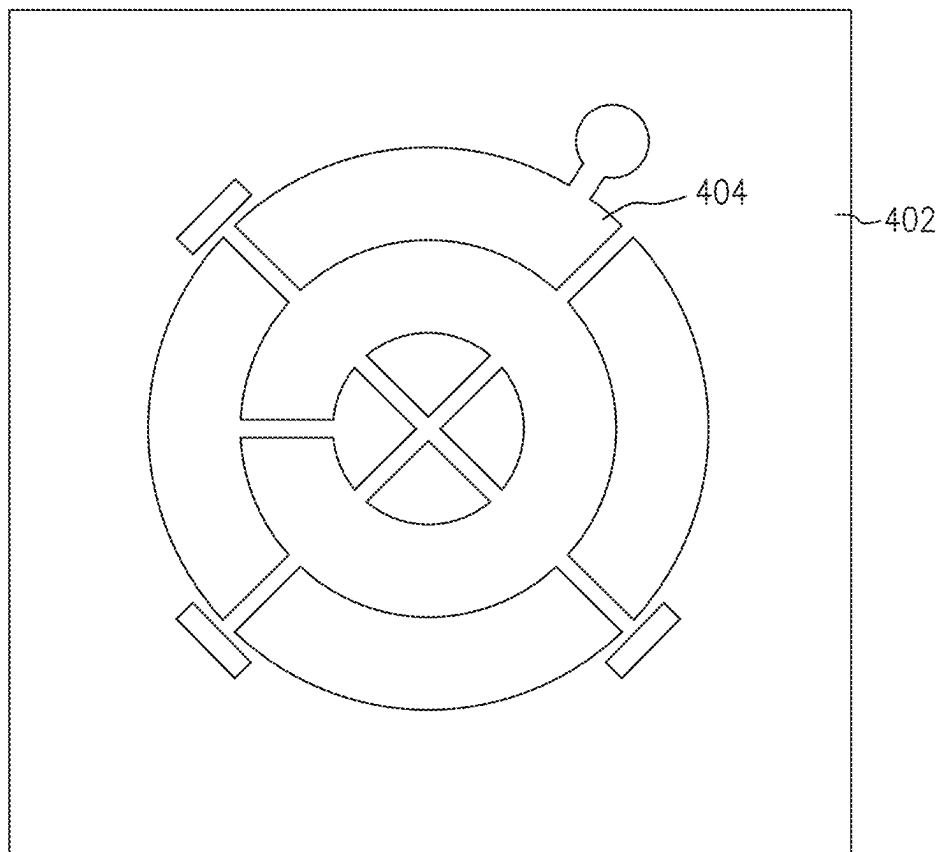


FIG. 8B

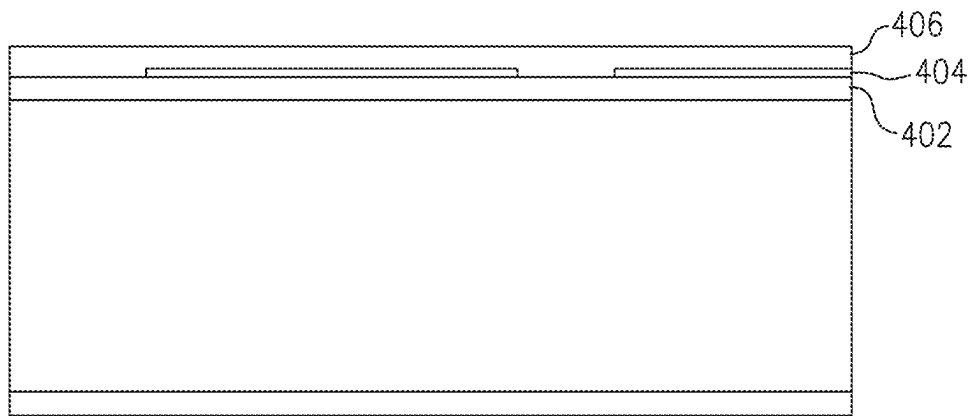


FIG. 9A

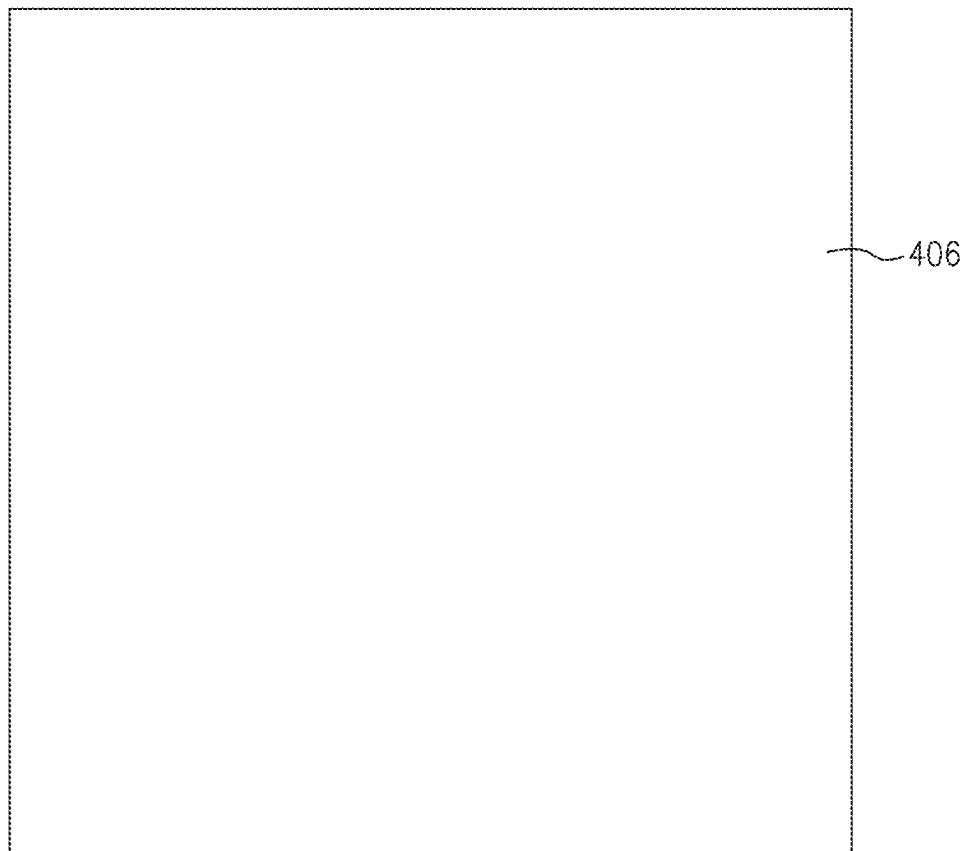


FIG. 9B

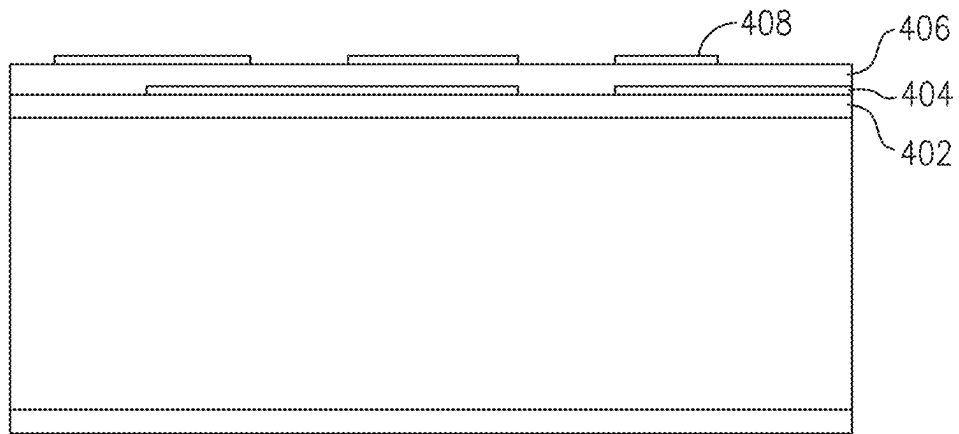


FIG. 10A

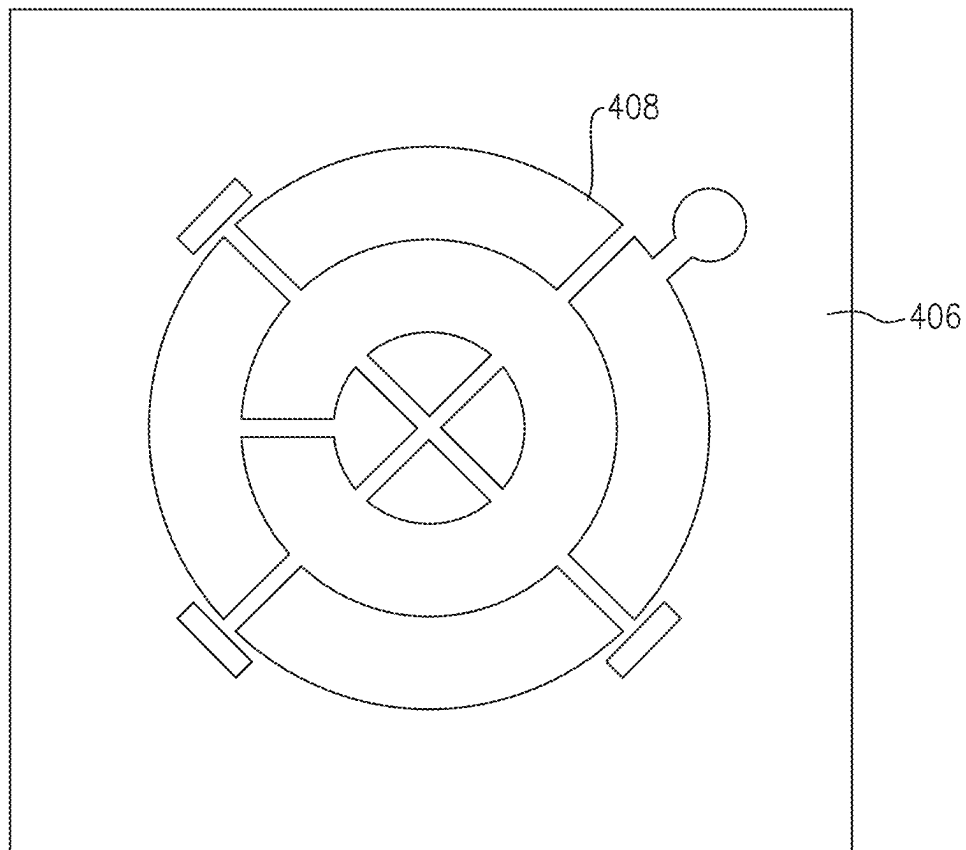


FIG. 10B

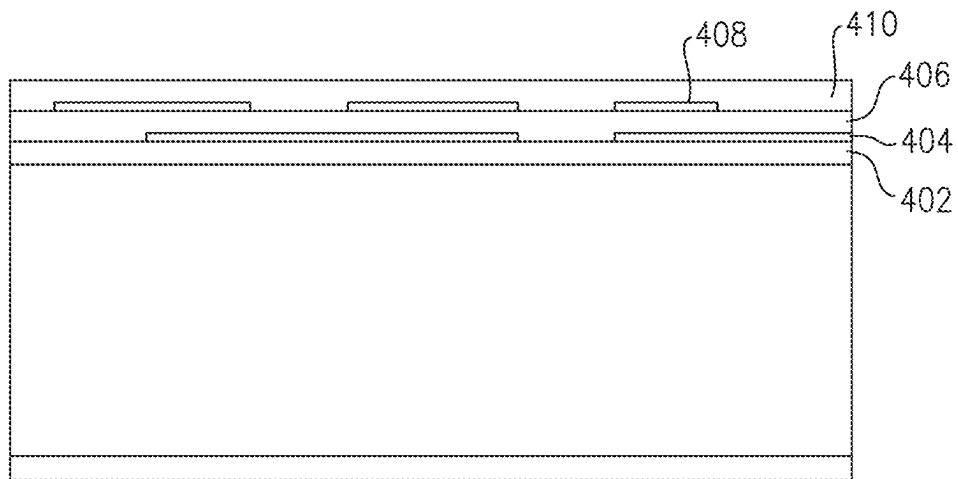


FIG. 11A

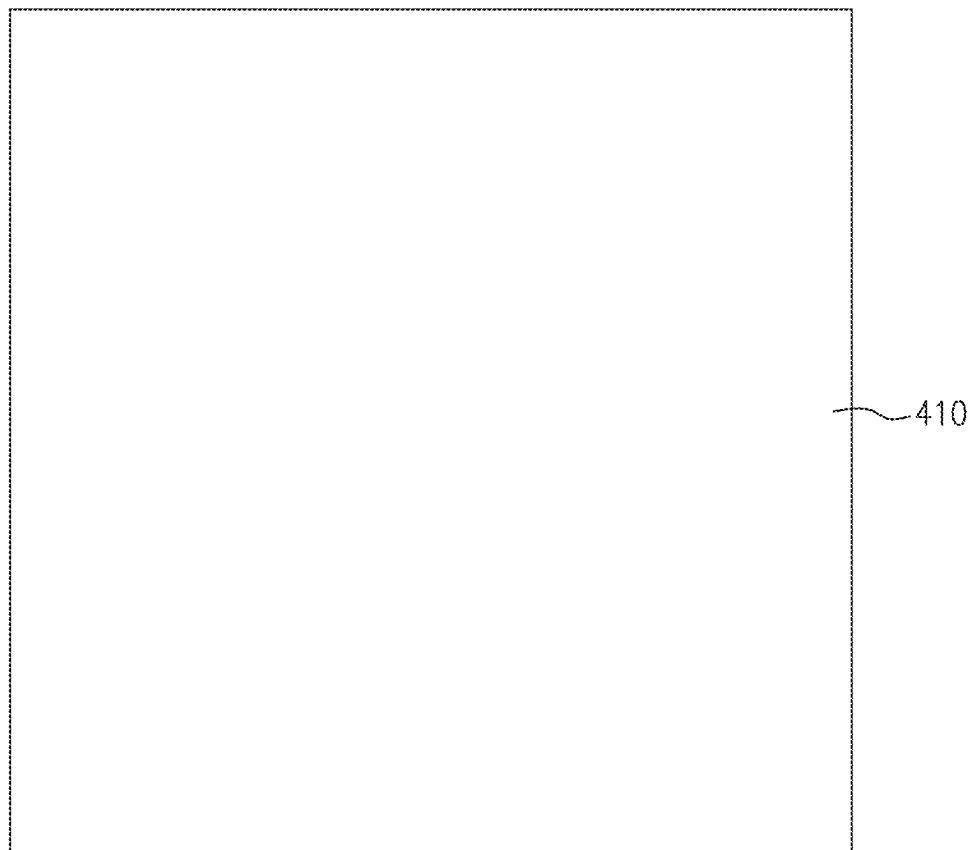


FIG. 11B

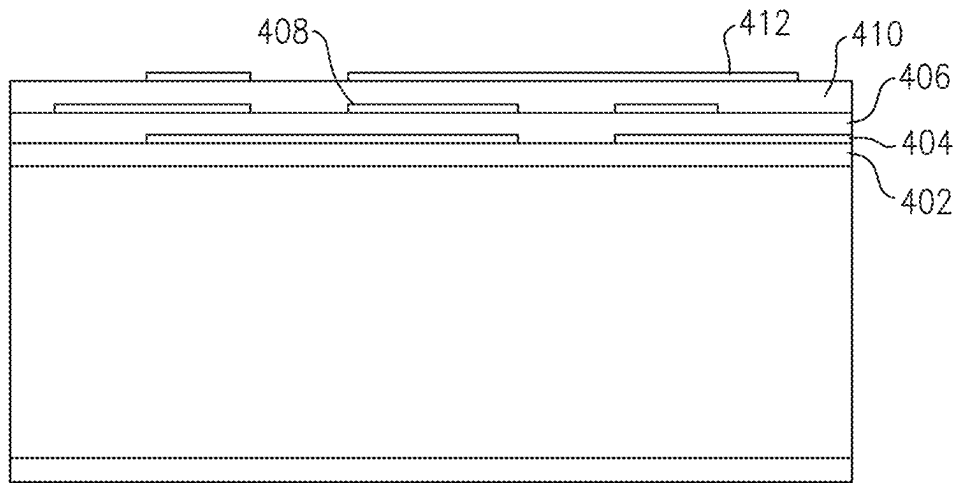


FIG. 12A

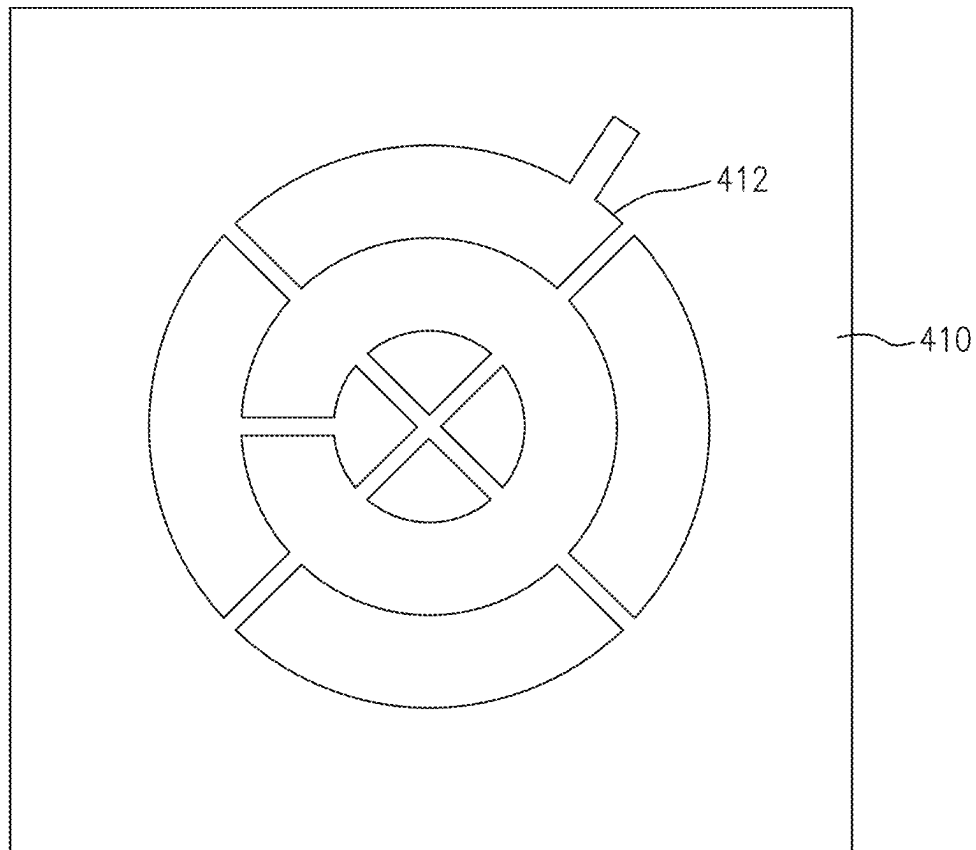


FIG. 12B

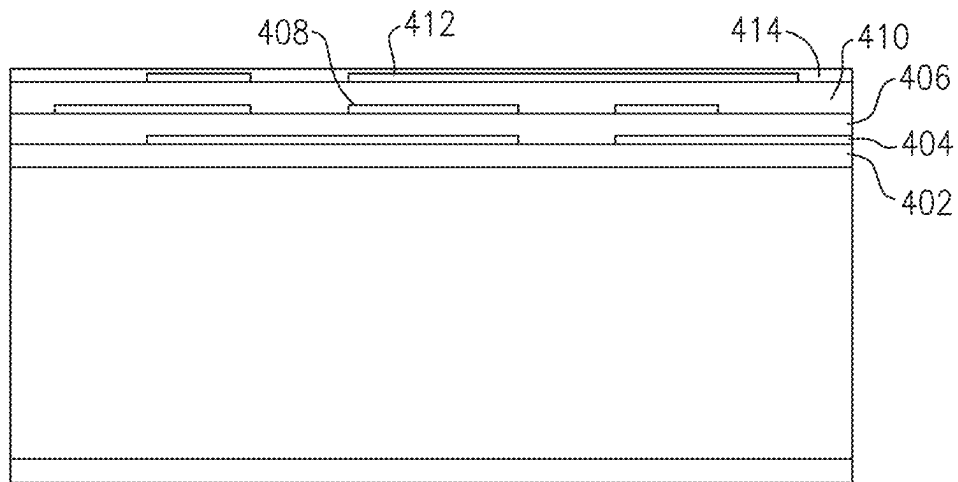


FIG. 13A

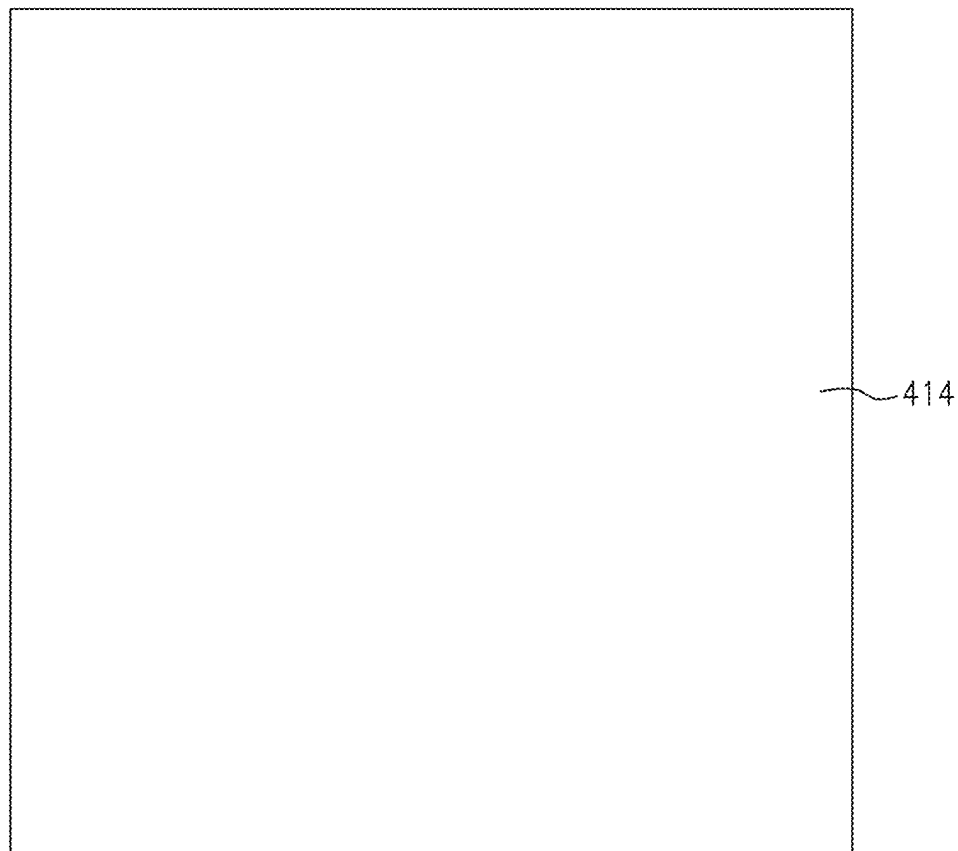


FIG. 13B

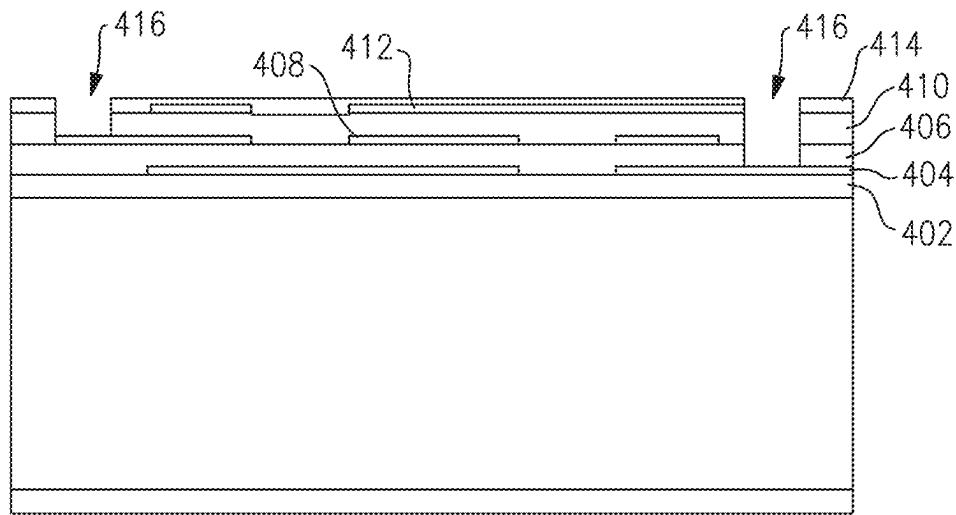


FIG. 14A

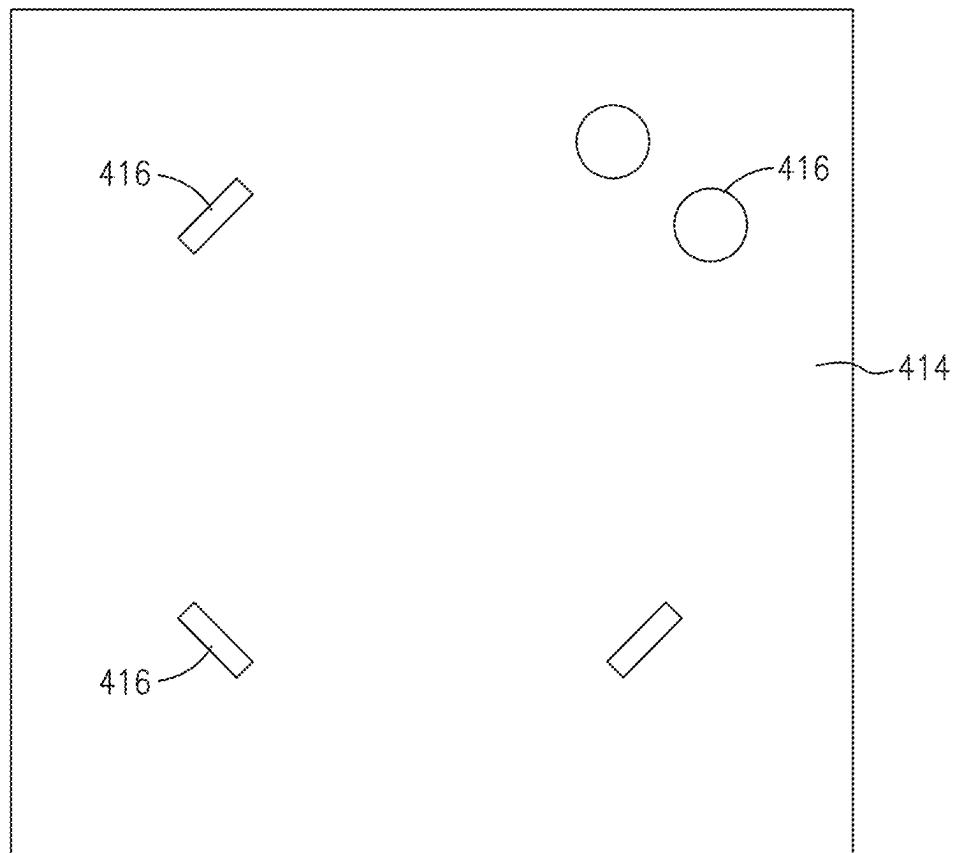


FIG. 14B

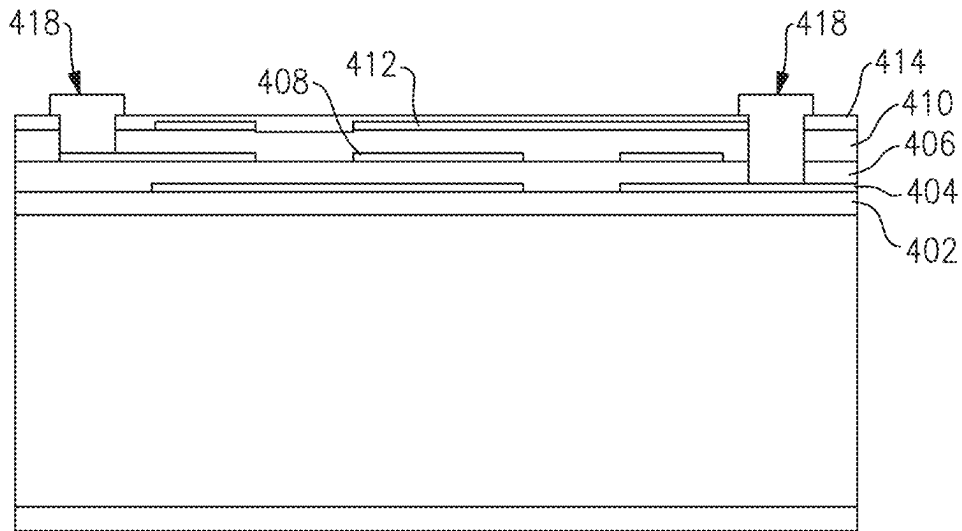


FIG. 15A

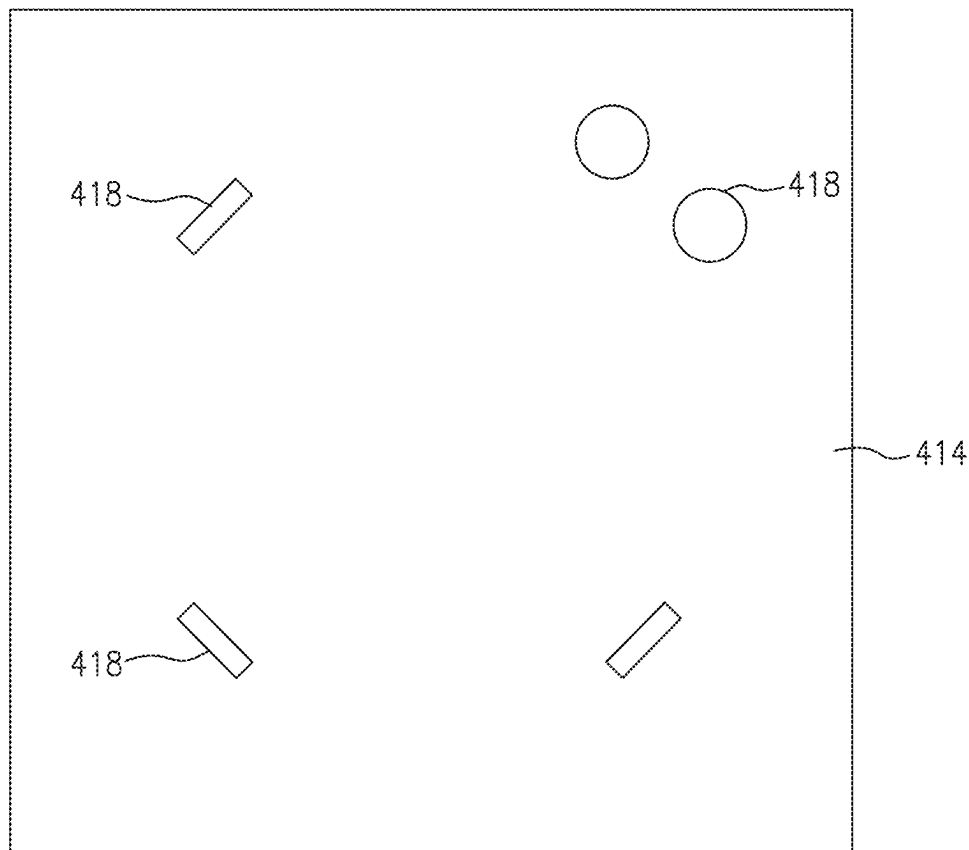


FIG. 15B

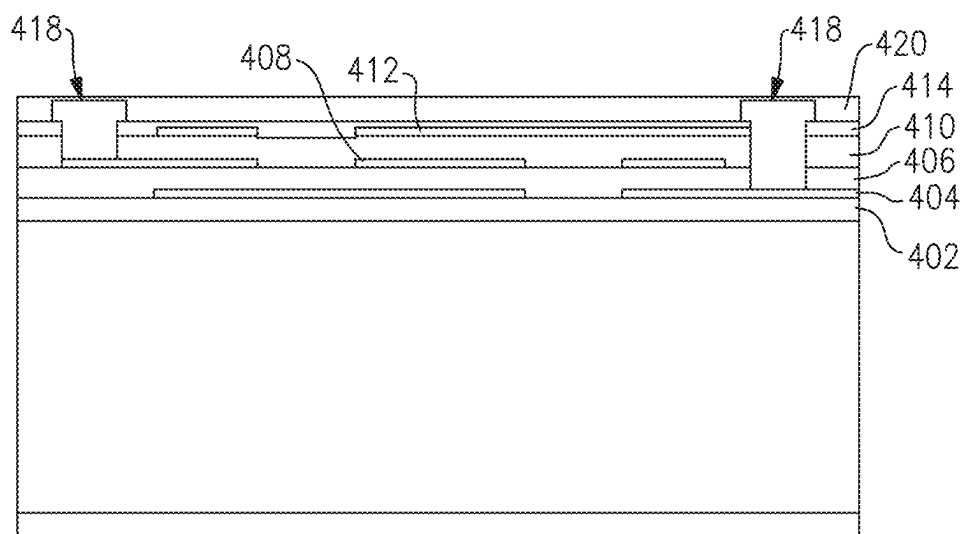


FIG.16A

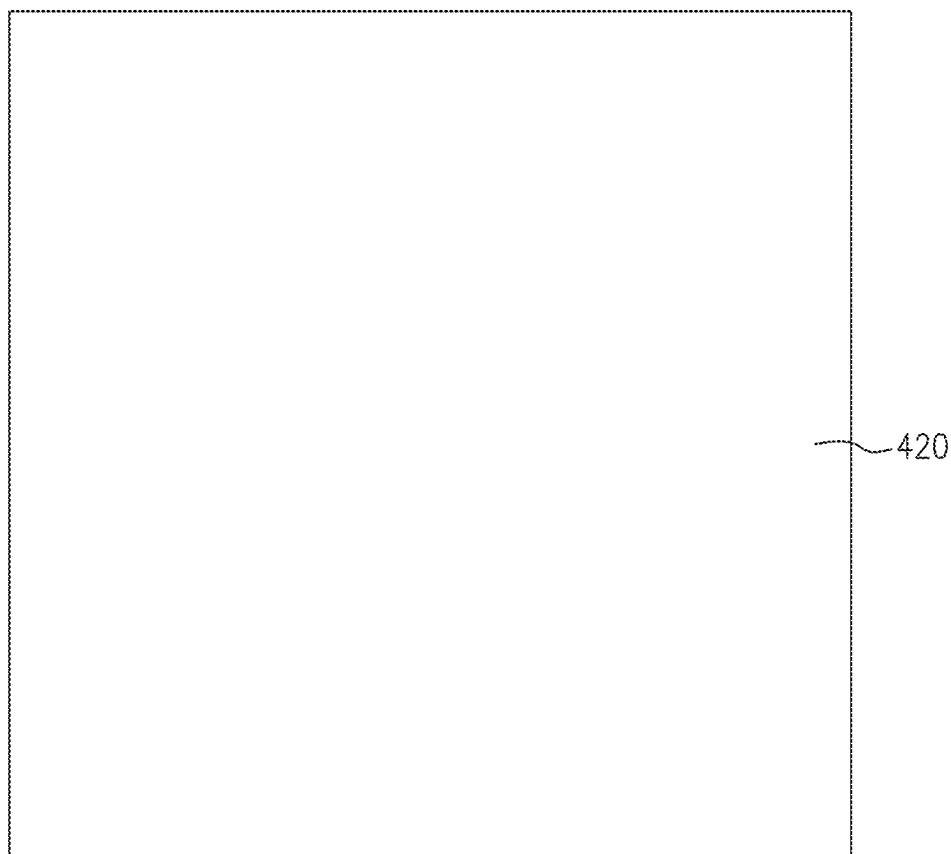
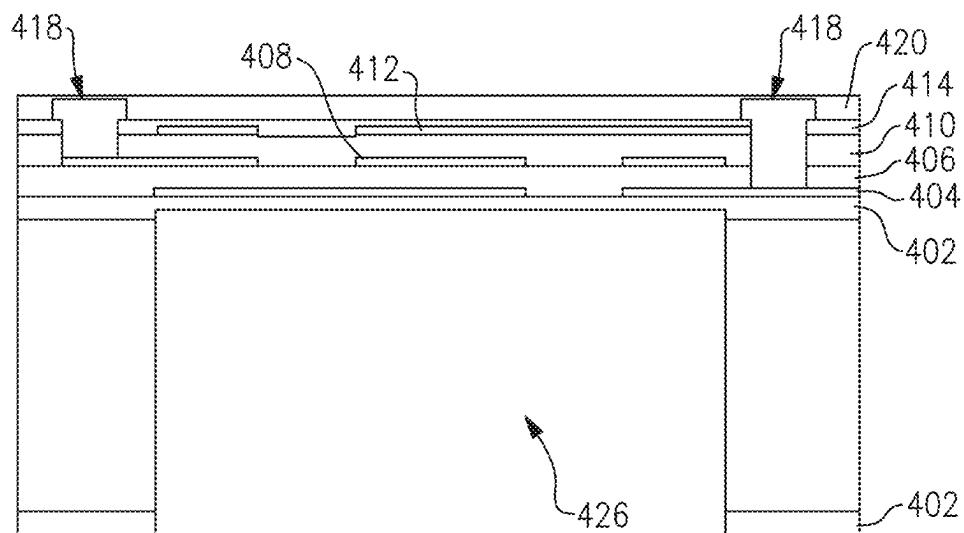
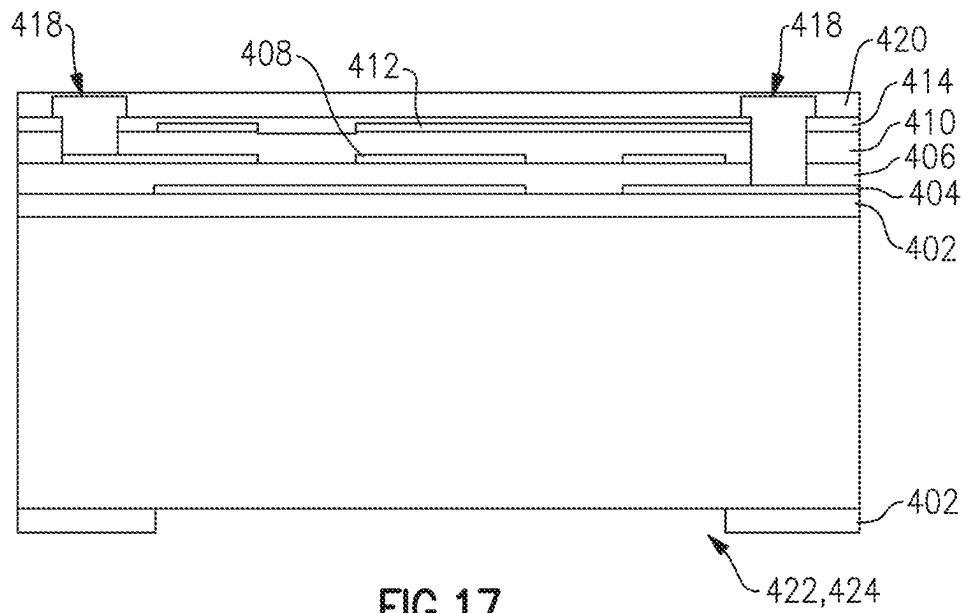


FIG.16B



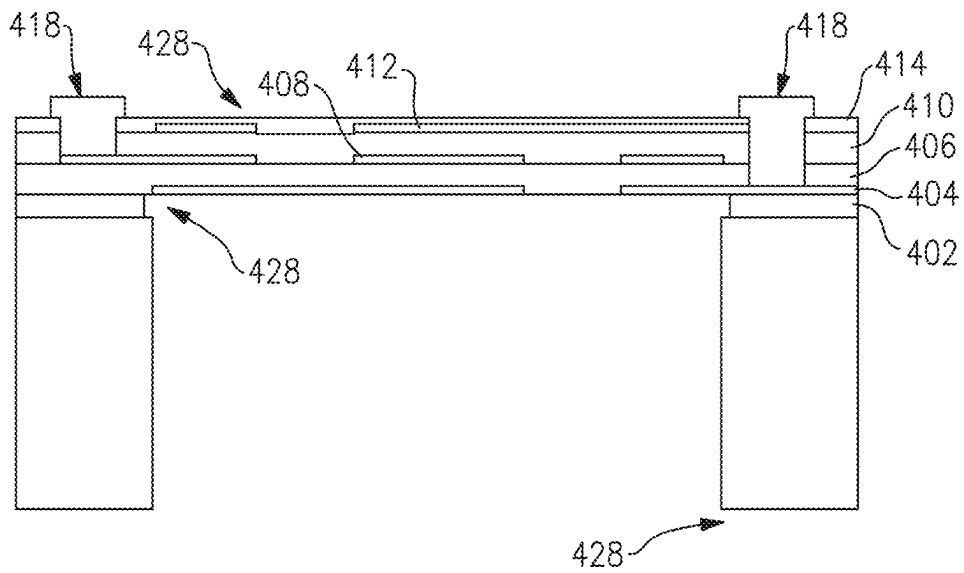


FIG. 19A

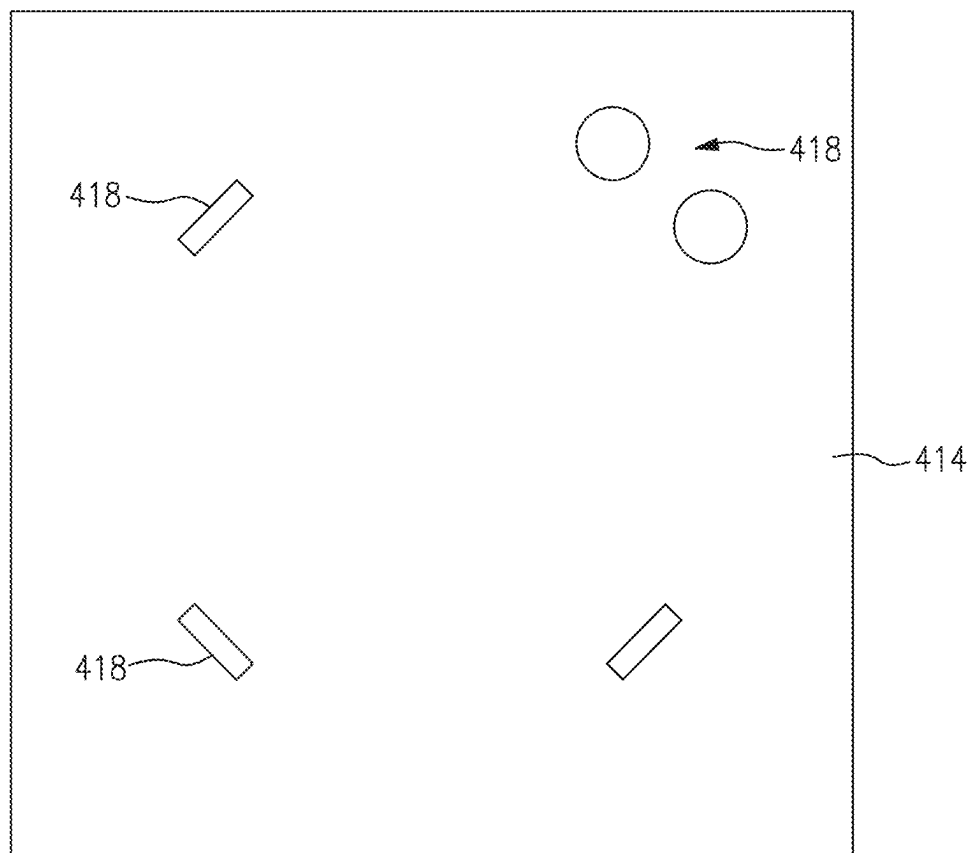


FIG. 19B

1

METHOD OF MAKING A PIEZOELECTRIC MEMS DIAPHRAGM MICROPHONE

INCORPORATION BY REFERENCE TO ANY PRIORITY APPLICATIONS

Any and all applications, if any, for which a foreign or domestic priority claim is identified in the Application Data Sheet of the present application are hereby incorporated by reference under 37 CFR 1.57.

BACKGROUND

Field

The present disclosure is directed to a piezoelectric microelectromechanical systems (MEMS) microphone, and in particular to a multi-layer piezoelectric MEMS diaphragm microphone.

Description of the Related Art

A MEMS microphone is a micro-machined electromechanical device used to convert sound pressure (e.g., voice sound) to an electrical signal (e.g., voltage). MEMS microphones are widely used in mobile devices, headsets, smart speakers and other voice-interface devices or systems. Conventional capacitive MEMS microphones suffer from high power consumption (e.g., large bias voltage) and reliability, for example when used in a harsh environment (e.g., when exposed to dust and/or water).

Piezoelectric MEMS microphones have been used to address the deficiencies of capacitive MEMS microphones. Piezoelectric MEMS microphones offer a constant listening capability while consuming almost no power (e.g., no bias voltage is needed), are robust and immune to water and dust contamination. Existing piezoelectric MEMS microphones are based on either a cantilever MEMS structure or a diaphragm MEMS structure.

The cantilever MEMS structure suffers from poor low-frequency roll-off control as the gap between cantilevers varies when cantilevers deflect due to residual stress. Additionally, the cantilever MEMS structure with gap control mechanism can have a complex structure that results in higher manufacturing costs and poor reliability performance. The diaphragm MEMS structure provides better low-frequency roll-off control and higher sensitivity than the cantilever MEMS structure, but suffers from sensitivity variation as residual stress causes large tensile or compression stresses within the diaphragm (e.g., a small residual stress results in a large sensitivity degradation for diaphragm type piezoelectric MEMS microphone).

SUMMARY OF CERTAIN INVENTIVE ASPECTS

Accordingly, there is a need for an improved piezoelectric MEMS microphone that does not suffer the deficiencies in existing MEMS cantilever and diaphragm structures.

In accordance with one aspect of the disclosure, a multi-piezoelectric-layer MEMS diaphragm microphone is provided that substantially cancels the overall residual stress in the diaphragm. The multi-piezoelectric-layer MEMS diaphragm microphone advantageously provides higher sensitivity (e.g., how much voltage is measured when diaphragm is provided to sound pressure) and better lower frequency roll-off as compared to the MEMS cantilever structure. The

2

multi-piezoelectric-layer MEMS diaphragm microphone can optionally include two or more piezoelectric films with predefined residual stress (e.g., during film deposition) that substantially balance (e.g., cancel) out residual stress in the diaphragm structure.

In accordance with one aspect of the disclosure, a piezoelectric microelectromechanical systems diaphragm microphone is provided. The microphone can include a substrate defining an opening between a bottom end of the substrate and a top end of the substrate. The microphone can also include two or more piezoelectric film layers disposed over the top end of the substrate and defining a diaphragm structure. Each of the two or more piezoelectric film layers has a predefined residual stress that substantially cancel each other out so that the diaphragm structure is substantially flat with substantially zero residual stress. The microphone also comprises one or more electrodes disposed over the diaphragm structure. The diaphragm structure is configured to deflect when the diaphragm is subjected to sound pressure via the opening in the substrate.

In an embodiment, the diaphragm structure has a circular shape. The one or more electrodes that are disposed over the diaphragm structure can include a circumferential electrode that is disposed over a circumference of the diaphragm structure and a center electrode that is disposed generally over a center of the diaphragm structure. At least a portion of the center electrode can be spaced apart from the circumferential electrode.

In an embodiment, the diaphragm structure has a rectangular shape. The one or more electrodes that is disposed over the diaphragm structure can include a plurality of side electrodes that are disposed adjacent corresponding side edges of the diaphragm structure. The plurality of side electrodes can be spaced apart from each other and disposed around an area of the diaphragm structure that extends between the plurality of side electrodes.

In an embodiment, each of the one or more electrodes is divided into two or more electrode portions by one or more gaps between the electrode portions to provide a microphone with a desired sensitivity and capacitance. Each pair of the two or more electrode portions can be connected in series by a connection via.

In an embodiment, the microphone further includes a through hole in the diaphragm structure that extends from a top surface of the diaphragm structure to a bottom surface of the diaphragm structure. The through hole can be configured to define a low frequency roll off for the microphone.

In an embodiment, the microphone further includes a bottom electrode that is interposed between the substrate and two or more piezoelectric film layers, and a middle electrode that is interposed between two of the two or more piezoelectric film layers.

In accordance with another aspect of the disclosure, a radiofrequency module is provided. The radiofrequency module can include a printed circuit board including a substrate layer. The radiofrequency module can also include one or more piezoelectric microelectromechanical systems diaphragm microphones mounted on the printed circuit board. Each microphone includes a substrate defining an opening between a bottom end of the substrate and a top end of the substrate, and two or more piezoelectric film layers disposed over the top end of the substrate and defining a diaphragm structure. Each of the two or more piezoelectric film layers has a predefined residual stress that substantially cancel each other out so that the diaphragm structure is substantially flat with substantially zero residual stress. One or more electrodes are disposed over the diaphragm struc-

ture. The diaphragm structure is configured to deflect when the diaphragm is subjected to sound pressure via the opening in the substrate.

In an embodiment, the diaphragm structure has a circular shape. The one or more electrodes that are disposed over the diaphragm structure can include a circumferential electrode that is disposed over a circumference of the diaphragm structure and a center electrode that is disposed generally over a center of the diaphragm structure. At least a portion of the center electrode can be spaced apart from the circumferential electrode.

In an embodiment, the diaphragm structure has a rectangular shape. The diaphragm structure can have a square shape. The one or more electrodes that are disposed over the diaphragm structure can include a plurality of side electrodes that are disposed adjacent corresponding side edges of the diaphragm structure. The plurality of side electrodes can be spaced apart from each other and disposed around an area of the diaphragm structure that extends between the plurality of side electrodes.

In an embodiment, each of the one or more electrodes is divided into two or more electrode portions by one or more gaps between the electrode portions to provide a microphone with a desired sensitivity and capacitance. Each pair of the two or more electrode portions can be connected in series by a connection via.

In an embodiment, the radiofrequency module further includes a through hole in the diaphragm structure that extends from a top surface of the diaphragm structure to a bottom surface of the diaphragm structure. The through hole can be configured to define a low frequency roll off for the microphone.

In an embodiment, the radiofrequency module further includes a bottom electrode that is interposed between the substrate and two or more piezoelectric film layers, and a middle electrode that is interposed between two of the two or more piezoelectric film layers.

In accordance with another aspect of the disclosure, a wireless mobile device is provided. The wireless mobile device can include one or more antennas, a front end system that communicates with the one or more antennas, and one or more one or more piezoelectric microelectromechanical systems diaphragm microphones mounted on a substrate layer. Each microphone includes a substrate defining an opening between a bottom end of the substrate and a top end of the substrate, and two or more piezoelectric film layers disposed over the top end of the substrate and defining a diaphragm structure. Each of the two or more piezoelectric film layers has a predefined residual stress that substantially cancel each other out so that the diaphragm structure is substantially flat with substantially zero residual stress. One or more electrodes are disposed over the diaphragm structure. The diaphragm structure is configured to deflect when the diaphragm is subjected to sound pressure via the opening in the substrate.

In an embodiment, the diaphragm structure has a circular shape. The one or more electrodes that are disposed over the diaphragm structure can include a circumferential electrode that is disposed over a circumference of the diaphragm structure and a center electrode that is disposed generally over a center of the diaphragm structure. At least a portion of the center electrode can be spaced apart from the circumferential electrode.

In an embodiment, the diaphragm structure has a rectangular shape. The diaphragm structure can have a square shape. The one or more electrodes that are disposed over the diaphragm structure can include a plurality of side elec-

trodes that are disposed adjacent corresponding side edges of the diaphragm structure. The plurality of side electrodes can be spaced apart from each other and disposed around an area of the diaphragm structure that extends between the plurality of side electrodes.

In an embodiment, each of the one or more electrodes is divided into two or more electrode portions by one or more gaps between the electrode portions to provide a microphone with a desired sensitivity and capacitance. Each pair of the two or more electrode portions can be connected in series by a connection via.

In an embodiment, the wireless mobile device further includes a through hole in the diaphragm structure that extends from a top surface of the diaphragm structure to a bottom surface of the diaphragm structure. The through hole can be configured to define a low frequency roll off for the microphone.

In an embodiment, the wireless mobile device further includes a bottom electrode that is interposed between the substrate and two or more piezoelectric film layers, and a middle electrode that is interposed between two of the two or more piezoelectric film layers.

In accordance with another aspect of the disclosure, a method of making a piezoelectric microelectromechanical systems diaphragm microphone is provided. The method can include the steps of: a) oxidizing a top surface and a bottom surface of a substrate to form a top oxidation layer and a bottom oxidation layer, b) forming or applying two or more piezoelectric film layers over the top surface of the substrate so that each of the two or more piezoelectric film layers has a predefined residual stress that substantially cancel each other out, the two or more piezoelectric film layers defining a substantially flat diaphragm structure with substantially zero residual stress, c) forming or applying one or more electrodes over the two or more piezoelectric film layers, and d) etching the bottom oxidation layer and substrate to form an opening in the substrate that allows sound pressure to travel through the opening to deflect the diaphragm structure.

In an embodiment, the diaphragm structure has a circular shape. Forming or applying the one or more electrodes over the two or more piezoelectric film layers can include forming or applying a circumferential electrode over a circumference of the diaphragm structure and forming or applying a center electrode generally over a center of the diaphragm structure. At least a portion of the center electrode can be spaced apart from the circumferential electrode.

In an embodiment, the diaphragm structure has a rectangular shape. Forming or applying the one or more electrodes over the two or more piezoelectric film layers can include forming or applying a plurality of side electrodes disposed adjacent corresponding side edges of the diaphragm structure. The plurality of side electrodes can be spaced apart from each other and disposed around an area of the diaphragm structure that extends between the plurality of side electrodes.

In an embodiment, the method further includes dividing the one or more electrodes into two or more electrode portions by forming one or more gaps between the electrode portions to provide a microphone with a desired sensitivity and capacitance. The method can further include connecting each pair of the two or more electrode portions in series with a connection via.

In an embodiment, the method further includes forming a through hole in the diaphragm structure from a top surface

5

of the diaphragm structure to a bottom surface of the diaphragm structure to define a low frequency roll off for the microphone.

In an embodiment, the method further includes forming or applying a bottom electrode over the top surface of the substrate prior to forming or applying the two or more piezoelectric film layers. The method can further include forming or applying a middle electrode between two of the two or more piezoelectric film layers.

In an embodiment, the method further includes forming or applying a passivation layer over the one or more electrodes that is disposed over the two or more piezoelectric film layers.

In an embodiment, forming or applying two or more piezoelectric film layers over the top surface of the substrate so that each of the two or more piezoelectric film layers has a predefined residual stress that substantially cancel each other out includes controlling one or both of a pressure and a bias voltage during a deposition process for the each of the two or more piezoelectric film layers

In accordance with another aspect of the disclosure, a method of making a radiofrequency module is provided. The method can include the steps of forming or providing a printed circuit board that includes a substrate layer, and forming or providing one or more piezoelectric microelectromechanical systems diaphragm microphones. The process of forming or providing one or more piezoelectric microelectromechanical systems diaphragm microphones can include: (a) oxidizing a top surface and a bottom surface of a substrate to form a top oxidation layer and a bottom oxidation layer, (b) forming or applying two or more piezoelectric film layers over the top surface of the substrate so that each of the two or more piezoelectric film layers has a predefined residual stress that substantially cancel each other out, the two or more piezoelectric film layers defining a substantially flat diaphragm structure with substantially zero residual stress, (c) forming or applying one or more electrodes over the two or more piezoelectric film layers, and (d) etching the bottom oxidation layer and substrate to form an opening in the substrate that allows sound pressure to travel through the opening to deflect the diaphragm structure. The method of making the radiofrequency module also comprises the step of mounting the one or more piezoelectric microelectromechanical systems diaphragm microphones on the printed circuit board.

In an embodiment, the diaphragm structure has a circular shape. Forming or applying the one or more electrodes over the two or more piezoelectric film layers can include forming or applying a circumferential electrode over a circumference of the diaphragm structure and forming or applying a center electrode generally over a center of the diaphragm structure. At least a portion of the center electrode can be spaced apart from the circumferential electrode.

In an embodiment, the diaphragm structure has a rectangular shape. Forming or applying the one or more electrodes over the two or more piezoelectric film layers can include forming or applying a plurality of side electrodes disposed adjacent corresponding side edges of the diaphragm structure. The plurality of side electrodes can be spaced apart from each other and disposed around an area of the diaphragm structure that extends between the plurality of side electrodes.

In an embodiment, the method further includes dividing the one or more electrodes into two or more electrode portions by forming one or more gaps between the electrode portions to provide a microphone with a desired sensitivity

6

and capacitance. The method can further include connecting each pair of the two or more electrode portions in series with a connection via.

In an embodiment, the method further includes forming a through hole in the diaphragm structure from a top surface of the diaphragm structure to a bottom surface of the diaphragm structure to define a low frequency roll off for the microphone.

In an embodiment, the method further includes forming or applying a bottom electrode over the top surface of the substrate prior to forming or applying the two or more piezoelectric film layers. The method can further include forming or applying a middle electrode between two of the two or more piezoelectric film layers.

In an embodiment, the method further includes forming or applying a passivation layer over the one or more electrodes that are disposed over the two or more piezoelectric film layers.

In an embodiment, forming or applying two or more piezoelectric film layers over the top surface of the substrate so that each of the two or more piezoelectric film layers has a predefined residual stress that substantially cancel each other out includes controlling one or both of a pressure and a bias voltage during a deposition process for the each of the two or more piezoelectric film layers.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of this disclosure will now be described, by way of non-limiting example, with reference to the accompanying drawings.

FIG. 1 is a schematic diagram of one embodiment of a wireless device.

FIG. 2A is a schematic diagram of one embodiment of a packaged module.

FIG. 2B is a schematic diagram of a cross-section of the packaged module of FIG. 2A taken along the lines 2B-2B.

FIG. 3 is a top view of a piezoelectric MEMS circular diaphragm microphone.

FIG. 4 is a cross-sectional side view of the piezoelectric MEMS diaphragm microphone of FIG. 3.

FIG. 5 is a top view of a piezoelectric MEMS rectangular diaphragm microphone.

FIG. 6 is a cross-sectional side view of the piezoelectric MEMS diaphragm microphone of FIG. 5.

FIG. 7A is a cross-sectional side view of one step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 7B is a top view of the structure in FIG. 7A.

FIG. 8A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 8B is a top view of the structure in FIG. 8A.

FIG. 9A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 9B is a top view of the structure in FIG. 9A.

FIG. 10A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 10B is a top view of the structure in FIG. 10A.

FIG. 11A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 11B is a top view of the structure in FIG. 11A.

FIG. 12A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 12B is a top view of the structure in FIG. 12A.

FIG. 13A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 13B is a top view of the structure in FIG. 13A.

FIG. 14A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 14B is a top view of the structure in FIG. 14A.

FIG. 15A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 15B is a top view of the structure in FIG. 15A.

FIG. 16A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 16B is a top view of the structure in FIG. 16A.

FIG. 17 is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 18 is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 19A is a cross-sectional side view of another step in the manufacture of a piezoelectric MEMS diaphragm microphone.

FIG. 19B is a top view of the structure in FIG. 19A.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

The following detailed description of certain embodiments presents various descriptions of specific embodiments. However, the innovations described herein can be embodied in a multitude of different ways, for example, as defined and covered by the claims. In this description, reference is made to the drawings were like reference numerals can indicate identical or functionally similar elements. It will be understood that elements illustrated in the figures are not necessarily drawn to scale. Moreover, it will be understood that certain embodiments can include more elements than illustrated in a drawing and/or a subset of the elements illustrated in a drawing. Further, some embodiments can incorporate any suitable combination of features from two or more drawings.

The International Telecommunication Union (ITU) is a specialized agency of the United Nations (UN) responsible for global issues concerning information and communication technologies, including the shared global use of radio spectrum.

The 3rd Generation Partnership Project (3GPP) is a collaboration between groups of telecommunications standard bodies across the world, such as the Association of Radio Industries and Businesses (ARIB), the Telecommunications Technology Committee (TTC), the China Communications Standards Association (CCSA), the Alliance for Telecommunications Industry Solutions (ATIS), the Telecommunications Technology Association (TTA), the European Telecommunications Standards Institute (ETSI), and the Telecommunications Standards Development Society, India (TSDSI).

Working within the scope of the ITU, 3GPP develops and maintains technical specifications for a variety of mobile communication technologies, including, for example, sec-

ond generation (2G) technology (for instance, Global System for Mobile Communications (GSM) and Enhanced Data Rates for GSM Evolution (EDGE)), third generation (3G) technology (for instance, Universal Mobile Telecommunications System (UMTS) and High Speed Packet Access (HSPA)), and fourth generation (4G) technology (for instance, Long Term Evolution (LTE) and LTE-Advanced).

The technical specifications controlled by 3GPP can be expanded and revised by specification releases, which can span multiple years and specify a breadth of new features and evolutions.

In one example, 3GPP introduced carrier aggregation (CA) for LTE in Release 10. Although initially introduced with two downlink carriers, 3GPP expanded carrier aggregation in Release 14 to include up to five downlink carriers and up to three uplink carriers. Other examples of new features and evolutions provided by 3GPP releases include, but are not limited to, License Assisted Access (LAA), enhanced LAA (eLAA), Narrowband Internet-of-Things (NB-IOT), Vehicle-to-Everything (V2X), and High Power User Equipment (HPUE).

3GPP introduced Phase 1 of fifth generation (5G) technology in Release 15 and plans to introduce Phase 2 of 5G technology in Release 16 (targeted for 2019). Subsequent 3GPP releases will further evolve and expand 5G technology. 5G technology is also referred to herein as 5G New Radio (NR).

5G NR supports or plans to support a variety of features, such as communications over millimeter wave spectrum, beam forming capability, high spectral efficiency waveforms, low latency communications, multiple radio numerology, and/or non-orthogonal multiple access (NOMA). Although such RF functionalities offer flexibility to networks and enhance user data rates, supporting such features can pose a number of technical challenges.

The teachings herein are applicable to a wide variety of communication systems, including, but not limited to, communication systems using advanced cellular technologies, such as LTE-Advanced, LTE-Advanced Pro, and/or 5G NR.

FIG. 1 is a schematic diagram of one embodiment of a wireless device 100. The wireless device 100 can be, for example but not limited to, a portable telecommunication device such as a mobile cellular-type telephone. The wireless device 100 can include one or more of a baseband system 101, a transceiver 102, a front end system 103, one or more antennas 104, a power management system 105, a memory 106, a user interface 107, a battery 108 (e.g., direct current (DC) battery), and a microphone 300 (e.g., a piezoelectric MEMS diaphragm microphone). Other additional components, such as a speaker, display and keyboard can optionally be connected to the baseband system 101. The battery 108 can provide power to the wireless device 100. The microphone 300 can supply signals to the baseband system 101.

It should be noted that, for simplicity, only certain components of the wireless device 100 are illustrated herein. The control signals provided by the baseband system 101 can control the various components within the wireless device 100. Further, the function of the transceiver 102 can be integrated into separate transmitter and receiver components.

The wireless device 100 can communicate using a wide variety of communications technologies, including, but not limited to, 2G, 3G, 4G (including LTE, LTE-Advanced, and LTE-Advanced Pro), 5G NR, WLAN (for instance, Wi-Fi), WPAN (for instance, Bluetooth and ZigBee), WMAN (for instance, WiMax), and/or GPS technologies.

The transceiver **102** generates RF signals for transmission and processes incoming RF signals received from the antennas **104**. It will be understood that various functionalities associated with the transmission and receipt of RF signals can be achieved by one or more components that are collectively represented in FIG. 1 as the transceiver **102**. In one example, separate components (for instance, separate circuits or dies) can be provided for handling certain types of RF signals.

The front end system **103** aids in conditioning signals transmitted to and/or received from the antennas **104**. In the illustrated embodiment, the front end system **103** includes one or more power amplifiers (PAs) **111**, low noise amplifiers (LNAs) **112**, filters **113**, switches **114**, and duplexers **115**. However, other implementations are possible.

For example, the front end system **103** can provide a number of functionalities, including, but not limited to, amplifying signals for transmission, amplifying received signals, filtering signals, switching between different bands, switching between different power modes, switching between transmission and receiving modes, duplexing of signals, multiplexing of signals (for instance, duplexing or triplexing), or some combination thereof.

In certain implementations, the wireless device **100** supports carrier aggregation, thereby providing flexibility to increase peak data rates. Carrier aggregation can be used for both Frequency Division Duplexing (FDD) and Time Division Duplexing (TDD), and may be used to aggregate a plurality of carriers or channels. Carrier aggregation includes contiguous aggregation, in which contiguous carriers within the same operating frequency band are aggregated. Carrier aggregation can also be non-contiguous, and can include carriers separated in frequency within a common band or in different bands.

The antennas **104** can include antennas used for a wide variety of types of communications. For example, the antennas **104** can include antennas for transmitting and/or receiving signals associated with a wide variety of frequencies and communications standards.

In certain implementations, the antennas **104** support MIMO communications and/or switched diversity communications. For example, MIMO communications use multiple antennas for communicating multiple data streams over a single radio frequency channel. MIMO communications benefit from higher signal to noise ratio, improved coding, and/or reduced signal interference due to spatial multiplexing differences of the radio environment. Switched diversity refers to communications in which a particular antenna is selected for operation at a particular time. For example, a switch can be used to select a particular antenna from a group of antennas based on a variety of factors, such as an observed bit error rate and/or a signal strength indicator.

The wireless device **100** can operate with beamforming in certain implementations. For example, the front end system **103** can include phase shifters having variable phase controlled by the transceiver **102**. Additionally, the phase shifters are controlled to provide beam formation and directivity for transmission and/or reception of signals using the antennas **104**. For example, in the context of signal transmission, the phases of the transmit signals provided to the antennas **104** can be controlled such that radiated signals from the antennas **104** combine using constructive and destructive interference to generate an aggregate transmit signal exhibiting beam-like qualities with more signal strength propagating in a given direction. In the context of signal reception, the phases can be controlled such that more signal energy is received when the signal is arriving to the antennas **104** from

a particular direction. In certain implementations, the antennas **104** can include one or more arrays of antenna elements to enhance beamforming.

The baseband system **101** is coupled to the user interface **107** to facilitate processing of various user input and output (I/O), such as voice and data. The baseband system **101** provides the transceiver **102** with digital representations of transmit signals, which the transceiver **102** processes to generate RF signals for transmission. The baseband system **101** also processes digital representations of received signals provided by the transceiver **102**. As shown in FIG. 1, the baseband system **101** is coupled to the memory **106** of the wireless device **100**.

The memory **106** can be used for a wide variety of purposes, such as storing data and/or instructions to facilitate the operation of the wireless device **100** and/or to provide storage of user information.

The power management system **105** provides a number of power management functions of the wireless device **100**. In certain implementations, the power management system **105** includes a PA supply control circuit that controls the supply voltages of the power amplifiers **111**. For example, the power management system **105** can be configured to change the supply voltage(s) provided to one or more of the power amplifiers **111** to improve efficiency, such as power added efficiency (PAE).

As shown in FIG. 1, the power management system **105** receives a battery voltage from the battery **108**. The battery **108** can be any suitable battery for use in the wireless device **100**, including, for example, a lithium-ion battery.

FIG. 2A is a schematic diagram of one embodiment of a packaged module **200**. FIG. 2B is a schematic diagram of a cross-section of the packaged module **200** of FIG. 2A taken along the lines 2B-2B.

The packaged module **200** includes radio frequency components **201**, a semiconductor die **202**, surface mount devices **203**, wirebonds **208**, a package substrate **230**, and an encapsulation structure **240**. One or more of the surface mounted devices (SMDs) **203** can be a microphone **300** (e.g., a piezoelectric MEMS diaphragm microphone). The package substrate **230** includes pads **206** formed from conductors disposed therein. Additionally, the semiconductor die **202** includes pins or pads **204**, and the wirebonds **208** have been used to connect the pads **204** of the die **202** to the pads **206** of the package substrate **220**.

The semiconductor die **202** includes a power amplifier **245**, which can be implemented in accordance with one or more features disclosed herein.

The package substrate **230** can be configured to receive a plurality of components such as radio frequency components **201**, the semiconductor die **202** and the surface mount devices **203**, which can include, for example, surface mount capacitors and/or inductors. In one implementation, the radio frequency components **201** include integrated passive devices (IPDs).

As shown in FIG. 2B, the packaged module **200** is shown to include a plurality of contact pads **232** disposed on the side of the packaged module **200** opposite the side used to mount the semiconductor die **202**. Configuring the packaged module **200** in this manner can aid in connecting the packaged module **200** to a circuit board, such as a phone board of a mobile device. The example contact pads **232** can be configured to provide radio frequency signals, bias signals, and/or power (for example, a power supply voltage and ground) to the semiconductor die **202** and/or other components. As shown in FIG. 2B, the electrical connections between the contact pads **232** and the semiconductor die **202**

can be facilitated by connections **233** through the package substrate **230**. The connections **233** can represent electrical paths formed through the package substrate **220**, such as connections associated with vias and conductors of a multilayer laminated package substrate.

In some embodiments, the packaged module **200** can also include one or more packaging structures to, for example, provide protection and/or facilitate handling. Such a packaging structure can include overmold or encapsulation structure **240** formed over the package substrate **230** and the components and die(s) disposed thereon.

It will be understood that although the packaged module **200** is described in the context of electrical connections based on wirebonds, one or more features of the present disclosure can also be implemented in other packaging configurations, including, for example, flip-chip configurations.

Piezoelectric MEMS Microphone

FIGS. 3-4 show one implementation of a piezoelectric microelectromechanical systems (MEMS) diaphragm microphone **300A** (hereinafter the “microphone”). The microphone **300A** has a substrate **301**. The substrate **301** is optionally made of Silicon. An insulation layer **311** is disposed on a surface of the substrate **301**. The insulation layer **311** is optionally silicon dioxide. A first electrode **312** (e.g., a “bottom” electrode) is disposed on the oxide layer **311**. One or more piezoelectric film layers **309** (e.g., multiple layers or multi-layer) are disposed on the first electrode **312**. In FIG. 4, two piezoelectric film layers **309** are shown. At least one of the one or more piezoelectric film layers **309** are optionally made of aluminum nitride (AlN). In another implementation, at least one of the one or more piezoelectric film layers **309** are optionally made of aluminum scandium nitride (AlScN). In still another implementation, at least one of the one or more piezoelectric film layers **309** can be made of other suitable materials, such as zinc oxide. A second electrode **314** (e.g., a “middle” electrode) is disposed between at least two of the one or more piezoelectric film layers **309**. A third electrode **315** (e.g., a “top” electrode) is disposed on top of the one or more piezoelectric film layers **309**, and a passivation layer **318** is disposed over the third electrode **315** and at least partially defines a top surface of the microphone **300A**. In one implementation, the passivation layer **318** is optionally titanium nitride (TiN). The one or more piezoelectric film layers **309** define a diaphragm **319**.

With reference to FIG. 3, the microphone **300A** can have a generally circular or round shape. However, as discussed further below, the microphone **300A** can have other suitable shapes. The third electrode **315** can include an outer circumferential electrode **302** and a center electrode **305**. The outer circumferential electrode **302** can optionally be divided into two or more portions **302A-302D** by one or more gaps **303** between the portions **302A-302D**. The two or more portions **302A-302D** can optionally be connected in series with each other by one or more connection vias **304**. Optionally, the gaps **303** can completely separate the portions **302A-302D** so that the portions **302A-302D** are solely connected by the connection vias **304**. The gaps **303** can advantageously control the amount of capacitance provided by the electrodes **302** (e.g., if want a higher capacitance then fewer gaps **303** are provided; if want a lower capacitance then more gaps **303** are provided). The reduction in capacitance (e.g., due to increased number of gaps **303**) results in increased sensitivity, and the increase in capacitance (e.g., due to reduced number of gaps **303**) results in reduced sensitivity. Therefore, sensitivity and capacitance can advantageously be balanced as desired via the use of such gaps

303, **307** to divide the electrodes **302**, **305**. The center electrode **305** can optionally be divided into two or more portions **305A-305D** by one or more gaps **307** between the portions **305A-305D**. The two or more portions **305A-305D** can optionally be connected in series with each other by one or more connection vias **306** (e.g., which can further reduce the capacitance value of the electrode **302**). Optionally, the gaps **307** can completely separate the portions **305A-305D** so that the portions **305A-305D** are solely connected by the connection vias **306**. The center electrode **305** can connect with the circumferential electrode **302** by a connector **308**. The microphone **300A** can have one or more bond pads **316** connected to the circumferential electrode **302**.

The center electrode **305** can be spaced from the circumferential electrode **302** so that the center electrode **305** is substantially centered relative to the circumferential electrode **302** (e.g., both electrodes **302**, **305** have the same central axis), with at least a portion of the diaphragm **319** extending between the circumferential electrode **302** and the center electrode **305**. As shown in FIGS. 3-4, the diaphragm **319** can extend beneath the circumferential electrode **302** and beneath the center electrode **305**. A through hole **310** can be formed (e.g., etched) in the diaphragm **319** (e.g., in the one or more piezoelectric film layers **309** that define the diaphragm **319**) at a location between the circumferential electrode **302** and the center electrode **305**. The through hole **310** can extend from a top surface of the diaphragm **319** to a bottom surface of the diaphragm **319** to thereby extend completely through the diaphragm **319**. The microphone **300A** can have an opening **320** in the substrate **301** that is located underneath the diaphragm **319**, which allows the diaphragm **319** to move (e.g., deflect).

With continued reference to FIG. 3, the electrodes **302**, **305** are advantageously located (e.g., electrode **302** along the periphery and electrode **305** at the center of the diaphragm structure **319**) where the highest stress, therefore highest output voltage or electrical energy via piezoelectric effect, is induced by sound pressure exerted on the diaphragm **319** (e.g., via air pressure delivered through the opening **320** toward the diaphragm **319**). As discussed further below, the one or more piezoelectric film layers **309** can be multiple layers (e.g., two), each having a predefined residual stress, where such residual stresses of the multiple layers balance (e.g., cancel each other out) in the combined diaphragm structure **319**, thereby advantageously providing a diaphragm structure **319** with approximately zero (e.g., zero) residual stress.

FIGS. 5-6 show another implementation of a piezoelectric microelectromechanical systems (MEMS) diaphragm microphone **300B** (hereinafter the “microphone”). The microphone **300B** has a substrate **301'**. The substrate **301'** is optionally made of Silicon. An insulation layer **311'** is disposed on a surface of the substrate **301'**. The insulation layer **311'** is optionally Silicon dioxide. A first electrode **312'** (e.g., a “bottom” electrode) is disposed on the oxide layer **311'**. One or more piezoelectric film layers **309'** (e.g., multiple layers or multi-layer) are disposed on the first electrode **312'**. In FIG. 6, two piezoelectric film layers **309'** are shown. At least one of the one or more piezoelectric film layers **309'** are optionally made of aluminum nitride (AlN). In another implementation, at least one of the one or more piezoelectric film layers **309'** are optionally made of aluminum scandium nitride (AlScN). A second electrode **314'** (e.g., a “middle” electrode) is disposed between at least two of the one or more piezoelectric film layers **309'**. A third electrode **315'** (e.g., a “top” electrode) is disposed on top of

the one or more piezoelectric film layers **309'**, and a passivation layer **318'** is disposed over the third electrode **315'** and at least partially defines a top surface of the microphone **300B**. In one implementation, the passivation layer **318'** is optionally titanium nitride (TiN). The one or more piezoelectric film layers **309'** define a diaphragm **319'**.

With reference to FIG. 5, the microphone **300B** can have a generally rectangular (e.g., square) shape. However, the microphone **300B** can have other suitable shapes. The third electrode **315'** can include one or more side electrodes **302'** adjacent one or more sides of the diaphragm **319'**. In FIG. 5, the third electrode **315'** includes four side electrodes **302'**, each adjacent a side of the rectangular (e.g., square) shape of the diaphragm **319'**. Each of the side electrodes **302'** can optionally be divided into two or more portions **302A'**, **302B'**, **302C'** by one or more gaps **303'** between the portions **302A'**, **302B'**, **302C'**. The gaps **303'** can advantageously control the amount of capacitance provided by the electrodes **302'** (e.g., if want a higher capacitance then fewer gaps **303'** are provided; if want a lower capacitance then more gaps **303'** are provided). The reduction in capacitance (e.g., due to increased number of gaps **303'**) results in increased sensitivity, and the increase in capacitance (e.g., due to reduced number of gaps **303'**) results in reduced sensitivity. Therefore, sensitivity and capacitance can advantageously be balanced as desired via the use of such gaps **303'**, **307'** to divide the electrodes **302'**. The two or more portions **302A'**, **302B'**, **302C'** can optionally be connected in series with each other by one or more connection vias **304'** (e.g., which can further reduce the capacitance value of the electrode **302'**). Optionally, the gaps **303'** can completely separate the portions **302A'**, **302B'**, **302C'** so that the portions **302A'**, **302B'**, **302C'** are solely connected by the connection vias **304'**. In one implementation, a center electrode (e.g., divided into two or more electrodes connected in series), similar to the center electrode **305** with electrode portions **305A-305D** in FIG. 3, can optionally be added to the rectangular diaphragm **319'** to improve output energy and provide more flexibility for balancing sensitivity and capacitance. The microphone **300B** can have one or more bond pads **316'** connected to two of the one or more side electrodes **302'**.

As shown in FIGS. 5-6, the diaphragm **319'** can extend beneath the side electrodes **302'** and across a center portion of the microphone **300B** between opposite side electrodes **302'**. A through hole **310'** can be formed (e.g., etched) in the diaphragm **319'** (e.g., in the one or more piezoelectric film layers **309'** that define the diaphragm **319'**) at a location between opposing side electrodes **302'**. The through hole **310'** can extend from a top surface of the diaphragm **319'** to a bottom surface of the diaphragm **319'** to thereby extend completely through the diaphragm **319'**. The microphone **300B** can have an opening **320'** in the substrate **301'** that is located underneath the diaphragm **319'**, which allows the diaphragm **319'** to move.

With continued reference to FIG. 5, the electrodes **302'** are advantageously located where the highest stress is induced, therefore highest output voltage or electrical energy via piezoelectric effect, (e.g., along the sides of the diaphragm structure **319'**) by sound pressure exerted on the diaphragm **319'** (e.g., via air pressure delivered through the opening **320'** toward the diaphragm **319'**). As discussed further below, the one or more piezoelectric film layers **309'** can be multiple layers (e.g., two), each having a predefined residual stress, where such residual stresses of the multiple layers balance (e.g., cancel each other out) in the combined dia-

phragm structure **319'**, thereby advantageously providing a diaphragm structure **319'** with approximately zero (e.g., zero) residual stress.

The through holes **310**, **310'** in the diaphragms **319**, **319'** of the microphones **300A**, **300B** can advantageously allow the low frequency roll off of the microphone **300A**, **300B** to be defined substantially precisely (e.g., at approximately 85 Hz \pm 15 Hz, such as for cell phone applications). That is, the size of the through hole **310**, **310'** can advantageously provide the desired value for the low frequency roll off (e.g., there is a correlation between the size of the through hole and the value of the low frequency roll off).

The diaphragm **319**, **319'** of the microphone **300A**, **300B** has a multi-layer structure (e.g., one or more piezoelectric film layers **309**, such as two layers, three layers, four layers, etc.) that advantageously provides higher sensitivity (about 2-3 dB higher) and better low-frequency roll-off control (-3 dB frequency) than cantilever structures. The diaphragm **319**, **319'** with multi-layers structure also has higher sensitivity than a single layer diaphragm. The one or more piezoelectric film layers **309**, **309'** (e.g., two layers, three layers, four layers, five layers, etc.) of the diaphragm **319**, **319'** in the microphone **300A**, **300B** each have residual stresses (e.g., pre-defined residual stresses introduced during the deposition process) that advantageously cancel each other out to provide a substantially flat (e.g., flat) diaphragm **309**, **309'** that is substantially residual-stress free (e.g., so that the overall residual stress is approximately zero). The one or more piezoelectric film layers **309**, **309'** can in one implementation be an even number of layers (e.g., two, four, six, etc.). In another implementation, the one or more piezoelectric film layers **309**, **309'** can be an odd number of layers (e.g., three, five, seven, etc.).

FIGS. 7A-19B show steps of a method **400** of manufacturing a piezoelectric MEMS diaphragm microphone. Though FIGS. 7A-19B show the method **400** for manufacturing the microphone **300A**, one of skill in the art will recognize that the method **400** can also be used to manufacture the microphone **300B**. FIGS. 7A-7B show a cross-sectional view and a top view, respectively, of the step of oxidizing **402** one or both of a top side and a bottom side of a substrate (such as the substrate **301**, **301'**) to form an oxidation layer, such as oxidation layer **311**, **311'**. Optionally, the oxidizing can be performed with a thermal oxidation furnace. In one implementation, the oxidation layer (e.g., oxidation layer **311**, **311'**) optionally has a thickness of approximately 2-3 μ m. The top oxidation layer can provide isolation between the substrate **301**, **301'** and the one or more piezoelectric film layers **309**, **309'**. The bottom oxidation layer can be used as a hard mask to define a window for later etching the opening **320**, **320'** into the microphone **300A**, **300B**. The substrate **301**, **301'** can be made of Silicon, and the oxidation layers can be of Silicon dioxide.

FIGS. 8A-8B show a cross-sectional view and a top view, respectively, of the step of forming or applying **404** (e.g., and patterning, such as using wet etching, dry etching, etc.) a first electrode (e.g., the "bottom" electrode), such as the first electrode **312**, **312'** on the top oxidation layer (e.g., oxidation layer **311**, **311'**). Optionally, the first electrode can be formed or applied **404** using a sputter machine and patterned by dry etching (e.g., using Reactive Ion Etch (RIE) and/or Inductively Coupled Plasma (ICP) etch). In one implementation, the first electrode (e.g., first electrode **312**, **312'**) optionally has a thickness of approximately 30 nm.

FIGS. 9A-9B show a cross-sectional view and a top view, respectively, of the step of forming or applying **406** (e.g., via deposition) **406** one or more piezoelectric film layers, such

15

as piezoelectric film layers **309**, on top (e.g., adjacent to, attached to) the first electrode. Optionally, the one or more piezoelectric film layers are formed or applied using a sputter machine. As discussed above, the one or more piezoelectric film layers can optionally be made of aluminum nitride (AlN) or aluminum scandium nitride (AlScN). In one implementation, the one or more piezoelectric film layers can optionally have a total thickness of approximately 500 nm. Optionally, the one or more piezoelectric film layers are applied so that each layer has a predefined residual stress. For example, where the piezoelectric material is aluminum nitride, one or both of the pressure of the deposition chamber and the radiofrequency bias voltage applied can be controlled to provide a pre-defined residual stress to each of the piezoelectric film layers applied (e.g., residual stress can be gradually controlled using pressure and/or bias voltage during the deposition process based on a known correlation between residual stress and one or both of pressure and bias voltage).

FIGS. **10A-10B** show a cross-sectional view and a top view, respectively of the step of forming or applying **408** (e.g., and patterning, such as using wet etching, dry etching, etc.) a second electrode (e.g., the "middle" electrode), such as the second electrode **314**, **314'** onto (e.g., adjacent to, attached to) the one or more piezoelectric film layers, such as the piezoelectric film layers **309**. Optionally, the second electrode can be formed or applied **408** using a sputter machine and patterned by dry etching (e.g., using Reactive Ion Etch (RIE) and/or Inductively Coupled Plasma (ICP) etch). In one implementation, the second electrode (e.g., second electrode **314**, **314'**) optionally has a thickness of approximately 30 nm.

FIGS. **11A-11B** show a cross-sectional view and a top view, respectively, of the step of forming or applying **410** (e.g., via deposition) one or more piezoelectric film layers, such as piezoelectric film layers **309**, on top (e.g., adjacent to, attached to) of the second electrode. Optionally, the one or more piezoelectric film layers are formed or applied using a sputter machine. As discussed above, the one or more piezoelectric film layers can optionally be made of aluminum nitride (AlN) or aluminum scandium nitride (AlScN). In one implementation, the one or more piezoelectric film layers can optionally have a total thickness of approximately 500 nm. Optionally, the one or more piezoelectric film layers are applied so that each layer has a predefined residual stress. For example, where the piezoelectric material is aluminum nitride, one or both of the pressure of the deposition chamber and the radiofrequency bias voltage applied can be controlled to provide a pre-defined residual stress to each of the piezoelectric film layers applied (e.g., residual stress can be gradually controlled using pressure and/or bias voltage during the deposition process based on a known correlation between residual stress and one or both of pressure and bias voltage).

FIGS. **12A-12B** show a cross-sectional and a top view, respectively of the step of forming or applying **412** a third electrode (e.g., a "top" electrode) onto the one or more piezoelectric layers that are disposed on top of the second electrode. Optionally, the third electrode can be formed or applied **412** using a sputter machine and patterned by dry etching (e.g., using Reactive Ion Etch (RIE) and/or Inductively Coupled Plasma (ICP) etch). In one implementation, the third electrode (e.g., third electrode **315**, **315'**) optionally has a thickness of approximately 30 nm.

FIGS. **13A-13B** show a cross-sectional and a top view, respectively of the step of forming or applying **414** a passivation layer, such as the passivation layer **318**, **318'**, on

16

top of (e.g., adjacent to, attached to) the third electrode. Optionally, the passivation layer can be formed or applied **414** using a sputter machine or a Chemical Vapor Deposition (CVD) machine. In one implementation, the passivation layer optionally has a thickness of approximately 50 nm.

FIGS. **14A-14B** show a cross-sectional and a top view, respectively, of the step of forming (e.g., etching) **416** one or more vias through the passivation layer and one or more piezoelectric film layers. The figures show one via etched through one of (e.g., half of) the piezoelectric film layers and another via etched through two of (e.g., all of) the piezoelectric film layers. Optionally, the vias can be etched using an Inductively Coupled Plasma (ICP) etch machine and process.

FIGS. **15A-15B** show a cross-sectional view and a top view, respectively, of the step of forming or applying **418** (e.g., via deposition) one or more bond pads, such as bond pads **316**, **316'**, and patterning them. Optionally, the one or more bond pads can be formed or applied **418** using a sputter machine, or an E-beam evaporator and lift-off process. The passivation layer **318**, **318'** can serve to protect the top of the microphone **300A**, **300B**.

FIGS. **16A-16B** show a cross-sectional view and a top view, respectively, of the step of forming or applying **420** a top protection layer (e.g., a silicon dioxide layer) on top of (e.g., adjacent to, attached to) the passivation layer. Optionally, the top protection layer can be formed or applied **420** using a Plasma Enhanced Chemical Vapor Deposition (PECVD) machine and process. In one implementation, the top protection layer optionally has a thickness of approximately 2 μ m.

FIG. **17** shows a cross-sectional view of the step of patterning **422** and etching **424** the oxide layer on the bottom of the substrate. Optionally, the patterning and etching **422**, **424** of the oxide layer on the bottom of the substrate can be performed using a Reactive Ion Etch (RIE) and/or Inductively Coupled Plasma (ICP) etch machine and process.

FIG. **18** shows a cross-sectional view of the step of etching **426** of the substrate to create an opening, such as the opening **320**, **320'**, underneath the diaphragm. Optionally, the etching **426** of the substrate can be performed using a Deep Reactive Ion Etching (DRIE) machine and process.

FIGS. **19A** and **19B** show a cross-sectional view and a top view, respectively, of the step of removing **428** (e.g., etching) the protection layer, oxide layer on the bottom of the substrate, and oxide layer under the first electrode. Optionally, the removing (e.g., etching) **428** of the protection layer, oxide layer on the bottom of the substrate and oxide layer under the first electrode can be performed using a Vapor Hydrogen Fluoride (VHF) etch machine and process. The opening **320**, **320'** allows sound pressure to pass through to exert a force on the diaphragm **319**, **319'** (e.g., on the first or bottom electrode **312**, **312'**) to deflect the diaphragm **319**, **319'**.

In use, the microphone structure **300A**, **300B** is mounted on a printed circuit board (PCB) so that the opening **320**, **320'** is disposed over or otherwise generally aligned with an opening in the PCB through which sound pressure enters into the opening **320**, **320'** to deflect the diaphragm **319**, **319'** as discussed above.

While certain embodiments of the inventions have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the disclosure. Indeed, the novel methods and systems described herein may be embodied in a variety of other forms. Furthermore, various omissions, substitutions and changes in the systems and methods described herein may

be made without departing from the spirit of the disclosure. The accompanying claims and their equivalents are intended to cover such forms or modifications as would fall within the scope and spirit of the disclosure. Accordingly, the scope of the present inventions is defined only by reference to the appended claims.

Features, materials, characteristics, or groups described in conjunction with a particular aspect, embodiment, or example are to be understood to be applicable to any other aspect, embodiment or example described in this section or elsewhere in this specification unless incompatible therewith. All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive. The protection is not restricted to the details of any foregoing embodiments. The protection extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

Furthermore, certain features that are described in this disclosure in the context of separate implementations can also be implemented in combination in a single implementation. Conversely, various features that are described in the context of a single implementation can also be implemented in multiple implementations separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations, one or more features from a claimed combination can, in some cases, be excised from the combination, and the combination may be claimed as a subcombination or variation of a subcombination.

Moreover, while operations may be depicted in the drawings or described in the specification in a particular order, such operations need not be performed in the particular order shown or in sequential order, or that all operations be performed, to achieve desirable results. Other operations that are not depicted or described can be incorporated in the example methods and processes. For example, one or more additional operations can be performed before, after, simultaneously, or between any of the described operations. Further, the operations may be rearranged or reordered in other implementations. Those skilled in the art will appreciate that in some embodiments, the actual steps taken in the processes illustrated and/or disclosed may differ from those shown in the figures. Depending on the embodiment, certain of the steps described above may be removed, others may be added. Furthermore, the features and attributes of the specific embodiments disclosed above may be combined in different ways to form additional embodiments, all of which fall within the scope of the present disclosure. Also, the separation of various system components in the implementations described above should not be understood as requiring such separation in all implementations, and it should be understood that the described components and systems can generally be integrated together in a single product or packaged into multiple products.

For purposes of this disclosure, certain aspects, advantages, and novel features are described herein. Not necessarily all such advantages may be achieved in accordance with any particular embodiment. Thus, for example, those skilled in the art will recognize that the disclosure may be embodied or carried out in a manner that achieves one

advantage or a group of advantages as taught herein without necessarily achieving other advantages as may be taught or suggested herein.

Conditional language, such as “can,” “could,” “might,” or “may,” unless specifically stated otherwise, or otherwise understood within the context as used, is generally intended to convey that certain embodiments include, while other embodiments do not include, certain features, elements, and/or steps. Thus, such conditional language is not generally intended to imply that features, elements, and/or steps are in any way required for one or more embodiments or that one or more embodiments necessarily include logic for deciding, with or without user input or prompting, whether these features, elements, and/or steps are included or are to be performed in any particular embodiment.

Conjunctive language such as the phrase “at least one of X, Y, and Z,” unless specifically stated otherwise, is otherwise understood with the context as used in general to convey that an item, term, etc. may be either X, Y, or Z. Thus, such conjunctive language is not generally intended to imply that certain embodiments require the presence of at least one of X, at least one of Y, and at least one of Z.

Language of degree used herein, such as the terms “approximately,” “about,” “generally,” and “substantially” as used herein represent a value, amount, or characteristic close to the stated value, amount, or characteristic that still performs a desired function or achieves a desired result. For example, the terms “approximately,” “about,” “generally,” and “substantially” may refer to an amount that is within less than 10% of, within less than 5% of, within less than 1% of, within less than 0.1% of, and within less than 0.01% of the stated amount. As another example, in certain embodiments, the terms “generally parallel” and “substantially parallel” refer to a value, amount, or characteristic that departs from exactly parallel by less than or equal to 15 degrees, 10 degrees, 5 degrees, 3 degrees, 1 degree, or 0.1 degree.

The scope of the present disclosure is not intended to be limited by the specific disclosures of preferred embodiments in this section or elsewhere in this specification, and may be defined by claims as presented in this section or elsewhere in this specification or as presented in the future. The language of the claims is to be interpreted broadly based on the language employed in the claims and not limited to the examples described in the present specification or during the prosecution of the application, which examples are to be construed as non-exclusive.

Of course, the foregoing description is that of certain features, aspects and advantages of the present invention, to which various changes and modifications can be made without departing from the spirit and scope of the present invention. Moreover, the shielded inductor need not feature all of the objects, advantages, features and aspects discussed above. Thus, for example, those of skill in the art will recognize that the invention can be embodied or carried out in a manner that achieves or optimizes one advantage or a group of advantages as taught herein without necessarily achieving other objects or advantages as may be taught or suggested herein. In addition, while a number of variations of the invention have been shown and described in detail, other modifications and methods of use, which are within the scope of this invention, will be readily apparent to those of skill in the art based upon this disclosure. It is contemplated that various combinations or subcombinations of these specific features and aspects of embodiments may be made and still fall within the scope of the invention. Accordingly, it should be understood that various features and aspects of the

disclosed embodiments can be combined with or substituted for one another in order to form varying modes of the discussed shielded inductor.

What is claimed is:

1. A piezoelectric microelectromechanical systems diaphragm microphone, comprising:
 - a substrate defining an opening between a bottom end of the substrate and a top end of the substrate;
 - two or more piezoelectric film layers disposed over the top end of the substrate and defining a diaphragm structure that is substantially flat and deflect when the diaphragm structure is subjected to sound pressure via the opening in the substrate, the two or more piezoelectric film layers configured to reduce residual stress of the diaphragm structure, the diaphragm structure including a through hole that extends from a top surface of the diaphragm structure to a bottom surface of the diaphragm structure, the through hole configured to define a low frequency roll off for the microphone; and
 - one or more electrodes disposed over the diaphragm structure.
2. The microphone of claim 1 wherein the diaphragm structure has a circular shape.
3. The microphone of claim 2 wherein the one or more electrodes disposed over the diaphragm structure include a circumferential electrode disposed over a circumference of the diaphragm structure and a center electrode disposed generally over a center of the diaphragm structure, at least a portion of the center electrode spaced apart from the circumferential electrode.
4. The microphone of claim 1 wherein the diaphragm structure has a rectangular shape.
5. The microphone of claim 4 wherein the one or more electrodes disposed over the diaphragm structure include a plurality of side electrodes disposed adjacent corresponding side edges of the diaphragm structure, the plurality of side electrodes spaced apart from each other and disposed around an area of the diaphragm structure that extends between the plurality of side electrodes.
6. The microphone of claim 1 wherein each of the one or more electrodes is divided into two or more electrode portions by one or more gaps between the electrode portions to provide a microphone with a desired sensitivity and capacitance.
7. The microphone of claim 6 wherein each pair of the two or more electrode portions is connected in series by a connection via.
8. The microphone of claim 1 further comprising a bottom electrode interposed between the substrate and the two or more piezoelectric film layers.
9. The microphone of claim 8 further comprising a middle electrode interposed between two of the two or more piezoelectric film layers.
10. A radiofrequency module, comprising:
 - a printed circuit board including a substrate layer; and
 - one or more piezoelectric microelectromechanical systems diaphragm microphones mounted on the printed circuit board, each microphone including: a substrate defining an opening between a bottom end of the substrate and a top end of the substrate, two or more piezoelectric film layers disposed over the top end of the substrate and defining a diaphragm structure that is substantially flat, the two or more piezoelectric film layers configured to reduce residual stress of the diaphragm structure, and one or more electrodes disposed over the diaphragm structure, the diaphragm structure configured to deflect when the diaphragm structure is

subjected to sound pressure via the opening in the substrate, the diaphragm structure including a through hole that extends from a top surface of the diaphragm structure to a bottom surface of the diaphragm structure, the through hole configured to define a low frequency roll off for the microphone.

11. The radiofrequency module of claim 10 wherein the diaphragm structure has a circular shape, the one or more electrodes disposed over the diaphragm structure include a circumferential electrode disposed over a circumference of the diaphragm structure and a center electrode disposed generally over a center of the diaphragm structure, at least a portion of the center electrode spaced apart from the circumferential electrode.

12. The radiofrequency module of claim 10 wherein the diaphragm structure has a rectangular shape, the one or more electrodes disposed over the diaphragm structure include a plurality of side electrodes disposed adjacent corresponding side edges of the diaphragm structure, the plurality of side electrodes spaced apart from each other and disposed around an area of the diaphragm structure that extends between the plurality of side electrodes.

13. The radiofrequency module of claim 10 wherein each of the one or more electrodes are divided into two or more electrode portions by one or more gaps between the electrode portions to provide a microphone with a desired sensitivity and capacitance, each pair of the two or more electrode portions are connected in series by a connection via.

14. The radiofrequency module of claim 10 further comprising a bottom electrode interposed between the substrate and the two or more piezoelectric film layers.

15. The radiofrequency module of claim 14 further comprising a middle electrode interposed between two of the two or more piezoelectric film layers.

16. A wireless mobile device comprising:

one or more antennas;

a front end system that communicates with the one or more antennas; and

one or more piezoelectric microelectromechanical systems diaphragm microphones mounted on a substrate layer, each microphone including: a substrate defining an opening between a bottom end of the substrate and a top end of the substrate, two or more piezoelectric film layers disposed over the top end of the substrate and defining a diaphragm structure that is substantially flat, the two or more piezoelectric film layers configured to reduce residual stress of the diaphragm structure, and one or more electrodes disposed over the diaphragm structure, the diaphragm structure configured to deflect when the diaphragm structure is subjected to sound pressure via the opening in the substrate, the diaphragm structure including a through hole that extends from a top surface of the diaphragm structure to a bottom surface of the diaphragm structure, the through hole configured to define a low frequency roll off for the microphone.

17. The wireless mobile device of claim 16 wherein the diaphragm structure has a circular shape, the one or more electrodes disposed over the diaphragm structure include a circumferential electrode disposed over a circumference of the diaphragm structure and a center electrode disposed generally over a center of the diaphragm structure, at least a portion of the center electrode spaced apart from the circumferential electrode.

18. The wireless mobile device of claim 16 wherein the diaphragm structure has a rectangular shape, the one or more

21

electrodes disposed over the diaphragm structure include a plurality of side electrodes disposed adjacent corresponding side edges of the diaphragm structure, the plurality of side electrodes spaced apart from each other and disposed around an area of the diaphragm structure that extends between the 5 plurality of side electrodes.

19. The wireless mobile device of claim **16** wherein each of the one or more electrodes are divided into two or more electrode portions by one or more gaps between the electrode portions to provide a microphone with a desired 10 sensitivity and capacitance, each pair of the one or more electrodes are connected in series by a connection via.

20. The wireless mobile device of claim **16** further comprising a bottom electrode interposed between the substrate and the two or more piezoelectric film layers. 15

* * * * *

22