



US 20250265429A1

(19) **United States**

(12) **Patent Application Publication**  
**WILLIAMS et al.**

(10) **Pub. No.: US 2025/0265429 A1**

(43) **Pub. Date: Aug. 21, 2025**

(54) **COMPUTER CONFIGURED TO DISPLAY  
MULTIMEDIA CONTENT**

(71) Applicant: **Honeywell International Inc.,**  
Charlotte, NC (US)

(72) Inventors: **Timothy WILLIAMS**, Northport, NY  
(US); **Timothy MEIER**, Camillus, NY  
(US)

(21) Appl. No.: **19/204,097**

(22) Filed: **May 9, 2025**

**Related U.S. Application Data**

(63) Continuation of application No. 18/510,745, filed on Nov. 16, 2023, now Pat. No. 12,321,820, which is a continuation of application No. 18/475,816, filed on Sep. 27, 2023, now Pat. No. 11,928,551, which is a continuation of application No. 18/320,551, filed on May 19, 2023, now Pat. No. 11,809,952, which is a continuation of application No. 17/661,214, filed on Apr. 28, 2022, now Pat. No. 11,816,530, which is a continuation of application No. 17/017,841, filed on Sep. 11, 2020, now Pat. No. 11,347,958, which is a continuation of application No. 16/433,452, filed on Jun. 6, 2019, now Pat. No. 10,803,274, which is a continuation of application No. 15/693,659, filed on Sep. 1, 2017, now Pat. No. 10,360,426, which is a continuation of application No. 15/092,963, filed on

Apr. 7, 2016, now Pat. No. 9,754,147, which is a continuation of application No. 14/605,222, filed on Jan. 26, 2015, now Pat. No. 9,311,516, which is a continuation of application No. 13/538,163, filed on Jun. 29, 2012, now Pat. No. 8,944,313.

**Publication Classification**

(51) **Int. Cl.**

**G06K 7/14** (2006.01)

**G06F 16/43** (2019.01)

**G06F 16/955** (2019.01)

**G06K 7/10** (2006.01)


(52) **U.S. Cl.**



CPC ..... **G06K 7/1443** (2013.01); **G06F 16/43**  
(2019.01); **G06F 16/9554** (2019.01); **G06K**  
**7/1439** (2013.01); **G06K 7/1447** (2013.01);  
**G06K 2007/10524** (2013.01)

(57)

**ABSTRACT**

A computer can comprise a housing, a microprocessor disposed within the housing, a display, and a communication interface communicatively coupled to the microprocessor. The computer can be configured, responsive to locating decodable indicia within content viewable on the display, to decode the decodable indicia to produce at least one decoded message. The computer can be further configured to display the content with decoded message data being embedded into the content. The decoded message data can be provided by at least one decoded message, data derived from the decoded message.

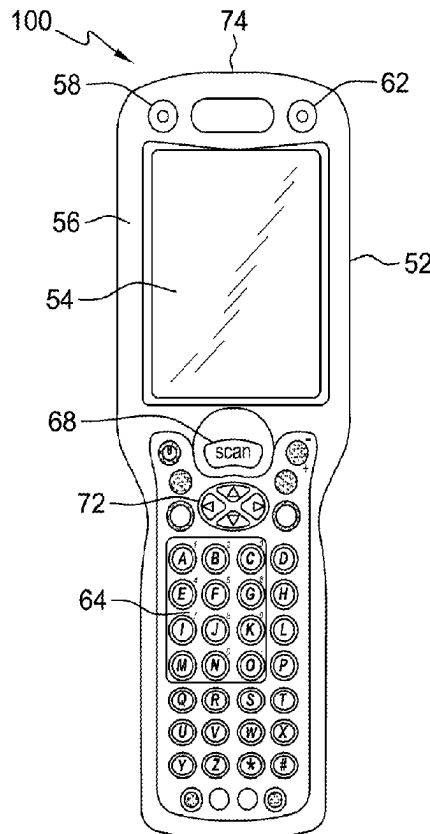

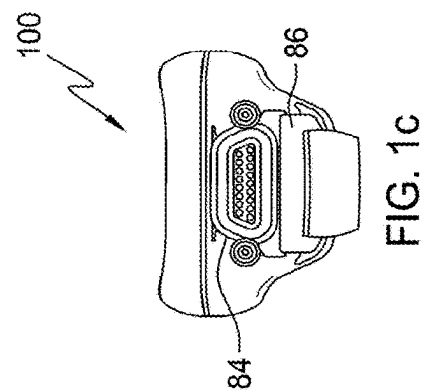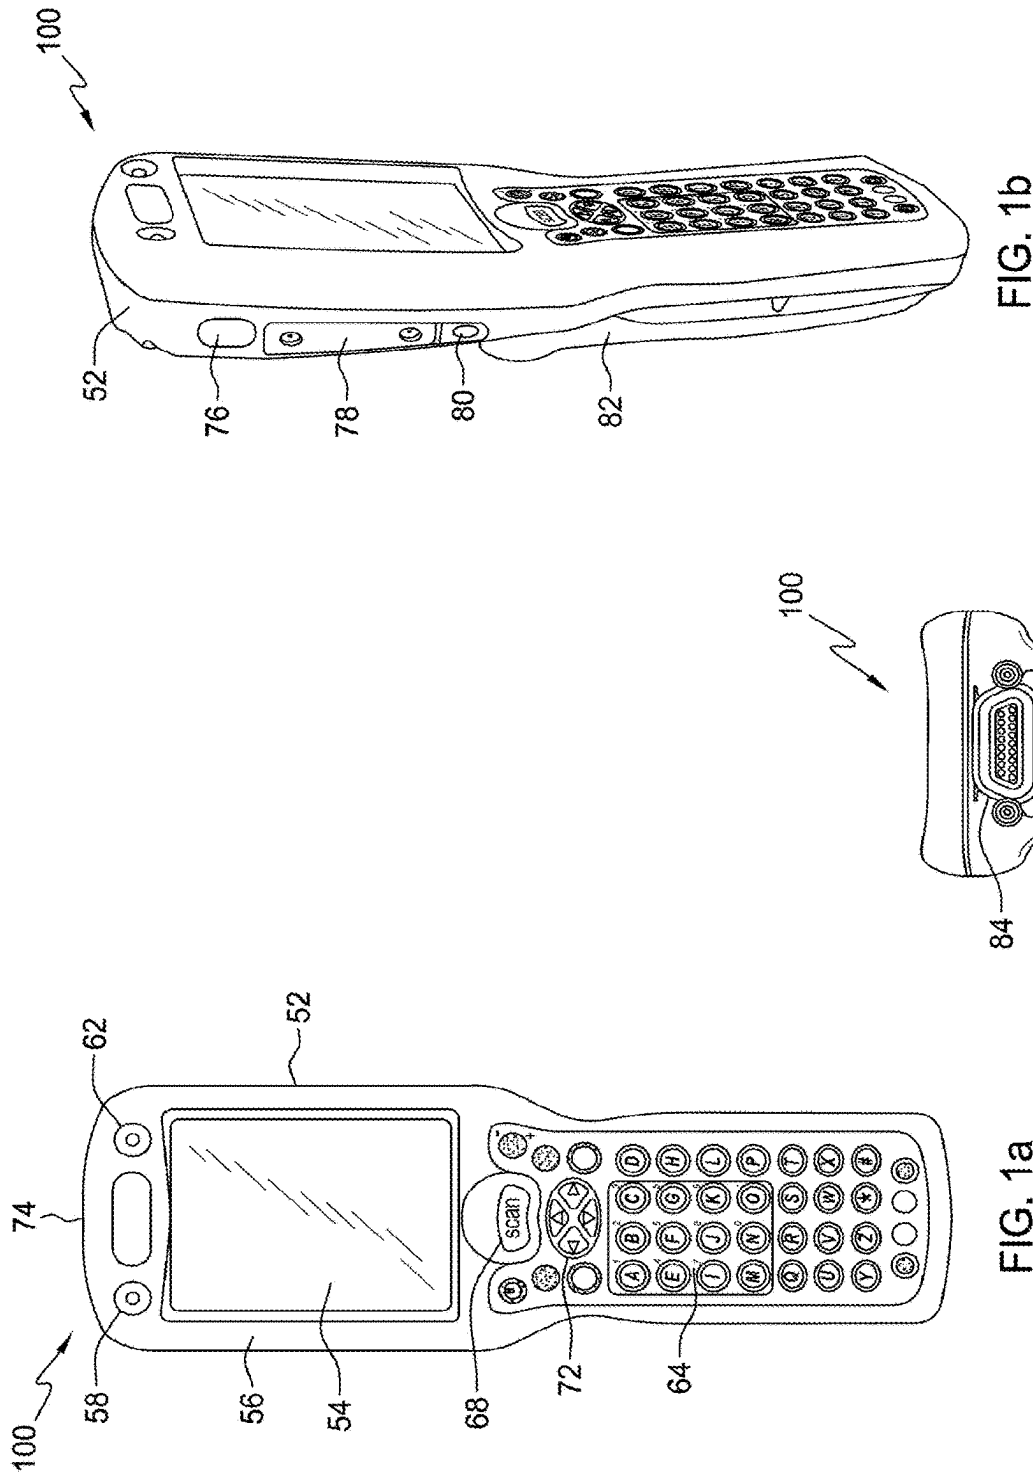

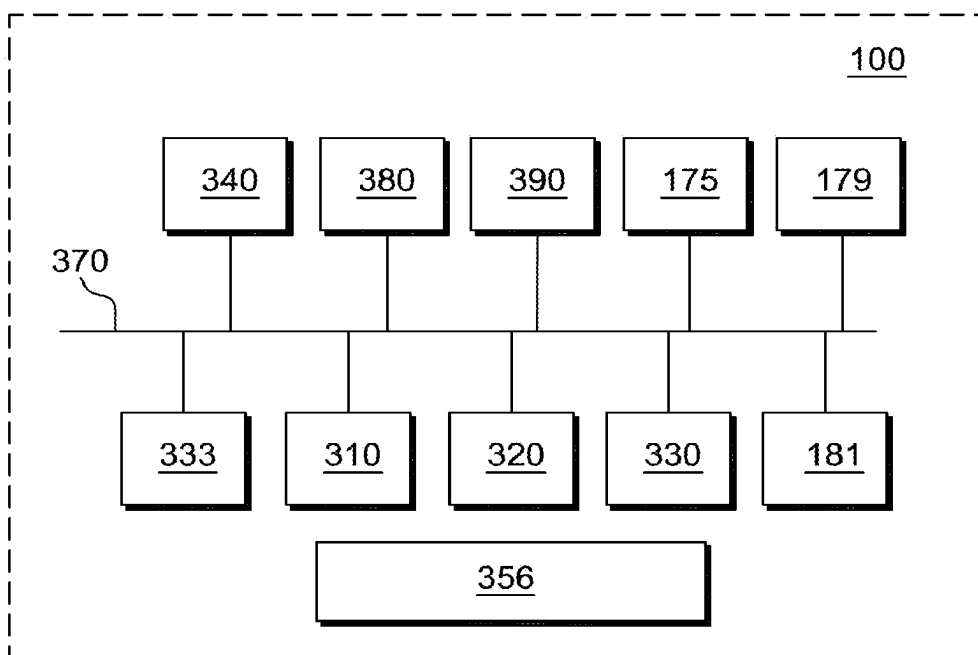


FIG. 2



FIG. 3a



SAMPLE BARCODE

FIG. 3b



SAMPLE BARCODE

FIG. 3c

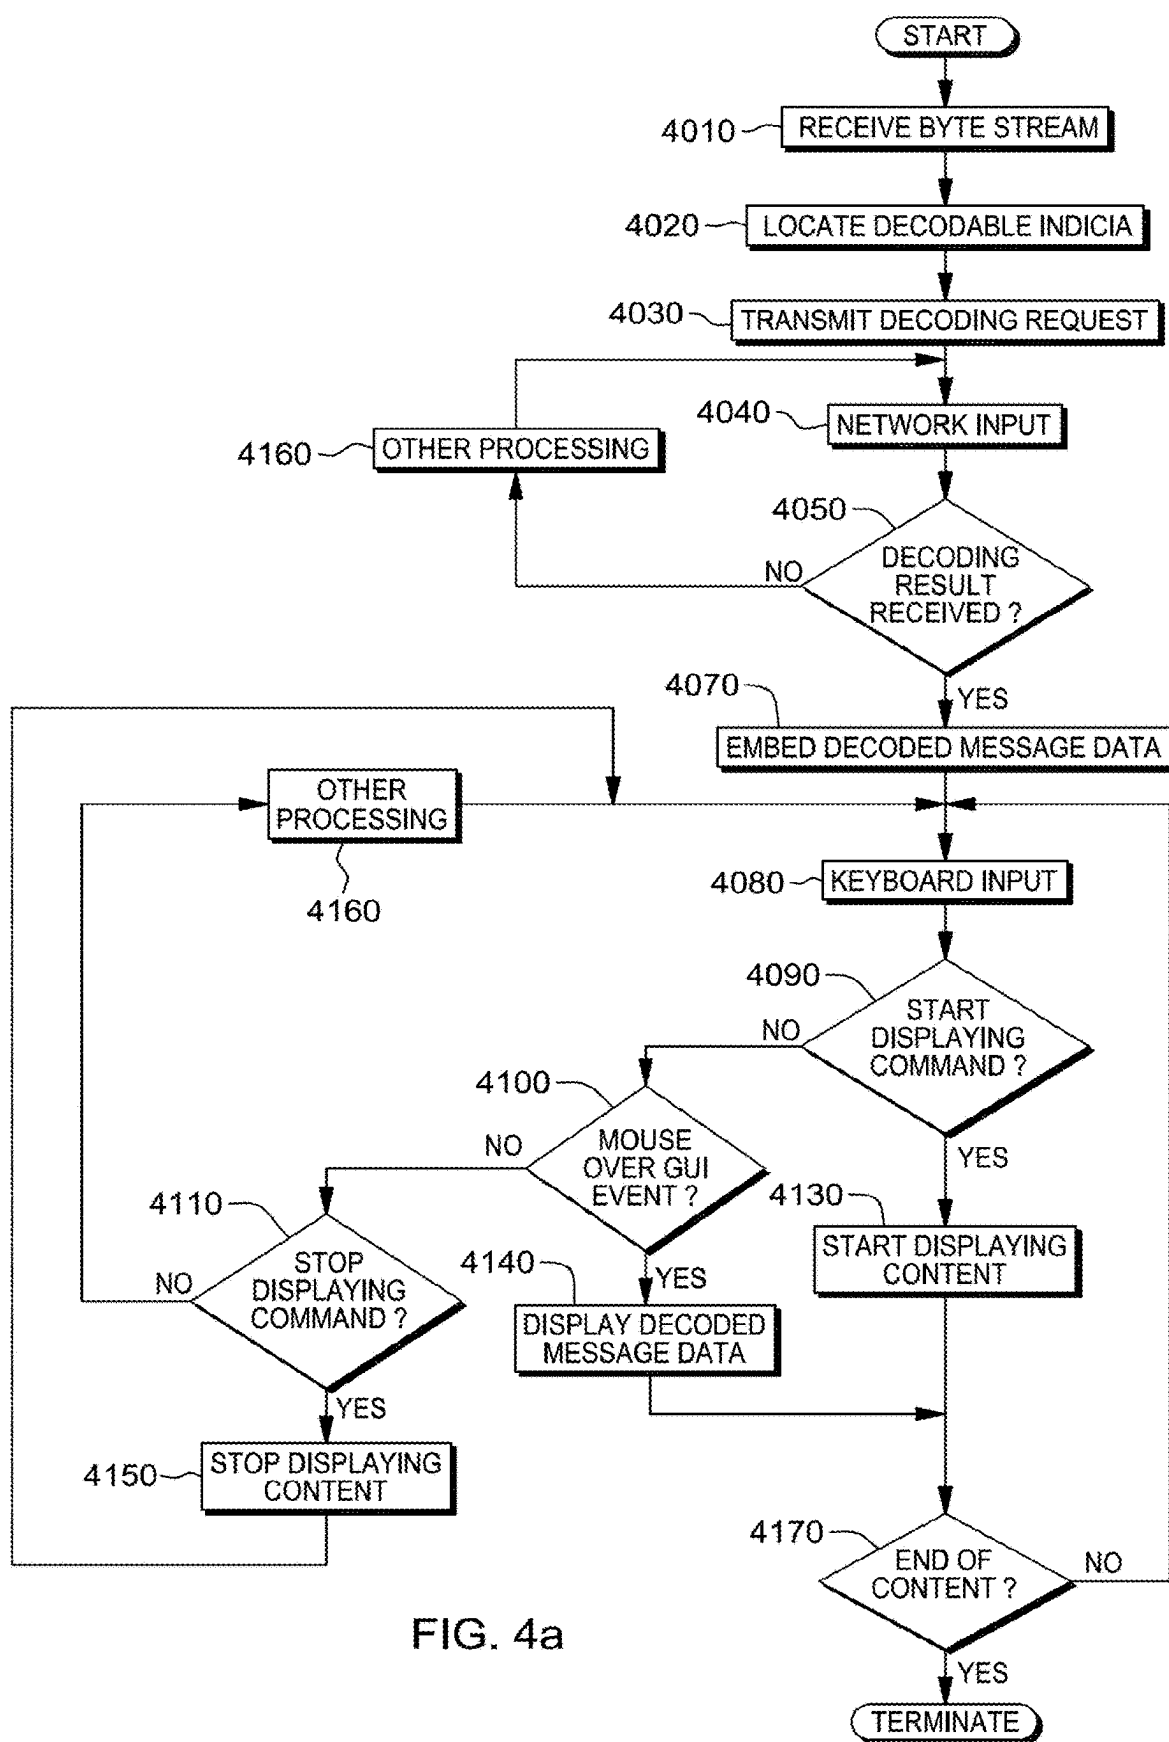


FIG. 4a

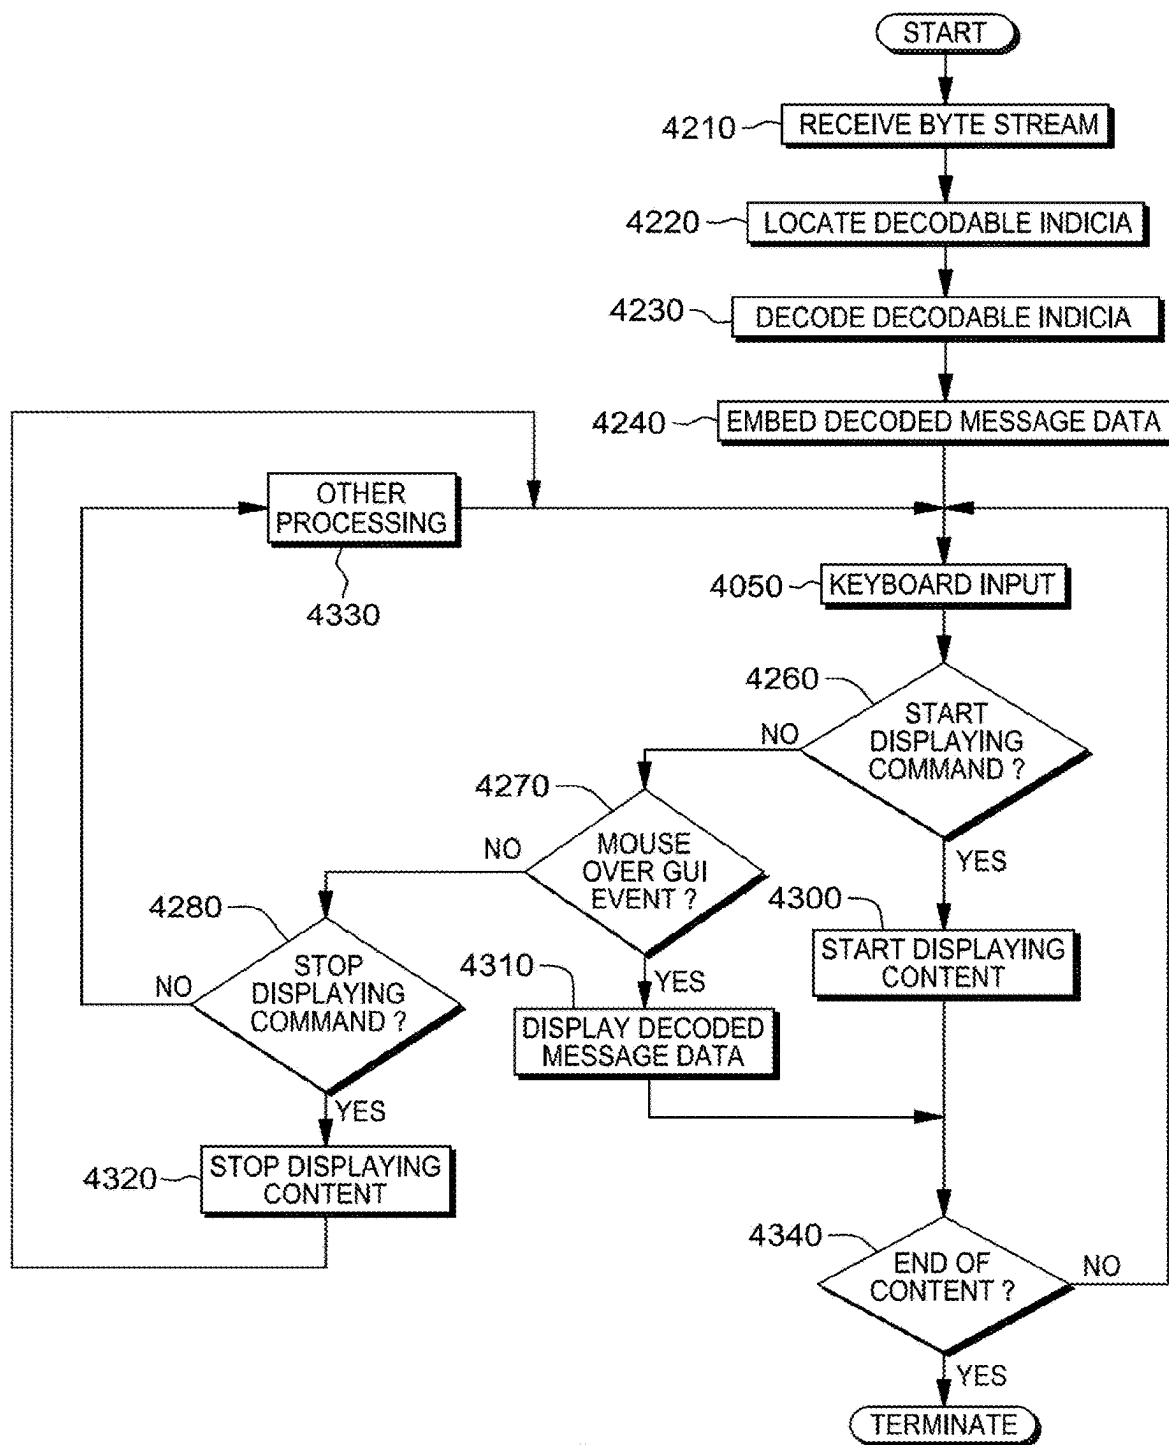


FIG. 4b

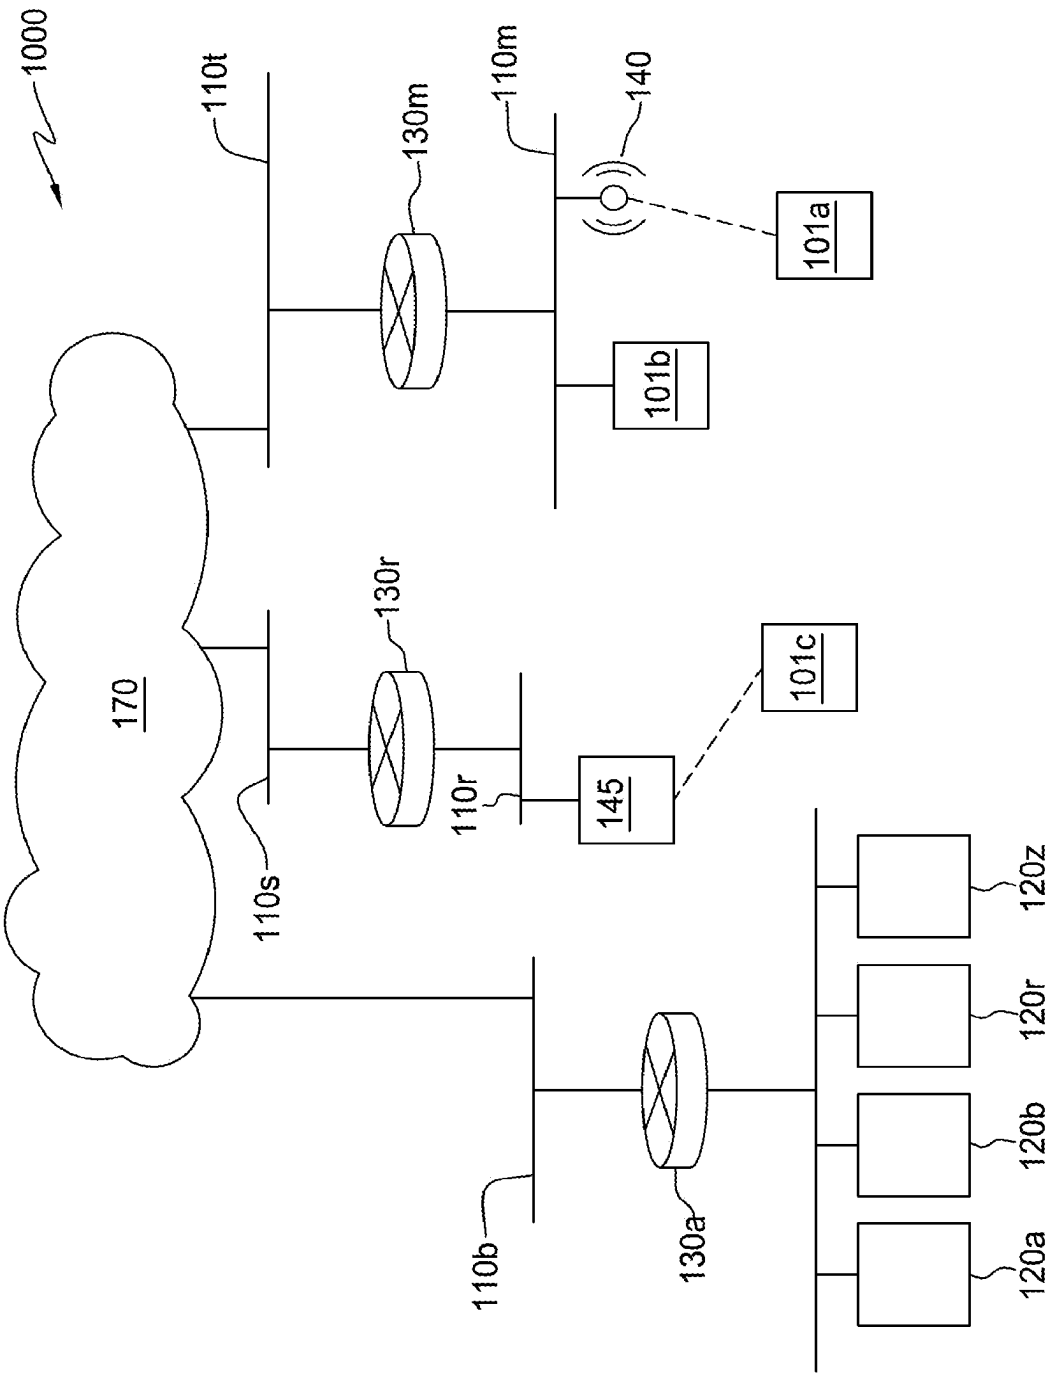


FIG. 5

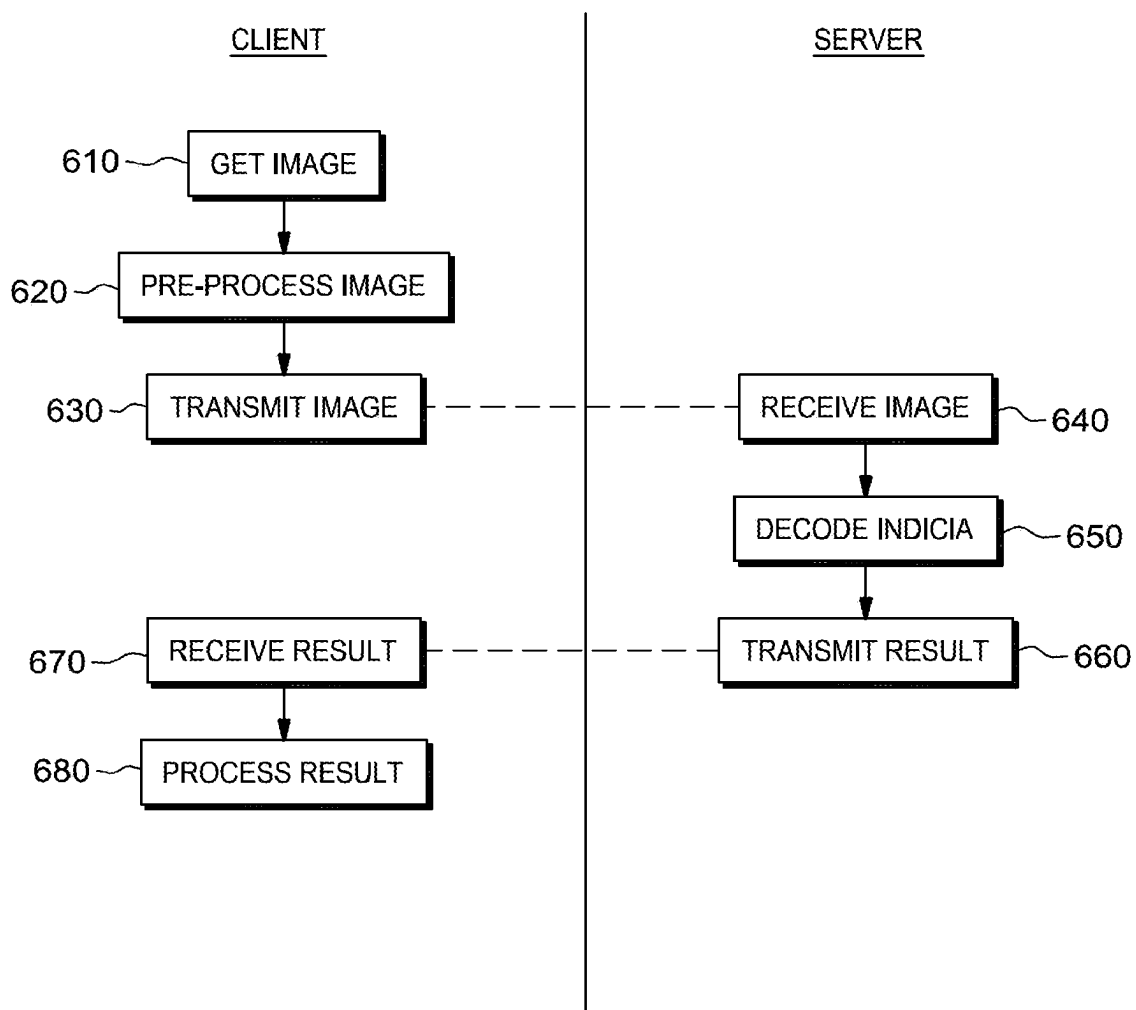


FIG. 6



## COMPUTER CONFIGURED TO DISPLAY MULTIMEDIA CONTENT

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. patent application Ser. No. 18/510,745, filed Nov. 16, 2023, which is a continuation of U.S. patent application Ser. No. 18/475,816, filed Sep. 27, 2023 (now U.S. Pat. No. 11,928,551, issued Mar. 12, 2024), which is a continuation of U.S. patent application Ser. No. 18/320,551, filed May 19, 2023 (now U.S. Pat. No. 11,809,952 issued Nov. 7, 2023), which is a continuation of U.S. patent application Ser. No. 17/661,214, filed Apr. 28, 2022 (now U.S. Pat. No. 11,816,530, issued Nov. 14, 2023), which is a continuation of U.S. patent application Ser. No. 17/017,841, filed Sep. 11, 2020 (now U.S. Pat. No. 11,347,958, issued May 31, 2022), which is a continuation of U.S. patent application Ser. No. 16/433,452, filed Jun. 6, 2019 (now U.S. Pat. No. 10,803,274, issued Oct. 13, 2020), which is a continuation of U.S. patent application Ser. No. 15/693,659, filed Sep. 1, 2017 (now U.S. Pat. No. 10,360,426, issued Jul. 23, 2019), which is a continuation of U.S. patent application Ser. No. 15/092,963, filed Apr. 7, 2016 (now U.S. Pat. No. 9,754,147, issued Sep. 5, 2017), which is a continuation of U.S. patent application Ser. No. 14/605,222, filed Jan. 26, 2015 (now U.S. Pat. No. 9,311,516, issued Apr. 12, 2016), which is a continuation of U.S. patent application Ser. No. 13/538,163, filed Jun. 29, 2012 (now U.S. Pat. No. 8,944,313, issued Feb. 3, 2015), the contents of each of which are incorporated herein by reference in its entirety.

### FIELD OF THE INVENTION

[0002] The present invention relates generally to computers, and in particular to computers configured to display multimedia content.

### BACKGROUND

[0003] Computers equipped with displays (including mobile communication terminals such as smartphones, mobile phones, personal digital assistants, etc.) are widely used for displaying multimedia content, including still images, video streams, document files, etc. The displayed multimedia content can comprise images of optical decodable indicia, e.g., bar codes.

### SUMMARY

[0004] In one embodiment, there is provided a computer comprising a housing, a microprocessor disposed within the housing, a display, and a communication interface communicatively coupled to the microprocessor. The computer can be configured, responsive to locating decodable indicia within content viewable on the display, to decode the decodable indicia to produce at least one decoded message. The computer can be further configured to display the content with decoded message data being embedded into the content. The decoded message data can be provided by a decoded message and/or data derived from the decoded message.

[0005] In a further aspect, the content can be provided by a video stream, an image file, and/or a document file.

[0006] In a further aspect, the computer can be further configured to derive the decoded message data from the decoded message by dereferencing a reference comprised by the decoded message.

[0007] In a further aspect, the computer can be further configured to display the decoded message data responsive to a user interface action received while the content is being displayed.

[0008] In a further aspect, the computer can be further configured to locate the decodable indicia within the content responsive to receiving a byte stream representing the content via the communication interface.

[0009] In a further aspect, the computer can be further configured to display the content responsive to a user interface action.

[0010] In a further aspect, the computer can be further configured to decode the decodable indicia by transmitting at least part of the content to an external computer for decoding.

[0011] In some embodiments, the computer can further comprise an encoded information reading (EIR) device provided by a bar code reading device, an RFID reading device, or a card reading device. In a further aspect, the EIR device can be configured to perform output raw message data containing an encoded message and/or output decoded message data corresponding to an encoded message.

[0012] In a further aspect, the computer can be provided by a smart phone, a mobile phone, a personal digital assistant (PDA), or an EIR terminal.

[0013] In a further aspect, the communication interface can be provided by a wireless communication interface.

[0014] In another embodiment, there is provided a method of displaying content comprising one or more images of decodable indicia by a computer. The method can comprise the steps of locating decodable indicia within content viewable on the display, decoding the decodable indicia to produce at least one decoded message, and displaying the content with decoded message data being embedded into the content. The decoded message data can be provided by at least one decoded message and/or data derived from the decoded message.

[0015] In a further aspect, the content can be provided a video stream, an image file, and/or a document file.

[0016] In a further aspect, the decoded message data can be derived from the decoded message by dereferencing a reference comprised by the decoded message.

[0017] In a further aspect, the step of embedding the decoded message data can comprise visually embedding the decoded message data into the content.

[0018] In a further aspect, the decoded message data can be viewable responsive to a user interface action.

[0019] In a further aspect, the step of locating the decodable indicia can be performed responsive to receiving a byte stream representing the content via the communication interface.

[0020] In a further aspect, the step of displaying the content can be performed responsive to a user interface action.

[0021] In a further aspect, the step of decoding the decodable indicia can be performed by transmitting at least part of the content to an external computer for decoding.

[0022] In a yet another embodiment, there is provided a data decoding system comprising a client computer and one or more servers communicatively coupled to a network. The

servers can execute at least one decoding process. The client computer can be configured, responsive to locating decodable indicia within content viewable on the display, to transmit to at least one server a decoding request comprising at least part of the content. The decoding process can be configured, responsive to receiving the decoding request, to decode the decodable indicia into at least one decoded message. The decoding process can be further configured, responsive to completing a decoding operation, to transmit at least one decoded message and/or a decoding operation completion code to the client computer. The client computer can be further configured to display the content with decoded message data being embedded into the content. The decoded message data can be provided by at least one decoded message and/or data derived from the decoded message.

**[0023]** In a further aspect, the content can be provided a video stream, an image file, and/or a document file.

**[0024]** In a further aspect, the decoded message data can be derived from the decoded message by dereferencing a reference comprised by the decoded message.

**[0025]** In a further aspect, the client computer can be further configured to visually embed the decoded message data into the content.

**[0026]** In a further aspect, the client computer can be further configured to display the decoded message data responsive to a user interface action received while the content can be displayed.

**[0027]** In a further aspect, the client computer can be further configured to display the content responsive to a user interface action.

**[0028]** In some embodiments, the client computer can comprise an encoded information reading (EIR) device provided by a bar code reading device, an RFID reading device, or a card reading device. In a further aspect, the EIR device can be configured to output raw message data containing an encoded message and/or output decoded message data corresponding to an encoded message.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0029]** For the purpose of illustrating the invention, the drawings show aspects of one or more embodiments of the invention. However, it should be understood that the present invention is not limited to the precise arrangements and instrumentalities shown in the drawings, wherein:

**[0030]** FIGS. 1a-1c schematically illustrate one embodiment of a mobile communication terminal described herein;

**[0031]** FIG. 2 depicts a component-level layout of a computer described herein;

**[0032]** FIGS. 3a-3c illustrate various methods of visually embedding decoded message data into multimedia content to be displayed;

**[0033]** FIGS. 4a-4b illustrate flowcharts of various illustrative embodiments of a method of displaying content comprising one or more images of decodable indicia;

**[0034]** FIG. 5 schematically illustrates a component diagram of one embodiment of a data decoding system;

**[0035]** FIG. 6 depicts a flowchart of one embodiment of a method of decodable indicia decoding by the data decoding system.

**[0036]** The drawings are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles of the invention. In the drawings, like numerals are used to indicate like parts throughout the various views.

#### DETAILED DESCRIPTION

**[0037]** A “communication network” or “network” herein shall refer to a set of hardware and software components implementing a plurality of communication channels between two or more computers. A network can be provided, e.g., by a local area network (LAN), or a wide area network (WAN). While different networks can be designated herein, it is recognized that a single network as seen from the network layer of the OSI model can comprise a plurality of lower layer networks, i.e., what can be regarded as a single Internet Protocol (IP) network, can include a plurality of different physical networks.

**[0038]** A “computer” herein shall refer to a programmable device for data processing, including a central processing unit (CPU), a memory, and at least one communication interface. For example, in one embodiment, a computer can be provided by an Intel-based server running Linux operating system. In another embodiment, a computer can be provided by a virtual server, i.e., an isolated instance of a guest operating system running within a host operating system. In a yet another embodiment, a computer can be provided by a mobile communication terminal. In a yet another embodiment, a computer can be provided by an encoded information reading (EIR) terminal. In a yet another embodiment, a computer can be provided by a personal digital assistant (PDA). In a yet another embodiment, a computer can be provided by a smartphone.

**[0039]** A “message” herein shall refer to a byte sequence or a character string comprising alphanumeric and/or non-alphanumeric characters.

**[0040]** A “process” herein shall refer to an instance of a computer program that is being executed; in some operating systems, several processes can be instantiated simultaneously. In some operating systems, several processes can be executed concurrently. In some operating systems, several processes can be instantiated simultaneously from the same computer program.

**[0041]** In one embodiment, there is provided a computer equipped with a display. The computer can be used for displaying multimedia content, including still images, video streams, document files, etc. The content can be downloaded by the computer via a wired or wireless communication interface. Alternatively, the computer can employ its imaging device to acquire moving or still images. The computer can store the downloaded or acquired content in its memory and/or display the content on its display.

**[0042]** Multimedia content displayed by the computer described herein can contain images of optical decodable indicia, e.g., bar codes. To enhance the user’s viewing experience, the computer described herein can be adapted to decode the decodable indicia and visually embed the decoded message or data derived from the decoded message into the multimedia content being displayed. For example, the decoded message or the data derived from the decoded message can be overlaid over the image of the corresponding decodable indicia. In another example, the decoded message can be displayed within a tooltip associated with a screen pointer (e.g., a cursor) responsive to the user’s hovering the pointer over the image of the decodable indicia.

**[0043]** In a further aspect, the computer described herein can be adapted to improve the user’s viewing experience by locating images of decodable indicia within the content and decoding the decodable indicia ahead of the time the content is displayed.

[0044] In a further aspect, the computer can transmit images of decodable indicia to a decoding server for decoding. This can be particularly useful in situations when the computer (e.g., a mobile communication terminal) lacks the processing resources needed to simultaneously display multimedia content and perform decodable indicia decoding. In another illustrative example, the computer can lack one or more software modules implementing methods needed to decode a particular type of decodable indicia. Alternatively, the computer described herein can perform the decoding locally.

[0045] Hence, in one embodiment, there is provided an optical indicia decoding system comprising an imaging client computer (provided, e.g., by a mobile communication terminal) and one or more decoding server computers communicatively coupled to a communication network. The decoding server computers can execute one or more decoding processes.

[0046] The imaging client can locate decodable indicia within the content viewable on the display and to transmit to a decoding server a decoding request comprising at least part of the content. The decoding server, responsive to receiving the decoding request, can decode the decodable indicia into one or more decoded messages and transmit the decoding result to the imaging client. The imaging client can be further configured to visually embed the decoded message or data derived from the decoded message into the multimedia content and display the multimedia content, e.g., responsive to a user interface action.

[0047] As noted herein supra, in some embodiments, the computer described herein can be provided by a mobile communication terminal. One embodiment of the mobile communication terminal is shown in FIGS. 1a (front panel view), 1b (side panel view), and 1c (bottom panel view). The mobile communication terminal 100 can comprise a housing 52 within which other components of mobile communication terminal 100 can be disposed. A display 54 can be embedded into housing 52 and disposed on the front panel 56. Also disposed on the front panel 56 can be a decode LED 58, a scan LED 62, and a keyboard 64 including a scan key 68 and navigation keys 72. An imaging window 74 can be disposed on the top panel of the housing 52. Disposed on the side panel (best viewed in FIG. 1b) can be an infra-red communication port 76, an access door to a secure digital (SD) memory interface 78, an audio jack 80, and a hand strap 82. Disposed on the bottom panel (best viewed in FIG. 1c) can be a multi-pin mechanical connector 84 and a hand strap clip 86. A skilled artisan would appreciate the fact that other types and form factors of mobile communication terminal housings are within the scope of this disclosure.

[0048] FIG. 2 depicts a component-level diagram of one embodiment of a computer described herein. The computer 100 can comprise at least one microprocessor 310 and a memory 320, both coupled to the system bus 370. The microprocessor 310 can be provided by a general purpose microprocessor or by a specialized microprocessor (e.g., an ASIC). In one embodiment, computer 100 can comprise a single microprocessor which can be referred to as a central processing unit (CPU). In another embodiment, computer 100 can comprise two or more microprocessors. A skilled artisan would appreciate the fact that various schemes of processing tasks distribution among two or more microprocessors are within the scope of this disclosure.

[0049] Computer 100 can further comprise a communication interface 340 communicatively coupled to the system bus 370. In one embodiment, the communication interface can be provided by a wireless communication interface. The wireless communication interface can be configured to support, for example, but not limited to, the following protocols: at least one protocol of the IEEE 802.11/802.15/802.16 protocol family, at least one protocol of the HSPA/GSM/GPRS/EDGE protocol family, TDMA protocol, UMTS protocol, LTE protocol, and/or at least one protocol of the CDMA/1xEV-DO protocol family. In a further aspect, the communication interface can be at least partially disposed within housing 52. In some embodiments, wireless communication interface can comprise an antenna which can at least partially be disposed outside of housing 52.

[0050] Computer 100 can further comprise an imaging device 330, provided, for example, by a two-dimensional imager. In some embodiments, a computer 100 can further comprise a graphical user interface including a display adapter 175 and a keyboard 179. In some embodiments, a computer 100 can further comprise an audio output device, e.g., a speaker 181.

[0051] In some embodiments, computer 100 can further comprise an EIR device 333. The EIR device can be provided, for example, by a bar code reading device, an RFID reading device, and/or a card reading device. The EIR device can be configured to output raw message data containing an encoded message and/or output decoded message data corresponding to an encoded message. An encoded message can be used to convey information, such as identification of the source and the model of an item, for example, in a UPC code.

[0052] As noted herein supra, in some embodiments, computer 100 can be provided by a mobile communication terminal. Mobile embodiments of computer 100 can comprise a battery 356. In one embodiment, the battery 356 can be provided by a replaceable rechargeable battery pack. Computer 100 can further comprise a GPS receiver 380. Computer 100 can further comprise at least one connector 390 configured to receive a subscriber identity module (SIM) card.

[0053] As noted herein supra, computer 100 can in one embodiment be configured to download multimedia content containing images of decodable indicia. In some embodiments, computer 100 can employ its imaging device to acquire multimedia content provided by still images and/or video streams. Computer 100 can be further configured to store in its memory the content downloaded via communication interface 340 or acquired using imaging device 330.

[0054] Computer 100 can be further configured to locate the decodable indicia contained within the content and produce a decoded message by decoding the decodable indicia either locally or by transmitting a decoding request to an external decoding server. In one embodiment, computer 100 can perform locating and decoding operations responsive to downloading or acquiring multimedia content. In another embodiment, computer 100 can perform locating and decoding operations within the multimedia content being downloaded or acquired via the imaging device. In a yet another embodiment, computer 100 can perform locating and decoding operations responsive to receiving a user interface action, e.g., a graphical user interface (GUI) command to display multimedia content. In a yet another

embodiment, computer **100** can look ahead and locate decodable indicia within the multimedia content being displayed.

**[0055]** The decoding operation result can comprise the decoding operation completion code and/or the decoded message. The decoding operation completion code can indicate whether the decoding operation was successful or unsuccessful, and in the latter case can further indicate one or more reasons of unsuccessful decoding attempt, e.g., failure to locate decodable indicia, unknown symbology, etc.

**[0056]** Computer **100** can be further configured to display the content responsive to a user interface action or another event (e.g., responsive to acquiring a still image or a video stream). Computer **100** can be further configured to visually embed the decoded message and/or data derived from the decoded message into the multimedia content to be displayed. In one example, the decoded message can be visually overlaid over the image of the corresponding decodable indicia, as schematically shown in FIG. 3a. In another example, schematically illustrated in FIG. 3b, the decoded message can be displayed within a tooltip associated with a screen pointer (e.g., a cursor) responsive to a pre-determined GUI event (e.g., MouseOver event raised responsive to the user's hovering the screen pointer over an image of the decodable indicia) received while the content containing the decodable indicia is being displayed. In a yet another example, responsive to a pre-determined GUI event, the decoded message can be displayed within a status bar or other designated area of the display, as schematically shown in FIG. 3c.

**[0057]** In some embodiments, the decoded message can contain a reference to content that can be retrieved by the computer **100**. For example, the decoded message can contain a uniform resource locator (URL) identifying a resource (e.g., an HTML file) accessible by computer **100** via the Internet. In another example, the decoded message can contain a UPC code, and the corresponding product description can be retrieved by computer **100** from an embedded or external database. Computer **100** can be configured to derive the decoded message data from the decoded message by dereferencing a reference comprised by the decoded message, and to visually embed the data derived from the decoded message (e.g., at least part of the content referenced by the decoded message) into the multimedia content to be displayed. As an example of this, if the decoded message data was a URL, the dereferencing of it may be loading a thumbnail of the webpage referenced by the URL. Another example might be that the decoded message is the UPC code of a particular product, and dereferencing may be loading a thumbnail of a website describing the product or doing a price check on it.

**[0058]** One illustrative embodiment of a method of displaying content comprising one or more images of decodable indicia is now being described with references to the flowchart of FIG. 4a.

**[0059]** Processing commences by the computer receiving, at step **4010**, a byte stream representing multimedia content including still images, video streams, document files, etc. In one embodiment, the computer can download the multimedia content over a communication interface. Alternatively, the computer can employ its imaging device to acquire multimedia content including still images and/or video streams. The received multimedia content can be stored in the memory of the computer.

**[0060]** At step **4020**, the computer can locate one or more decodable indicia within the multimedia content. In one embodiment, the computer can initiate locating operations responsive to downloading or acquiring multimedia content. In another embodiment, the computer can initiate locating operations within the multimedia content being downloaded or acquired via the imaging device. In a yet another embodiment, the computer can initiate locating operations responsive to receiving a user interface action (e.g., a GUI command to display multimedia content). In a yet another embodiment, the computer can look ahead and locate decodable indicia within the multimedia content being displayed. **[0061]** At step **4030**, the computer can transmit a decoding request comprising one or more images of decodable indicia to an external server for decoding.

**[0062]** Upon receiving a decoding result within the communication interface input loop **4040-4050**, the computer can continue processing at step **4070**. The decoding result can comprise the decoding operation completion code and/or the decoded message.

**[0063]** At step **4070**, the computer can embed into the multimedia content the decoded message data provided by the decoded message and/or data derived from the decoded message, as described in details herein supra.

**[0064]** Responsive to receiving, within the GUI input loop **4080-4110**, a GUI command to start displaying the multimedia content, the computer can, at step **4130**, start displaying the content.

**[0065]** Responsive to receiving, within the GUI input loop **4080-4110**, a MouseOver GUI event raised responsive to the user's hovering the screen pointer over an image of decodable indicia, the computer can, at step **4140**, display the decoded message data provided by the decoded message and/or data derived from the decoded message within a tooltip associated with the screen pointer.

**[0066]** Responsive to receiving, within the GUI input loop **4080-4110**, a GUI command to stop displaying the multimedia content, the computer can, at step **4150**, stop displaying the multimedia content.

**[0067]** Either waiting for a decoding result during the Network Input loop **4040-4050** or responsive to receiving, within the GUI input loop **4080-4110**, a GUI command not identified above, the computer can, at step **4160**, process the received command, or perform other processing as necessary.

**[0068]** Responsive to establishing at step **4170** that the multimedia content has been fully displayed, the processing can terminate.

**[0069]** Another illustrative embodiment of a method of displaying content comprising one or more images of decodable indicia is now being described with references to the flowchart of FIG. 4b.

**[0070]** Processing commences by the computer receiving, at step **4210**, a byte stream representing multimedia content including still images, video streams, document files, etc. In one embodiment, the computer can download the multimedia content over a communication interface. Alternatively, the computer can employ its imaging device to acquire multimedia content including still images and/or video streams. The received multimedia content can be stored in the memory of the computer.

**[0071]** At step **4220**, the computer can locate one or more decodable indicia within the multimedia content. In one embodiment, the computer can initiate locating operations

responsive to downloading or acquiring multimedia content. In another embodiment, the computer can initiate locating operations within the multimedia content being downloaded or acquired via the imaging device. In a yet another embodiment, the computer can initiate locating operations responsive to receiving a user interface action (e.g., a GUI command to display multimedia content). In a yet another embodiment, the computer can look ahead and locate decodable indicia within the multimedia content being displayed.

**[0072]** At step **4230**, the computer can decode the decodable indicia to produce a decoding result comprising the decoding operation completion code and/or the decoded message.

**[0073]** At step **4240**, the computer can embed into the multimedia content the decoded message data provided by the decoded message and/or data derived from the decoded message, as described in details herein supra.

**[0074]** Responsive to receiving, within the GUI input loop **4250-4280**, a GUI command to start displaying the multimedia content, the computer can, at step **4300**, start displaying the content.

**[0075]** Responsive to receiving, within the GUI input loop **4250-4280**, a MouseOver GUI event raised responsive to the user's hovering the screen pointer over an image of decodable indicia, the computer can, at step **4310**, display the decoded message data provided by the decoded message and/or data derived from the decoded message within a tooltip associated with the screen pointer.

**[0076]** Responsive to receiving, within the GUI input loop **4250-4280**, a GUI command to stop displaying the multimedia content, the computer can, at step **4320**, stop displaying the multimedia content.

**[0077]** Responsive to receiving, within the GUI input loop **4250-4280**, a GUI command not identified above, the computer can, at step **4330**, process the received command, or perform other processing as necessary.

**[0078]** Responsive to establishing at step **4340** that the multimedia content has been fully displayed, the processing can terminate.

**[0079]** The above described method of displaying content comprising one or more images of decodable indicia can, in one embodiment, be implemented within a plug-in for a content viewing program, such as an Internet browser. In another embodiment, the above described method can be implemented as an integral part of a content viewing program. A skilled artisan would appreciate the fact that various implementations of the above described method are within the scope of this disclosure.

**[0080]** FIG. 5 schematically illustrates one embodiment of a decoding system described herein. The decoding system **1000** can comprise a plurality of decoding servers **120a-120z** communicatively coupled to a network **110a**. Network **110a** can be provided, e.g., by Ethernet-based local area network, and can be communicatively coupled to the Internet **170** via one or more routers **130a** and/or one or more networks **110b**. An imaging client **101a** can be provided, e.g., by a mobile communication terminal communicatively coupled to a local area network **110m** via a wireless access point **140**. Network **110m** can be communicatively coupled to the Internet **170** via one or more routers **130m** and/or one or more networks **110t**. An imaging client **101b** can be provided by an EIR terminal mounted into a POS workstation and can be communicatively coupled to the local area network **110m** via an Ethernet communication interface. An

imaging client **101c** can be provided by a smart phone communicatively coupled to a provider's network **110r** via a GSM/GPRS base station **145**. Network **110r** can be communicatively coupled to the Internet **170** via one or more routers **130r** and/or one or more networks **110s**.

**[0081]** In one embodiment, the decoding system **1000** can follow a cloud computing model, by providing an on-demand network access to a shared pool of configurable computing resources (e.g., servers, storage, applications, and/or services) that can be rapidly provisioned and released with minimal or no resource management effort, including interaction with the service provider, by the consumer (operator of a thin client). One characteristic of the cloud computing model is that a consumer can unilaterally provision computing capabilities, such as CPU power and storage capacity on the network, as needed automatically without requiring human interaction with the service's provider. The resources of the cloud can be accessed by thin clients over a network.

**[0082]** In another aspect, imaging clients can access cloud-based decoding applications executed by computers **120a-120z** via a single point of entry, e.g., via a single IP address or uniform resource identifier (URI). In one embodiment, the single point of entry IP address can be assigned to a load balancing component provided, e.g., by router **130a** or by a dedicated load balancer **120r**. In another embodiment, the single point of entry URI can include a fully-qualified host name resolvable by a DNS server into one or more IP addresses of computers **120a-120z**. In a yet another embodiment, the single point of entry URI can include a fully-qualified host name resolvable by a DNS server into an IP address of the dedicated load balancer **120r** which can act as a server-side HTTP proxy by forwarding HTTP requests from the imaging clients **101a-101c** to HTTP processes running on the decoding computers **120a-120z**. The server-side HTTP proxy can preserve HTTP or application-level sessions by forwarding all TCP packets from one client to the same server. Thus, an imaging client accessing the cloud-based decoding applications can be agnostic with respect to the number of computers **120a-120z**, topology of the local area networks **110a-110b**, aspects of load balancing among the computers **120a-120z** and other server-side implementation details.

**[0083]** For preventing unauthorized access to the cloud-based decoding services, decoding system **1000** can require an imaging client to be authenticated before processing any decoding requests.

**[0084]** In a further aspect, a decoding process can, responsive to completing a decoding operation, transmit the decoding operation result including decoded message data and/or the decoding operation completion code to the imaging client. The decoding operation completion code can, in one embodiment, contain a flag indicating whether the decoding operation was successful. In another embodiment, the decoding operation completion code can contain the number of decoding attempts performed. In a yet another embodiment, the decoding operation completion code can contain an extended error code indicating the reason for the decoding operation failure, for example, failed to locate decodable indicia, decodable indicia symbol truncated, insufficient image resolution, etc.

**[0085]** In another aspect, the imaging client can be provided by a large variety of imaging devices. In one embodiment, the imaging client can be provided by a mobile

computing device (e.g., a smartphone or an encoded information reading (EIR) terminal) comprising an integrated imaging device or a peripheral imaging device. An integrated imaging device can be provided, e.g., by a two-dimensional imager incorporated into the housing of the mobile computing device and communicatively coupled to other components of the mobile computing device, including, e.g., a data bus, a processor, or a communication interface. A peripheral imaging device can be provided, e.g., by a still image or video camera disposed in a separate housing and communicatively coupled to the mobile computing device (e.g., via Bluetooth interface).

[0086] In another embodiment, the imaging client can be provided by a general purpose computing device (e.g., a notebook computer or a desktop computer) comprising an integrated imaging device or a peripheral imaging device. In a yet another embodiment, the imaging client can be provided by a computing device by a computing device integrated into a POS system (e.g., a retail cashier's workstation) comprising an integrated imaging device or a peripheral imaging device.

[0087] FIG. 6 depicts a flowchart of one embodiment of a method of decodable indicia decoding by the above described data decoding system.

[0088] At step 610, an imaging client can acquire an image containing decodable indicia.

[0089] At step 620, the imaging client can pre-process the acquired image. In one embodiment, the pre-processing can comprise filtering images based on the image quality, as described in details herein supra. In another embodiment, the pre-processing can include scaling the acquired image, as described in details herein supra. In a further aspect, the pre-processing parameters can be dynamically adjusted based on one or more decoding operation completion codes received by the imaging client from a decoding server.

[0090] At step 630, the imaging client can transmit the pre-processed image to a decoding server over a communication network.

[0091] At steps 640-650, responsive to receiving the image, the decoding server can locate and decode the decodable indicia.

[0092] At step 660, the decoding server can transmit the decoding result to the imaging client over a communication network. In one embodiment, the decoding result can include one or more decoded messages and/or one or more decoding operation completion codes. The decoding operation completion code can contain a flag indicating whether the decoding operation was successful. In one embodiment, the decoding operation completion code can contain an extended error code indicating the reason for the decoding operation failure, for example, failed to locate decodable indicia, decodable indicia symbol truncated, insufficient image resolution, etc.

[0093] At steps 670-680, responsive to receiving the decoding result the imaging client can process the result, e.g., by displaying the decoded message and/or transmitting the decoded message to an external computer (e.g., transmitting a retail item identifier to a store server to retrieve the product information). After processing the decoding result at step 4080, the method can terminate.

[0094] While the present invention has been particularly shown and described with reference to certain exemplary embodiments, it will be understood by one skilled in the art that various changes in detail may be affected therein

without departing from the spirit and scope of the invention as defined by claims that can be supported by the written description and drawings. Further, where exemplary embodiments are described with reference to a certain number of elements it will be understood that the exemplary embodiments can be practiced utilizing less than the certain number of elements.

[0095] A small sample of systems, methods, and apparatus that are described herein is as follows:

[0096] A1. A computer comprising:

[0097] a housing;

[0098] a microprocessor disposed within said housing;

[0099] a display;

[0100] a communication interface communicatively coupled to said microprocessor, said communication interface at least partially disposed within said housing;

[0101] wherein said computer is configured, responsive to locating decodable indicia within content viewable on said display, to decode said decodable indicia to produce at least one decoded message;

[0102] wherein said computer is further configured to display said content with decoded message data being embedded into said content;

[0103] wherein said decoded message data is provided by at least one of: said at least one decoded message, data derived from said at least one decoded message.

[0104] A2. The computer of (A1), wherein said content is provided by at least one of: a video stream, an image file, a document file.

[0105] A3. The computer of (A1), further configured to derive said decoded message data from said at least one decoded message by dereferencing a reference comprised by said decoded message.

[0106] A4. The computer of (A1), further configured to display said decoded message data responsive to a user interface action received while said content is being displayed.

[0107] A5. The computer of (A1), further configured to locate said decodable indicia within said content responsive to receiving a byte stream representing said content via said communication interface.

[0108] A6. The computer of (A1), further configured to display said content responsive to a user interface action.

[0109] A7. The computer of (A1), further configured to decode said decodable indicia by transmitting at least part of said content to an external computer for decoding.

[0110] A8. The computer of (A1), further comprising an encoded information reading (EIR) device selected from the group consisting of: a bar code reading device, an RFID reading device, and a card reading device;

[0111] wherein said EIR device is configured to perform at least one of: outputting raw message data containing an encoded message and outputting decoded message data corresponding to an encoded message.

[0112] A9. The computer of (A1), wherein said computer is provided by one of: a Personal Computer, a Macintosh, an EIR terminal, a smart phone, a mobile phone, and a personal digital assistant (PDA).

[0113] A10. The computer of (A1), wherein said communication interface is provided by a wireless communication interface.

[0114] B1. A method of displaying content comprising one or more images of decodable indicia by a computer, said method comprising the steps of:

[0115] locating decodable indicia within content viewable on said display;

[0116] decoding said decodable indicia to produce at least one decoded message; and

[0117] displaying said content with decoded message data being embedded into said content;

[0118] wherein said decoded message data is provided by at least one of: said at least one decoded message, data derived from said at least one decoded message.

[0119] B2. The method of (B1), wherein said content is provided by at least one of: a video stream, an image file, a document file.

[0120] B3. The method of (B1), wherein said decoded message data is derived from said at least one decoded message by dereferencing a reference comprised by said decoded message.

[0121] B4. The method of (B1), wherein said step of embedding said decoded message data comprises visually embedding said decoded message data into said content.

[0122] B5. The method of (B1), wherein said decoded message data is viewable responsive to a user interface action.

[0123] B6. The method of (B1), wherein said step of locating said decodable indicia is performed responsive to receiving a byte stream representing said content via said communication interface.

[0124] B7. The method of (B1), wherein said step of displaying said content is performed responsive to a user interface action.

[0125] B8. The method of (B1), wherein said step of decoding said decodable indicia is performed by transmitting at least part of said content to an external computer for decoding.

[0126] C1. A data decoding system comprising a client computer and one or more server computers communicatively coupled to a network, said one or more server computers executing at least one decoding process;

[0127] wherein said client computer is configured, responsive to locating decodable indicia within content viewable on said display, to transmit a decoding request comprising at least part of said content to said one or more servers;

[0128] wherein said at least one decoding process is configured, responsive to receiving said decoding request, to decode said decodable indicia into at least one decoded message;

[0129] wherein said at least one decoding process is further configured, responsive to completing a decoding operation, to transmit at least one of: said at least one decoded message, a decoding operation completion code to said client computer;

[0130] wherein said client computer is further configured to display said content with decoded message data being embedded into said content; and

[0131] wherein said decoded message data is provided by at least one of: said at least one decoded message, data derived from said at least one decoded message.

[0132] C2. The data decoding system of (C1), wherein said content is provided by at least one of: a video stream, an image file, a document file.

[0133] C3. The data decoding system of (C1), wherein said client computer is configured to derive said decoded

message data from said at least one decoded message by dereferencing a reference comprised by said decoded message.

[0134] C4. The data decoding system of (C1), wherein said client computer is further configured to visually embed said decoded message data into said content.

[0135] C5. The data decoding system of (C1), wherein said client computer is further configured to display said decoded message data responsive to a user interface action received while said content is displayed.

[0136] C6. The data decoding system of (C1), wherein said client computer is further configured to display said content responsive to a user interface action.

[0137] C7. The data decoding system of (C1), wherein said client computer comprises an encoded information reading (EIR) device selected from the group consisting of: a bar code reading device, an RFID reading device, and a card reading device;

[0138] wherein said EIR device is configured to perform at least one of: outputting raw message data containing an encoded message and outputting decoded message data corresponding to an encoded message.

1. An apparatus comprising:

a microprocessor;

a graphical user interface comprising a display unit, the graphical user interface and the display unit are communicatively coupled to the microprocessor;

a communication interface communicatively coupled to the microprocessor,

wherein, the microprocessor is configured to:

locate a decodable indicia within a content stream;

decode the decodable indicia to produce a decoding result;

display the decodable indicia and the content stream on the display unit;

receive a first user action through the communication interface, and in response to the first user action, the microprocessor is further configured to display the decoding result as an overlay on the display unit; and receive a second user action through the communication interface, and in response to the second user action, the microprocessor is configured to halt display of the decoding result.

2. The apparatus of claim 1, wherein in response to the first user action, the microprocessor is further configured to select the decodable indicia.

3. The apparatus of claim 2, wherein in response to the first user action, the microprocessor is further configured to generate a flag based on the decoding result obtained based on decoding of the decodable indicia.

4. The apparatus of claim 3, wherein in response to the first user action, the microprocessor is further configured to display the flag as an overlay on the display unit.

5. The apparatus of claim 3, wherein the flag is indicative of a decoding status of the decodable indicia.

6. The apparatus of claim 1, wherein the decoding result comprises a multimedia content that represents a thumbnail image of an item.

7. The apparatus of claim 1, wherein at least one of the first user action or the second user action is selected from the group consisting of a tooltip display enacted with a cursor and a MouseOver event enacting with a hovering pointer on the display.

**8.** A method comprising:  
locating, using a microprocessor, a decodable indicia within a content stream;  
decoding, using the microprocessor, the decodable indicia to produce a decoding result;  
display the decodable indicia and the content stream on a display unit;  
receiving, through a communication interface, a first user action, and in response to the first user action, the method further comprises displaying the decoding result as an overlay on the display unit; and  
receiving, through the communication interface, a second user action to halt display of the decoding result.

**9.** The method of claim **8**, wherein in response to the first user action, the method further comprises, selecting the decodable indicia.

**10.** The method of claim **9**, wherein in response to the first user action, the method further comprises, generating a flag based on the decoding result obtained based on decoding of the decodable indicia.

**11.** The method of claim **10**, wherein in response to the first user action, the method further comprises, displaying the flag as an overlay on the display unit.

**12.** The method of claim **10**, wherein the flag is indicative of a decoding status of the decodable indicia.

**13.** The method of claim **8**, wherein the decoding result comprises a multimedia content that represents a thumbnail image of an item.

**14.** The method of claim **8**, wherein at least one of the first user action or the second user action is selected from the group consisting of a tooltip display enacted with a cursor and a MouseOver event enacting with a hovering pointer on the display unit.

\* \* \* \* \*