



US 20250266978A1

(19) **United States**

(12) **Patent Application Publication**
Bowler et al.

(10) **Pub. No.: US 2025/0266978 A1**

(43) **Pub. Date: Aug. 21, 2025**

(54) **FULL DUPLEX EXPANDER IN A FULL
DUPLEX NETWORK**

Publication Classification

(71) Applicant: **ARRIS Enterprises LLC**, Horsham,
PA (US)

(72) Inventors: **David B. Bowler**, Stow, MA (US);
Clarke V. Greene; **Ayham Al-Banna**,
Irving, TX (US)

(73) Assignee: **ARRIS Enterprises LLC**, Horsham,
PA (US)

(21) Appl. No.: **19/198,685**

(22) Filed: **May 5, 2025**

(51) **Int. Cl.**

H04L 5/14 (2006.01)

H03F 3/62 (2006.01)

H04B 1/48 (2006.01)

H04B 1/54 (2006.01)

H04B 3/32 (2006.01)

H04B 3/36 (2006.01)

H04L 12/28 (2006.01)

(52) **U.S. Cl.**

CPC **H04L 5/14** (2013.01); **H03F 3/62**
(2013.01); **H04B 1/54** (2013.01); **H04B 3/36**
(2013.01); **H04L 12/2801** (2013.01); **H04B**
1/48 (2013.01); **H04B 3/32** (2013.01)


Related U.S. Application Data

(63) Continuation of application No. 18/421,466, filed on
Jan. 24, 2024, now Pat. No. 12,316,581, which is a
continuation of application No. 18/119,728, filed on
Mar. 9, 2023, now Pat. No. 11,916,850, which is a
continuation of application No. 17/171,293, filed on
Feb. 9, 2021, now Pat. No. 11,616,632, which is a
continuation of application No. 15/845,054, filed on
Dec. 18, 2017, now Pat. No. 10,924,253.

(57)

ABSTRACT

In one embodiment, a method receives a downstream signal
and an upstream signal in a same frequency band. The
downstream signal and the upstream signal are separated
into a first path and a second path. The downstream signal
using the first path and the upstream signal using the second
path are amplified in an analog domain. The method isolates
the downstream signal and the upstream signal from one
another and sends the downstream signal downstream to a
subscriber device and sends the upstream signal towards a
full duplex node.

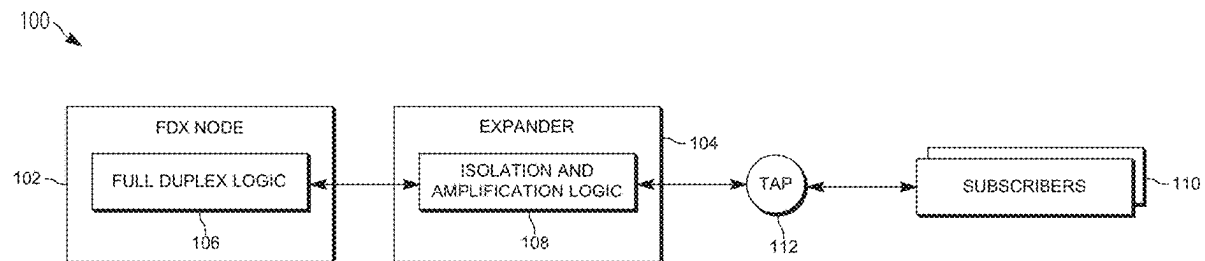

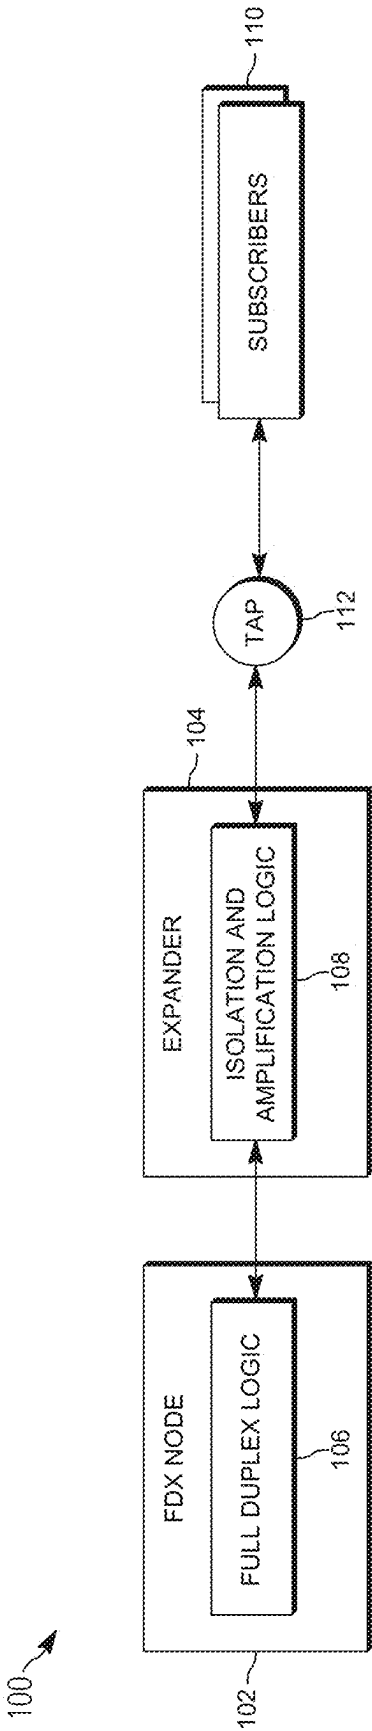


FIG. 1

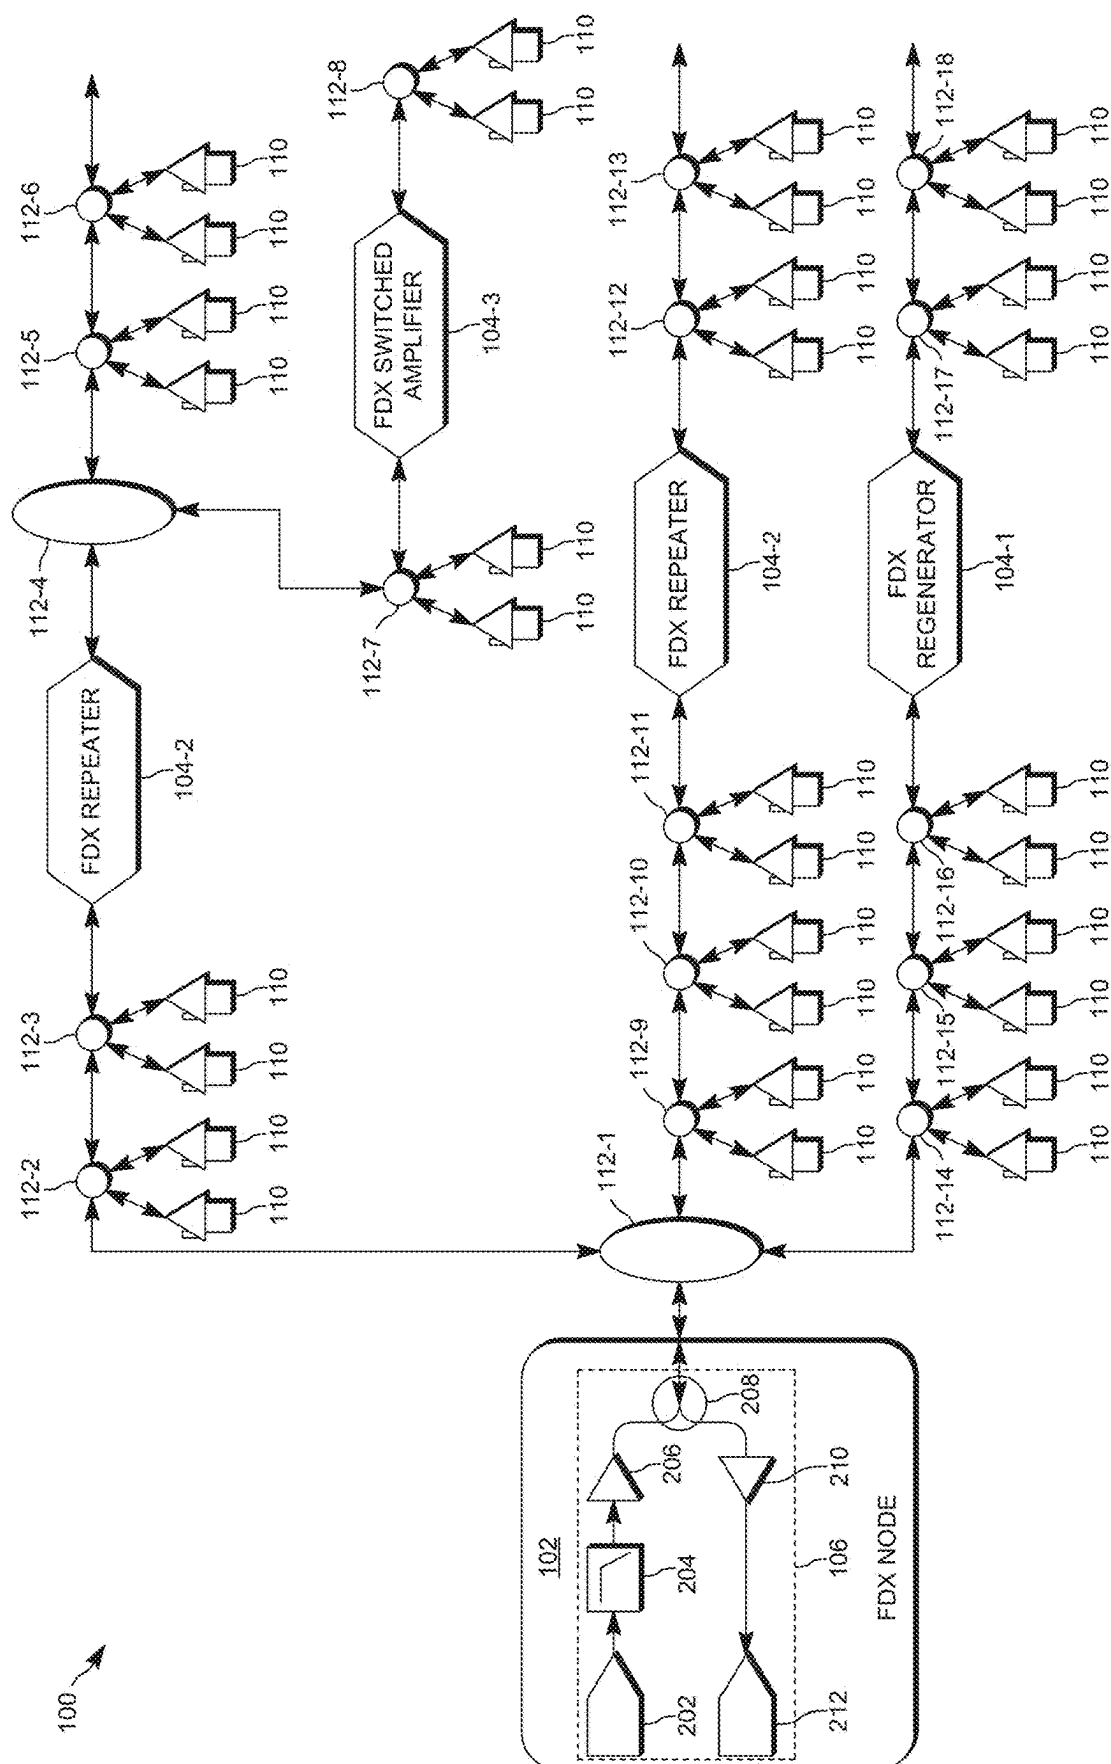


FIG. 2

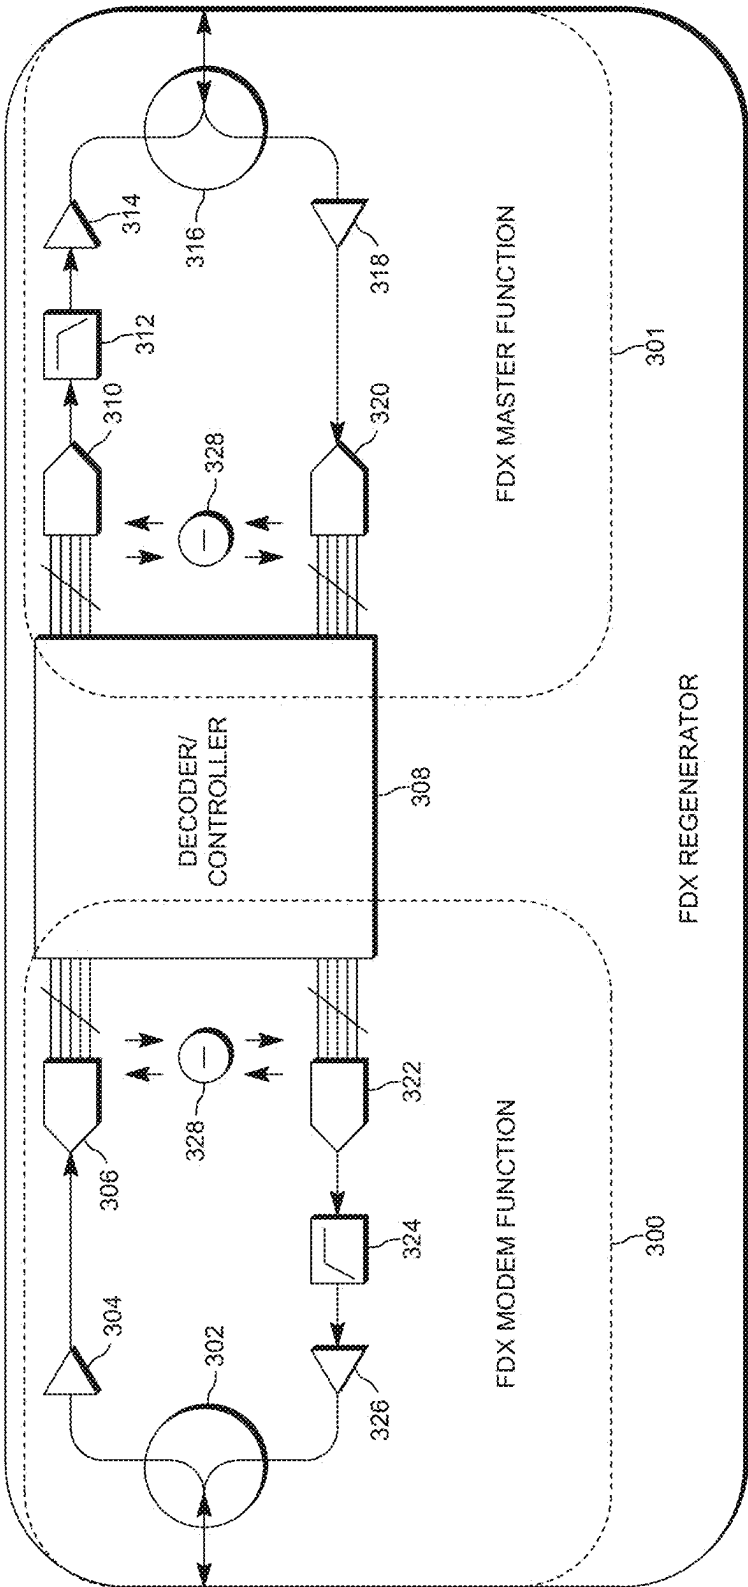


FIG. 3

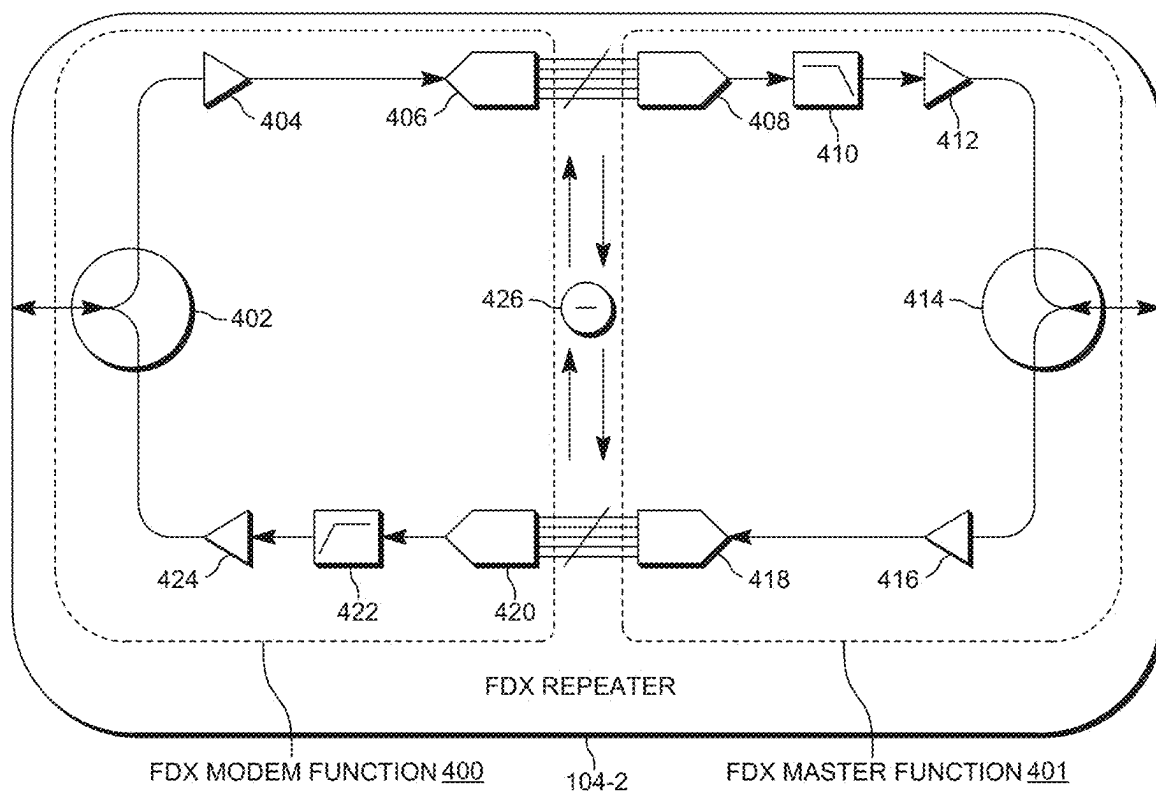


FIG. 4

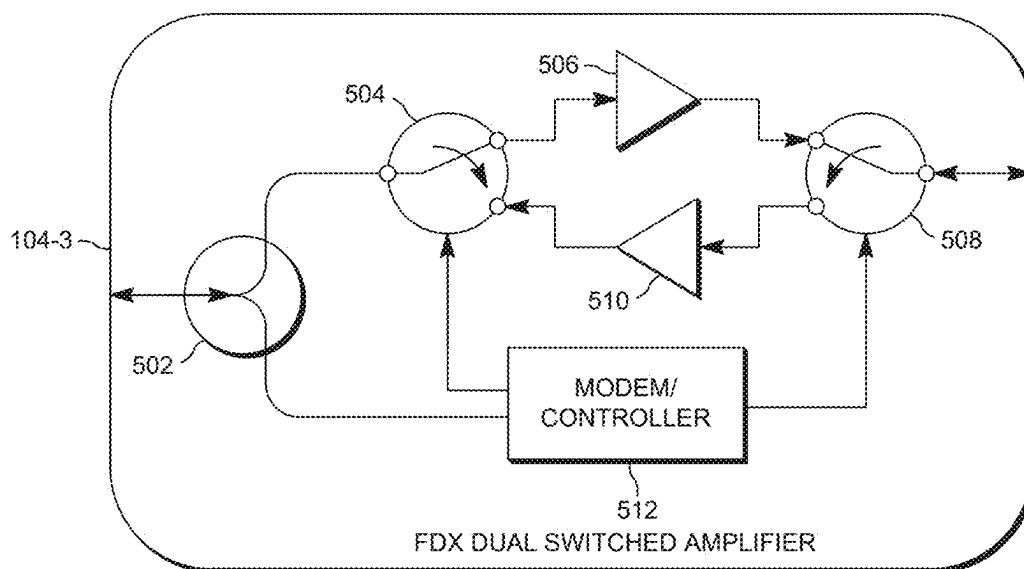


FIG. 5A

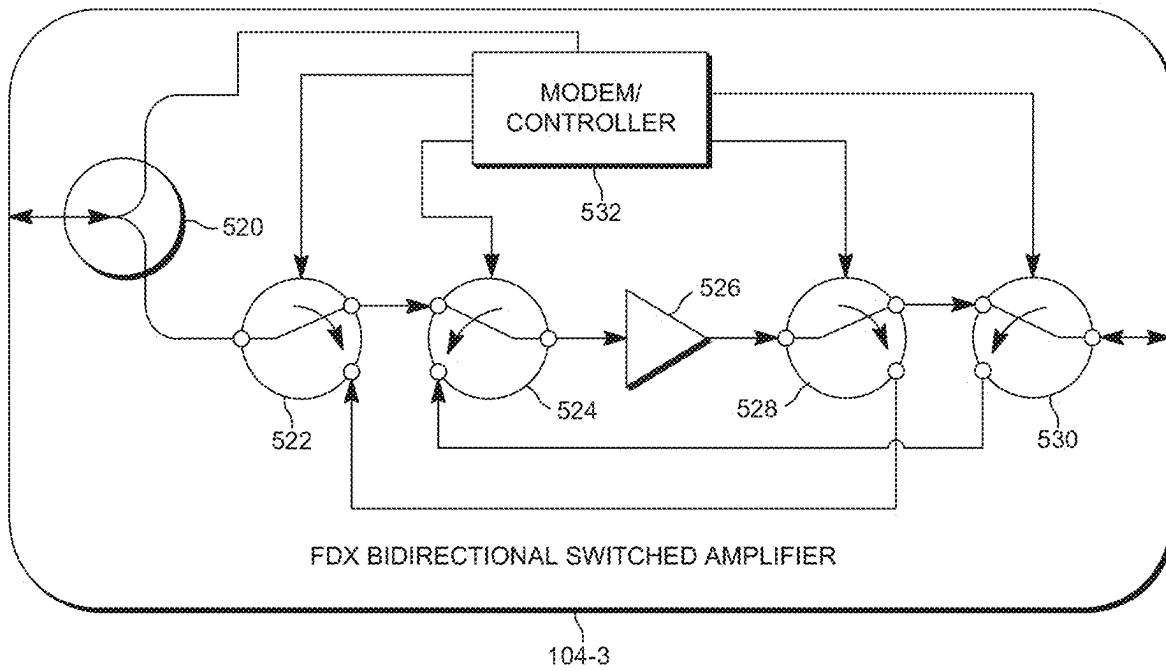


FIG. 5B

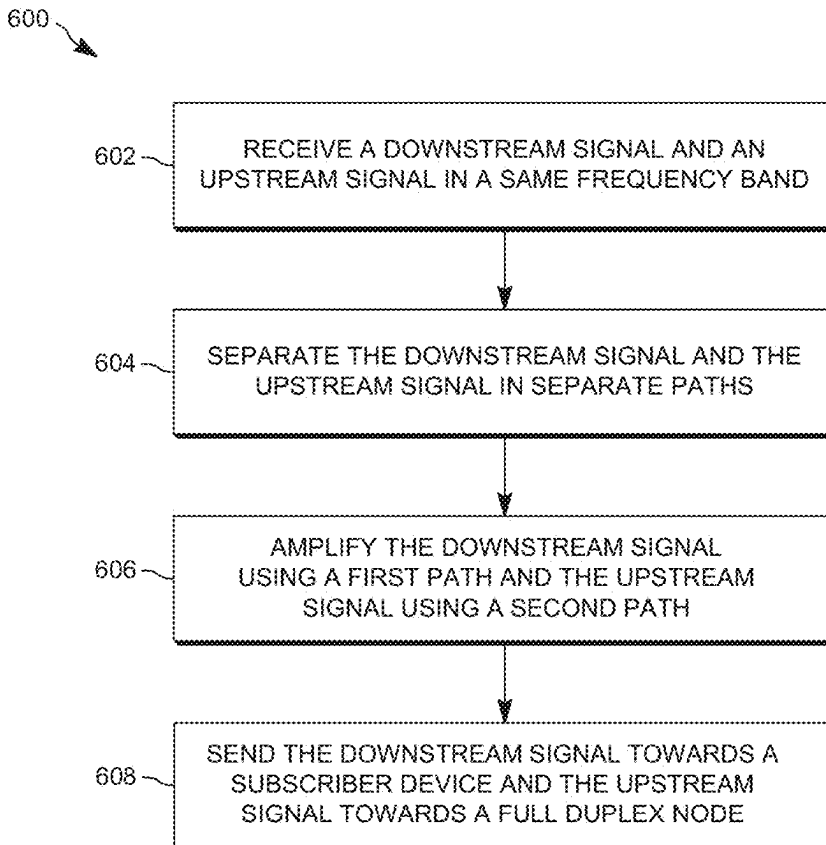


FIG. 6

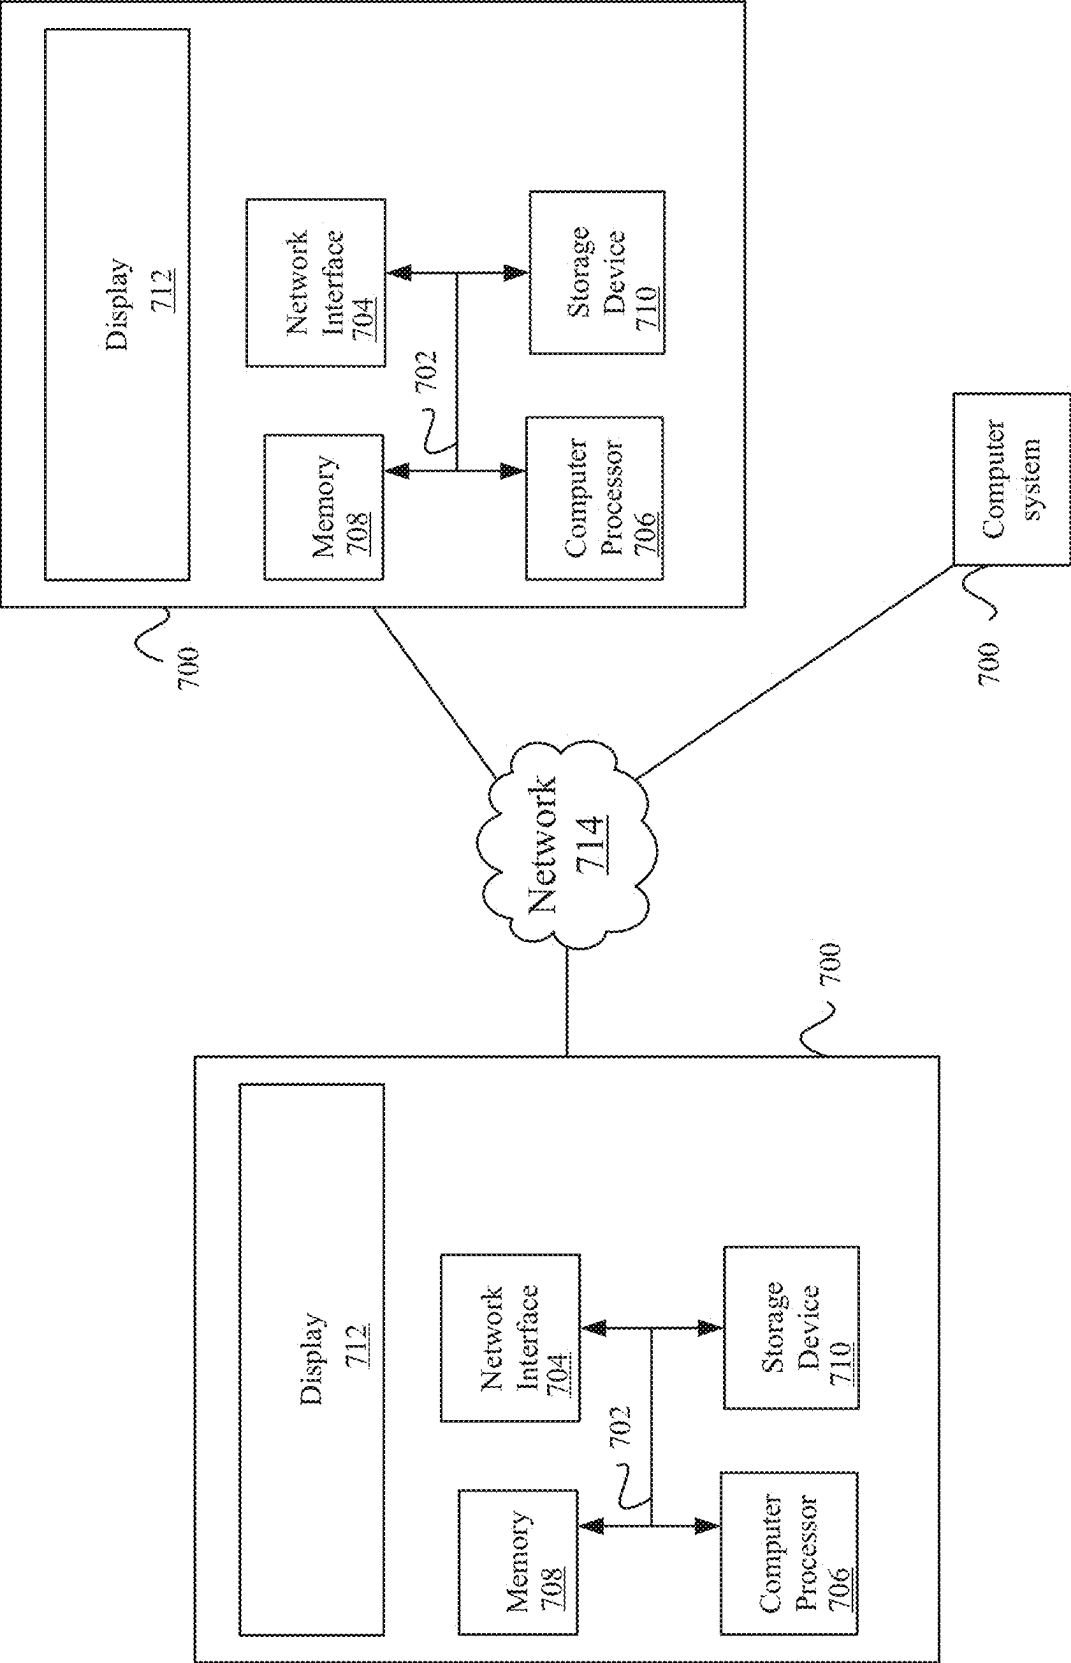


FIG. 7

FULL DUPLEX EXPANDER IN A FULL DUPLEX NETWORK

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. patent application Ser. No. 18/421,466 filed Jan. 24, 2024, which is a continuation of U.S. patent application Ser. No. 18/119,728 filed Mar. 9, 2023, now U.S. Pat. No. 11,916,850, which is a continuation of U.S. patent application Ser. No. 17/171,293 filed Feb. 9, 2021, now U.S. Pat. No. 11,616,632, which is a continuation of 15/845,054 filed Dec. 18, 2017, now U.S. Pat. No. 10,924,253 the contents of which are each incorporated herein by reference in their entirety.

BACKGROUND

[0002] Full duplex communications, such as full duplex (FDX) Data Over Cable Service Interface Specification (DOCSIS), is a data delivery system where both the downstream and the upstream traffic is delivered in the same frequency band. For example, the downstream traffic may be delivered from a head end to FDX nodes, which then deliver the traffic to subscriber devices located downstream. The upstream traffic is delivered from subscriber devices through FDX nodes to the head end in the same frequency band as the downstream traffic.

[0003] To deliver the full-duplex traffic, the network is converted to an N+0 architecture, which means that the amplifiers in the network are removed and replaced with FDX nodes. The amplifiers are replaced because FDX transmission is not compatible with the legacy analog amplifiers. For example, legacy analog amplifiers use diplex filters to provide isolation between the upstream amplification path and the downstream amplification path. The diplex filters prevent the amplifier from oscillating, but using the diplex filters only works because the upstream and downstream communications occur in different frequency bands. Thus, when upstream and downstream traffic is delivered in the same frequency band, the legacy analog amplifiers cannot be used.

[0004] Converting the amplifiers to FDX nodes to use an N+0 architecture may significantly increase the cost and timeline required to roll out the network to use full duplex transmission. The cost increases because the FDX nodes use fiber connections from the head end to the nodes and the amplifiers that are being replaced connected via coaxial cable and not connected via fiber. A provider needs to replace the coaxial cable with fiber when the FDX node replaces the legacy analog amplifiers, which not only increases the cost, but replacing the coaxial cable with fiber takes time.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 depicts a simplified system for amplifying full duplex signals according to some embodiments.

[0006] FIG. 2 depicts a more detailed example of the system according to some embodiments.

[0007] FIG. 3 depicts an example of a FDX regenerator according to some embodiments.

[0008] FIG. 4 depicts an example of a FDX repeater according to some embodiments.

[0009] FIG. 5A depicts an example of a FDX dual switched amplifier according to some embodiments.

[0010] FIG. 5B depicts an example of a FDX bi-directional switched amplifier according to some embodiments.

[0011] FIG. 6 depicts a simplified flowchart of a method for processing full duplex signals according to some embodiments.

[0012] FIG. 7 illustrates an example of a special purpose computer systems configured with a FDX expander according to one embodiment.

DETAILED DESCRIPTION

[0013] Described herein are techniques for a full duplex communication system. In the following description, for purposes of explanation, numerous examples and specific details are set forth in order to provide a thorough understanding of some embodiments. Some embodiments as defined by the claims may include some or all of the features in these examples alone or in combination with other features described below, and may further include modifications and equivalents of the features and concepts described herein.

[0014] Some embodiments provide a full duplex (FDX) expander that is used to amplify full duplex signals. The full duplex signals transmit both upstream and downstream traffic in the same frequency band. The FDX expanders can be used in place of analog amplification in the full duplex network. The FDX expanders can receive a downstream signal and an upstream signal in the same frequency band where the downstream signal is received from a full duplex (FDX) node and the upstream signal originated from a subscriber device. The FDX expander then separates the downstream signal and the upstream signal into separate paths. The downstream signal is amplified using a first path and the upstream signal is amplified using a second path. In some embodiments, the FDX expander isolates the downstream signal and the upstream signal. Different methods for isolating the downstream signal and the upstream signal from one another are appreciated and will be described in more detail below. After amplification, the FDX expander sends the downstream signal downstream toward a subscriber device and sends the upstream signal towards the FDX node. The FDX expander allows amplification to be performed in the full duplex network without having to replace the amplifier with a FDX node. For example, the analog connection, such as via a coaxial cable connection, to the FDX expander from the FDX node can be maintained in the full duplex system while continuing to provide amplification.

System Overview

[0015] FIG. 1 depicts a simplified system 100 of a method for amplifying full duplex signals according to some embodiments. System 100 includes a FDX node 102, an expander 104, and subscribers 110. It will be understood that other components of the network may be included, such as other FDX nodes 102 and expanders 104 may be included. Further, although not shown, a head end may be located upstream of FDX node 102. In some embodiments, FDX node 102 may be part of a remote physical (PHY) device that can be located closer to the subscriber's premises, such as in a node located in the neighborhood where the subscribers are located. The relocated physical device is

referred to as a remote physical device (RPD). FDX node **102** converts packets on a digital interface, such as an Ethernet interface received via a digital network, such as via optical fiber, to analog signals, such as radio frequency (RF) signals, on a hybrid fiber coaxial (HFC) network. FDX node **102** sends the RF signals to modems located at a subscriber's premises via an analog network, such as via coaxial cable.

[0016] Full duplex signals may include different types of traffic, such as data and video. In the downstream direction, signals from the head end are sent through FDX node **102** toward subscribers **110** through expander **104**. A group of subscribers may be connected to a tap **112** that provides connections to subscribers **110**. Subscribers **110** may include subscriber devices, such as modems that receive the downstream signals and send the upstream signals. In some embodiments, the modems include cable modems, but other devices may be appreciated, such as gateways. In the upstream direction, subscribers **110** send upstream signals toward the head end through expander **104** and FDX node **102**.

[0017] In the downstream direction, FDX node **102** may receive a downstream signal from the headend and process the downstream signal using full duplex logic **106**. As discussed above, FDX node **102** may receive packets via a digital network. Then, FDX node **102** sends the downstream signal to expander **104**. The downstream signal is sent via an analog network. Expander **104** then amplifies the downstream signal in the analog domain. Also, in the upstream direction, expander **104** receives upstream signals and can amplify the upstream signals in the analog domain. Then, expander **104** sends the upstream signals towards the head end, which eventually reach FDX node **102**. The upstream signals are sent via the analog network.

[0018] Expander **104** receives the downstream and the upstream signals in the same frequency band, which may be a range of frequencies that includes both the downstream and the upstream signals. In some embodiments, the downstream and upstream signals are sent at the same time, but in other embodiments may be sent at different times. Expander **104** may process the downstream and upstream signals using isolation and amplification logic **108**, which may separate the downstream and upstream signals that are sent in the same frequency band. Isolation and amplification logic **108** then can amplify the downstream signal using a first path and the upstream signal using a second path. The amplification is performed in the analog domain while isolating the downstream signal and the upstream signal from one another. After amplification, expander **104** may send the downstream signals toward subscribers **110** and send the upstream signals toward a head end.

[0019] In some embodiments, FDX expanders **104** may replace legacy analog amplifiers in the network. The use of FDX expanders **104** allows full duplex traffic to be sent in the network without having to replace the legacy analog amplifiers with FDX nodes **102**. Also, the connection between FDX node **102** and FDX expanders **104** may be transmit analog signals, such as radio frequency (RF) signals, that may be communicated over a coaxial cable instead of fiber. This means that the signals in the downstream direction from FDX node **102** to FDX expanders **104** may be in the analog domain. If fiber was used, then the communications from FDX node **102** to another FDX node may be

in the digital domain, which would require the coaxial cable to be replaced between two FDX nodes **102** as described in the Background.

[0020] FIG. 2 depicts a more detailed example of system **100** according to some embodiments. In the network, various taps **112-1** to **112-18** are included that couple signals to subscribers **110**. Additionally, different types of FDX expanders **104** may be included in various positions to provide amplification in the network at different points.

[0021] FDX node **102** uses full duplex logic **106** to convert digital signals to analog signals in the downstream direction and convert analog signals to digital in the upstream direction. In the downstream direction, full duplex logic **106** in FDX node **102** may include a digital-to-analog converter (DAC) that converts the digital signal to analog. An anti-aliasing filter **204** may attenuate the higher frequencies to prevent aliasing components from being sampled. Then, an amplifier **206** amplifies the signal. A directional coupler **208** couples the analog downstream signal to tap **112-1**.

[0022] In the upstream direction, directional coupler **208** receives the analog upstream signal and couples the signal to amplifier **210**, which amplifies the upstream signal. Then, an analog-to-digital converter **212** converts the analog signal to digital. The digital upstream signal can then be sent toward the head end. Although this full duplex logic is described, it will be understood that other variations of the full duplex circuitry may be appreciated.

[0023] In some embodiments, expander **104** may be implemented using three different types of expanders, such as a FDX regenerator **104-1**, a FDX repeater **104-2**, and/or a FDX switched amplifier **104-3**. Although this configuration of expanders **104** is described, it will be understood that FDX regenerator **104-1**, FDX repeater **104-2**, and FDX switched amplifier **104-3** may be placed in different positions in the network and other implementations will be appreciated. For example, all three implementations do not need to be implemented in a network, such as only one or two of the implementations may be used.

[0024] In one path, FDX node **102** may be coupled to FDX repeater **104-2**, which is then coupled to FDX switched amplifier **104-3**. A second path couples FDX node **102** to FDX repeater **104-2** and a third path couples FDX node **102** to FDX regenerator **104-1**. FDX repeater **104-2** and FDX regenerator **104-1** may further be coupled to other FDX repeaters or regenerators or switched amplifiers further downstream in the network.

[0025] FDX expanders **104** may be located at N+1, N+2, etc. positions in the network. For example, FDX repeater **104-2** may be located at the N+1 position of a network and FDX switched amplifier **104-3** may be located at the N+2 position. The N+X notation, which X is a number, means that FDX repeater **104-2** is performing a first level of amplification from FDX node **102** and FDX switched amplifier **104-3** is performing a second level of amplification from FDX node **102**. The number X is the number of nodes in which the signal is amplified.

[0026] FDX regenerator **104-1**, FDX repeater **104-2**, and FDX switched amplifier **104-3** provide amplification of downstream and upstream signals while providing isolation. FDX regenerator **104-1** and FDX repeater **104-2** can isolate the downstream and upstream signals and amplify the downstream and upstream signals at the same time. However, FDX switched amplifier **104-3** may amplify downstream

and upstream signals that are sent in a time divisional duplex (TDD) manner. That is, at one time, subscribers **110** may be in a transmit or receive mode. In contrast, it is possible for FDX regenerator **104-1** and FDX repeater **104-2** to process signals while subscribers were in both transmit and receive modes at the same time. For example, a first subscriber may be receiving a downstream transmission and a second subscriber may be sending an upstream transmission during a same time period. The downstream and upstream transmissions are processed by FDX regenerator **104-1** or FDX repeater **104-2** during the same time period.

[0027] In the network, interference groups result when a modem in the network is transmitting, other modems see that transmission and perceive the transmission as noise interference. The magnitude of the interference varies based on the transmit power of the modem and the isolation between each modem pair. For some modem pairs, this interference level will severely limit the downstream receive signal-to-noise ratio (SNR) of the victim modem (e.g., the modem receiving the interference). In this case, the modem pairs will be assigned to a same interference group and will not be allowed to transmit and receive simultaneously. Since a single modem may limit the receive SNR of many modems, all of these modems are assigned to the same interference group. Typically, these interference groups are located near each other and have relatively few isolating network elements. In this example where the modems in the interference group are limited to transmitting at different times, FDX switched amplifier **104-3** may be used without losing any of the full duplex functionality of the network. That is, FDX switched amplifier **104-3** may never process full duplex traffic at the same time and thus can be used without any negative limitations on full duplex traffic being received and sent in the upstream and downstream directions at the same time.

[0028] In some examples, the analysis of the network may be used to determine which type of FDX expander is used. For example, FDX regenerators **104-1** may be used in positions in the network that are coupled to a large number of subscribers **110**. Also, FDX switched amplifiers **104-3** may be used when coupled to a small number of subscribers **110** that are limited to TDD communications.

[0029] The following will now describe the different types of FDX expanders **104** in more detail.

FDX Regenerator **104-1**

[0030] FIG. 3 depicts an example of FDX regenerator **104-1** according to some embodiments. Although this configuration of FDX regenerator **104** is described, it will be understood that variations of the logic described may be appreciated. In FDX regenerator **104-1**, the upstream and downstream paths may contain the same functional elements.

[0031] FDX regenerator **104-1** includes two interfaces referred to as a FDX modem function **300** and a FDX master function **301**. FDX modem function **300** performs a function that implements a modem. Also, FDX master function **301** may perform a function that is performed by FDX node **102**. The use of FDX modem function **300** and FDX master function **301** provides a modem interface on the network side interface of FDX regenerator **104-1** and FDX master function **301** provides an interface similar to what is included in FDX node **102** on the subscriber side interface.

[0032] FDX regenerator **104-1** includes a downstream path and an upstream path. In the downstream direction, a directional coupler **302** receives the downstream signal and can couple the downstream signal into the downstream path to an amplifier **304**. Amplifier **302** amplifies the signal in the analog domain. Amplification will be described as being performed in both FDX modem function **300** and a FDX master function **301**, but it will be understood that amplification may only be performed in one of FDX modem function **300** and FDX master function **301**. For example, amplification may be performed only in the transmit side, such as in FDX master function **301** in the downstream direction and in FDX modem function **300** in the upstream direction.

[0033] After amplification, an analog-to-digital converter **306** converts the analog signal to a digital signal. Then, a decoder/controller **308** may decode the signal, which fully deconstructs the signal and then reconstructs the signal. The deconstruction may generate individual code words for the digital signal. Decoder/controller **308** convert from a code word that represents the instantaneous power in time of the waveform that is intended to be retransmitted, into the fundamental data content that is encoded within that waveform. There is an analog waveform that is present at the input of ADC **306** that represents the power over time of the composite signal that is being sent through the network. ADC **306** measures that power at a series of specific time instants and reports a series of codewords that are proportional to the instantaneous power in time samples. Decoder/controller **308** performs the additional step of taking these samples and demodulating them into the baseband signal such that it yields the actual data content of the signal.

[0034] Decoder/controller **308** then re-modulated/re-encoded the data and then feeds the data into a digital-to-analog converter (DAC) **310** as a series of codewords that once again represent the instantaneous power in time as a series of codewords. The DAC **310** receives the codewords and turns the codewords into an analog waveform with a power that matches the codeword values. The analog to digital conversion and the digital to analog conversion is used to isolate the network side interface and the subscriber side interface. That is, the receiver side is isolated from the transmitter side in either the downstream path or the upstream path.

[0035] An anti-aliasing filter **312** may then attenuate the higher frequencies to prevent aliasing components from being sampled. An amplifier **314** can then amplify the signal. A directional coupler **316** couples the signal in the downstream direction towards subscribers **110**.

[0036] In the upstream direction, directional coupler **316** may receive the upstream signal that originated from subscribers **110** and couple the upstream signal to an amplifier **318**, which amplifies the signal. An analog-to-digital converter **320** then converts the analog signal to digital. Decoder/controller **308** can then decode the signal and then encode the signal, which deconstructs the signal and reconstructs the signal. A digital-to-analog converter **322** converts the digital signal to analog. An anti-aliasing filter **324** receives the signal and attenuates the higher frequencies. An amplifier **326** can then amplify the signal. Directional coupler **302** can then couple the upstream signal in the upstream direction.

[0037] FDX regenerator **104-1** may also isolate the downstream path and the upstream path by cancelling crosstalk.

For example, crosstalk cancellation logic **328** may cancel any crosstalk that occurs between the downstream direction and the upstream direction, such as preventing a transmitter of FDX regenerator **104-1** from corrupting the signal present at a receiver of FDX regenerator **104-1**. Crosstalk occurs when the downstream signal is being sent downstream through directional coupler **316**, but then some amount of the downstream signal is directed in the upstream direction through amplifier **318**. Similarly, crosstalk occurs when the upstream signal is being sent upstream through directional coupler **302**, but then some amount of the upstream signal is directed in the downstream direction through amplifier **304**. Crosstalk logic **328** may cancel the small amount of the downstream signal that is sent in the upstream direction by creating an inverse of the signal to cancel the crosstalk as a function of frequency and phase shift. Also, crosstalk logic **328** similarly cancels the upstream signal that is sent in the downstream direction. Crosstalk logic **328** provides isolation between the downstream signal and the upstream signal.

[0038] The crosstalk cancellation may be performed in the digital or analog domain. That is, crosstalk logic **328** may perform the crosstalk cancellation after the analog signals are converted to digital signals, or perform the crosstalk cancellation before the analog signals are converted to digital signals. In FDX regenerator **104-1**, crosstalk cancellation is performed on both the input and output sides of decoder/controller **308** to prevent the transmitter of FDX regenerator **104-1** from corrupting the signal present at the receiver of FDX regenerator **104-1**. The cancellation on both sides is needed because crosstalk may occur on both sides of decoder/controller **308**.

FDX Repeater **104-2**

[0039] FIG. 4 depicts an example of FDX repeater **104-2** according to some embodiments. The upstream and downstream paths include the same functional elements in this example. One difference between FDX repeater **104-2** and FDX regenerator **104-1** is that the digitized signal is not fully deconstructed and reconstructed in FDX repeater **104-2**. Rather, the digitized signal includes digital code words of the entire spectrum, not individual code words as described with respect to FDX regenerator **104-1**. The digitized signal may be included in a raw spectrum in a digital format and represents the power of the entire spectrum.

[0040] Similar to FDX regenerator **104-1**, FDX repeater **104-2** includes a network side interface and a subscriber side interface shown as a FDX modem function **400** and a FDX master function **401**, respectively. FDX repeater **104-2** also includes a downstream path and an upstream path. In the downstream direction, a directional coupler **402** receives the downstream signal and can couple the downstream signal into the downstream path to an amplifier **404**. Amplifier **404** amplifies the signal in the analog domain. It will be understood that amplification does not need to be performed on both sides of the ADC and DAC conversion as described with respect to FDX regenerator **104-1**.

[0041] After amplification, an analog-to-digital converter **406** converts the analog signal to digital. Then, the digital signal may be sent to a digital-to-analog converter (DAC) **408** to convert the digital signal to analog. As with the FDX regenerator, the analog to digital conversion and the digital to analog conversion is used to isolate the network side interface and the subscriber side interface. That is, the

receiver side is isolated from the transmitter side in either the downstream path or the upstream path.

[0042] An anti-aliasing filter **410** may then attenuate the higher frequencies to prevent aliasing components from being sampled. An amplifier **412** may then amplify the signal in the analog domain. A directional coupler **414** couples the signal in the downstream direction.

[0043] In the upstream direction, directional coupler **414** may receive the upstream signal and couple the upstream signal to an amplifier **416**, which amplifies the signal in the analog domain. An analog-to-digital converter **418** then converts the analog signal to digital. A digital-to-analog converter **420** converts the digital signal to analog. An anti-aliasing filter **422** receives the signal and attenuates the higher frequencies. An amplifier **424** can then amplify the signal in the analog domain. Directional coupler **402** couples the upstream signal in the upstream direction.

[0044] FDX repeater **104-2** may also isolate the downstream path and the upstream path by canceling crosstalk. For example, crosstalk cancellation logic **426** may isolate the upstream path and the downstream path by canceling crosstalk. Crosstalk cancellation logic **426** may cancel the crosstalk in the digitized signal between analog-to-digital converter **406** and digital-to-analog **408** and between analog-to-digital converter **418** and digital-to-analog converter **420**. Crosstalk logic **426** may perform the crosstalk cancellation on both the downstream path and the upstream path. Crosstalk cancellation logic **426** may be similar to crosstalk cancellation logic **328** of FDX regenerator **104-1**. The cancellation approach is similar between Crosstalk cancellation logic **426** may be similar to crosstalk cancellation logic **328**, but does not have to be identical. In some embodiments, FDX regenerator **104-1** has the superset of options for how cancellation can be implemented. FDX repeater **104-2** may have a subset of these options. In some embodiments, any form of cancellation that provides adequate crosstalk suppression may be used.

[0045] In both FDX repeater **104-2** and FDX regenerator **104-1**, cancellation can be performed in the analog domain, the digital domain, or partially in the analog domain in order to reduce the magnitude of the crosstalk relative to the message signal and then further cancellation is performed in the digital domain.

FDX Switched Amplifier **104-3**

[0046] FIGS. 5A and 5B depict different examples of FDX switched amplifiers **104-3** according to some embodiments. FIG. 5A includes separate upstream and downstream amplifiers and FIG. 5B includes a single amplifier that is switched between two directions. FDX dual switched amplifier **104-3** may operate in a time division duplex (TDD) mode. In this example, the upstream signal and the downstream signal are not processed at the same time. Accordingly, FDX dual switched amplifier **104-3** may be placed towards the end of a network and coupled to subscribers **110** that send or receive signals that interfere with one another. In this example, subscribers **110** cannot transmit or receive at the same time and thus the TDD mode of FDX dual switched amplifier **104-3** is acceptable because the upstream and downstream signals are being sent using TDD.

[0047] FIG. 5A depicts an example of a FDX dual switched amplifier **104-3** according to some embodiments. A modem/controller **512** may control switches **504** and **508** to couple the upstream signal to the upstream path and the

downstream signal to the downstream path. For example, modem/controller 512 controls switches 504 and 508 based on whether subscribers 110 coupled to FDX dual switched amplifier 104-3 are in a transmit mode or a receive mode. Modem/controller 512 receives the downstream signal and determines that the subscriber is in receive mode. When not receiving the downstream signal, modem/controller 512 determines that the subscriber is in transmit mode. When a subscriber 110 is set to receive a downstream signal in a time slot, modem/controller 512 controls switches 504 and 508 to couple the downstream signal to amplifier 506. Similarly, when a time slot occurs when a subscriber 110 is transmitting an upstream signal, modem/controller 512 controls switches 504 and 508 to couple the upstream signal to amplifier 510.

[0048] In the downstream direction, FDX dual switched amplifier 104-3 may receive a downstream signal at a directional coupler 502. Directional coupler 502 can then send the downstream signal to a switch 504, such as a radio frequency (RF) switch. Modem/controller 512 controls switch 504 to couple the downstream signal to a downstream amplifier 506, which may then amplify the signal in the analog domain. The downstream signal is then sent to a switch 508. Modem/controller 512 controls switch 508 to connect to the downstream path and couples the downstream signal in the downstream direction towards subscriber 110.

[0049] In the upstream direction, modem/controller 512 controls switch 508 to couple the upstream signal to an amplifier 510. Amplifier 510 then amplifies the signal in the analog domain. Modem/controller 512 controls switch 508 to then couple the upstream signal to directional coupler 502. Directional coupler 502 then sends the upstream signal in the upstream direction towards FDX node 102.

[0050] In the above configuration, two different amplifiers and paths are used to amplify the downstream signals and the upstream signals, respectively. This uses multiple amplifiers, but only two switches, which may simplify the switching logic. The upstream and downstream paths are isolated by TDD in this example and do not use crosstalk cancellation or an analog to digital/digital to analog conversion.

[0051] FIG. 5B depicts an example of a FDX bi-directional switched amplifier 104-3 according to some embodiments. In this embodiment, a single amplifier is used and switches are controlled to couple the upstream and downstream signals through different paths to the same amplifier 526. Parts of the downstream and the upstream paths may go through similar components, such as switches and amplifier 526. However, the overall path that is taken is different between the downstream path and the upstream path. That is, the downstream path is coupled through a different sequence of switches compared to the upstream path.

[0052] Modem/controller 532 controls switches 522, 524, 528, and 530 in different time slots in which subscribers 110 are in either transmit mode or receive mode. In one example, modem/controller 532 receives the downstream signal may use the downstream signal to determine when subscribers 110 are in transmit mode or receive mode. For example, when a downstream signal is received, modem/controller 532 receives a signal from directional coupler 520 and determines that this time slot is for subscribers 110 that are in receive mode. Then, modem/controller 532 controls switches 522, 524, 528, and 530 to couple the signal to the downstream path. When the downstream signal is not

received, modem/controller 532 controls switches 522, 524, 528, and 530 to couple the signal to the upstream path.

[0053] In the downstream direction, a directional coupler 520 may couple the downstream signal to a switch 522. Modem/controller 532 controls switch 522 to couple the signal to switch 524. Then, modem/controller 532 controls switch 524 to couple the signal to amplifier 526. Amplifier 526 can then amplify the signal in the analog domain and couple the signal to switch 528. Modem/controller 532 controls switch 528 to couple the signal to a switch 530, which then sends the signal downstream.

[0054] In the upstream direction, modem/controller 532 controls switch 530 to couple the signal to switch 524. From switch 524, modem/controller 532 controls switch 524 to couple the upstream signal to amplifier 526 for amplification. Then, modem/controller 532 controls switch 528 and switch 522 to send the upstream signal to directional coupler 520.

Method Flows

[0055] FIG. 6 depicts a simplified flowchart 600 of a method for processing full duplex signals according to some embodiments. At 602, FDX expander 104 receives a downstream signal and an upstream signal in a same frequency band. As discussed above, in some embodiments, the downstream signal and the upstream signal may be received at the same time. In other embodiments, the downstream signal and the upstream signal may be received at different times.

[0056] At 604, FDX expander 104 separates the downstream signal and the upstream signal into separate paths. As described above, different types of FDX expanders 104 may separate the downstream signal and the upstream signal differently.

[0057] At 606, FDX expander 104 amplifies the downstream signal using a first path and amplifies the upstream signal using a second path. In some examples, different amplifiers may be used to amplify the downstream signal and the upstream signal. However, a same amplifier may be used to amplify the downstream signal and the upstream signal, but different paths may be used to couple the downstream signal and the upstream signal to the amplifier.

[0058] At 608, FDX expander 104 sends the downstream signal to a subscriber device and sends the upstream signal to a FDX node 102. It will be understood that sending a downstream signal toward a subscriber device may send the signal through other FDX expanders 104, taps 112, or other network devices. Additionally, sending the upstream signal toward FDX node 102 may send the upstream signal to other FDX expanders 104.

[0059] Accordingly, FDX expanders 104 provide amplification in a full duplex network without having to convert each amplifier to a FDX node 102. This allows the network to use amplification without converting the network to an N+0 network. FDX expanders 104 isolate the upstream and downstream signals using different techniques. For example, crosstalk cancellation logic may be used and/or a TDD mode.

System

[0060] FIG. 7 illustrates an example of a special purpose computer systems 700 configured with a FDX expander 104 according to one embodiment. Computer system 700

includes a bus **702**, network interface **704**, a computer processor **706**, a memory **708**, a storage device **710**, and a display **712**.

[0061] Bus **702** may be a communication mechanism for communicating information. Computer processor **706** may execute computer programs stored in memory **708** or storage device **708**. Any suitable programming language can be used to implement the routines of some embodiments including C, C++, Java, assembly language, etc. Different programming techniques can be employed such as procedural or object oriented. The routines can execute on a single computer system **700** or multiple computer systems **700**. Further, multiple computer processors **706** may be used.

[0062] Memory **708** may store instructions, such as source code or binary code, for performing the techniques described above. Memory **708** may also be used for storing variables or other intermediate information during execution of instructions to be executed by processor **706**. Examples of memory **708** include random access memory (RAM), read only memory (ROM), or both.

[0063] Storage device **710** may also store instructions, such as source code or binary code, for performing the techniques described above. Storage device **710** may additionally store data used and manipulated by computer processor **706**. For example, storage device **710** may be a database that is accessed by computer system **700**. Other examples of storage device **710** include random access memory (RAM), read only memory (ROM), a hard drive, a magnetic disk, an optical disk, a CD-ROM, a DVD, a flash memory, a USB memory card, or any other medium from which a computer can read.

[0064] Memory **708** or storage device **710** may be an example of a non-transitory computer-readable storage medium for use by or in connection with computer system **700**. The non-transitory computer-readable storage medium contains instructions for controlling a computer system **700** to be configured to perform functions described by some embodiments. The instructions, when executed by one or more computer processors **706**, may be configured to perform that which is described in some embodiments.

[0065] Computer system **700** includes a display **712** for displaying information to a computer user. Display **712** may display a user interface used by a user to interact with computer system **700**.

[0066] Computer system **700** also includes a network interface **704** to provide data communication connection over a network, such as a local area network (LAN) or wide area network (WAN). Wireless networks may also be used. In any such implementation, network interface **704** sends and receives electrical, electromagnetic, or optical signals that carry digital data streams representing various types of information.

[0067] Computer system **700** can send and receive information through network interface **704** across a network **714**, which may be an Intranet or the Internet. Computer system **700** may interact with other computer systems **700** through network **714**. In some examples, client-server communications occur through network **714**. Also, implementations of some embodiments may be distributed across computer systems **700** through network **714**.

[0068] Some embodiments may be implemented in a non-transitory computer-readable storage medium for use by or in connection with the instruction execution system, apparatus, system, or machine. The computer-readable stor-

age medium contains instructions for controlling a computer system to perform a method described by some embodiments. The computer system may include one or more computing devices. The instructions, when executed by one or more computer processors, may be configured to perform that which is described in some embodiments.

[0069] As used in the description herein and throughout the claims that follow, “a”, “an”, and “the” includes plural references unless the context clearly dictates otherwise. Also, as used in the description herein and throughout the claims that follow, the meaning of “in” includes “in” and “on” unless the context clearly dictates otherwise.

[0070] The above description illustrates various embodiments along with examples of how aspects of some embodiments may be implemented. The above examples and embodiments should not be deemed to be the only embodiments, and are presented to illustrate the flexibility and advantages of some embodiments as defined by the following claims. Based on the above disclosure and the following claims, other arrangements, embodiments, implementations and equivalents may be employed without departing from the scope hereof as defined by the claims.

What is claimed is:

1. A method comprising:

receiving, by a computing device, a downstream signal and an upstream signal in a same frequency band;
separating, by the computing device, the downstream signal and the upstream signal into a first path and a second path;
amplifying, by the computing device, the downstream signal using the first path and the upstream signal using the second path;
isolating, by the computing device, the downstream signal and the upstream signal from one another;
sending, by the computing device, the downstream signal downstream towards a subscriber device; and
sending, by the computing device, the upstream signal towards a full duplex node.

2. The method of claim 1, wherein the downstream signal and the upstream signal are received during a same time slot.

3. The method of claim 2, wherein the subscriber device is in a receive mode and another subscriber device that sent the upstream signal is in a transmit mode in the same time slot.

4. The method of claim 1, wherein the downstream signal and the upstream signal are received in different time slots.

5. The method of claim 4, wherein the subscriber device is in a receive mode in a first time slot in the different time slots and another subscriber device that sent the upstream signal is in a transmit mode in a second time slot in the different time slots.

6. The method of claim 1, wherein isolating the downstream signal and the upstream signal comprises:
canceling crosstalk from either the downstream signal and the upstream signal.

7. The method of claim 1, wherein isolating the downstream signal and the upstream signal comprises:
converting the downstream signal or the upstream signal from analog to digital; and
converting the downstream signal or the upstream signal from digital to analog.

8. The method of claim 7, wherein amplifying the downstream signal or the upstream signal comprises:

performing one or more of amplifying the downstream signal or the upstream signal before converting the downstream signal or the upstream signal from analog to digital and amplifying the downstream signal or the upstream signal after converting the downstream signal or the upstream signal from digital to analog.

9. The method of claim 7, wherein converting the downstream signal or the upstream signal from analog to digital and from digital to analog isolates a receiver side that receives the downstream signal or the upstream signal and a transmitter side that transmits the downstream signal or the upstream signal.

10. The method of claim 7, further comprising:

decoding the downstream signal or the upstream signal after converting the downstream signal or the upstream signal from analog to digital; and

reconstructing the downstream signal or the upstream signal after decoding.

11. The method of claim 7, wherein isolating the downstream signal and the upstream signal comprises:

canceling crosstalk from either the downstream signal and the upstream signal after converting the downstream signal or the upstream signal from analog to digital.

12. The method of claim 7, wherein isolating the downstream signal and the upstream signal comprises:

canceling crosstalk from either the downstream signal and the upstream signal before converting the downstream signal or the upstream signal from analog to digital.

13. The method of claim 1, wherein amplifying the downstream signal using the first path and the upstream signal using the second path comprises:

coupling the downstream signal to a first amplifier to amplify the downstream signal during a first time slot; and

coupling the upstream signal to a second amplifier to amplify the upstream signal during a second time slot.

14. The method of claim 1, wherein amplifying the downstream signal using the first path and the upstream signal using the second path comprises:

coupling the downstream signal to an amplifier to amplify the downstream signal during a first time slot; and coupling the upstream signal to the amplifier to amplify the upstream signal during a second time slot.

15. An apparatus comprising:

one or more couplers configured to receive a downstream signal and an upstream signal in a same frequency band and couple the downstream signal in a first path and couple the upstream signal in a second path;

one or more amplifiers configured to amplify the downstream signal using the first path and the upstream signal using the second path; and

isolation logic configured to isolate the downstream signal and the upstream signal from one another,

wherein the one or more couplers are configured to send the downstream signal downstream towards a subscriber device and send the upstream signal towards a full duplex node.

16. The apparatus of claim 15, further comprising:

a first analog to digital converter configured to convert the downstream signal or the upstream signal from analog to digital; and

a second analog to digital converter configured to convert the downstream signal or the upstream signal from digital to analog.

17. The apparatus of claim 16, wherein the isolation logic is configured to cancel crosstalk from either the downstream signal and the upstream signal after the first analog to digital converter converts the downstream signal or the upstream signal from analog to digital.

18. The apparatus of claim 15, further comprising:

a first amplifier to amplify the downstream signal during a first time slot; and

a second amplifier to amplify the upstream signal during a second time slot.

19. The apparatus of claim 15, further comprising:

an amplifier to amplify the downstream signal during a first time slot and amplify the upstream signal during a second time slot.

20. An apparatus comprising:

one or more computer processors; and

a non-transitory computer-readable storage medium comprising instructions, that when executed, control the one or more computer processors to be configured for: receiving a downstream signal and an upstream signal in a same frequency band;

separating the downstream signal and the upstream signal into a first path and a second path;

amplifying the downstream signal using the first path and the upstream signal using the second path;

isolating the downstream signal and the upstream signal from one another;

sending the downstream signal downstream towards a subscriber device; and sending the upstream signal towards a full duplex node.

* * * * *