US 20250267468A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2025/0267468 A1**

Zhu et al. (43) **Pub. Date: Aug. 21, 2025**

(54) **SPECTRUM MANAGEMENT**

(71) Applicant: **Comcast Cable Communications, LLC**, Philadelphia, PA (US)

(72) Inventors: **Jingjie Zhu**, Erie, CO (US); **Maher Harb**, Wynnewood, PA (US); **Daniel Rice**, Boulder, CO (US); **Jeffrey Howe**, West Chicago, IL (US); **Chad Humble**, Parker, CO (US)

(21) Appl. No.: **18/442,320**

(22) Filed: **Feb. 15, 2024**

Publication Classification

(51) **Int. Cl.**

H04W 16/14 (2009.01)

H04W 72/50 (2023.01)

(52) **U.S. Cl.**

CPC ***H04W 16/14*** (2013.01); ***H04W 72/50*** (2023.01)

(57) **ABSTRACT**

Systems, apparatuses, and methods are described for remotely reconfiguring the spectrum of a network based on a network profile associated with a service group. The service group may contain a group of modems that transmit and receive information over the spectrum of the network. The reconfigured spectrum may increase the network capacity of the network. The modems may continue to transmit and receive information while the reconfiguring is being implemented using intermediate bonding groups.

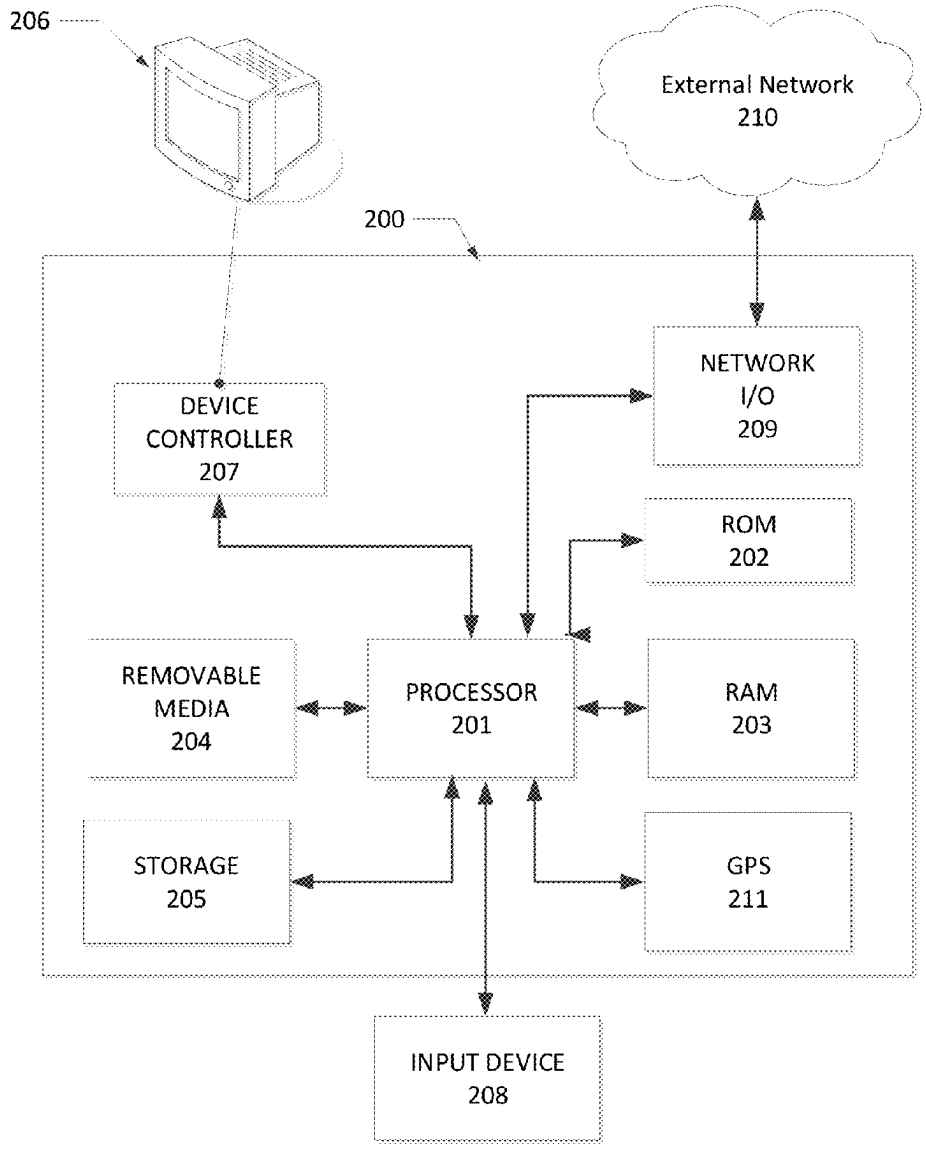

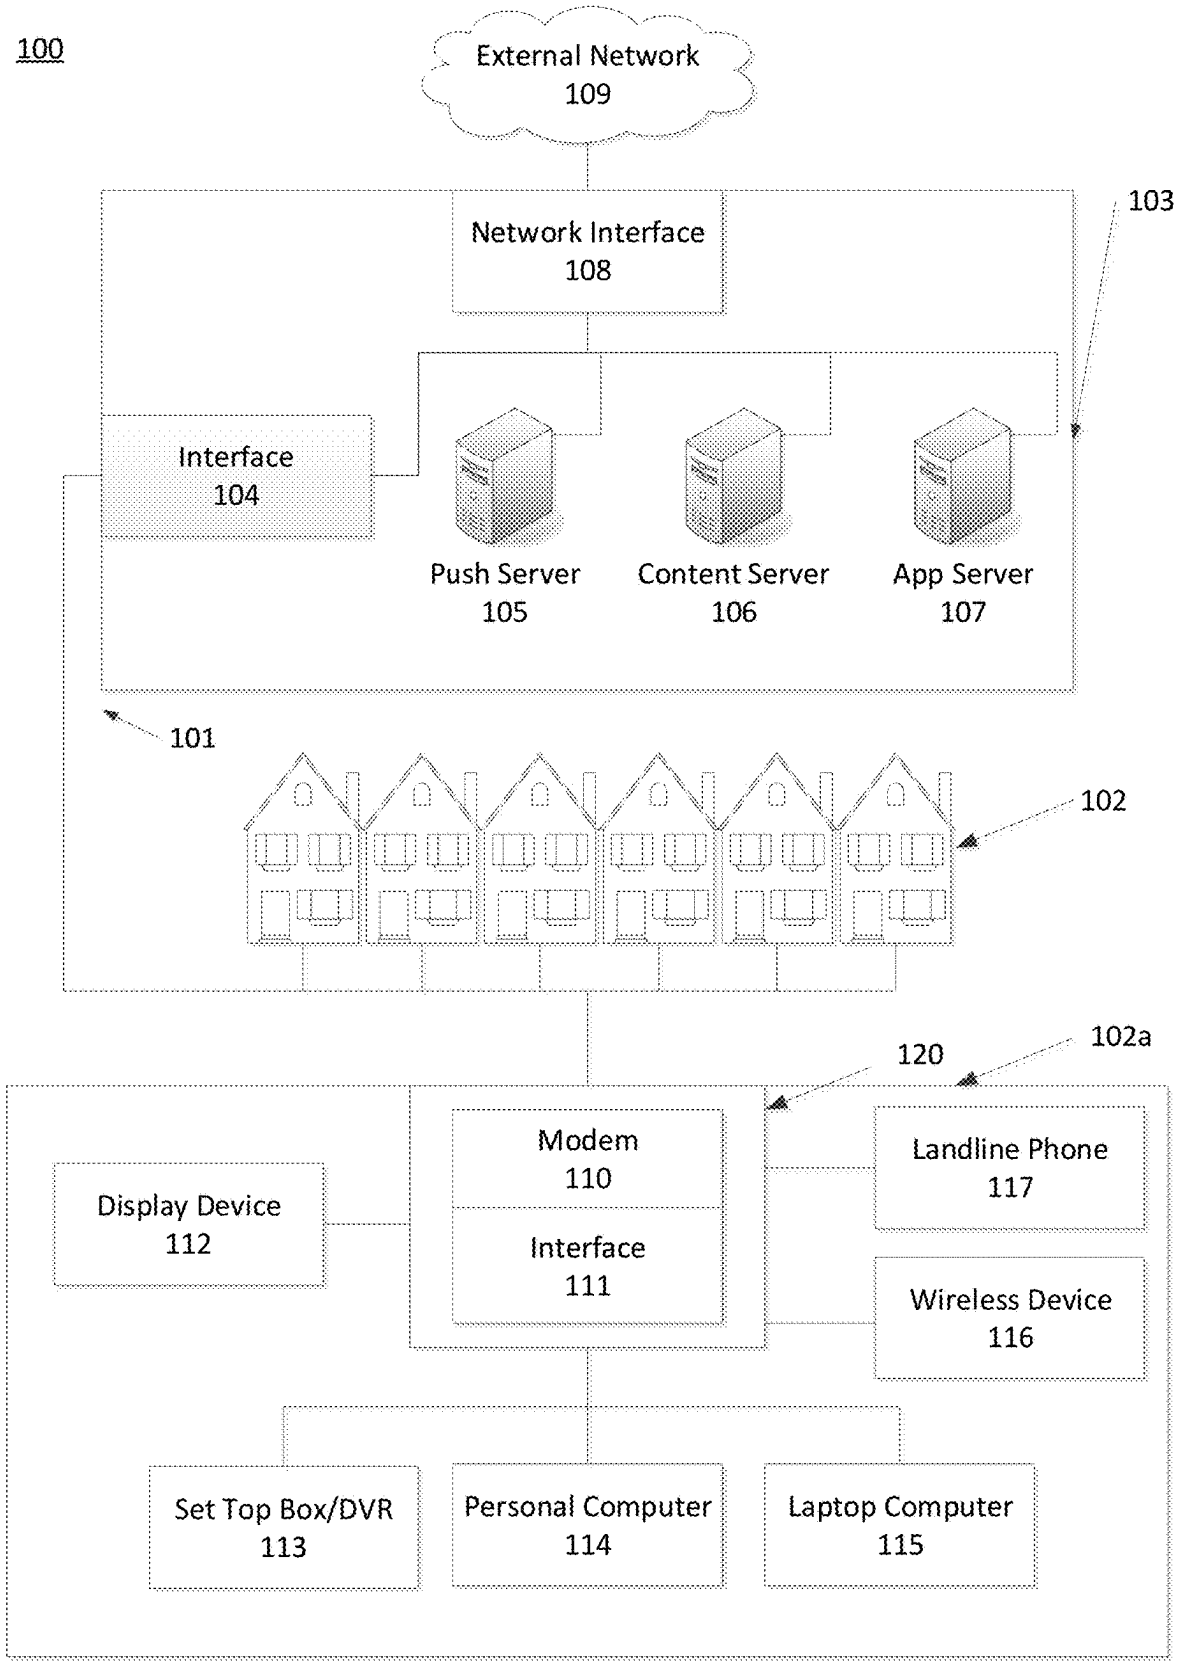
100
External Network
109
103
Network Interface
108
Interface
104
Push Server
105
Content Server
106
App Server
107
101
102
102a
120
Modem
110
Interface
111
Display Device
112
Landline Phone
117
Wireless Device
116
Set Top Box/DVR
113
Personal Computer
114
Laptop Computer
115

FIG. 1

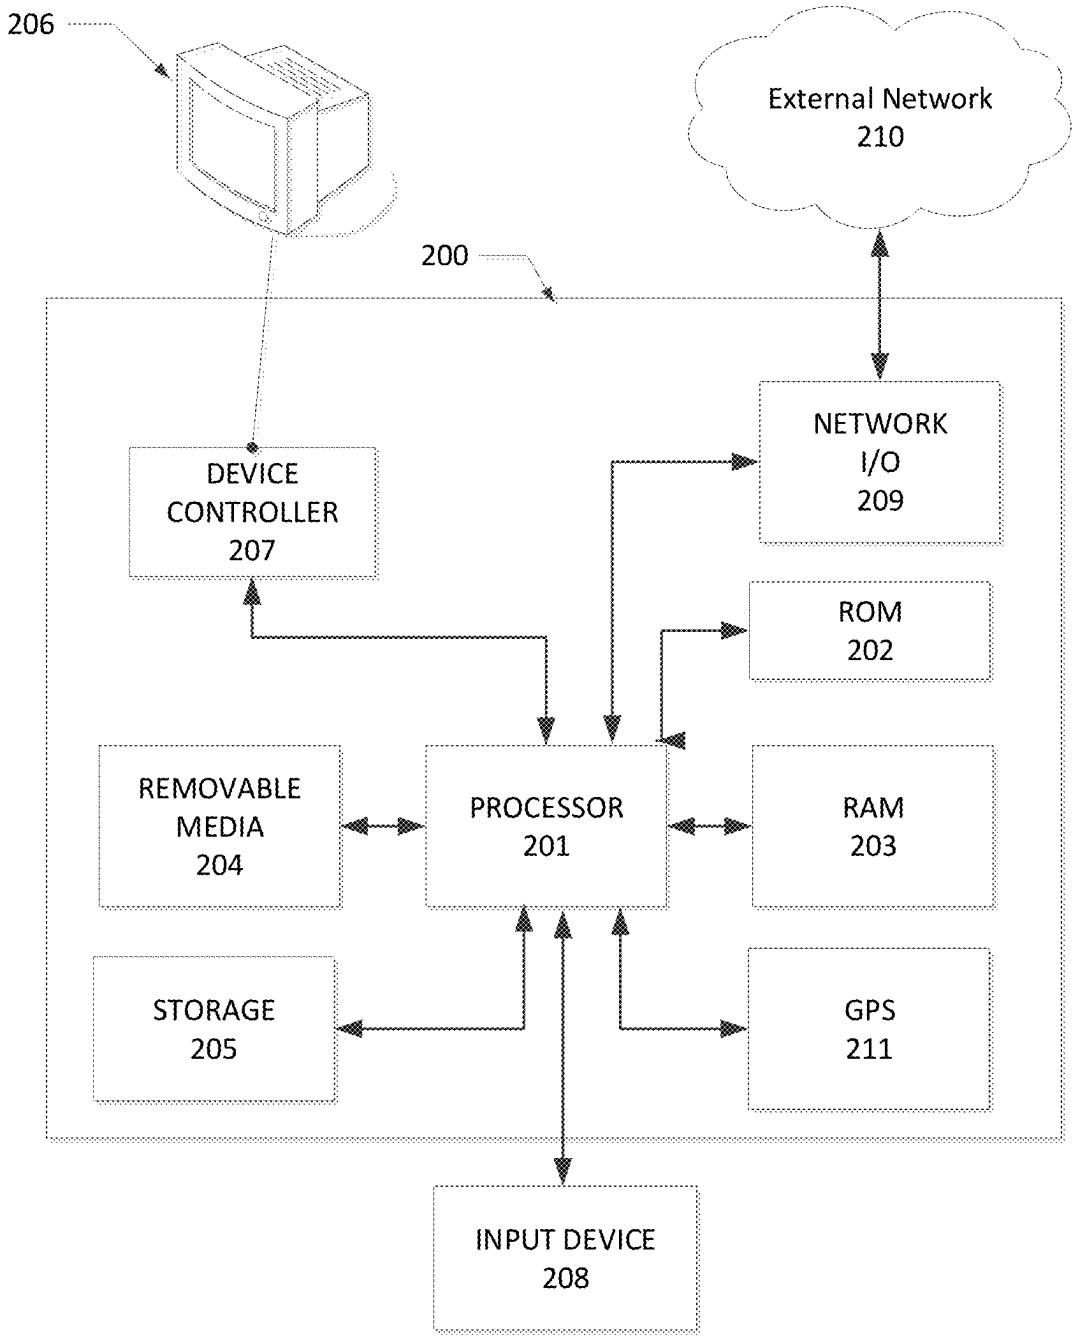
206
External Network
210
200
NETWORK
I/O
209
DEVICE
CONTROLLER
207
ROM
202
REMOVABLE
MEDIA
204
PROCESSOR
201
RAM
203
STORAGE
205
GPS
211
INPUT DEVICE
208

FIG. 2

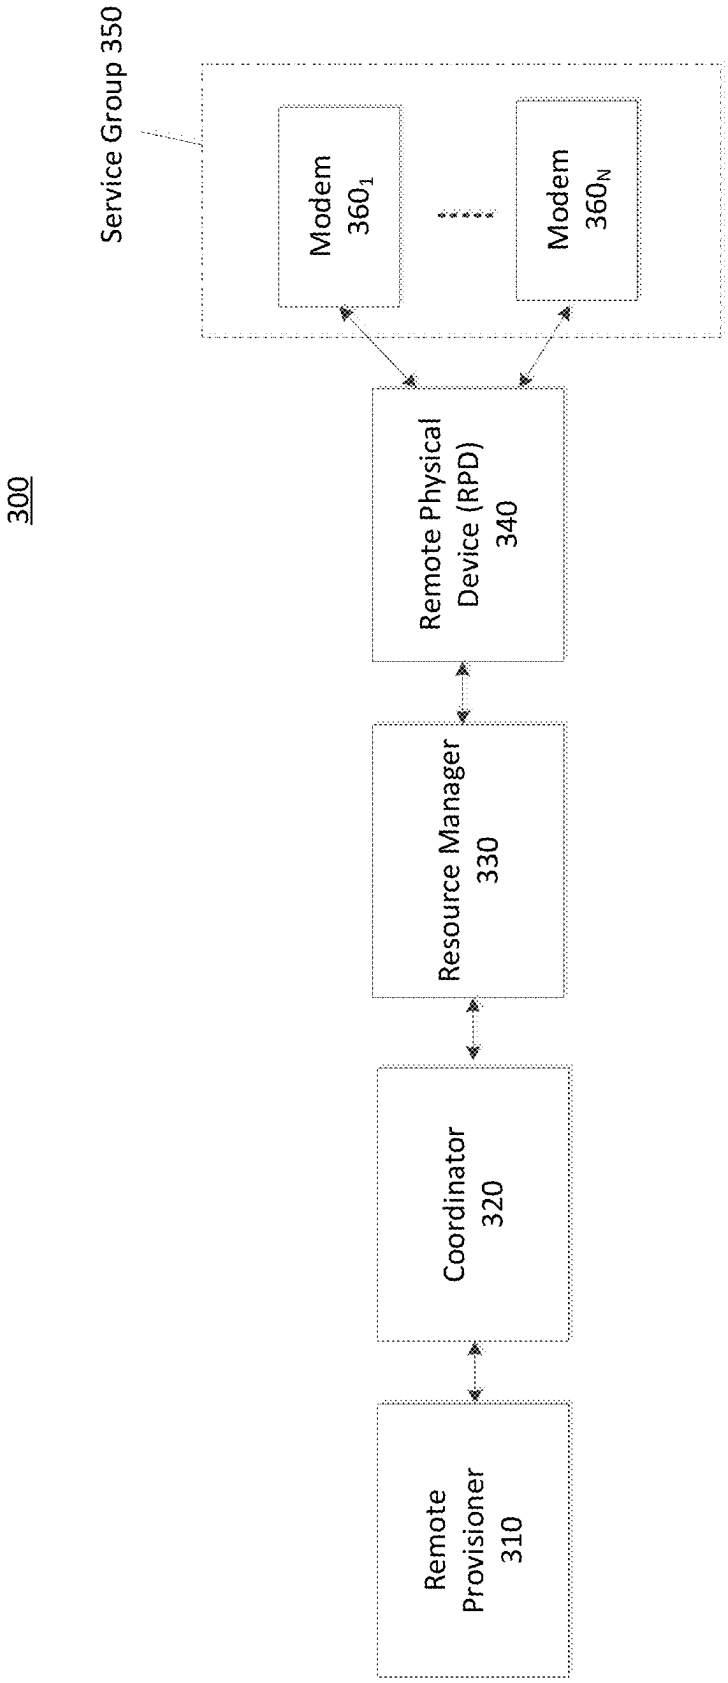
300
Service Group 350
Modem 360$_1$
Modem 360$_N$
Remote Physical Device (RPD) 340
Resource Manager 330
Coordinator 320
Remote Provisioner 310

FIG. 3

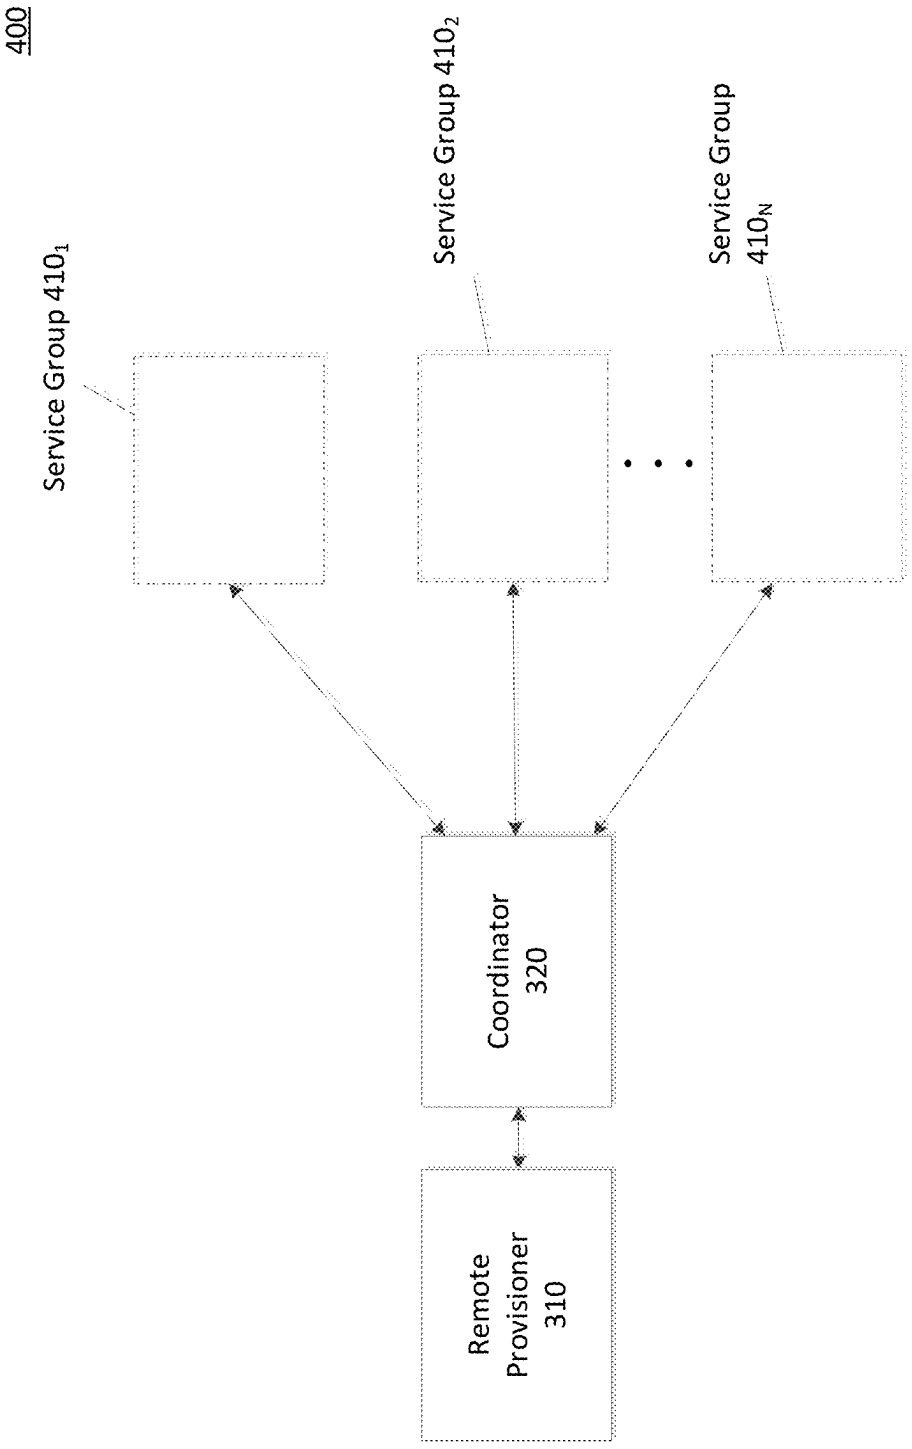
400
Service Group 410$_1$
Service Group 410$_2$
Service Group 410$_N$
Coordinator 320
Remote Provisioner 310

FIG. 4

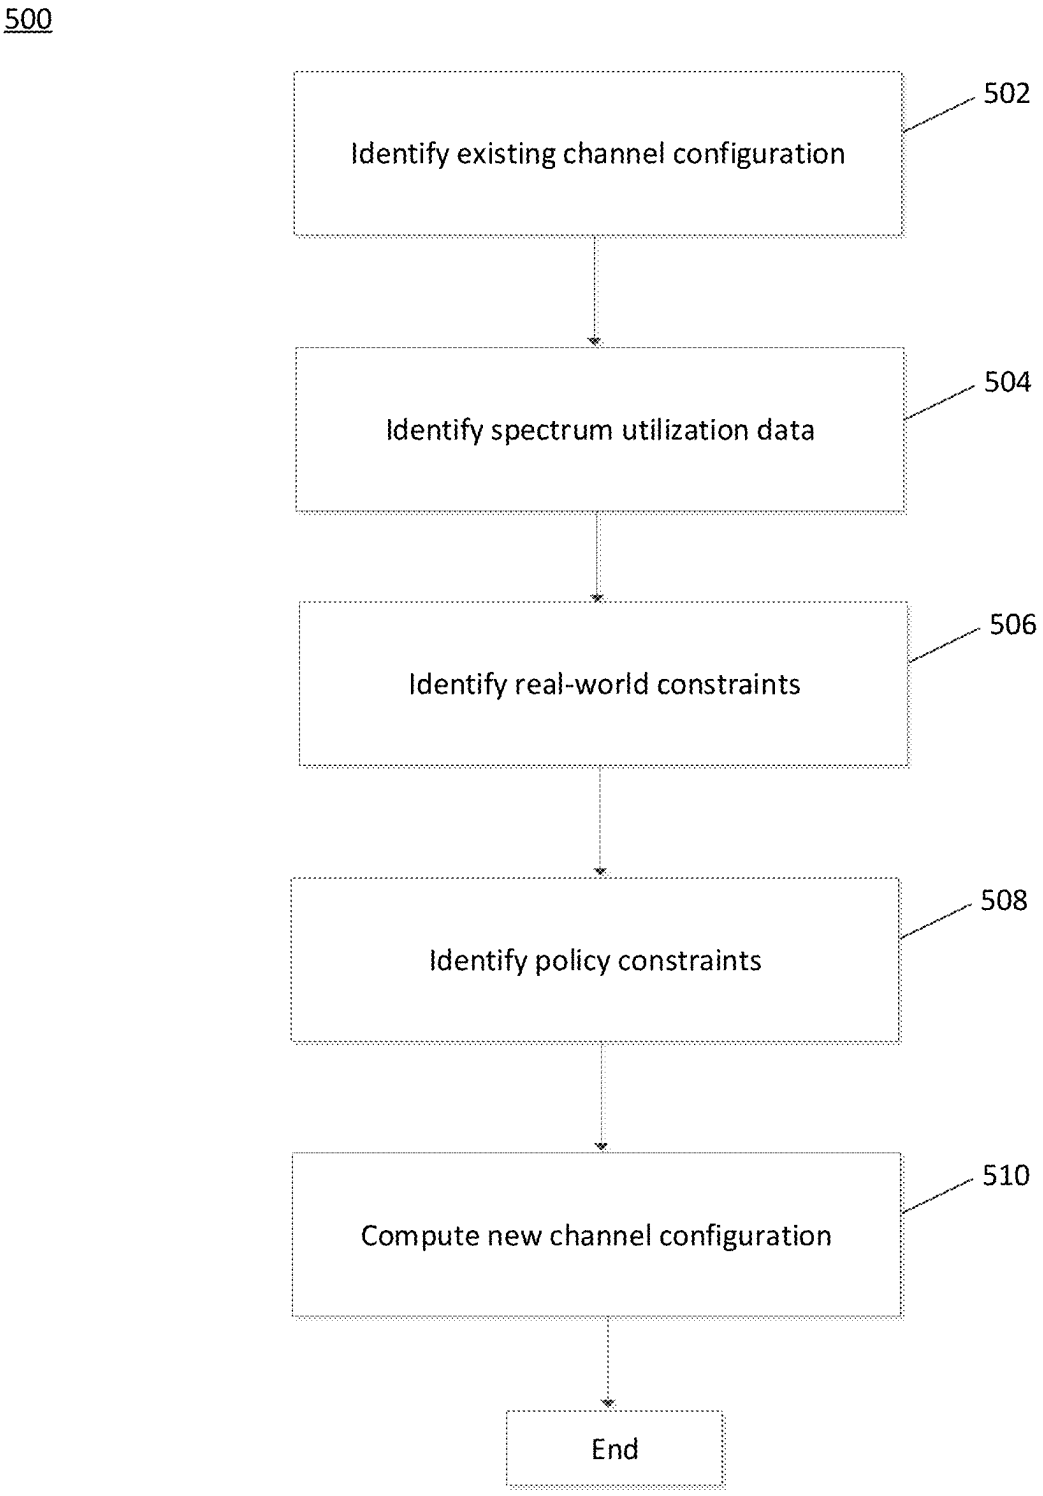
500
Identify existing channel configuration
502
Identify spectrum utilization data
504
Identify real-world constraints
506
Identify policy constraints
508
Compute new channel configuration
510
End

FIG. 5

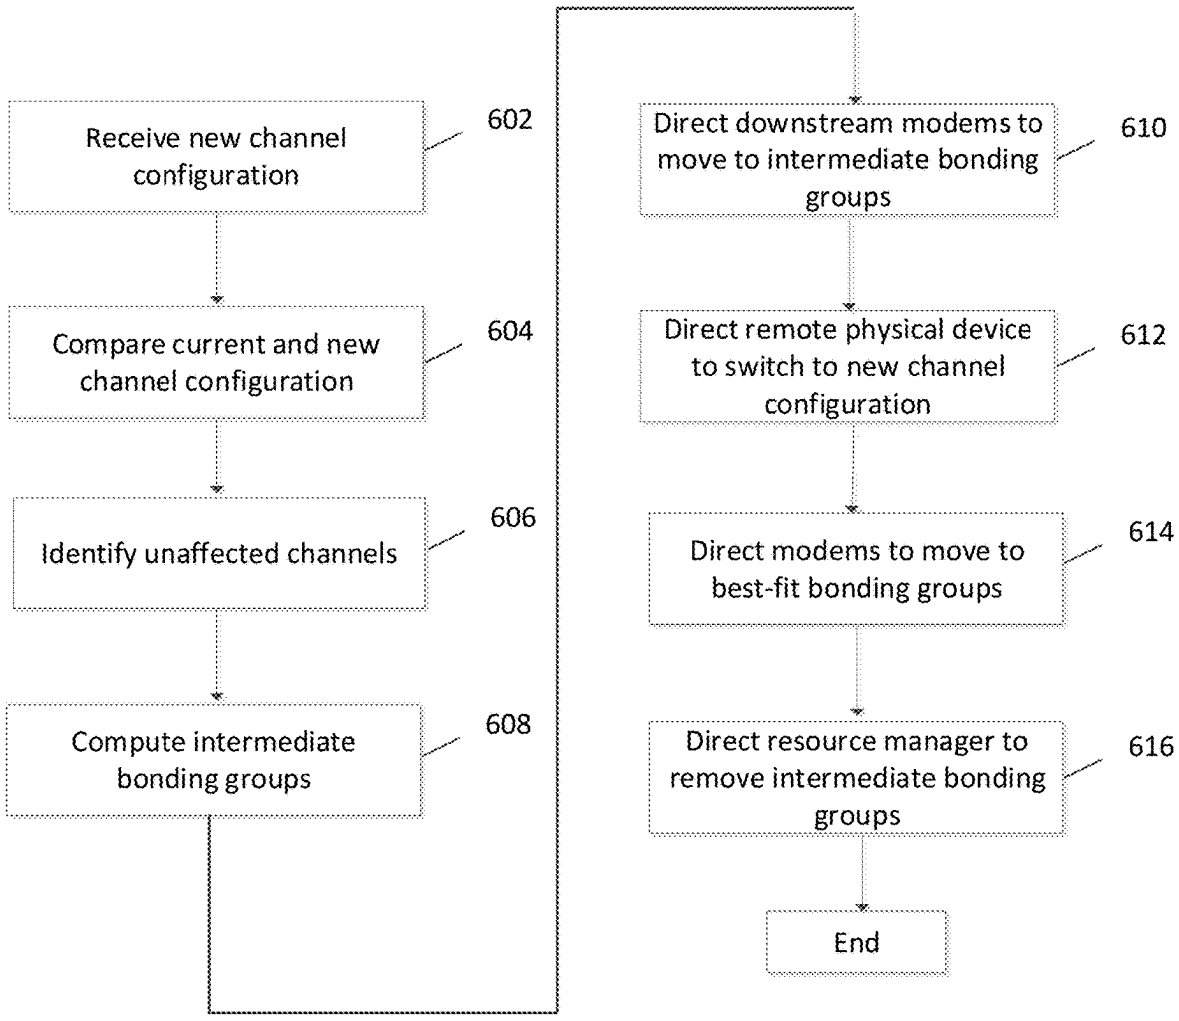
600
Receive new channel configuration
602
Compare current and new channel configuration
604
Identify unaffected channels
606
Compute intermediate bonding groups
608
Direct downstream modems to move to intermediate bonding groups
610
Direct remote physical device to switch to new channel configuration
612
Direct modems to move to best-fit bonding groups
614
Direct resource manager to remove intermediate bonding groups
616
End

FIG. 6

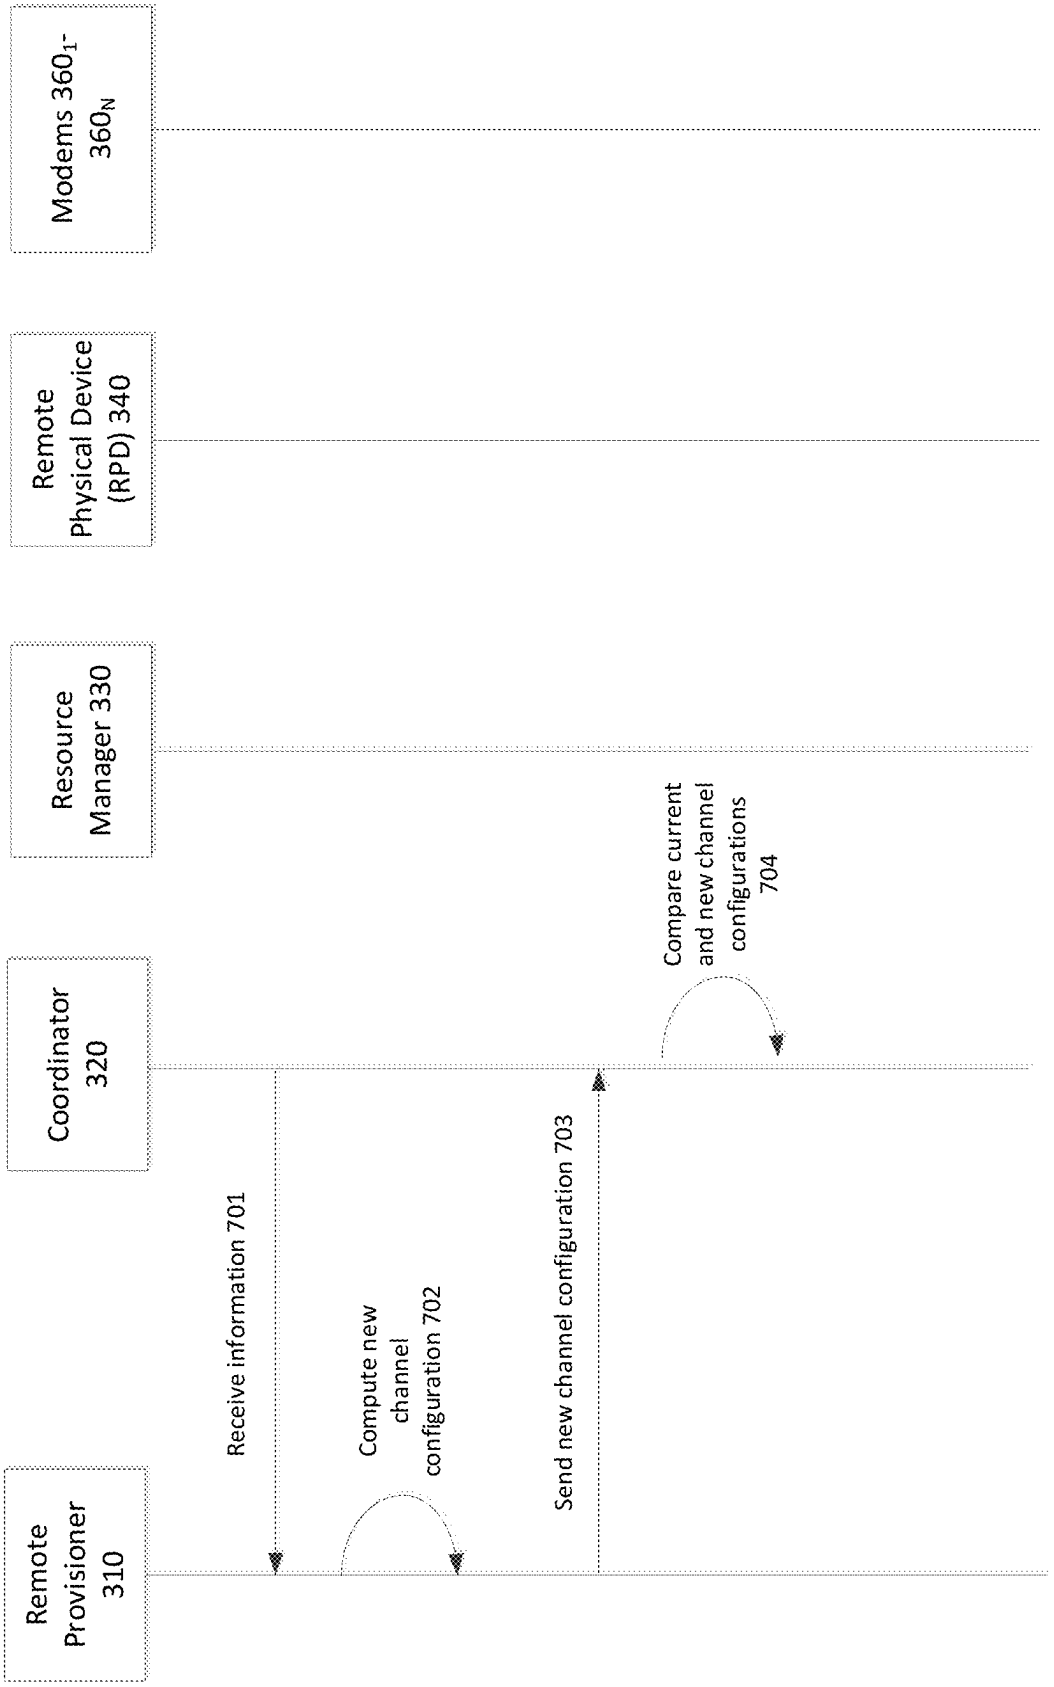
Remote Provisioner 310
Coordinator 320
Resource Manager 330
Remote Physical Device (RPD) 340
Modems 360$_1$-360$_N$
Receive information 701
Compute new channel configuration 702
Send new channel configuration 703
Compare current and new channel configurations 704

FIG. 7A

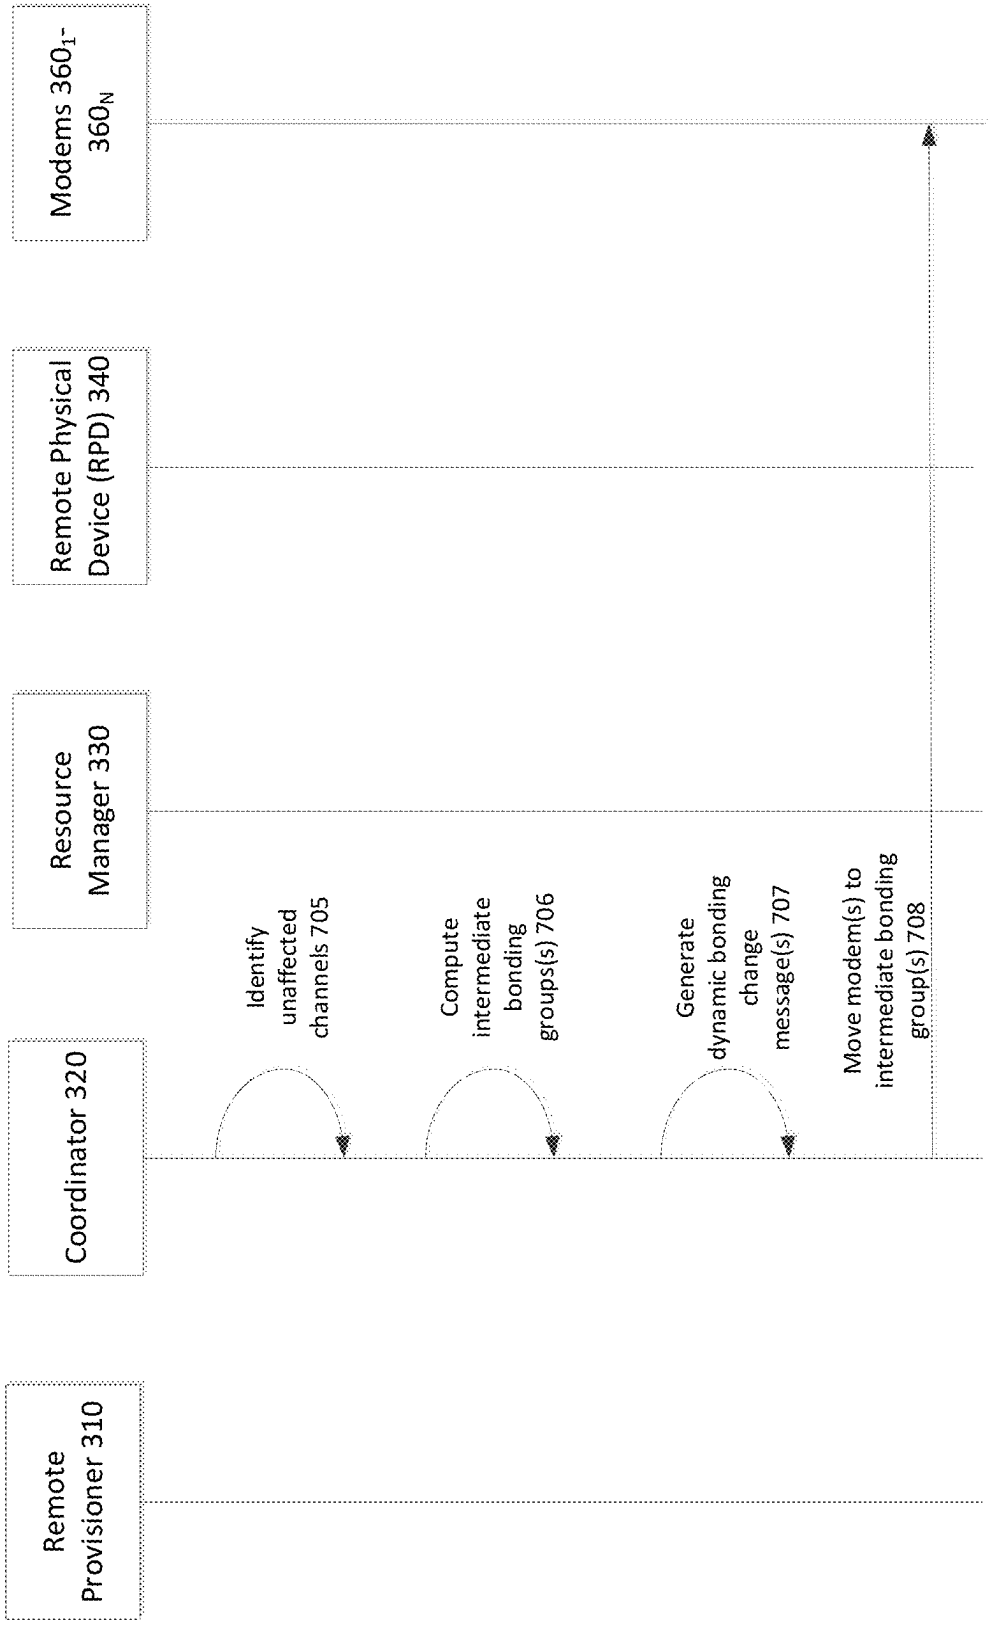
Remote Provisioner 310
Coordinator 320
Resource Manager 330
Remote Physical Device (RPD) 340
Modems 360$_1$-360$_N$
Identify unaffected channels 705
Compute intermediate bonding groups(s) 706
Generate dynamic bonding change message(s) 707
Move modem(s) to intermediate bonding group(s) 708

FIG. 7B

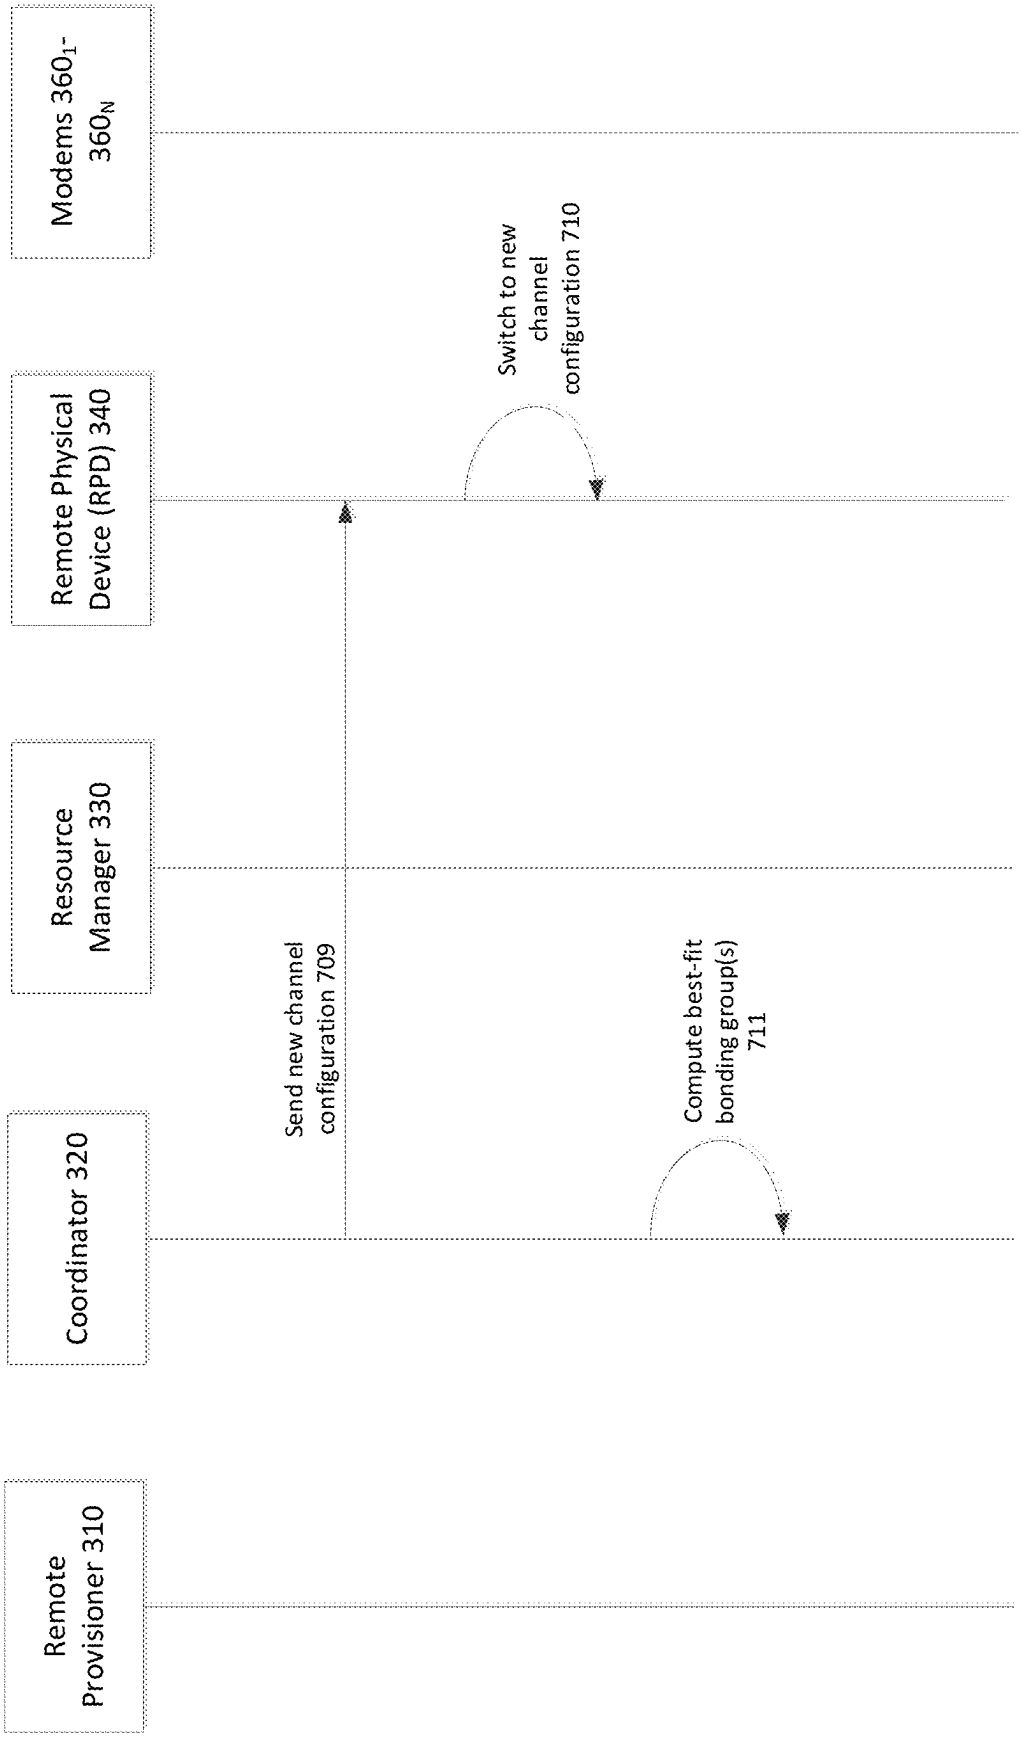
Modems 360$_1$-360$_N$
Remote Physical Device (RPD) 340
Resource Manager 330
Coordinator 320
Remote Provisioner 310
Switch to new channel configuration 710
Send new channel configuration 709
Compute best-fit bonding group(s) 711

FIG. 7C

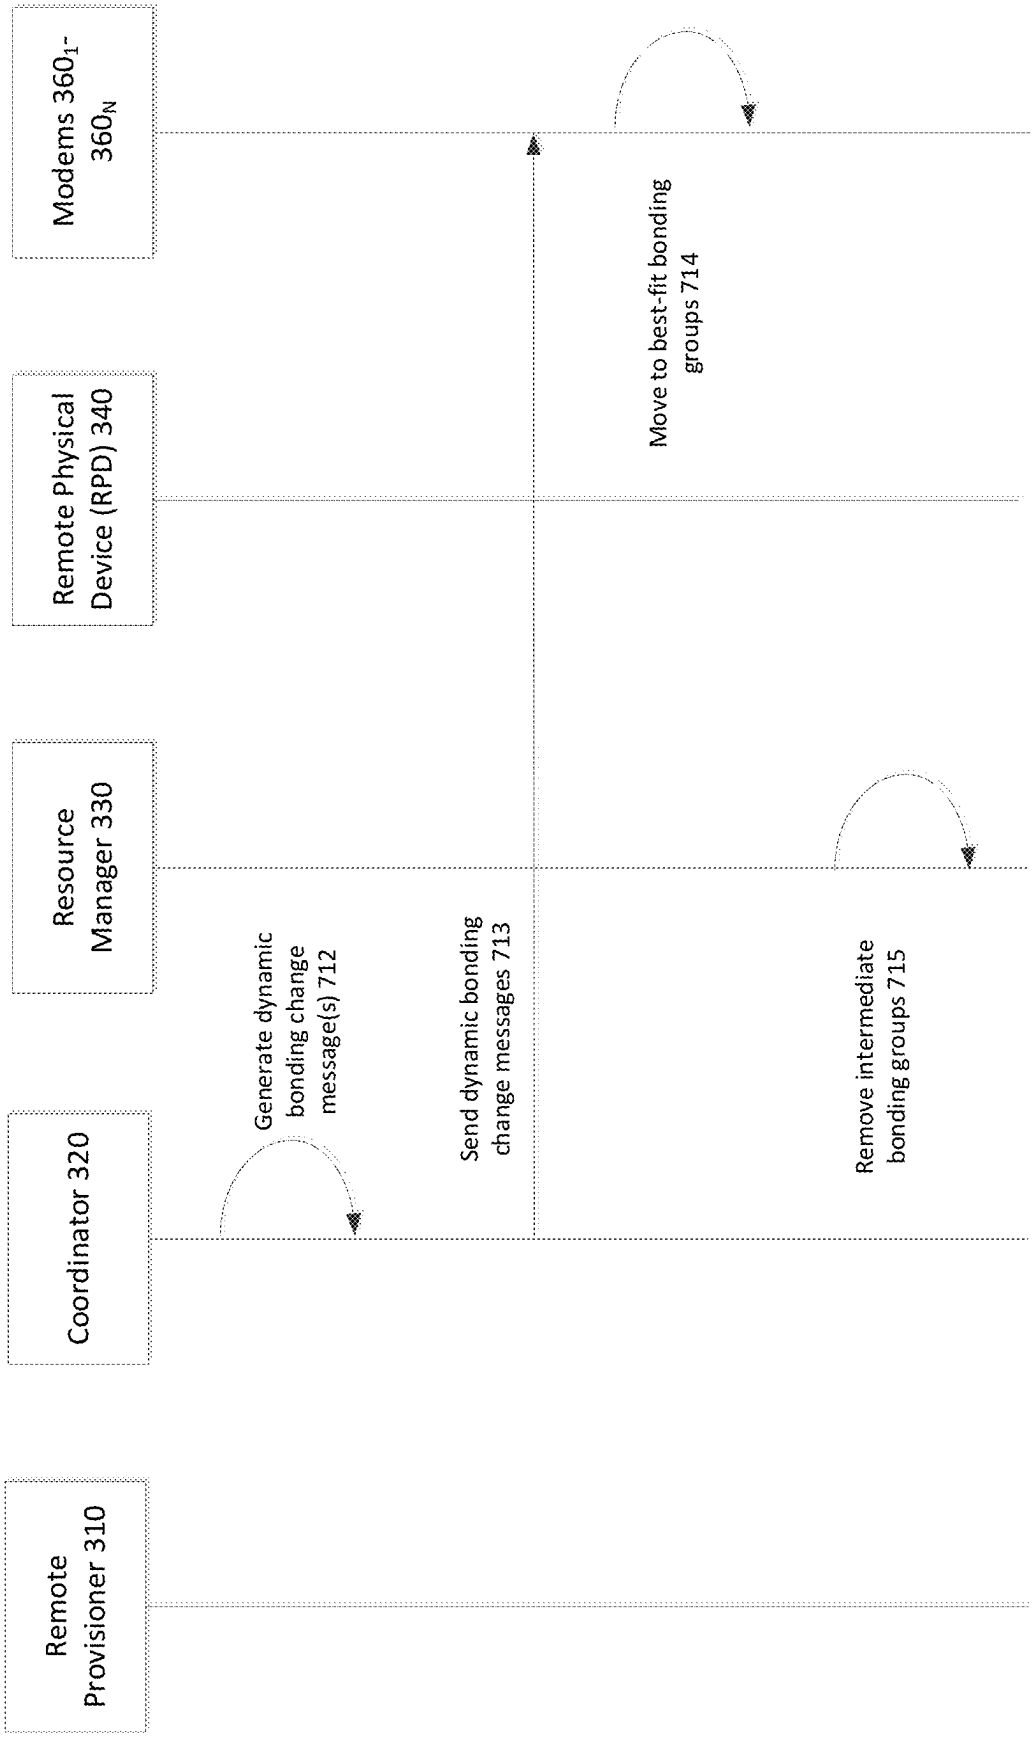
Modems 360_1-360_N
Remote Physical Device (RPD) 340
Resource Manager 330
Coordinator 320
Remote Provisioner 310
Move to best-fit bonding groups 714
Generate dynamic bonding change message(s) 712
Send dynamic bonding change messages 713
Remove intermediate bonding groups 715

FIG. 7D

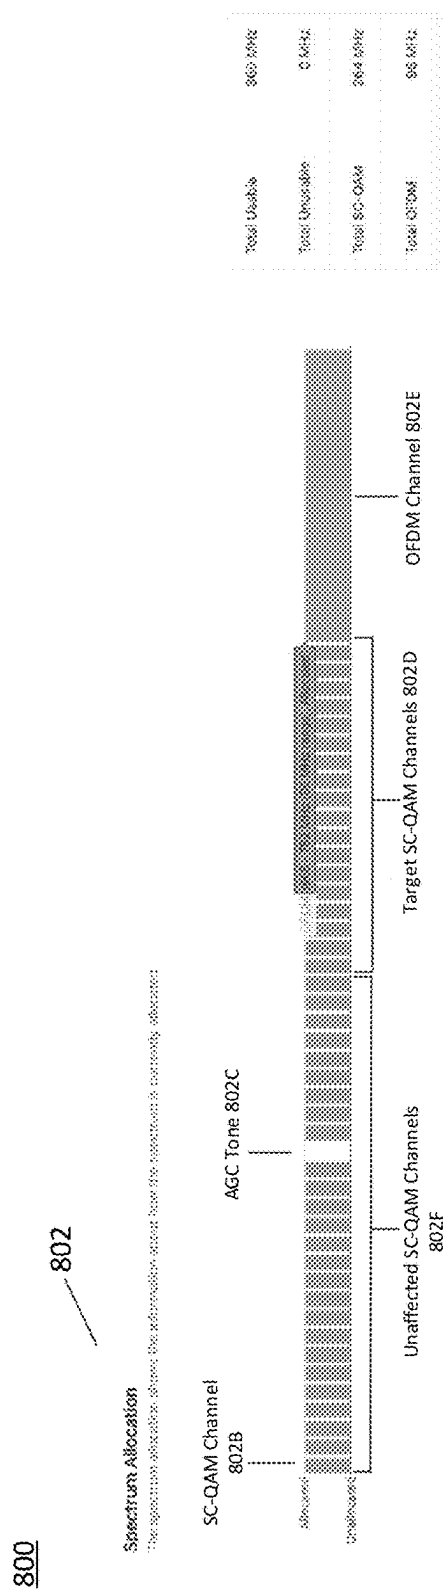
800
802
Spectrum Allocation
SC-QAM Channel 802B
AGC Tone 802C
Unaffected SC-QAM Channels 802F
Target SC-QAM Channels 802D
OFDM Channel 802E
Frequency Range 802A

FIG. 8A

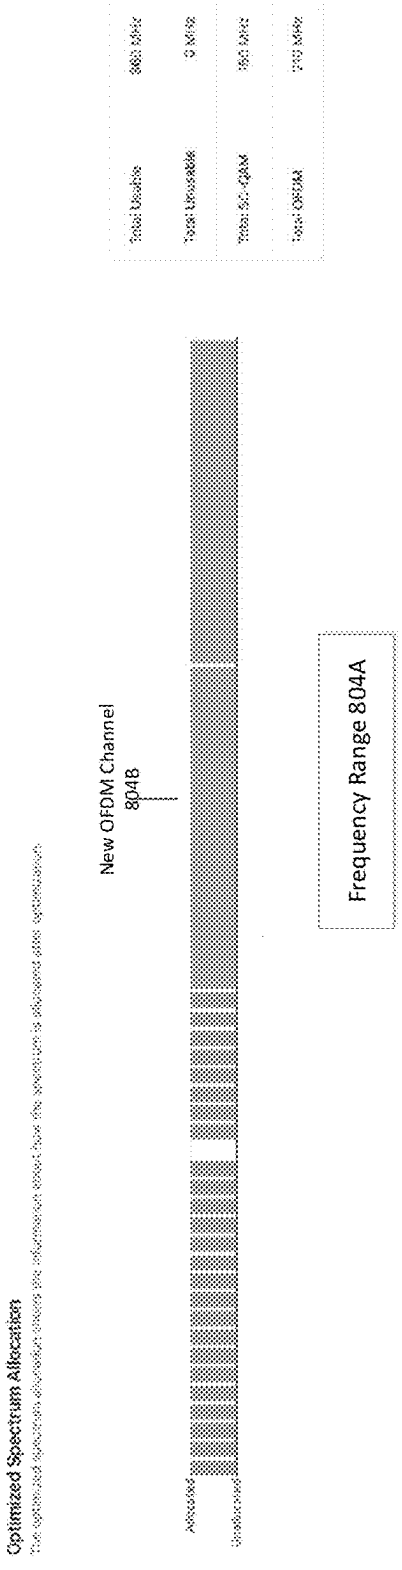
804
Optimized Spectrum Allocation
New OFDM Channel 804B
Frequency Range 804A

FIG. 8B

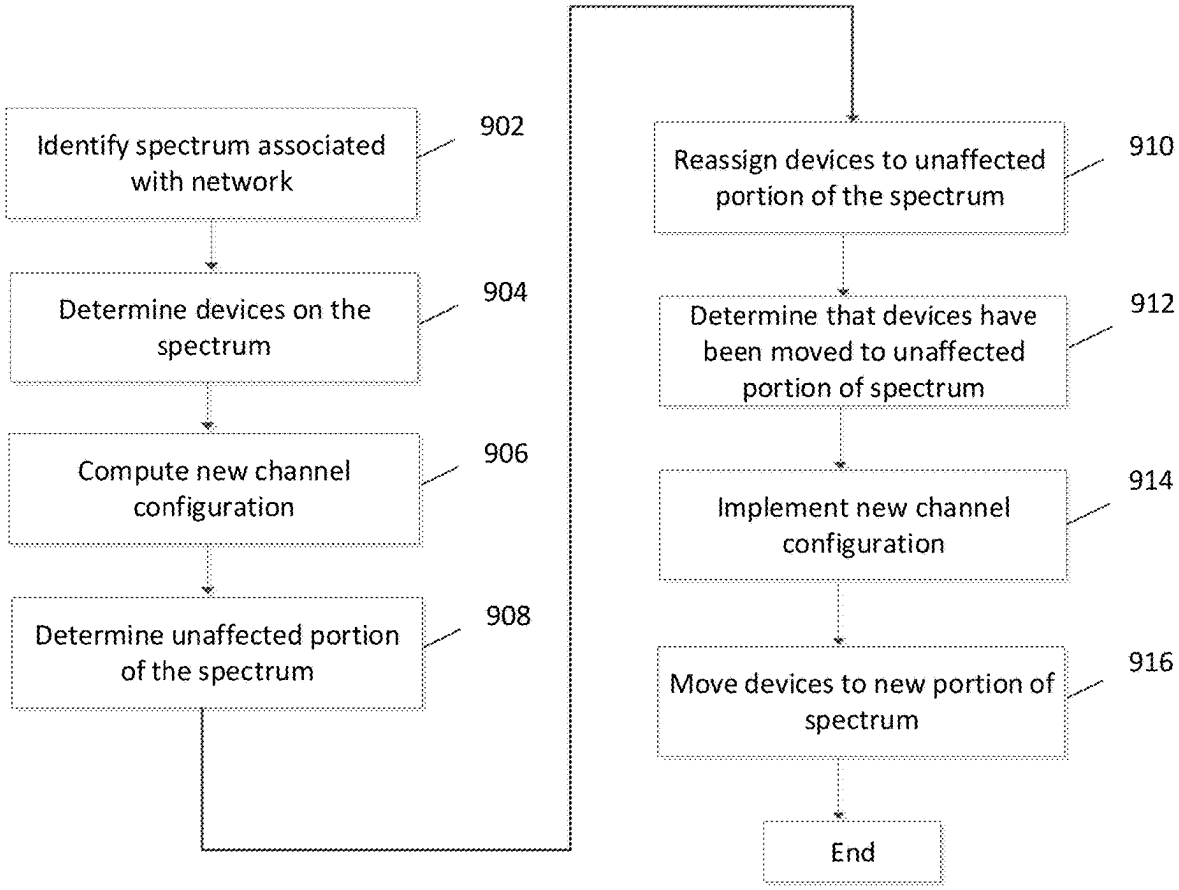
900
Identify spectrum associated with network
902
Determine devices on the spectrum
904
Compute new channel configuration
906
Determine unaffected portion of the spectrum
908
Reassign devices to unaffected portion of the spectrum
910
Determine that devices have been moved to unaffected portion of spectrum
912
Implement new channel configuration
914
Move devices to new portion of spectrum
916
End

FIG. 9

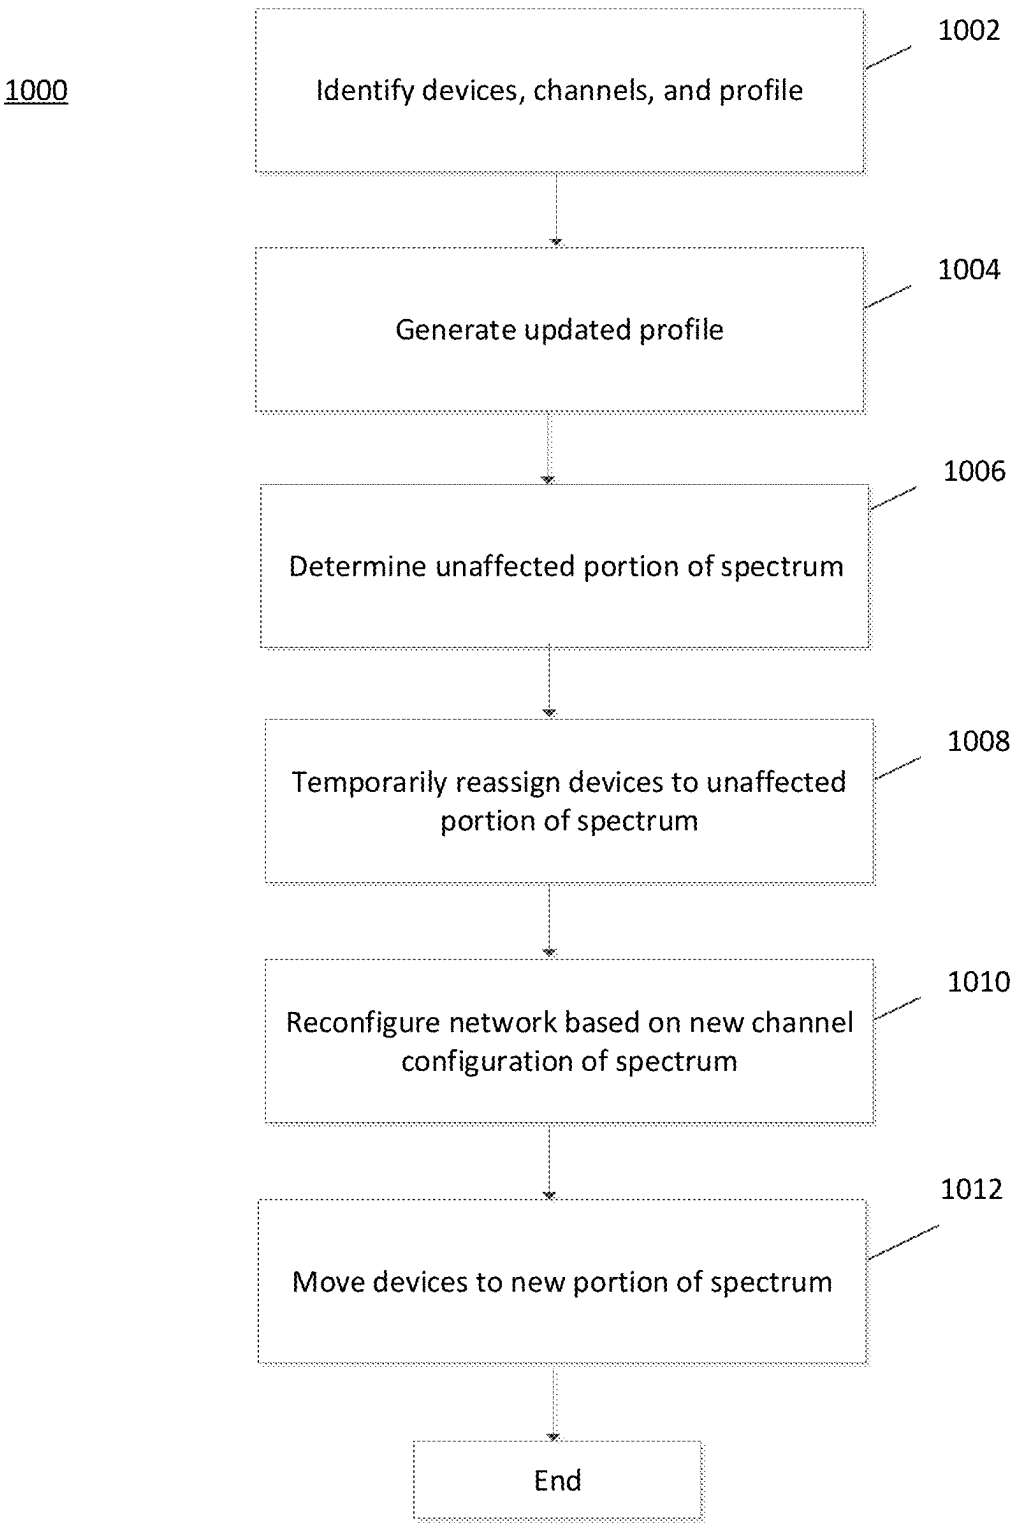
1000
Identify devices, channels, and profile
1002
Generate updated profile
1004
Determine unaffected portion of spectrum
1006
Temporarily reassign devices to unaffected portion of spectrum
1008
Reconfigure network based on new channel configuration of spectrum
1010
Move devices to new portion of spectrum
1012
End

FIG. 10

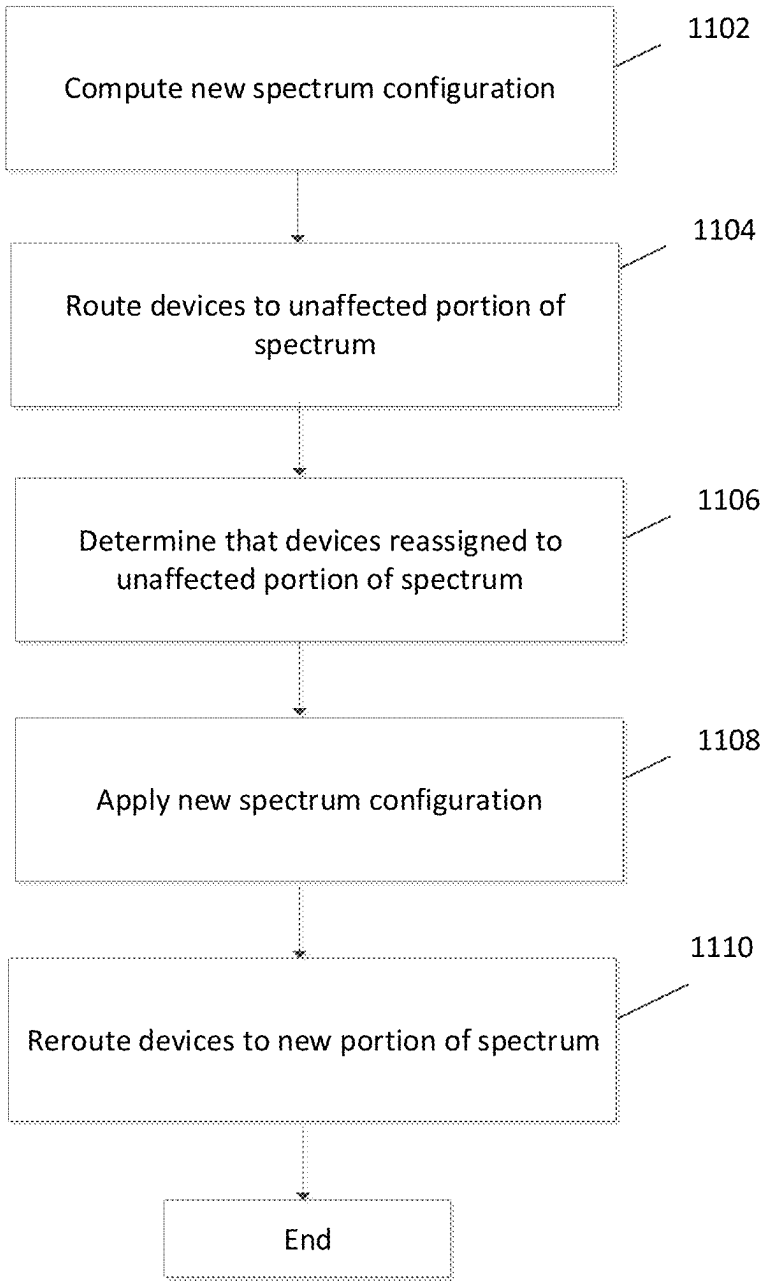
Compute new spectrum configuration
1102
Route devices to unaffected portion of spectrum
1104
Determine that devices reassigned to unaffected portion of spectrum
1106
Apply new spectrum configuration
1108
Reroute devices to new portion of spectrum
1110
End

FIG. 11

SPECTRUM MANAGEMENT

BACKGROUND

[0001] The spectrum of a network may refer to the range of frequencies network devices use to transmit and receive information. A spectrum may further be subdivided into radio frequency (RF) channels. The spectrum may be recharacterized in response to technological improvements or other changing circumstances. Improving the network's characteristics, such as the network capacity, may be a factor in provisioning the network's spectrum. The process of provisioning a spectrum (i.e., adding, removing, and/or modifying RF channels) may be inefficient and time consuming if the network size is large and complex.

SUMMARY

[0002] The following summary presents a simplified summary of certain features. The summary is not an extensive overview and is not intended to identify key or critical elements.

[0003] Systems, apparatuses, and methods are described for remotely reconfiguring a network profile. The network may include a service group or a set of service groups, each including a group of modems. A remote provisioner may receive information associated with a service group, such as the service group's network profile, which may include characteristics about the service group, the RF channel configuration of the service group, etc. The remote provisioner may compute an updated profile that increases the network capacity of the service group. A coordinator may use the updated profile to reconfigure the service group's network without an interruption to the network service of the service group. An advantage is the flexibility and efficiency of reconfiguring a set of service groups, each with their own unique network profile, in parallel.

[0004] According to aspects of the disclosure, methods of managing the spectrum of a network are provided. According to the methods, a spectrum associated with the network can be identified. Based on the spectrum, devices using the spectrum can be determined. A new channel configuration of the spectrum can be computed to increase capacity of the network. A portion of the spectrum that is unaffected by the new channel configuration can be determined. The devices can be reassigned to the unaffected portion of the spectrum using intermediate bonding groups. The new channel configuration can be implemented on the new spectrum after determining that the devices have been moved to the unaffected portion of the spectrum. The device can then be moved to a new portion of the spectrum based on the new channel configuration

[0005] These and other features and advantages are described in greater detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] Some features are shown by way of example, and not by limitation, in the accompanying drawings. In the drawings, like numerals reference similar elements.

[0007] FIG. **1** shows an example communication network.

[0008] FIG. **2** shows hardware elements of a computing device.

[0009] FIG. **3** is a schematic block diagram of a system that remotely reconfigures the network profile of a service group.

[0010] FIG. **4** is a schematic block diagram of a system that remotely reconfigures the network profiles of a set of service groups.

[0011] FIG. **5** is a flow chart showing an example method of computing a new channel configuration for a service group.

[0012] FIG. **6** is a flow chart showing an example method of implementing a new channel configuration for a service group.

[0013] FIGS. **7**A-**7**D are a sequence showing an example method of remotely reconfiguring the network profile of a service group without an interruption to the network service of the service group.

[0014] FIGS. **8**A-**8**B show an example of a current channel configuration and a new channel configuration.

[0015] FIG. **9** is a flow chart showing an example method of remotely reconfiguring a network.

[0016] FIG. **10** is a flow chart showing an example method of remotely reconfiguring a network.

[0017] FIG. **11** is a flow chart showing an example method of remotely reconfiguring a network.

DETAILED DESCRIPTION

[0018] The accompanying drawings, which form a part hereof, show examples of the disclosure. It is to be understood that the examples shown in the drawings and/or discussed herein are non-exclusive and that there are other examples of how the disclosure may be practiced.

[0019] FIG. **1** shows an example communication network **100** in which features described herein may be implemented. The communication network **100** may comprise one or more information distribution networks of any type, such as, without limitation, a telephone network, a wireless network (e.g., an LTE network, a 5G network, a WiFi IEEE 802.11 network, a WiMAX network, a satellite network, and/or any other network for wireless communication), an optical fiber network, a coaxial cable network, and/or a hybrid fiber/coax distribution network. The communication network **100** may use a series of interconnected communication links **101** (e.g., coaxial cables, optical fibers, wireless links, etc.) to connect multiple premises **102** (e.g., businesses, homes, consumer dwellings, train stations, airports, etc.) to a local office **103** (e.g., a headend). The local office **103** may send downstream information signals and receive upstream information signals via the communication links **101**. Each of the premises **102** may comprise devices, described below, to receive, send, and/or otherwise process those signals and information contained therein.

[0020] The communication links **101** may originate from the local office **103** and may comprise components not shown, such as splitters, filters, amplifiers, etc., to help convey signals clearly. The communication links **101** may be coupled to one or more wireless access points **127** configured to communicate with one or more mobile devices **125** via one or more wireless networks. The mobile devices **125** may comprise smart phones, tablets or laptop computers with wireless transceivers, tablets or laptop computers communicatively coupled to other devices with wireless transceivers, and/or any other type of device configured to communicate via a wireless network.

[0021] The local office **103** may comprise an interface **104**. The interface **104** may comprise one or more computing devices configured to send information downstream to, and to receive information upstream from, devices commu-

nicating with the local office **103** via the communications links **101**. The interface **104** may be configured to manage communications among those devices, to manage communications between those devices and backend devices such as servers **105-107**, and/or to manage communications between those devices and one or more external networks **109**. The interface **104** may, for example, comprise one or more routers, one or more base stations, one or more optical line terminals (OLTs), one or more termination systems (e.g., a modular cable modem termination system (M-CMTS) or an integrated cable modem termination system (I-CMTS)), one or more digital subscriber line access modules (DSLAMs), and/or any other computing device(s). The local office **103** may comprise one or more network interfaces **108** that comprise circuitry needed to communicate via the external networks **109**. The external networks **109** may comprise networks of Internet devices, telephone networks, wireless networks, wired networks, fiber optic networks, and/or any other desired network. The local office **103** may also or alternatively communicate with the mobile devices **125** via the interface **108** and one or more of the external networks **109**, e.g., via one or more of the wireless access points **127**.

[0022] The push notification server **105** may be configured to generate push notifications to deliver information to devices in the premises **102** and/or to the mobile devices **125**. The content server **106** may be configured to provide content to devices in the premises **102** and/or to the mobile devices **125**. This content may comprise, for example, video, audio, text, web pages, images, files, etc. The content server **106** (or, alternatively, an authentication server) may comprise software to validate user identities and entitlements, to locate and retrieve requested content, and/or to initiate delivery (e.g., streaming) of the content. The application server **107** may be configured to offer any desired service. For example, an application server may be responsible for collecting, and generating a download of, information for electronic program guide listings. Another application server may be responsible for monitoring user viewing habits and collecting information from that monitoring for use in selecting advertisements. Yet another application server may be responsible for formatting and inserting advertisements in a video stream being transmitted to devices in the premises **102** and/or to the mobile devices **125**. The local office **103** may comprise additional servers, additional push, content, and/or application servers, and/or other types of servers. Although shown separately, the push server **105**, the content server **106**, the application server **107**, and/or other server(s) may be combined. The servers **105**, **106**, **107**, and/or other servers, may be computing devices and may comprise memory storing data and also storing computer executable instructions that, when executed by one or more processors, cause the server(s) to perform steps described herein.

[0023] An example premises **102***a* may comprise an interface **120**. The interface **120** may comprise circuitry used to communicate via the communication links **101**. The interface **120** may comprise a modem **110**, which may comprise transmitters and receivers used to communicate via the communication links **101** with the local office **103**. The modem **110** may comprise, for example, a coaxial cable modem (for coaxial cable lines of the communication links **101**), a fiber interface node (for fiber optic lines of the communication links **101**), twisted-pair telephone modem, a wireless transceiver, and/or any other desired modem device. One modem is shown in FIG. **1**, but a plurality of modems operating in parallel may be implemented within the interface **120**. The interface **120** may comprise a gateway **111**. The modem **110** may be connected to, or be a part of, the gateway **111**. The gateway **111** may be a computing device that communicates with the modem(s) **110** to allow one or more other devices in the premises **102***a* to communicate with the local office **103** and/or with other devices beyond the local office **103** (e.g., via the local office **103** and the external network(s) **109**). The gateway **111** may comprise a set-top box (STB), digital video recorder (DVR), a digital transport adapter (DTA), a computer server, and/or any other desired computing device.

[0024] The gateway **111** may also comprise one or more local network interfaces to communicate, via one or more local networks, with devices in the premises **102***a*. Such devices may comprise, e.g., display devices **112** (e.g., televisions), other devices **113** (e.g., a DVR or STB), personal computers **114**, laptop computers **115**, wireless devices **116** (e.g., wireless routers, wireless laptops, notebooks, tablets and netbooks, cordless phones (e.g., Digital Enhanced Cordless Telephone—DECT phones), mobile phones, mobile televisions, personal digital assistants (PDA)), landline phones **117** (e.g., Voice over Internet Protocol-VoIP phones), and any other desired devices. Example types of local networks comprise Multimedia Over Coax Alliance (MoCA) networks, Ethernet networks, networks communicating via Universal Serial Bus (USB) interfaces, wireless networks (e.g., IEEE 802.11, IEEE 802.15, Bluetooth), networks communicating via in-premises power lines, and others. The lines connecting the interface **120** with the other devices in the premises **102***a* may represent wired or wireless connections, as may be appropriate for the type of local network used. One or more of the devices at the premises **102***a* may be configured to provide wireless communications channels (e.g., IEEE 802.11 channels) to communicate with one or more of the mobile devices **125**, which may be on- or off-premises.

[0025] The mobile devices **125**, one or more of the devices in the premises **102***a*, and/or other devices may receive, store, output, and/or otherwise use assets. An asset may comprise a video, a game, one or more images, software, audio, text, webpage(s), and/or other content.

[0026] FIG. **2** shows hardware elements of a computing device **200** that may be used to implement any of the computing devices shown in FIG. **1** (e.g., the mobile devices **125**, any of the devices shown in the premises **102***a*, any of the devices shown in the local office **103**, any of the wireless access points **127**, any devices with the external network **109**) and any other computing devices discussed herein (e.g., remote provisioner **310**, coordinator **320**, resource manager **330**, remote physical device **340**, modems $\mathbf{360}_1$-$\mathbf{360}_N$, etc). The computing device **200** may comprise one or more processors **201**, which may execute instructions of a computer program to perform any of the functions described herein. The instructions may be stored in a non-rewritable memory **202** such as a read-only memory (ROM), a rewritable memory **203** such as random access memory (RAM) and/or flash memory, removable media **204** (e.g., a USB drive, a compact disk (CD), a digital versatile disk (DVD)), and/or in any other type of computer-readable storage medium or memory. Instructions may also be stored in an attached (or internal) hard drive **205** or other types of storage media. The computing device **200** may comprise one or

more output devices, such as a display device **206** (e.g., an external television and/or other external or internal display device) and a speaker **214**, and may comprise one or more output device controllers **207**, such as a video processor or a controller for an infra-red or BLUETOOTH transceiver. One or more user input devices **208** may comprise a remote control, a keyboard, a mouse, a touch screen (which may be integrated with the display device **206**), microphone, etc. The computing device **200** may also comprise one or more network interfaces, such as a network input/output (I/O) interface **210** (e.g., a network card) to communicate with an external network **209**. The network I/O interface **210** may be a wired interface (e.g., electrical, RF (via coax), optical (via fiber)), a wireless interface, or a combination of the two. The network I/O interface **210** may comprise a modem configured to communicate via the external network **209**. The external network **209** may comprise the communication links **101** discussed above, the external network **109**, an in-home network, a network provider's wireless, coaxial, fiber, or hybrid fiber/coaxial distribution system (e.g., a DOCSIS network), or any other desired network. The computing device **200** may comprise a location-detecting device, such as a global positioning system (GPS) microprocessor **211**, which may be configured to receive and process global positioning signals and determine, with possible assistance from an external server and antenna, a geographic position of the computing device **200**.

[0027] Although FIG. **2** shows an example hardware configuration, one or more of the elements of the computing device **200** may be implemented as software or a combination of hardware and software. Modifications may be made to add, remove, combine, divide, etc. components of the computing device **200**. Additionally, the elements shown in FIG. **2** may be implemented using basic computing devices and components that have been configured to perform operations such as are described herein. For example, a memory of the computing device **200** may store computer-executable instructions that, when executed by the processor **201** and/or one or more other processors of the computing device **200**, cause the computing device **200** to perform one, some, or all of the operations described herein. Such memory and processor(s) may also or alternatively be implemented through one or more Integrated Circuits (ICs). An IC may be, for example, a microprocessor that accesses programming instructions or other data stored in a ROM and/or hardwired into the IC. For example, an IC may comprise an Application Specific Integrated Circuit (ASIC) having gates and/or other logic dedicated to the calculations and other operations described herein. An IC may perform some operations based on execution of programming instructions read from ROM or RAM, with other operations hardwired into gates or other logic. Further, an IC may be configured to output image data to a display buffer.

[0028] FIG. **3** is a schematic block diagram of a system that remotely reconfigures the network profile of a service group. Referring to FIG. **3**, the system **300** may include a remote provisioner **310**, a coordinator **320**, a resource manager **330**, a remote physical device (RPD) **340**, a service group **350**, and modems $\mathbf{360}_1$-$\mathbf{360}_N$. The previously mentioned devices may include one or more physical components, such as one or more processors memories, communication interfaces, and/or the like, e.g., the computing device **200** of FIG. **2**.

[0029] A network (e.g., communication network **100**) may be segmented into multiple service groups, in which each service group (i.e., service group **350**) uses a spectrum in a frequency range that includes a set of RF channels, optical wavelengths, or optical channels or subcarriers modulated onto an optical wavelength that a group of modems (i.e., modems $\mathbf{360}_1$-$\mathbf{360}_N$) may use to receive or transmit information over the network. For example, in a hybrid fiber/coaxial distribution network, (i.e., a DOCSIS network), the service group **350** may include a combination D3.0 single carrier quadrature amplitude modulation (SC-QAM) channels and/or D3.1 orthogonal frequency division multiplexing (OFDM) channels. The service group **350** may further have a network profile that includes information about the service group **350** such as the current RF channel configuration, the characteristics of the modems $\mathbf{360}_1$-$\mathbf{360}_N$, the network capacity of the service group, a set of configurations and/or constraints related to the service group **350**, such as the minimum/maximum number of usable channels in the service group **350**, minimum/maximum channel size, channel guard band size, frequency range, spectral efficiency, spectrum/channel utilization, and/or other characteristics and information.

[0030] The modems $\mathbf{360}_1$-$\mathbf{360}_N$ may be a group of modem devices, such as the modem devices **110** of FIG. **1**, and may be computing devices, such as the computing device **200** of FIG. **2**. Further, each of the modems $\mathbf{360}_1$-$\mathbf{360}_N$ in the service group **350** may have characteristics unique to the particular modem, such as a modem (e.g., modem $\mathbf{360}_1$) having D3.0 and/or D3.1 capabilities. For example, a 16-channel D3.0 SC-QAM modem may use 16 SC-QAM channels to transmit and receive information. Although the details discussed below are with respect to a service group using a combination of SC-QAM channels and/or OFDM channels in a hybrid fiber/coaxial distribution network, the present invention may be used for any type of spectrum in a network (e.g., wireless, coaxial, fiber, etc), channel configuration/modulation scheme (e.g., D4.0), and modems/modem devices without departing from the scope of the disclosure.

[0031] The remote provisioner **310** is a computing device that may be configured to receive information (e.g., information related to a service group's network profile, such as the current channel configuration). Moreover, this information may be used by the remote provisioner **310** to compute a new channel configuration as part of an updated network profile that increases the network capacity of the service group, as discussed in more detail in FIG. **5**.

[0032] The coordinator **320** is a computing device that may gather and send information related to a service group's (e.g., service group **350**) network profile to the remote provisioner **310**, receive a new channel configuration from the remote provisioner **310**, compare the new channel configuration of the service group **350** to the current channel configuration of the service group, identify unaffected channels based on differences between the current and new channel configuration, compute intermediate bonding groups, direct modems $\mathbf{360}_1$-$\mathbf{360}_N$ to move to intermediate bonding groups while the new channel configuration is being implemented, identify that the modems $\mathbf{360}_1$-$\mathbf{360}_N$ have been moved or reassigned to intermediate bonding groups, direct the modems to best-fit bonding groups after the new channel configuration is implemented, all without an interruption to the network performance of the modems

360_1-360_N (by utilizing the intermediate bonding groups) within the service group **350**, as discussed in more detail in FIG. **6**.

[0033] The remote provisioner **310** and/or the coordinator **320** may be a single or separate computing device, and may be located at the local office **103** and/or remotely at the external network **109**. Remotely reconfiguring the network profile of a service group may provide more flexibility and efficiency as opposed to performing the reconfiguring locally.

[0034] Resource manager **330** is a computing device (e.g., the computing device **200**), which may, e.g., be part of the interface **104** at the local office **103**. According to various embodiments, resource manager **330** may also comprise a cable modem termination system, an edge router, and/or digital subscriber line access multiplexer, to name a few non-limiting examples. Resource manager **330** may be used to monitor network traffic associated with modems 360_1-360_N. In some instances, resource manager **330** may be a cable modem termination system. The resource manager **330** may also receive messages (e.g., dynamic bonding change messages and/or other messages) from the coordinator **320**, support the coordinator **320** in moving the modems 360_1-360_N to intermediate bonding groups and/or best-fit bonding groups, and in removing intermediate bonding groups, as discussed in more detail in FIG. **7**.

[0035] The RPD **340** may be a transceiver that converts RF signals into data packets in an upstream transmission, and convert data packets to RF signals in a downstream transmission. The RPD **340** may be located in proximity to or co-located with the resource manager **330**. The transceiver may be an antenna connected to a coaxial cable or optical fiber at the resource manager **330**, and that coaxial cable may extend to the various homes (i.e., the multiple premises **102**) in a particular region (e.g., service group **350**) serviced by the resource manager **330**. The RPD **340** may be configured to communicate with a group of modem devices, such as modems 360_1-360_N, via a plurality of RF channels configured for the transceiver. For example, the RPD **340** may convert data packets from the resource manager **330** to an RF signal and transmit the RF signal to modems 360_1-360_N via the RF channels configured for the RPD **340**. The RPD **340** may further receive a new channel configuration from the coordinator **320** and/or commands from the coordinator **320** that direct the RPD **340** to switch from the current channel configuration to the new channel configuration, as discussed in more detail in FIG. **7**.

[0036] FIG. **4** is a schematic block diagram of a system that remotely reconfigures the network profile of a set of service groups. Similar to the system **300** described by FIG. **3**, the system **400** may have a remote provisioner **310** and a coordinator **320** that perform similar functions. Although not shown, each of the service groups **4101**, and **4102** through **410**N may be connected to the coordinator **320** via a resource manager **330** and a remote physical device (RPD) **340** (i.e., a resource manager and RPD for service group **4101**, a resource manager and RPD for service group **4102**, etc). The remote provisioner **310** and the coordinator **320** may perform the previously mentioned functions with respect to FIG. **3** for a set of service groups, such as service groups **4101**, and **4102** through **410**N. In this manner, the network profile of each of the service groups **4101**, and **4102** through **410**N may be remotely reconfigured in parallel, and in doing so, increase the network capacity of each of the service groups **4101**, and **4102** through **410**N simultaneously.

[0037] FIG. **5** is a flow chart showing an example method of computing a new channel configuration for a service group. Although shown sequentially for clarity, steps **502**-**508** may be performed simultaneously and inputted together into step **510**. Further, any of steps **502**-**508** may be performed in any order, may be omitted, and/or may be modified in some embodiments. Additionally, for ease of explanation, method **500** is discussed with respect to the system outlined in FIG. **3**. However, it should be understood that the method **500** is not so limited to the specific embodiment of FIG. **3**. The steps shown in FIG. **5** may serve as an example of how the remote provisioner **310** may receive information related to a service group's (e.g., service group **350**) network profile and use those characteristics to compute a new channel configuration for the service group **350** as part of provisioning the new spectrum of the service group **350**. In some instances the information identified by the remote provisioner **310** in steps **502**-**508** may be received from the coordinator **320** in response to a request by the remote provisioner **310**.

[0038] At step **502**, the remote provisioner **310** may identify a current channel configuration. For example, the current channel configuration may look like the current channel configuration **802** of FIG. **8**A. As shown in FIG. **8**A, the current channel configuration **802** may be in a frequency range **802**A, and include a set of SC-QAM channels, such as SC-QAM channel **802**B, and an OFDM channel **802**E. However, the current channel configuration is not limited to what is shown in FIG. **8**A.

[0039] At step **504**, the remote provisioner **310** may identify spectrum utilization data. Spectrum utilization may generally refer to how an RF channel or group of RF channels are being utilized by the modems 360_1-360_N in the service group **350**. The utilization may be a percentage that ranges from 0-100%. A higher percentage utilization (e.g., 80%) means that a channel (e.g., SC-QAM channel **802**B) is being utilized more by the modems 360_1-360_N. Further, there may be a utilization that refers to the utilization of an entire group of RF channels, such as an SC-QAM utilization which refers to the utilization of all the SC-QAM channels, and there may be an OFDM utilization, which refers to the utilization of all the OFDM channel(s). In computing the new channel configuration in step **510**, the remote provisioner **310** may take into account how changing the channel configuration may affect the utilization of either the SC-QAM channels and/or the OFDM channel(s).

[0040] At step **506**, the remote provisioner **310** may identify real-world constraints. Real-world constraints may include, for example, automatic gain control (AGC) tones (e.g., AGC tone **802**C), local RF channel inserts, exclusion zones, the hardware limitations the RPD **340**, etc. These constraints may limit certain frequency ranges/spectrum from being allocated by the remote provisioner **310** in computing the new channel configuration in step **510**, and may be required to be "worked-around" in the computing of step **510**.

[0041] At step **508**, the remote provisioner may identify policy constraints. Policy constraints may be more flexible than the real-world constraints, and may be based on the characteristics of a particular service group (e.g., service group **350**). For example, a policy constraint may include a

maximum utilization of SC-QAM channels and/or OFDM channels or a supported data speed capability for specific modems. For example, an upper limit utilization of 60% may be used to ensure high service quality for the service group **350**. However, the utilization may be changed based on the preferences of any given service group.

[0042] At step **510**, the remote provisioner **310** may take the results of steps **502-508** and compute a new channel configuration for the service group **510**. Table 1 below shows a list of example considerations/constraints that may be used by remote provisioner **310** as part of computing a new channel configuration in step **510**.

TABLE 1

Real-World and Policy-Based Constraints

Attribute	Common Value	Description
SC-QAM/OFDM utilization upper limit	60%	The utilization on both SC-QAM and OFDM may have upper limits, such as 60%, to ensure high service quality. This means that the algorithm may need to ensure the estimated SC-QAM utilization and OFDM utilization may not exceed the given limit after the optimization/rebalance. This threshold may account for some years of compound annual growth rate (CAGR) which may influence this threshold to avoid increases in consumption growth that may require adding back SC-QAM spectrum.
RF tones		Existing tones such as automatic gain control (AGC) tones, local RF channel inserts, and video on demand (VoD) channels may need to be correctly handled for each service group. For example, analog AGC tones may not overlap with DOCSIS spectrum but may be "worked around" by adding exclusion zones in OFDM channels; digital AGC tones may require presence of neighboring power within a certain frequency range to the tone for an optimal level of performance.
Exclusion zones		Known exclusion zones may need to be considered in the optimization. For example, if a frequency range is known to suffer from ingress impairments, the algorithm may need to ensure that the SC-QAM channels may not overlap with the ingress.
Maximum data speed per modem type		Different modems may be expected to perform at different data speeds. Based on the modem's capabilities the spectrum configuration may need to provide sufficient capacity in the channels that the modem is capable of accessing.
Minimum number of SC-QAM channels	24	A minimum number of SC-QAM channels, for example, 24, or 32 channels may be required to achieve maximum product data speed offers on D3.0 modems even if the overall capacity would accommodate a channel reduction. This constraint may also vary on a per service group basis.
SC-QAM channel size	6 MHz	Allocation of SC-QAM channels may need to use a minimum unit size.
OFDM channel size limits	24-192 MHz	The OFDM channels may have size limits. The DOCSIS 3.1 CM physical layer specification may allow an OFDM channel to be 24 MHz to 192 MHz wide, but this range may vary based on deployment requirements.
OFDM channel guard band size	1 MHz	The OFDM channels' guard band overhead may need to be accounted for by the algorithm. Such a requirement may allow for optimization accuracy and more meaningful reasoning for the recommendations when necessary.
SC-QAM applicable frequency ranges		The SC-QAM channels may have preferred frequency ranges in deployment.
Contiguous spectrum allocation requirements		The SC-QAM channels may require minimum allocation sizes, for example, 4 contiguous channels per allocation block.
Spectrum ordering		The SC-QAM channels may be preferred to be allocated to the lower frequency end, relative to the OFDM spectrum.
Hardware limitations		Hardware limitations such as the RPD chipset's capabilities can affect the maximum supported number of certain types of channels.

[0043] For example, computing the new channel configuration may be modeled as an optimization problem, with various constraints and considerations factoring into the computing. A mixed-integer linear programming (MILP) algorithm may be used to the solve the optimization problem by modeling the constraints as linear inequalities, and solving the linear inequalities to find a new channel configuration that increases the network capacity of the service group **350**. The following equations (1)-(9) and their explanation detail an example MILP algorithm to compute a new channel configuration, and in no way limits the present discussion on how a new channel configuration may be computed.

[0044] First, a definition of contiguous spectrum segment/channel may be created to represent a frequency range that may be freely used by DOCSIS channels. With this definition, constraints may be contained within each contiguous spectrum segment and be simplified. For example, constraints 2 and 3 in Table 1 may become preprocessing rules for identifying contiguous spectrum segments. Contiguous segments/channels may be two or more adjacent channels in any given frequency range. Because the objective of this optimization may be defined as maximizing the total spectral efficiency (e.g., linearly related to the total capacity), the objective function may be defined as:

The Objective Function

$$\max \sum_{i=1}^{N} x_i + \alpha \times y_i \qquad \text{Equation 1}$$

where N may be the number of contiguous spectrum segments that may be reallocated and each of the segments may vary in their frequency ranges, x_i may be the target allocation of SC-QAM spectrum, y_i may the target allocation of OFDM spectrum (with guard bands subtracted), a may be the spectral efficiency ratio of OFDM/SC-QAM which suggested by the overall downstream capacity gain (~44%) observed on OFDM channels.

[0045] For each individual contiguous spectrum segment, the total allocated spectrum may need to be smaller than or equal to the size (W) of the segment:

Total Spectrum Segment Constraint

$$x_i + y_i + K \times n_i \le W_i \qquad \text{Equation 2}$$

where x_i may be the target allocation of SC-QAM, y_i may be the target allocation of OFDM (with guard bands subtracted), K may be the total OFDM guard band size per OFDM channel, n_i may be the number of OFDM channels (to take OFDM's guard band overhead into consideration), and W_i may be the size of the i_{th} contiguous spectrum segment.

[0046] The allocated SC-QAM within each continuous spectrum segment may be divisible by the size of an SC-QAM channel, hence:

SC−QAM Allocation Minimum Unit Constraint

-continued

$$x_i = p_i \times R \qquad \text{Equation 3}$$

where p_i may be an integer variable that represents the number of SC-QAM channels, and R may be the size of an SC-QAM channel.

[0047] Considering constraint 9 in Table 1, the allocated SC-QAM within a continuous spectrum segment may also be subject to an upper limit due to the maximum frequency an SC-QAM channel may be allocated:

SC−QAM Allocation Frequency Limit Constraint

$$x_i \le \eta_i \qquad \text{Equation 4}$$

where η_i may be calculated by subtracting the continuous spectrum segment's starting frequency from the maximum frequency that an SC-QAM channel may be allocated.

[0048] A binary constraint may be used to represent the presence of OFDM and take OFDM's guard band overheads into account:

OFDM Allocation Constraint

$$c_i \times M \ge y_i \qquad \text{Equation 5}$$

$$y_i + (1 - c_i) \times M \ge P - K$$

[0049] where c_i may be a binary variable that may indicate the OFDM presence in a contiguous spectrum segment, y_i may be the target OFDM allocation (with guard bands subtracted), P may be the minimum size of an OFDM channel (with guard bands included, e.g.: 24 MHz), K may be the OFDM guard band overhead (both guard bands), M may be a very large number to ensure that when OFDM is present, y_i may be greater than 0, c_i may need to be 1 to satisfy the first inequality, and in the second constraint, the OFDM size may need to meet its minimum size requirement. And additionally, when OFDM is not present, y_i may be equal to 0, the first constraint may always be satisfied, c_i becomes 0 because of minimization of overheads, and because M is a very large number, the second constraint may always be satisfied and the OFDM size variable of the contiguous spectrum segment may not need to meet the minimum size requirement.

[0050] Similarly, a binary constraint may be used to represent the presence of SC-QAM and ensure that enough number of SC-QAM channels may be allocated sequentially within a contiguous spectrum segment:

SC−QAM Allocation Constraint

$$b_i \times M \ge x_i \qquad \text{Equation 6}$$

$$x_i + (1 - b_i) \times M \ge B$$

where bi may be a binary variable that may indicate the SC-QAM presence in the contiguous spectrum segment, x_i may be the target SC-QAM allocation, B may be the minimum required allocation for SC-QAM channels within

a contiguous segment, M may be a very large number to ensure that when SC-QAM is present, x_i may be greater than 0, bi may need to be 1 to satisfy the first inequality, and in the second constraint the SC-QAM allocation may need to satisfy the minimum SC-QAM allocation constraint within a contiguous spectrum segment. And additionally, when SC-QAM is not present, x_i may be equal to 0, the first constraint may always be satisfied, and because M is a very large number, the second constraint is always satisfied.

[0051] Further, the number (minimum) of OFDM channels may need to be associated with the target OFDM allocation:

Minimum Number of *OFDM* Channels Constraint

$$n_i \times (Q - K) \geq y_i \quad \text{Equation 7}$$

where y_i may be the target allocation of OFDM (with guard-bands subtracted), K may be the total OFDM guard band size used by each OFDM channel, n_i may be the number of OFDM channels, and Q may be the maximum size of an OFDM channel (with guard bands included, e.g.: 192 MHz). This constraint may allow the minimum number of OFDM channels to be known as n_i and may be used in the constraint described by FIG. **2**—Total Spectrum Segment Constraint to account for OFDM guard band overhead in the optimization. In some instances, the number of OFDM channels may also be influenced by the maximum speed by modem device type policy.

[0052] For the minimum total SC-QAM allocation requirement, such as 24 or 32 SC-QAM channels, the following constraint may be defined:

Minimum Total *SC−QAM* Allocation Constraint

$$\sum_{i=1}^{N} x_i \geq \Gamma \quad \text{Equation 8}$$

where Γ may be the minimum required SC-QAM allocation. In some instances, the minimum total SC-QAM allocation may be initially calculated by the product speed per modem device type policy.

[0053] Finally, utilization constraints may be specified to provide the upper limits of estimated utilization values after optimization. Respectively, there may be SC-QAM utilization constraint and OFDM utilization constraint (i.e.: the utilization of SC-QAM/OFDM after optimization may not exceed 60% allowing 2 years of growth before service group augmentation. This policy can be made more aggressive as full automation is completed):

SC−QAM and *OFDM* Maximum Utilization Constaint

$$\sum_{i=1}^{N} x_i * \Theta \geq L * \beta \quad \text{Equation 9}$$

$$\sum_{i=1}^{N} y_i * \Lambda \geq H * \gamma$$

where L may be the original SC-QAM allocation, β may be the original SC-QAM utilization, θ may be the upper limit of SC-QAM utilization after optimization, H may be the original OFDM allocation, γ may be the original OFDM utilization, and $\tilde{\lambda}$ may be the upper limit of the OFDM utilization after optimization.

[0054] In computing the new channel configuration, the remote provisioner **310** may compute a configuration similar to the new channel configuration **804** of FIG. **8**B. Although the previous description for computing a new channel configuration is based on a MILP algorithm, other optimization algorithms may be used (e.g., a brute-force algorithm or a reinforcement learning model) without departing from the scope of the disclosure.

[0055] FIG. **6** is a flow chart showing an example method of implementing a new channel configuration for a service group. For ease of explanation, method **600** is discussed with respect to the system outlined in FIG. **3**. However, it should be understood that the method **600** is not so limited to the specific embodiment of FIG. **3** The implementation of a new channel configuration may be performed while the modems $\mathbf{360}_1$-$\mathbf{360}_N$ in the service group **350** continue to transmit and receive information without an interruption to network service.

[0056] At step **602**, the coordinator **320** may receive a new channel configuration. The new channel configuration may be received from the remote provisioner **310** based on the results performed in step **510** by the remote provisioner **310**. For example, the new channel configuration may be similar to the new channel configuration **804** in FIG. **8**B. At step **604**, the coordinator **320** may compare the current channel configuration and new channel configuration. The comparison may be based on differences similar to the differences between the current channel configuration **802** of FIG. **8** and the new channel configuration **804** of FIG. **8**B. For example, the target SC-QAM channels **802**D (i.e., affected by the new channel configuration) may be replaced by the new OFDM channel **804**B.

[0057] At step **606**, the coordinator **320** may identify unaffected channels. As an example, the current channel configuration **802** of FIG. **8**A and the new channel configuration **804** of FIG. **8**B show a group of target SC-QAM channels **802**D that may be replaced by the new OFDM channel **804**B, and a group of SC-QAM channels unaffected (e.g., unaffected SC-QAM channels **802**F) by the new channel configuration, such as SC-QAM channel **802**B. The unaffected channels may be used by the coordinator **320** in implementing the new channel configuration without interrupting the service of the modems $\mathbf{360}_1$-$\mathbf{360}_N$.

[0058] At step **608**, the coordinator **320** may compute intermediate bonding groups. Computing the intermediate bonding groups may be based on the channels unaffected by the new channel configuration (e.g., based on unaffected SC-QAM channels **802**F) and the particular characteristics of the modems $\mathbf{360}_1$-$\mathbf{360}_N$. For example, a 4-channel D3.0 modem may be bonded to 4 SC-QAM channels (e.g., 4 of the unaffected SC-QAM channels **802**F) as an intermediate bonding group, and an 8-channel D3.0 modem may be bonded to 8 SC-QAM channels (e.g., **8** of the unaffected SC-QAM channels **802**F) as an intermediate bonding group. In some instances, in computing the intermediate bonding groups, the coordinator **320** may identify existing bonding groups that may be reused as intermediate bonding groups. In some instances, in computing the intermediate bonding

groups, the coordinator **320** may create new bonding groups to be intermediate bonding groups. In some instances, load-balancing may be used to determine which of the unaffected SC-QAM channels to bond a modem to, in which modems are bonded to adjacent channels (e.g., a 4-channel D3.0 modem would be bonded to four adjacent channels of the unaffected channels). Load-balancing may further be used to ensure that all the modems (e.g., modems **360**$_1$-**360**$_N$) are evenly spread across the unaffected channels (e.g., unaffected SC-QAM channels **802**F).

[0059] In some instances, when the number of SC-QAM channels is less than a modem's maximum channel bonding capabilities, for example, a 32-channel D3.0 modem and 24 SC-QAM channels, the modem may be bonded to all 24 SC-QAM channels as an intermediate bonding group (limited by the number of SC-QAM channels which may be, e.g., 24). At step **610**, the coordinator **320** may direct downstream modems to be moved or reassigned to intermediate bonding groups. This may be achieved using dynamic bonding change (DBC) messages, as discussed more with respect to FIG. **7**.

[0060] In computing intermediate bonding groups and moving modems **360**$_1$-**360**$_N$ to intermediate bonding groups, modems **360**$_1$-**360**$_N$ may continue to transmit and receive information without an interruption to the network service of modems **360**$_1$-**360**$_N$ while the new channel configuration is being implemented. Without using intermediate bonding groups, modems **360**$_1$-**360**$_N$ may lose functionality when channels are turned off/on and part of provisioning the new spectrum.

[0061] At step **612**, the coordinator **320** may direct the RPD **340** to switch from the current channel configuration to the new channel configuration. This may be done with channel configuration messages, as discussed in more detail with respect to FIG. **7**. At step **614**, the coordinator **320** may direct the modems **360**$_1$-**360**$_N$ to move to best-fit bonding groups. DBC messages may be used similarly to step **610**. At step **616**, the coordinator **320** may direct resource manager **330** to remove the previously used intermediate bonding groups.

[0062] FIGS. **7**A-**7**D are a sequence showing an example method of remotely reconfiguring the network profile of a service group without an interruption to the network service of the service group. Referring to FIG. **7**A, at step **701**, the remote provisioner **310** may receive information from coordinator **320**. The information received by the remote provisioner **310** may be similar to the information highlighted in steps **502**-**508** of FIG. **5**. At step **702**, the remote provisioner **320** may compute a new channel configuration. Computing the new channel configuration may be similar to what was performed in step **510** of FIG. **5**.

[0063] At step **703**, the remote provisioner **310** may send the new channel configuration to the coordinator **320**. At step **704**, the coordinator **320** may compare the current channel configuration with the new channel configuration. The comparison may be similar to the comparison performed in step **604** of FIG. **6**.

[0064] Referring to FIG. **7**B, at step **705**, the coordinator **320** may identify unaffected channels (e.g., unaffected SC-QAM channels **802**F). The identification may be similar to the identification that was performed in step **606** of FIG. **6**. At step **706**, the coordinator **320** may compute intermediate bonding groups. The computing may be similar to the computing that was performed at step **608** of FIG. **6**.

[0065] At step **707**, the coordinator **320** may generate dynamic bonding change messages. Dynamic bonding change messages are messages used to bond a particular modem (e.g., modem **360**$_1$) to a group of RF channels that may be used in upstream/downstream communications. For example, if modem **360**$_1$ is a 4-channel DOCSIS 3.0 modem, dynamic bonding change messages may be used to bond the modem **360**$_1$ to 4 SC-QAM channels. DBC messages may be used to bond a modem to a different group of channels, for example, an intermediate bonding group, while the new channel configuration is being implemented. The coordinator **320** may generate DBC message to bond the modems **360**$_1$-**360**$_N$ in the service group **350** to a group of unaffected channels, and further based on the characteristics of the modems **360**$_1$-**360**$_N$. Load-balancing, which may refer to evenly distributing modems across a group of channels, may be considered when moving modems **360**$_1$-**360**$_N$ to their respective intermediate bonding groups. Alternatively, dynamic channel change (DCC) messages may be similarly used for older modem devices that do not support D3.0 functionality.

[0066] At step **708**, the coordinator **320** may direct the modems **360**$_1$-**360**$_N$ to be moved or reassigned to their respective intermediate bonding groups using the DBC messages that were previously generated by the coordinator **320** at step **707**. In some instances, the intermediate bonding groups may be based on existing bonding groups, and, for example, one or more of the modems **360**$_1$-**360**$_N$ may use or reuse a corresponding existing bonding group. In some instances, the intermediate bonding groups may be based on newly created bonding groups. In some instances, there may be any combination of existing and newly created bonding groups as intermediate bonding groups without departing from the scope of the disclosure.

[0067] In some instances, an application programming interface (API) may be used by the coordinator **310** to send the DBC messages. In some instances, modems **360**$_1$-**360**$_N$ may send an indication to resource manager **330** and/or coordinator **320** to notify resource manager **330** and/or coordinator **320** that modems **360**$_1$-**360**$_N$ are bonded to respective intermediate bonding groups and may continue to transmit and receive information while the new channel configuration is being implemented. For example, the indication may be a medium access control (MAC) management message.

[0068] Referring to FIG. **7**C, at step **709**, the coordinator **320** may send the new channel configuration to the RPD **710**. The new channel configuration may also include information that the RPD **340** may use to switch off old channels and add new channels based on the new channel configuration (e.g., switch off the target SC-QAM channels **802**D and replace with the new OFDM channel **804**B). In some instances, the coordinator **320** may use an API to communicate with the RPD **340**.

[0069] At step **710**, the RPD **330** may switch to the new channel configuration. For example, with reference to FIG. **8**, the target SC-QAM channels **802**D may be turned off, and new OFDM channel **804**B may be turned on. At step **711**, the coordinator **320** may compute best-fit bonding groups. Best-fit bonding groups may be computed based on the new channel configuration and the particular characteristics of each modem in a service group. For example, an 8-channel D3.0 modem may be bonded to 8 adjacent SC-QAM channels and a D3.1 modem may be bonded to an OFDM channel

and/or adjacent SC-QAM channels. Load-balancing may be considered when moving modems **360**$_1$-**360**$_N$ to their respective best-fit groups.

[0070] Referring to FIG. **7**D, at step **712**, the coordinator **320** may generate dynamic bonding change messages. The DBC messages may be generated similarly to the generating in step **707**. At step **713**, the coordinator **320** may send the DBC messages to modems **360**$_1$-**360**$_N$. In some instances, the DBC messages may pass through the resource manager **330** and RPD **340** to the modems **360**$_1$-**360**$_N$, in which the DBC messages may be transformed from an API call/message to a medium access control (MAC) management message.

[0071] At step **714**, the modems **360**$_1$-**360**$_N$ may move to their best-fit bonding groups based on the DBC messages sent in step **713**. At step **715**, the resource manager **330** may remove the intermediate bonding groups. In some instances, the coordinator **320** may remove the intermediate bonding groups. Although FIGS. **5-7** describe reconfiguring a network profile using downstream spectrum management, upstream spectrum management may similarly be used without departing from the scope of the disclosure.

[0072] FIGS. **8**A-**8**B show a current channel configuration and a new channel configuration. FIG. **8**A is a current channel configuration **802** with a set of SC-QAM channels and 1 OFDM channel within a frequency range **802**A. FIG. **8**A may also show an example SC-QAM channel **802**B, an AGC Tone **802**C, unaffected SC-QAM channels **802**F, target SC-QAM channels **802**D, and OFDM channel **802**E. FIG. **8**B is a new channel configuration **804** in a frequency range **804**A, which may include new OFM channel **804**B, which may be determined based on the actions performed in FIGS. **5-7**.

[0073] FIG. **9** is a flow chart showing an example method of remotely reconfiguring a network. Step **902** is identifying a spectrum associated with the network. Step **904** is determining a plurality of devices on the spectrum. Step **906** is computing a new channel configuration that increases network capacity on the spectrum. Step **908** is determining a portion of the spectrum that is unaffected by the new channel configuration. Step **910** is reassigning the plurality of devices to the unaffected portion of the spectrum. Step **912** is determining that the plurality of devices have been moved to the unaffected portion of the spectrum. Step **914** is implementing the new channel configuration. Step **916** is moving the plurality of devices to a new portion of the spectrum. The previously mentioned steps may be performed by a combination of the devices in FIGS. **3** and **4** in a similar manner to the steps in FIGS. **5-7**.

[0074] FIG. **10** is a flow chart showing an example method of remotely reconfiguring a network. Step **1002** is identifying a plurality of devices, channels, and a profile associated with the network. Step **1004** is generating, using the provisioner, an updated profile, wherein the updated profile comprises a new channel configuration of the spectrum that increases network capacity of the network. Step **1006** is determining an unaffected portion of the spectrum. Step **1008** is temporarily reassigning the plurality of devices to the unaffected portion of the spectrum. Step **1010** is reconfiguring the network based on the new channel configuration of the spectrum. Step **1012** is moving the plurality of devices to a new portion of the spectrum. The previously mentioned steps may be performed by a combination of the devices in FIGS. **3** and **4** in a similar manner to the steps in FIGS. **5-7**.

[0075] FIG. **11** is a flow chart showing an example method of remotely reconfiguring a network. Step **1102** is computing a new spectrum configuration that increases capacity of the network using a mixed-integer linear programmer. Step **1104** is routing a plurality of devices to an unaffected portion of the spectrum. Step **1106** is determining that the plurality of devices is reassigned to the unaffected portion of the spectrum. Step **1108** is applying the new spectrum configuration. Step **1110** is rerouting the plurality of devices to a new portion of the spectrum. The previously mentioned steps may be performed by a combination of the devices in FIGS. **3** and **4** in a similar manner to the steps in FIGS. **5-7**.

[0076] Although examples are described above, features and/or steps of those examples may be combined, divided, omitted, rearranged, revised, and/or augmented in any desired manner. Various alterations, modifications, and improvements will readily occur to those skilled in the art. Such alterations, modifications, and improvements are intended to be part of this description, though not expressly stated herein, and are intended to be within the spirit and scope of the disclosure. Accordingly, the foregoing description is by way of example only, and is not limiting.

1. A method of managing a network comprising:
identifying a spectrum associated with the network;
determining a plurality of devices on the spectrum;
computing a new channel configuration of the spectrum that increases network capacity on the spectrum;
determining a portion of the spectrum that is unaffected by the new channel configuration;
reassigning the plurality of devices to the portion of the spectrum that is unaffected by the new channel configuration using a plurality of intermediate bonding groups;
determining that the plurality of devices have been moved to the portion of the spectrum that is unaffected by the new channel configuration using the intermediate bonding groups;
implementing the new channel configuration on the spectrum; and
moving the plurality of devices to a new portion of the spectrum based on the new channel configuration.

2. The method of claim **1**, further comprising:
identifying a profile associated with the network, wherein the profile comprises information identifying the plurality of devices; and
information identifying a current channel configuration of the spectrum, wherein the current channel configuration comprises a plurality of channels that are used by the plurality of devices to transmit and receiving information over the network.

3. The method of claim **1**, further comprising:
determining an updated profile, wherein the updated profile comprises the new channel configuration configured to increase the network capacity of on the spectrum compared with the current channel configuration.

4. The method of claim **2**, wherein the current channel configuration further comprises:
a plurality of single carrier quadrature amplitude modulation (SC-QAM) channels and an orthogonal frequency division multiplexing (OFDM) channel.

5. The method of claim **2**, wherein the profile further comprises:

characteristics associated with the network, the plurality of devices, and the plurality of channels.

6. The method of claim **2**, wherein the determining the portion of the spectrum that is

unaffected by the new channel configuration

is based on differences between the current channel configuration and the new channel configuration.

7. The method of claim **2**, wherein the plurality of devices may continue to transmit and receive information over the network using the intermediate bonding groups during the implementing.

8. The method of claim **2**, wherein the plurality of intermediate bonding groups are further determined based on the unaffected channels and characteristics associated with the plurality of devices.

9. The method of claim **5**, wherein the characteristics further comprise the current channel configuration, utilization data, policy constraints, and real-world constraints.

10. The method of claim **8**, wherein the devices are moved to the plurality of intermediate bonding groups using dynamic bonding change messages.

11. A method of remotely managing a network comprising:

identifying:

a plurality of devices associated with the network;

a plurality of channels associated with the network; and

a profile associated with the network, wherein the profile comprises information indicating a spectrum that the plurality of devices use to transmit and receive data on the spectrum;

generating, using a provisioner, an updated profile, wherein the updated profile comprises a new channel configuration of the spectrum that improves network capacity of the network;

determining a portion of the spectrum that is unaffected by the new channel configuration;

temporarily reassigning the devices to the portion of the spectrum that is unaffected by the new channel configuration;

reconfiguring the network, using a coordinator, based on the new channel configuration of the spectrum; and

moving the devices to a new portion of the spectrum based on the new channel configuration.

12. The method of claim **11**, wherein the profile comprises a current channel

configuration that is different from the new channel configuration.

13. The method of claim **12**, wherein the reconfiguring further comprises:

determining a plurality of intermediate bonding groups based on differences between the current channel configuration and the new channel configuration.

14. The method of claim **13**, wherein the devices may continue to transmit and receive data over the network using the intermediate bonding groups.

15. The method of claim **14**, further comprising moving the devices from the intermediate bonding groups to best-fit bonding groups after the reconfiguring using dynamic bonding change messages.

16. A method of remotely managing a spectrum associated with a network comprising:

computing a new spectrum configuration that increases capacity of the network using a mixed-integer linear programmer;

routing a plurality of devices on the network to a portion of the spectrum that is unaffected by the new spectrum configuration;

determining that the plurality devices have been reassigned to the portion of the spectrum that is unaffected by the new spectrum configuration;

applying the new spectrum configuration while the plurality of devices continue to transmit and receive data using the portion of the spectrum that is unaffected by the new spectrum configuration; and

rerouting the plurality of devices to a new portion of the spectrum based on the new spectrum configuration.

17. The method of claim **16**, further comprising a profile that comprises:

the plurality of devices associated with the network;

a plurality of channels associated with the network that are used by the plurality of network devices to transmit and receive data over the network; and

a current spectrum configuration associated with the plurality of channels.

18. The method of claim **17**, further comprising an updated profile that comprises the new spectrum configuration.

19. The method of claim **18**, further comprising:

determining intermediate bonding groups based on characteristics associated with the plurality of devices and differences between the current spectrum configuration and the new spectrum configuration.

20. The method of claim **19**, wherein the rerouting further comprises:

generating dynamic bonding change messages that direct the devices to move to the portion of the spectrum that is unaffected by the new spectrum configuration.

* * * * *