




US 20250264216A1

(19) **United States**(12) **Patent Application Publication****Rollins, JR. et al.**(10) **Pub. No.: US 2025/0264216 A1**(43) **Pub. Date: Aug. 21, 2025**(54) **COMBUSTION CHAMBER FOR THE  
INCINERATION OF WASTE PRODUCTS**(71) Applicant: **Zampell Refractories, Inc.,**  
Newburyport, MA (US)(72) Inventors: **Lee Rollins, JR.,** Wells, ME (US);  
**Russ Souders,** Flourtown, PA (US)(21) Appl. No.: **19/201,481**(22) Filed: **May 7, 2025****Related U.S. Application Data**(63) Continuation of application No. 17/128,878, filed on  
Dec. 21, 2020.(60) Provisional application No. 62/954,721, filed on Dec.  
30, 2019.**Publication Classification**(51) **Int. Cl.**  
**F23G 5/24** (2006.01)  
**F23G 5/44** (2006.01)**F23M 5/02** (2006.01)**F23M 5/04** (2006.01)(52) **U.S. Cl.**CPC ..... **F23G 5/245** (2013.01); **F23G 5/44**  
(2013.01); **F23M 5/02** (2013.01); **F23M 5/04**  
(2013.01); **F23G 2900/50006** (2013.01)

(57)

**ABSTRACT**

A combustion chamber for use in the incineration of waste products includes an inner refractory wall which extends vertically within an outer protective wall in a spaced relationship so as to define a plenum therebetween. The inner refractory wall is constructed using a plurality of precast, refractory blocks which are stacked and arranged to define a cylindrical interior cavity. The refractory blocks include mating features on adjacent surfaces to facilitate assembly and provide structural support. For additional support, selected blocks are fixedly connected to vertical support tubes by metal tie-back anchors. To facilitate combustion, a selection of the blocks is precast with a tuyere hole in order to deliver a uniform and balanced supply of air from the plenum into the interior cavity. The precast nature of the refractory blocks enables the inner refractory wall to be constructed with great precision, thereby optimizing incineration and minimizing material degradation.

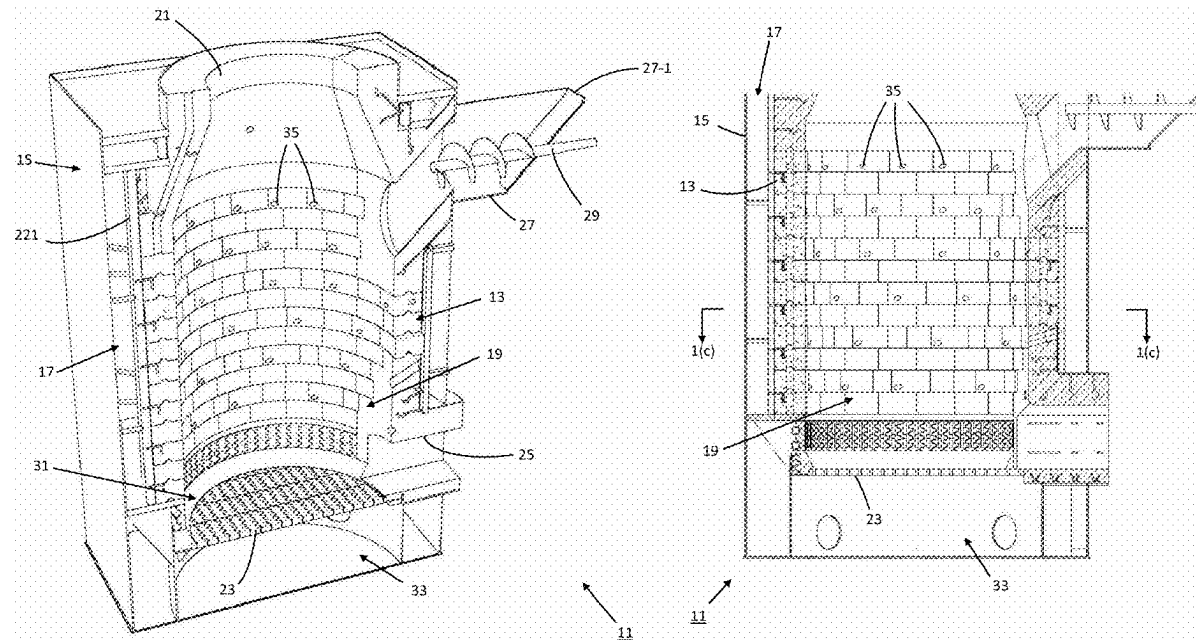

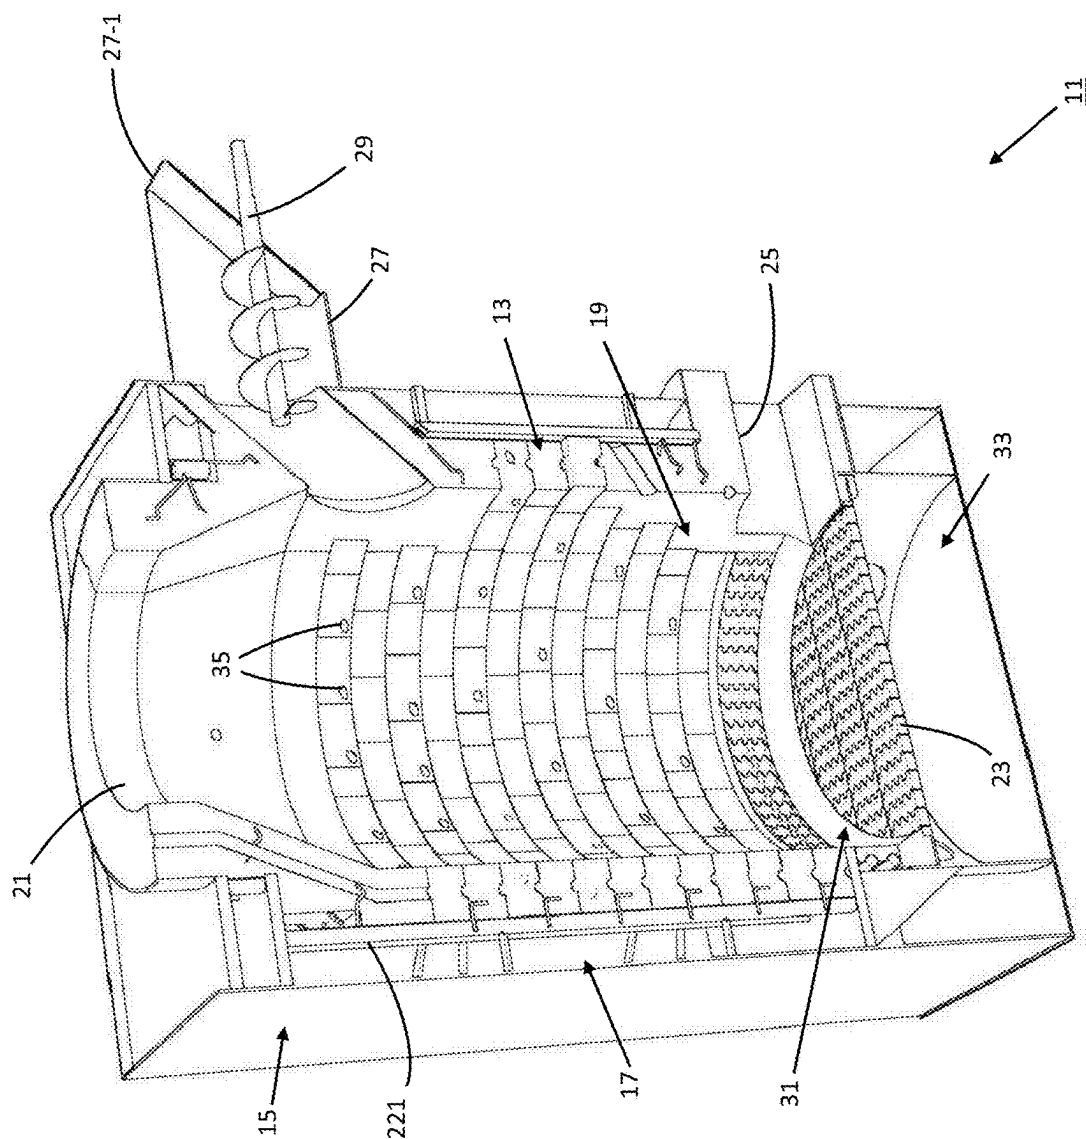


Fig. 1(a)

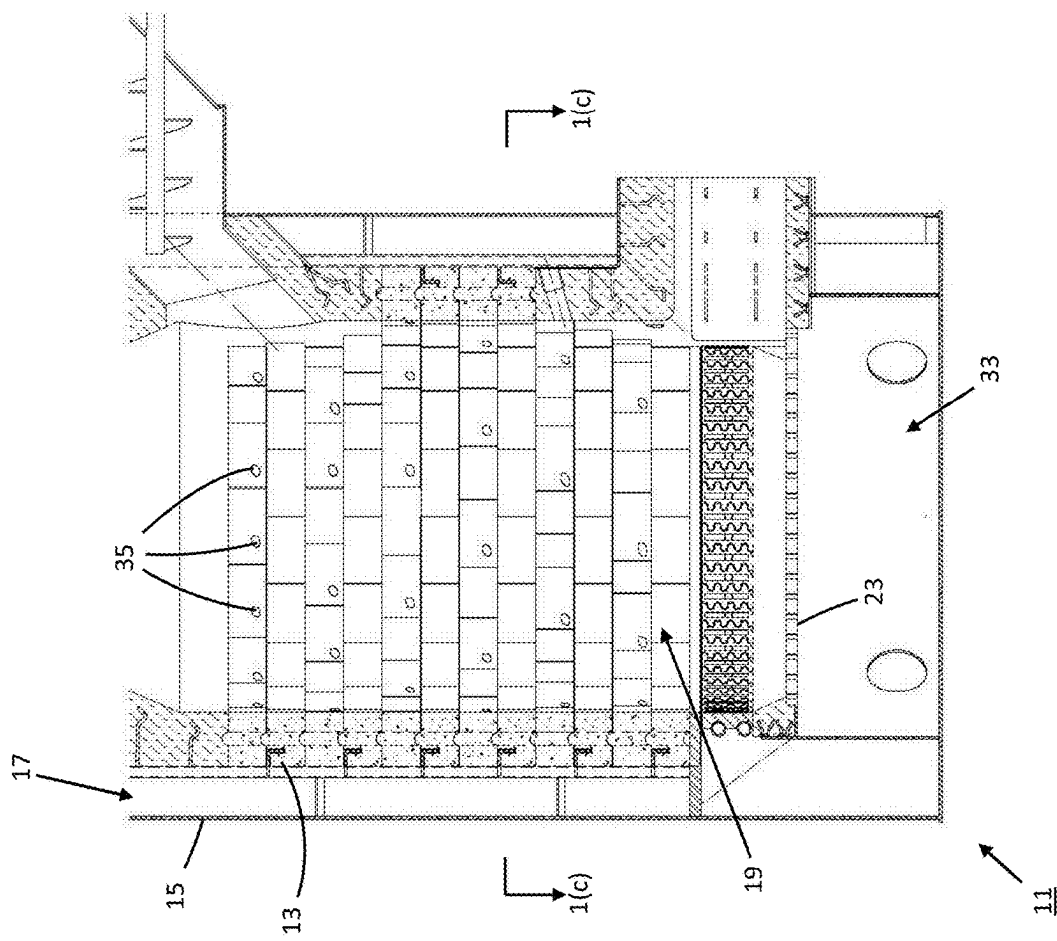


Fig. 1(b)

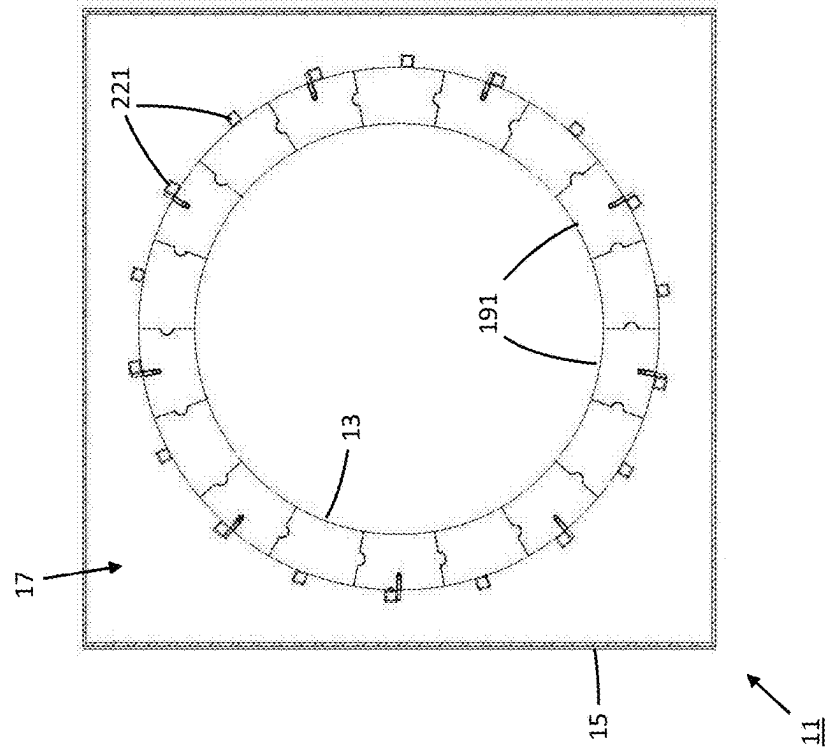


Fig. 1(c)

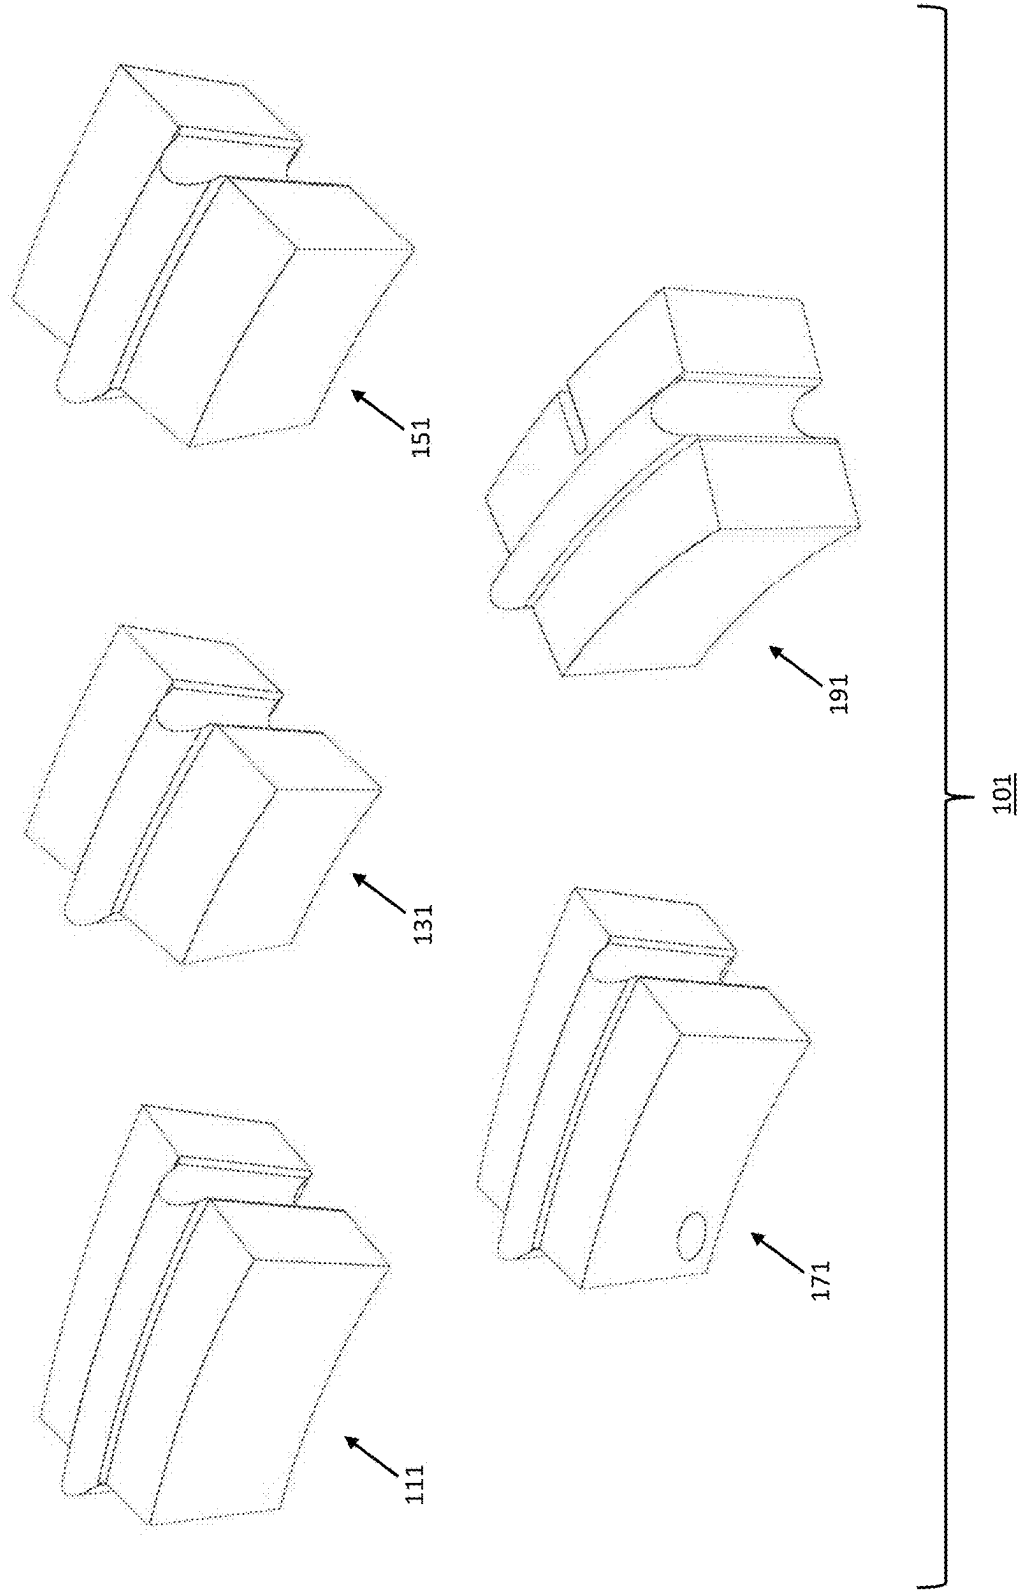


Fig. 2

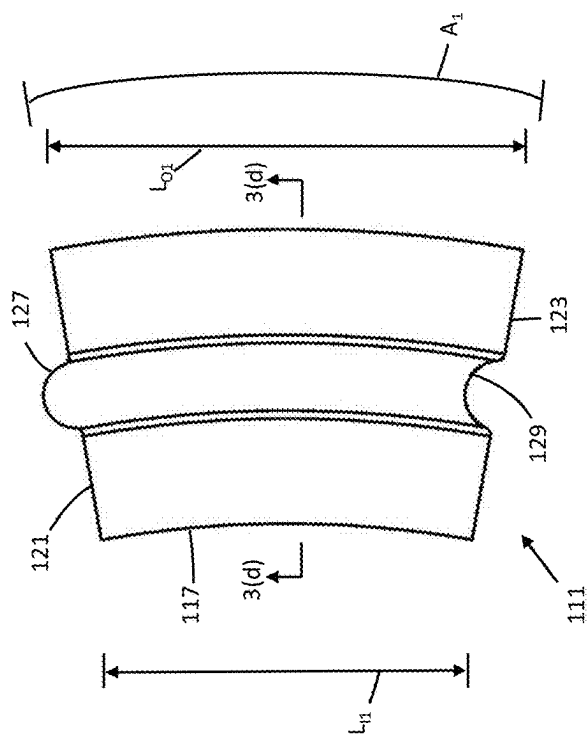


Fig. 3(c)

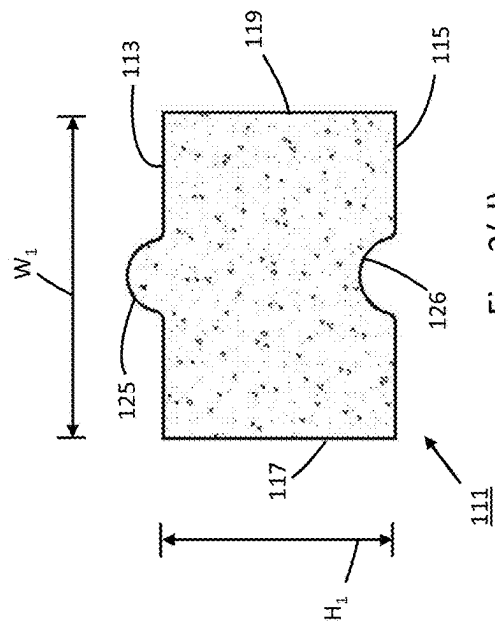


Fig. 3(d)

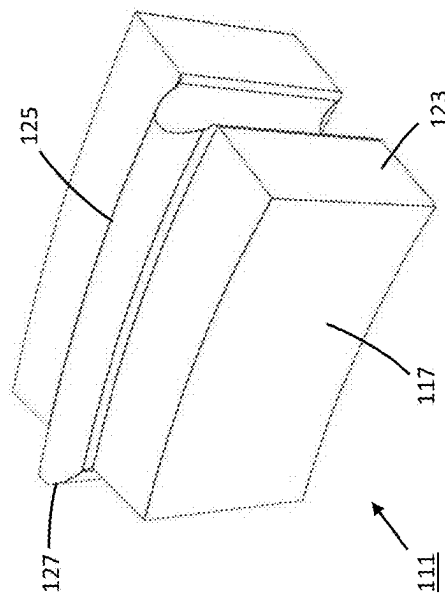


Fig. 3(a)

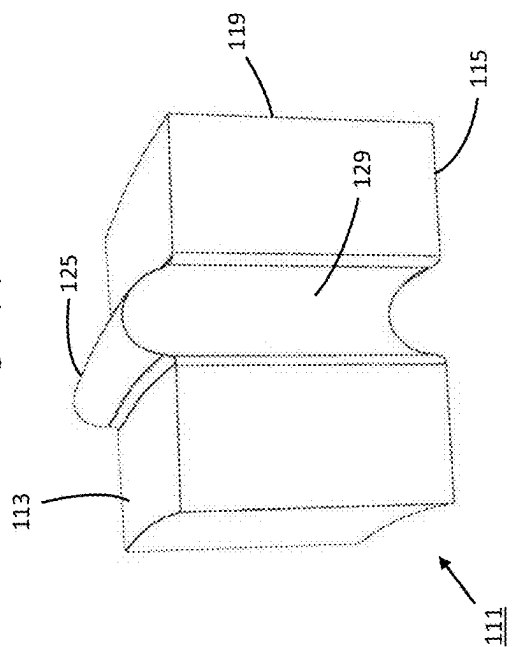


Fig. 3(b)

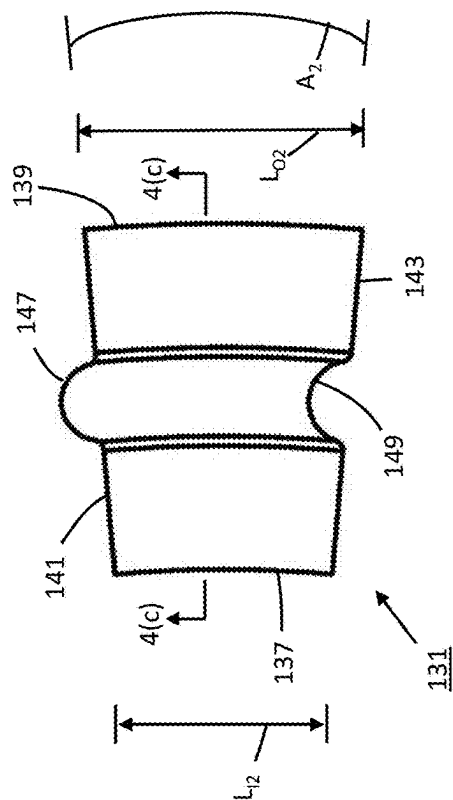


Fig. 4(b)

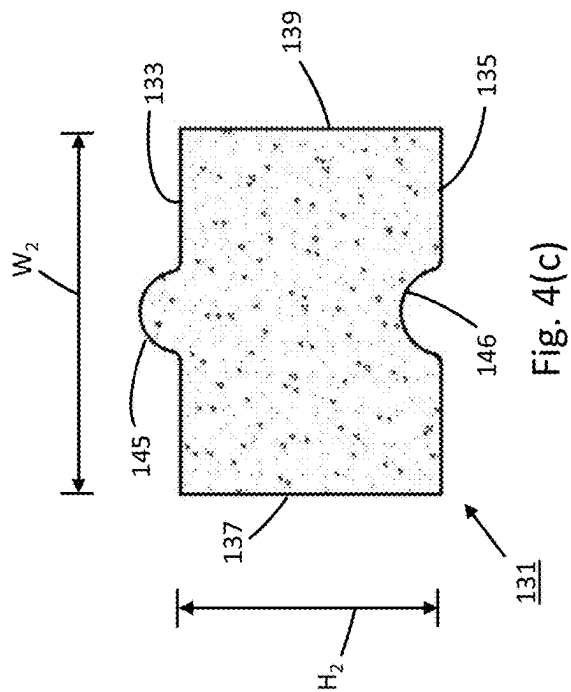


Fig. 4(c)

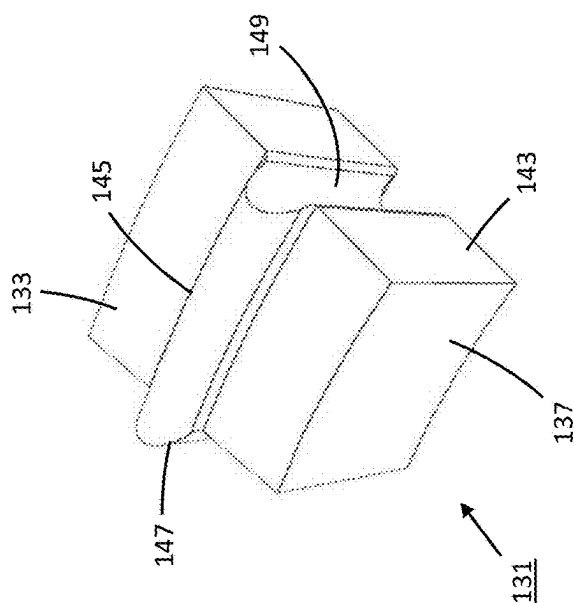


Fig. 4(a)



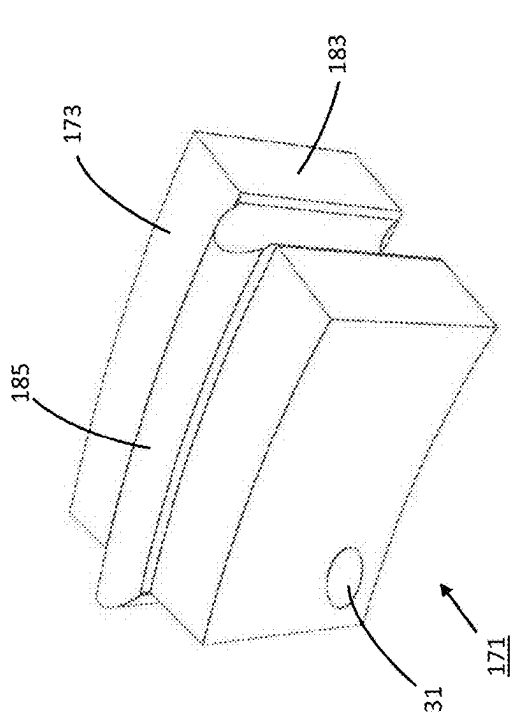


Fig. 6(a)

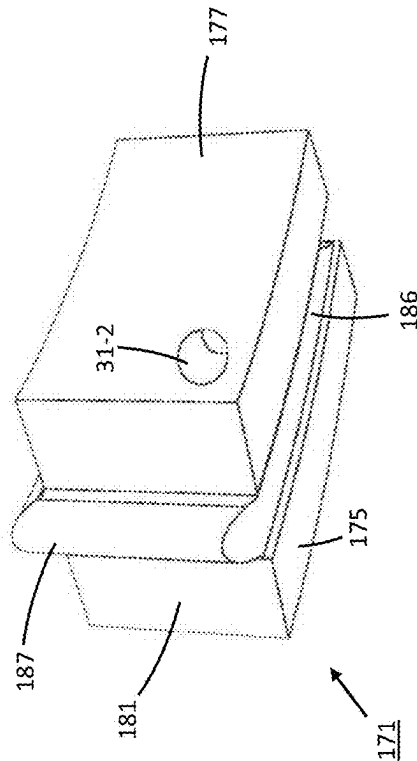


Fig. 6(b)

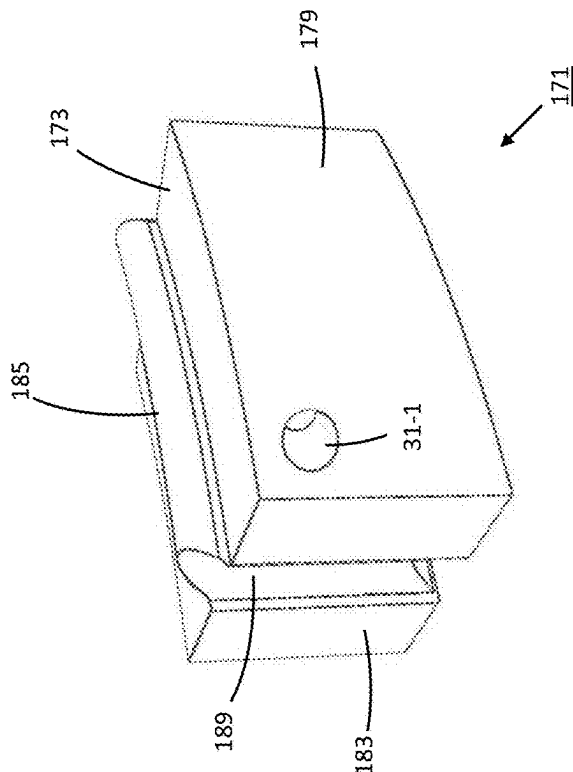


Fig. 6(c)



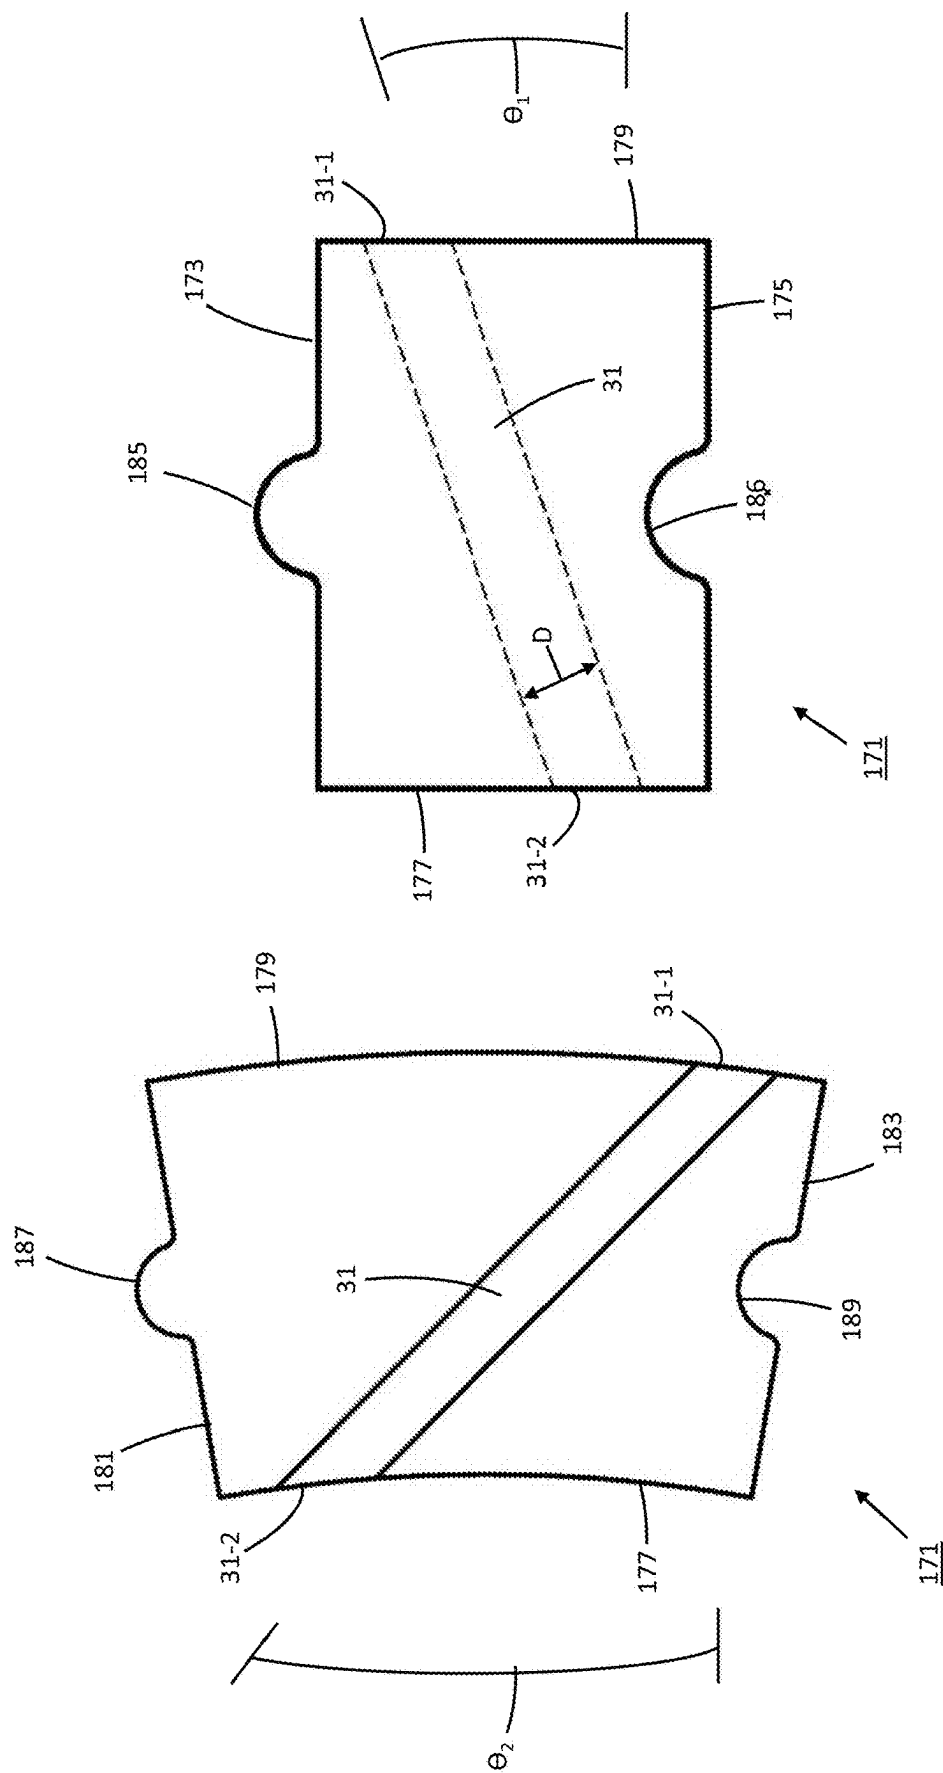


Fig. 6(d)

Fig. 6(e)

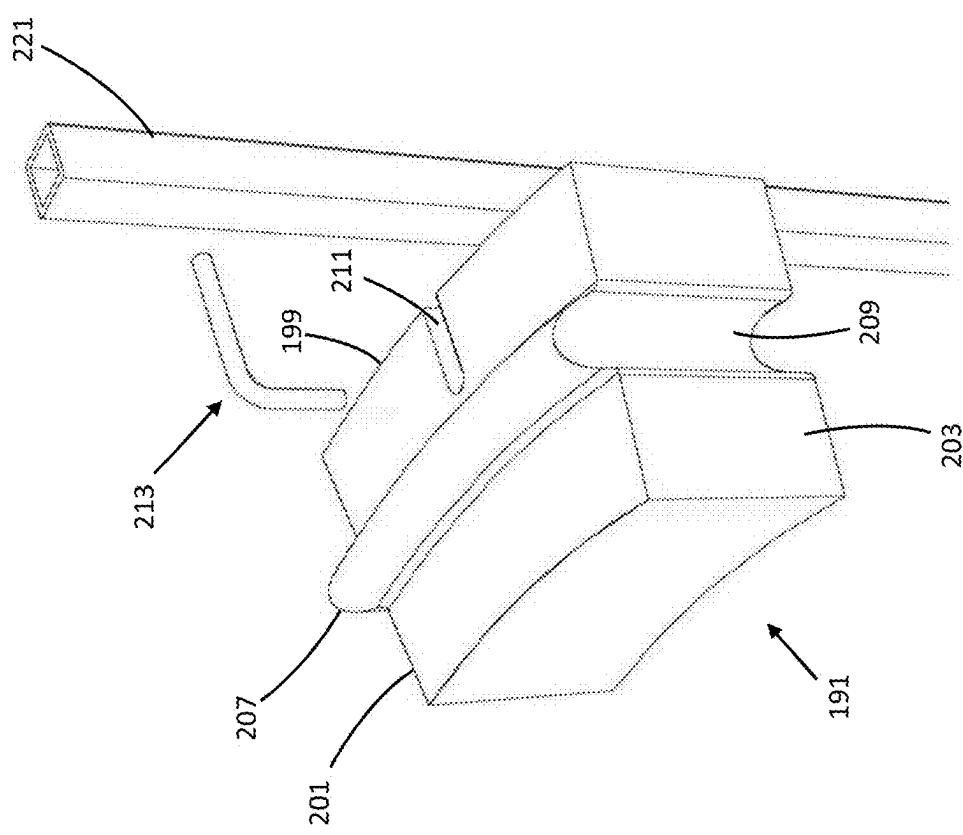


Fig. 7

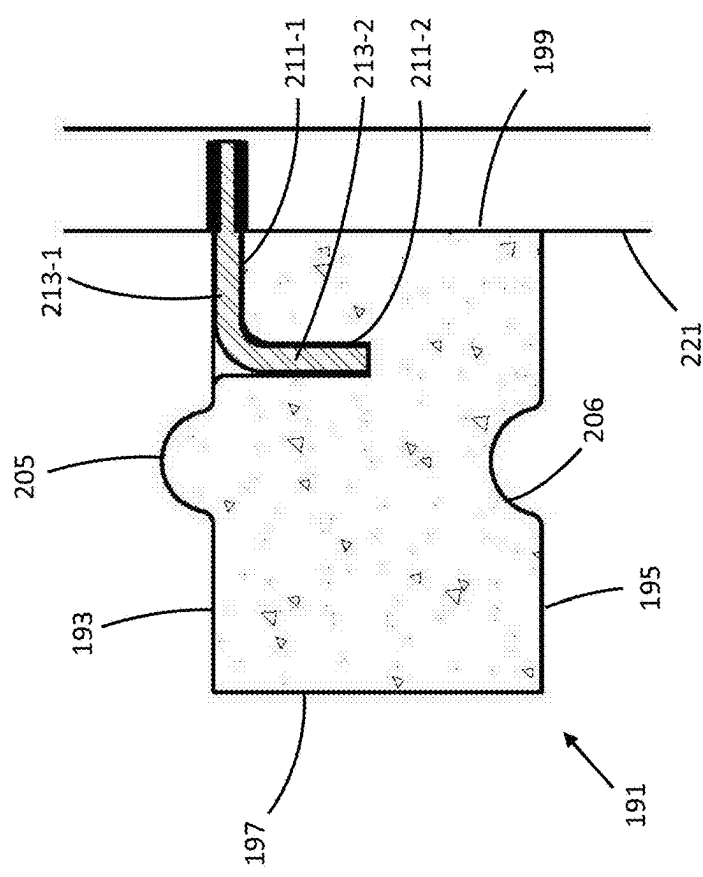


Fig. 8

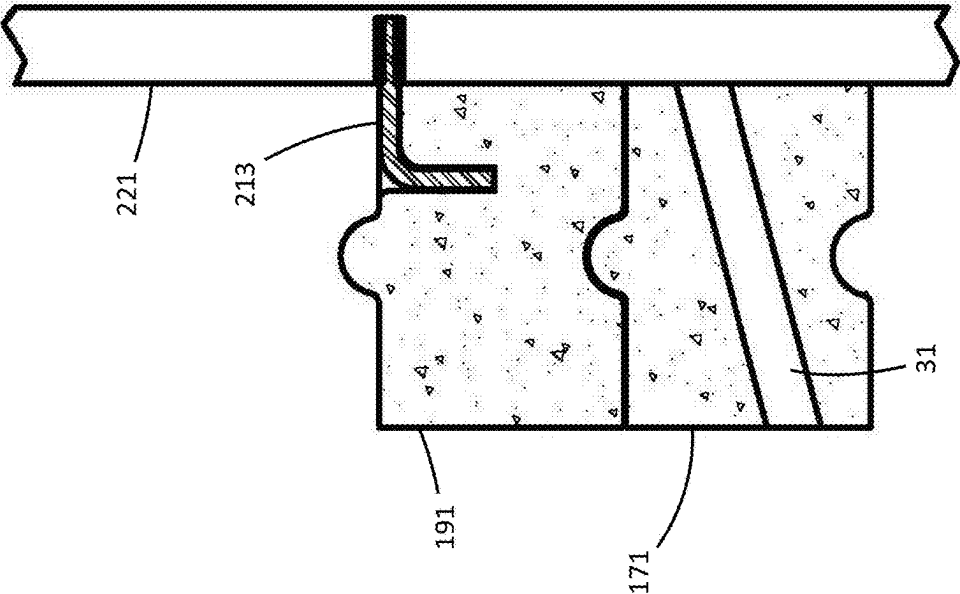


Fig. 10

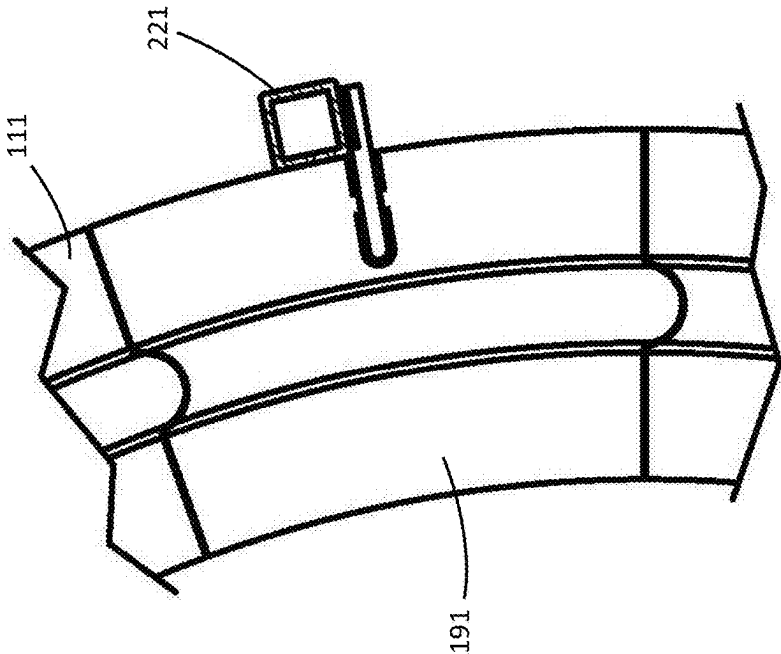


Fig. 9

## COMBUSTION CHAMBER FOR THE INCINERATION OF WASTE PRODUCTS

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of presently-pending U.S. patent application Ser. No. 17/128,878, which was filed on Dec. 21, 2020 in the names of Lee Rollins, Jr., et al., which, in turn, claims the benefit under 35 U.S.C. 119(e) to U.S. Provisional Patent Application No. 62/954,721, which was filed on Dec. 30, 2019 in the names of Lee Rollins, Jr., et al., the disclosures of both applications being incorporated herein by reference.

### FIELD OF THE INVENTION

[0002] The present invention relates generally to waste disposal and, more particularly, to combustion chambers utilized to incinerate waste products.

### BACKGROUND OF THE INVENTION

[0003] A combustion chamber, or cell, is a well-known structure that is commonly used to incinerate waste products through the application of intense heat, which is typically in excess of 1000° C. For instance, wood production facilities often utilize a combustion cell to dispose of wood waste, such as sawdust and bark, created from the manufacture of wood-based products.

[0004] The heat generated by combustion chambers can, in turn, be utilized in a wide range of additional applications. For instance, in wood-based product manufacturing, the heat produced by combustion chambers is often used in the drying of finished, wood-based products. Heat produced from combustion chambers is also commonly applied to water to produce steam, which is subsequently used for, inter alia, district heating, hot water generation, and the generation of electricity by turbine generator.

[0005] Conventionally, a combustion cell is constructed as an enlarged, tower-like, chamber which includes an inner cylindrical wall that extends vertically within an outer wall, the inner wall being spaced in from the outer wall so as to define a plenum therebetween. The inner wall defines an enlarged, cylindrical interior cavity, or combustion zone, with an opening, or gas outlet, at its top end through which heat from the combustion zone escapes. A combustion grate is typically mounted at the bottom of inner wall and serves to support the waste products intended for incineration. An externally-accessible chute penetrates through both outer and inner walls at a downward angle and into communication with the combustion zone, thereby allowing for the delivery of waste product into the interior cavity.

[0006] As previously noted, a plenum is established between the outer and inner walls and allows for the delivery of air into the combustion zone to facilitate the incineration process. The primary supply of air for combustion is delivered into the interior cavity through the combustion grate. As a secondary source of air into the combustion zone, a series of small nozzles, or tuyere holes, generally circular in transverse cross-section, extend radially through the inner wall and thereby establish a fluid communication path between the plenum and the interior cavity. As can be appreciated, the number, arrangement, geometric configuration, openness, and angle of orientation of the nozzles all

contribute to the effectiveness in maintaining efficient combustion of wood waste within the interior cavity.

[0007] Due to the intense heat generated within the combustion zone, it is required that the inner wall be constructed of a suitable heat-resistant material. Traditionally, the inner wall is constructed using a cylindrical, expanded metal (i.e. perforated) backbone, or support, which is welded in place. A unitary refractory liner is then applied onto the interior of the expanded metal support.

[0008] The refractory liner is typically constructed of a heat-resistant material that is initially deformable but eventually hardens through a curing process. For instance, refractory liner may be constructed of either a heat-resistant moldable refractory that is compacted with pneumatic tools onto the inner surface of the expanded metal support or a concrete-based mixture that is cast-in-place or shotcrete against the inner surface of the expanded metal support.

[0009] Prior to or during installation, tubular sleeves, often constructed using polyvinyl chloride (PVC) piping or wooden dowels, are placed within the boundaries of the lining to act as form blanks to create the nozzle openings. Additionally, the deformable nature of the pre-cured refractory liner allows for its penetration through the perforations in the expanded metal support and thereby form a means of interconnection. Upon curing of the refractory liner, the tubular sleeves are removed from the refractory liner to yield the plurality of airflow nozzles used to supplement the delivery of air into the combustion zone.

[0010] The refractory liner of a combustion chamber is subjected to various forms of attack which can compromise its integrity. In particular, a combustion cell utilized to incinerate wood-based products continuously subjects the refractory liner to heat, abrasion, and alkali attack. These various factors often cause the refractory liner to degrade over time, resulting in a number of harmful effects.

[0011] As a first effect, degradation of the refractory liner can change the geometry of the airflow nozzles, resulting in nozzles becoming blocked with ash and constricting, or even reversing, the designated airflow. As a consequence, combustion often becomes stifled and airflow velocity increases which, in turn, produces refractory liner abrasion and creates unbalanced combustion within the interior cavity that can accelerate degradation in the liner in certain areas.

[0012] As a second effect, degradation of the refractory liner, particularly due to alkali attack caused by the combustion of wood, can result in its destabilization, since the expanded metal backbone only affords limited structural support to the liner. Structural destabilization of the refractory liner renders it increasingly susceptible to cracking and expansion-related failure, often rendering a combustion chamber inoperable until the refractory liner is suitably repaired or completely replaced.

[0013] As a third effect, degradation of the refractory liner exposes the expanded metal support to a greater amount of heat. Because thermal expansion of the metal support occurs at a greater rate than the refractory lining, the combustion chamber is rendered more susceptible to accelerated failure.

### SUMMARY OF THE INVENTION

[0014] In view thereof, it is an object of the present invention to provide a novel combustion chamber for the incineration of waste products.

**[0015]** It is another object of the present invention to provide a combustion chamber of the type as described above which is durable and experiences minimal material degradation.

**[0016]** It is yet another object of the present invention to provide a combustion chamber of the type as described above which is designed to deliver a uniform and balanced supply of air in order to combust waste products in an efficient manner.

**[0017]** It is still another object of the present invention to provide a combustion chamber of the type as described above which is inexpensive to manufacture, can be installed with great precision, and is easy to maintain.

**[0018]** Accordingly, as one feature of the present invention, there is provided a combustion chamber for the incineration of waste products, the combustion chamber comprising (a) an outer protective wall, and (b) an inner refractory wall extending within the outer protective wall, the inner refractory wall being shaped to define an interior cavity, (c) wherein the inner wall comprises a plurality of precast, refractory blocks.

**[0019]** Various other features and advantages will appear from the description to follow. In the description, reference is made to the accompanying drawings which form a part thereof, and in which is shown by way of illustration, an embodiment for practicing the invention. The embodiment will be described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that structural changes may be made without departing from the scope of the invention. The following detailed description is therefore, not to be taken in a limiting sense, and the scope of the present invention is best defined by the appended claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0020]** In the drawings, wherein like reference numerals represent like parts:

**[0021]** FIGS. 1(a) and 1(b) are front perspective and front plan views, respectively, of a combustion chamber constructed according to the teachings of the present invention, the combustion chamber being shown in longitudinal cross-section to illustrate certain novel features relating to its construction;

**[0022]** FIG. 1(c) is a simplified top section view of the combustion chamber shown in FIG. 1(b), taken along lines 1 (c)-1(c);

**[0023]** FIG. 2 is a top perspective view of a precast block set utilized in the assembly of the inner refractory wall shown in FIG. 1(a);

**[0024]** FIGS. 3(a)-(c) are inner perspective, right end perspective, and top plan views, respectively, of the long refractory block shown in the precast block set of FIG. 2;

**[0025]** FIG. 3(d) is a section view of the long refractory block shown in FIG. 3(c), taken along lines 3(d)-3(d);

**[0026]** FIGS. 4(a) and 4(b) are inner perspective and top plan views, respectively, of the short refractory block shown in the precast block set of FIG. 2;

**[0027]** FIG. 4(c) is a section view of the short refractory block shown in FIG. 4(b), taken along lines 4(c)-4(c);

**[0028]** FIGS. 5(a) and 5(b) are inner perspective and top plan views, respectively, of the short refractory block shown in the precast block set of FIG. 2;

**[0029]** FIG. 5(c) is a section view of the short refractory block shown in FIG. 5(b), taken along lines 5(c)-5(c);

**[0030]** FIGS. 6(a)-6(c) are inner, right end perspective, inner, left end perspective, and outer, right end perspective views, respectively, of the tuyere refractory block shown in the precast block set of FIG. 2;

**[0031]** FIGS. 6(d) and 6(e) are longitudinal and lateral section views, respectively, of the tuyere refractory block shown in FIG. 6(a), the figures being shown in section to illustrate the shape and orientation of the tuyere hole;

**[0032]** FIG. 7 is a top perspective view of the tieback refractory block shown in the precast block set of FIG. 2, the tieback refractory block being shown exploded form with a tie-back anchor and a support tube;

**[0033]** FIG. 8 is a lateral section view of the tieback refractory block shown in FIG. 7, the tieback refractory block being shown welded to the support tube by the tie-back anchor;

**[0034]** FIG. 9 is an enlarged, fragmentary view of the inner refractory wall shown in FIG. 1(c); and

**[0035]** FIG. 10 is an enlarged, fragmentary, longitudinal section view of two layers of the inner refractory wall shown in FIG. 1(a).

#### DETAILED DESCRIPTION OF THE INVENTION

##### Combustion Chamber 11

**[0036]** Referring now to FIGS. 1(a), 1(b), and 1(c), there is shown a combustion chamber designed for the incineration of waste products, the combustion chamber being constructed according to the teachings of the present invention and identified generally by reference numeral 11. As will be explained further in detail below, combustion chamber 11 is constructed, in part, using a plurality of precast, modular, refractory blocks which are stacked and arranged with great precision to create an inner refractory wall which is durable, experiences minimal material degradation, and delivers a uniform and balanced supply of air for incineration.

**[0037]** In the description that follows, combustion chamber 11 is referenced as being primarily designed for use in the incineration of wood-based waste products. However, it should be noted that the present invention is not limited for use in the incineration of wood-based waste products. Rather, it is to be understood that the principles of the present invention could be similarly applied to combustion chambers used in the incineration of a variety of different types of waste products.

**[0038]** As can be seen, combustion chamber 11, also referred to herein interchangeably as combustion cell 11 or combustion unit 11, is constructed as an enlarged, tower-like structure which includes an inner refractory wall 13 which extends vertically within an outer protective wall, or frame, 15. Inner wall 13 is spaced slightly in from outer wall 15 so as to define a plenum 17 therebetween. As will be explained further below, plenum 17 is provided to allow for the delivery of air used in the incineration process.

**[0039]** Inner refractory wall 13 is shaped to define an enlarged, generally cylindrical interior cavity, or combustion zone, 19. Inner wall 13 is additionally shaped to define an opening, or gas outlet, 21 at the top of interior cavity 19 to allow for the escape of heat generated during incineration. Although not limited to any particular application, it is to be

understood that heat exiting through opening 21 may be utilized for one or more designated purposes, such as wood drying treatments.

[0040] A combustion grate 23 is mounted on inner refractory wall 13 at the bottom of interior cavity 19. Grate 23 is designed to support the waste products intended for incineration and is preferably constructed of a suitable material, such as a water-cooled metal. A door-enclosable access port 25, approximately 19 inches in height, is formed in inner wall 13 proximate grate 23 to allow for the periodic cleaning, maintenance, and/or repair of the interior of combustion unit 11 when not in active operation.

[0041] Combustion chamber 11 is provided with an externally-accessible delivery chute 27 which penetrates through inner and outer walls 13 and 15 at a downward angle and into communication with combustion zone 19. A rotatable worm drive 29 is disposed within delivery chute 27. As can be appreciated, waste products are preferably deposited into chute 27 through enlarged exterior opening 27-1 and delivered by worm drive 29 into interior cavity 19 for subsequent incineration.

[0042] In use, intense heat, often in excess of 1000° C., is applied in the region directly above grate 23, this region being referenced herein as reactive fuel bed 31. To accelerate incineration, a uniform and balanced supply of air is preferably delivered into combustion zone 19. A primary supply of air used to fuel combustion is delivered upward through grate 23 from a cylindrical air space 33 located directly beneath grate 23, space 33 being in direct communication with plenum 17. A secondary supply of air used to fuel combustion is preferably delivered into interior cavity through a plurality of airflow nozzles, or tuyere holes, 35 which are formed in an optimal configuration within inner refractory wall 13 to ensure balanced airflow delivery, the particular details of tuyere holes 35 to be described in detail further below.

[0043] As can be appreciated, the unique construction of inner refractory wall 13 provides construction chamber 11 with a number of notable advantages over traditional combustion cells. Most notably, inner refractory wall 13 of combustion chamber 11 is constructed, in part, using a refractory block set 101 of the type as shown in FIG. 2. As can be seen, refractory block set 101 is comprised of multiple varieties of modular, refractory blocks, which can be selected and stacked in a predefined arrangement to construct inner wall 13. As can be appreciated, the precast and modular nature of the refractory blocks in set 101 serves not only to facilitate assembly and, if necessary, replacement but also to ensure construction with great accuracy and precision, particularly with respect to the location, geometric shape and angle of orientation of tuyere holes 35, which is a principal object of the present invention.

#### Refractory Block Set 101

[0044] As seen in FIG. 2, refractory block set 101 is shown comprising a long refractory block 111, a short refractory block 131, a medium-length refractory block 151, a tuyere refractory block 171 and a tieback refractory block 191. As can be appreciated, blocks 111, 131, 151, 171, and 191 serve as the foundational pieces, or building blocks, which are selected and arranged into stacked circular levels to form uniform inner wall 13.

[0045] It should be noted that the particular number and arrangement of each of blocks 111, 131, 151, 171, and 191

are preferably selected by an engineer based on the desired dimensions of inner wall 13 as well as the intended application. Accordingly, the particular arrangement of blocks 111, 131, 151, 171, and 191 shown in combustion chamber 11 is provided for illustrative purposes only and modifications could be readily implemented therein without departing from the spirit of the present invention.

[0046] Additionally, it should be noted that refractory block set 101 could include additional modular refractory blocks designs, not shown herein, without departing from the spirit of the present invention. As can be appreciated, the greater number of available refractory block shapes and styles serves to enhance the flexibility in optimizing the configuration of inner refractory wall 13.

[0047] Referring now to FIGS. 3(a)-(c), long refractory block 111 is shown in greater detail. As can be seen, refractory block 111 is precast as a unitary, modular component. Preferably, block 111 is precast using any suitable heat-resistant material, such as a concrete mixture. As can be appreciated, the precast construction of block 111 ensures dimensional accuracy as well as material consistency (e.g., eliminating the presence of bubbles), which is not readily obtainable in traditional cast-in-place constructions.

[0048] Block 111 is solid, brick-like member with a slight, yet consistent, radial curvature and includes a flat top surface 113, a flat bottom surface 115, an arcuate inner surface 117, an arcuate outer surface 119, a flat left end surface 121, and a flat right end surface 123. Dimensionally, block 111 preferably has a uniform width  $W_1$  of approximately 9 inches, a uniform height  $H_1$  of approximately 6.4375 inches, and extends in length along an arc  $A_1$  of approximately 20 degrees to yield an inner arc length  $L_{i1}$  of approximately 11.375 inches and an outer arc length  $L_{o1}$  of approximately 14.5 inches. However, it is to be understood that the block 111 is not limited to the aforementioned dimensions and could be resized, as needed, without departing from the spirit of the present invention.

[0049] A projection 125, semi-circular in transverse cross-section, protrudes upward from top surface 113 along its centerline. Additionally, a recess 126, semi-circular in transverse cross-section, is formed in bottom surface 115 along its centerline. Both projection 125 and recess 126 have a radius of approximately 1 inch and thereby serve as complementary surface mating features, as will be described further below.

[0050] Projection 125 extends along the majority of the length of block 111, with projection 125 extending just beyond left end surface 121 to form a tongue 127. Tongue 127 extends vertically across left end surface 121 and is generally semi-circular in cross-section, as seen most clearly in FIG. 3(c). A complementary groove 129, generally semi-circular in cross-section extends vertically in right end surface 123, with groove 129 having the same radius as tongue 127.

[0051] In this manner, it is to be understood that multiple blocks 111 are adapted to be stacked directly upon one another, with projection 125 of a lower block 111 protruding into recess 126 in an upper, or stacked, block 111. In this manner, this interlocking arrangement between projection 125 and recess 126 serves not only to facilitate proper registration between a stacked pair of blocks 111 but also to provide structural support and thereby minimize the risk of inner wall destabilization over time.

[0052] Similarly, it is to be understood that multiple blocks 111 are adapted to be configured in an end-to-end relationship, with tongue 127 of one block 111 protruding into groove 129 in an adjacent, or neighboring, block 111. This interlocking arrangement between tongue 127 and groove 129 also serves to facilitate proper registration between an adjacent pair of blocks 111 and provide structural support to inner refractory wall 13, which is highly desirable.

[0053] As referenced above, the dimensions of block 111 could be readily modified without departing from the spirit of the present invention. Most notably, arc  $A_1$  of block could be adjusted to provide the designer of inner refractory wall 13 with greater flexibility in its structural configuration.

[0054] As an example, in FIGS. 4(a)-(c), short refractory block 131 is shown in greater detail. As can be seen, short refractory block 131 is identical to refractory block 111 in that short refractory block 131 is precast as a unitary, modular component using any suitable heat-resistant material, such a concrete mixture.

[0055] Refractory block 131 is also identical to refractory block 111 in that refractory block 131 is constructed as solid, brick-like member with a slight, yet consistent, radial curvature and includes a flat top surface 133, a flat bottom surface 135, an arcuate inner surface 137, an arcuate outer surface 139, a flat left end surface 141, and a flat right end surface 143.

[0056] As further similarities, a projection 145, semi-circular in transverse cross-section, protrudes upward from top surface 133 along its centerline and mates with a semi-circular recess 146 formed in bottom surface 135 along its centerline. Additionally, a tongue 147, semi-circular in transverse cross-section, extends vertically across left end surface 141 and mates with a complementary groove 149 extending vertically in right end surface 143.

[0057] Refractory block 131 only differs from refractory block 111 in its dimensions. Although refractory block 131 has a uniform width  $W_2$  of approximately 9 inches, which is identical to refractory block 111, and a uniform height  $H_2$  of approximately 6.4375 inches, which is identical to refractory block 111, refractory block 131 is considerably shorter in length than refractory block 111.

[0058] Notably, refractory block 131 extends in length along an arc  $A_2$  of approximately 10 degrees to yield an inner arc length  $L_{I2}$  of approximately 5.6875 inches and an outer arc length  $L_{O2}$  of approximately 7.25 inches. As such, refractory block 131 is one-half the length of refractory block 111.

[0059] As another example, in FIGS. 5(a)-(c), medium-length refractory block 151 is shown in greater detail. As can be seen, medium refractory block 151 is identical to refractory block 111 in that medium refractory block 151 is precast as a unitary, modular component using any suitable heat-resistant material, such a concrete mixture.

[0060] Refractory block 151 is also identical to refractory block 111 in that refractory block 151 is constructed as solid, brick-like member with a slight, yet consistent, radial curvature and includes a flat top surface 153, a flat bottom surface 155, an arcuate inner surface 157, an arcuate outer surface 159, a flat left end surface 161, and a flat right end surface 163.

[0061] As further similarities, a projection 165, semi-circular in transverse cross-section, protrudes upward from top surface 153 along its centerline and mates with a semi-circular recess 166 formed in bottom surface 155 along

its centerline. Additionally, a tongue 167, semi-circular in transverse cross-section, extends vertically across left end surface 141 and mates with a complementary groove 169 extending vertically in right end surface 163.

[0062] Refractory block 151 only differs from refractory block 131 in its dimensions. Although refractory block 151 has a uniform width  $W_3$  of approximately 9 inches, which is identical to refractory block 111, and a uniform height  $H_3$  of approximately 6.4375 inches, which is identical to refractory block 111, refractory block 151 is considerably shorter in length than refractory block 111 but greater in length than refractory block 131.

[0063] Notably, refractory block 151 extends in length along an arc  $A_3$  of approximately 16 degrees to yield an inner arc length  $L_{I3}$  of approximately 9.125 inches and an outer arc length  $L_{O3}$  of approximately 11.625 inches. As such, the length of refractory block 151 lies between the lengths of refractory blocks 111 and 131.

[0064] Referring now to FIGS. 6(a)-(e), tuyere refractory block 171 is shown in greater detail. As will be explained further in detail below, each block 171 is precast to define a single tuyere hole, or airflow nozzle, 31. Due to the precast nature of block 171, the exact position, dimensions, and angle of orientation of airflow nozzle 31 can be ensured with great precision. As a result, combustion cell 11 is more effective in sustaining efficient and balanced combustion of waste products.

[0065] By contrast, the conventional practice of creating tuyere holes by ramming and subsequently removing cylindrical sleeves into a one-piece, curable, refractory lining has been found to be difficult to implement with great precision. As a result, airflow nozzles are often arranged and formed in conventional refractory linings with widespread variances and inconsistencies, which is highly undesirable.

[0066] As can be seen, tuyere refractory block 171 is identical to refractory block 111 in that refractory block 171 is precast as a unitary, modular component using any suitable heat-resistant material, such a concrete mixture.

[0067] Refractory block 171 is also identical to refractory block 111 in that refractory block 171 is constructed as solid, brick-like member with a slight, yet consistent, radial curvature and includes a flat top surface 173, a flat bottom surface 175, an arcuate inner surface 177, an arcuate outer surface 179, a flat left end surface 181, and a flat right end surface 183.

[0068] As further similarities, a projection 185, semi-circular in transverse cross-section, protrudes upward from top surface 173 along its centerline and mates with a semi-circular recess 186 formed in bottom surface 175 along its centerline. Additionally, a tongue 187, semi-circular in transverse cross-section, extends vertically across left end surface 181 and mates with a complementary groove 189 extending vertically in right end surface 183.

[0069] The exterior dimensions of refractory block 171 are also identical to refractory block 111. In fact, block 171 only differs from refractory block 111 in its inclusion of tuyere hole 31. As can be seen, tuyere hole 171 is in the form of a tubular bore with a circular cross-section of uniform diameter  $D$  along its length, diameter  $D$  preferably being approximately 1.375 inches.

[0070] Tuyere hole 31 is designed to extend in a downward and right-to-left direction from outer surface 179 to inner surface 177, with one end 31-1 located in the corner of outer surface 179 proximate top surface 173 and right end

surface **183** and the other end **31-2** located in the corner of inner surface **177** proximate bottom surface **175** and left end surface **181**. Preferably, tuyere hole **31** is pitched so as to extend at a downward angle  $\theta_1$  of approximately 15 degrees and a right-to-left, or horizontal, angle  $\theta_2$  of approximately 45 degrees. As can be appreciated, the dimension and orientation of tuyere hole **31** is optimized to deliver an efficient and balanced airflow supply into combustion zone **19**.

[0071] Referring now to FIGS. 7 and 8, tieback refractory block **191** is shown in greater detail. As will be explained further in detail below, each tieback block **191** is uniquely designed to facilitate its securement to a fixed support structure. As a result, the inclusion and fixed securement of tieback blocks **191** provides anchored structural support to inner wall **13** so as to minimize the risk of destabilization over time.

[0072] As can be seen, tieback refractory block **191** is identical to refractory block **111** in that tieback refractory block **191** is precast as a unitary, modular component using any suitable heat-resistant material, such a concrete mixture.

[0073] Tieback refractory block **191** is also identical to refractory block **111** in that refractory block **191** is constructed as solid, brick-like member with a slight, yet consistent, radial curvature and includes a flat top surface **193**, a flat bottom surface **195**, an arcuate inner surface **197**, an arcuate outer surface **199**, a flat left end surface **201**, and a flat right end surface **203**.

[0074] As further similarities, a projection **205**, semi-circular in transverse cross-section, protrudes upward from top surface **193** along its centerline and mates with a semi-circular recess **206** formed in bottom surface **195** along its centerline. Additionally, a tongue **207**, semi-circular in transverse cross-section, extends vertically across left end surface **201** and mates with a complementary groove **209** extending vertically in right end surface **203**.

[0075] The exterior dimensions of refractory block **191** are also largely identical to refractory block **111**. However, block **191** differs from refractory block **111** in that block **191** is shaped to include an external groove, or recess, **211** which is suitably dimensioned to receive an L-shaped tie-back **213**. As will be explained further below, tie-back **213** is designed for fixed securement to a support structure in order to stabilize inner wall **13**.

[0076] As can be seen, external groove **211** is generally circular in transverse cross-section and has a uniform diameter of approximately 0.5 inches. External groove **211** is generally L-shaped and includes (i) a horizontal portion **211-1** formed in top surface **193** which extends radially inward from outer surface **199** at its approximate midpoint, and (ii) a vertical portion **211-2** which extends orthogonally downward from the inner end of horizontal portion **211-1**, vertical portion **211-2** extending down from top surface **193** towards bottom surface **195** for a depth of approximately 3 inches.

[0077] External groove **211** in block **191** is designed to retain a corresponding tie-back anchor, or tie-back, **213**. Tie-back **213** is constructed as a unitary, L-shaped rod constructed of a rigid and durable material, such as stainless steel. In the present embodiment, tie-back **213** has a uniform diameter of 0.5 inches and includes a horizontal segment **213-1** and a vertical segment **213-2** extending at a right angle.

[0078] As shown in FIG. 8, tie-back **213** is designed for fitted insertion in external groove **211**, with horizontal segment **213-1** of tie-back **213** lying within horizontal portion **211-1** in block **191** and vertical segment **213-2** of tie-back **213** projecting within vertical portion **211-2** in block **191**. Mounted into engagement as such, the distal end of horizontal segment **213-1** of tie-back **213** protrudes beyond outer surface **199** of block **191**.

[0079] A vertical support tube **221** extending in abutment against outer surface **199** of block **191**. In the present embodiment, tube **221** is represented as an elongated tubular member, constructed of a rigid and durable material, with a 2-inch square shape in transverse cross-section. As a feature of the invention, the distal end of tie-back **213** preferably aligns flush against a side surface of tube **211**. Therefore, by directly welding tie-back **213** to side surface of tube **211**, block **191** (and effectively all other blocks connected thereto) is provided rigid anchored support from tube **221**.

#### Design and Assembly of Inner Wall 13

[0080] Referring back to FIGS. 1(a)-(c), inner wall **13** of combustion chamber **11** is preferably constructed, at least in part, in the following manner. First, prior to assembly, a plurality of support tubes **221** are arranged in a circular configuration so as to define the outer diameter of inner wall **13**. Tubes **221** extend vertically and are preferably welded, or otherwise fixedly secured to, outer wall **15**.

[0081] As seen most clearly in FIG. 1(c), tubes **221** are preferably spaced evenly apart from one another so as to provide uniform support for inner wall **13**. In the present embodiment, eighteen tubes **221** are spaced apart at 20-degree intervals. As such, the requisite number of evenly-spaced tieback blocks **191** in each layer (e.g. nine tieback blocks **191**) is able to anchor onto a corresponding set of tubes **221**.

[0082] With support tubes **221** installed, the design of inner wall **13** is formulated using refractory block set **101**. The particular selection and arrangement of blocks **111**, **131**, **151**, **171**, and **191** utilized to construct inner wall **13** as a complete sealed ring are determined based on, inter alia, the desired dimensions, structural needs, and airflow requirements of combustion unit **11**.

[0083] Once design of inner wall **13** is formulated, the selection of refractory blocks from set **101** are stacked, layer by layer, in the predetermined arrangement, with the interlocking mating faces of adjacent refractory blocks not only facilitating proper registration but also providing enhanced structural support, as shown in FIGS. 9 and 10. The four-sided interlocking of each refractory block with its neighboring blocks also enables the interior surface of inner wall **13** to wear away by nearly half of its thickness without disruption to the intermating feature established between adjacent surfaces. As part of the assembly process, all other essential components of combustion unit **11** (e.g., outlet **21**, grate **23** access port **25**, chute **27**) are properly integrated into inner wall **13** during the stacking of the selection of refractory blocks **111**, **131**, **151**, **171** and/or **191**.

[0084] Preferably, a refractory mortar (not shown) is preferably applied in the joint, or spacing, between adjacent blocks for bonding purposes in order to create a uniform interior surface and ensure structural integrity. Preferably, a thin, uniform layer of the mortar (e.g., approximately 0.0625 inches in thickness) is applied to effectuate bonding without distorting proper positioning.



[0085] Ideally, a predefined number of tieback blocks 191 are utilized in each layer, with variability in the location and/or number of tieback blocks 191 created through selection amongst the different lengthened blocks 111, 131 and 151. Tieback blocks 191 are therefore preferably arranged for welding to corresponding tubes 221 by tie-backs 213. As a feature of the invention, the welding of tieback blocks 191 to support tubes 221 eliminates the need for the expanded metal support utilized in traditional combustion units and thereby remedies the various shortcomings associated therewith.

[0086] As seen in FIG. 1(c), each layer of inner wall 13 preferably secures a tieback block 191 to a first set of alternating (i.e. every other) support tubes 221, with adjacent layers of wall 13 preferably securing a tieback block 191 to the remaining (i.e. second set) of alternating support tubes 221. In this fashion, support to inner wall 13 is uniformly distributed.

[0087] Additionally, a predefined number of tuyere blocks 171 is preferably utilized and equidistantly arranged in each layer to provide the necessary secondary airflow required to optimize combustion within interior cavity 19. By ensuring balanced and efficient combustion within unit 11, any degradation of inner wall 13 is greatly minimized. Furthermore, because blocks 171 are precast, the shape and dimension of each tuyere hole 31 is formed with considerable precision.

[0088] As can be appreciated, the construction of inner wall 13 using a plurality of precast refractory blocks improves its overall structural integrity and manufacturing precision. As an additional benefit, the modular nature of inner wall 13 allows for sections thereof to be simply and easily restored using replacement refractory blocks, as needed.

[0089] The invention described in detail above is intended to be merely exemplary and those skilled in the art shall be able to make numerous variations and modifications to it without departing from the spirit of the present invention. All such variations and modifications are intended to be within the scope of the present invention as defined in the appended claims.

What is claimed is:

1. A method for constructing a combustion chamber for the incineration of waste products, the method comprising the steps of:

- (a) installing an outer protective wall;
- (b) providing a plurality of precast, refractory blocks, each of the plurality of precast, refractory blocks comprising a top surface, a bottom surface, an inner surface, an outer surface, a left end surface, and a right end surface, all of the plurality of precast, refractory blocks having a common width in the horizontal direction between the inner surface and the outer surface, wherein a selection of the plurality of precast, refractory blocks is precast to define a tuyere hole extending therethrough;
- (c) selecting and assembling the plurality of refractory blocks in a predefined, side-by-side, and stacked arrangement to create an inner refractory wall that

extends within the outer protective wall, the inner refractory wall being shaped to define an interior cavity, wherein the selection of refractory blocks precast with a tuyere hole is optimally arranged within the inner refractory wall to ensure balanced airflow delivery into the interior cavity.

2. The method as claimed in claim 1 wherein the tuyere hole is circular in transverse cross-section.

3. The method as claimed in claim 2 wherein the tuyere hole extends downward and horizontally from the outer surface to the inner surface.

4. The method as claimed in claim 1 wherein the plurality of refractory blocks includes a variety of refractory blocks of different lengths.

5. The method as claimed in claim 4 wherein the variety of refractory blocks is arranged to create the inner refractory wall with a desired dimension.

6. The method as claimed in claim 5 wherein a joint is formed between adjacent refractory blocks in the inner refractory wall.

7. The method as claimed in claim 6 further comprising the step of applying refractory mortar in the joint between adjacent refractory blocks in the inner refractory wall.

8. The method as claimed in claim 7 wherein the inner refractory wall is spaced in from the outer protective wall so as to define a plenum therebetween.

9. The method as claimed in claim 8 wherein the plurality of precast, refractory blocks matingly engages one another when stacked in layers.

10. The method as claimed in claim 9 wherein the inner surface for each of the plurality of precast, refractory blocks has a fixed radial curvature.

11. The method as claimed in claim 10 wherein a projection is formed on the top surface of each of the plurality of precast, refractory blocks.

12. The method as claimed in claim 11 wherein a recess is formed on the bottom surface of each of the plurality of precast, refractory blocks.

13. The method as claimed in claim 12 wherein the recess on one of the plurality, of precast, refractory blocks is dimensioned to fittingly receive the projection on another of the plurality of precast, refractory blocks when arranged in a stacked relationship.

14. The method as claimed in claim 13 wherein a tongue extends out from one of the left end surface and the right end surface of each of the plurality of precast, refractory blocks.

15. The method as claimed in claim 14 wherein a groove is formed in the other of the left end surface and the right end surface of each of the plurality of precast, refractory blocks.

16. The method as claimed in claim 15 wherein the groove on one of the plurality, of precast, refractory blocks is dimensioned to fittingly receive the tongue on another of the plurality of precast, refractory blocks when arranged in an end-to-end relationship.

\* \* \* \* \*