



US 20250261810A1

(19) **United States**

(12) **Patent Application Publication**
Conrad

(10) **Pub. No.: US 2025/0261810 A1**

(43) **Pub. Date: Aug. 21, 2025**

(54) **HAND VACUUM CLEANER**

Publication Classification

(71) Applicant: **Omachron Intellectual Property Inc.,**
Hampton (CA)

(72) Inventor: **Wayne Ernest Conrad, Hampton (CA)**

(21) Appl. No.: **19/201,705**

(22) Filed: **May 7, 2025**

(51) **Int. Cl.**

A47L 5/24 (2006.01)

A47L 9/00 (2006.01)

A47L 9/10 (2006.01)

A47L 9/16 (2006.01)

(52) **U.S. Cl.**

CPC *A47L 5/24* (2013.01); *A47L 9/00* (2013.01);

A47L 9/106 (2013.01); *A47L 9/1691* (2013.01)

Related U.S. Application Data

(63) Continuation of application No. 18/376,951, filed on Oct. 5, 2023, now Pat. No. 12,324,556, which is a continuation of application No. 17/401,180, filed on Aug. 12, 2021, which is a continuation of application No. 15/015,036, filed on Feb. 3, 2016, now Pat. No. 11,253,119, which is a continuation of application No. 13/255,858, filed on Sep. 9, 2011, filed as application No. PCT/CA2010/000340 on Mar. 9, 2010, now Pat. No. 9,591,952.


Foreign Application Priority Data

Mar. 11, 2009 (CA) 2658029

Mar. 11, 2009 (CA) 2658048

ABSTRACT

A hand vacuum cleaner has a cyclone having a longitudinally extending sidewall, which extends from a cyclone rear end to a cyclone front end. The front end of the sidewall defining an opening that is closeable by an openable door. The opening having a cross-sectional area comparable to a cross-sectional area of the door. The opening extends in a direction that is inclined relative to the longitudinal direction of the sidewall. The openable door has a rotatably mounted end and an opposed securable end that is securable to the cyclone by a lock. The opposed securable end is rotatable to an open position in which the opposed securable end is positioned forward of the opening.

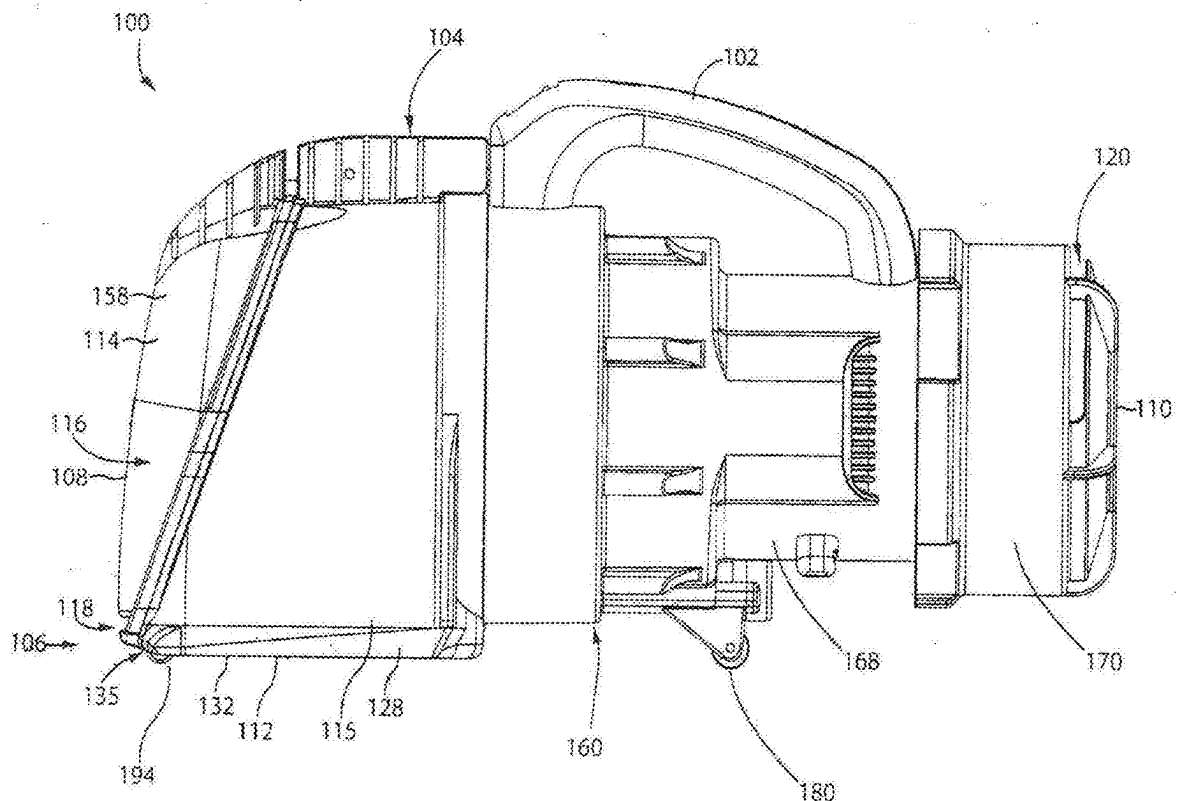

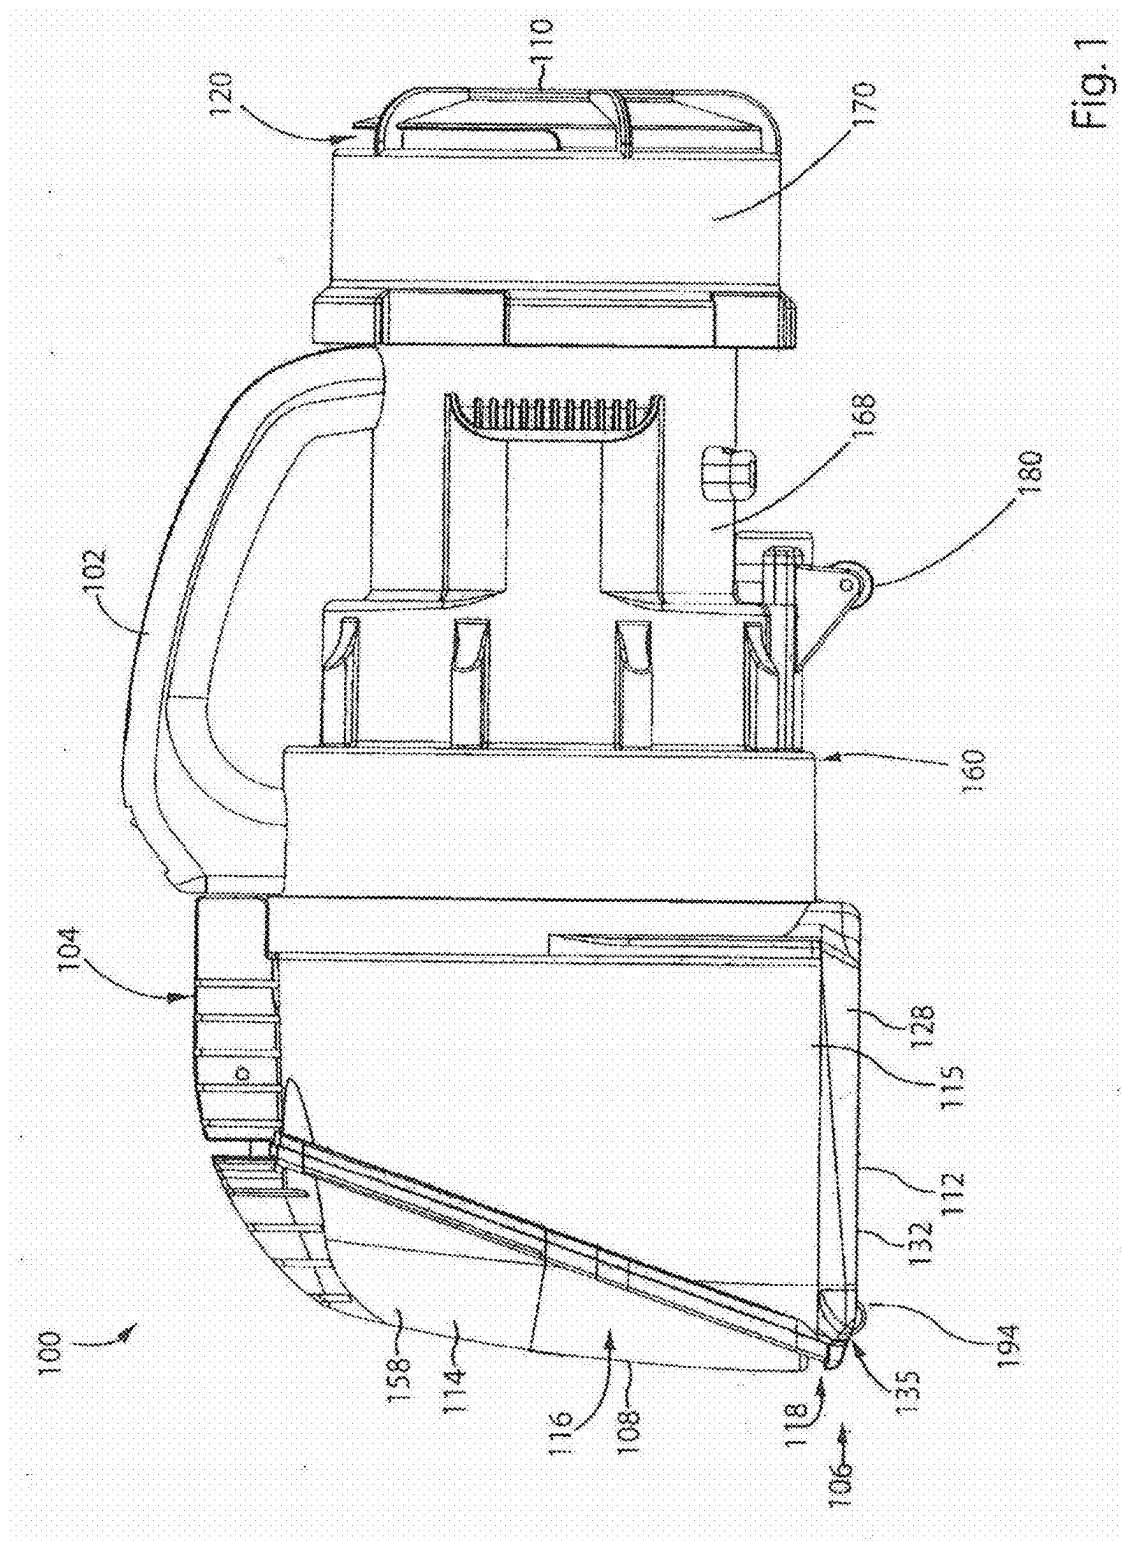
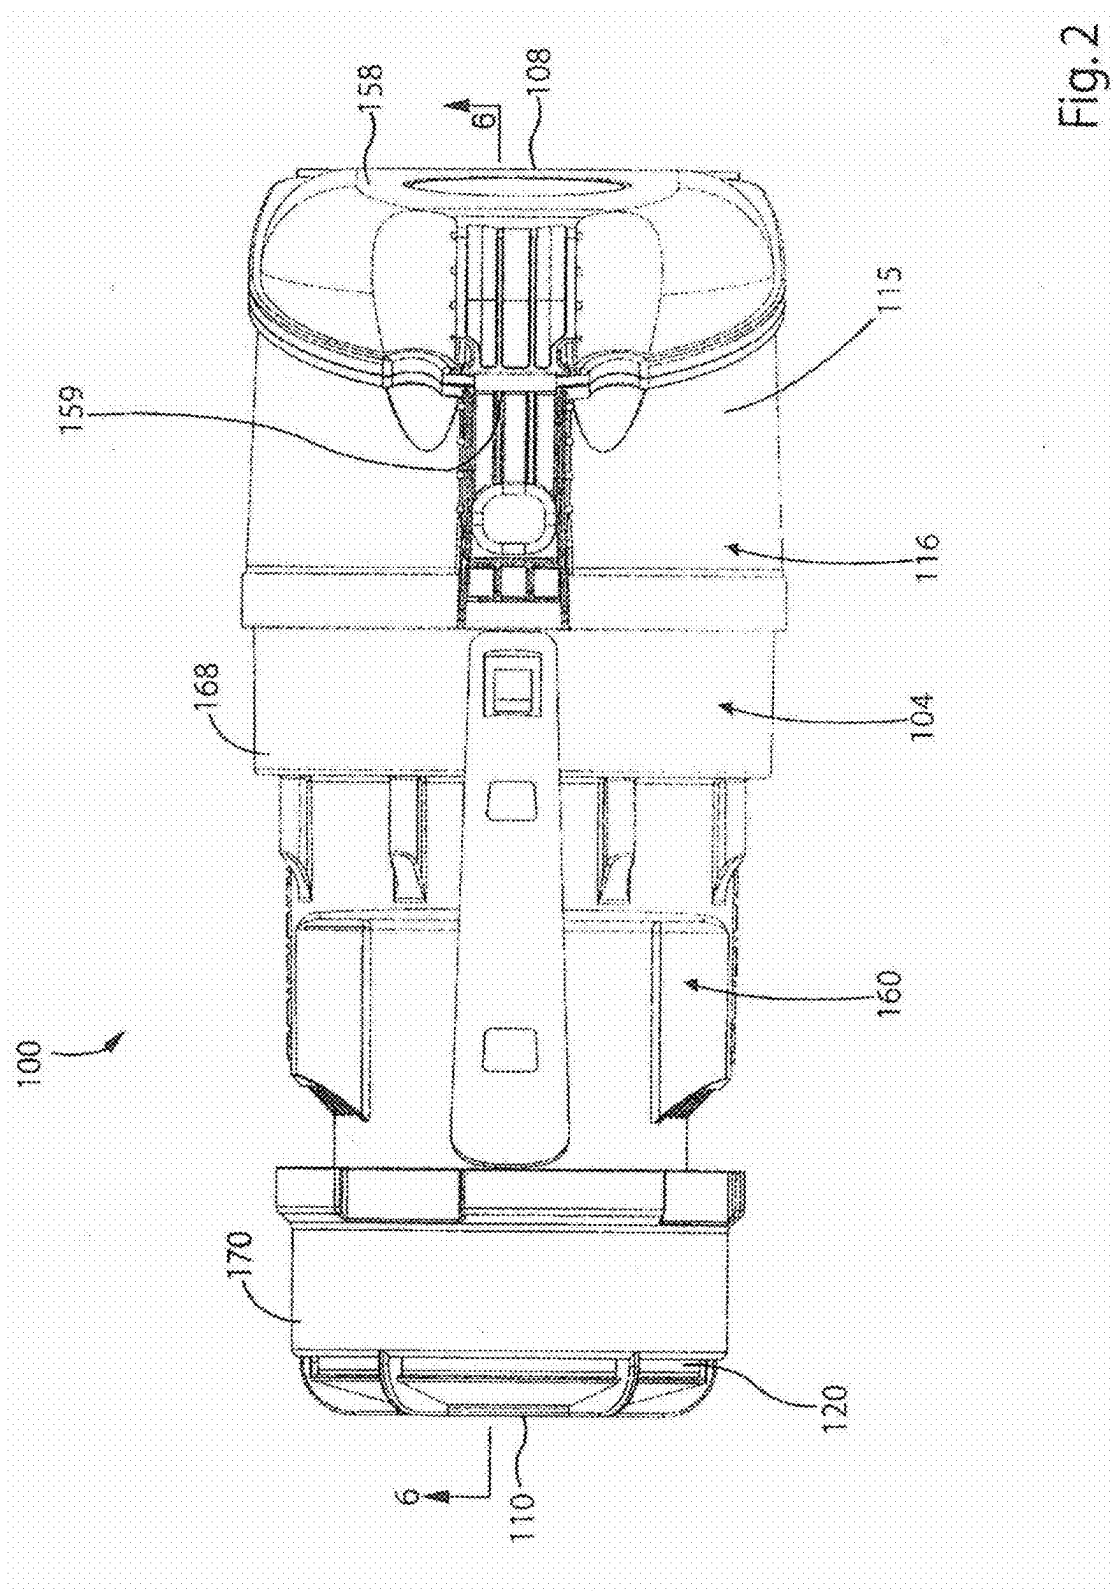
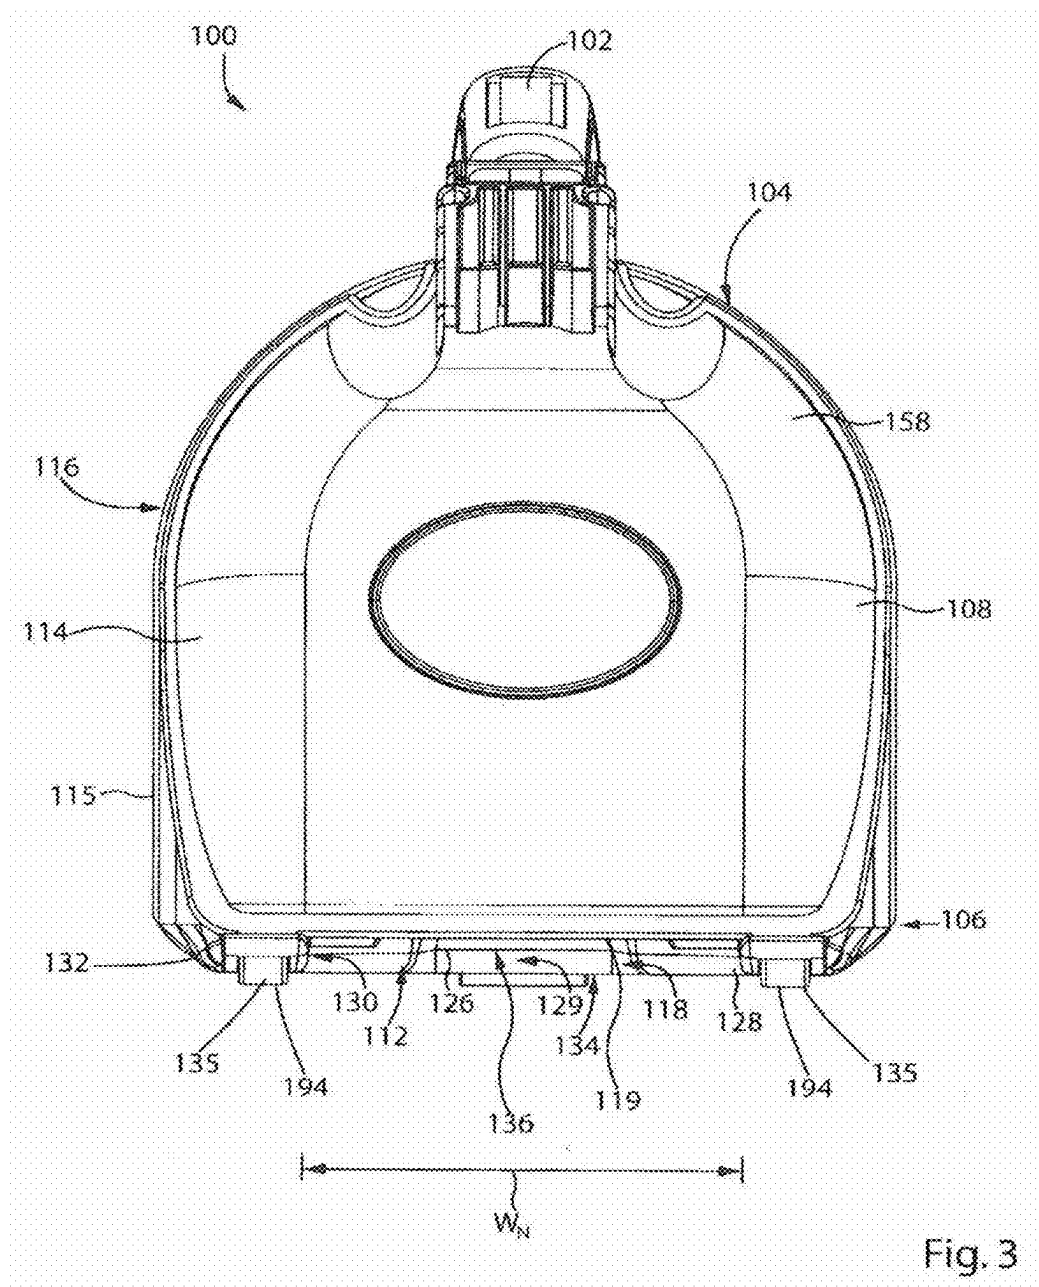
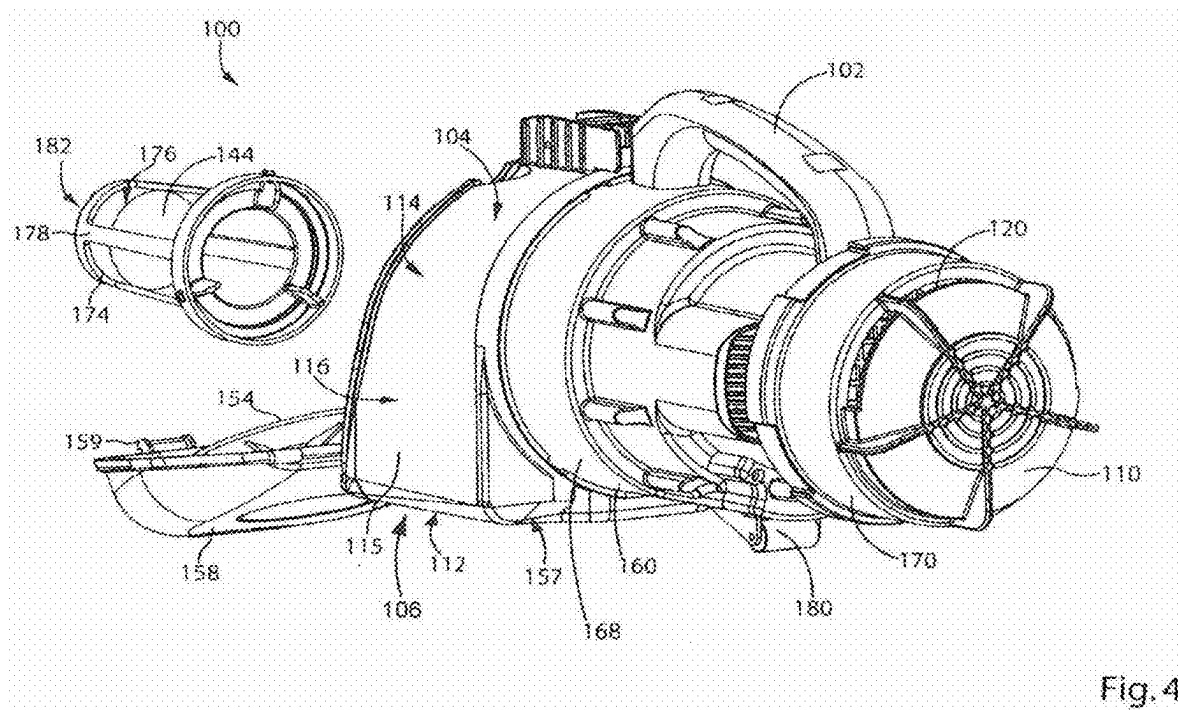
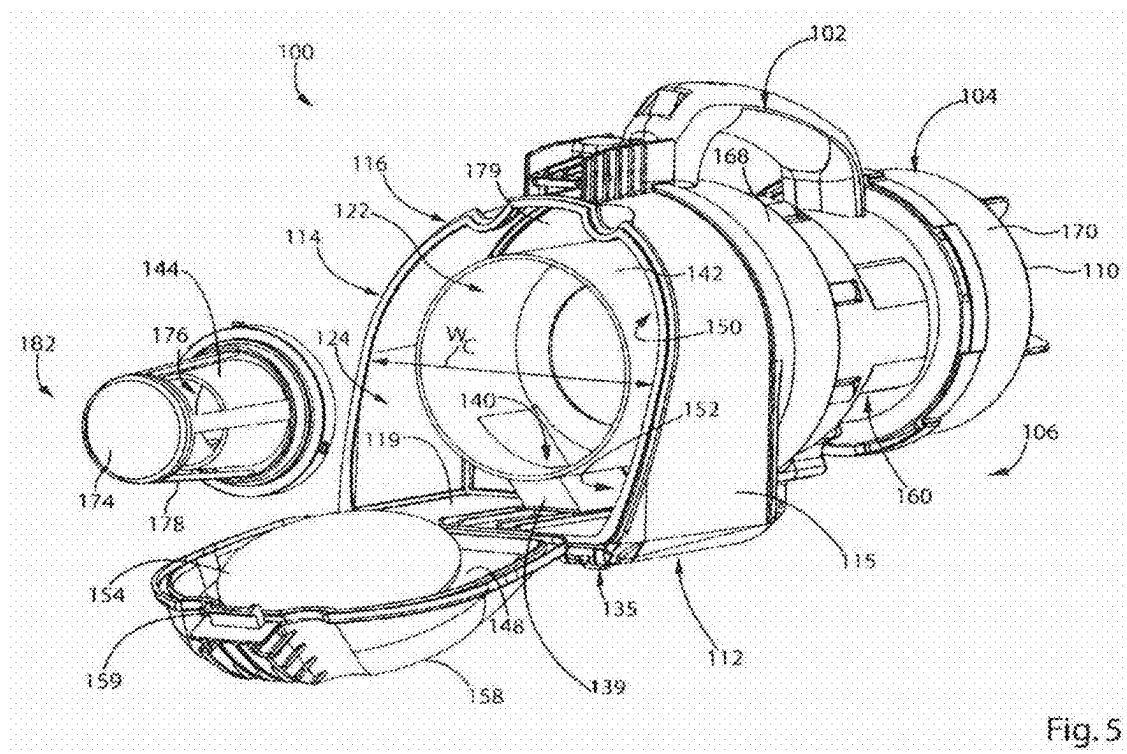



Fig. 1









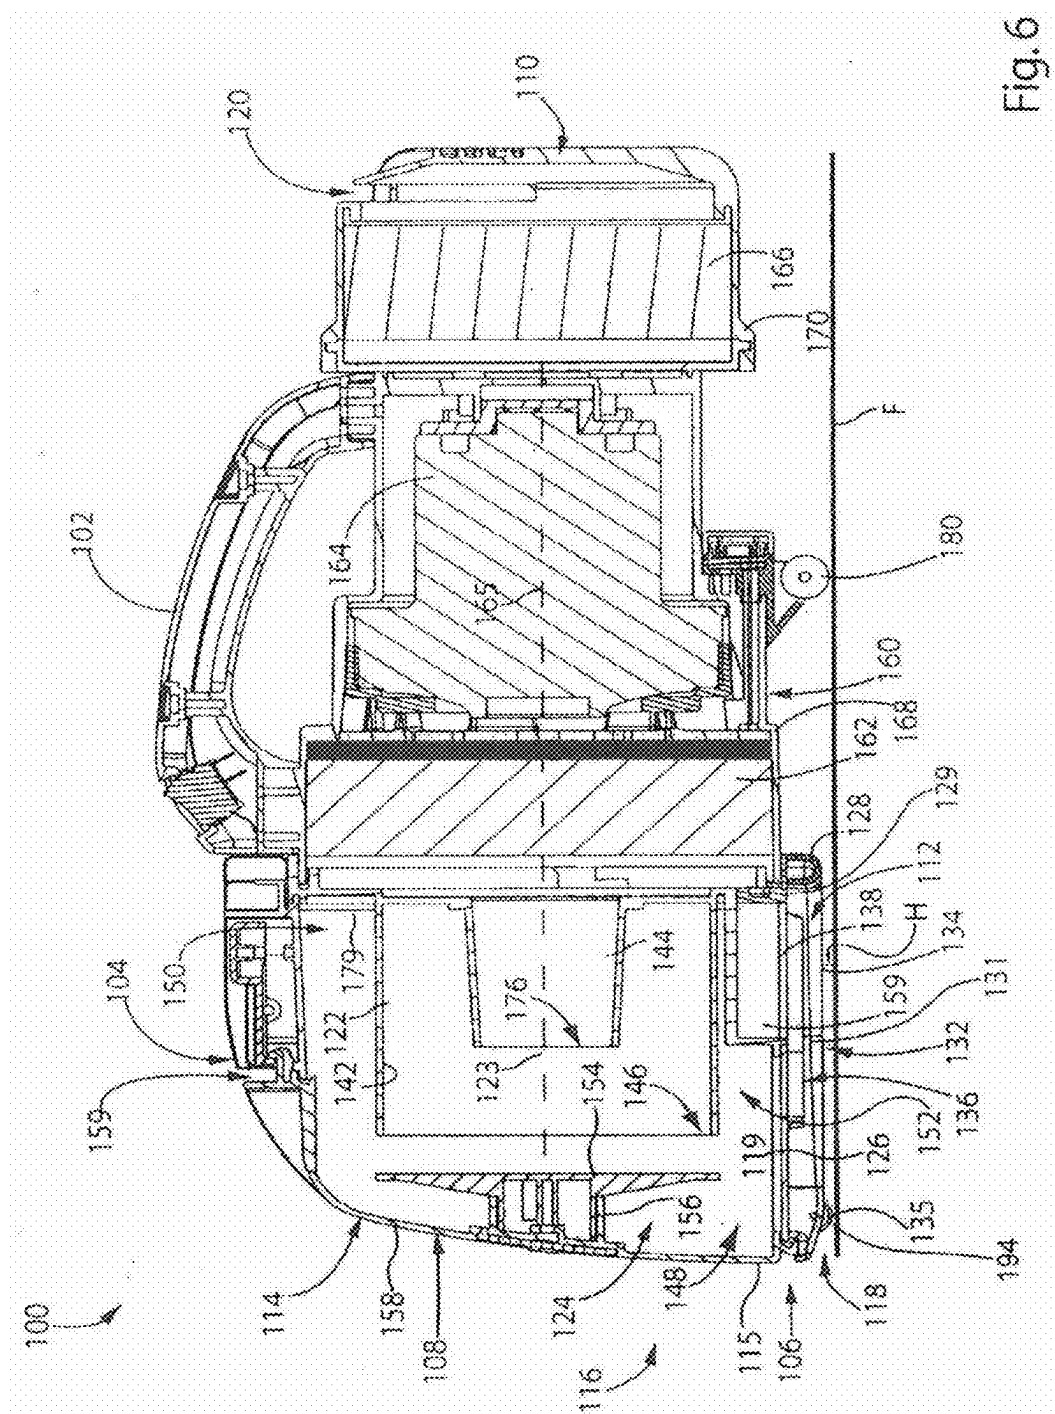

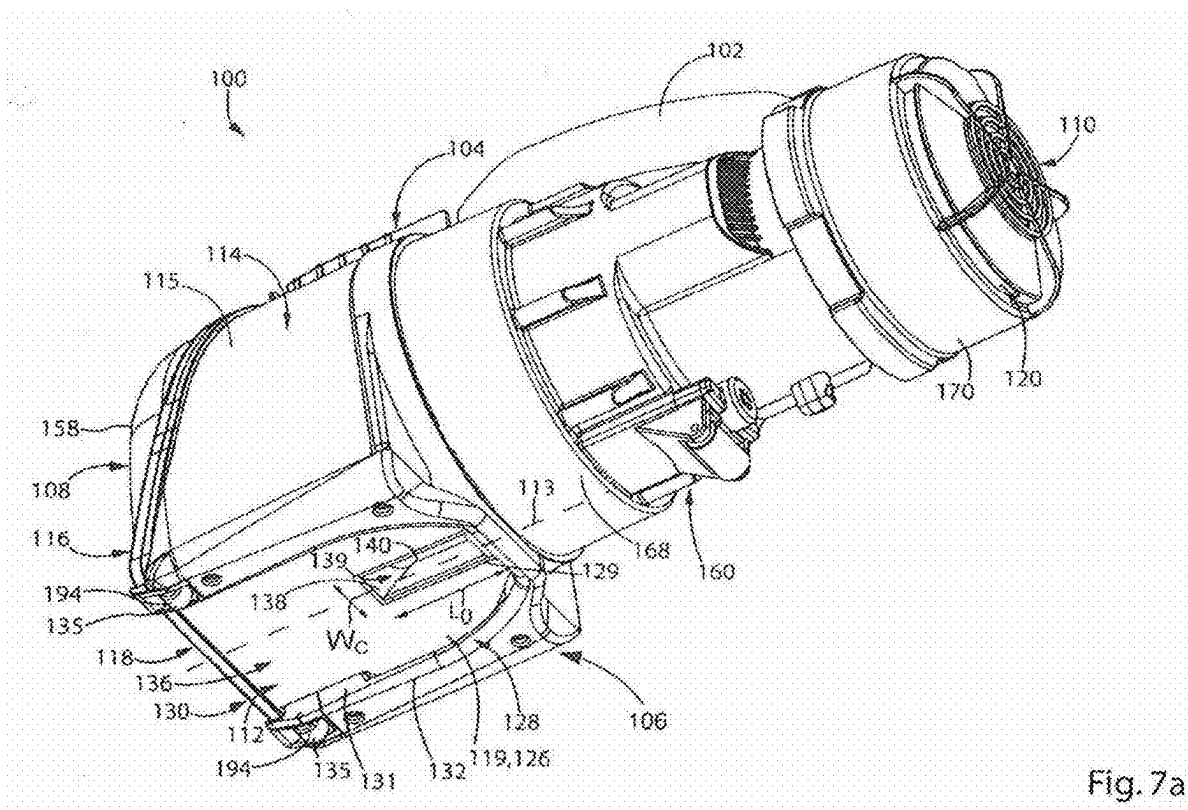


Fig. 7a


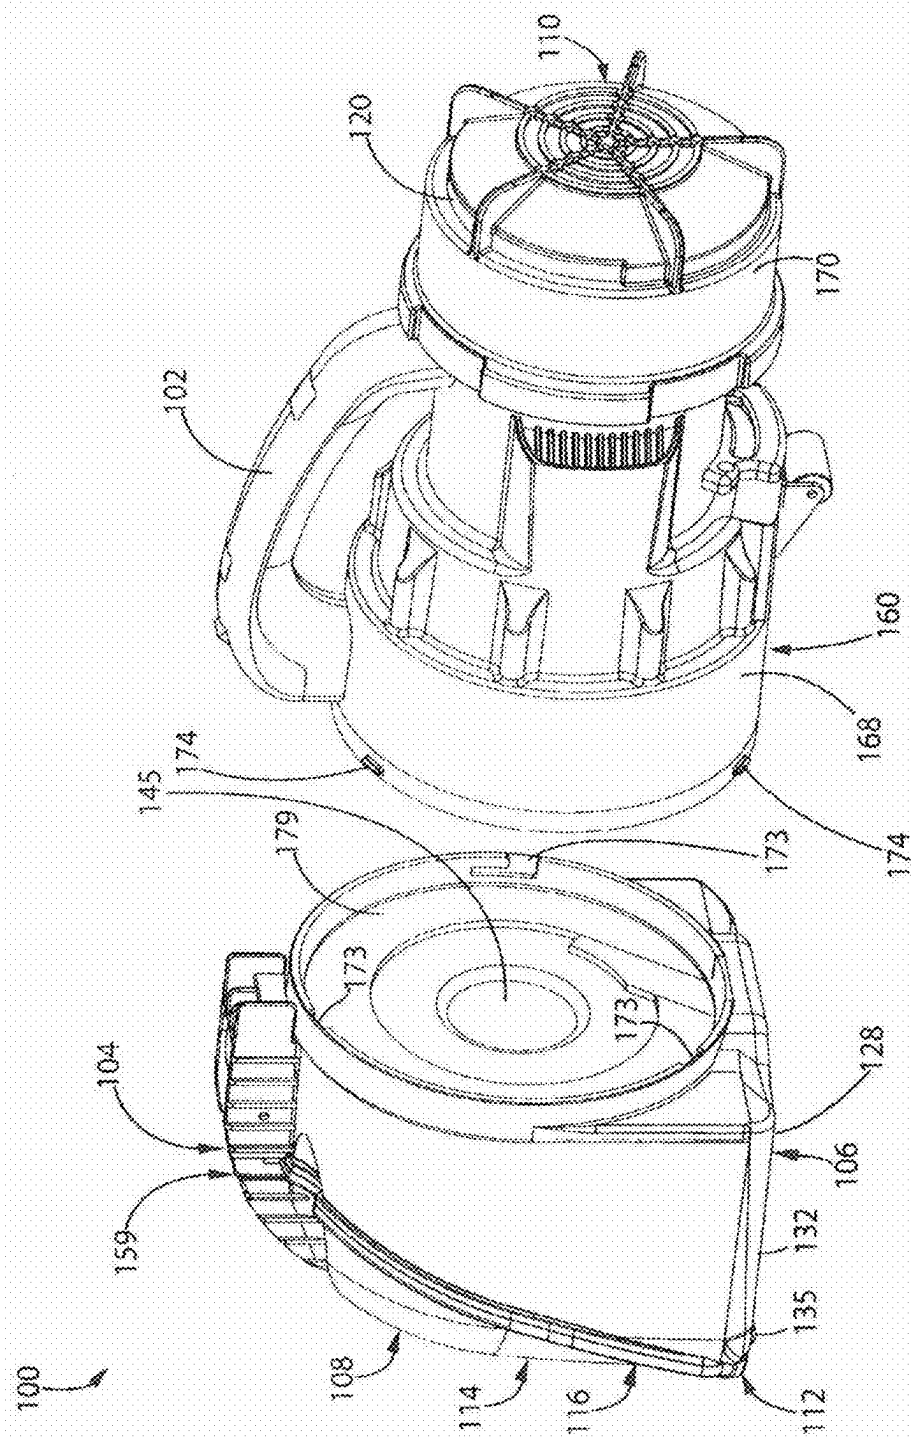


Fig. 7b

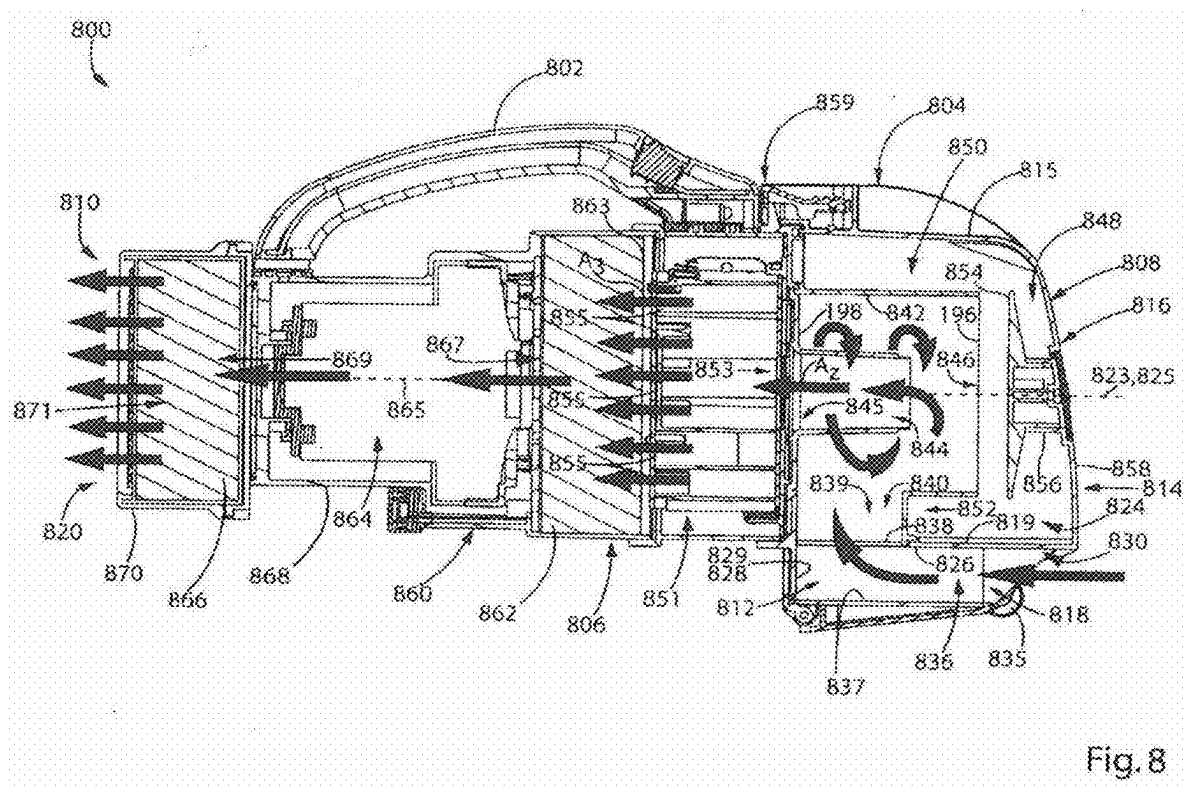

HAND VACUUM CLEANER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 18/376,951 filed on Oct. 5, 2023, which itself is a continuation of U.S. patent application Ser. No. 17/401,180, which was filed on Aug. 12, 2021, which itself is a continuation application of U.S. patent application Ser. No. 15/015,036, which was filed on Feb. 3, 2016 and issued as U.S. Pat. No. 11,253,119 on Feb. 22, 2022, which itself is a continuation of U.S. patent application Ser. No. 13/255,858 which was filed on Sep. 9, 2011 and issued as U.S. Pat. No. 9,591,952 on Mar. 14, 2017, which was filed under 35 USC 371 as a national phase entry of international patent application No. PCT/CA2010/000340, with a filing date of Mar. 9, 2010, which itself claims the benefit of priority under 37 CFR 1.55 from Canadian patent application No. 2,658,029, filed on Mar. 11, 2009 and Canadian Patent application No. 2,658,048, filed on Mar. 11, 2009, the specifications of which are incorporated herein by reference.

FIELD

[0002] The specification relates to hand carried surface cleaning apparatus such as vacuum cleaners, and particularly, to cyclonic hand vacuum cleaners. More specifically, the specification relates to hand vacuum cleaners having a removable dirt chamber.

INTRODUCTION

[0003] The following is not an admission that anything discussed below is prior art or part of the common general knowledge of persons skilled in the art.

[0004] PCT publication WO 2008/009890 (Dyson Technology Limited) discloses a handheld cleaning appliance comprising a main body, a dirty air inlet, a clean air outlet and a cyclonic separator for separating dirt and dust from an airflow. The cyclone separator is located in an airflow path leading from the air inlet to the air outlet. The cyclonic separator is arranged in a generally upright orientation (i.e., the air rotates about a generally vertical axis in use). A base surface of the main body and a base surface of the cyclonic separator together form a base surface of the appliance for supporting the appliance on a surface. See also PCT publication WO 2008/009888 (Dyson Technology Limited) and PCT publication WO 2008/009883 (Dyson Technology Limited).

[0005] U.S. Pat. No. 7,370,387 (Black & Decker Inc.) discloses a hand-holdable vacuum cleaner that uses one or more filters and/or cyclonic separation device, and means for adjusting an angle of air inlet relative to a main axis of said vacuum cleaner. In particular, the vacuum cleaner further comprises a rigid, elongate nose having the air inlet at one end thereof, the nose being pivotal relative to a main axis of the vacuum cleaner through an angle of at least 135 degrees.

SUMMARY

[0006] The following introduction is provided to introduce the reader to the more detailed discussion to follow. The introduction is not intended to limit or define the claims.

[0007] According to one broad aspect, a hand surface cleaning apparatus is disclosed having a simplified structure for emptying the surface cleaning apparatus. The hand

surface cleaning apparatus is preferably a cyclonic surface cleaning apparatus wherein the dirt chamber is removable as a sealed unit from the surface cleaning apparatus. The dirt chamber may be part of a cyclone (e.g., the lower portion of a cyclone chamber) and removable with the cyclone. Alternately, the dirt chamber may be external to the cyclone chamber and removable from the hand surface cleaning apparatus by itself. In either case, the dirt collection chamber is closed (other than, e.g., an air inlet, an air outlet, a dirt outlet) when removed from the hand surface cleaning apparatus. The dirt chamber may be openable, such as by an openable or removable lid or door. Accordingly, dirt collected in the chamber may be transported to a disposal site (e.g., a garbage can) without the dirt being dispersed as the dirt collection chamber is conveyed to the disposal site.

[0008] Another advantage of this design is that the dirt chamber, and the cyclone if removed with the dirt chamber, may be washed or immersed in water without concern that the motor of the hand surface cleaning apparatus may be damaged. The portion of the hand surface cleaning apparatus may be dried and then remounted to the hand surface cleaning apparatus so that the hand surface cleaning apparatus is then ready for further use.

[0009] In some examples, the hand surface cleaning apparatus may comprise an air flow passage extending from a dirty air inlet to a clean air outlet with a first cyclone unit positioned in the air flow passage. The first cyclone unit may comprise at least one cyclone and at least one dirt collection chamber. The dirt collection chamber may be a portion of the cyclone casing (e.g., a lower portion of a cyclone chamber or a chamber external to the cyclone casing and connected in flow communication with the cyclone chamber via a dirt outlet of the cyclone chamber. The dirt collection chamber is removable from the surface cleaning apparatus as a sealed unit for emptying. A suction motor is positioned in the air flow passage.

[0010] In some examples, the dirt collection chamber is removable from the hand surface cleaning apparatus with the first cyclone unit. The first cyclone unit may be sealed when removed from the hand surface cleaning apparatus other than fluid flow passages leading to and from the first cyclone unit.

[0011] In some examples, the first cyclone unit has a single cyclone and the dirt collection chamber is positioned exterior to the single cyclone. The cyclone and the dirt collection chamber may comprise a one-piece assembly, and may be integrally formed. For example, the dirt chamber and the cyclone chamber may be produced in a single mold, together optionally with an end wall. The other end, e.g., the bottom of the dirt chamber, may be closed by an openable door.

[0012] In some examples, the hand surface cleaning apparatus comprises a suction motor housing, the suction motor is positioned in the suction motor housing, and the first cyclone unit is removably mounted to the suction motor housing.

[0013] In some examples, the cyclone unit has a first mounting member, the suction motor housing has a second mounting member, and the first and second mounting members are rotationally secured together. Preferably, a bayonet mount is used. However, a screw mount or other means, such as latches or other hand operable releasable mechanical fasteners, may be used.

[0014] In some examples, the at least one dirt collection chamber is openable when mounted to the hand surface cleaning apparatus.

[0015] In some examples, the hand surface cleaning apparatus has a front end and a rear end, the first cyclone unit is positioned forward of the suction motor housing, and the at least one dirt collection chamber has an openable door positioned at the front end.

[0016] In some examples, the hand surface cleaning apparatus further comprises an airflow chamber extending from a dirty air inlet to the cyclone wherein the airflow chamber is removable with the first cyclone unit. The airflow chamber may be integrally formed as part of the first cyclone unit.

[0017] In some examples, the first cyclone unit has a single cyclone and a single dirt collection chamber. In other examples, the hand surface cleaning apparatus further comprises a second cyclone unit downstream from the first cyclone unit.

[0018] According to another broad aspect, a hand surface cleaning apparatus is disclosed that is easier to clean and has a simplified structure. In accordance with this aspect, a hand surface cleaning apparatus is provided with a dirt collection chamber and a nozzle. The nozzle and the dirt collection chamber may be integrally molded together or separately manufactured and then assembled together as a one-piece assembly. In either embodiment, the nozzle and the dirt collection chamber may then be removed concurrently (e.g., in a single operation) from the hand surface cleaning apparatus. Once removed, the dirt collection chamber may be emptied. During operation, dirt may build up in the nozzle of the surface cleaning apparatus and/or the dirt collection chamber. These components once separated from the hand surface cleaning apparatus may be cleaned by, for example, washing them in water.

[0019] In a preferred embodiment, the dirt collection chamber is removable in a sealed configuration. For example, a cyclone unit may comprise a cyclone and a dirt collection chamber assembly. The assembly may be removably mounted to the hand surface cleaning apparatus. Accordingly, the dirt collection chamber may be closed (e.g., have a closed lid) when removed from the hand surface cleaning apparatus.

[0020] A further advantage of this design is that the hand surface cleaning apparatus may have a simplified structure. By providing the nozzle as part of the dirt collection chamber, and preferably as part of a cyclone unit, such an assembly may be removably mounted to a motor housing. Accordingly, a skeleton or backbone to which individual components are mounted is not required and is preferably not used. Such a design may be lighter, permitting a user to use the hand surface cleaning apparatus for a longer continuous period of time.

[0021] Accordingly, for example, the hand surface cleaning apparatus may comprise an air flow passage extending from a nozzle having a dirty air inlet to a clean air outlet, with a first cyclone unit is positioned in the air flow passage. The first cyclone unit may comprise at least one cyclone having a cyclone inlet and at least one dirt collection chamber. A suction motor may be positioned in the air flow passage. The dirt collection chamber and the nozzle are removable from the surface cleaning apparatus, preferably concurrently (i.e., by the same operation step).

[0022] In some examples, the dirt collection chamber and the nozzle are removable as a unit.

[0023] In some examples, the dirt collection chamber and the nozzle comprise a one-piece assembly.

[0024] In some examples, the dirt collection chamber and the nozzle are integrally formed, such as being produced from a single mold.

[0025] In some examples, the dirt collection chamber is removable from the hand surface cleaning apparatus with the first cyclone unit.

[0026] In some examples, the nozzle is connected in airflow communication with the cyclone at a lower portion of the hand surface cleaning apparatus.

[0027] In some examples, the nozzle is positioned at a bottom of the hand vacuum.

[0028] In some examples, the nozzle is positioned beneath at least a portion of the cyclone unit.

[0029] In some examples, the hand surface cleaning apparatus further comprises a plurality of wheels, and the nozzle has a nozzle axis that extends generally horizontally when the wheels are in contact with a surface to be cleaned.

[0030] In some examples, the nozzle comprises an enclosed airflow chamber.

[0031] In some examples, the nozzle comprises an open sided airflow chamber.

[0032] In some examples, the open sided airflow chamber has an open lower end.

[0033] In some examples, the open sided airflow chamber has an upper nozzle wall that comprises at least a portion of the lower wall of the cyclone unit.

[0034] In some examples, the cyclone inlet is in communication with an enclosed passage extending from an opening in the upper nozzle wall.

[0035] In some examples, the open sided airflow chamber further comprises a depending wall extending downwardly from the upper nozzle wall.

[0036] In some examples, the depending wall is generally U-shaped.

[0037] In some examples, the hand surface cleaning apparatus has a front and the open sided airflow chamber extends to the front of the hand surface cleaning apparatus and the dirty air inlet is at the front of the hand surface cleaning apparatus.

[0038] In some examples, the cyclone inlet faces a surface to be cleaned.

[0039] In some examples, the open sided airflow chamber comprises an upper wall. A depending wall may extend downwardly from the upper wall. The depending wall may have a lower end that is positioned above the lower end of the wheels. The upper wall and the depending wall may define an airflow chamber having an open lower end. The opening may be provided in a rear half of the upper wall of the air flow chamber forwardly of a rear portion of the depending wall and inwardly of side portions of the depending wall.

[0040] It will be appreciated that a hand surface cleaning apparatus may incorporate one or more of the features of each of these examples and that each of these is within the scope of the invention, including the openable front door, the removable screen, the door being at the front of the hand surface cleaning apparatus, the open sided nozzle.

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] In the detailed description, reference will be made to the following drawings, in which:

[0042] FIG. 1 is a side plan view of an example of a hand vacuum cleaner;

[0043] FIG. 2 is a top plan view of the hand vacuum cleaner of FIG. 1;

[0044] FIG. 3 is a front plan view of the hand vacuum cleaner of FIG. 1;

[0045] FIG. 4 is a partially exploded rear perspective view of the hand vacuum cleaner of FIG. 1;

[0046] FIG. 5 is a partially exploded front perspective view of the hand vacuum cleaner of FIG. 1;

[0047] FIG. 6 is a cross section taken along line 6-6 in FIG. 2; and

[0048] FIG. 7A is a bottom perspective view of the hand vacuum cleaner of FIG. 1;

[0049] FIG. 7B is a rear perspective view of the hand vacuum cleaner of FIG. 1, showing the cyclone unit removed from the hand vacuum cleaner; and,

[0050] FIG. 8 is a cross section showing an alternate example of a hand vacuum cleaner.

DESCRIPTION OF VARIOUS EXAMPLES

[0051] Various apparatuses or methods will be described below to provide an example of each claimed invention. No example described below limits any claimed invention and any claimed invention may cover processes or apparatuses that are not described below. The claimed inventions are not limited to apparatuses or processes having all of the features of any one apparatus or process described below or to features common to multiple or all of the apparatuses described below.

[0052] In the drawings attached hereto, the surface cleaning apparatus is exemplified as used in a hand vacuum cleaner that uses a single cyclone axially aligned with a longitudinal axis of the hand vacuum cleaner. It will be appreciated that the vacuum cleaner 100 may be of various configurations (e.g., different positioning and orientation of the cyclone unit and the suction motor and differing cyclone units that may comprise one or more cyclones and one or more filters) and different types of surface cleaning apparatus, such as a wet/dry hand held surface cleaning apparatus.

[0053] Referring to FIGS. 1 to 7B, a first example of a vacuum cleaner 100 is shown. The vacuum cleaner 100 is a hand vacuum cleaner, and is movable along a surface to be cleaned by gripping and maneuvering handle 102. The vacuum cleaner includes an upper portion 104, a lower portion 106, a front 108, and a rear 110. In the example shown, handle 102 is provided at the upper portion 104. In alternate examples, handle 102 may be provided elsewhere on the vacuum cleaner 100, for example at the rear 110 and may be of any design.

[0054] In the example shown, the vacuum cleaner 100 comprises a nozzle 112 and a cyclone unit 114, which, in one embodiment, together form a surface cleaning head 116 of the vacuum cleaner 100. In the example shown, the surface cleaning head 116 is preferably provided at the front 108 of the vacuum cleaner 100.

[0055] Nozzle 112 engages a surface to be cleaned, and comprises a dirty air inlet 118, through which dirty air is drawn into the vacuum cleaner 100. An airflow passage extends from the dirty air inlet 118 to a clean air outlet 120

of the cleaner 100. In the example shown, clean air outlet 120 is preferably at the rear 110 of the cleaner 100.

[0056] Cyclone unit 114 is provided in the airflow passage, downstream of the dirty air inlet 118. In the example shown, the cyclone unit 114 is a one piece assembly comprising one cyclone 122, and one dirt collection chamber 124, which are preferably integrally formed. In alternate examples, the cyclone unit 110 may include more than one cyclonic stage, wherein each cyclonic stage comprising one or more cyclones and one or more dirt chambers. Accordingly, the cyclones may be arranged in parallel and/or in sequence. Further, in alternate examples, the cyclone 122 and dirt collection chamber 124 may be separately formed.

[0057] In the example shown, the nozzle 112 is positioned at the lower portion 106 of the vacuum cleaner 100. Preferably, as exemplified, nozzle 112 is positioned at the bottom of the vacuum cleaner 100, and, preferably, beneath the cyclone unit 114. Further, as exemplified, the nozzle 112 may be integral formed as part of cyclone unit 114 or may be a one-piece assembly therewith (e.g., separately manufactured but assembled together such as by an adhesive or welding to form a single component). Alternately, or in addition, it will be appreciated that nozzle 112 may be connected to the cyclone unit or dirt collection chamber at alternate locations.

[0058] Preferably, as exemplified, nozzle 112 may be on lower surface 157 of cyclone unit 114 and may share a wall with the cyclone unit 114. For example, in a particularly preferred design, the upper wall of the nozzle may be a lower wall of the cyclone unit 114. As shown in FIG. 6, dirt chamber 124 surrounds the lower portion of cyclone 122. Accordingly, the upper wall of nozzle 112 may be part of the lower wall of the dirt chamber. It will be appreciated that if dirt chamber 124 does not extend around the lower portion of cyclone 122, then the upper wall of nozzle 112 may be part of a lower wall of cyclone 122. In alternate embodiments, nozzle 112 and cyclone 122 or dirt chamber 124 need not have a common wall.

[0059] Preferably, in the example shown, the nozzle 112 is fixedly positioned at the lower portion 106 of the vacuum cleaner 100. That is, the nozzle 112 is not movable (e.g., rotatable) with respect to the remainder of the vacuum cleaner 100, and is fixed at the lower portion 106 of the vacuum cleaner 100.

[0060] As shown in FIGS. 3 and 5, nozzle 112 has a width W_N , and cyclone unit 114 has a width W_C . In the example shown, W_N and W_C are about the same. An advantage of this design is that the nozzle 112 may have a cleaning path that is essentially as wide as the hand vacuum itself.

[0061] Preferably, nozzle 112 comprises an airflow chamber 136 wherein at least a portion, and preferably a majority, of the lower surface of the chamber is open (i.e. nozzle 112 is preferably an open sided passage). Such a design is exemplified in FIG. 7A wherein nozzle 112 comprises an upper nozzle wall 126. . . . In the example shown, the upper nozzle wall 126 comprises a portion 119 of a wall 115 of the cyclone unit. Accordingly, nozzle 112 is integral with cyclone unit 114.

[0062] An alternate design as exemplified by FIG. 8, nozzle 812 comprises a lower wall 837, which closes lower end 834. Accordingly, nozzle 112 may be of various designs and may be an open sided passage or a closed passage. In either embodiment, it will be appreciated that nozzle 112 may be mounted or provided on cyclone unit 114 and as

exemplified on a lower portion of the dirt collection chamber so as to be removable with the dirt collection chamber.

[0063] Preferably, if nozzle 112 is an open sided passage, one or more depending walls 128 extend downwardly from the upper nozzle wall 126. The depending wall is preferably generally U-shaped. In one embodiment, a depending wall is provided rearward of opening 138. In other embodiments, depending walls may alternately or in addition be provided on the lateral sides of opening 138. It is preferred that depending walls are provided on each lateral side of opening 138 and rearward thereof. Further, depending walls 128 may extend a substantial distance to the front end 108 and, preferably, essentially all the way to front end 108. The depending walls may be continuous to define a single wall as shown, or may be discontinuous. The depending walls are preferably rigid (e.g., integrally molded with cyclone unit 114). However, they may be flexible (e.g., bristles or rubber) or moveably mounted to cyclone unit 114 (e.g., hingedly mounted).

[0064] Preferably, the lower end 132 of depending wall 128 is spaced above the surface being cleaned when the hand vacuum cleaner is placed on a surface to be cleaned. As exemplified in FIG. 6, when vacuum cleaner 100 is placed on a floor F, lower end 132 of depending wall 128 is spaced a distance H above the floor. Preferably distance H is from 0.01 to 0.175 inches, more preferably from 0.04 to 0.08 inches.

[0065] The height of the depending wall (between upper nozzle wall 126 and lower end 132) may vary. In some examples, the depending wall may have a height of between about 0.05 and about 0.875 inches preferably between about 0.125 and about 0.6 inches and more preferably between about 0.2 and about 0.4 inches. The height of depending wall may vary but is preferably constant.

[0066] As exemplified, the open end of the U-shape defines an open side 130 of the nozzle 114, and forms the dirty air inlet 118 of the cleaner 100. In the example shown, the open side 130 is provided at the front of the nozzle 114. In use, when optional wheels 135 are in contact with a surface, the open side 130 sits above and is adjacent a surface to be cleaned (e.g. floor F).

[0067] In the example shown, the lower end 132 of the depending wall 128 defines an open lower end 134 of the nozzle 114. The open lower end 134 preferably extends to the front 108 of the cleaner 100, and merges with the open side 130. In use, the exemplified nozzle has an open lower end 134 that faces a surface to be cleaned.

[0068] In the example shown, a plurality of wheels 135 are mounted to the depending wall 128. It will be appreciated that wheels 135 are optional. Preferably, wheels 135 are positioned exterior to the airflow path through nozzle 112, e.g., laterally outwardly from depending wall 128. Preferably a pair of front wheels 135 is provided. Preferably, the wheels are located adjacent front 108. Optionally, one or more rear wheels 180 may be provided. In an alternate embodiment, no wheels may be provided. If wheels are provided, then preferably the wheels 135, and more specifically the lower end 194 of the wheels 135, extend lower than the lower end 132 of the depending wall 128. That is, the lower end 132 of the depending wall 128 is positioned above the lower end 194 of the wheels 135. Accordingly, in use, when wheels 135 are in contact with a surface, the lower end 132 of the depending wall 128 is spaced from a surface to be cleaned. Accordingly, some air may enter nozzle 114 by

passing underneath depending wall 132. In such a case, the primary air entry to nozzle 114 is via open side 130 so that dirty air inlet 118 is the primary air inlet, and the space between the lower end of the depending wall 128 and the surface to be cleaned form a secondary dirty air inlet to the cleaner 100 (i.e. the secondary air inlet is under depending wall 128).

[0069] The upper nozzle wall 126, depending wall 128, and open lower end 134 of the nozzle 112 define the open sided airflow chamber 136 of the nozzle. In the example shown, the open sided airflow chamber 136 extends to the front 108 of the cleaner 100. In use, when wheels 135 are in contact with a horizontal surface, the nozzle 112 and the airflow chamber 136 extend generally horizontally, and preferably linearly along a nozzle axis 113 (see FIG. 7A).

[0070] If an open sided nozzle 112 is used, then an opening 138 may be provided in the upper nozzle wall 126, in communication with the airflow chamber 136. Opening 138 may be of any size and configuration and at various locations in upper nozzle wall 126. Preferably, opening 138 is positioned in the rear half of upper nozzle wall 126, forwardly of a rear portion 129 of depending wall 128. In use, when wheels 135 are in contact with a surface, the opening 138 faces a surface to be cleaned, air enters the dirty air inlet 118, passes horizontally through the airflow chamber 136, and passes into the opening 138. Opening 138 is in communication with a cyclone inlet passage 139, which is enclosed, and which is in communication with a cyclone air inlet 140 of cyclone 122. In use, when wheels 135 are in contact with a surface, cyclone air inlet 140 faces a surface to be cleaned. Accordingly, the nozzle 112 is connected in airflow communication with the cyclone 112 at the lower portion 106 of the cleaner 100.

[0071] Cyclone 122 may be of any configuration and orientation. Preferably, cyclone 122 comprises a chamber wall 142, which in the example shown, is cylindrical. The cyclone chamber is located inside chamber wall 142. The cyclone 122 extends along an axis 123, which, in the example shown, is preferably parallel to the nozzle axis, and preferably extends generally horizontally when cleaner 100 is in use and wheels 135 are seated on a surface. Cyclone 122 has a front end 196, which is towards, and preferably at the front end 108 of the hand vacuum cleaner and a rear end 198. The cyclone 122 has an air inlet 140 and an air outlet 145 which, preferably are at the same end of cyclone 122 and a dirt outlet is preferably provided at the opposite end. Preferably the air inlet and the air outlet are distal to front end 108 and a dirt outlet is proximate the front end 108. The cyclone air inlet and cyclone air outlet may be of any configuration known in the art and the cyclone air outlet may be covered by a screen or shroud or filter as is known in the art.

[0072] As exemplified, the cyclone air inlet 140 is defined by an aperture in the chamber wall 142. As can be seen in FIG. 5, the inlet passage 139 is configured such that air enters the cyclone 122 in a tangential flow path, e.g., passage 139 may be arcuate. The air travels in a cyclonic path in the cyclone, and dirt in the air is separated from the air. The air exits the cyclone via an outlet passage 144, through outlet 145. Outlet 145 is defined in a rear wall 179 of the cyclone unit 114.

[0073] As exemplified in FIG. 6, a plate 174 may be provided adjacent outlet passage 144, spaced from and facing the inlet 176 to outlet passage 144. Plate 174 may be

mounted to cyclone 122 via legs 178. In the example shown, plate 174, and legs 178 form an assembly 182 that is removably mounted in cyclone 122. In some examples, a screen may be mounted around legs 178.

[0074] The dirt that is separated from the air exits the cyclone via dirt outlet 146, and enters dirt collection chamber 124. Dirt collection chamber 124 may be any dirt collection chamber. Preferably, as exemplified, dirt outlet is at the front 196 of the cyclone 122, and further, is at the front end 108 of the cleaner 100. The dirt collection chamber may be internal or external to the cyclone chamber. Preferably, as exemplified, the dirt collection chamber is external. The dirt collection chamber may be in communication with the cyclone chamber by any means known in the art. Accordingly, one or more dirt outlets may be provided. Preferably, the dirt outlet is at the end opposed to the air inlet and, preferably, the dirt outlet is at the front end 108. Preferably, the dirt outlet is at the end opposed to the air inlet and, preferably, the dirt outlet is at the front end 108.

[0075] In the example shown, dirt collection chamber 124 preferably comprises two portions. A first portion 148 is provided immediately adjacent the dirt outlet 146, and is at the front 108 of the cleaner 100. A second portion 150 is concentric with the cyclone 122. A lower portion 152 of the second portion 150 is below the cyclone. As exemplified, nozzle 112 is positioned below first portion 148, and lower portion 152. Accordingly, dirt chamber 124 may comprise an annular chamber surrounding the cyclone 122.

[0076] A separation plate 154 may be provided in the dirt collection chamber 124, adjacent the dirt outlet 146, and in facing relation to the dirt outlet. The separation plate 154 aids in preventing dirt in dirt collection chamber 124 from re-entering cyclone 122. Preferably, plate 154 is spaced from dirt outlet 146 and faces dirt outlet 146. Plate 154 may be mounted by any means to any component in cyclone unit 114. As exemplified, the separation plate is mounted on an arm 156, which extends from a front wall 158 at the front 108 of the cleaner 100.

[0077] Cyclone unit 114 may be emptied by any means known in the art. For example, one of the ends of the cyclone unit 114 may be openable. For example, one of the ends of the cyclone unit 114 may be openable. In an embodiment, an openable door may be positioned at the front end of the vacuum cleaner and preferably comprises a front wall thereof. The door may be opened while the cyclone unit or the dirt collection chamber 124 is mounted to the vacuum cleaner. Alternately, or in addition, the door may be opened when the cyclone unit or the dirt collection chamber 124 has been removed from the vacuum cleaner. The door may be openably mounted to the cyclone unit, dirt collection chamber 124 or another portion of vacuum cleaner 100 by any means known in the art. For example, one or more latches 159 may secure the door in position. Alternately, the door may be opened, e.g., pivoted open, and then optionally removable. It will be appreciated that, in an embodiment wherein cyclone unit 114 is not removed as a sealed unit, dirt collection chamber 124 may be removed with nozzle 112.

[0078] As exemplified in FIGS. 4 and 5, front wall 158 is pivotally mounted to the cyclone unit wall 115 and serves as an openable door of the dirt chamber 124, such that dirt collection chamber 124 is openable, and dirt collection chamber 124 may be emptied. The dirt collection chamber is therefore preferably openable both, when the dirt collection chamber is mounted to the hand vacuum cleaner, or

when it is removed, as will be described hereinbelow. When front wall 158 is pivoted away from the remainder of the cyclone unit 114, separation plate 154 and arm 156 also pivot away from the remainder of the cyclone unit. A latch 159 is provided, which secures front wall 158 to wall 115. In alternate examples, front wall 158 may be removable from cyclone unit wall 115, or the rear wall 179 of the cyclone unit 114 may be openable.

[0079] The rear portion of the dirt collection chamber 124 may be closed by wall 179.

[0080] The clean air exiting cyclone 122 passes through outlet 145 of outlet passage 144, exits surface cleaning head 116, and passes into the cleaner body 160. In the example shown, the cleaner body 160 is positioned rearward of the surface cleaning head 116. The cleaner body comprises a suction motor housing 168, which houses a suction motor 164 and may also house an optional pre-motor filter 162 and/or an optional post-motor filter 166.

[0081] In the example shown, suction motor housing 168 further houses a pre-motor filter 162. Preferably, as shown in the exemplified embodiments, the vacuum cleaner has a linear configuration. Accordingly, pre-motor filter 162 is provided in the airflow path adjacent and downstream of the outlet passage 144, and facing the outlet 145. Pre-motor filter 162 serves to remove remaining particulate matter from air exiting the cyclone 122, and may be any type of filter, such as a foam filter. One or more filters may be used. If the vacuum cleaner is of a non-linear configuration, then pre-motor filter 162 need not be located adjacent outlet passage 144.

[0082] Suction motor 164 is provided in the airflow path preferably adjacent and downstream of the pre-motor filter 162. The suction motor 164 may be any type of suction motor. The suction motor draws air into the dirty air inlet 118 of the cleaner 100, through the airflow path past the suction motor 164, and out of the clean air outlet 120. The suction motor 164 has a motor axis 165. In the example shown, the motor axis 165 and the cyclone axis 123 preferably extend in the same direction and are preferably generally parallel. In the exemplified embodiments, the vacuum cleaner has a linear configuration. If the vacuum cleaner is of a non-linear configuration, then motor 164 need not be located adjacent pre-motor filter 162.

[0083] The cleaner body 160 preferably further comprises a post-motor filter housing 170. A post motor filter 166 is provided in the post-motor filter housing 170. The post motor filter 166 is provided in the airflow path downstream of, and preferably adjacent, the suction motor 164. Post motor filter 166 serves to remove remaining particulate matter from air exiting the cleaner 100. Post-motor filter 166 may be any type of filter, such as a HEPA filter. If the vacuum cleaner is of a non-linear configuration, then post motor filter 166 need not be located adjacent suction motor 164.

[0084] Clean air outlet 120 is provided downstream of post-motor filter 166. Clean air outlet 120 may comprise a plurality of apertures formed in housing 170.

[0085] As exemplified in FIG. 7B, in one aspect of this invention, the dirt collection chamber 124 is removable from the hand vacuum cleaner 100 as a sealed unit for emptying. It will be appreciated that this aspect may be used by itself or in any particular combination or sub-combination of any one or more of the features set out herein.

[0086] In accordance with another aspect of the invention, when cyclone unit **114** is removed from the cleaner **100**, nozzle **112** is also removed from the cleaner **100**. It will be appreciated that this aspect may be used by itself or in any particular combination or sub-combination of any one or more of the features set out herein. In one particular embodiment, both aspects may be used.

[0087] For example, in the example shown, the dirt collection chamber **124** is integrally formed with cyclone wall **142**, and with nozzle **112**, and the cyclone unit **114** comprises the dirt collection chamber **124**. Accordingly, the cyclone unit **114** is removable from the hand vacuum cleaner. As the cyclone unit **114** is integral with nozzle **112** and airflow chamber **136**, nozzle **112** and airflow chamber **136** are removable from the cleaner **100** with cyclone unit **114**.

[0088] In other embodiments, one or more of these components may be separately manufactured and then assembled together (e.g., by an adhesive, mechanical means such as screws or welding, to form a one-piece assembly.

[0089] It will be appreciated that if dirt chamber **124** is removably mounted to cyclone unit **114**, then nozzle **112** is removable together with dirt chamber **124** from vacuum cleaner **100**. It will be appreciated that this aspect may be used by itself or in any particular combination or sub-combination of any one or more of the features set out herein.

[0090] In other embodiments, the dirt collection chamber **124** may be removable from the hand vacuum cleaner **100** alone, without the cyclone unit **114** or the nozzle **112**.

[0091] As can be seen in FIG. 7B, when the cyclone unit **114** is removed from the hand vacuum cleaner, and particularly from motor housing **168**, it is sealed, except for the fluid flow passages leading to and from the first cyclone unit (i.e. opening **138** and outlet **145**). That is, wall **179** seals the air outlet end of cyclone unit **114** and front wall **158** seals the front end of the cyclone unit **114**. In order to empty the dirt collection chamber **124**, the front wall **158** or the rear wall **179** may be opened, and the dirt may be emptied from dirt chamber **124**.

[0092] As exemplified, in order to remove cyclone unit **114** from the surface cleaning apparatus, the cyclone unit comprises a first mounting member **173**, and the suction motor housing **168** has a second mounting member **175**. The first **173** and second **175** mounting members are releasably engageable with each other. In the example shown, the first **173** and second **175** mounting members comprise a bayonet mount. In alternate examples, the first and second mounting members may be another type of mounting member, such as mating screw threads, magnets, mechanical fasteners such as screws or any other type of mounting members. It will be appreciated that if dirt collection chamber **124** is removably mounted to cyclone unit **114**, then any such removable securing mechanism may be used.

[0093] Removing the cyclone unit **114** from the hand vacuum cleaner may be advantageous, because it may allow a user to wash the cyclone unit **114**, for example using water, without risking wetting and shorting the suction motor **164**.

[0094] One or more additional wheels **180** may be mounted to housing **161**, preferably at lower portion **106**, and may be used in conjunction with wheels **135**. Preferably, a single rear wheel **180** is provided. Preferably, rear wheel **180** is located on a centre line of the vacuum cleaner and rearward of the depending wall **128**.

[0095] Referring now to FIG. 8, in which like numerals refer to like features, with the first digit incremented to **8** to refer to the figure number, an alternate example of a hand vacuum cleaner **800** is shown. As discussed previously, nozzle **812** comprises a lower wall **837**, which closes lower end **834**. Accordingly, in contrast to cleaner **100**, nozzle **812** comprises an enclosed airflow passage **836**. Further, in this example, front wall **858** is not pivotally mounted to wall **815**. Rather, wall surface cleaning head **816** is pivotally mounted to body **860**.

[0096] Cleaner **800** may further comprise a second optional cyclone unit **851** downstream of the first cyclone unit **814**, between first cyclone unit **814** and pre-motor filter **862**. In the example shown, the second cyclone unit **851** comprises a plurality of cyclones in parallel. Each of the plurality of cyclones is parallel to the first cyclone axis **823**.

1. A hand vacuum cleaner having an upper side and a lower side, the hand vacuum cleaner comprising:

- (a) an air flow passage extending from a dirty air inlet to a clear air outlet;
- (b) a main body comprising a front end, a rear end, a handle and a motor housing containing a suction motor positioned in the air flow passage, the suction motor having a suction motor axis extending in a longitudinal direction; and,
- (c) an air treatment unit positioned in the air flow passage upstream from and forward of the suction motor and comprising an air treatment chamber having a longitudinally extending sidewall, which extends from an air treatment unit rear end to an air treatment unit front end, the front end of the sidewall defining an opening that is closeable by an openable door, the opening having a cross sectional area comparable to a cross sectional area of the door, and the opening extends in a direction that is inclined relative to the longitudinal direction of the sidewall,

wherein the openable door has a rotatably mounted end and an opposed securable end that is securable to the air treatment unit by a lock, and

wherein the opposed securable end is rotatable to an open position in which the opposed securable end is positioned forward of the opening.

2. The hand vacuum cleaner of claim 1 wherein the securable end is securable to the air treatment unit at the opening.

3. The hand vacuum cleaner of claim 2 wherein the securable end is securable to the sidewall at the opening.

4. The hand vacuum cleaner of claim 3 wherein when the door is closed, the hand vacuum cleaner is oriented such that the suction motor axis is horizontal and the upper side is above the lower side, the securable end of the door is located rearwardly of the rotatably mounted end of the door.

5. The hand vacuum cleaner of claim 1 wherein when the hand vacuum cleaner is oriented such that the suction motor axis is horizontal and the upper side is above the lower side, an upper portion of the opening is offset from a lower portion of the opening in the longitudinal direction.

6. The hand vacuum cleaner of claim 1 further comprising a handle and the lock is provided on a common side of the hand vacuum cleaner as the handle.

7. The hand vacuum cleaner of claim 1 wherein the securable end is securable to the sidewall at the opening.

8. The hand vacuum cleaner of claim 7 wherein when the door is closed, the hand vacuum cleaner is oriented such that

the suction motor axis is horizontal and the upper side is above the lower side, the securable end of the door is located rearwardly of the rotatably mounted end of the door.

9. A hand vacuum cleaner having an upper side and a lower side, the hand vacuum cleaner comprising:

- (a) an air flow passage extending from a dirty air inlet to a clear air outlet;
- (b) a main body comprising a front end, a rear end, a handle and a motor housing containing a suction motor positioned in the air flow passage, the suction motor having a suction motor axis extending in a longitudinal direction;
- (c) an air treatment unit positioned in the air flow passage upstream from and forward of the suction motor and comprising an air treatment chamber having a longitudinally extending sidewall, which extends from an air treatment unit rear end to an air treatment unit front end, the front end of the sidewall defining an opening that is closeable by an openable door, and the opening extends in a direction that is inclined relative to the longitudinal direction of the sidewall; and,
- (d) a handle operable during use of the hand vacuum cleaner to direct the hand vacuum cleaner to clean a surface,

wherein the openable door has a rotatably mounted end and an opposed securable end that is securable to the air treatment unit by a lock, and

wherein the lock is provided on a common side of the hand vacuum cleaner as the handle, and

wherein the opposed securable end is rotatable to an open position in which the opposed securable end is positioned forward of the opening.

10. The hand vacuum cleaner of claim 9 wherein the securable end is securable to the air treatment unit at the opening.

11. The hand vacuum cleaner of claim 10 wherein the securable end is securable to the sidewall at the opening.

12. The hand vacuum cleaner of claim 11 wherein when the door is closed, the hand vacuum cleaner is oriented such that the suction motor axis is horizontal and the upper side is above the lower side, the securable end of the door is located rearwardly of the rotatably mounted end of the door.

13. The hand vacuum cleaner of claim 9 wherein when the hand vacuum cleaner is oriented such that the suction motor axis is horizontal and the upper side is above the lower side, an upper portion of the opening is offset from a lower portion of the opening in the longitudinal direction.

14. The hand vacuum cleaner of claim 10 wherein the opening has a cross-sectional area comparable to a cross-sectional area of the door.

15. The hand vacuum cleaner of claim 11 wherein the opening has a cross-sectional area comparable to a cross-sectional area of the door.

16. The hand vacuum cleaner of claim 12 wherein the opening has a cross-sectional area comparable to a cross-sectional area of the door.

17. The hand vacuum cleaner of claim 7 wherein when the door is closed, the hand vacuum cleaner is oriented such that the suction motor axis is horizontal and the upper side is above the lower side, the securable end of the door is located rearwardly of the rotatably mounted end of the door.

18. The hand vacuum cleaner of claim 17 wherein the opening has a cross-sectional area comparable to a cross-sectional area of the door.

* * * * *