



US012393153B2

(12) **United States Patent**
Hayashida et al.

(10) **Patent No.:** **US 12,393,153 B2**
(45) **Date of Patent:** **Aug. 19, 2025**

(54) **TONER CONTAINER**

(71) Applicant: **CANON KABUSHIKI KAISHA**,
Tokyo (JP)

(72) Inventors: **Makoto Hayashida**, Shizuoka (JP);
Yuuki Nakamura, Shizuoka (JP); **Go**
Torii, Kanagawa (JP); **Takayuki Yada**,
Shizuoka (JP)

(73) Assignee: **Canon Kabushiki Kaisha**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 118 days.

(21) Appl. No.: **18/204,420**

(22) Filed: **Jun. 1, 2023**

(65) **Prior Publication Data**

US 2023/0418208 A1 Dec. 28, 2023

(30) **Foreign Application Priority Data**

Jun. 24, 2022 (JP) 2022-102266

(51) **Int. Cl.**

G03G 21/10 (2006.01)

G03G 15/01 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **G03G 21/105** (2013.01); **G03G 15/0121**
(2013.01); **G03G 15/0822** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC G03G 15/0822; G03G 15/0844; G03G
15/0865; G03G 15/0867; G03G 15/0872;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

11,061,366 B2 7/2021 Uesugi
11,487,221 B2* 11/2022 Okino G03G 15/0877
(Continued)

FOREIGN PATENT DOCUMENTS

JP H05-107918 A 4/1993
JP 2008-158348 A 7/2008

(Continued)

OTHER PUBLICATIONS

Feb. 19, 2024 Extended Search Report in European Patent Appli-
cation Pub. No. 23 174 487.1.

(Continued)

Primary Examiner — Joseph S Wong


(74) *Attorney, Agent, or Firm* — Venable LLP

(57)

ABSTRACT

A toner container includes a first chamber for accommodat-
ing toner and provided with an outlet port through which the
toner is discharged outside of the toner container, a second
chamber provided with an inlet port and for accommodating
toner to be received from an outside of the toner container
through the inlet port, a stirring member for stirring the toner
accommodated in the first chamber and to rotate about a
rotational axis, and an air supply unit configured to supply
air for discharging the toner accommodated in the first
chamber to an outside of the toner container through the
outlet port. The air supply unit, the first chamber, and the
second chamber are aligned in this order in a direction of the
rotational axis.

21 Claims, 23 Drawing Sheets

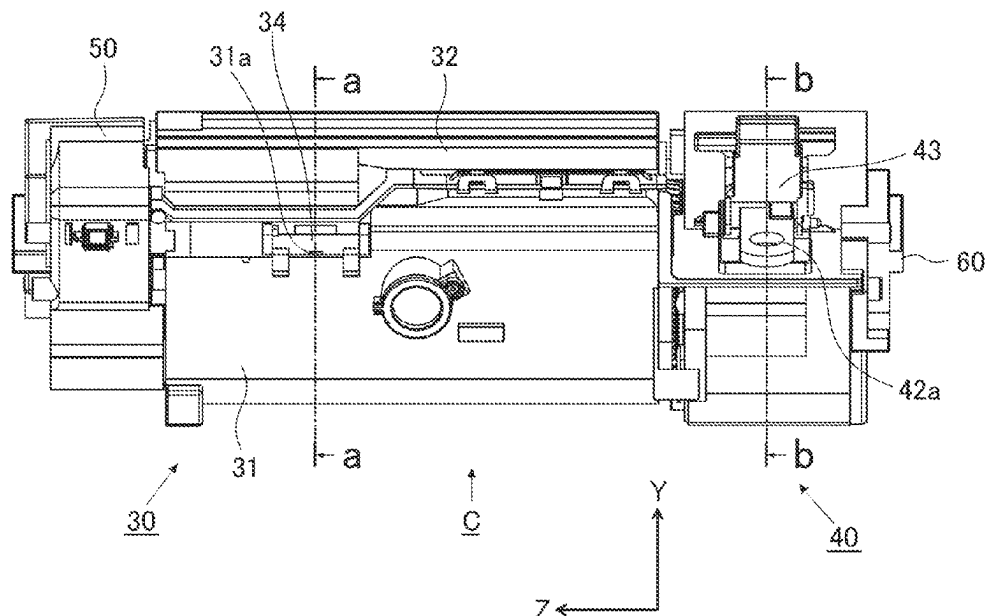

- (51) **Int. Cl.**
G03G 15/08 (2006.01)
G03G 21/00 (2006.01)
G03G 21/12 (2006.01)
G03G 21/18 (2006.01)
G03G 21/20 (2006.01)
- (52) **U.S. Cl.**
CPC **G03G 15/0844** (2013.01); **G03G 15/0865**
(2013.01); **G03G 15/0867** (2013.01); **G03G**
15/0872 (2013.01); **G03G 15/0877** (2013.01);
G03G 15/0891 (2013.01); **G03G 15/0896**
(2013.01); **G03G 21/0052** (2013.01); **G03G**
21/10 (2013.01); **G03G 21/12** (2013.01);
G03G 21/1803 (2013.01); **G03G 21/1814**
(2013.01); **G03G 21/1817** (2013.01); **G03G**
21/20 (2013.01); **G03G 21/206** (2013.01)
- (58) **Field of Classification Search**
CPC G03G 15/0877; G03G 15/0891; G03G
15/0896; G03G 15/0121; G03G 21/0052;
G03G 21/10; G03G 21/105; G03G 21/12;
G03G 21/1803; G03G 21/1814; G03G
21/1817; G03G 21/20; G03G 21/206
See application file for complete search history.
- (56) **References Cited**
U.S. PATENT DOCUMENTS
- 2008/0152379 A1 6/2008 Saiki et al.
2008/0292331 A1 11/2008 Yokomori
2009/0245851 A1 10/2009 Hoshi
2010/0054796 A1 3/2010 Nakamura
2010/0054799 A1 3/2010 Nakamura
2010/0054804 A1 3/2010 Uneme
2011/0076056 A1 3/2011 Sato
2011/0103830 A1 5/2011 Nakamura
2011/0170903 A1 7/2011 Hoshi
2012/0183328 A1 7/2012 Nakamura
2012/0315062 A1 12/2012 Uneme
2013/0129377 A1 5/2013 Satomura
2013/0142541 A1 6/2013 Hayashida
2013/0209134 A1* 8/2013 Okino G03G 15/0877
399/258
- 2014/0064776 A1 3/2014 Yamasaki
2014/0140723 A1 5/2014 Hoshi
2014/0212181 A1 7/2014 Nakamura
- 2014/0376968 A1* 12/2014 Yamamoto G03G 15/0867
399/258
- 2015/0010320 A1 1/2015 Komatsu
2015/0234325 A1 8/2015 Satomura
2015/0355576 A1 12/2015 Yamasaki
2016/0070207 A1 3/2016 Yada
2016/0252877 A1 9/2016 Nakamura
2017/0003645 A1 1/2017 Kawakami
2017/0205764 A1 7/2017 Torii
2017/0248909 A1 8/2017 Nakamura
2017/0351214 A1 12/2017 Uesugi
2018/0039226 A1 2/2018 Takeuchi
2019/0204779 A1 7/2019 Takeuchi
2020/0033791 A1 1/2020 Uesugi
2020/0033792 A1 1/2020 Uesugi
2020/0033793 A1 1/2020 Uesugi
2020/0033794 A1 1/2020 Uesugi
2020/0033795 A1 1/2020 Uesugi
2020/0033796 A1 1/2020 Uesugi
2020/0033797 A1 1/2020 Uesugi
2020/0033798 A1 1/2020 Uesugi
2020/0033799 A1 1/2020 Uesugi
2020/0041954 A1 2/2020 Uesugi
2020/0073323 A1 3/2020 Uesugi
2020/0073324 A1 3/2020 Uesugi
2020/0174422 A1 6/2020 Takeuchi
2020/0272087 A1 8/2020 Sueshige
2020/0272088 A1 8/2020 Sueshige
2020/0348616 A1 11/2020 Murakami et al.
2021/0137460 A1 5/2021 Kohler et al.
2021/0216034 A1 7/2021 Sueshige
2022/0066385 A1 3/2022 Uesugi
2022/0283535 A1 9/2022 Sueshige
2023/0032591 A1 2/2023 Murakami
- FOREIGN PATENT DOCUMENTS
- JP 2011-075887 A 4/2011
JP 2018-189813 A 11/2018
JP 2021-189269 A 12/2021
- OTHER PUBLICATIONS
- Co-pending U.S. Appl. No. 18/207,736, filed Jun. 9, 2023.
Co-pending U.S. Appl. No. 18/208,405, filed Jun. 12, 2023.
Co-pending U.S. Appl. No. 18/210,147, filed Jun. 15, 2023.
Co-pending U.S. Appl. No. 18/210,152, filed Jun. 15, 2023.
Co-pending U.S. Appl. No. 18/213,383, filed Jun. 23, 2023.
Co-pending U.S. Appl. No. 18/229,722, filed Aug. 3, 2023.
- * cited by examiner

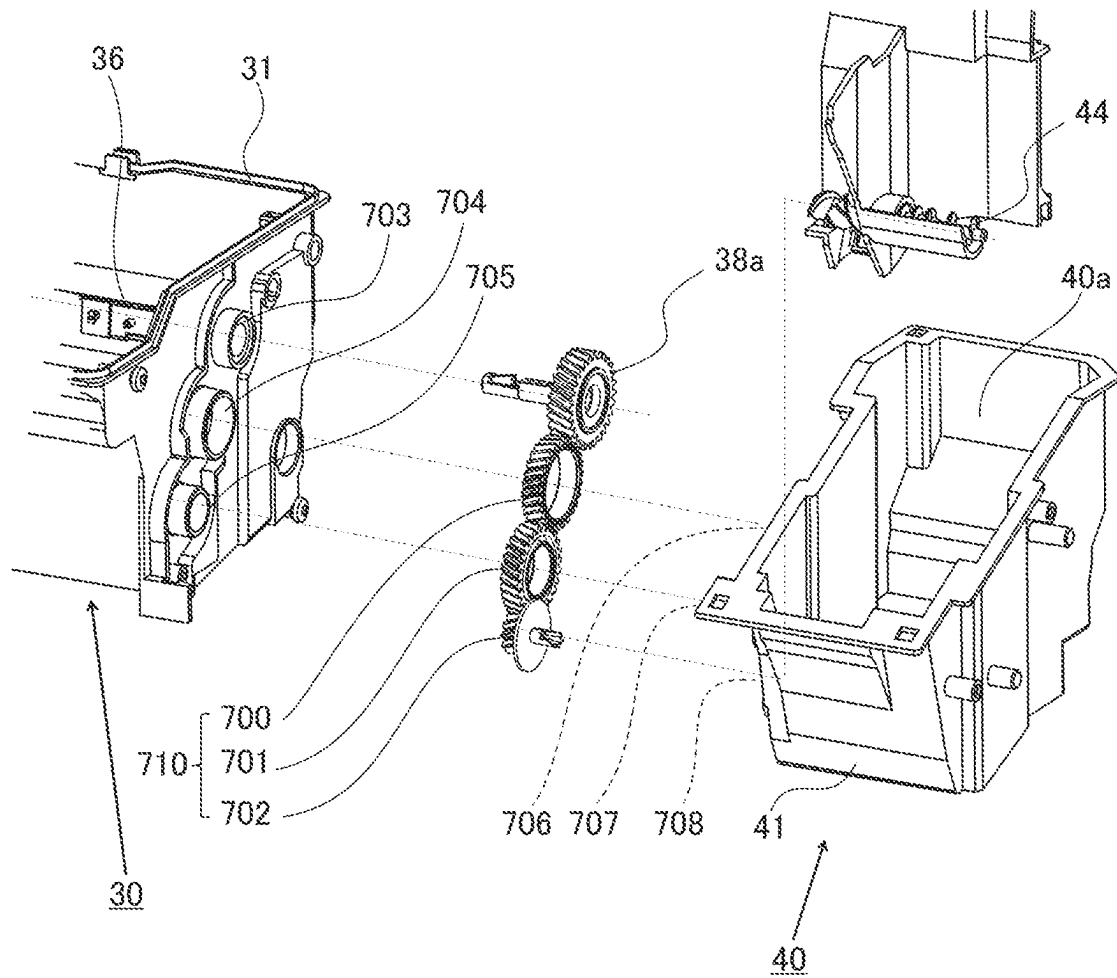


FIG. 1

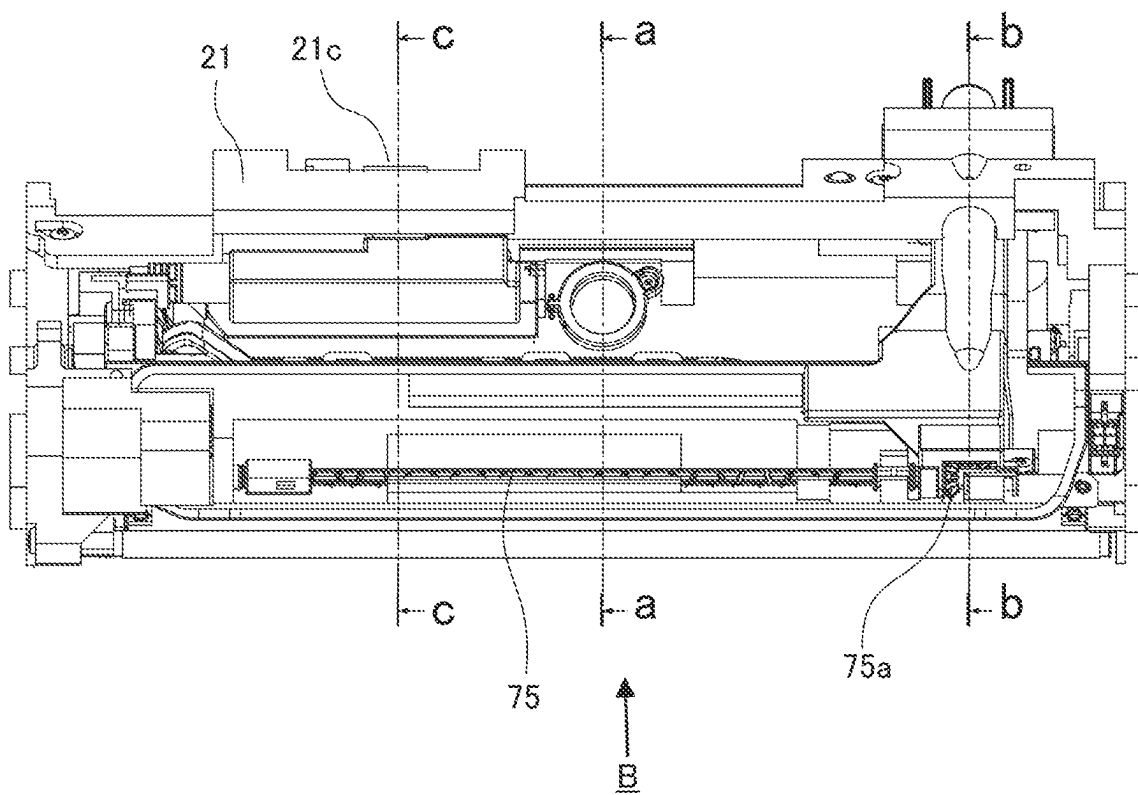


FIG. 2

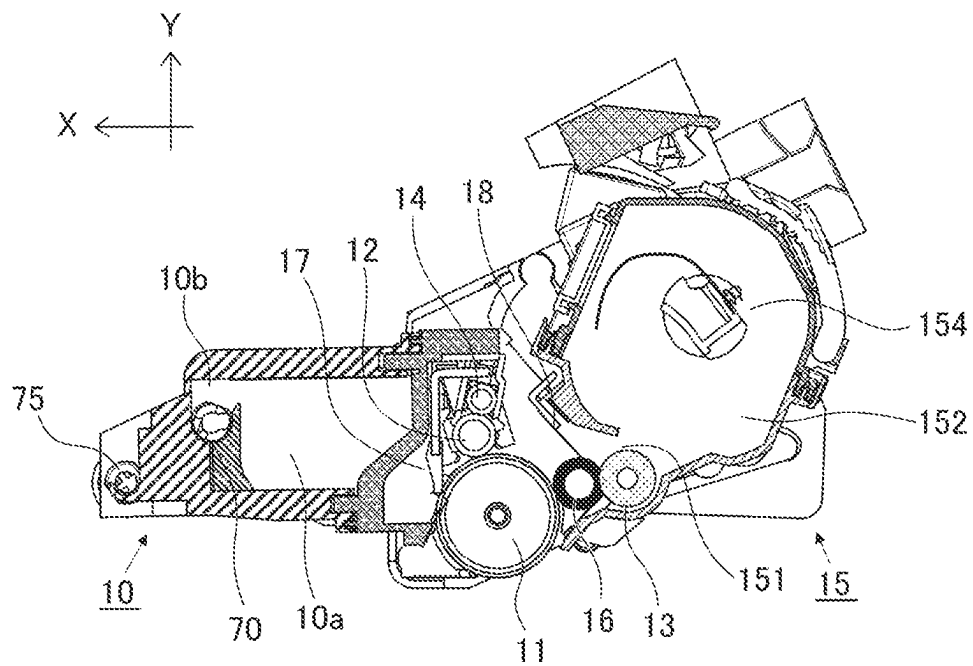


FIG. 3

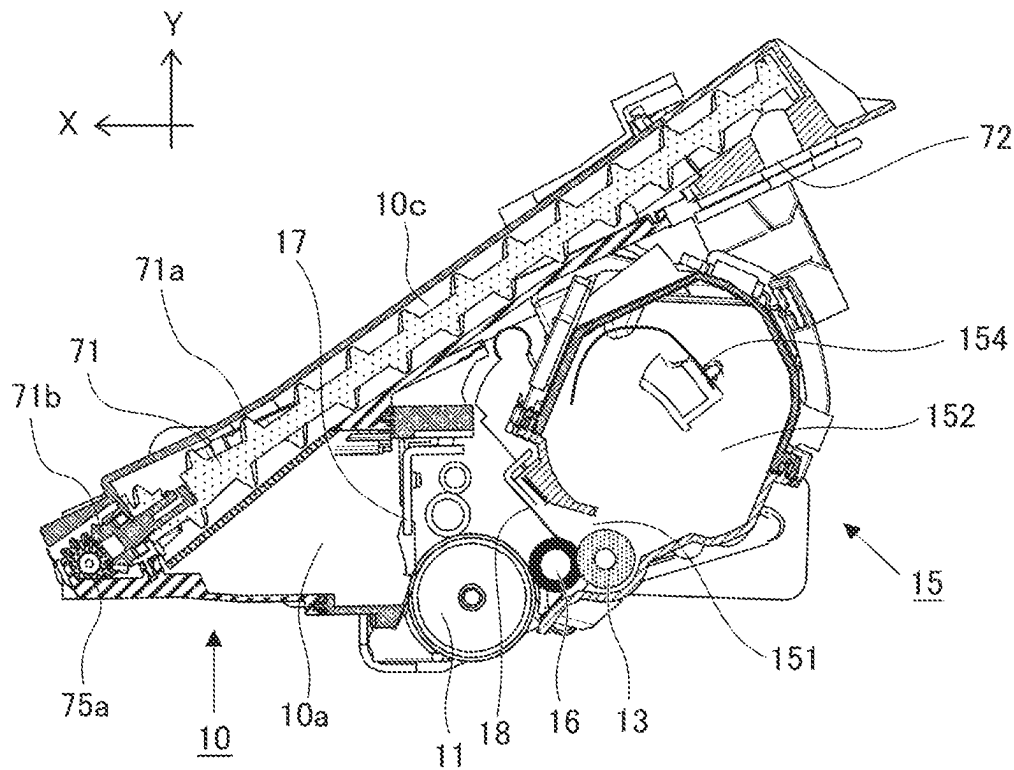


FIG. 4

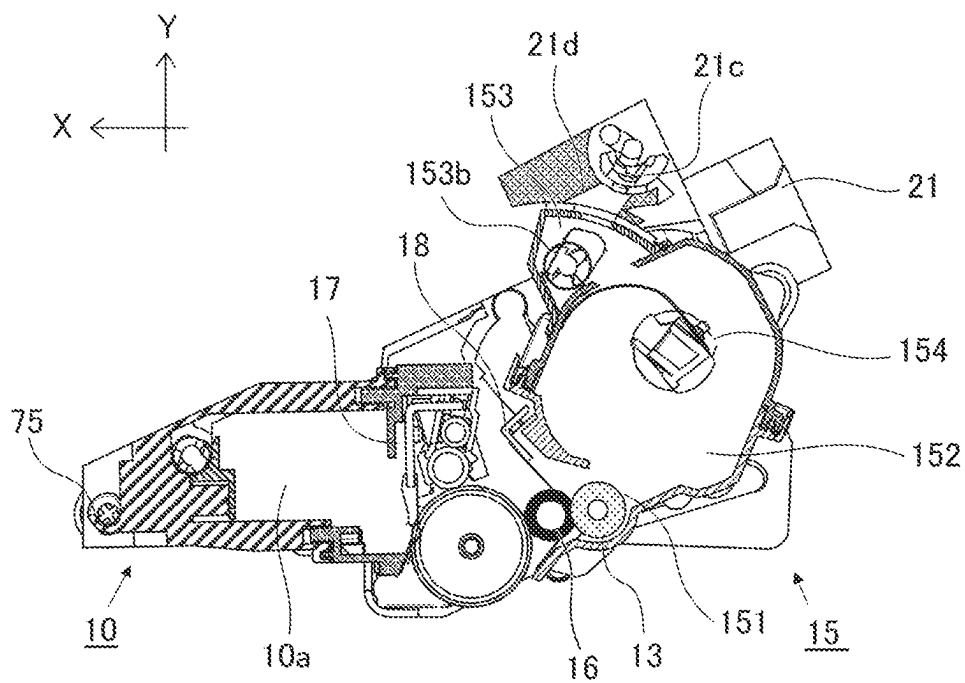


FIG. 5

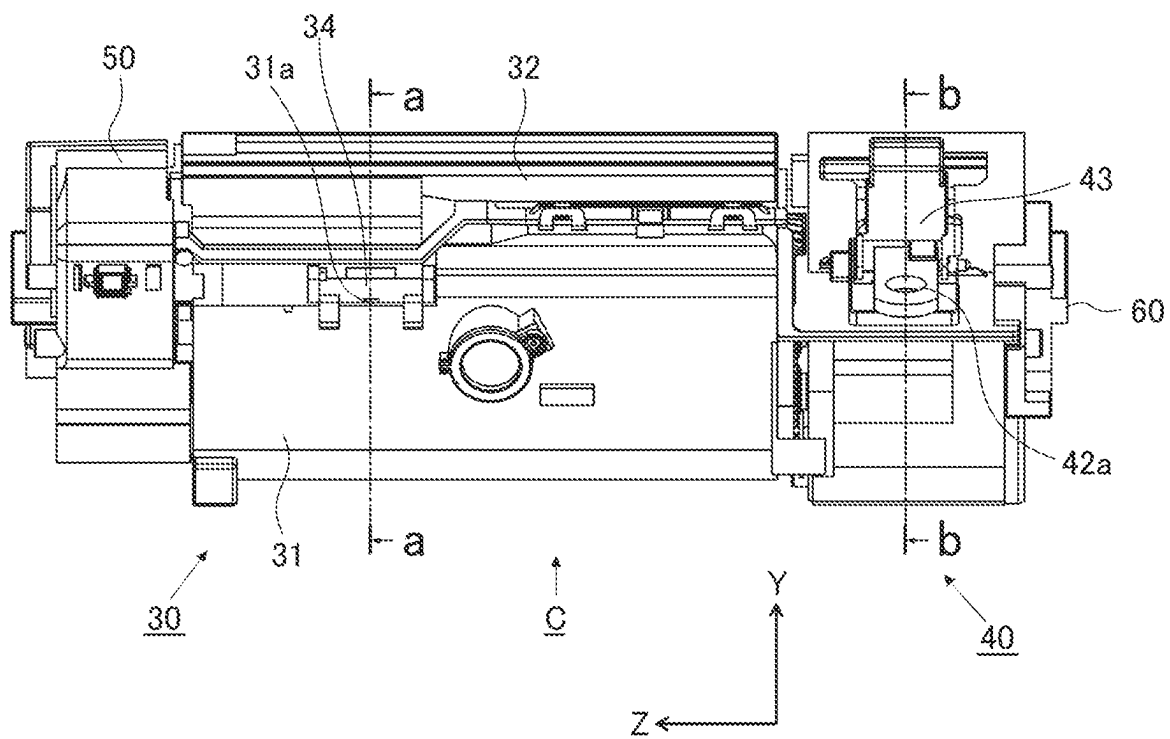


FIG. 6

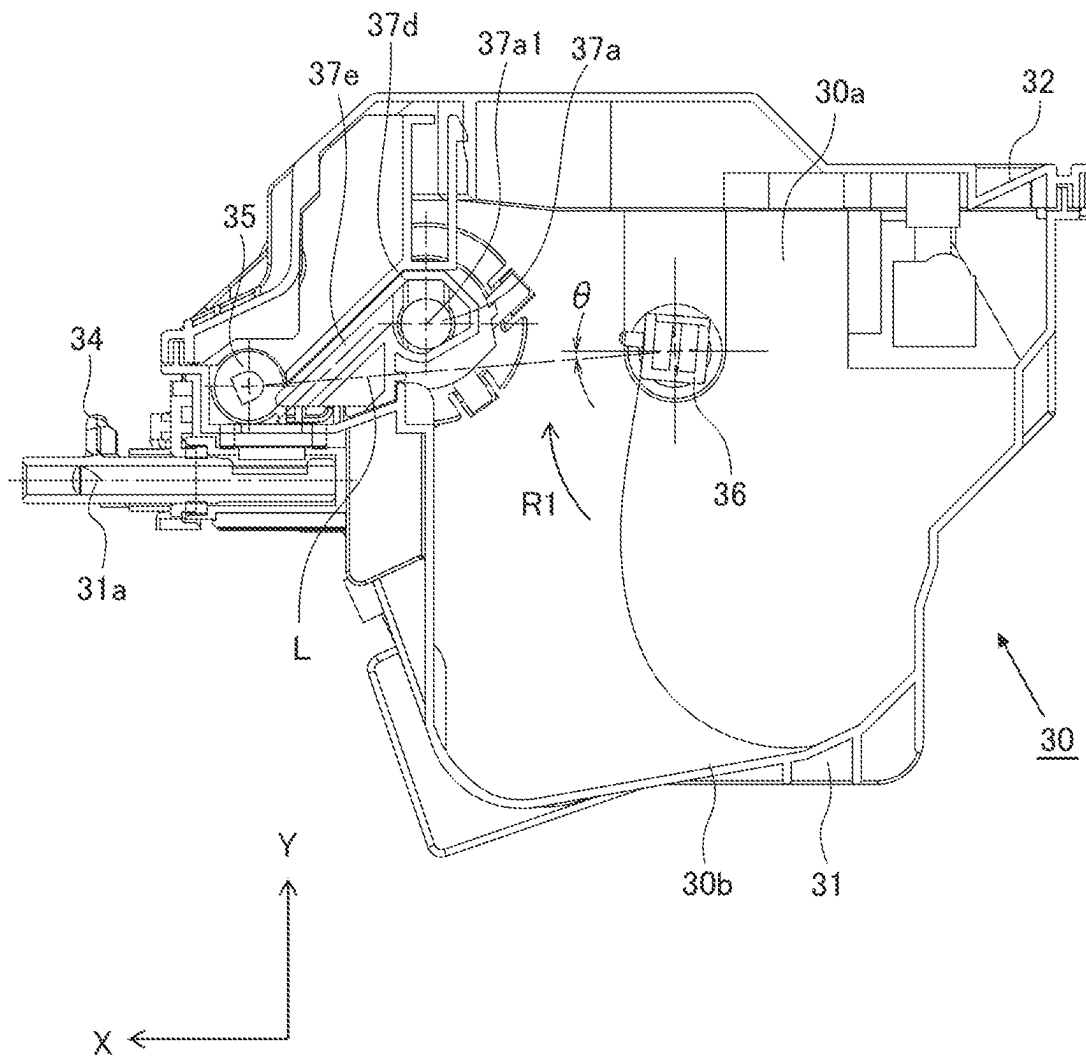


FIG. 7

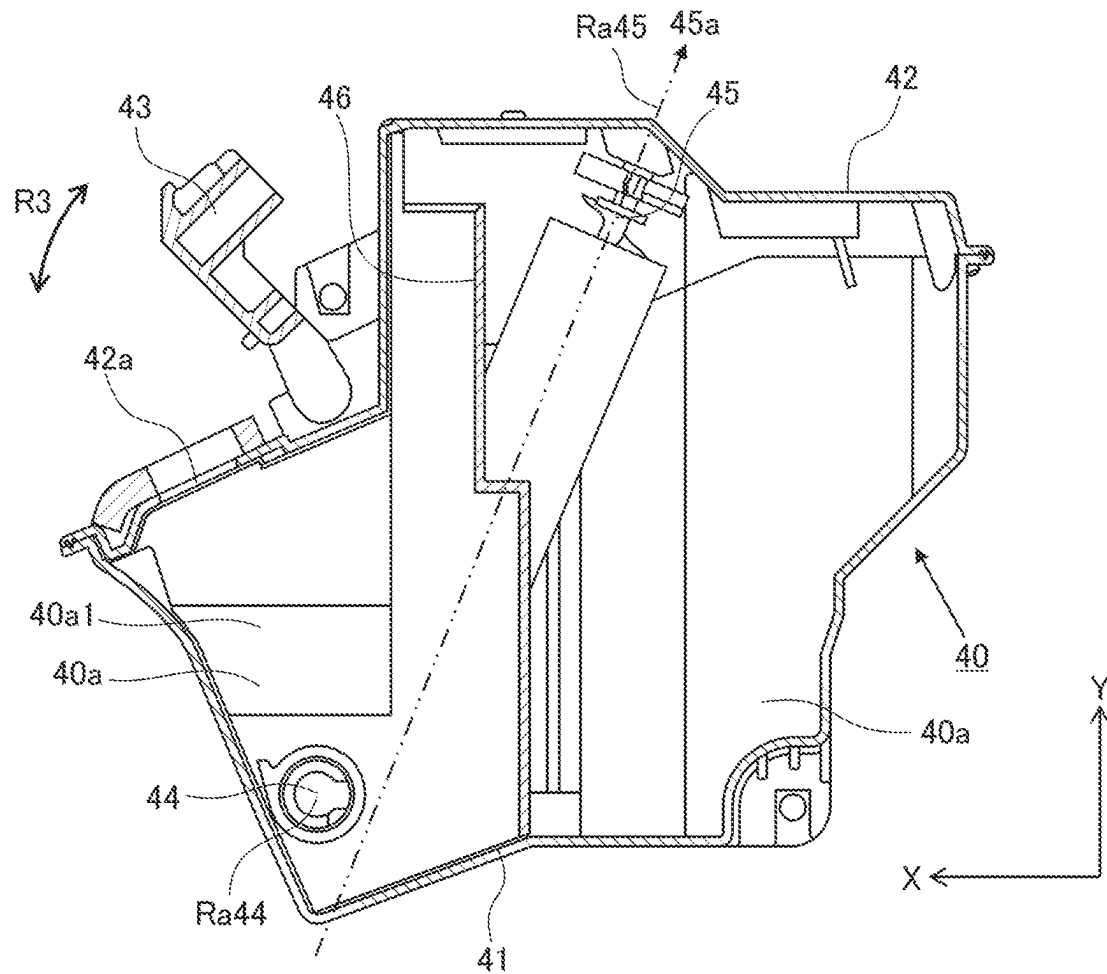


FIG. 8

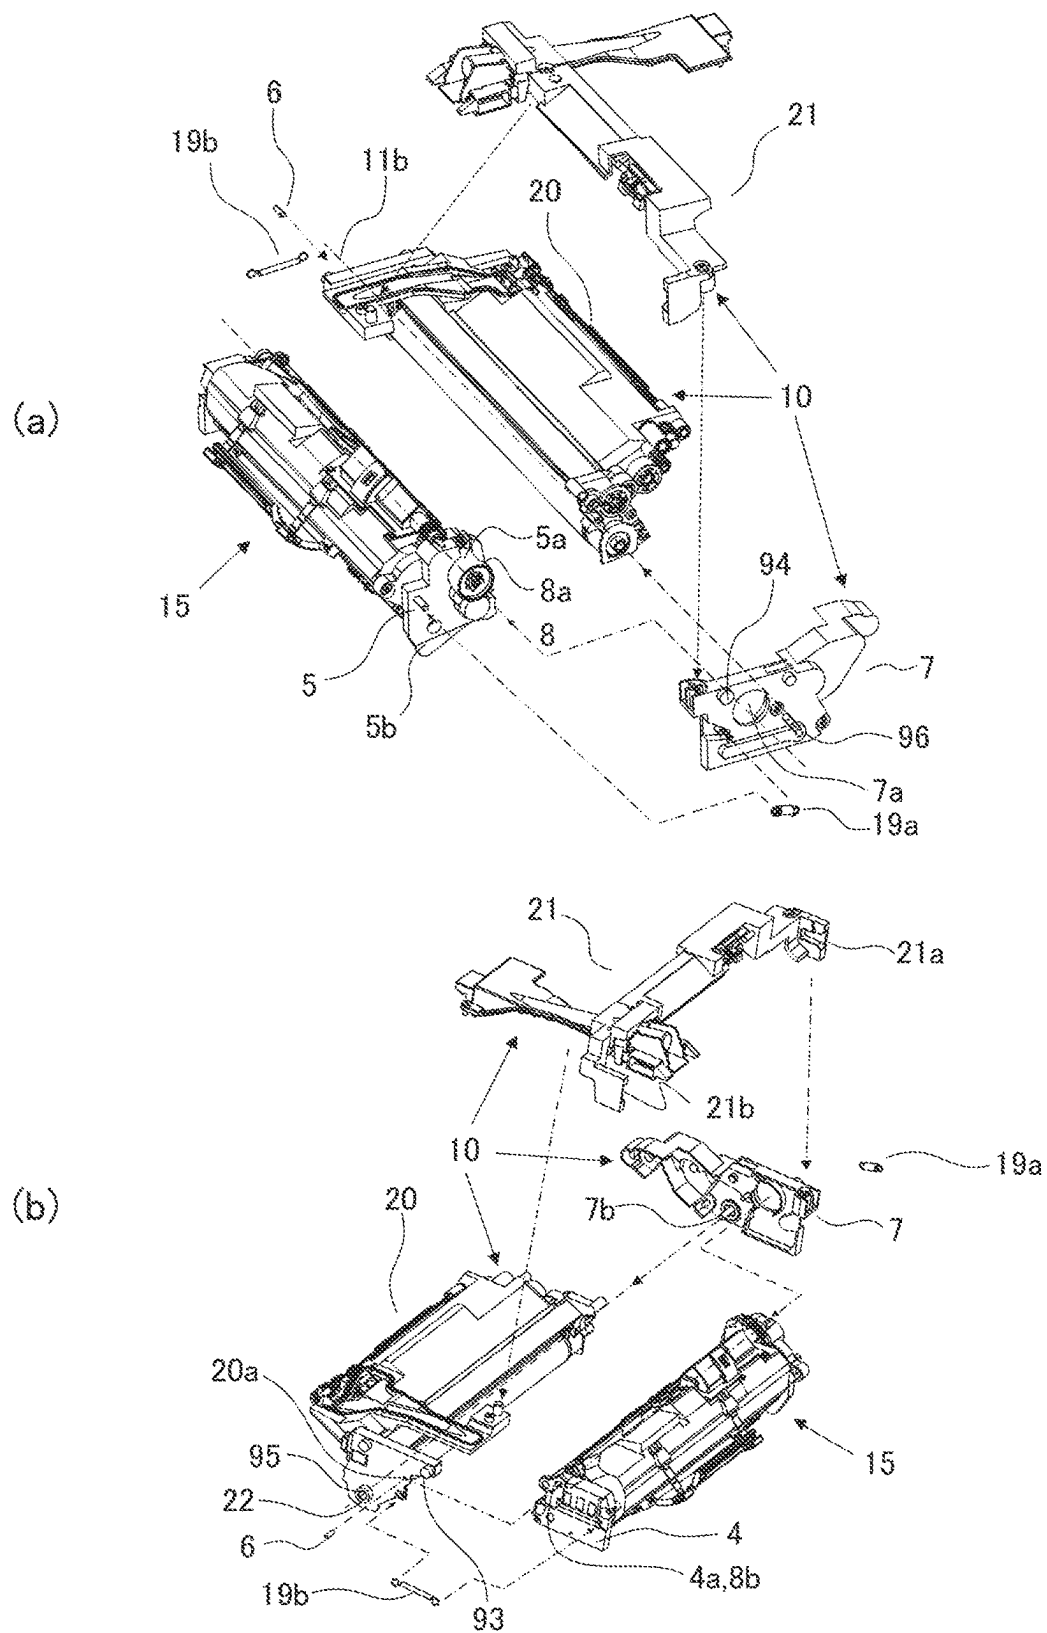


FIG. 9



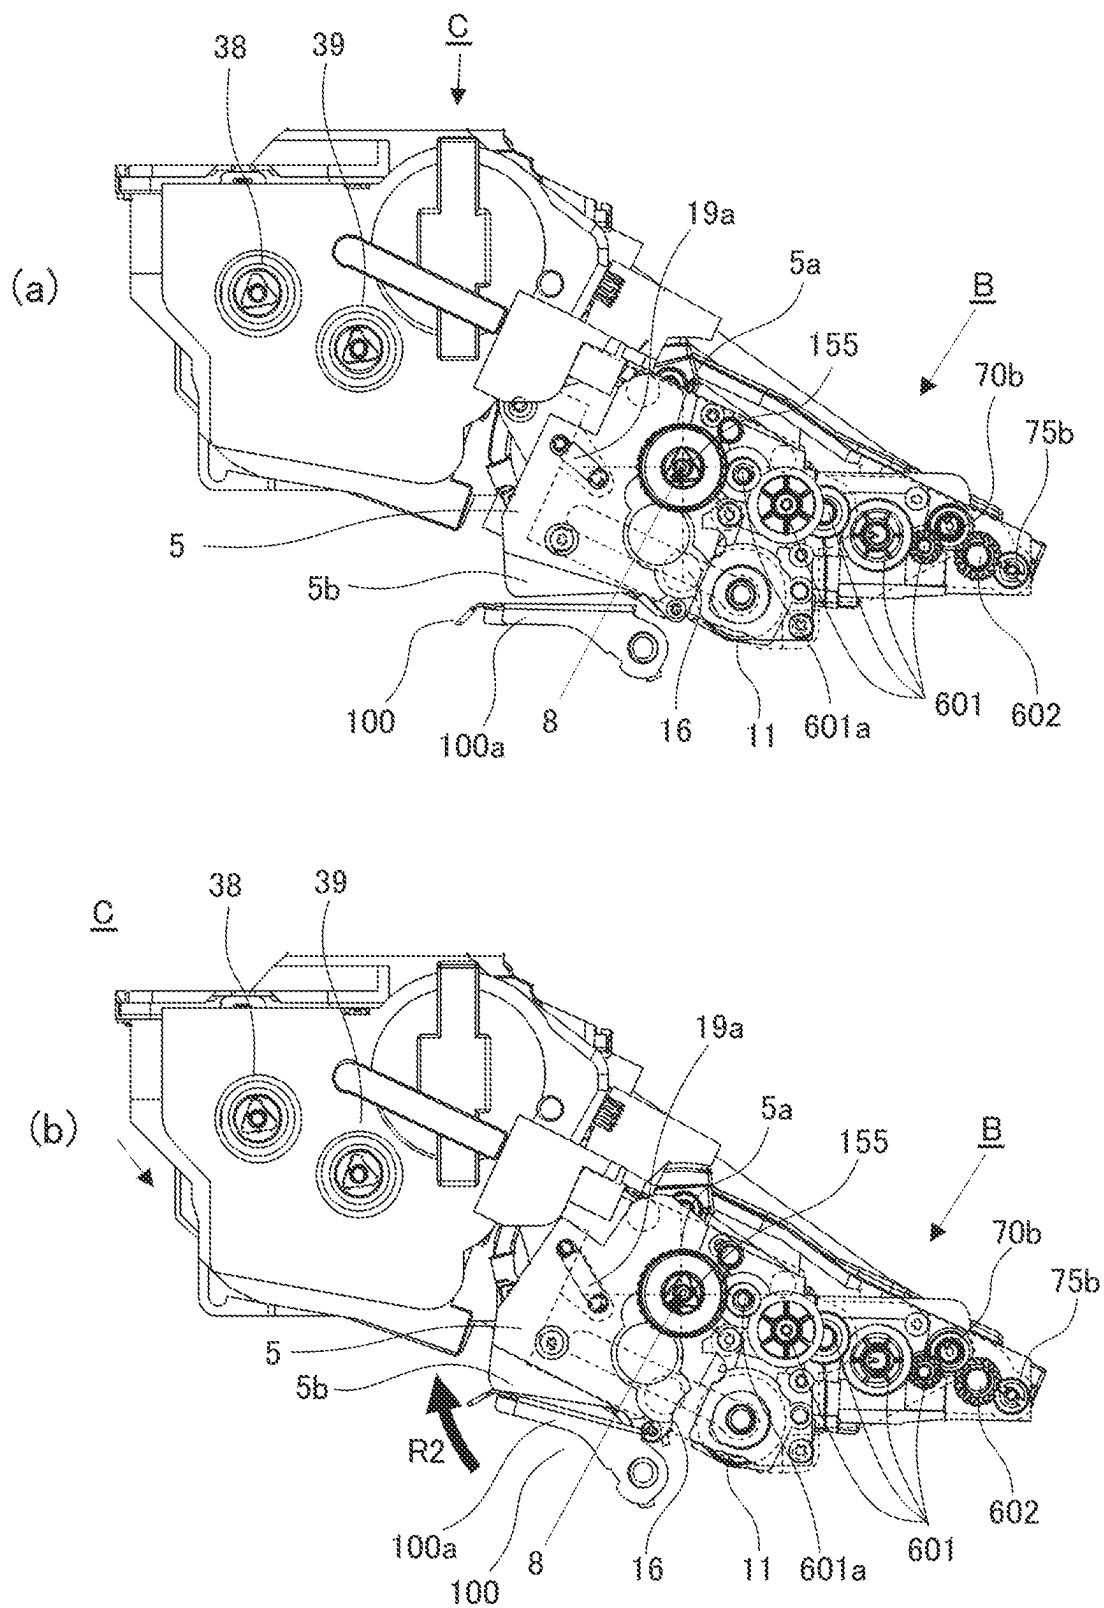


FIG. 10

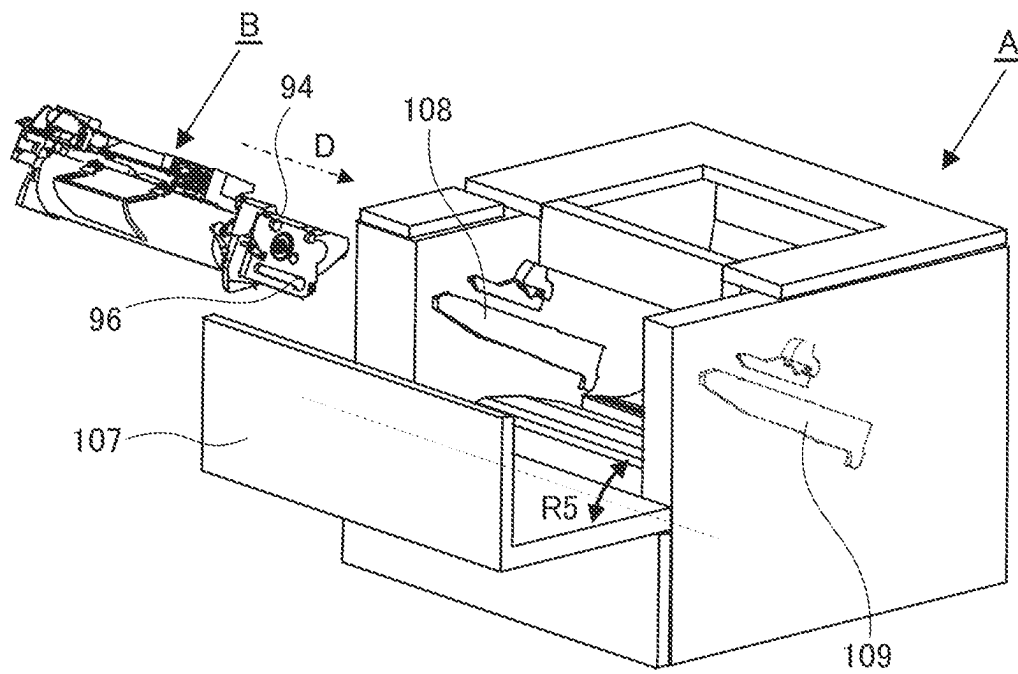

(a)

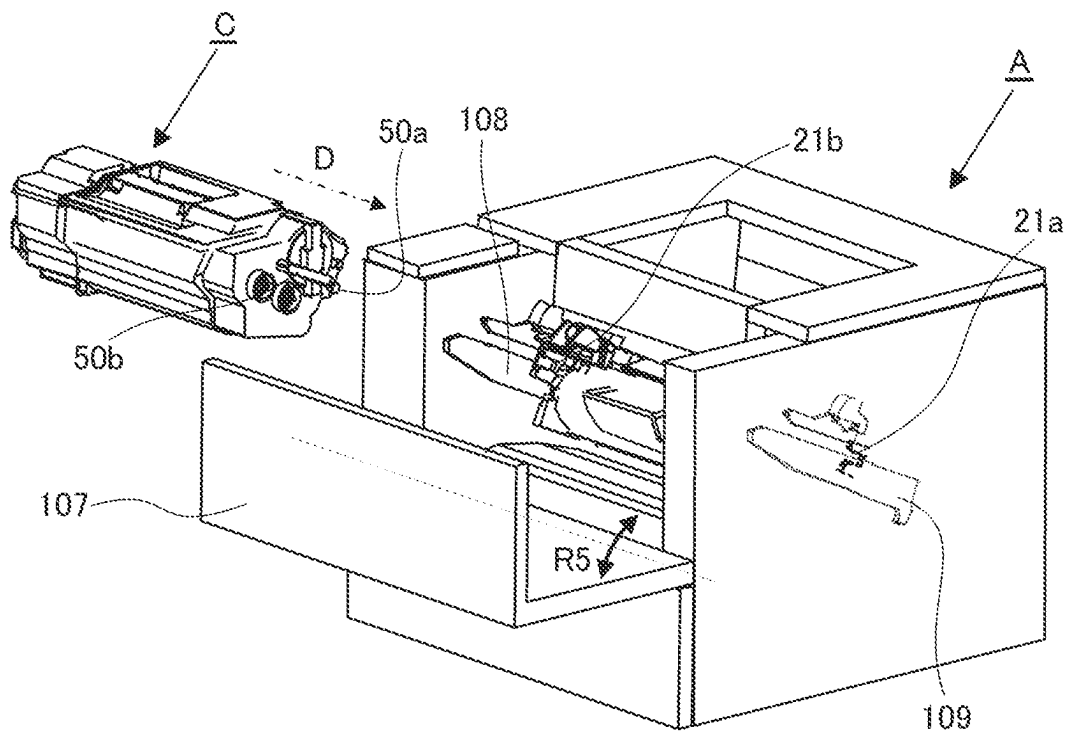

(b)

FIG. 11

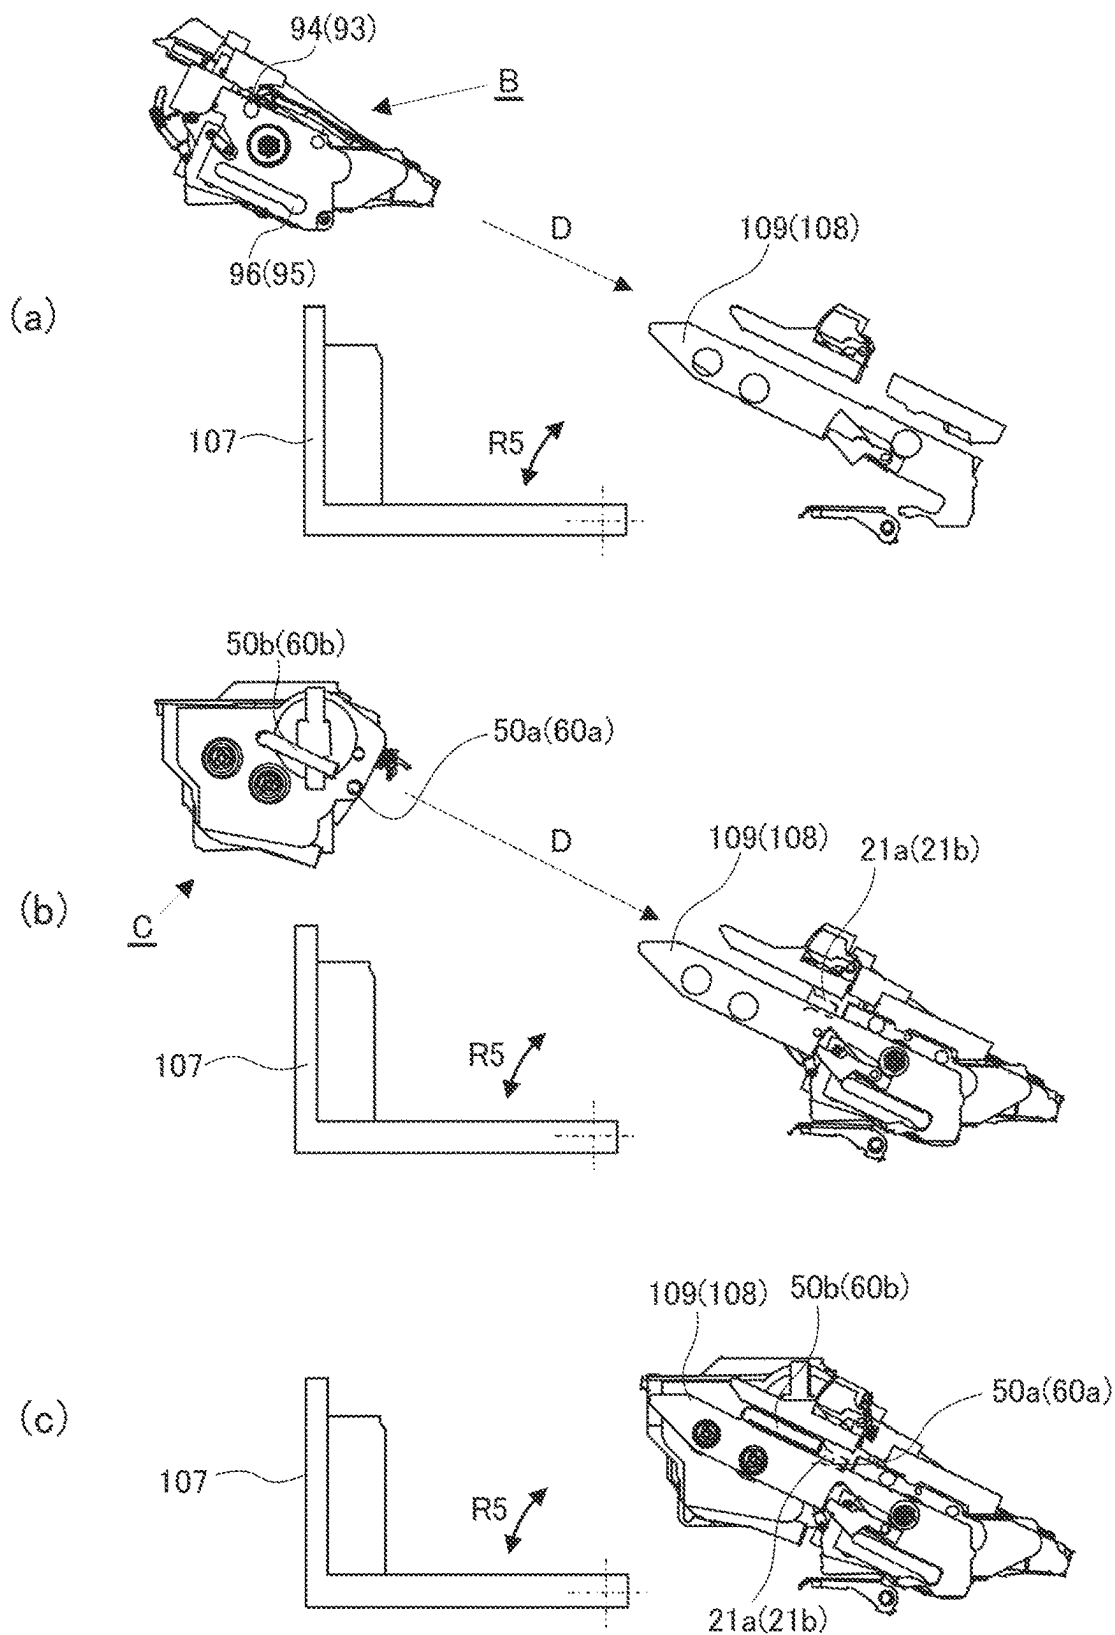


FIG. 12

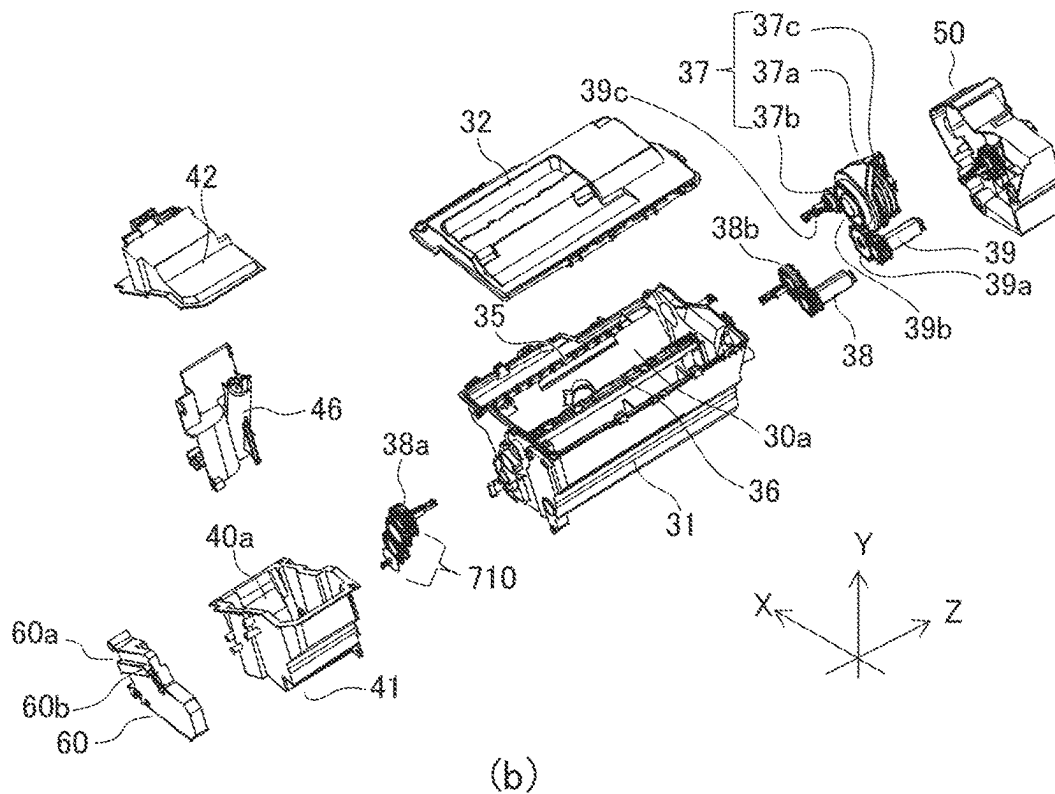
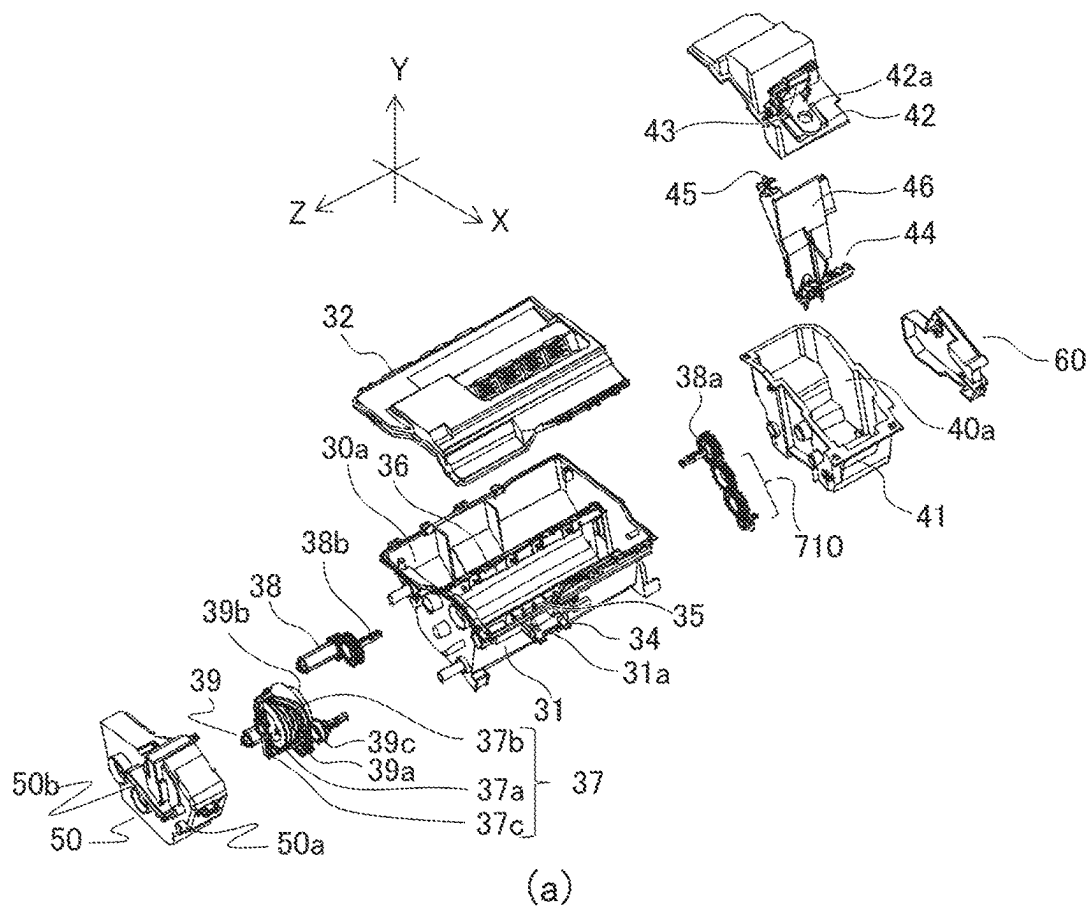
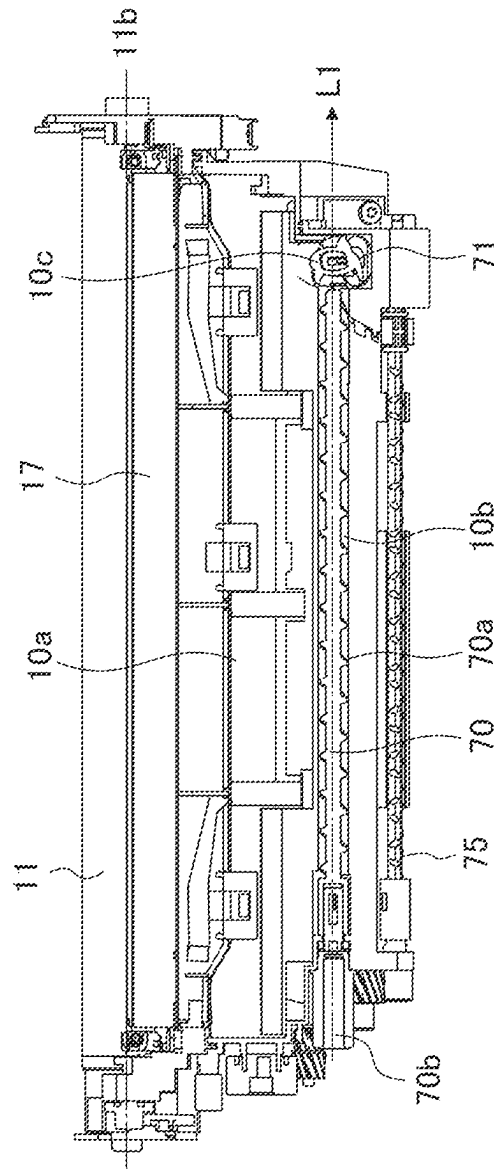


FIG. 13



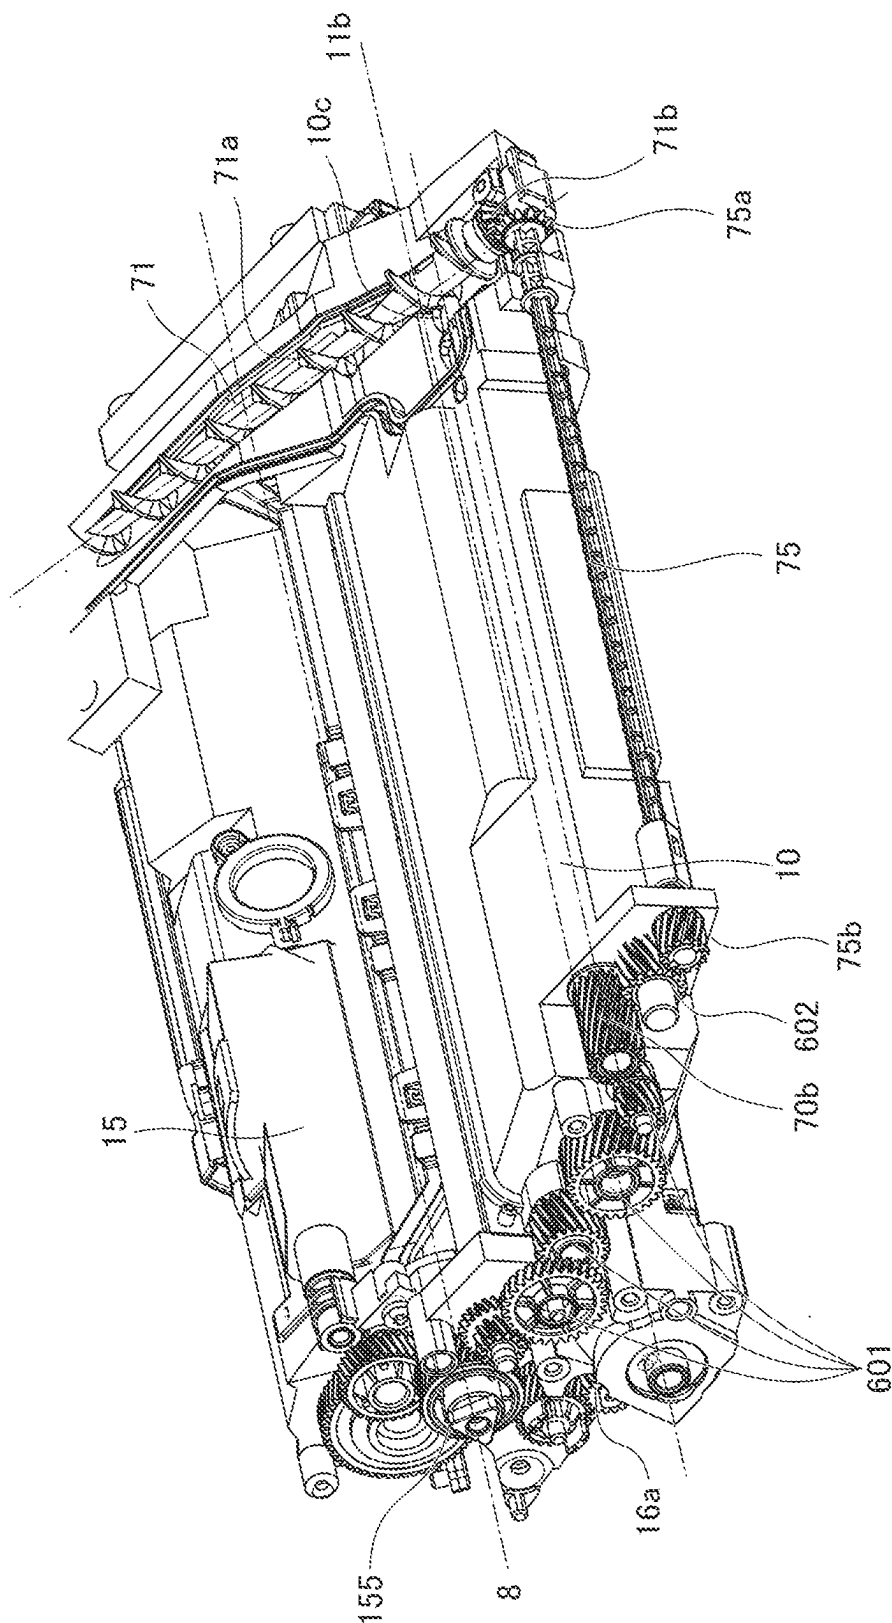


FIG. 15

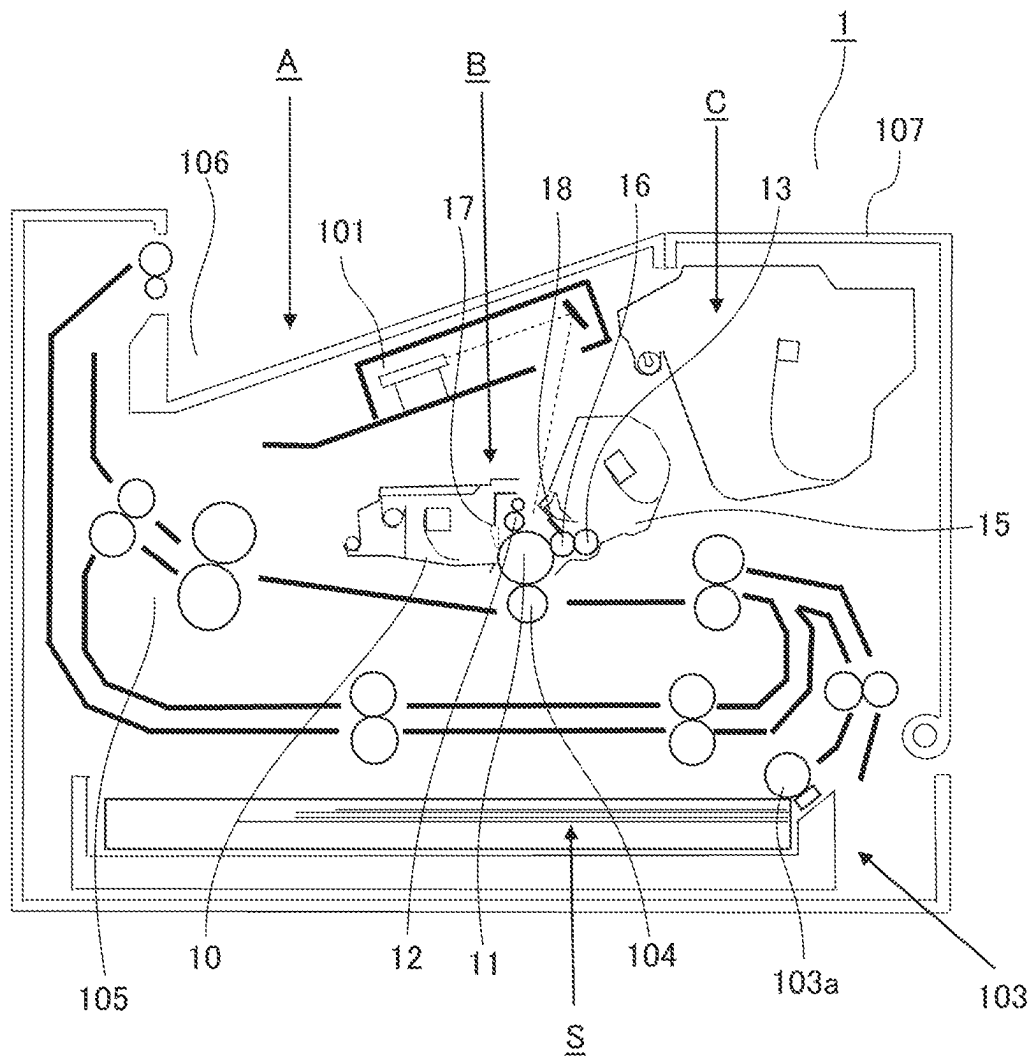


FIG. 16

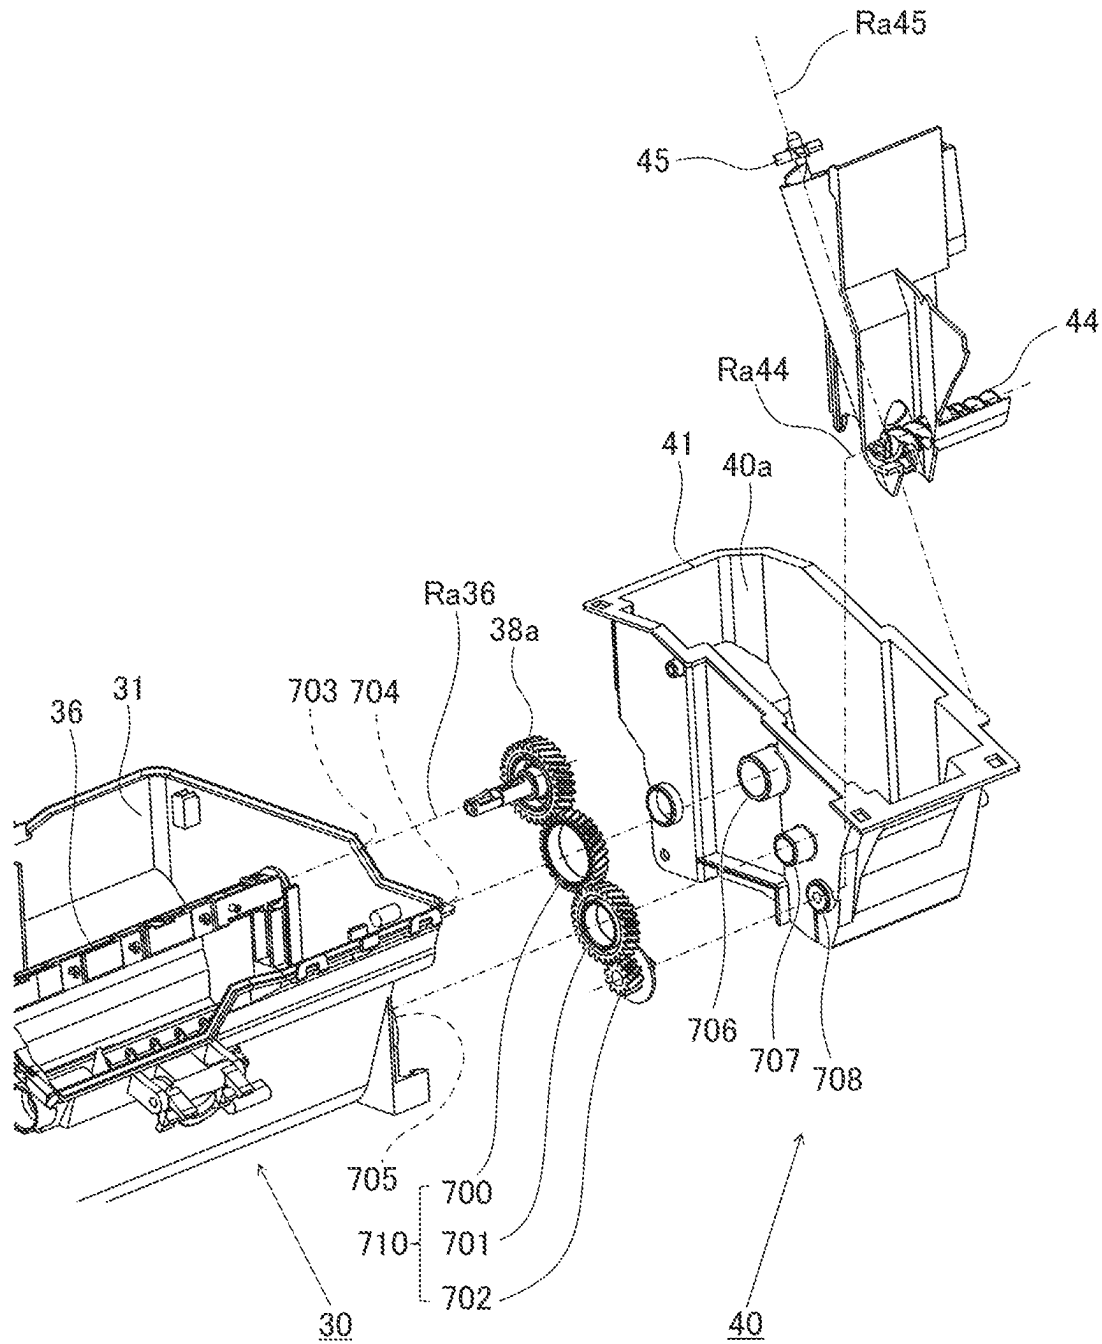


FIG. 17

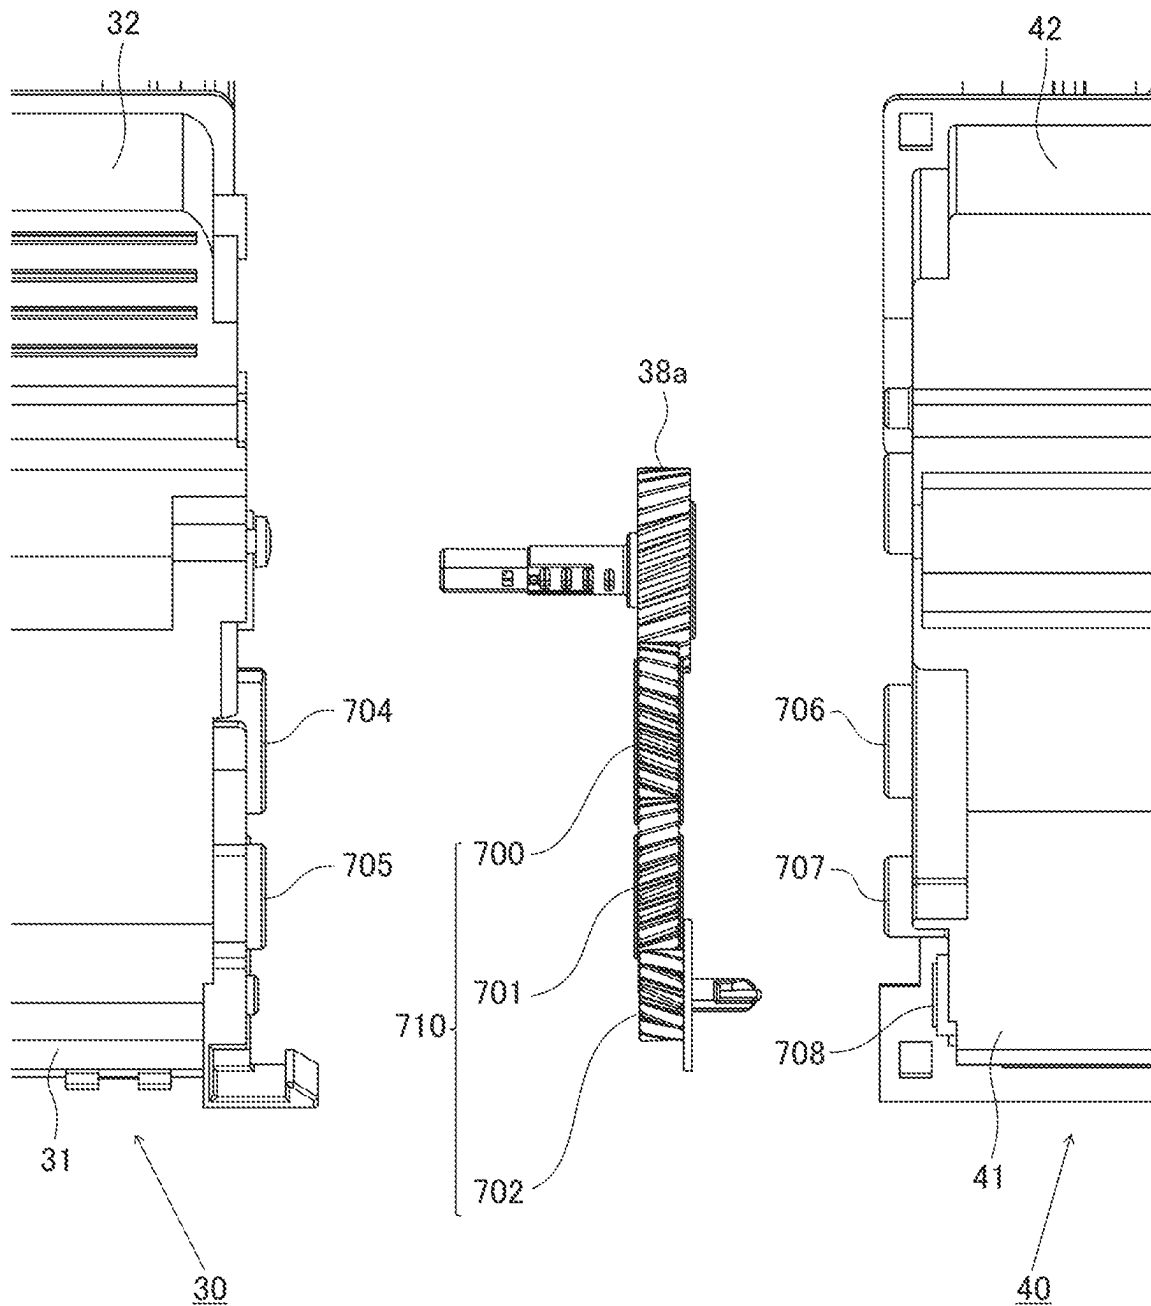


FIG. 18

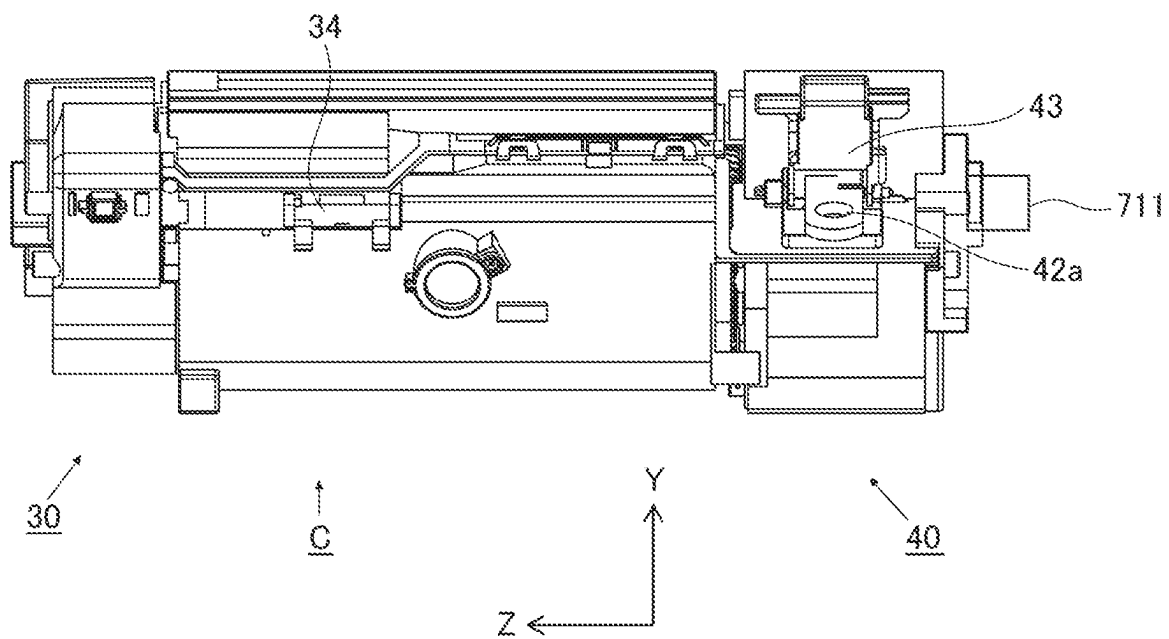
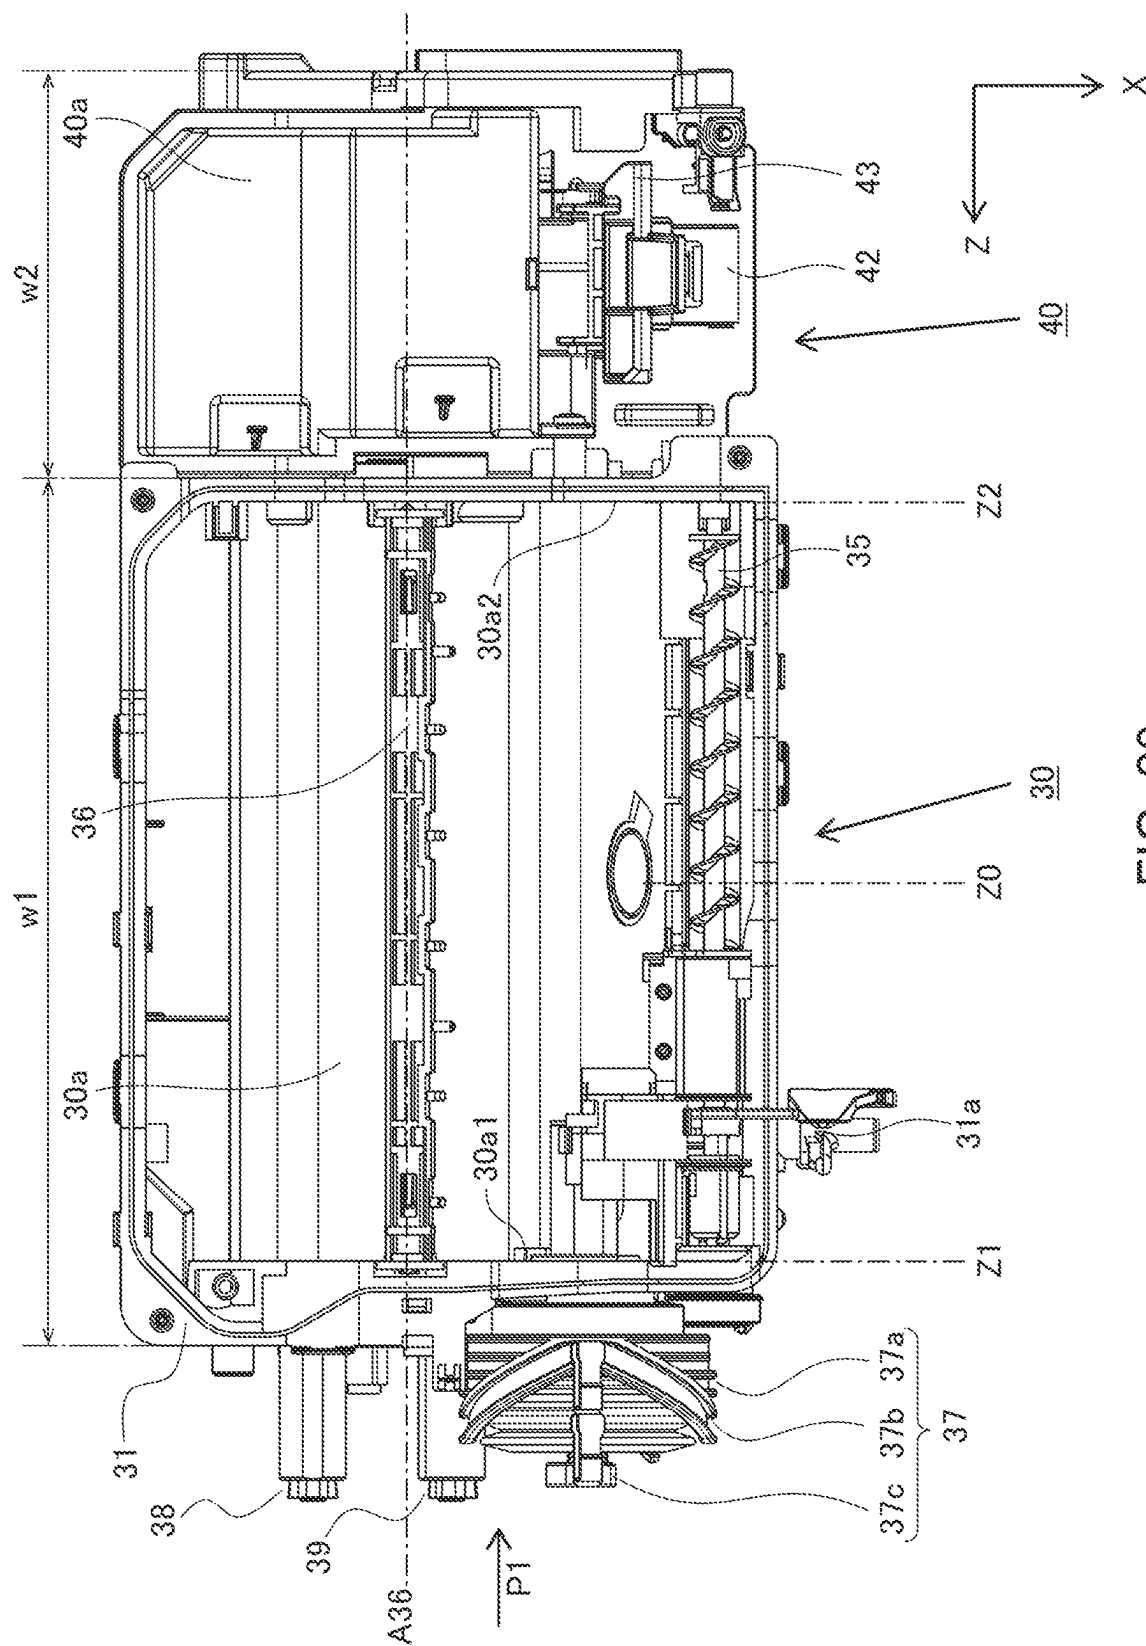


FIG. 19



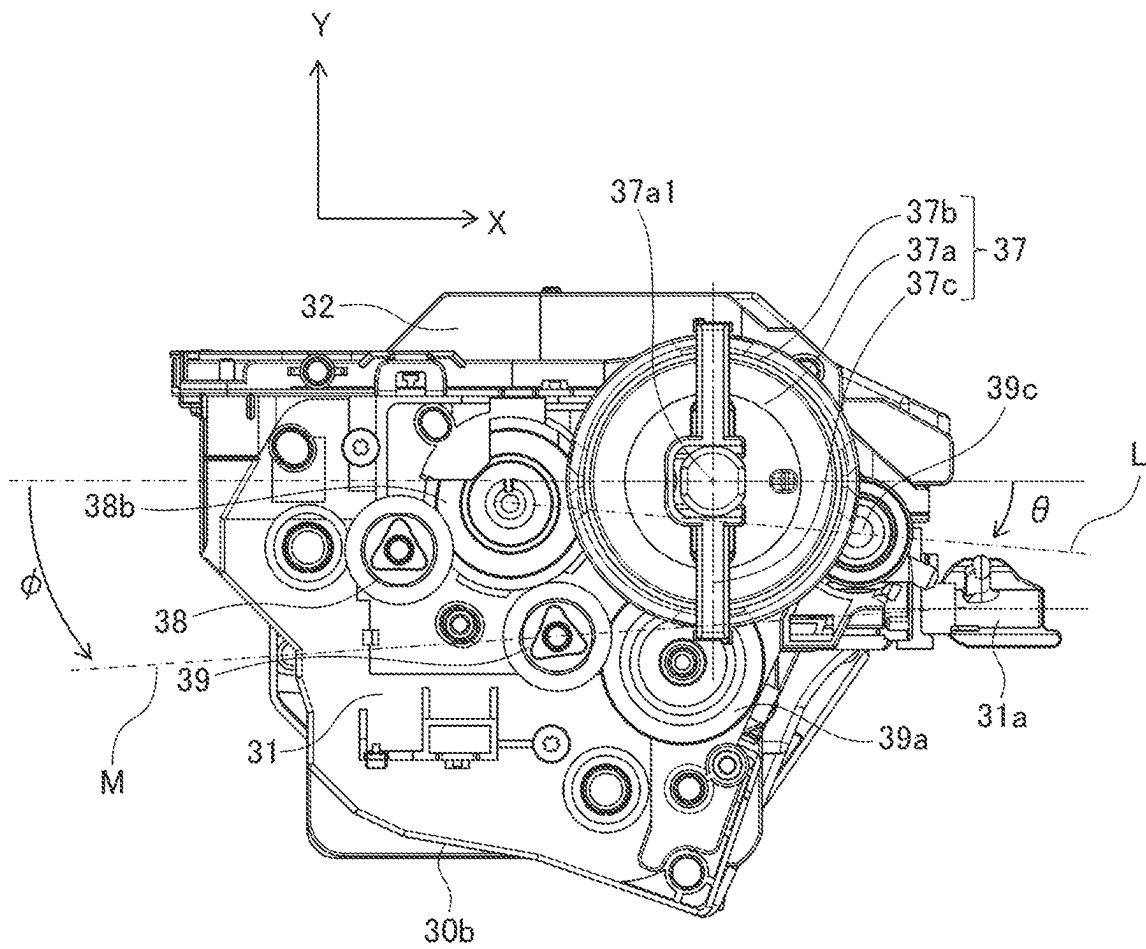


FIG. 21

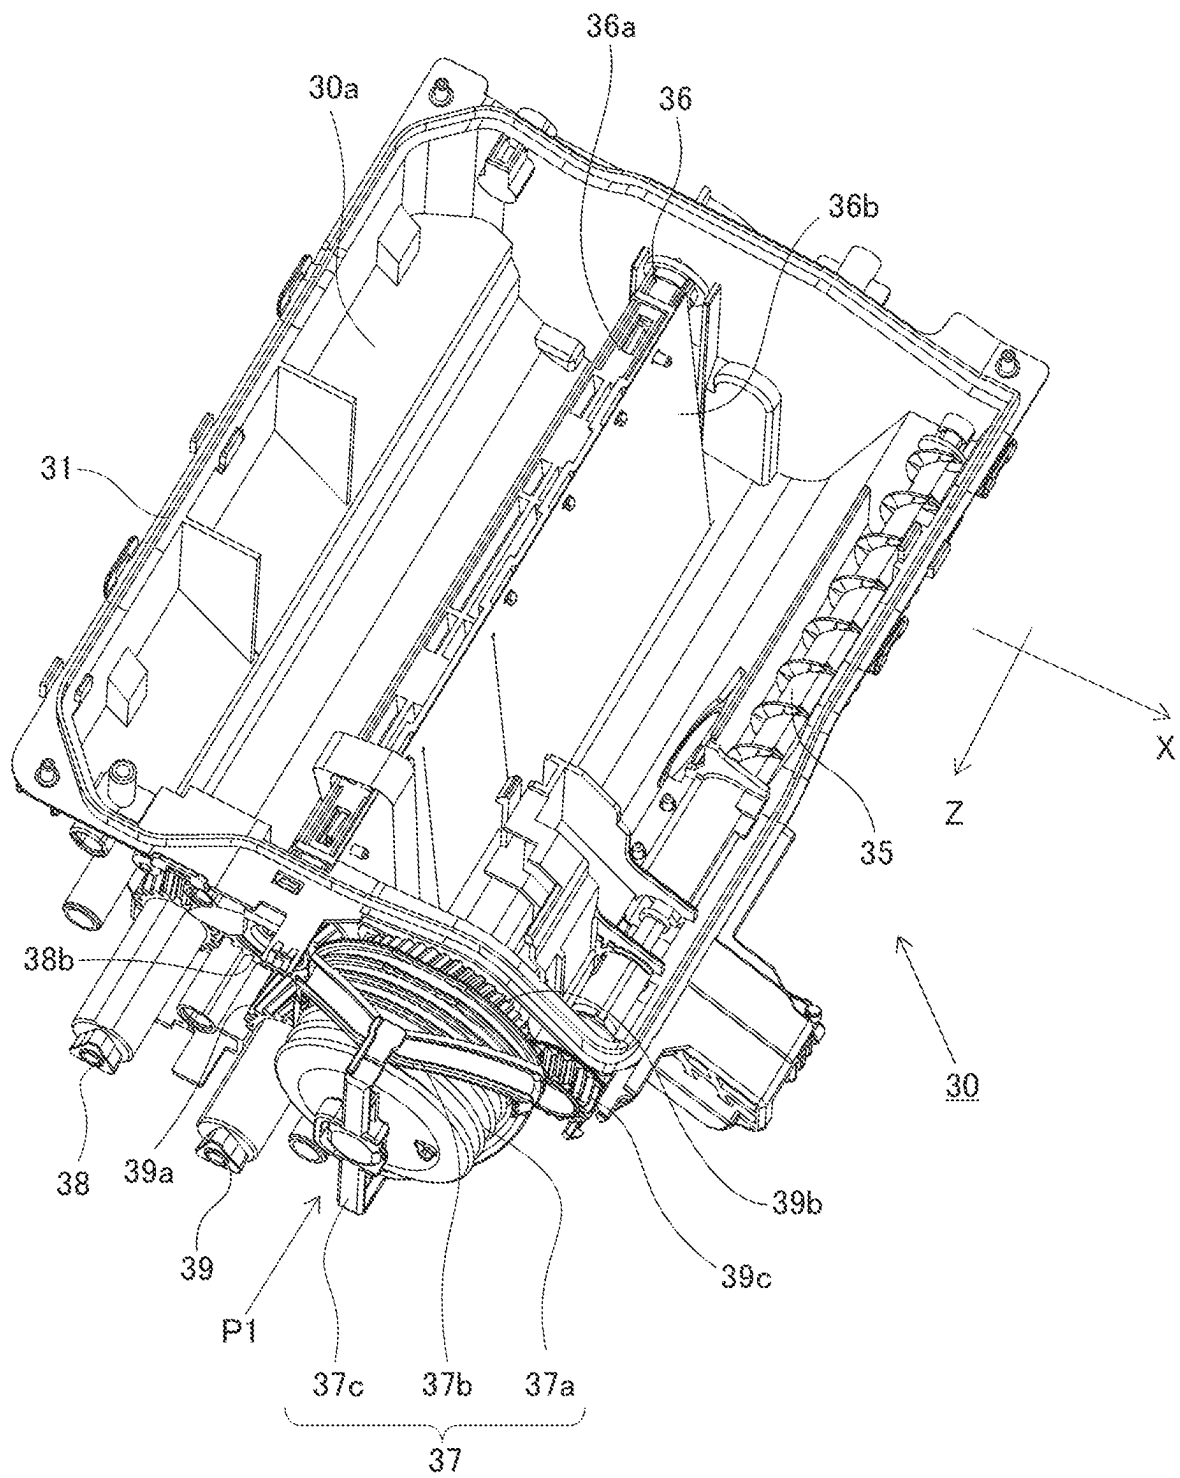


FIG. 22

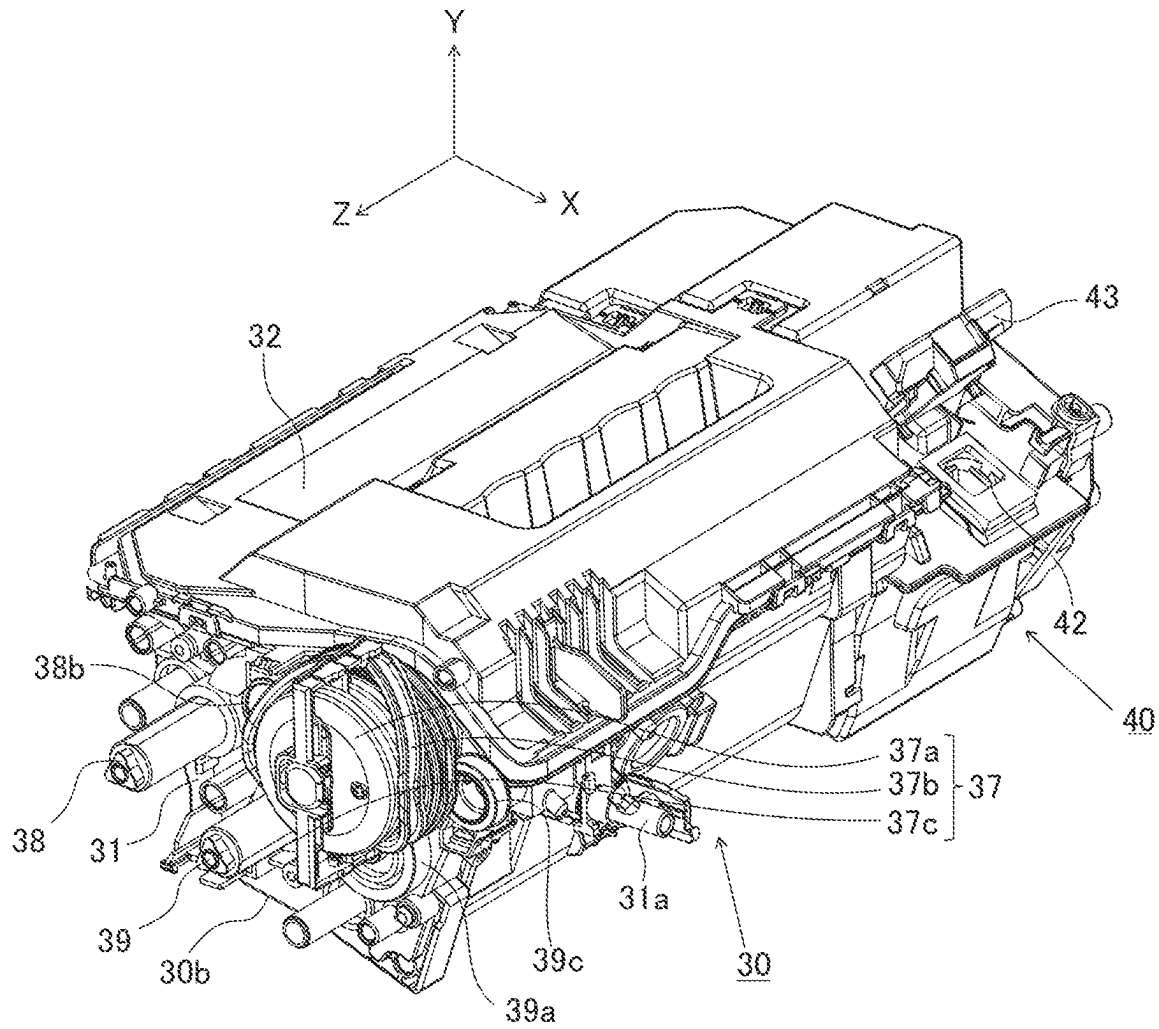


FIG. 23

1

TONER CONTAINER

FIELD OF THE INVENTION AND RELATED ART

The present invention relates to a toner container in which toner is accommodated and an image forming apparatus for forming an image on a recording material.

In an image forming apparatus of an electrophotographic type, a toner cartridge (toner container) which accommodates toner used as a developer in an electrophotographic process and which is detachably mountable to a main assembly of the image forming apparatus is used. In Japanese Laid-Open Patent Application Nos. Hei 5-107918, 2008-158348, and 2011-075887, a toner cartridge (toner container) including a toner accommodating portion for accommodating the toner for being supplied to a developer carrying image and a residual toner (waste toner) accommodating portion for collecting residual toner (waste toner) is disclosed.

SUMMARY OF THE INVENTION

According to an aspect of the present invention, there is provided a toner container comprising: a first chamber configured to accommodate toner and provided with an outlet port through which the toner is discharged outside of the toner container; a second chamber provided with an inlet port and configured to accommodate toner to be received from outside of the toner container through the inlet port; a stirring member configured to stir the toner accommodated in the first chamber and to rotate about a rotational axis; and an air supply unit configured to supply air for discharging the toner accommodated in the first chamber to outside of the toner container through the outlet port, wherein the air supply unit, the first chamber, and the second chamber are aligned in this order in a direction of the rotational axis.

Further features of the present invention will become apparent from the following description of exemplary embodiments with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded view of a part of a toner container according to an embodiment.

FIG. 2 is a front view of a process cartridge according to the embodiment.

FIG. 3 is a sectional view of the process cartridge according to the embodiment.

FIG. 4 is a sectional view of the process cartridge according to the embodiment.

FIG. 5 is a sectional view of the process cartridge according to the embodiment.

FIG. 6 is a front view of the toner container according to the embodiment.

FIG. 7 is a sectional view of the toner container according to the embodiment.

FIG. 8 is a sectional view of the toner container according to the embodiment.

Parts (a) and (b) of FIG. 9 are exploded views of the process cartridge according to the embodiment.

Parts (a) and (b) of FIG. 10 are side views for illustrating mounting of the process cartridge and the toner container according to the embodiment into an apparatus main assembly.

2

Parts (a) and (b) of FIG. 11 are side views for illustrating mounting of the process cartridge and the toner container according to the embodiment into the apparatus main assembly.

Parts (a) to (c) of FIG. 12 are side views for illustrating mounting of the process cartridge and the toner container according to the embodiment into the apparatus main assembly.

Parts (a) and (b) of FIG. 13 are exploded views of the toner container according to the embodiment.

FIG. 14 is a sectional view of a cleaning unit of the process cartridge according to the embodiment.

FIG. 15 is a perspective view of the process cartridge according to the embodiment.

FIG. 16 is a schematic view of a printer according to the embodiment.

FIG. 17 is an exploded view of a part of the toner container according to the embodiment.

FIG. 18 is a schematic view showing a driving mechanism of a residual toner collecting portion of the toner container according to the embodiment.

FIG. 19 is a front view of a toner container according to a comparison example.

FIG. 20 is a top (plan) view showing an element arrangement of the toner container according to the embodiment 1.

FIG. 21 is a side view showing the element of the toner container according to the embodiment 1.

FIG. 22 is a perspective view showing the element arrangement of the toner container according to the embodiment 1.

FIG. 23 is a perspective view of the toner container according to the embodiment 1.

DESCRIPTION OF THE EMBODIMENTS

In the following, an apparatus according to the present invention will be described while making reference to the drawings.

In the following description, an “image forming apparatus” is an apparatus for forming an image on a recording material (recording medium) with toner as a developer.

A sheet used as the recording material includes paper such as plain paper or thick paper, a plastic film such as a sheet for an overhead projection, a special-shaped sheet such as an envelope or index paper, and a cloth.

<General Structure of Printer>

FIG. 16 is a schematic view showing a cross-sectional structure of a laser beam printer 1 (hereinafter referred to as a printer 1) as the image forming apparatus according to an embodiment. The printer 1 is constituted by a printer main body A, a process cartridge B, and a toner container (toner cartridge) C.

The printer main body A includes a sheet feeding portion 103, a transfer roller 104, a fixing device 105, and a laser scanner 101. The process cartridge B is provided detachably mountable to the printer main body A. The process cartridge B is prepared by integrally assembling an image bearing member and process means actable on the image bearing member into a unit and is mounted in an image forming apparatus main assembly so as to be removable from the image forming apparatus main assembly. The toner container accommodates the toner as the developer and is mounted in the apparatus main assembly so as to be removable from the apparatus main assembly. The printer main body A can be said as a portion in which the process cartridge B and the toner container C are removed from the printer 1.

3

The process cartridge B will be described using FIGS. 2 to 5. FIG. 2 is a front view (in which the process cartridge B is viewed from a left (-hand) side in FIG. 16) of the process cartridge B. FIG. 3 is a sectional view (a-a cross section of FIG. 2) of the process cartridge B. FIG. 4 is a sectional view (b-b cross section of FIG. 2) showing a second residual toner (waste toner) conveying passage 10c of the process cartridge B. FIG. 5 is a sectional view (c-c cross section of FIG. 2) showing a supply port of the process cartridge B.

As shown in FIGS. 2, 3, and 4, the process cartridge B is constituted by a cleaning unit 10 as a first unit (photosensitive member unit) and a developing unit 15 as a second unit. The cleaning unit 10 includes a photosensitive drum 11 as the image bearing member. The developing unit 15 includes a developing roller 16 as a developing means or a developer carrying member for carrying the toner as the developer.

The cleaning unit 10 includes the photosensitive drum 11 (photosensitive drum assembly), a cleaning blade 17 as a cleaning member for the photosensitive drum 11, and a charging roller 12 as a charging member. Further, the cleaning unit 10 includes a charging roller cleaner 14 as a cleaning member for the charging roller 12, a residual toner primary accommodating portion 10a, a first residual toner conveying passage 10b, and the second residual toner conveying passage 10c.

The photosensitive drum 11 is one in which a photosensitive layer is formed of an organic photosensitive member or the like on an outer peripheral side of a support formed in a cylindrical shape (drum shape). The charging roller 12 is provided so as to contact an outer peripheral surface of the photosensitive drum 11. The charging roller 12 electrically charges the photosensitive drum 11 by voltage application from a high-voltage substrate provided in the printer main body A. The charging roller 12 is rotated by the photosensitive drum 11 (i.e., is rotated by following rotation of the photosensitive drum 11).

The cleaning blade 17 is an elastic member provided so as to contact the outer peripheral surface of the photosensitive drum 11. The cleaning blade 17 elastically contacts the photosensitive drum 11 at a free end thereof, and removes residual toner (waste toner) (described later) from the photosensitive drum 11. The residual toner removed by the cleaning blade 17 is conveyed from the residual toner primary accommodating portion 10a to the toner container C through the first residual toner conveying passage 10b and the second residual toner conveying passage 10c.

As shown in FIG. 5, the developing unit 15 includes a developing chamber 151 in which developing roller 16 is disposed, a developer accommodating chamber 152 for supplying the toner to the developing chamber 151, and a receiving chamber 153 for receiving the toner supplied from the toner container C.

The developing roller 16 supplies the toner to a developing region where the photosensitive drum 11 opposes the developing roller 16. In the developing region, the developing roller develops an electrostatic latent image formed on the photosensitive drum 11.

The developing blade 18 regulates an amount (layer thickness) of the toner deposited on a peripheral surface of the developing roller 16 in contact with the peripheral surface of the developing roller 16. Further, the developing blade 18 triboelectrically charges the toner deposited on the peripheral surface of the developing roller 16 by rubbing the toner so that an electric charge is imparted to toner particles.

4

In the developer accommodating chamber 152, a stirring member 154 is provided. The toner accommodated in the developer accommodating chamber 152 is sent to the developing chamber 151 while being stirred by rotation of the stirring member 154 and is supplied to the developing roller 16. Incidentally, in the developing chamber 151, an application roller for applying the toner in the developing chamber 151 onto the developing roller 16 can be disposed.

A toner amount in the developer accommodating chamber 152 is detected by an unshown residual amount detecting means. A controller of the printer main body A executes an operation, on the basis of a detection signal of the residual amount detecting means, for supplying the toner from the toner container C to the process cartridge B in the case where the toner amount in the developer accommodating chamber 152 is a certain amount or less.

The receiving chamber 153 is configured to receive the toner from the toner container C through a passage provided in the cleaning unit 10. Specifically, a stay 21 constituting a part of the cleaning unit 10 is provided with a supply port 21c for receiving the toner from the toner container C and a delivery portion 21d for delivering the toner to the receiving chamber 153 of the developing unit 15.

An operation of the printer 1 will be described using FIG. 16. The printer 1 starts an image forming operation in the case where the printer 1 receives image information from an external device, for example. When the image forming operation is started, the photosensitive drum 11 is rotationally driven by a driving source of the printer main body A, and a surface of the photosensitive drum 11 is electrically charged uniformly to a printer potential by the charging roller 12. Then, the charged surface of the photosensitive drum 11 is exposed to light on the basis of image information by the laser scanner 101. By this, electric charges of an exposed portion are removed so that an electrostatic latent image is formed on the surface of the photosensitive drum 11. To this electrostatic latent image, toner is supplied from the developing roller 16, so that the electrostatic latent image is developed into a toner image. The toner image carried on the photosensitive drum 11 is conveyed to a transfer portion which is a nip between the photosensitive drum 11 and the transfer roller 104.

On the other hand, in parallel to preparation of such a toner image, the sheet feeding portion 103 conveys sheets S one by one. Specifically, a feeding roller 103a rotates and feeds the sheets S, stacked on a feeding tray, one by one. Thereafter, the sheet S is conveyed to the transfer portion. Then, during passing of the sheet S through the transfer portion, by a transfer roller 104 to which a transfer voltage is applied from a high-voltage substrate, the toner image is transferred from the photosensitive drum 11 onto the sheet S. Incidentally, toner (residual toner) remaining on the surface of the photosensitive drum 11 without being transferred from the photosensitive drum 11 onto the sheet S in the transfer portion is removed from the surface of the photosensitive drum 11 by the cleaning blade 17.

The sheet S on which the toner image is transferred is conveyed to the fixing device 105. The fixing device 105 is of a heat-fixing type, and heats and presses the toner image on the sheet S while nipping and conveying the nip of a rotatable member pair. By this, an image fixed on the sheet S is obtained. In the case of one-side printing, the sheet S passed through the fixing device 105 is discharged to outside of the printer main body A by a discharging roller pair as a discharging means and is stacked on a discharge tray 106 provided at an upper surface of the printer main body A. In the case of double-side printing, the sheet S on which first

5

side the image is formed by passing through the transfer portion and the fixing device **105** is reversed by the discharging roller pair also functioning as a reversing means, and then is conveyed again toward the transfer portion through a re-conveying passage. Then, the sheet S on which second side an image is formed by passing through the transfer portion and the fixing device **105** a second time is discharged to the outside of the printer main body A by the discharging roller pair and is stacked on the discharge tray **106** provided at the upper surface of the printer main body A.

<Process Cartridge>

A structure of the process cartridge B in this embodiment will be described specifically using FIG. 3, parts (a) and (b) of FIG. 9, and parts (a) and (b) of FIG. 10. Parts (a) and (b) of FIG. 9 are exploded views of the process cartridge B. Part (a) of FIG. 10 is a side view showing a development contact state of the process cartridge B. Part (b) of FIG. 10 is a side view showing a development separation state of the process cartridge B.

As shown in parts (a) and (b) of FIG. 9, at an end portion of the developing unit **16** with respect to an axial direction of the developing roller **16**, bearing members **4** and **5** are provided. The developing unit **15** is connected to the cleaning unit **10** so as to be swingable (rotatable) about a swing axis **8** defined by a rectilinear line passing through supporting shafts **8a** and **8b** (described later). The swing axis **8** is substantially parallel to a rotational axis **11b** of the photosensitive drum **11**.

A frame of the cleaning unit **10** is constituted by a main frame **20**, a stay **21**, and a side cover **7**. The main frame **20** supports the cleaning blade **17**, the charging roller **12**, and the charging roller cleaner **14**. The photosensitive drum **11** is rotatably supported by a drum pin **22** mounted on the main frame **20** on one side and by a photosensitive drum supporting portion **7b** provided in the side cover **7** on an opposite side.

A structure in which the developing unit **15** is supported by the cleaning unit **10** will be specifically described. As shown in part (a) of FIG. 9, a cylindrical-shaped portion **5a** provided on the bearing member **5** is supported by a cylindrical hole-shaped portion **7a** provided in the side cover **7** of the cleaning unit **10**. The supporting shaft **8a** is defined by a common axis to the cylindrical hole-shaped portion **7a** of the side cover **7** and the cylindrical-shaped portion **5a** of the bearing member **5**. Further, as shown in part (b) of FIG. 9, a pin **6** is inserted so as to bridge over a cylindrical hole-shaped portion **20a** of the main frame **20** of the cleaning unit **10** and a cylindrical-shaped portion **5a** of the bearing member **4**. The supporting shaft **8b** is defined by a common axis to the pin **6** and the cylindrical hole-shaped portion **4a** of the bearing member **4**. The supporting shaft **8a** and the supporting shaft **8b** are disposed substantially on the same axis, so that the swing axis **8** is defined by the rectilinear line including the supporting shafts **8a** and **8b** as described above.

The developing unit **15** is movable about the swing axis **8** between a contact position where the developing roller **16** contacts the photosensitive drum **11** and a separated position where the developing roller **16** is separated from the photosensitive drum **11**. In the following, a state of the process cartridge B when the developing unit **15** is in the contact position is referred to as a "development contact state", and a state of the process cartridge B when the developing unit **15** is in the separated position is referred to as a "development separation state".

6

The process cartridge B includes pressing springs **19a** and **19b** as elastic members for urging the developing unit **15**. The pressing springs **19a** and **19b** are spring members (tension springs) connecting the developing unit **15** and the cleaning unit **10** to each other. The developing unit **15** is urged toward the contact position by the pressing springs **19a** and **19b**.

Further, the printer A includes a separating mechanism **100** described later as an actuator for moving the developing unit **15** to the contact position and the separated position. A pressing member **100a** is capable of moving the developing unit **15** between a position where the pressing member **100a** holds the developing unit in the contact position and a position where the pressing member **100a** permits movement of the developing unit **15** from the contact position to the separated position. That is, the separating mechanism **100** is capable of moving the developing unit **15** from the contact position to the separated position against an urging force of the pressing springs **19a** and **19b**.

An operation for moving the developing unit **15** between the contact position and the separated position will be described using parts (a) and (b) of FIG. 10. Incidentally, in order to illustrate the separating mechanism **100** of the printer A the side cover **7** of the cleaning unit **10** is omitted from parts (a) and (b) of FIG. 10.

As shown in part (a) of FIG. 10, the bearing member **5** is provided with a projected portion **5b**. The projected portion **5b** is a portion (portion-to-be-pressed) to be pressed by the pressing member **100a** provided on the separating mechanism **100**. As shown in part (a) of FIG. 10, when the pressing member **100a** is in a position where the pressing member **100a** does not contact the projected portion **5b**, by urging forces of the pressing springs **19a** and **19b**, the developing unit **15** is held in the contact position and the developing roller **16** contacts the photosensitive drum **11**. In this state, the developing roller **16** is capable of developing the electrostatic latent image formed on the surface of the photosensitive drum **11**. That is, the development contact state is a state (state in which the developing unit **15** is in a position during image formation) in which the process cartridge B is capable of executing the image forming operation. Further, the contact position of the developing unit **15** is a position where the developing unit **15** is capable of appropriately executing a developing process by the developing means (developer carrying member).

As shown in part (b) of FIG. 10, the pressing member **100a** of the separating mechanism **100** is capable of rotating the developing unit **15** against the urging forces of the pressing springs **19a** and **19b** in contact with the projected portion **5b**. That is, by a force received from the pressing member **100a**, the developing unit **15** is rotated about the swing axis **8** in an R2 direction in part (b) of FIG. 10 (direction from the contact position toward the separated position), so that the developing roller **16** is separated from the photosensitive drum **11**. That is, the development separation state is a state (state in which the developing unit **15** is in a position during non-image formation) in the case where the process cartridge B does not execute the image forming operation. Further, the separated position of the developing unit **15** is a state in which the developing unit **15** is in a position where the developing means is more spaced away from the photosensitive drum than from a position where the developing means (developer carrying member) is capable of executing a developing process.

When the pressing member **100a** returns to an original position (part (a) of FIG. 10), the pressing member **100a** is separated from the projected portion **5b**. For this reason, by

7

the urging forces of the pressing springs **19a** and **19b**, the developing unit **15** is moved from the separated position to the contact position. That is, as shown in part (a) of FIG. **10**, the developing roller **16** is contacted again to the photosensitive drum **11**.

Thus, a constitution in which the process cartridge B is capable of being switched in state between the development contact state and the development separation state is employed. For this reason, for example, during the non-image formation, the process cartridge B is put in the development separation state, so that it is possible to reduce a degree of deterioration of the toner and to suppress unnecessary toner consumption during the non-image formation.

<Outline of Toner Container>

The toner container C will be described using FIGS. **6** to **8** and parts (a) and (b) of FIG. **13**. FIG. **6** is a front view (schematic view in which the toner container C is viewed from a left (-hand) side of FIG. **16**) of the toner container C. FIG. **7** is a sectional view (a-a cross section of FIG. **6**) showing a toner supplying portion **30** of the toner container C. FIG. **8** is a sectional view (b-b cross section of FIG. **6**) showing a residual toner collecting portion of the toner container C. Parts (a) and (b) of FIG. **13** are exploded views of the toner container C.

As shown in FIG. **6**, the toner container C has an outer configuration extending in a predetermined longitudinal direction. A direction from one end side toward the other end side along the longitudinal direction of the toner container C is indicated by an arrow Z in FIG. **6** and the like. The longitudinal direction of the toner container C is substantially parallel to a direction of the rotational axis of the photosensitive drum **11** and a direction of a rotational axis of the developing roller **16**. That is, the longitudinal direction of the toner container C is substantially parallel to a longitudinal direction of the process cartridge B.

A vertical direction (vertically upward direction) in a state in which the toner container C and the process cartridge B are mounted in the printer main body A and in which the printer main body A is installed on the horizontal surface is indicated by an arrow Y in FIG. **6** and the like. Further, a horizontal direction perpendicular to both the longitudinal direction (arrow Z) of the toner container C and the vertical direction (arrow Y) is indicated by an arrow X.

A side which is one end side of the toner container C with respect to the longitudinal direction and on which principally a driving force is inputted from the printer main body A to the toner container C is referred to as a driving side (left side of FIG. **6**), and an opposite side thereof is referred to as a non-driving side (right side of FIG. **6**). In this embodiment, the driving side is a side on which the toner supplying portion **30** is disposed relative to the residual toner collecting portion **40**, and the non-driving side is a side on which the residual toner collecting portion **40** is disposed relative to the toner supplying portion **30**. Further, an in-plane direction on an imaginary flat plane perpendicular to the longitudinal direction (arrow Z) is also collectively referred to as a short (side) direction.

<Toner Supplying Portion>

As shown in FIG. **6**, the toner container C includes the toner supplying portion (first chamber) for supplying the toner the process cartridge B, the residual toner collecting portion **40** (second chamber) for collecting the residual toner from the process cartridge B, and a pump unit **37** (air supply unit). Incidentally, the pump unit **37** is provided inside a driving-side side cover **50** of the toner container C (part (a) of FIG. **13**).

8

The toner supplying portion **30** includes a toner accommodating portion **30a** for accommodating the toner as shown in FIG. **6**, FIG. **7**, and parts (a) and (b) of FIG. **13**. The toner accommodating portion **30a** is a first toner accommodating portion for accommodating the toner for being supplied to the outside of the toner container C. The toner accommodating portion **30a** is formed by a supplying portion frame **31** and a supplying portion cover **32**. The supplying portion frame **31** is provided with a toner outlet port (discharge opening) **31a** for permitting discharge of the toner in the toner accommodating portion toward the developing unit **15**. The toner outlet port **31a** is disposed so as to oppose a supply port (supply opening) **21c** (FIG. **5**) of the process cartridge B in a state in which the toner container C is mounted in the printer main body A. The toner outlet port **31a** and the supply port **21c** communicate with each other, so that the toner can be supplied to the process cartridge B. Outside the supply portion frame **31**, a shutter member **34** for opening the toner outlet port **31c** in a closed state in interrelation with mounting of the toner container C into the printer main body A is provided.

In the toner accommodating portion **30a**, a supplying screw **35** as a screw portion for conveying the toner toward the toner outlet port **31a** and a stirring and conveying unit **36** as a stirring member for stirring the toner are provided. The stirring and conveying unit **36** in this embodiment is a stirring and conveying member for stirring and conveying the toner toward the supplying screw **35** by being rotated.

Each of the supplying screw **35** and the stirring and conveying unit **36** conveys and stirs the toner by being rotated about its rotational axis extending in the longitudinal direction. That is, each of the supplying screw **35** and the stirring and conveying unit **36** is an example of a toner conveying means (first toner conveying means) for conveying the toner. The stirring and conveying unit **36** includes a shaft portion **36a** (see also FIG. **22**) to which a driving force is transmitted and a stirring portion **36b** which projects from the shaft portion **36a** in a radial direction and which conveys and stirs the toner by being rotated together with the shaft portion **36a**. The shaft portion **36a** extends in the longitudinal direction so as to penetrate through the toner accommodating portion **30a**. The stirring portion **36b** is formed, for example, with a flexible resin sheet. The toner conveyed to the toner outlet port **31a** by the stirring and conveying unit **36** and the supplying screw **35** is discharged through the toner outlet port **31a** by the pump unit **37**.

As shown in parts (a) and (b) of FIG. **13**, the pump unit **37** includes a pump **37a** constituted so as to change an inside volume thereof by being expanded and contracted in the longitudinal direction of the toner container C and a cam **37b** provided rotatably and coaxially with the pump **37a**. Further, the pump unit **37** includes a link arm **37c** for expanding and contracting the pump **37a** by being moved rectilinearly in the longitudinal direction with rotation of the cam **37b**.

The pump **37a** has a cylindrical outer configuration, and a cylindrical side surface portion thereof is formed in a bellows-like shape.

Accordingly, the pump **37a** is capable of being expanded and contracted in a direction long a center axis of the cylindrical-shaped portion. The cam **37b** and the link arm **37c** constitute a cam mechanism for driving the pump **37a** for converting a rotational driving force inputted to the toner container C into translatory (rectilinear) motion (expanding and contracting motion) in a contraction direction of the pump **37a** and an expansion direction opposite to the contraction direction. Incidentally, the contraction direction of the pump unit **37** is a direction substantially parallel to the

longitudinal direction of the toner container C (i.e., substantially parallel to the arrow Z), and is a direction from the driving side toward the non-driving side of the toner container C.

<Driving Constitution of Toner Supplying Portion>

A driving constitution of the toner supplying portion 30 will be described using FIG. 7 and parts (a) and (b) of FIG. 13. As shown in parts (a) and (b) of FIG. 13, the toner supplying portion 30 includes a stirring drive input portion 38 (first drive input portion) for driving the stirring and conveying unit 36 and a pump/screw drive input portion 39 (second drive input portion) for driving the pump unit 37 and the supplying screw 35. The stirring drive input portion 38 is a driving force receiving portion for driving the stirring and conveying unit 36 (stirring member) by receiving the driving force from the outside of the toner container C. The pump/screw drive input portion 39 is a driving force receiving portion for driving the pump unit 37 and the supplying screw 35 by receiving the driving force from the outside of the toner container C. Each of the stirring and conveying unit 38 and the pump/screw drive input portion 39 is disposed on one end side (driving side) with respect to the longitudinal direction of the toner container C.

The toner container C is provided with the stirring drive input portion 38 and the pump/screw drive input portion 39 separately from each other, so that the stirring and conveying unit 36, the pump unit 37, and the supplying screw 35 can be drive-controlled independently. Specifically, the stirring and conveying unit 36 is continuously driven during the image formation, while the pump unit 37 and the supplying screw 35 can be driven intermittently only at a timing when the supply of the toner to the process cartridge B is needed. The timing when the supply of the toner to the process cartridge B is needed is discriminated by a controller of the printer main body A on the basis of a detection signal of the above-described remaining amount detecting means.

As viewed in the longitudinal direction, adjacent to the stirring drive input portion 38, a stirring driving-side gear 38b for transmitting the rotational driving force to the stirring and conveying unit 36 is disposed. The stirring driving-side gear 38b is provided coaxially with the stirring and conveying unit 36 on one end side with respect to the longitudinal direction, and is rotated integrally with the stirring and conveying unit 36. The stirring driving-side gear 38b rotates the stirring and conveying unit 36 in the R1 direction of FIG. 7 by receiving the driving force from the stirring drive input portion 38. By the rotation of the stirring and conveying unit 36 in the R1 direction, the toner in the toner accommodating portion 30a is conveyed toward the supplying screw 35.

As viewed in the longitudinal direction, adjacent to the pump/screw drive input portion 39, a cam driving gear 39a rotated by receiving a driving force from the pump/screw drive input portion 39 is provided. Adjacent to the cam driving gear 39a, a cam gear 39b rotated by receiving the driving force from the cam driving gear 39a is provided. The cam gear 39b is formed integrally with a cam 37b. For that reason, the cam gear 39b is rotated with rotation of the pump screw drive input portion 39, whereby the cam 37b of the pump unit 37 is rotated. Then, by the rotation of the cam 37b, the link arm 37c moves rectilinearly in the longitudinal direction, so that the pump 37a is expanded and contracted.

As viewed in the longitudinal direction, adjacent to the cam gear 39b, a screw driving gear 39c for transmitting a rotational driving force to the supplying screw 35 is provided. The screw gear 39c is provided coaxially with the supplying screw 35 on one end side with respect to the

longitudinal direction, and is rotated integrally with the supplying screw 35. The screw driving gear 39c rotates the supplying screw 35 by receiving the driving force from the cam gear 39b. By rotation of the supplying screw 35, the toner in the toner accommodating portion 30a is conveyed toward the toner outlet port 31a in the longitudinal direction.

As shown in FIG. 6 and parts (a) and (b) of FIG. 13, at an end portion of the toner container C on the driving side, the driving-side side cover 50 is provided. The driving-side side cover 50 is fixed to the toner accommodating portion 30a (supplying portion frame 31). The driving-side side cover 50 is a part of the toner container C. The driving-side side cover 50 shaft-supports the stirring drive input portion 38 and the pump/screw drive input portion 39 so as to be rotatable.

Further, the driving-side side cover 50 is provided with a positioning boss 50a and a portion-to-be-guided 50b. These members have a function of regulating an attitude of the toner container C when the toner container C is mounted in the printer main body A as (described later).

<Residual Toner Collecting Portion>

Next, an outline of the residual toner collecting portion 40 will be described. As shown in FIG. 8, the residual toner collecting portion 40 includes a residual toner accommodating portion 40a. The residual toner accommodating portion 40a is a second toner accommodating portion for accommodating the toner received from outside of the toner container C. The residual toner accommodating portion 40a is formed by an accommodating portion frame 41 and an accommodating portion cover 42. The accommodating portion cover 42 is provided with a residual toner inlet port (receiving opening) 42a for receiving the residual toner collected from the process cartridge B. The residual toner collecting portion 40 includes a shutter member 43 for opening and closing the residual toner inlet port 42a. The shutter member 43 is opened and closed in an arrow R3 direction in interrelation with mounting and demounting of the toner container C relative to the printer main body A.

As shown in parts (a) and (b) of FIG. 13, in the residual toner accommodating portion 40a, a partitioning member 46, and a first residual toner screw 44 and a second residual toner screw 45, which are a residual toner conveying means (second toner conveying means) for conveying the residual toner in the residual toner accommodating portion 40a, are provided. The first residual toner screw 44 and the second residual toner screw 45 are constituted so as to be rotatable about a rotational axis Ra44 and a rotational axis Ra45, respectively, as shown in FIG. 17. The first residual toner screw 44 conveys the residual toner, dropped from the residual toner inlet port 42a, in the longitudinal direction of the toner container C. The second residual toner screw receives the driving force from the first residual toner screw 44 and conveys the residual toner, conveyed from the first residual toner screw 44, obliquely upward. The rotational axis Ra45 extends in a direction crossing a direction of the rotational axis Ra44. By this, the residual toner can be efficiently accommodated in the residual toner accommodating portion 40a.

To the residual toner accommodating portion 40a, drive is transmitted in the following manner. As shown in parts (a) and (b) of FIG. 13, the stirring and conveying unit 36 is provided with a stirring non-driving-side gear 38a on a side opposite from the above-described stirring driving-side gear 38b with respect to the longitudinal direction. The driving force inputted to the above-described stirring driving-side gear 38b on the driving side of the toner supplying portion is transmitted to a non-driving side of the toner supplying

portion 30 through the stirring and conveying unit 36, and thus is transmitted to the stirring non-driving-side gear 38a.

As viewed in the longitudinal direction, adjacent to the stirring non-driving-side gear 38a, a gear train 710 is provided for transmitting drive to the first residual toner screw 44 in the residual toner accommodating portion 40a. That is, the first residual toner screw 44 is rotated by receiving the driving force from the printer main body A via the stirring drive input portion 38, the stirring driving-side gear 38b, the stirring and conveying unit 36, the stirring non-driving-side gear 38a, and the gear train 710.

As shown in FIG. 6 and parts (a) and (b) of FIG. 13, at an end portion of the toner container C on the non-driving side (residual toner collecting portion 40 side), a non-driving-side side cover 60 is provided. The non-driving-side side cover 60 is fixed to the residual toner accommodating portion 40a (accommodating portion frame 41). The non-driving-side side cover 60 is a part of the frame of the toner container C.

Further, the non-driving-side side cover 60 is provided with a positioning boss 60a and a portion-to-be-guided 60b. These members have a function of regulating an attitude of the toner container C when the toner container C is mounted in the printer main body A (as described later).

<Arrangement of Pump Unit and so on in Longitudinal Direction>

An arrangement of the pump unit 37, the toner supplying portion 30, and the residual toner collecting portion 40 in the longitudinal direction will be described using FIGS. 20, 22, and 23. FIG. 20 is a top (plan) view showing an arrangement of the pump unit 37 of the toner container C. FIG. 22 is a perspective view showing the arrangement of the pump unit 37 of the toner container C. FIG. 23 is a perspective view showing the entirety of the toner container C. For explanation, from FIGS. 20 and 22, the driving-side side cover 50 is omitted.

As shown in FIG. 20, the pump unit 37 is provided together with the stirring drive input portion 38 and the pump/screw drive input portion 39 on the driving side of the toner container C, i.e., on one end side of the arrow Z direction. The pump 37a is contracted in the longitudinal direction, so that the pump unit 37 discharges the toner in the toner accommodating portion 30a together with air toward the developing unit 15 through the toner outlet port 31a.

The toner supplying portion 30 is disposed inside the pump unit 37 with respect to the longitudinal direction. That is, the toner supplying portion is disposed on a side (non-driving side) upstream of the pump unit 37 with respect to the arrow Z direction. Further, the residual toner collecting portion 40 is disposed on a side (non-driving side) upstream of the toner supplying portion with respect to the arrow Z direction. In other words, with respect to the longitudinal direction of the toner container C, i.e., with respect to a rotational axis direction P1 of the stirring and conveying unit 36 (stirring member), the pump 37a, the toner accommodating portion 30a, and the residual toner accommodating portion 40a are arranged in a named order. Further, in other words, the pump 37a, the toner accommodating portion 30a, and the residual toner accommodating portion 40a are aligned in this order in the rotational axis direction P1 of the stirring and conveying unit 36 (stirring member). The rotational axis direction P1 is a direction from the driving side toward the non-driving side of the toner container C along a rotational axis A36 (FIG. 20) of the stirring and conveying unit 36 (stirring member). A width w1 of the toner accommodating portion 30a is wider than a width w2 of the residual toner accommodating portion 40a. In this embodi-

ment, the widths w1 and w2 are 160 mm and 60 mm, respectively, and the width w1 of the toner accommodating portion 30a may preferably be two times or more the width w2 of the residual toner accommodating portion 40a.

For this reason, compared with the case where with respect to the rotational axis direction P1 (longitudinal direction of the toner container C), the pump unit 37, the residual toner accommodating portion 40a, and the toner accommodating portion 30a are arranged in this order, it becomes possible to realize efficient toner discharge with the air. That is, in this embodiment, when an air conveying force during the contraction of the pump 37a is transmitted to the toner outlet port 31a, there is no need that the air passes by toner the position of the residual toner accommodating portion 40a, and therefore, an air conveying distance can be a short distance, so that it becomes possible to convey the air at high efficiency.

Further, compared with the case where with respect to the rotational axis direction P1, the toner accommodating portion 30a, the pump unit 37, and the residual toner accommodating portion 40a are arranged in this order, when the driving force is transmitted from the printer main body A to the pump 37a, in this embodiment, there is no need that the driving force is transmitted through the toner accommodating portion 30. Therefore, in this embodiment, an additional gear train for transmitting the drive from the toner accommodating portion 30a to the pump 37a is not needed, and therefore, it becomes possible to improve drive transmission efficiency from the printer main body A to the pump 37a in entirety of a drive transmitting system.

Incidentally, in the case where the toner container C is viewed in the rotational axis direction P1, the photosensitive drum 37a may preferably at least partially overlap with the toner accommodating portion 30a (FIG. 21). Further, in the case where the toner container C is viewed in the rotational axis direction P1, the toner accommodating portion 30a may preferably at least partially overlap with the residual toner accommodating portion 40a (FIG. 21). By this constitution, it becomes possible to downsize the toner container C with respect to a direction (short direction of the toner container C) perpendicular to the rotational axis direction P1 (longitudinal direction of the toner container C).

<Arrangement of Toner Outlet Port in Longitudinal Direction>

An arrangement of the toner outlet port 31a in the longitudinal direction will be described using FIG. 20. As shown in FIG. 20, the toner outlet port 31a is disposed inside the pump unit 37, the stirring drive input portion 38, and the pump/screw drive input portion with respect to the longitudinal direction, i.e., on an outlet port side (non-driving side) of the arrow Z direction. In addition, with respect to the longitudinal direction, the toner outlet port 31a is disposed on a side closer to the pump unit 37 than to a longitudinal center Z0 of the toner accommodating portion 30a, i.e., on a downstream side (driving side) of the arrow Z direction.

Here, the longitudinal center Z0 of the toner accommodating portion 30a is an intermediate position, with respect to the rotational axis direction P1 (longitudinal direction) of the stirring and conveying unit 37, between a position Z1 of a side wall 30a1 on one side (pump side, driving side) of the toner accommodating portion 30a with respect to the longitudinal direction and a position Z2 of an inner surface of a surface wall 30a2 on the other side (residual toner accommodating portion side, non-driving side) of the toner accommodating portion 30a with respect to the longitudinal direction. The position Z1 of the side wall 30a1 can be based on a position of a peripheral portion of an opening through

13

which the side wall **30a1** communicates with the inside space of the pump **37a**. The position of the side wall **30a2** can be based on a position of a portion where the side wall **30a2** opposes the pump **37a** with respect to the longitudinal direction. Accordingly, the toner outlet port **31a** is disposed in a position closer to the pump **37a** than to the intermediate position (**Z0**) between the side wall **30a2** on the residual toner accommodating portion side and the side wall **30a1** on the pump side of the toner accommodating portion **30a** with respect to the rotational axis direction **P1** of the stirring and conveying unit **36**. That is, the outlet port of the first toner accommodating portion is disposed in a position of the first toner accommodating portion closer to the pump than to the second toner accommodating portion with respect to the rotational axis direction of the stirring member.

In order to efficiently discharge the toner through the toner outlet port **31a** by the air conveying portion (positive pressure) generating during contraction of the pump **37a**, it is preferable that a distance from the pump **37a** to the toner accommodating portion **30a** is short. In this embodiment, the toner outlet port **31a** is disposed on a side closer to the pump **37a** than to the longitudinal center **Z0** of the toner accommodating portion **30a**, so that air conveying efficiency of the pump **37a** can be enhanced. However, in the case where the toner conveying force can be sufficiently obtained, the toner outlet port **31a** may be disposed at the longitudinal center **Z0** or on a side where the toner outlet port **31a** is more distant from the pump **37a** than from the longitudinal center **Z0**.

In this embodiment, inside the toner accommodating portion **30a**, flow passages **37d** and **37e** for guiding the air from the pump **37a** to the toner outlet port **31a** are provided (FIG. 7). The flow passage **37d** extends in the longitudinal direction in an inside of the toner accommodating portion **30a** along a center line **37a1** of the pump **37a**. The flow passage **37e** extends from the flow passage **37d** in a direction which is a direction crossing the center line **37a1** and which directs toward the toner outlet port **31a**. As described above, the toner outlet port **31a** is disposed on the side closer to the pump **37a** than the longitudinal center **Z0** of the toner accommodating portion **30a**, so that the flow passage **37d** can be shortened, and correspondingly, a space in which the toner can be accommodated in the toner accommodating portion **30a** can be extended.

<Arrangement of Pump Unit in Short Direction>

An arrangement of the pump unit **37**, the toner supplying portion **30**, and the residual toner collecting portion **40** in the short direction will be described using FIGS. 7, 21, and 22. FIG. 21 is a side view showing an arrangement of the pump unit **37** of the toner container **C**. Also, in FIG. 21, for explaining the arrangement of the pump unit **37**, the driving-side side cover **50** is omitted.

FIGS. 7 and 21 show an element arrangement of the toner container **C** in a cross section of the toner container **C** in an imaginary flat plane perpendicular to the rotational axis of the stirring and conveying unit **36**. An attitude of the toner container **C** in FIGS. 7 and 21 is an attitude in a state in which the toner container **C** is mounted in the printer main body **A** (hereinafter, this attitude is referred to as a main body mounting attitude). In the main body mounting attitude, a line connecting a rotational axis of the stirring and conveying unit **36** and a rotational axis of the supplying screw **35** (hereinafter, this line is referred to as a conveying inter-axial rectilinear line **L**) is substantially horizontal. Specifically, an angle θ (conveying inter-axial angle) formed between the conveying interaxial rectilinear line **L** and the horizontal direction (arrow **X** direction) is within about $\pm 5^\circ$.

14

For that reason, the element arrangement described below holds also when the attitude of the toner container **C** is such an attitude that the conveying inter-axial rectilinear line **L** is horizontal.

In the main body mounting attitude of the toner container **C**, the center line **37a1** of the pump **37a** is disposed above the toner outlet port **31a** (on an upper side of the direction of gravity), i.e., on a downstream side of the arrow **Y** direction. Here, the center line **37a1** is an imaginary rectilinear line extending in the expansion and contraction direction of the pump **37a** and is a center axis of the pump **37a** having a substantially cylindrical shape. In the case where the shape of the pump **37a** is a shape (for example, polygonal pillar-like shape) other than the cylindrical shape, the center line **37a1** of the pump **37a** is an imaginary rectilinear line extending in the expansion and contraction direction and is a rectilinear line passing through a center of a circle circumscribed on an outer configuration of the pump **37a** as viewed in the expansion and contraction direction.

The pump **37a** contracts in the longitudinal direction as described above, so that the pump **37a** imparts the air conveying force to the toner outlet port **31a**. At this time, during expansion of the pump **37a** after the toner is conveyed, negative pressure to the pump **37a** acts on the toner interposed in the toner outlet port **31a**. However, the pump **37a** is provided on the upper side of the toner outlet port **31a** with respect to the direction of gravity, and therefore, back-flow of the toner with rise of the toner due to the negative pressure is suppressed by gravity. Therefore, inside clogging of the pump **37a** by the back-flow of the toner during expansion of the pump **37a** is unlikely to occur, so that it becomes possible to maintain the air conveying efficiency of the pump **37a**.

Further, in the main body mounting attitude of the toner container **C**, the toner outlet port **31a** is disposed above (on the upper side of the direction of gravity) at least a lowest portion of a bottom **30b** of the toner accommodating portion **30a**, i.e., on a downstream side of the arrow **Y** direction. As a comparison example, when the toner outlet port **31a** is provided, for example, at the same height as the bottom **30b** or in a position lower in height than the bottom **30b**, the toner in the toner accommodating portion **30a** is compressed by a self-weight thereof and a bulk density thereof fluctuates, with the result that there is a possibility that a toner discharge amount is not stabilized. On the other hand, as in this embodiment, when the toner outlet port **31a** is disposed above the bottom of the toner accommodating portion **30a**, it becomes possible to stabilize the toner discharge amount.

Specifically, in this embodiment, the toner supplied to the toner outlet port **31a** through the supplying screw **35** is scooped upward from the bottom **30b** by rotation of the stirring and conveying unit **36**, and therefore, the toner is sufficiently fluidized by a stirring action of the toner. Accordingly, the pump **37a** is capable of imparting the air conveying force to the toner which is sufficiently fluidized by the stirring and conveying unit **36** and which is made substantially constant in bulk density, so that the toner discharge amount is stabilized.

<Arrangement of Pump/Screw Driving Constitution in Longitudinal Direction>

An arrangement of the pump/screw constitution in the longitudinal direction will be described using parts (a) and (b) of FIG. 13 and FIG. 20. As shown in FIG. 20, the pump/screw drive input portion **39** as a drive input portion is disposed outside the pump **37a** and the toner outlet port **31a** with respect to the longitudinal direction, i.e., on the downstream side (driving side) of the arrow **Z** direction. In

15

other words, in the toner supplying portion 30, with respect to the rotational axis direction P1 (direction from the downstream side toward the upstream side of the arrow Z direction) of the stirring and conveying unit 36 (stirring member), the pump/screw drive input portion 39, the pump 37a, and the toner outlet port 31a are disposed in a named order. By employing this constitution, the pump/screw drive input portion 39 is disposed at an outer end portion of the toner container C with respect to the longitudinal direction, and therefore, it becomes possible to suppress a space of the main body-side driving means with respect to the longitudinal direction when receiving the driving force from the printer main body A.

In addition, as shown in parts (a) and (b) of FIG. 13, the screw driving gear 39c as the driving gear is disposed between the pump 37a and the toner accommodating portion 30a. In other words, in the toner supplying portion 35, in the rotational axis direction P1 (direction from the downstream side toward the upstream side of the arrow Z direction) of the stirring and conveying unit 36 (stirring member), the pump 37a, the screw driving gear 39c, and the toner accommodating portion 30a are disposed in this order.

By employing the above-described constitution, it becomes possible to realize drive transmission to the screw member while suppressing the space of the main body-side driving means with respect to the longitudinal direction when the screw member receives the driving force from the printer main body A.

<Arrangement of Pump/Screw Driving Constitution in Short Direction>

An arrangement of the pump/screw driving constitution in the short direction will be described using FIGS. 13 and 21. As shown in FIG. 21, in the main body mounting attitude, a line connecting a rotational axis of the pump/screw drive input portion 39 and an opening center of the toner outlet port 31a (hereinafter, this line is referred to as a discharge inter-axial rectilinear line M) is substantially horizontal. Specifically, an angle q (discharge inter-axial angle) between the discharge inter-axial rectilinear line M and the horizontal direction (arrow X direction) is about $+5^\circ$. For that reason, an element arrangement described below holds when the attitude of the toner container C is such an attitude that the discharge inter-axial rectilinear line M is horizontal.

In the main body mounting attitude of the toner container C, the center line 37a1 of the pump 37a is disposed between the pump/screw drive input portion 39 and the toner outlet port 31a with respect to the horizontal direction (arrow X). Further, the rotational axis of the screw driving gear 39c is disposed between the pump 37a and the toner outlet port 31a with respect to the horizontal direction. In other words, in the toner supplying portion 35, from the upstream side of the arrow X direction, the pump/screw drive input portion 39, the pump 37a, the screw driving gear 39c, and the toner outlet port 31a are disposed in a named order.

By employing this constitution, the pump 37a is provided in a position closer to the toner outlet port 31a than the pump screw drive portion 39 is. For this reason, compared with the case where the pump 37a is provided in a position more distant with respect to the horizontal direction of the toner container C from the toner outlet port 31a than the pump/screw input portion 39 is, the air conveying distance is a short distance, so that it becomes possible to convey the air with high power transmitting efficiency.

Incidentally, in this embodiment, the two drive input portions 38 and 39 through which drive can be independently inputted to the toner container C, so that even when the pump/screw drive input portion 39 is not driven, the

16

stirring drive input portion 38 can be driven. That is, even when the toner supplying portion 30 does not supply the toner to the process cartridge B, a state in which the residual toner can be collected can be maintained by driving the first residual toner screw 44 and the second residual toner screw 45 of the residual toner collecting portion 40.

Further, drive input from the printer main body A to the toner container C can be integrated on one end side (first end side with respect to the rotational axis direction P1 of the stirring member) of the toner container C with respect to the longitudinal direction, so that the gear train of the printer main body A can be simplified. In this embodiment, the driving force inputted to the stirring drive input portion 38 on one side of the toner supplying portion 30 with respect to the longitudinal direction is transmitted to the other side of the toner supplying portion 30 with respect to the longitudinal direction by using the stirring and conveying unit 36 penetrating through the frame (supplying portion frame 31) of the toner supplying portion 35. That is, the toner container C is constituted so that the driving force received on the first end side of the toner accommodating portion 30a with respect to the rotational axis direction P1 of the stirring member is transmitted to a second end side of the toner accommodating portion 30a with respect to the rotational axis direction P1 through the stirring member. By this, it becomes possible to realize drive transmission to the first residual toner screw 44 positioned on the other side of the toner supplying portion 30 with respect to the longitudinal direction.

Incidentally, there is no need that the driving constitution of the toner container C is limited to the above-described constitution. For example, a constitution in which the first residual toner screw 44 is driven by providing another gear train on the other side of the printer main body A with respect to the longitudinal direction may be employed. However, by employing the driving constitution described in this embodiment, on the other side of the printer main body A with respect to the longitudinal direction, there is no need to increase the gear train for driving the residual toner collecting portion 40. Therefore, the residual toner can be accommodated in the toner container C without upsizing the toner container C and the printer main body A with respect to the axial direction of the photosensitive drum 11, and thus is preferable.

<Mounting and Demounting Method of Process Cartridge B and Toner Container C>

Next, a mounting and demounting method of the process cartridge B and the toner container C relative to the printer main body A will be described using parts (a) and (b) of FIG. 11 and parts (a) to (c) of FIG. 12. Parts (a) and (b) of FIG. 11 are perspective views for illustrating mounting of the discharge B and the toner container C into the printer main body A. Parts (a) to (c) of FIG. 12 are side views for illustrating the mounting of the process cartridge B and the toner container C into the printer main body A.

As shown in part (a) of FIG. 11, inside the printer main body A, a mounting portion, which is a space for mounting the process cartridge B and the toner container C, is provided. On an outer surface of the printer main body A, an openable door 107 rotatable (openable) about a rotational axis R5 relative to the printer main body A is provided. Parts (a) and (b) of FIG. 11 show a state in which the openable door 107 is open. The openable door 107 is opened, so that the mounting portion of the inside of the printer main body A is exposed to the outside of the printer main body A.

17

Further, the printer main body A includes guiding portions **108** and **109**.

As shown in parts (a) and (b) of FIG. 9, at opposite end portions of the process cartridge B with respect to the longitudinal direction, upper bosses **93** and **94** and lower bosses **95** and **96** are provided. The stay **21** of the process cartridge B includes toner container positioning portions **21a** and **21b**.

The toner container C is provided with positioning bosses **50a** and **60a** and portions-to-be-guided **50b** and **60b** as shown in parts (a) and (b) of FIG. 13. The positioning bosses **50a** and **60a** are provided on opposite end sides with respect to the longitudinal direction of the toner container C, and the portions-to-be-guided **50b** and **60b** are also provided on the opposite end sides with respect to the longitudinal direction of the toner container C. Further, with respect to a mounting direction (arrow D direction in part (b) of FIG. 11), the portions-to-be-guided **50b** and **60b** are positioned on a side upstream of the positioning bosses **50a** and **60a**.

First, the process cartridge B is mounted in the printer main body A. As shown in part (a) of FIG. 11 and part (a) of FIG. 12, the process cartridge B is inserted in the arrow D direction while being guided by the guiding portions **108** and **109**. At that time, movement of the process cartridge B is guided by sandwiching the guiding portion **108** by the upper boss **93** and the lower boss **95** (part (b) of FIG. 9) and by sandwiching the guiding portion **109** by the upper boss **94** and the lower boss **96**. The direction (arrow D) in which the process cartridge B is moved along the guiding portions **108** and **109** is the mounting direction of the process cartridge B.

After the process cartridge B is mounted in the printer main body A, the toner container C is mounted into the printer main body A. As shown in part (b) of FIG. 11 and part (b) of FIG. 12, the portions-to-be-guided **50b** and **60b** of the toner container C are placed on the guiding portions **108** and **109** of the printer main body A, respectively, and are inserted in the arrow D direction. The direction in which the toner container C is moved along the guiding portions **108** and **109** is a mounting direction of the toner container C.

Part (c) of FIG. 12 shows a state in which the toner container C is mounted to an insertion completion position. In this state, the positioning bosses **50a** and **60a** (parts (a) and (b) of FIG. 13) of the toner container C enter the toner container positioning portions **21a** and **21b** (part (b) of FIG. 9) of the process cartridge B, respectively. In this state, leading end portions of the portions-to-be-guided **50b** and **60b** with respect to the mounting direction are separated from the guiding portions **108** and **109**, and trailing end portions of the portions-to-be-guided **50b** and **60b** with respect to the mounting direction contact the guiding portions **108** and **109**. By this, the toner container C is positioned to the process cartridge B. Further, the trailing ends of the portions-to-be-guided **50b** and **60b** contact the guiding portions **108** and **109**, so that a position of the toner container C in the printer main body A is determined.

When the openable door **107** is closed after the process cartridge B and the toner container C are mounted, the printer **1** is in a state in which image formation is capable of being executed.

When the toner container C and the process cartridge B are demounted (removed), the procedure is performed in a reverse order to the above-described order. That is, after the openable door **107** is opened, it is only required that first, the toner container C is pulled out in a direction opposite to the mounting direction (arrow D) and then the process cartridge B is pulled out in the direction opposite to the mounting direction (arrow D).

18

<Residual Toner Conveying Constitution on Inside of Cleaning Unit>

A residual toner conveying constitution on an inside of the cleaning unit **10** will be described using FIGS. 3, 4, and 14. FIG. 14 is a sectional view of the cleaning unit **10** in which a cross section of the cleaning unit **10** cut along a horizontal surface is viewed from above.

As shown in FIGS. 3, 4, and 14, the cleaning unit **10** includes the first residual toner conveying passage **10b** extending substantially parallel to the direction (drum axis direction) of the rotational axis of the photosensitive drum **11** and the second residual toner conveying passage **10c** extending in a direction substantially perpendicular to the drum axis direction. In the first residual toner conveying passage **10b**, a first residual toner conveying member **70** is provided, and in the second residual toner conveying passage **10c**, a second residual toner conveying member **71** is provided. The second residual toner conveying passage **10c** and the second residual toner conveying member **71** are disposed inside opposite end portions of the cleaning blade **17** with respect to the drum axis direction (FIG. 14).

As described above, the residual toner on the photosensitive drum **11** is collected in the residual toner primary accommodating portion **10a** by the cleaning blade **17**. When the residual toner primary accommodating portion **10a** is filled with the residual toner, the residual toner reaches the first residual toner conveying passage **10b**. The residual toner in the first residual toner conveying passage **10b** is conveyed from one side toward the other side by a helical portion **70a** provided in the first residual toner conveying member **70**, and then reaches the second residual toner conveying passage **10c**. The residual toner in the second residual toner conveying passage **10c** is conveyed by the helical portion **71a** of the second residual toner conveying member **71** in a direction perpendicular to the drum axis direction and toward above the cleaning blade **17**. Then, the residual toner conveyed to an end portion of the second residual toner conveying member **71** is discharged from a residual toner outlet port **72** (FIG. 4) to the residual toner inlet port **42a** (FIG. 13) of the residual toner collecting portion **40**.

The residual toner outlet port **72** is an opening provided in the cleaning unit **10** for permitting discharge of the residual toner from the process cartridge B. The residual toner inlet port **42a** is an opening provided in the residual toner collecting portion **40** of the toner container C in order to receive the residual toner discharged from the process cartridge B.

<Driving Constitution of Residual Toner Conveying Member>

A driving constitution of the first residual toner conveying member **70** and the second residual toner conveying member **71** will be described using FIG. 15. FIG. 15 is a perspective view of the process cartridge B, showing the driving constitution of the residual toner conveying members. In FIG. 15, for explanation, the side cover **7** and the bearing member **5** of the process cartridge B are omitted from illustration.

As shown in FIG. 15, the cleaning unit **10** includes a driving gear **70b** for transmitting the drive to the first residual toner conveying member **70** and a bevel gear **71b** for transmitting the drive to the second residual toner conveying member **71**. To the driving gear **70**, the drive is transmitted through an idler gear train **601** from a developing coupling **155** provided coaxially with the swing axis **8**. Incidentally, the developing coupling **155** is (one of) input member(s) through which the drive is transmitted from the printer main body A to the process cartridge B.

To the bevel gear **71b**, the drive is transmitted from the driving gear **70b** through the idler gear **602** and a penetration (insertion) shaft **75**. The penetration shaft is an axial member penetrating through the cleaning unit in a drum axis direction. At one end of the penetration shaft **75**, a gear **75b** engageable with the idler gear **602** is provided, and at the other end of the penetration shaft **75**, a bevel gear **75a** engageable with the bevel gear **71b** is provided. Thus, by the drive transmission from the driving gear **70b** through the idler gear **602** and the penetration shaft **75**, the first residual toner conveying member **70** and the second residual toner conveying member **71** are driven in interrelation with each other, so that the residual toner can be conveyed.

Incidentally, the bevel gear **71b** and the bevel gear **75a** may be replaced with a screw gear or a worm gear. Further, in this embodiment, rotation numbers of the first residual toner conveying member **70** and the second residual toner conveying member **71** are the same, but in order to enhance conveying efficiency, the rotation number of the second residual toner conveying member **71** may be made more than the rotation number of the first residual toner conveying member **70**.

<Drive Constitution of Residual Toner Collecting Portion>

Details of a driving constitution of the residual toner collecting portion will be described using FIGS. **1**, **17**, **18**, and **19**. FIGS. **1** and **17** are exploded perspective views showing a drive transmission mechanism (residual toner driving train) by the stirring non-driving-side gear **38a** and the gear train **710**. FIG. **18** is a detailed view of a residual toner driving train. FIG. **19** is a front view of a toner container according to a comparison example.

As shown in FIGS. **1**, **17**, and **18**, the stirring non-driving-side gear **38a** is shaft-supported rotatably by a shaft-supporting portion **703** provided on the supplying portion frame **31**. The shaft-supporting portion **703** is provided coaxially with the stirring and conveying unit **36**. The stirring non-driving-side gear **38a** rotates about a rotational axis **Ra36** integrally with the stirring and conveying unit **36** on the other end side (non-driving side) of the stirring and conveying unit **36** with respect to the longitudinal direction, so that the driving force is transmitted to the gear train **710**. The gear train **710** is constituted by a first idler gear **700**, a second idler gear **701**, and a screw gear **702**. The contact gear **702** is connected to a first residual toner screw **44** so as to rotate about a rotational axis **Ra44** integrally with the first residual toner screw **44**.

The screw gear **702** functions as an input gear for inputting the driving force to the first residual toner screw **44** as a residual toner conveying means. Incidentally, the screw gear **702** is provided coaxially with the first residual toner screw **44**, and therefore, is positioned below the residual toner inlet port **42a** of the residual toner collecting portion **40**. Further, the screw gear **702** is positioned below the stirring non-driving-side gear **38a**. Thus, the driving force is transmitted by the gear train **710** to the first residual toner screw **44** disposed in a position lower than the stirring non-driving-side gear **38a** and the residual toner inlet port **42a**, so that the residual toner can be efficiently charged into the residual toner collecting portion **40**.

Incidentally, as a drive transmitting portion, for example, a belt transmitting mechanism may be used in place of the gear train **710**.

The supplying portion frame **31** is provided with a first shaft supporting portion **704** shaft-supporting the first idler gear **700** and a second shaft supporting portion **705** shaft-supporting the second idler gear **701**. The accommodating portion frame **41** is provided with a third shaft supporting

portion **706** shaft-supporting the first idler gear **700** and a fourth shaft supporting portion **707** shaft-supporting the second idler gear **701**.

The first idler gear **700** is supported at both ends by the first shaft supporting portion **704** (first supporting portion) and the third shaft supporting portion **706** (second supporting portion). The second idler gear **701** is supported at both ends by the second shaft supporting portion **705** (third supporting portion) and the fourth shaft supporting portion **707** (fourth supporting portion).

The screw gear **702** is rotatably shaft-supported by a shaft supporting portion **708** provided on the accommodating portion frame **41**. The shaft supporting portion **708** is provided coaxially with the first residual toner screw **44**. The screw gear **702** rotationally drives the first residual toner screw **44** by receiving a rotational driving force from the stirring non-driving-side gear **38a** through the first idler gear **700** and the second idler gear **701**.

As shown in FIG. **18**, the stirring non-driving-side gear **38a** and each of gears of the gear train **710** in this embodiment are helical gears. For this reason, by the drive transmission, the stirring non-driving-side gear **38a** and the gear train **710** receive a thrust force in the longitudinal direction, and contact the supplying portion frame **31** and the accommodating portion frame **41**, respectively. Accordingly, when compared with the case where the stirring non-driving-side gear **38a** and the gear train **710** are constituted by spur gears, a dimension tolerance with respect to the longitudinal direction can be decreased for stably maintaining a position of the gear train with respect to the longitudinal direction. By this, it becomes possible to downsize the toner container **C** with respect to the longitudinal direction.

In this embodiment, a constitution in which the stirring non-driving-side gear **38a** and the gear train **710** are disposed between the supplying portion frame **31** and the accommodating portion frame **41** with respect to the longitudinal direction and in which the residual toner collecting portion **40** is driven by the driving force inputted to the supplying portion frame **31** on a side opposite from the accommodating portion frame **41** was employed. For this reason, drive input to the toner container **C** including the toner supply to the process cartridge **B** and the residual toner collection from the process cartridge **B** can be completed.

Description will be made specifically using the comparison example of FIG. **19**. In this comparison example, the drive of the toner container **C** on the residual toner collecting portion **40** side is inputted to a drive input portion **711** provided on the other end side (the non-driving side of this embodiment described above) of the toner container **C** with respect to the longitudinal direction. That is, in this comparison example, on one end side and the other end side of the toner container **C** with respect to the longitudinal direction, a drive input portion (the above-described stirring drive input portion **38** and the above-described pump/screw drive input portion **39**) to the toner supplying portion **30** and the drive input portion **711** to the residual toner collecting portion are disposed, respectively. In this constitution, corresponding to projection of the drive input portion **711** on the other end side with respect to the longitudinal direction, a size of the toner container **C** with respect to the longitudinal direction becomes large. Further, a constitution for inputting the drive to the drive portion **711** for the residual toner collecting portion **4** is provided on the printer main body **A** side, so that the constitution leads to upsizing of the printer main body **A**.

On the other hand, according to this embodiment described above, the drive input to the toner container **C** is

21

completed on one end side with respect to the longitudinal direction, so that it becomes possible to downsize the toner container C and the printer main body A with respect to the longitudinal direction. Further, in the case where the size of the toner container C of the comparison example with respect to the longitudinal direction is caused to coincide with a size of the toner container C of this embodiment, a space with respect to the longitudinal direction is effectively utilized, so that it becomes possible to realize a large volume of the toner accommodating portion 30a and the residual toner accommodating portion 40a.

Further, the first residual toner screw 44 is driven by utilizing the driving force of the stirring and conveying unit 36, and therefore, a constitution in which a rotation driving shaft as a separate component part is penetrated from the supplying portion frame 31 and rotation drive is transmitted to the first residual toner screw 44 is not needed. For that reason, compared with a constitution in which the stirring and conveying unit 36 and the rotation drive shaft as the separate component part are arranged in a cross-sectional direction of the toner container C, downsizing of the toner container C with respect to the cross-sectional direction can be realized. The cross-sectional direction is an in-plane direction in an imaginary flat plane perpendicular to the longitudinal direction of the toner container C. Further, the toner accommodating portion 30a and the residual toner accommodating portion 40a can be increased in volume by effectively utilizing a space with respect to the cross-sectional direction.

Further, in this embodiment, the first idler gear 700 and the second idler gear 701 are supported at both ends thereof by the supplying portion frame 31 and the accommodating portion frame 41, respectively. For this reason, compared with a constitution in which each of the gears is supported at one end, falling of each gear due to torque transmission can be reduced. That is, even when a face width of each gear is narrowed, transmission efficiency is maintained. For that reason, by narrowing the face width of each gear, it becomes possible to downsize the toner container C with respect to the longitudinal direction while maintaining transmission efficiency of the gear train. Further, the toner accommodating portion 30a and the residual toner accommodating portion 40a can be increased in volume by effectively utilizing the space with respect to the longitudinal direction.

Another Embodiment

In the above-described embodiment, the image forming apparatus with the constitution in which the toner container C is mounted after the process cartridge B is mounted in the printer main body A was described. The present invention is not limited thereto. For example, a constitution in which a unit having a function of the process cartridge B is incorporated in the printer main body A in an undetachably mountable manner and in which the toner container C is detachably mounted in the printer main body A provided with the unit can be employed.

SUMMARY OF THE PRESENT INVENTION

The present invention encompasses at least the following constitutions.

(Constitution A)

A toner container comprising:

- a first chamber configured to accommodate toner and provided with an outlet port through which the toner is discharged outside of the toner container;

22

- a second chamber provided with an inlet port and configured to accommodate toner to be received from an outside of the toner container through the inlet port;
 - a stirring member configured to stir the toner accommodated in the first chamber and rotatable about a first rotational axis;
 - an air supply unit configured to supply air for discharging the toner accommodated in the first chamber to an outside of the toner container through the outlet port; and
 - a driving force receiving portion rotatable about a second rotational axis by receiving a driving force from the outside and for driving the air supply unit,
- wherein in a direction of the first rotational axis, the driving force receiving portion, the air supply unit, and the outlet port are provided in this order, and
- wherein in a cross section perpendicular to the first rotational axis, with respect to an imaginary rectilinear line passing through the second rotational axis and the outlet port, a position of a center axis of the air supply unit is positioned between a position of the second rotational axis and a position of the outlet port.

(Constitution A1)

The toner container of the constitution A further comprising:

- a screw provided in the first chamber and for conveying the toner toward the outlet port by being rotated; and
 - a driving gear for transmitting a driving force from the driving force receiving portion to the screw and mounted on the screw at a longitudinal end portion,
- wherein the air supply unit, the driving gear, and the first chamber are disposed in this order in the direction of the first rotational axis.

(Constitution A2)

The toner container of the constitution A1, wherein in a cross section perpendicular to the first rotational axis, with respect to the imaginary rectilinear line, a position of a third rotational axis of the driving gear is positioned between the position of the center axis of the air supply unit and the outlet port.

(Constitution B)

A toner container detachably mountable to a main assembly of an image forming apparatus, wherein the main assembly includes a photosensitive drum and a developing unit for accommodating toner supplied to the photosensitive drum, the toner container comprising:

- a first chamber configured to accommodate toner for being supplied to the developing unit and provided with an outlet port for permitting discharge of the toner;
 - a second chamber configured to accommodate the toner collected from the photosensitive drum and provided with an inlet port for permitting reception of the toner;
 - a stirring member configured to stir the toner accommodated in the first chamber and rotatable about a first rotational axis;
 - an air supply unit configured to supply air for discharging the toner accommodated in the first chamber to an outside of the toner container through the outlet port; and
 - a driving force receiving portion for driving the air supply unit by receiving a driving force from the main assembly,
- wherein in a direction of the first rotational axis, the driving force receiving portion, the air supply unit, and the outlet port are provided in this order, and
- wherein in a cross section perpendicular to a direction of the first rotational axis, with respect to an imaginary

23

rectilinear line passing through a second rotational axis of the driving force receiving portion and the outlet port, a position of a center axis of the air supply unit is positioned between a position of the second rotational axis and a position of the outlet port.

(Constitution C)

A toner container comprising:

- a first chamber configured to accommodate toner and provided with an outlet port through which the toner is discharged outside of the toner container;
 - a second chamber provided with an inlet port and configured to accommodate toner to be received from an outside of the toner container through the inlet port;
 - a first toner conveying means provided in the first chamber and for conveying the toner by being rotated about a rotational axis, the first toner conveying means penetrating through the first chamber in a direction of the rotational axis;
 - a second toner conveying provided in the second chamber and for conveying the toner;
 - a driving force receiving portion for driving the first toner conveying means by receiving a driving force from the outside; and
 - a drive transmitting portion for transmitting the driving force from the first toner conveying means to the second toner conveying means,
- wherein the first chamber and the second chamber are aligned in a direction of the rotational axis,
- wherein in the direction of the rotational axis, the driving force receiving portion is provided on the first chamber on a side opposite from a side where the second chamber is provided, and
- wherein in the direction of the rotational axis, the drive transmitting portion is provided between the first chamber and the second chamber.

(Constitution C1)

The toner container of the constitution C further comprising:

- a screw provided in the first chamber, the screw conveying the toner toward the outlet port in a direction along the direction of the rotational axis,
- wherein the first toner conveying means conveys the toner toward the screw in a direction crossing the direction of the rotational axis.

(Constitution C2)

The toner container of the constitution C further comprising:

- a second driving force receiving portion for driving the screw by inputting the driving force from the outside thereto in a case that the driving force receiving portion is a first driving force receiving portion.

(Constitution C3)

The toner container of the constitution C, wherein as viewed in the direction of the rotational axis, a position of a rotational axis of the first toner conveying means and a position of a rotational axis of the second toner conveying means are different from each other, and

- wherein the drive transmitting portion is a gear train for forming a drive transmitting passage between the first toner conveying means and the second toner conveying means.

(Constitution C4)

The toner container of the constitution C, wherein at least a part of the gear train is a helical gear.

(Constitution C5)

The toner container of the constitution C3, wherein at least a part of the gear train is supported by a first supporting

24

portion provided on a surface of the first chamber on the second chamber side in the direction of the rotational axis and by a second supporting portion provided on a surface of the second chamber on the first chamber side in the direction of the rotational axis.

(Constitution C6)

The toner container of the constitution C3, wherein the gear train includes an input gear rotatable about the rotational axis of the second toner conveying means integrally with the second toner conveying means, and the input gear is positioned below the inlet port when the toner container assumes an attitude when mounted in the main assembly.

(Constitution D)

A toner container detachably mountable to a main assembly of an image forming apparatus, wherein the main assembly includes a photosensitive drum and a developing unit for accommodating toner supplied to the photosensitive drum, the toner container comprising:

- a first chamber configured to accommodate toner for being supplied to the developing unit and provided with an outlet port for permitting discharge of the toner;
 - a second chamber configured to accommodate the toner collected from the photosensitive drum and provided with an inlet port for permitting reception of the toner;
 - a first toner conveying means provided in the first chamber and for conveying the toner by being rotated about a rotational axis, the first toner conveying means penetrating through the first chamber in a direction of the rotational axis;
 - a second toner conveying provided in the second chamber and for conveying the toner;
 - a driving force receiving portion for receiving, from the main assembly, a driving force for driving the first toner conveying means; and
 - a driving force transmitting portion for transmitting the driving force from the first toner conveying means to the second toner conveying means,
- wherein the first chamber and the second chamber are aligned in a direction of the rotational axis,
- wherein in the direction of the rotational axis, the driving force receiving portion is provided on the first chamber on a side opposite from a side where the second chamber is provided, and
- wherein in the direction of the rotational axis, the driving force transmitting portion is provided between the first chamber and the second chamber.

While the present invention has been described with reference to exemplary embodiments, it is to be understood that the invention is not limited to the disclosed exemplary embodiments. The scope of the following claims is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures and functions.

This application claims the benefit of Japanese Patent Application No. 2022-102266 filed on Jun. 24, 2022, which is hereby incorporated by reference herein in its entirety.

What is claimed is:

1. A toner container comprising:

- a first chamber configured to accommodate toner and provided with an outlet port through which the toner is discharged outside of the toner container;
- a second chamber provided with an inlet port and configured to accommodate toner to be received from an outside of the toner container through the inlet port;
- a stirring member configured to stir the toner accommodated in the first chamber and to rotate about a rotational axis; and

25

an air supply unit configured to supply air for discharging the toner accommodated in the first chamber to an outside of the toner container through the outlet port, wherein the air supply unit, the first chamber, and the second chamber are aligned in this order in a direction of the rotational axis.

2. The toner container according to claim 1, wherein the outlet port is provided at a position closer to the air supply unit than to the second chamber in the direction of the rotational axis.

3. The toner container according to claim 1, further comprising a driving force receiving member configured to receive a driving force for driving the stirring member from the outside of the toner container, wherein the air supply unit is provided between the outlet port and the driving force receiving member in a direction from the driving force receiving member toward the outlet port and perpendicular to the rotational axis.

4. The toner container according to claim 1, further comprising a driving force receiving member configured to receive a driving force for driving the air supply unit from the outside of the toner container, wherein the air supply unit is provided between the outlet port and the driving force receiving member in a direction from the driving force receiving member toward the outlet port and perpendicular to the rotational axis.

5. The toner container according to claim 1, wherein a width of the first chamber in the direction of the rotational axis is wider than a width of the second chamber.

6. The toner container according to claim 1, further comprising a conveying member which is rotatable about a second rotational axis extending in a direction crossing the direction of the rotational axis of the stirring member and which is configured to convey toner to be accommodated in the second chamber in the direction of the second rotational axis.

7. The toner container according to claim 1, wherein the first chamber is a flow passage extending from the air supply unit toward the outlet port in the direction of the rotational axis and guiding the air from the air supply unit to the outlet port.

8. The toner container according to claim 1, further comprising a screw provided in the first chamber and configured to convey the toner toward the outlet port by being rotated,

wherein in case that in a cross section perpendicular to the direction of the rotational axis, the toner container assumes an attitude such that an imaginary rectilinear passing through the rotational axis of the stirring member and a rotational axis of the screw is horizontal, the outlet port is positioned above a bottom of the first chamber.

9. The toner container according to claim 8, wherein the stirring member includes a shaft portion rotatable by transmitting thereto a driving force and a stirring portion which projects from the shaft portion in a radial direction and which is configured to stir and convey the toner by being rotated together with the shaft portion, and

wherein the stirring portion is constituted so as to scoop the toner from the bottom of the first chamber toward the screw when the stirring member is rotated.

10. The toner container according to claim 8, wherein when the toner container assumes an attitude in a case that the toner container is mounted in a main assembly of an image forming apparatus, in the cross section, an angle of the imaginary rectilinear line relative to a horizontal direction falls within $\pm 5^\circ$.

26

11. The toner container according to claim 4, further comprising a screw provided in the first chamber and configured to convey the toner toward the outlet port by being rotated,

wherein when the toner container assumes an attitude when the toner container is mounted in a main assembly of an image forming apparatus, in a cross section perpendicular to the direction of the rotational axis, the outlet port is positioned above a bottom of the first chamber.

12. The toner container according to claim 1, further comprising a screw provided in the first chamber and configured to convey the toner toward the outlet port by being rotated,

wherein when the toner container assumes an attitude when the toner container is mounted in a main assembly of an image forming apparatus, in a cross section perpendicular to the direction of the rotational axis, a center axis of the air supply unit is positioned above the outlet port.

13. The toner container according to claim 1, further comprising a drive input portion to which a driving force is inputted from the outside of the toner container so as to drive the air supply unit,

wherein the drive input portion, the air supply unit, and the outlet port are disposed in this order in the direction of the rotational axis.

14. The toner container according to claim 13, wherein in a cross section perpendicular to the direction of the rotational axis, a rotational axis of the drive input portion, a center axis of the air supply unit, and the outlet port are disposed in this order in a direction of an imaginary rectilinear line connecting a rotational axis of the drive input portion and the outlet port.

15. The toner container according to claim 1, wherein the air supply unit is a pump configured to supply the air by changing an inside volume thereof by being expanded and contracted.

16. The toner container according to claim 15, wherein an expansion and contraction direction in which the pump is expanded and contracted is the direction of the rotational axis.

17. The toner container according to claim 16, further comprising a cam mechanism including a rotatable cam, wherein rotation of the cam is converted into expansion and contraction motion of the pump.

18. The toner container according to claim 12, wherein the air supply unit includes a pump configured to supply the air by changing an inside volume thereof by being expanded and contracted.

19. The toner container according to claim 18, wherein an expansion and contraction direction in which the pump is expanded and contracted is the direction of the rotational axis.

20. The toner container according to claim 19, wherein the air supply unit is a cam mechanism including a cam rotatable about the center axis, and the pump is expanded and contracted by rotation of the cam about the center axis.

21. A toner container detachably mountable to a main assembly of an image forming apparatus in which the main assembly includes a photosensitive drum and a developing unit for accommodating toner supplied to the photosensitive drum, the toner container comprising:

a first chamber configured to accommodate toner for being supplied to the developing unit;

a second chamber configured to accommodate toner collected from the photosensitive drum;

27

a stirring member configured to stir the toner accommodated in the first chamber by being rotated about a rotational axis; and

an air supply unit configured to supply air for discharging the toner in the first chamber to an outside of the toner container,

wherein the air supply unit, the first chamber, and the second chamber are aligned in this order in a direction of the rotational axis.

* * * * *

10

28