US 20250264193A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2025/0264193 A1**

HANNA et al. (43) **Pub. Date: Aug. 21, 2025**

(54) **BI-DIRECTIONAL LAMP**

(71) Applicant: **Pure Forms, LLC**, San Antonio, TX (US)

(72) Inventors: **Marcus HANNA**, Beverly, MA (US); **Jordan TRYON**, Woburn, MA (US); **Hannah POLSTER**, Beverly, MA (US); **John FIEGENER**, Marblehead, MA (US); **Ben MATHEWS**, San Antonio, TX (US)

(73) Assignee: **Pure Forms, LLC**, San Antonio, TX (US)

(21) Appl. No.: **19/200,359**

(22) Filed: **May 6, 2025**

Related U.S. Application Data

(63) Continuation of application No. 18/151,026, filed on Jan. 6, 2023, now Pat. No. 12,320,491.

(60) Provisional application No. 63/298,089, filed on Jan. 10, 2022.

Publication Classification

(51) **Int. Cl.**

F21S 6/00	(2006.01)
F21S 10/02	(2006.01)
F21V 21/116	(2006.01)
F21V 21/26	(2006.01)
F21V 21/29	(2006.01)
F21V 21/30	(2006.01)
F21Y 115/10	(2016.01)

(52) **U.S. Cl.**

CPC ***F21S 6/003*** (2013.01); ***F21S 10/02*** (2013.01); ***F21V 21/116*** (2013.01); ***F21V 21/26*** (2013.01); ***F21V 21/29*** (2013.01); ***F21V 21/30*** (2013.01); *F21Y 2115/10* (2016.08)

(57) **ABSTRACT**

A lamp with a bi-directional light is provided. The lamp may include a base, an arm assembly, and a head. The head may include a first light source and a second light source. The first light source and the second light source may be configured to provide light in directions perpendicular from each other.

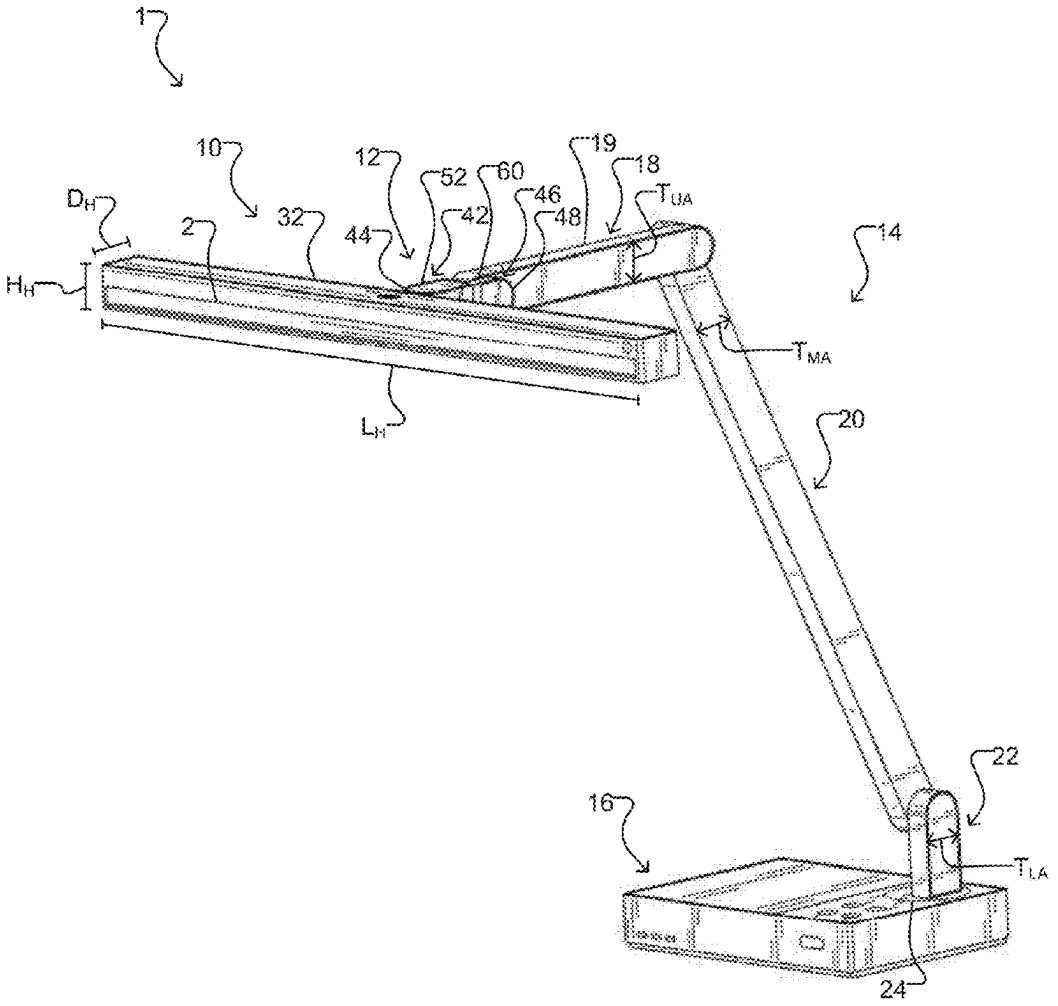

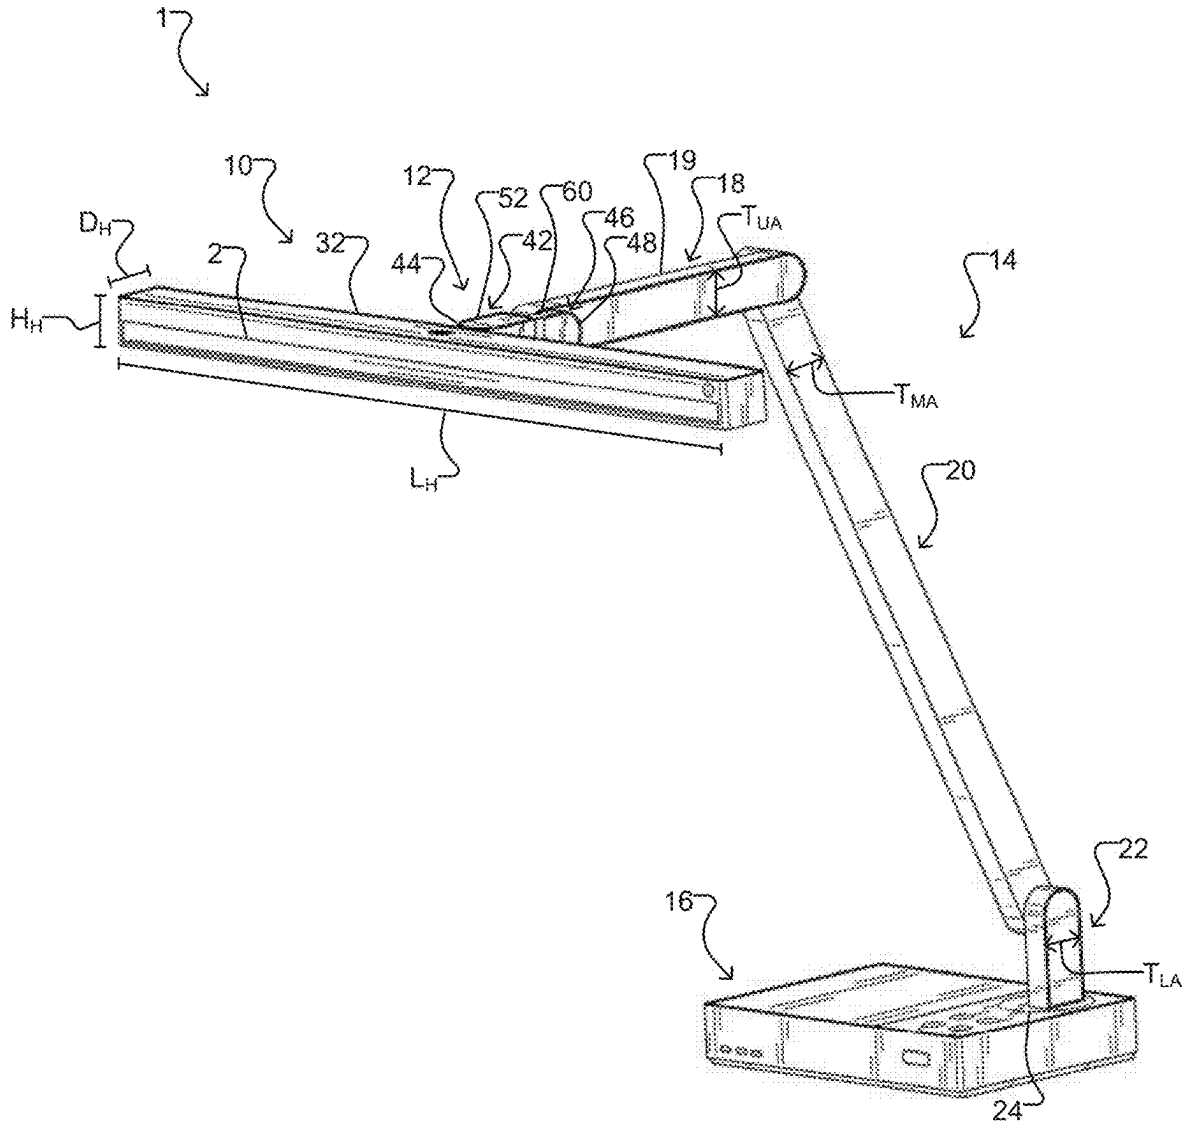

FIG. 1

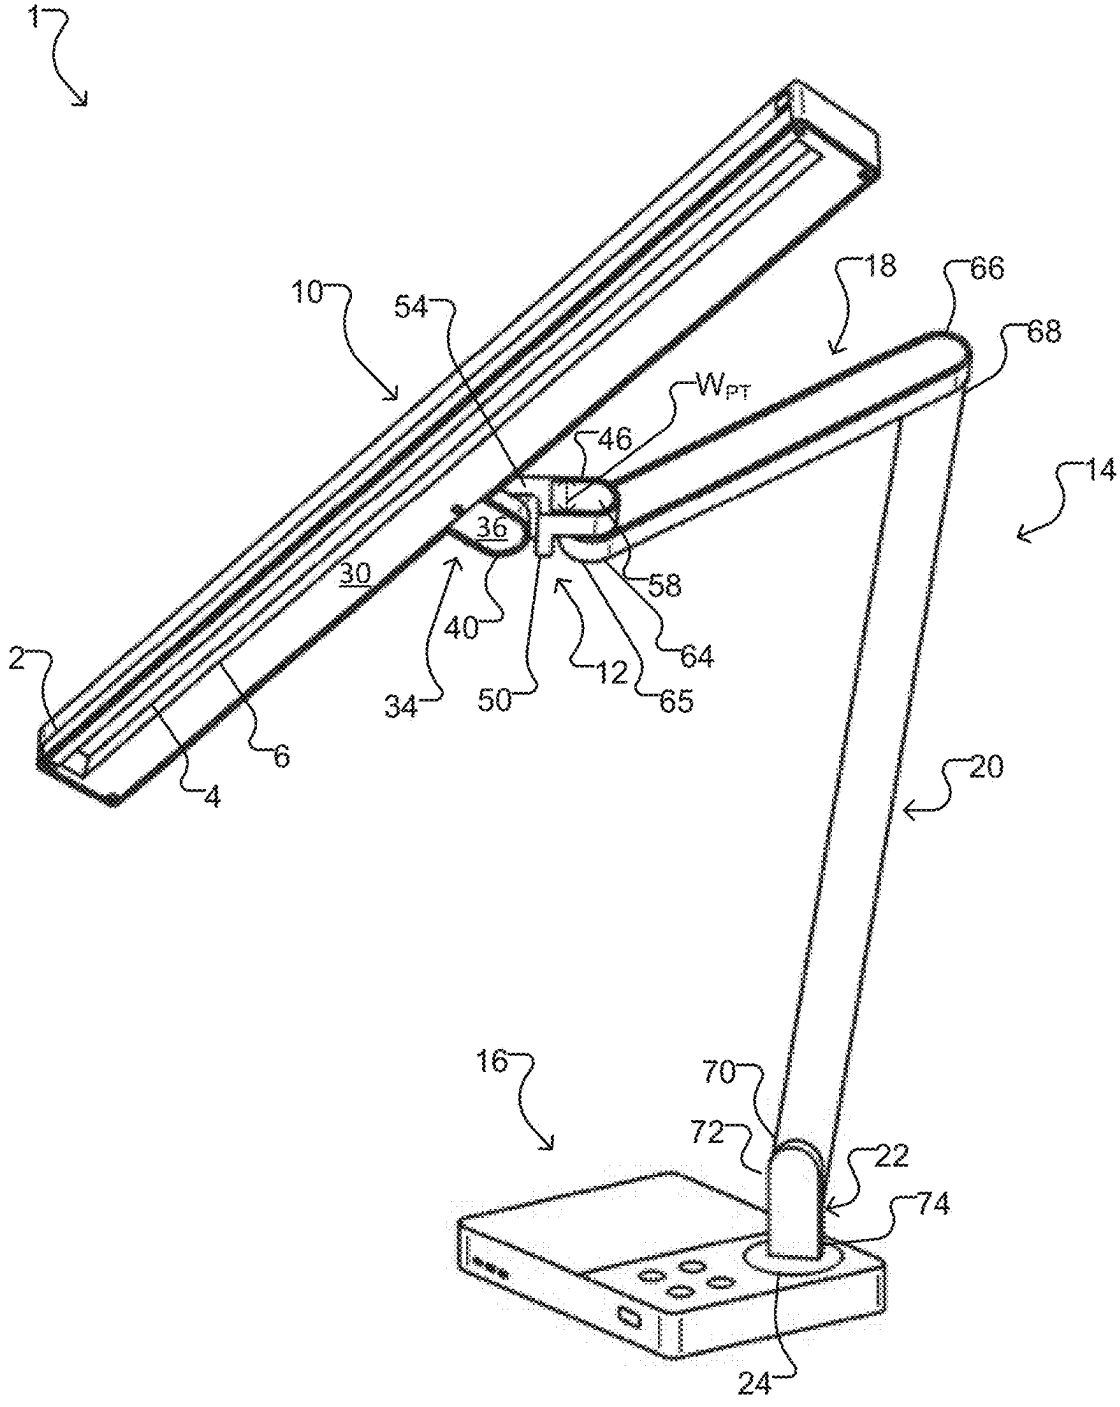
1
10
54
18
66
68
W_{PT}
46
14
36
30
58
40
64
2
12
34
50
65
6
4
20
16
70
72
22
74
24

FIG. 2

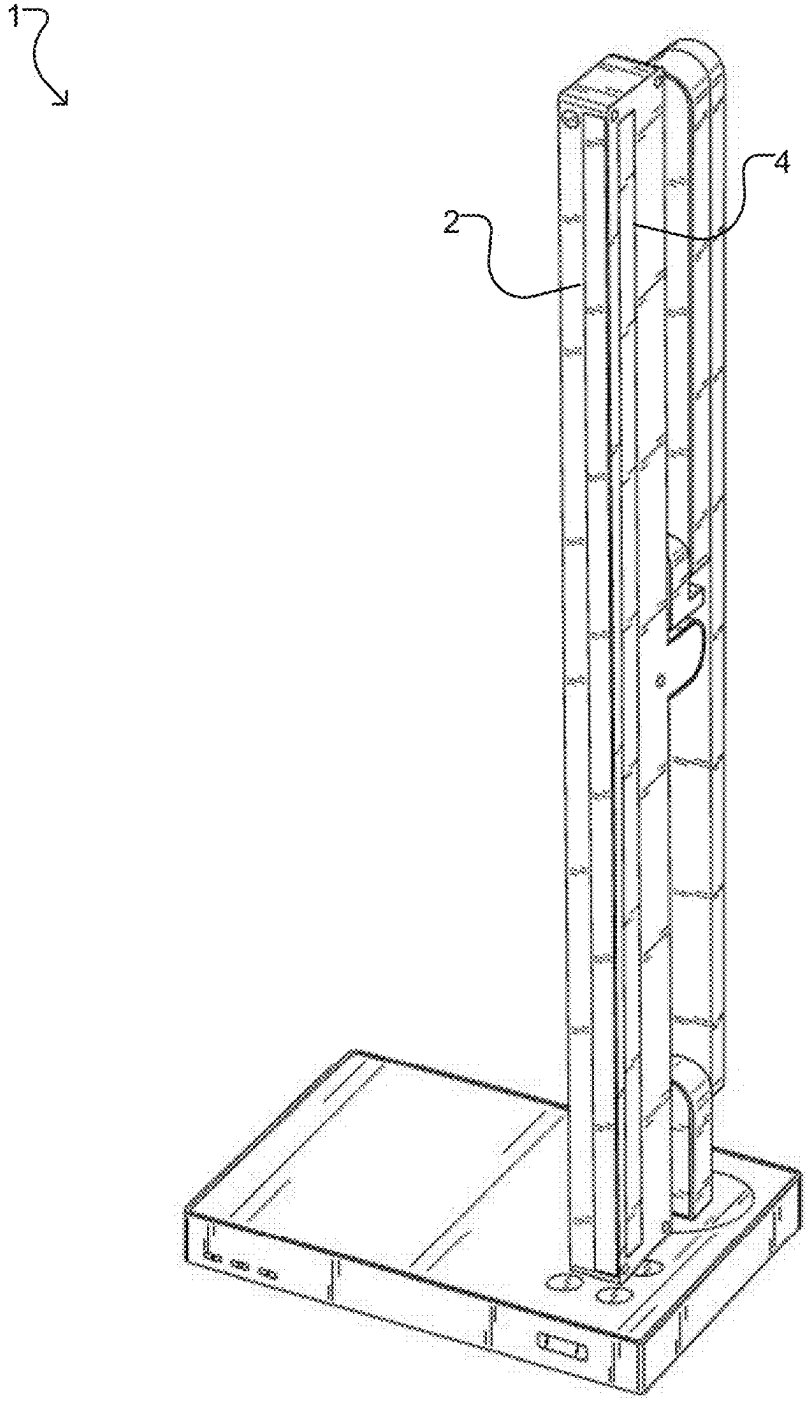

FIG. 3

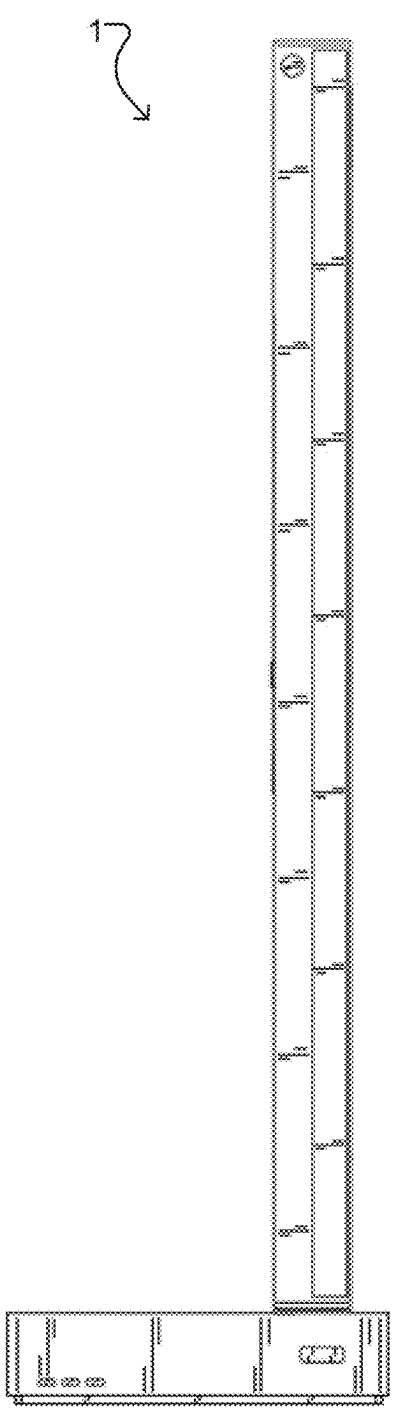

FIG. 4

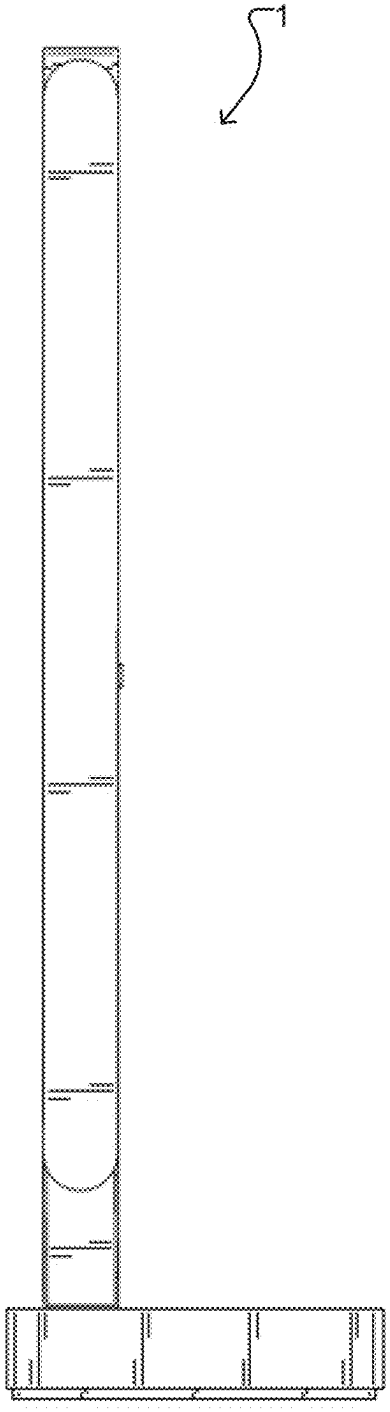

FIG. 5

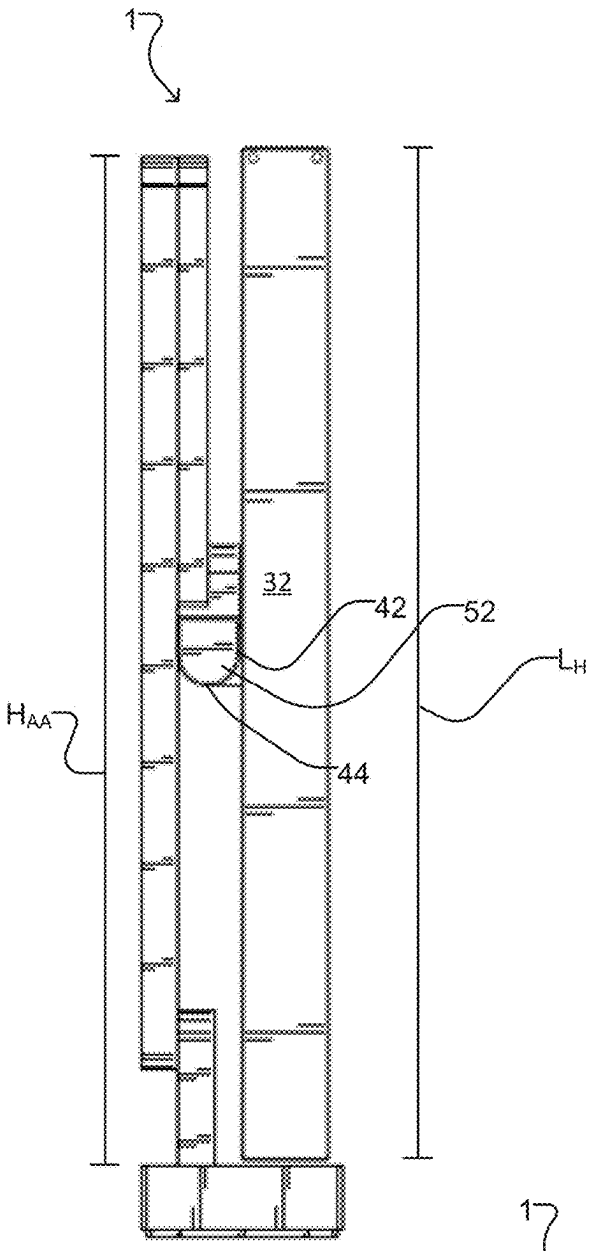

FIG. 6

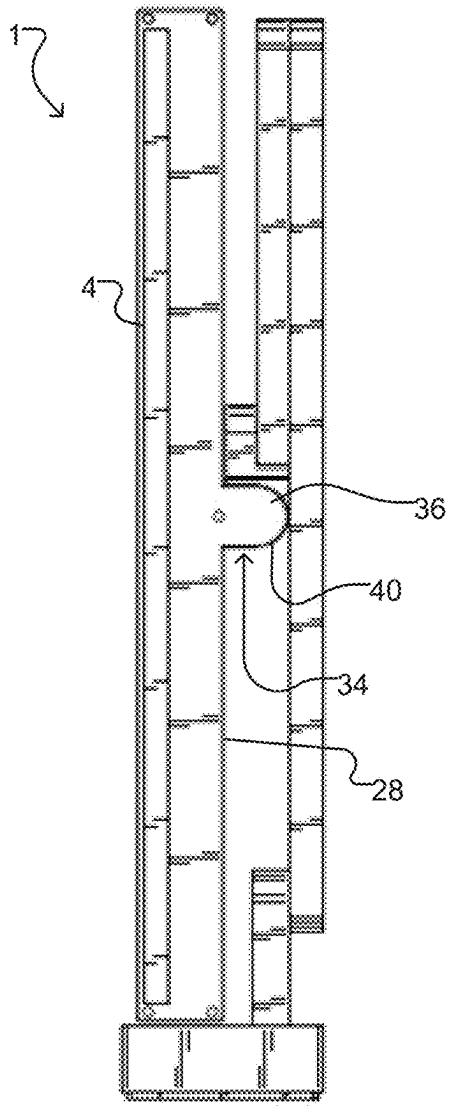

FIG. 7

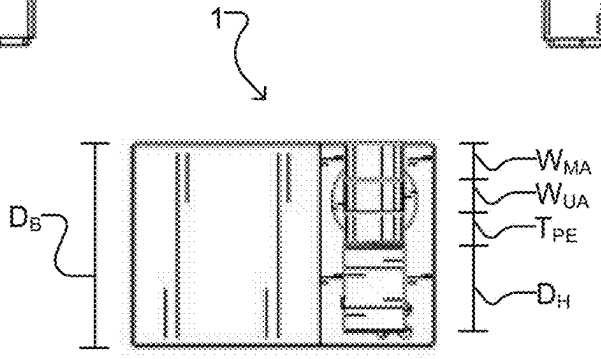

FIG. 8

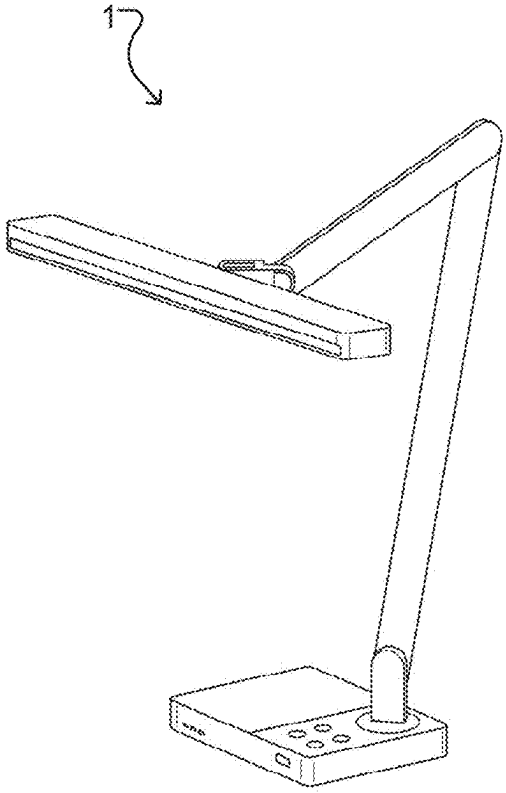

FIG. 9

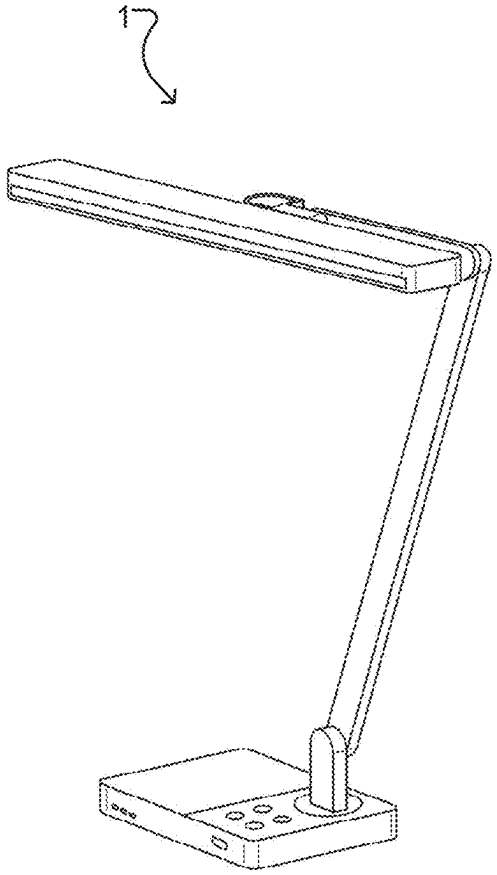

FIG. 10

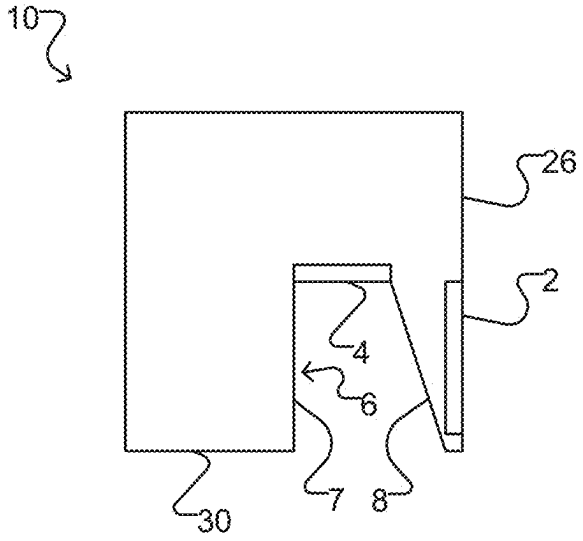

FIG. 11

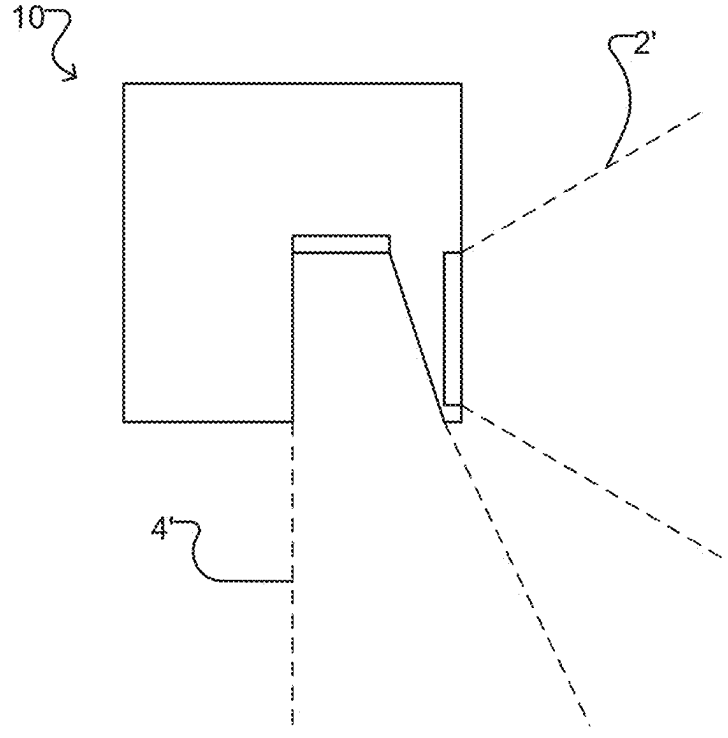

FIG. 12

BI-DIRECTIONAL LAMP

[0001] This application is a continuation of U.S. patent application Ser. No. 18/151,026, filed on Jan. 6, 2023, which is a non-provisional of U.S. Provisional Patent Application Ser. No. 63/298,089 filed Jan. 10, 2022. The disclosures of all of these applications are incorporated by reference herein in their entireties.

TECHNICAL FIELD

[0002] The present invention relates to lamps, such as desk lamps and table lamps.

BACKGROUND

[0003] There is a general desire for desk lamps and table lamps that provide multiple functions.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Exemplary embodiments are illustrated in referenced figures of the drawings. It is intended that the embodiments and figures disclosed herein are to be considered illustrative rather than restrictive.

[0005] FIG. **1** is a perspective view of a lamp according to an embodiment, with the lamp in an extended configuration.

[0006] FIG. **2** is a perspective view of the lamp of FIG. **1**, with the head and neck of the lamp rotated.

[0007] FIG. **3** is a perspective view of the lamp of FIG. **1**, with the lamp in a folded configuration.

[0008] FIG. **4** is a front elevation view of the lamp of FIG. **1**, with the lamp in a folded configuration.

[0009] FIG. **5** is a rear elevation view of the lamp of FIG. **1**, with the lamp in a folded configuration.

[0010] FIG. **6** is a left side elevation view of the lamp of FIG. **1**, with the lamp in a folded configuration.

[0011] FIG. **7** is a right side elevation view of the lamp of FIG. **1**, with the lamp in a folded configuration.

[0012] FIG. **8** is a top view of the lamp of FIG. **1**, with the lamp in a folded configuration.

[0013] FIG. **9** is a perspective view of the lamp of FIG. **1**, with the lamp in an extended configuration.

[0014] FIG. **10** is a perspective view of the lamp of FIG. **1**, with the lamp in a partially extended configuration.

[0015] FIG. **11** is a vertical cross-sectional view of the head of the lamp of FIG. **1**.

[0016] FIG. **12** is a vertical cross-sectional view of the head of the lamp of FIG. **1**, showing the beam spread from two light sources.

DESCRIPTION

[0017] Throughout the following description specific details are set forth in order to provide a more thorough understanding to persons skilled in the art. However, well known elements may not have been shown or described in detail to avoid unnecessarily obscuring the disclosure. Accordingly, the description and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

[0018] The term "proximal" as used herein refers to a direction generally toward the base of the lamp. The term "distal" is used herein refers to a direction generally toward the head of the lamp.

[0019] FIGS. **1** to **12** show a foldable lamp **1** according to an embodiment. Lamp **1** generally comprises a head **10**, a neck joint **12**, an arm assembly **14** and a base **16**. These features cooperate to extend and fold in a manner that provides improved functionality and ease of storage, packaging and shipping, as described herein.

Pivotal Connections

[0020] Head **10** is elongated and houses at least one light source. Head **10** has a tab **34** extending from a rear face **28** of head **10**. Tab **34** protrudes from a rear face **28** of head **10** at an approximate midpoint the length of head **10**. Tab **34** has a rounded end **40**. Tab **34** may be integrally formed with head **10**, or as a separate section easily assembled together with head **10**.

[0021] Neck joint **12** includes a distal tab **42** with a rounded end **44**, and a proximal tab **46** with a rounded end **48**. As best shown in FIG. **2**, distal tab **42** and proximal tab **46** extend in their respective directions, rotationally offset by 90 degrees, from a middle wall **50**. Distal tab **42**, proximal tab **46** and middle wall **50** may be formed as a unitary piece or may be provided in two or more sections which are easily assembled together.

[0022] Tab **34** of head **10** is pivotally connected to distal tab **42** of neck joint **12**, at inner face of tab **34** and inner face of distal tab **42**. Rounded end **44** of distal tab **42** (adjacent rear face **28** of head **10**) and rounded end **38** of tab **34** (adjacent middle wall **50**) together permit at least 180 degrees of unimpeded pivoting of head **10** about the axis of the pivot connection between distal tab **42** and tab **34**.

[0023] Arm assembly **14** includes an upper arm **18**, mid arm **20** and a lower arm **22**. Proximal tab **46** of neck joint **12** is pivotally connected to a distal end **64** of upper arm **18**. Rounded end **65** of distal end **64** (adjacent middle wall **50**) permits at least 180 degrees of unimpeded pivoting of neck joint **12** about the axis of the pivot connection between neck joint **12** and upper arm **18**.

[0024] Proximal end **66** of upper arm **18** is pivotally connected to distal end **68** of mid arm **20**. Proximal end **70** of mid arm **20** is pivotally connected to distal end **72** of lower arm **22**. Proximal end **74** of lower arm **22** is fixedly connected to swivel base **24**. Swivel base **24** is embedded in and rotatably connected to base **16**.

Alignment of Head and Arm Assembly Features

[0025] Certain dimensions of certain features of lamp **1** are aligned for aesthetic and functional advantage in various configurations.

[0026] As best shown in FIGS. **3** to **5**, the following dimensions may be substantially equal: (i) height H_H of head **10**; (ii) combined thickness of tab **34** and distal tab **42**; (iii) width W_{PT} of proximal tab **46**; (iv) thickness T_{UA} of upper arm **18**; (v) thickness T_{MA} of mid arm **20**; and (vi) thickness T_{LA} of lower arm **22**. As best shown in FIG. **6**, the length L_H of head **10** may be substantially equal to the height A_{AH} of folded arm assembly **14**. In certain configuration such as the extended configuration shown in FIG. **1**, the folded configuration shown in FIGS. **3** to **8**, and the partially extended configuration in FIG. **10**, the foregoing alignment of dimensions provides a desirable sleek aesthetic. For example, outer face **52** of distal tab **42** is flush with a top face **32** of head **10** and with top face **19** of upper arm **18** in the configurations shown in FIGS. **1**, **6** and **10**. Similarly, bottom face (not shown) of proximal tab **42** is flush with bottom face **30** of head **10** and with bottom face **21** of upper arm **18** in the configurations shown in FIGS. **1**, **6** and **10**.

Also, neck joint **12** is shaped such that outer face **52** of distal tab **42** is flush with a top face **60** of proximal tab **46**, and outer face **58** of proximal tab **46** is flush with a side face **54** of distal tab **42**, to provide added streamlining of features. Importantly, in the folded configuration shown in FIGS. **3** to **8**, the foregoing alignment of dimensions cooperate to provide compactness for ease of storage, packaging and shipping.

[0027] As best shown in FIGS. **6** and **7**, the dimensions of overlapping and pivotally connected tab **34** and distal tab **42** are substantially similar, minimizing spacing as between head **10** and neck joint **12** for added compactness.

[0028] As best shown in FIGS. **6** to **8**, the depth D_B of base **16** is greater than or equal to the combined sum of (i) depth D_H of head **10**; (ii) thickness T_{PE} of proximal tab **46**; (iii) width W_{UA} of upper arm **18**; and (iv) width W_{MA} of mid arm **20**. In the folded configuration best shown in FIG. **8**, the foregoing dimensional constraints ensures head **10** and arm assembly **14**, in the folded configuration, stay within the footprint of base **16**, again for added compactness.

Configurations

[0029] FIG. **1** shows lamp **1** in a forwardly extended configuration, and FIG. **9** shows lamp **1** in a balanced extended configuration; these configurations can be useful, for example, where a computer monitor or laptop computer is placed in front of base **16**, and head **10** is above and illuminating the screen, keyboard and/or task space. FIG. **10** shows lamp in a more compact, partially folded configuration; this configuration can be useful, for example, where the extension provided by upper arm **18** is unnecessary or undesirable. FIGS. **3** to **8** show lamp **1** in a folded configuration; in addition to compactness for storage, packaging and shipping, this folded configuration can be used for ambient lighting of a room. Light can be directed 360 degrees in a horizontal direction by swiveling head **10**/arm assembly **14** on swivel base **24**.

Base Functions

[0030] Base **16** may include one or more inductive chargers, electrical outlets, and communication ports. Communication ports can include one or more of USB (type A, B, C), micro USB, HDMI, Lightning, DVI, VGA, and DisplayPort connections. Base **16** may additionally or alternatively include suitable controls for lamp **1**'s light source(s).

Bi-Directional Lighting

[0031] As shown in FIG. **11**, head **10** provides bi-directional light with two sources of light, each facing directions perpendicular with respect to the other. For example, first light source **2** may be on front face **26** of head **10**, and a second light source **4** may be on bottom face **30** of head **10**. Light source **2** and light source **4** may be independently operable by dedicated controls for example on head **10** and/or base **16**.

[0032] Light source **2** can be directed forward to illuminate the user for purposes such as videoconferencing, live streaming and make-up applications. Light source **2** can, for example, provide diffuse light. Light source **2** provides symmetric beam spread **2'**.

[0033] Light source **4** can be directed downwards for task-oriented work. Light source **4** may be recessed in bottom face **30**. Inner walls **6** around the perimeter of light source **4** function as baffles to provide an asymmetric beam spread, for example to prevent or minimize light directed to a screen below head **10**, in order to reduce glare. Rear inner wall **7** is closer to the vertical than front inner wall **8**, to provide asymmetric beam spread **4'**. For example, rear inner wall **7** may be vertical or tapers out from the vertical no greater than 5 degrees off the vertical, whereas front inner wall **8** tapers out from the vertical by at least 10 or at least 15 degrees. Head **10** may for example be positioned at eye level of the user to hide light source **4** from the user's eyes.

[0034] In some embodiments head **10** can be pivoted upward, for example at the pivot connection between neck joint **12** and upper arm **18** and/or the pivot connection between upper arm **18** and mid arm **20**, so that light source **2** provides up-lighting or ambient lighting of a room, and light source **4** provides the forward direction illumination.

[0035] Light sources **2** and **4** may be for example be point sources of light, such as arrays of light emitting diodes (LEDs). The LEDs may be arrayed on elongated LED boards substantially equal, or slightly under, in length to length L_H of head **10**. The LEDs may be fully tunable white with the ability to adjust correlated color temperature (CCT) white points, or fully tunable red, green, blue and white (RGBW) color, and be made to change color together or independent of one another.

[0036] While a number of exemplary aspects and embodiments have been discussed above, those of skill in the art will recognize certain modifications, permutations, additions and sub-combinations thereof. For example:

[0037] The head and neck joint may be connected in alternative ways. In some embodiments the tab of the head may be on top, and the distal tab of the neck joint on the bottom.

[0038] Light sources are shown in the drawings as single strips but alternatively may be shorter strips in series, narrower strips in parallel, and the like.

[0039] The arm assembly may be constructed in alternative ways. In some embodiments the lower arm may be absent, with the mid arm fixedly attached to the swivel base instead.

[0040] The neck portion may not have a middle wall, i.e., the proximal tab and distal tab may be directly connected to each other.

[0041] The two light sources may be a single light source that is adjustable between two orientations perpendicular with respect to each other.

[0042] Bi-directional light may be provided on lamps other than that specifically described herein. The lamp may be a foldable or non-foldable lamp. Instead of a lamp with a base, the head may be provided on an arm assembly or the like that clips onto a monitor.

[0043] It is therefore intended that the following appended claims and claims hereafter introduced are interpreted to include all such modifications, permutations, additions and sub-combinations as are consistent with the broadest interpretation of the specification as a whole.

1. A lamp comprising:

a base;

an arm assembly coupled to the base; and

a head coupled to the arm assembly, the head comprising a first light source and a second light source;

wherein the first light source is disposed on a front face of the head, and the second light source is disposed on a bottom face of the head, such that the first light source

is operable to provide light in a first direction, and wherein the second light source is operable to provide light in a second direction perpendicular to the first direction; and

wherein the first light source and the second light source are independently operable.

2. The lamp of claim **1**, wherein the second light source is operable to provide an asymmetric beam spread.

3. The lamp of claim **1**, wherein the second light source is recessed in the bottom face of the head in a recess that is partially defined by a rear inner wall that is vertical and a front inner wall that tapers outward from the vertical.

4. The lamp of claim **3**, wherein the rear inner wall varies from the vertical by no greater than about 5 degrees, and the front inner wall tapers outwardly from the vertical by about 10 degrees to about 15 degrees.

5. The lamp of claim **1**, wherein the first light source is operable to illuminate a user of the lamp, and wherein the second light source is operable to provide downward illumination.

6. The lamp of claim **1**, wherein the first light source and the second light source each comprise an elongated LED board.

7. The lamp of claim **6**, wherein a length of at least one of the LED boards is substantially equal to a length of the head.

8. The lamp of claim **6**, wherein at least one of the LED boards is a tunable white or a tunable red, green, blue, and white (RGBW) color.

9. The lamp of claim **1**, wherein the arm assembly is foldable.

10. The lamp of claim **9**, wherein the arm assembly includes an upper arm portion, a middle arm portion, and a lower arm portion.

11. The lamp of claim **1**, wherein the arm assembly is coupled to a rear face of the head opposite from the first light source.

12. The lamp of claim **1**, wherein the head is swivelable relative to the arm assembly.

13. The lamp of claim **1**, wherein the arm assembly is swivelable relative to the base.

14. The lamp of claim **1**, wherein the base includes an electrical outlet.

15. The lamp of claim **1**, wherein the base includes a communication port usable for charging a device.

16. The lamp of claim **1**, wherein the base includes an inductive charger.

* * * * *