



US 20250261937A1

(19) **United States**

(12) **Patent Application Publication**

Deville et al.

(10) **Pub. No.: US 2025/0261937 A1**

(43) **Pub. Date:** Aug. 21, 2025

(54) **MULTIPLE-FIRING SUTURE FIXATION DEVICE AND METHODS FOR USING AND MANUFACTURING SAME**

(71) Applicant: **Edwards Lifesciences AG**, Nyon (CH)

(72) Inventors: **Derek Dee Deville**, Coral Gables, FL (US); **Kevin W. Smith**, Coral Gables, FL (US); **Michael Walter Kirk**, Miami, FL (US); **Carlos Rivera**, Cooper City, FL (US); **George Nunez**, Miami, FL (US); **Thomas O. Bales, Jr.**, Miami, FL (US); **Korey Kline**, Miami, FL (US); **Matthew A. Palmer**, Miami, FL (US); **M. Sean McBrayer**, Miami, FL (US); **Richard George Cartledge**, Boca Raton, FL (US); **Max Pierre Mendez**, Miami, FL (US); **Kevin K. Dang**, Huntington Beach, CA (US); **Bryan A. Janish**, Huntington Beach, CA (US); **Manouchehr A. Miraki**, Laguna Hills, CA (US)

(21) Appl. No.: **19/069,961**

(22) Filed: **Mar. 4, 2025**

Related U.S. Application Data

(63) Continuation of application No. 17/455,215, filed on Nov. 16, 2021, now Pat. No. 12,251,097, which is a continuation of application No. 16/355,373, filed on Mar. 15, 2019, now Pat. No. 11,172,924, which is a continuation of application No. 14/965,323, filed on Dec. 10, 2015, now Pat. No. 10,624,630.

(60) Provisional application No. 62/164,016, filed on May 20, 2015, provisional application No. 62/103,045, filed on Jan. 13, 2015, provisional application No.

62/096,749, filed on Dec. 24, 2014, provisional application No. 62/090,097, filed on Dec. 10, 2014.

Publication Classification

(51) **Int. Cl.**

A61B 17/04 (2006.01)

A61B 17/00 (2006.01)

A61B 90/00 (2016.01)


A61B 90/30 (2016.01)


(52) **U.S. Cl.**

CPC *A61B 17/0485* (2013.01); *A61B 17/0467* (2013.01); *A61B 17/0487* (2013.01); *A61B 2017/00017* (2013.01); *A61B 2017/00119* (2013.01); *A61B 2017/00349* (2013.01); *A61B 2017/00358* (2013.01); *A61B 2017/00398* (2013.01); *A61B 2017/00477* (2013.01); *A61B 2017/00734* (2013.01); *A61B 2017/00876* (2013.01); *A61B 2017/00902* (2013.01); *A61B 2017/0488* (2013.01); *A61B 2017/0496* (2013.01); *A61B 2090/064* (2016.02); *A61B 2090/0807* (2016.02); *A61B 2090/309* (2016.02); *A61B 2090/3937* (2016.02)

(57) **ABSTRACT**

A multiple-firing clip device includes a hollow shaft defining a lateral opening communicating with an environment and a distal shaft portion between the lateral opening and a distal end opening. A shuttle longitudinally moves on the shaft and comprises a shuttle body defining a lumen surrounding the shaft, a snare, and a snare-extender slide defining a snare track to form a snare travel path in which the snare is disposed from the body and through the track and a portion of the body. The slide moves along a given extent defining a slide distance and a distal end and movement of the slide to the distal end shortens the snare travel path to extend the snare portion through the lateral opening, through the distal shaft portion, and distally out from a distal side of the body longer than the given extent to secure a suture with the snare.

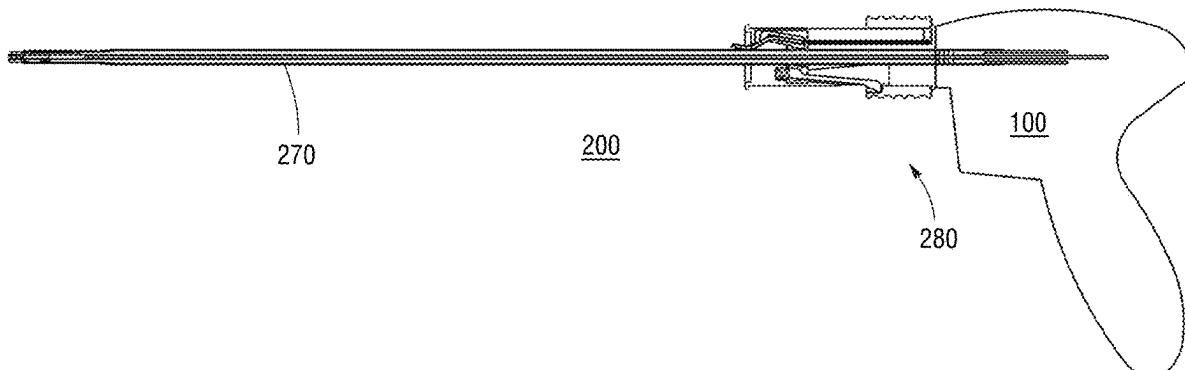

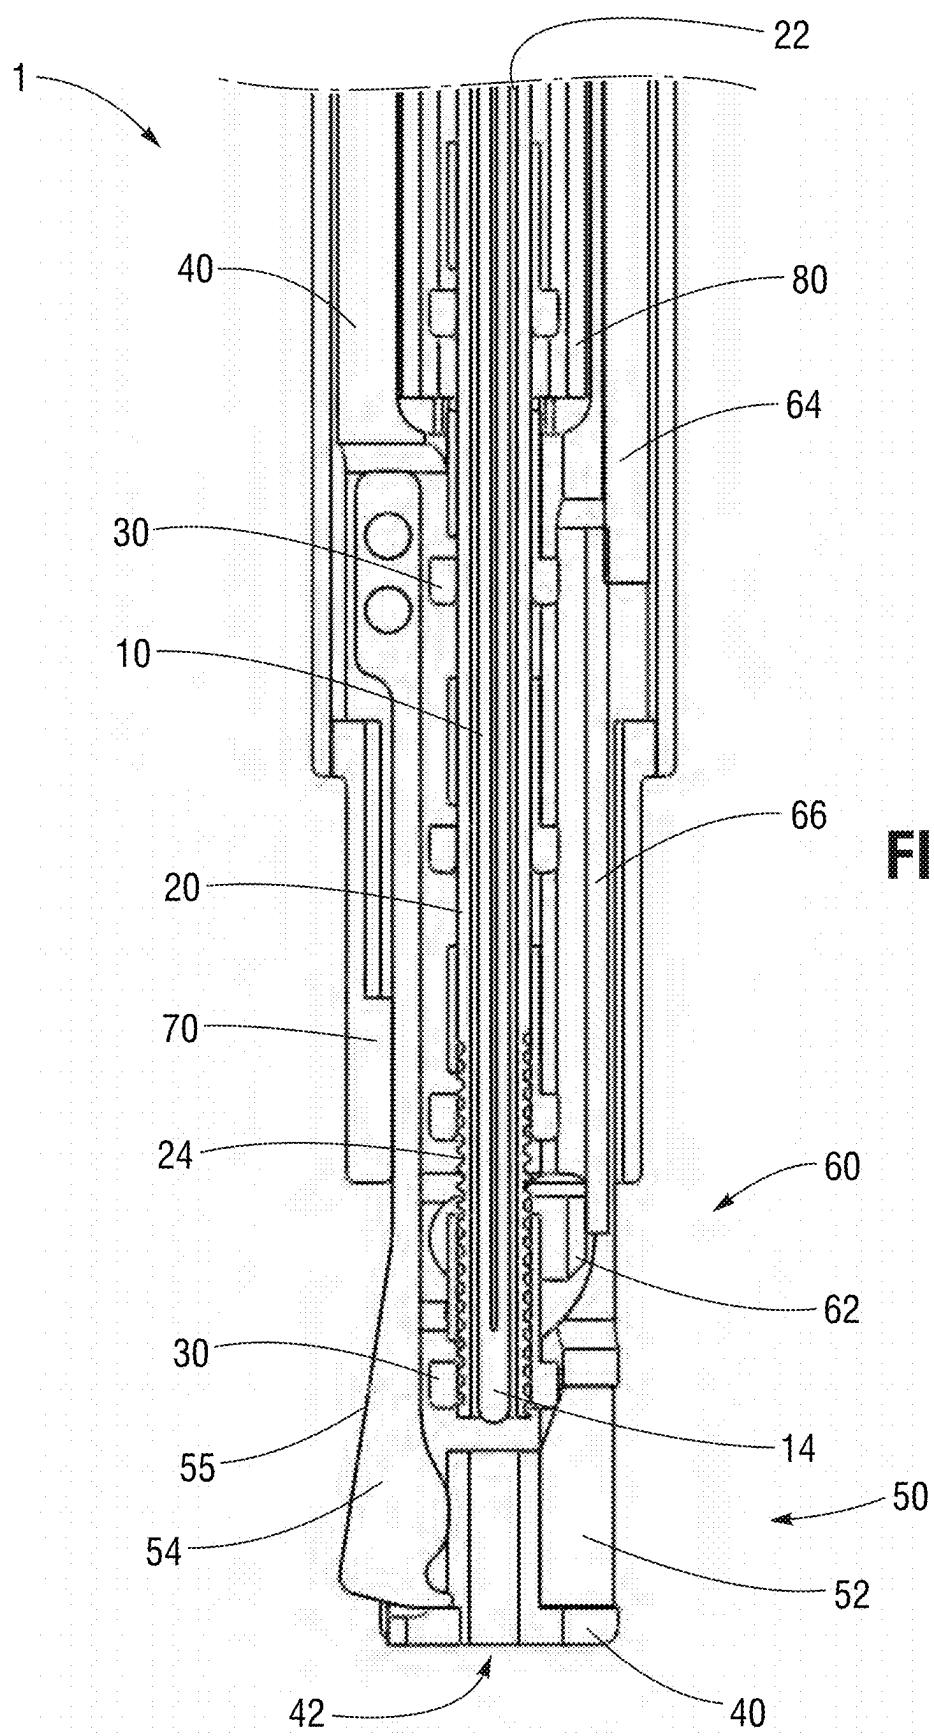

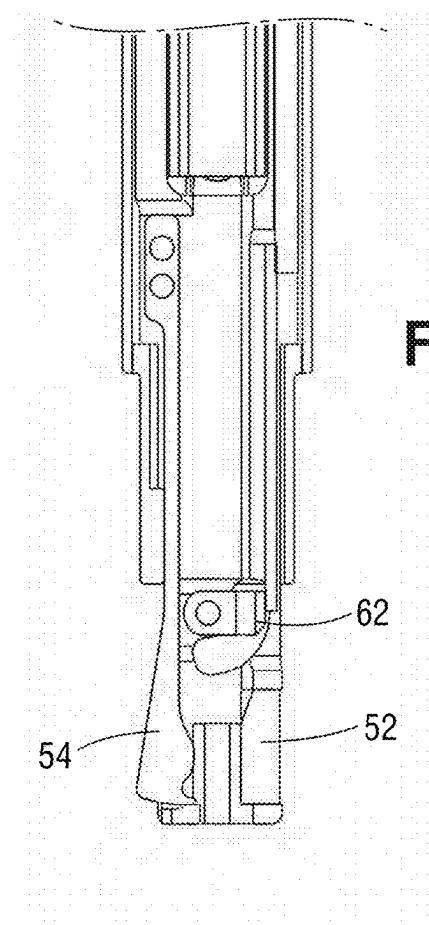


FIG. 2

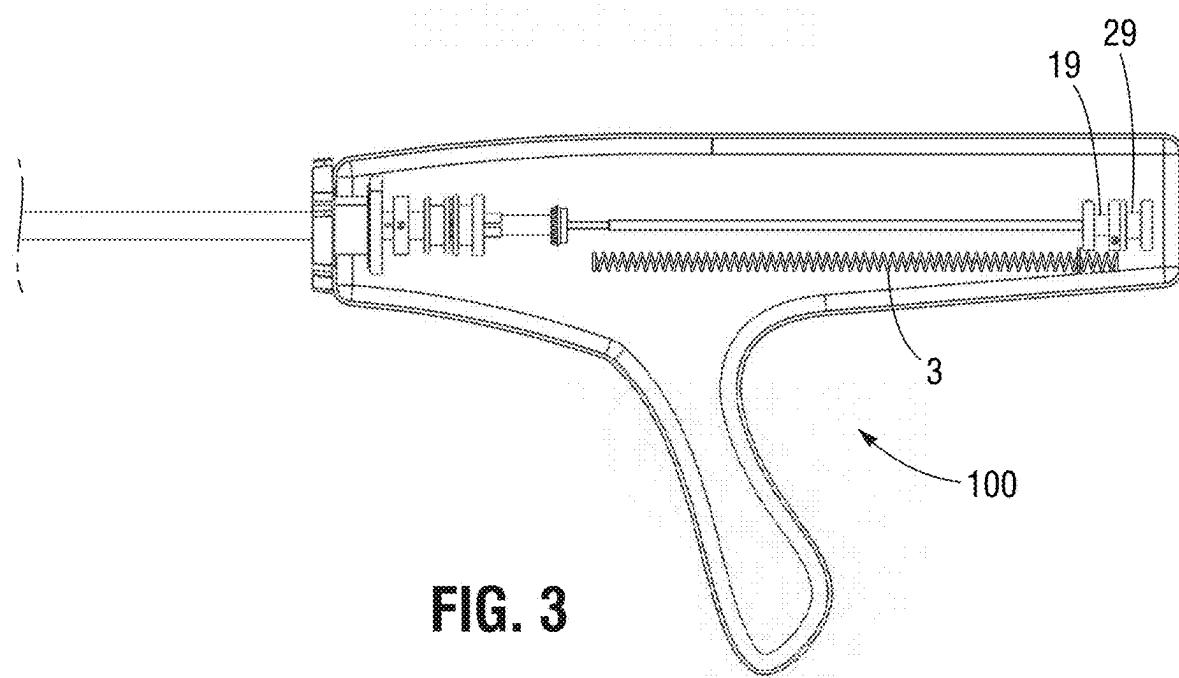


FIG. 3

FIG. 4

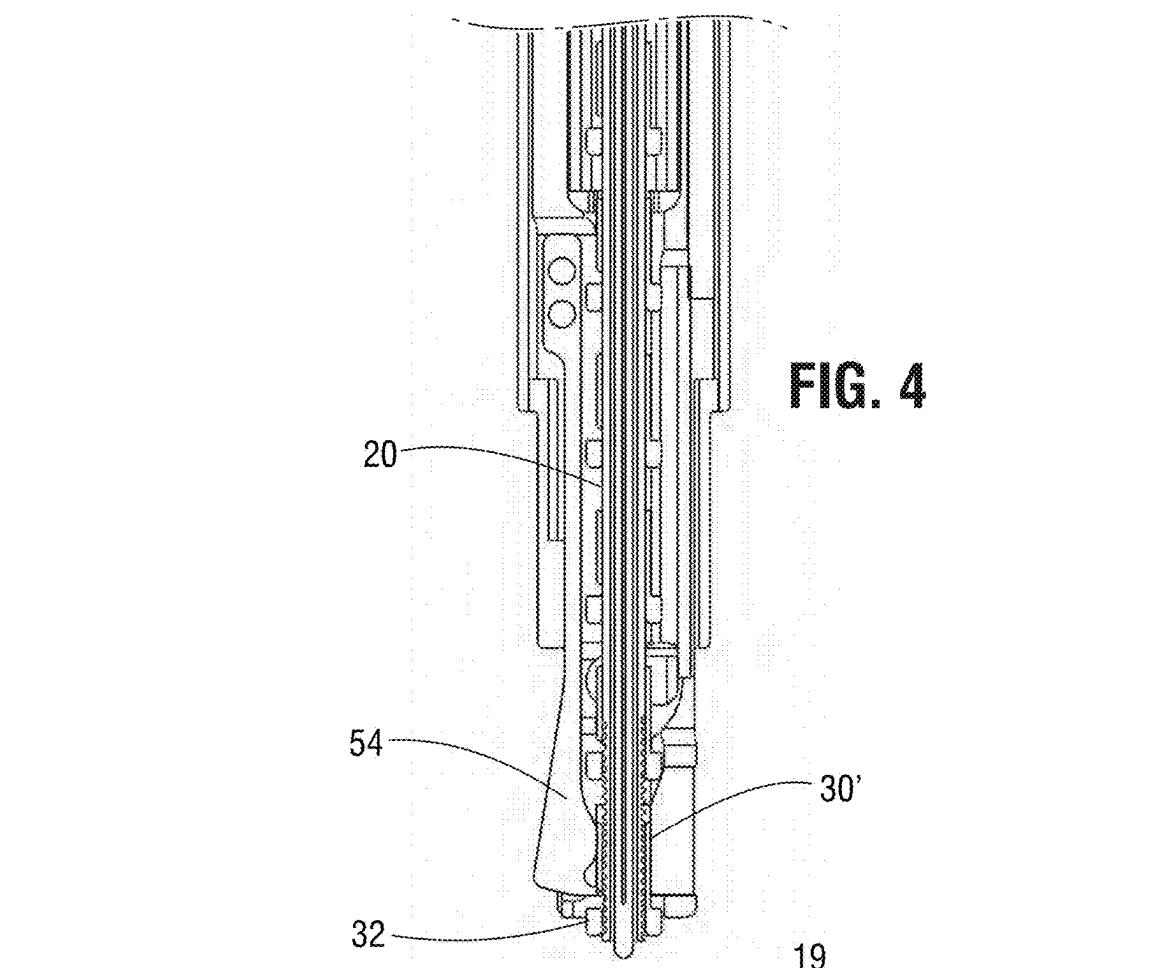
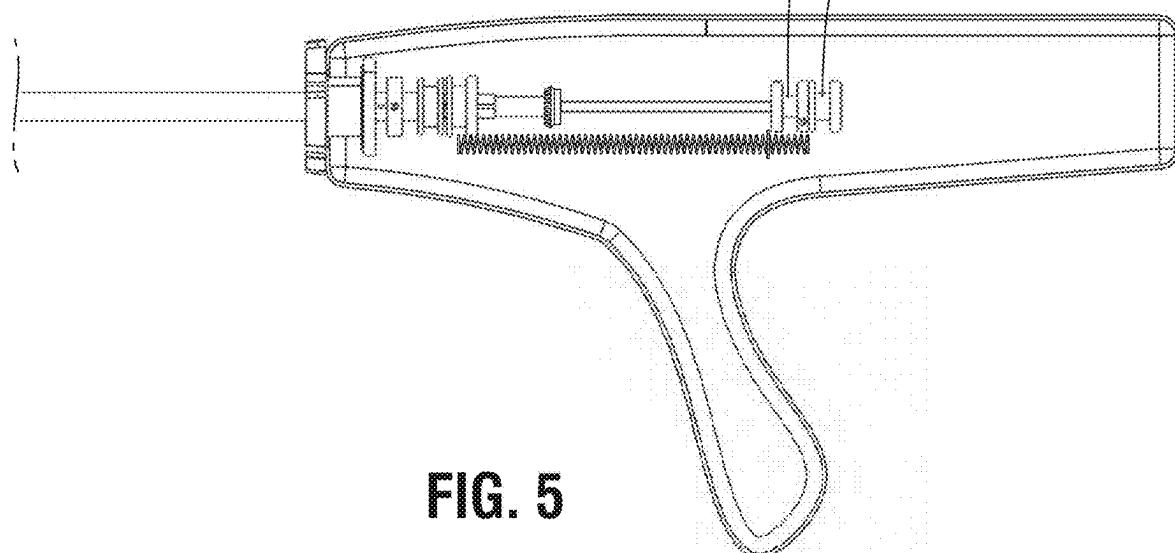
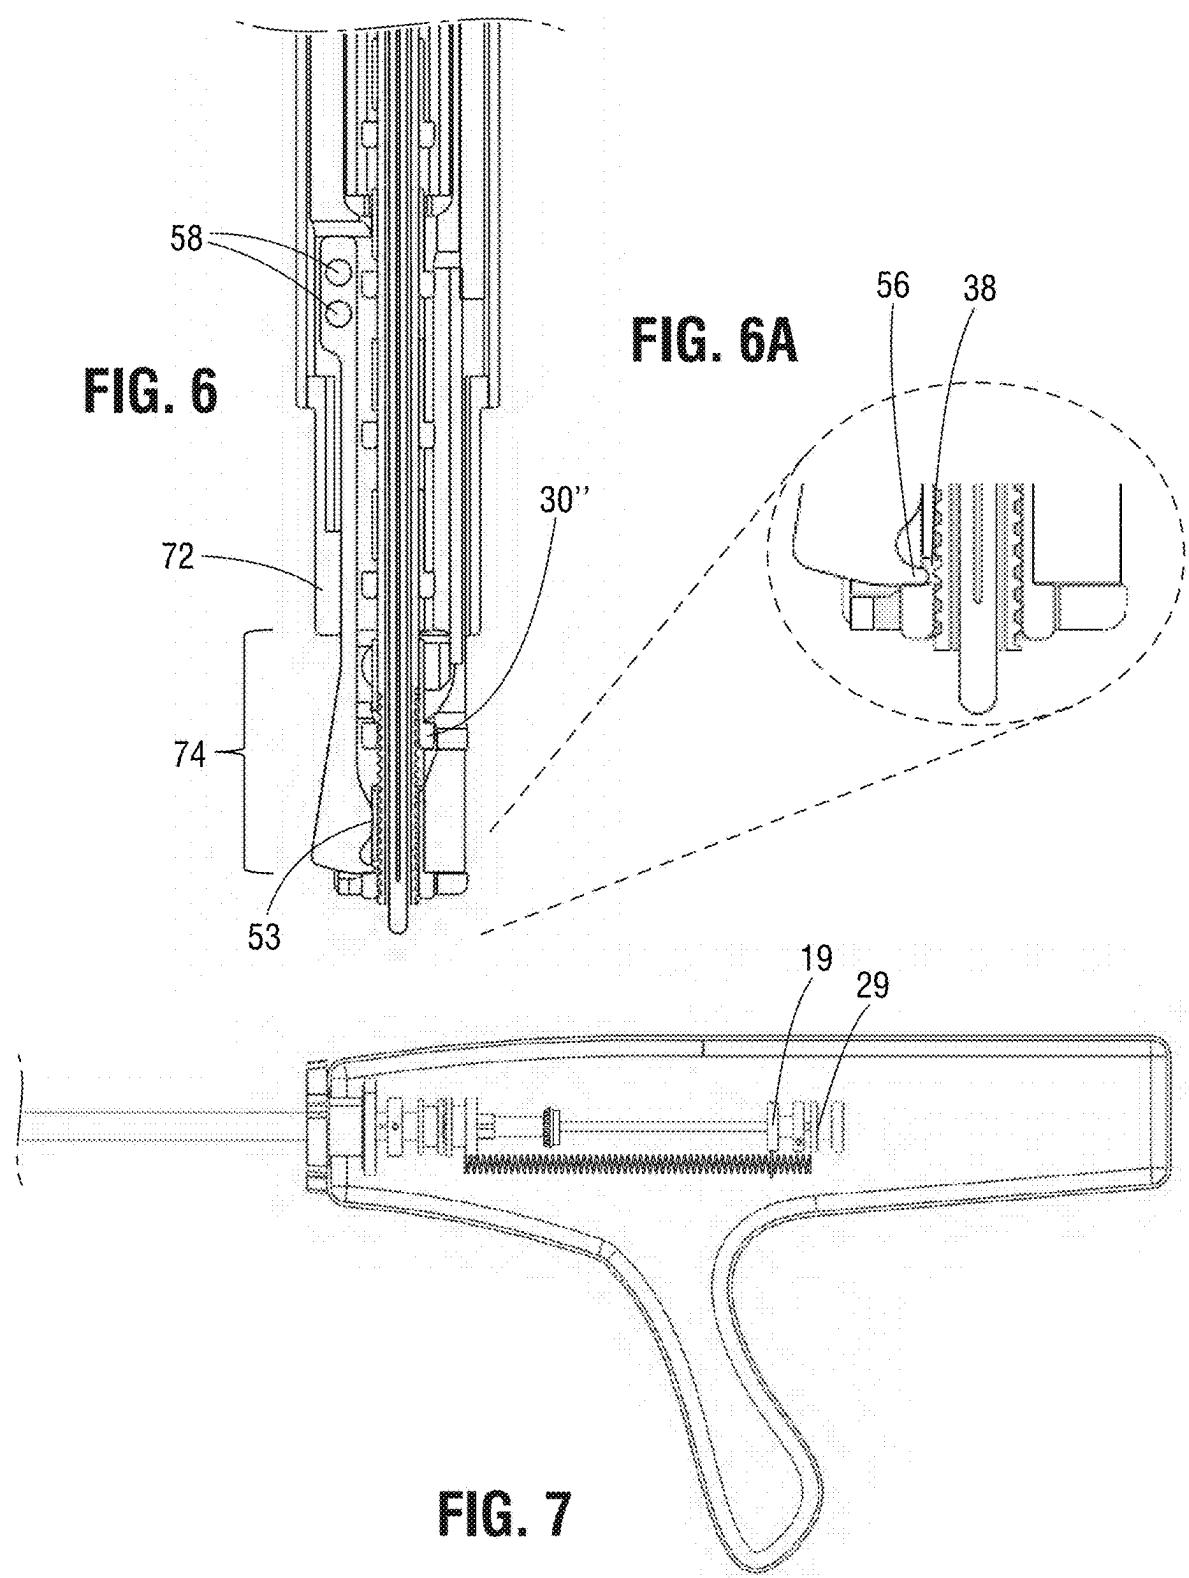


FIG. 5





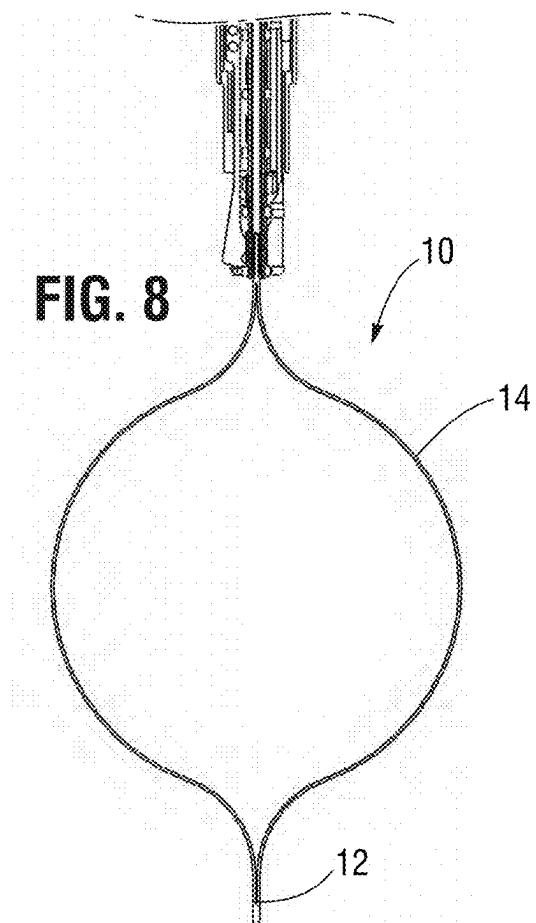


FIG. 8

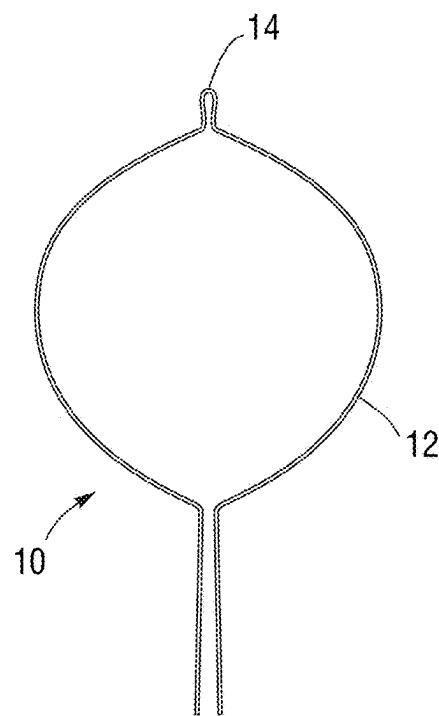


FIG. 36

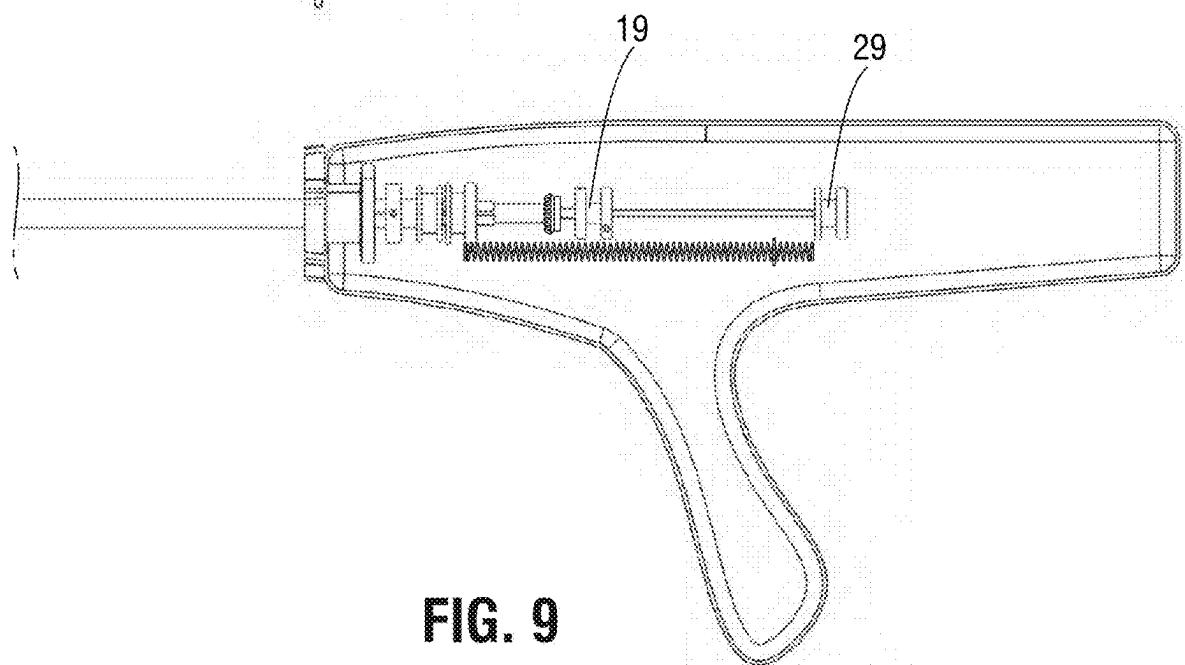
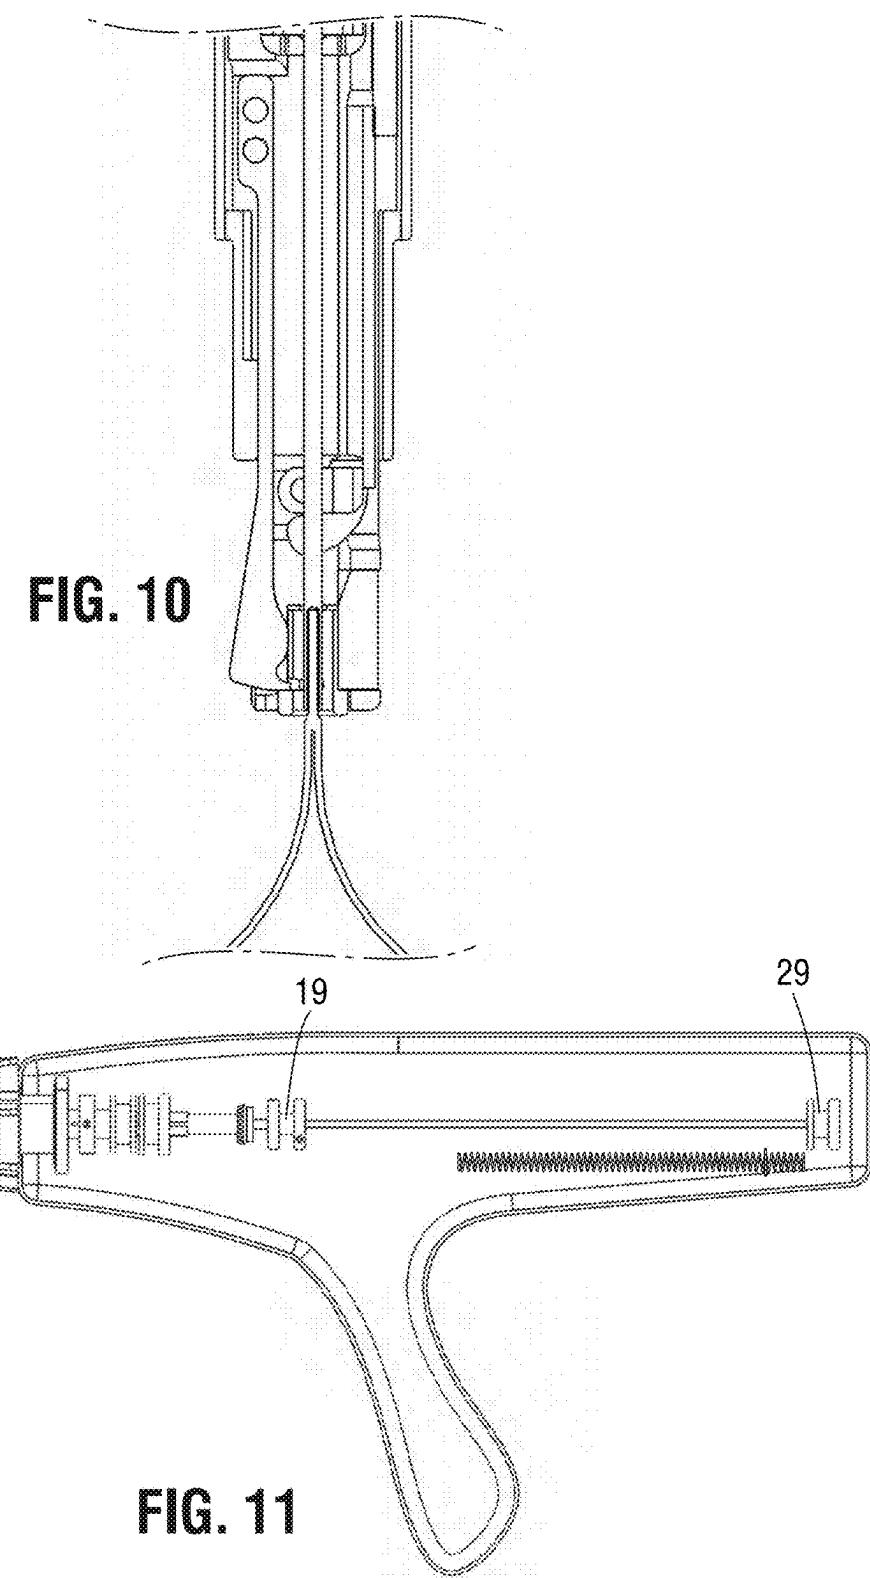


FIG. 9



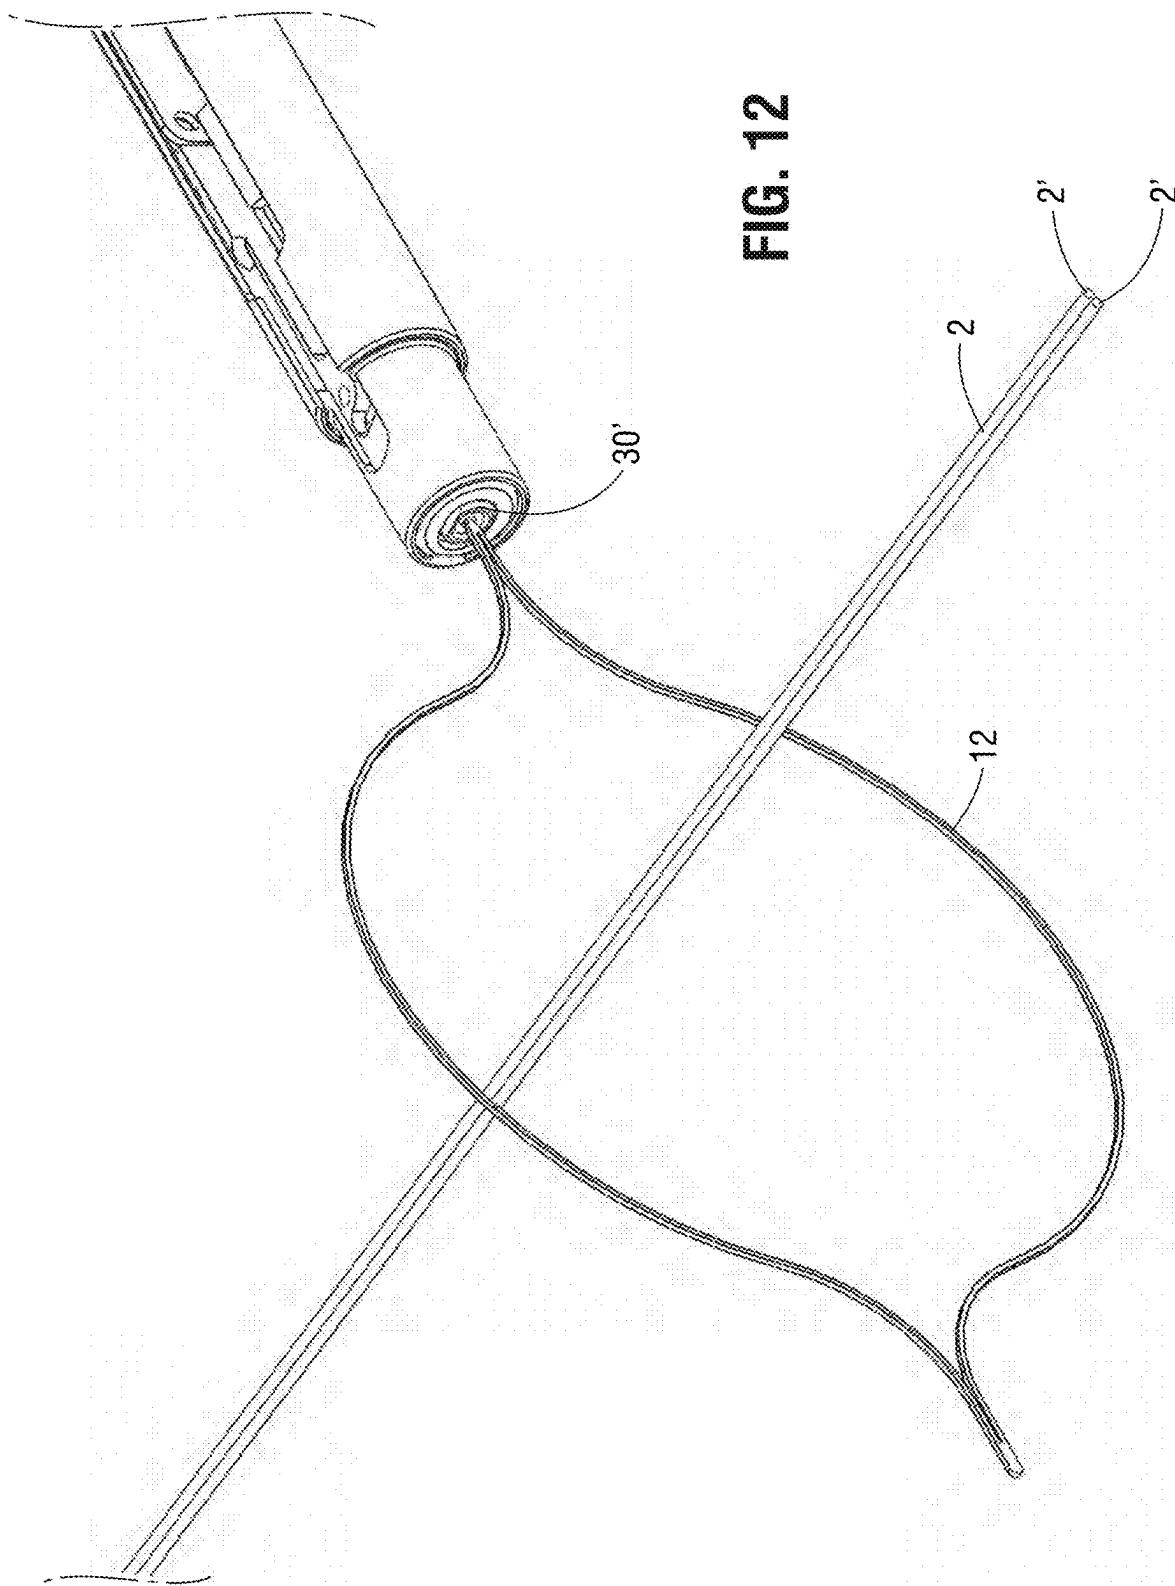


FIG. 12

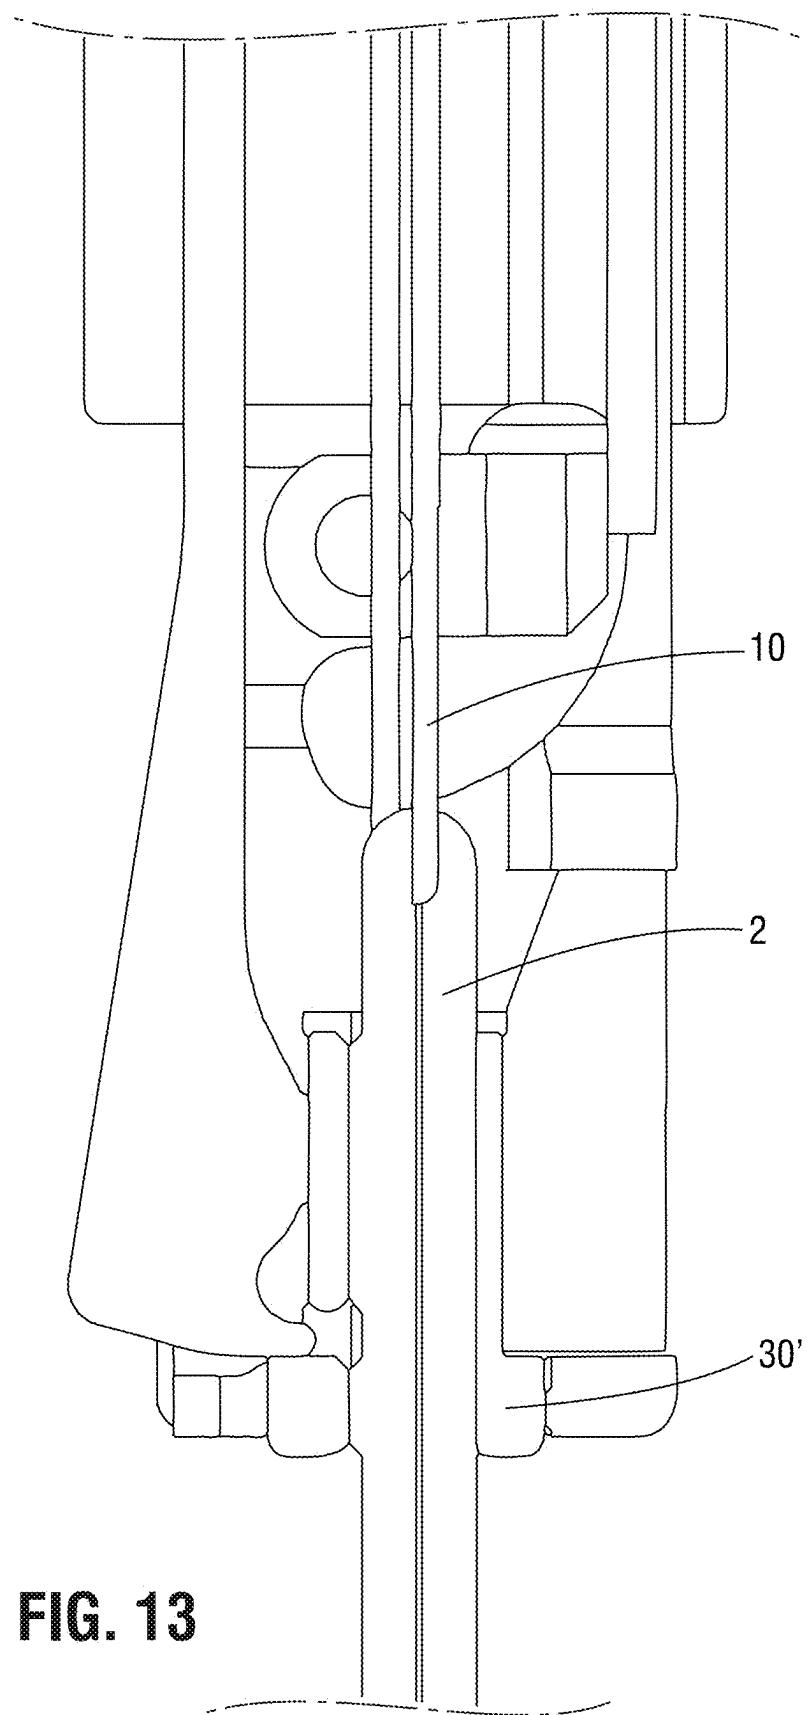


FIG. 14

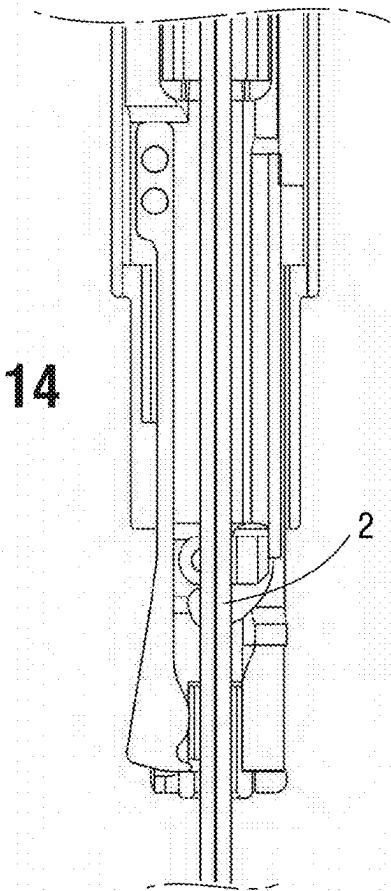


FIG. 15

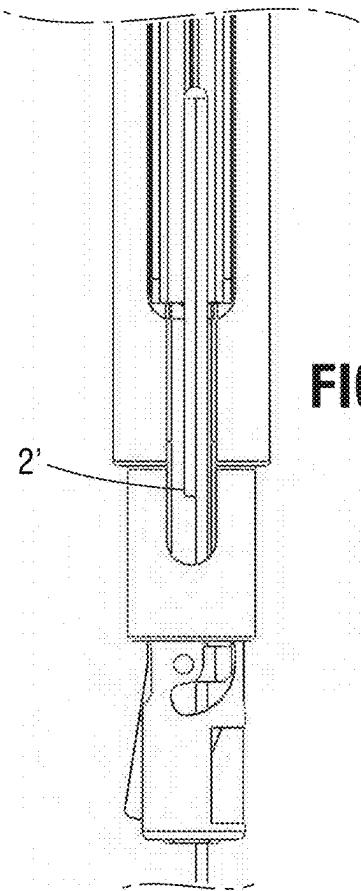


FIG. 16

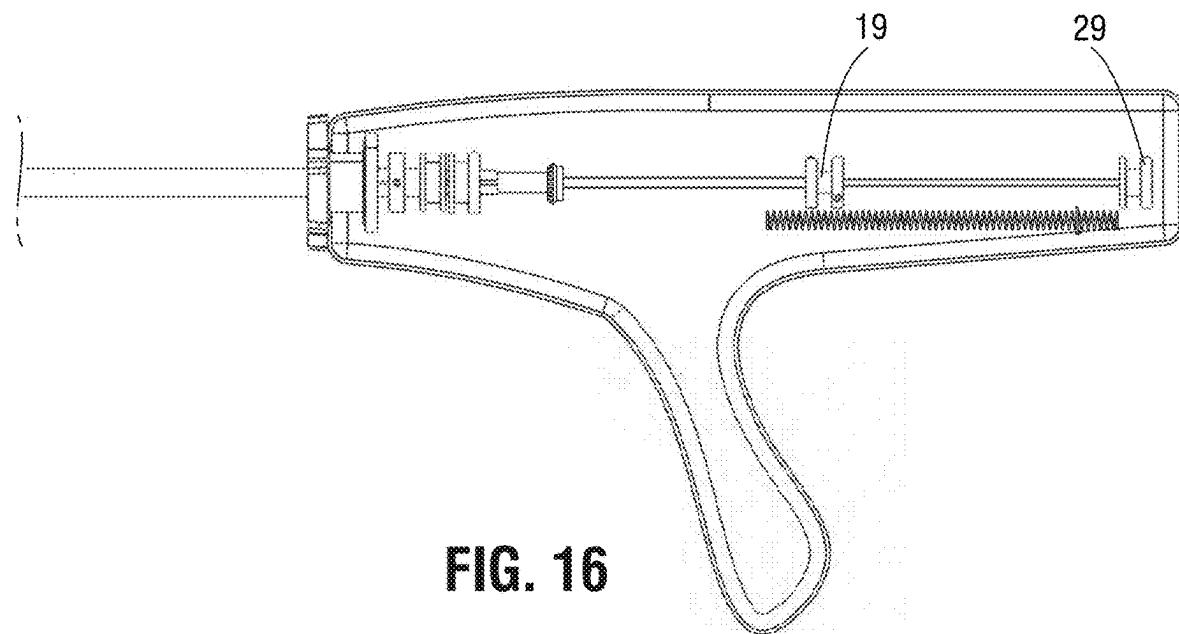


FIG. 17

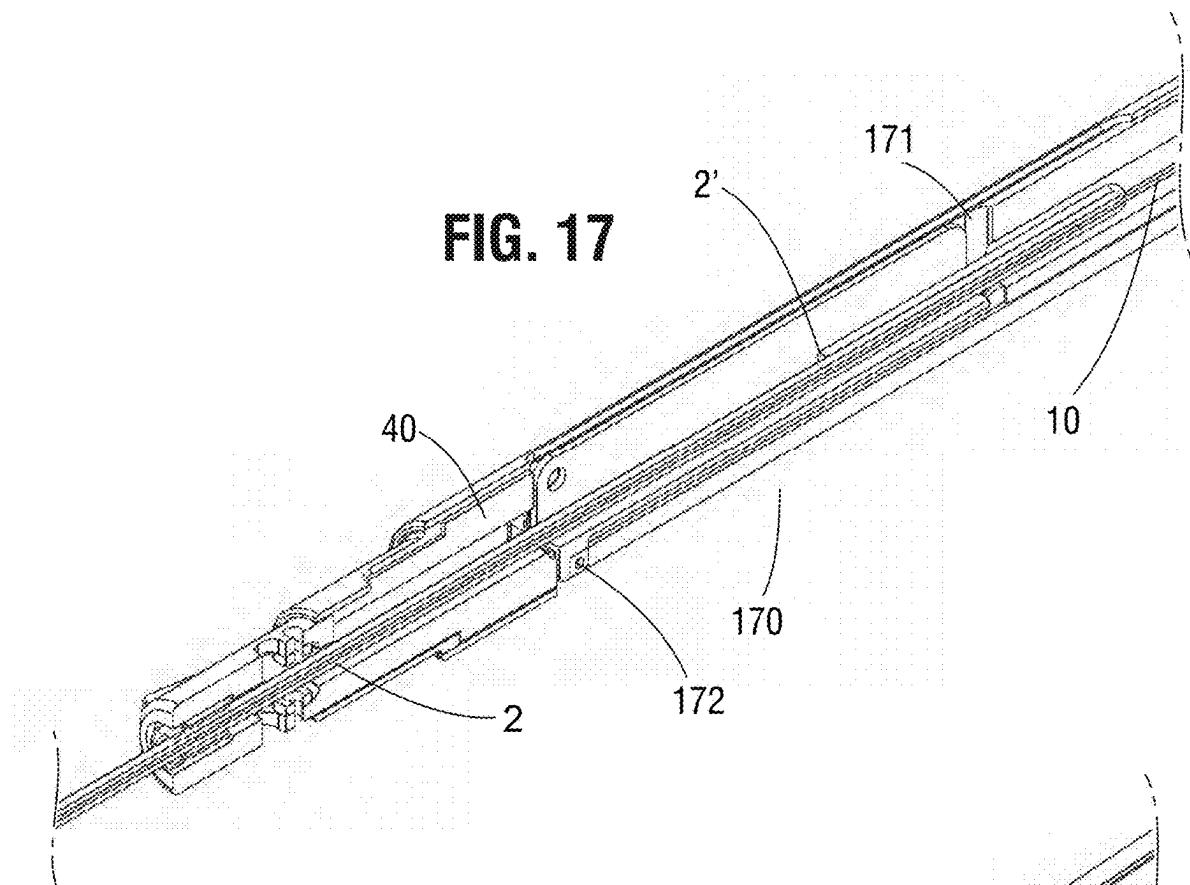


FIG. 18

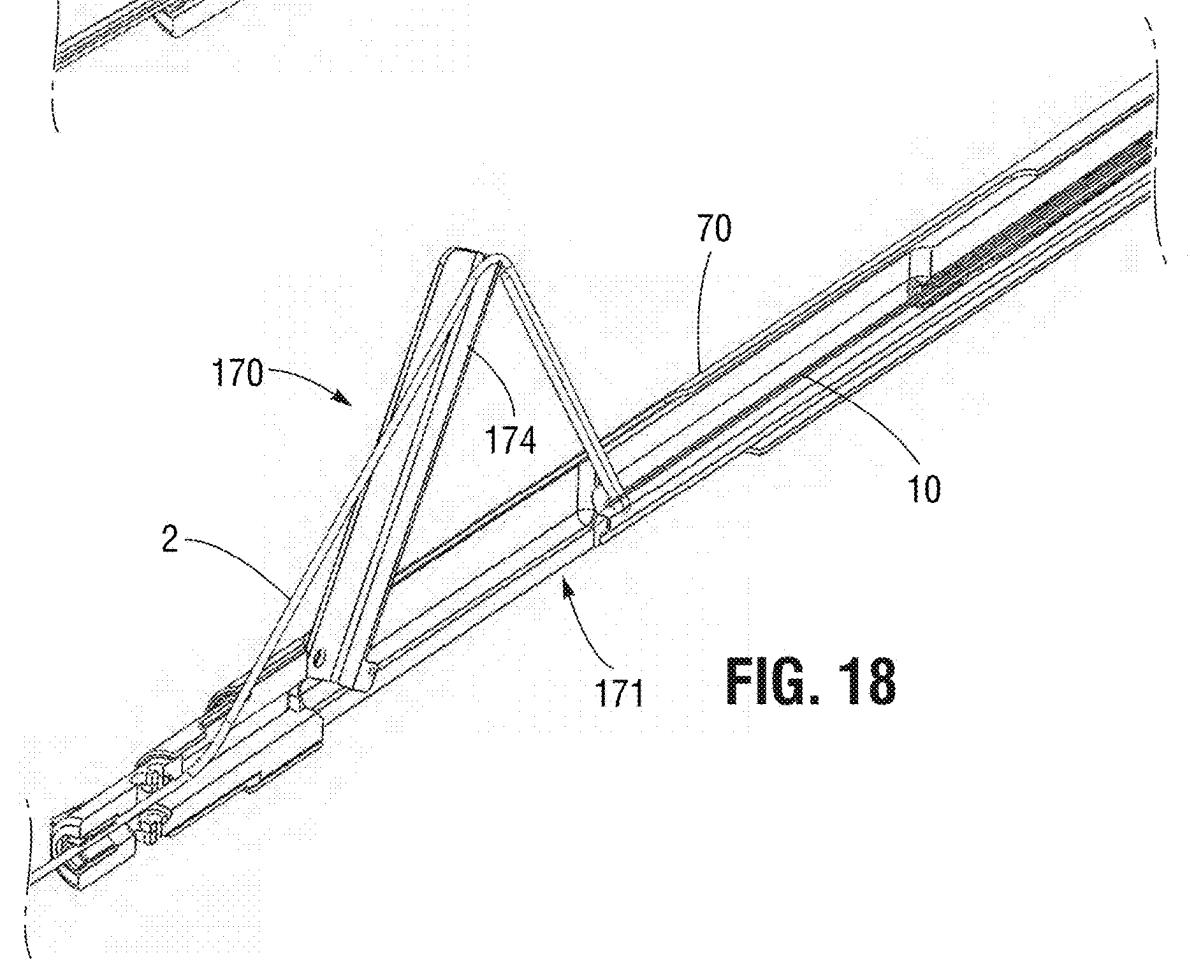


FIG. 19

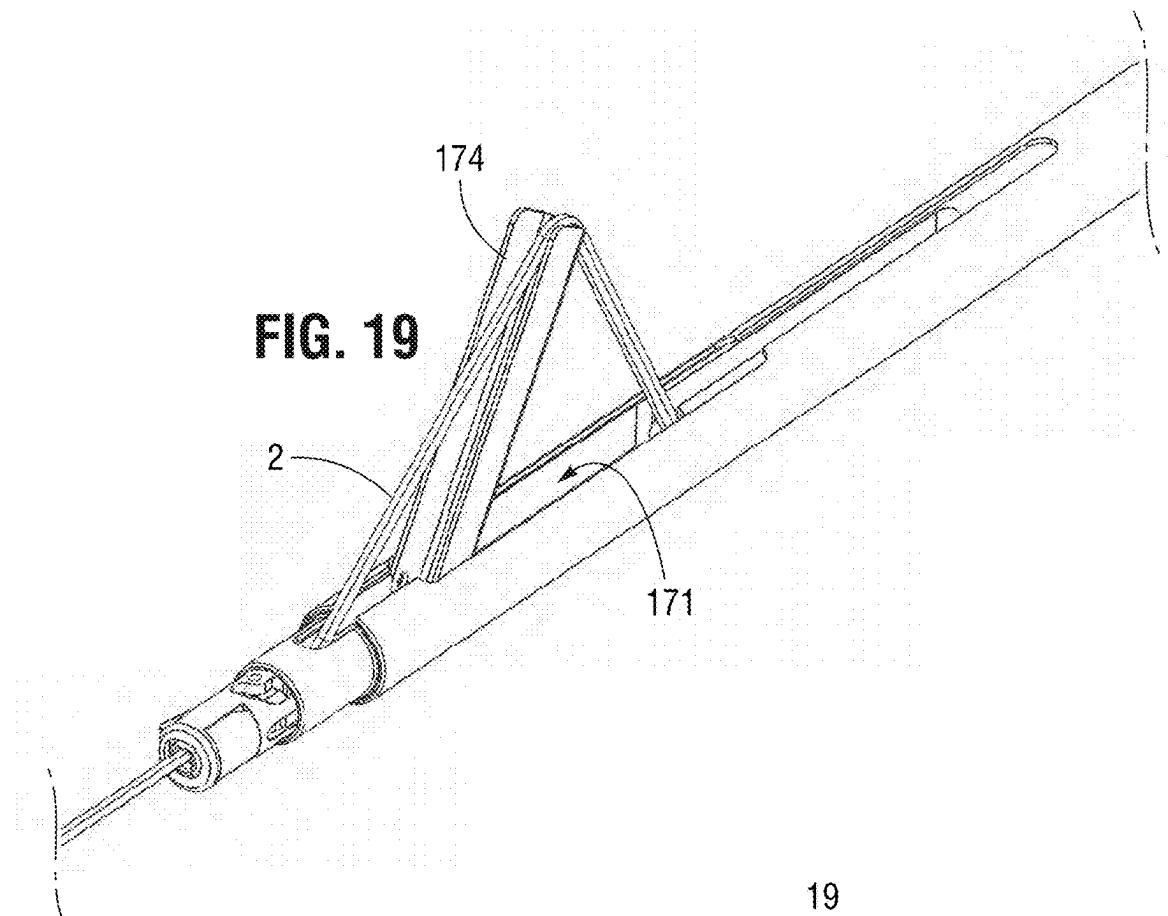


FIG. 20

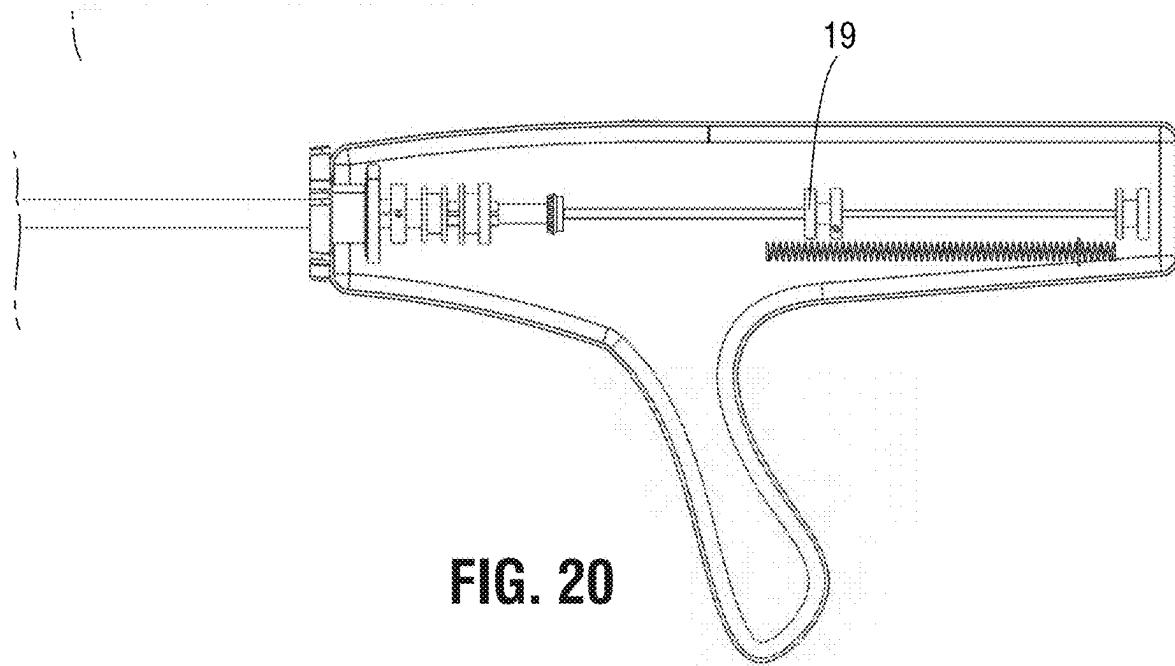


FIG. 21

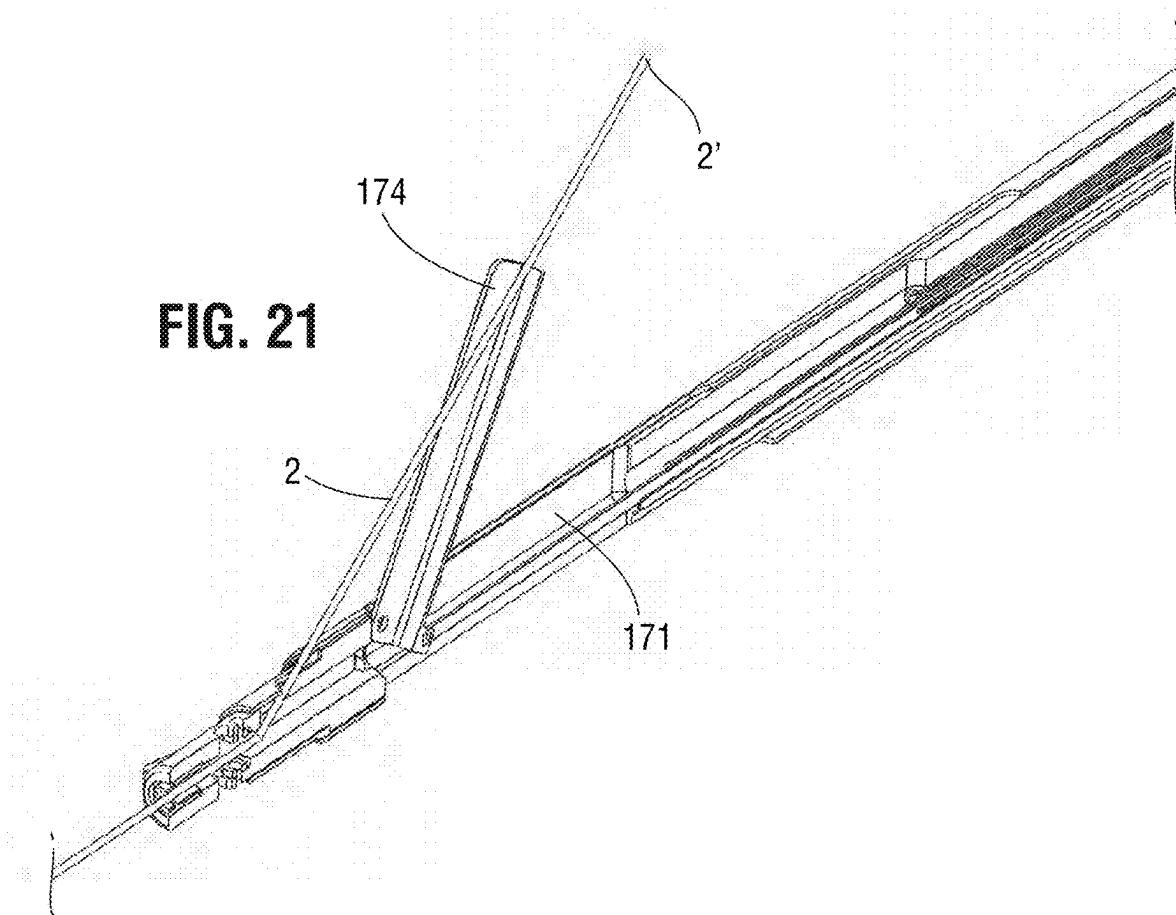


FIG. 22


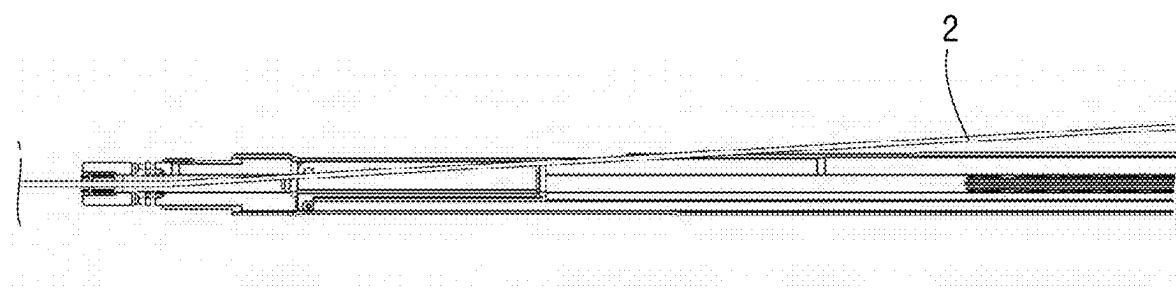


FIG. 23

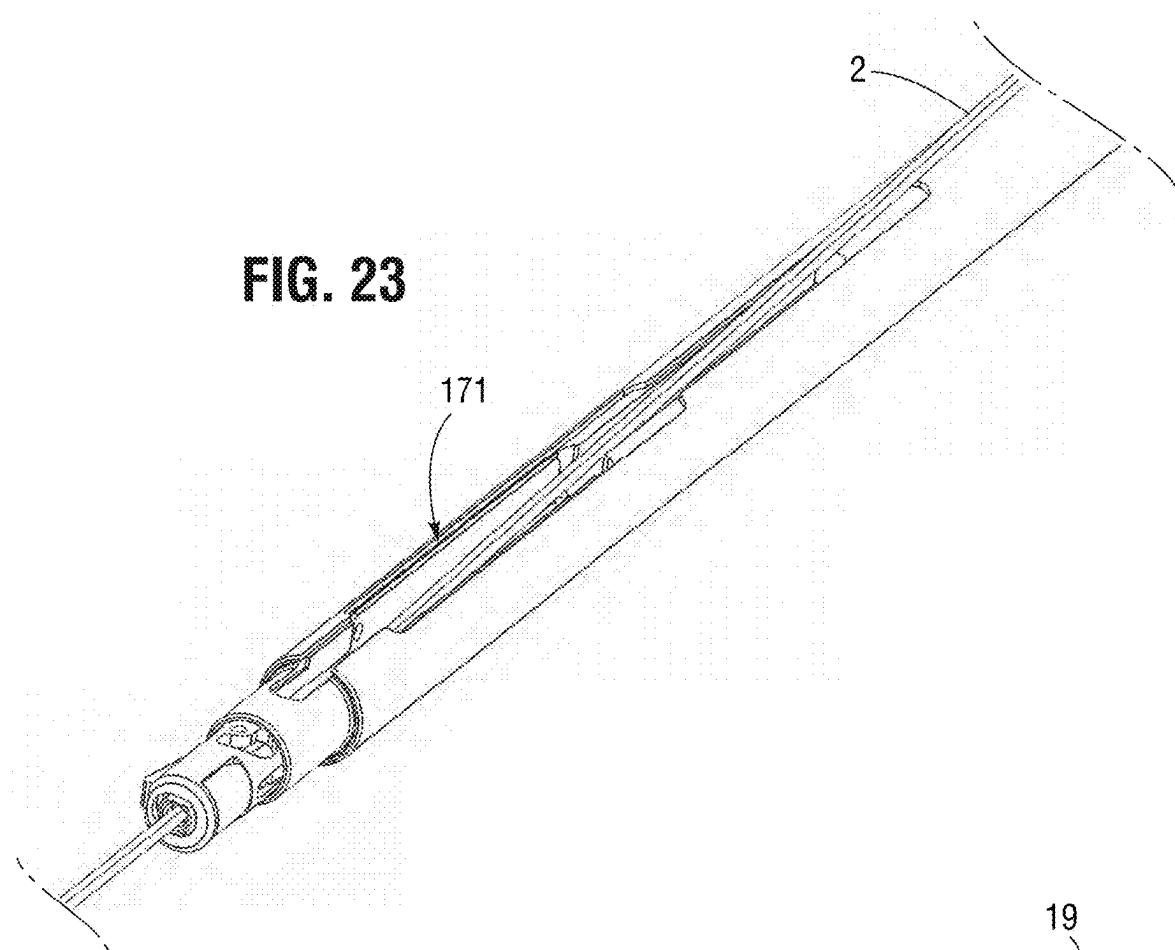

19

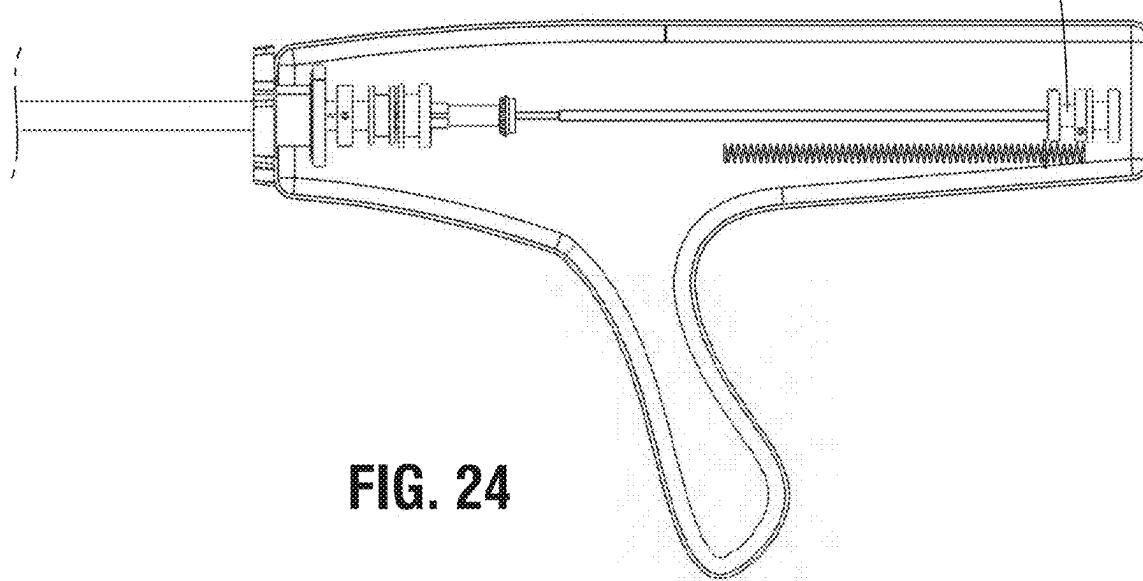


FIG. 24

FIG. 25

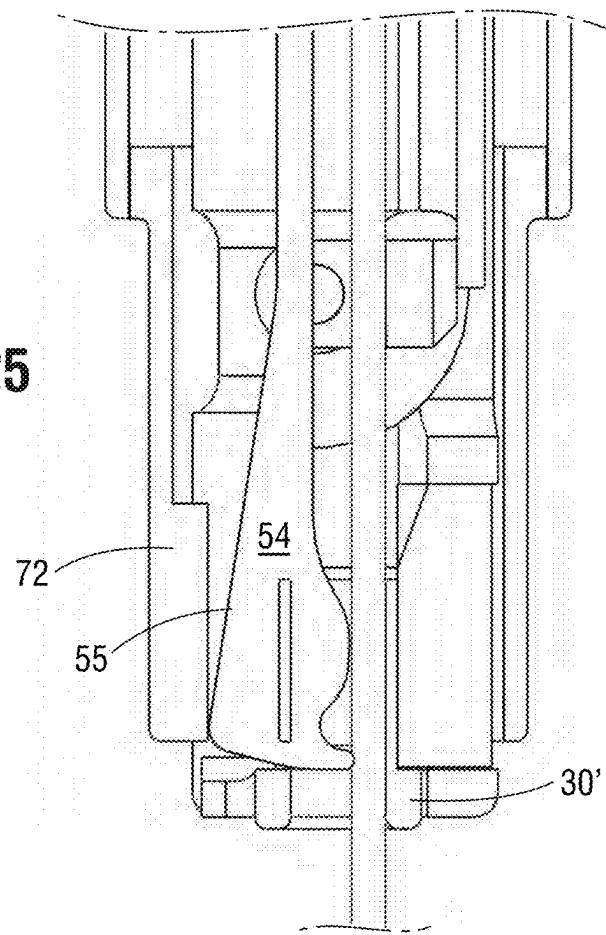
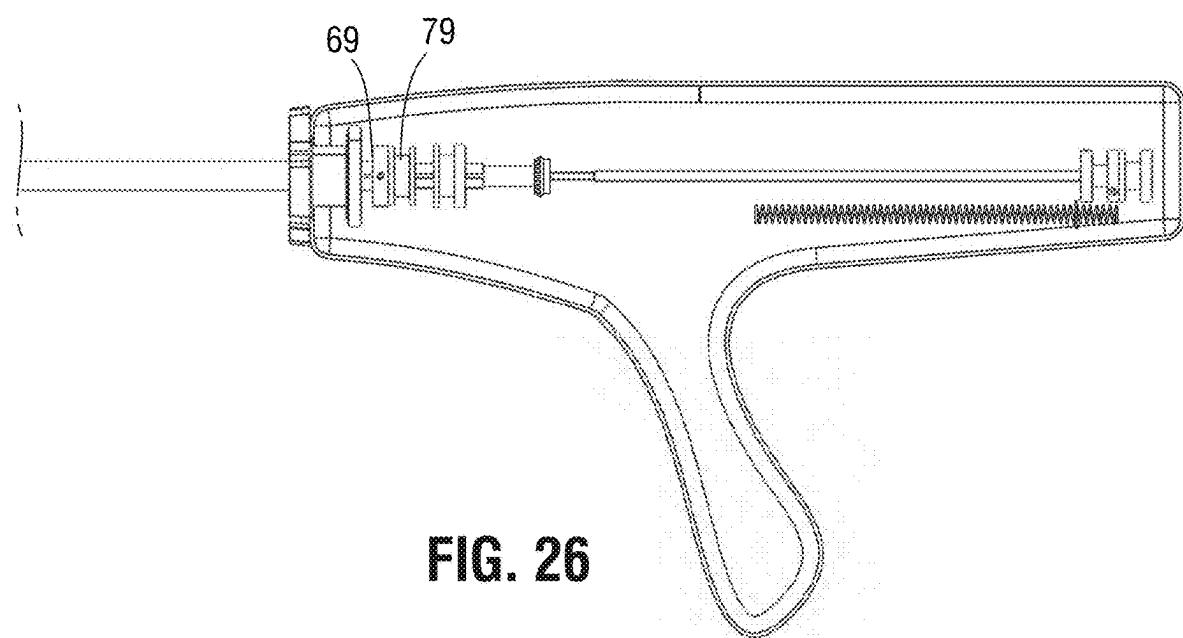


FIG. 26



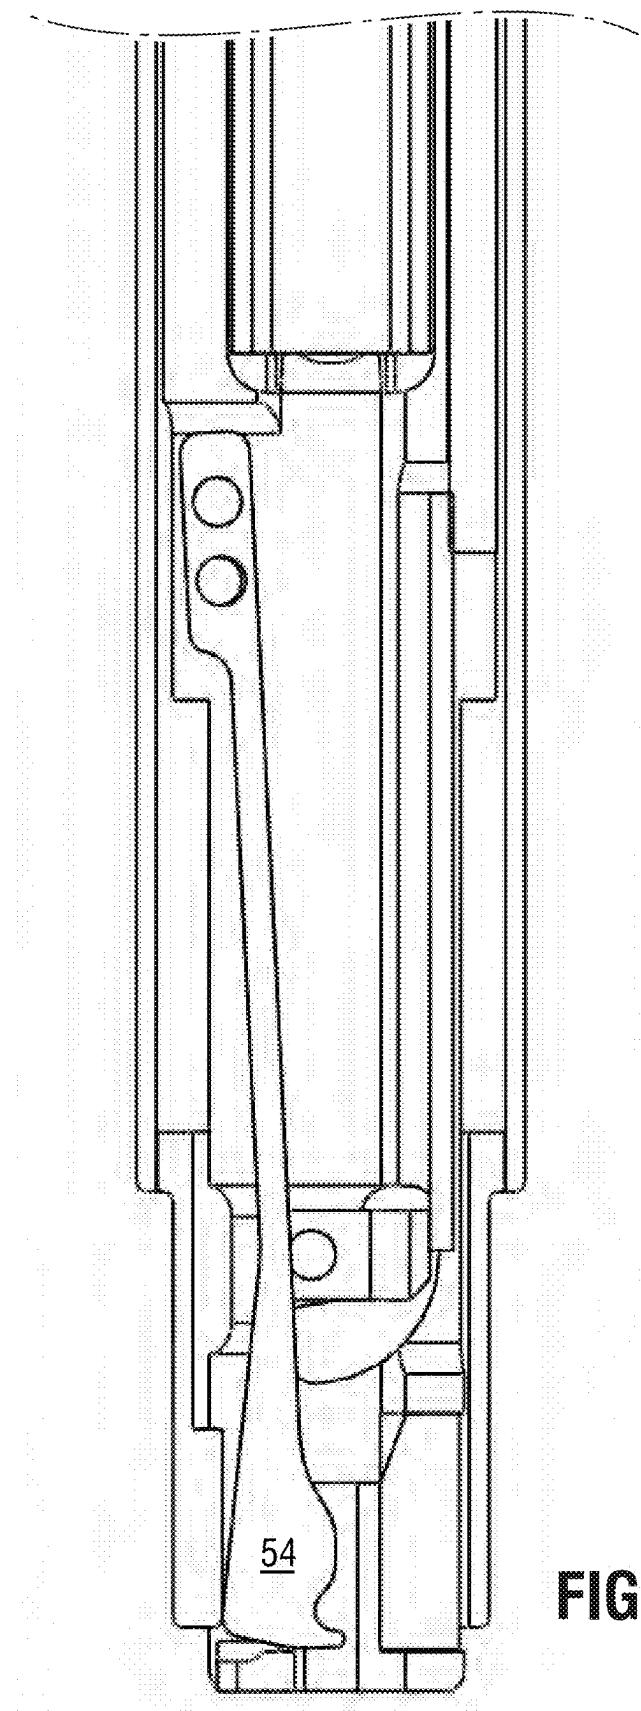


FIG. 27

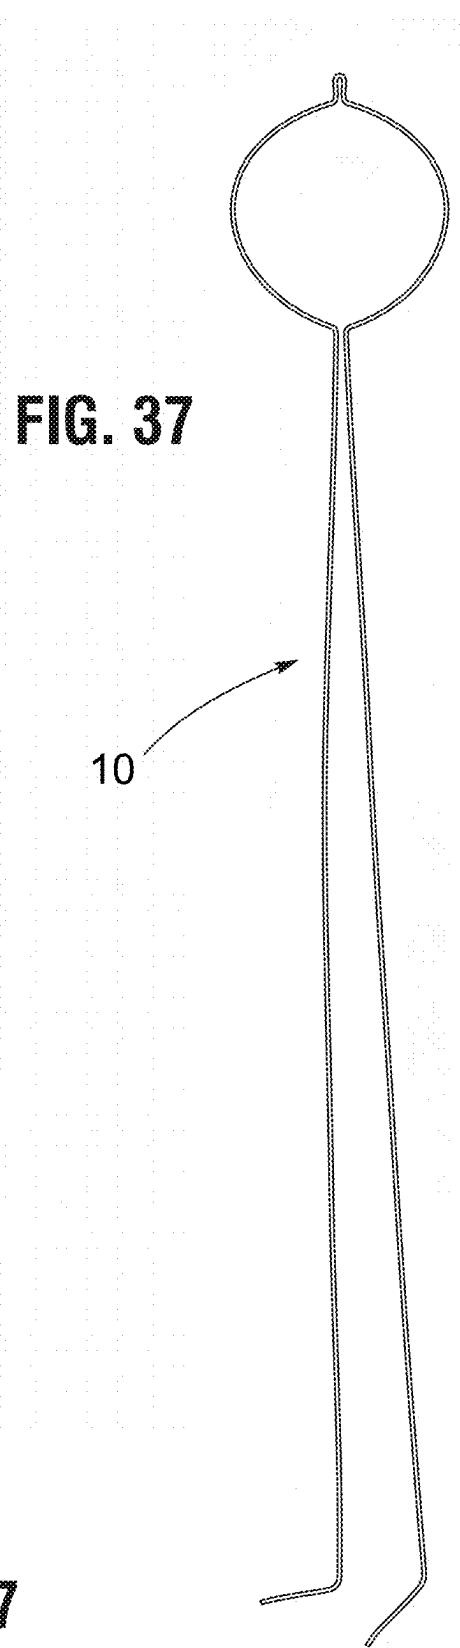


FIG. 37

FIG. 28

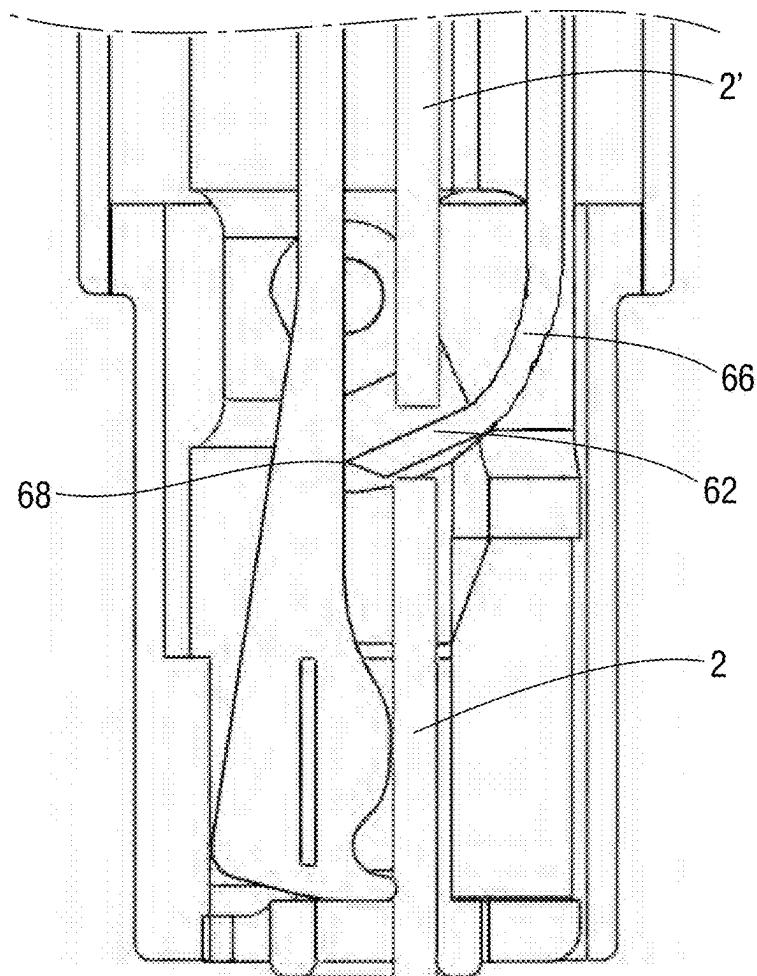


FIG. 29

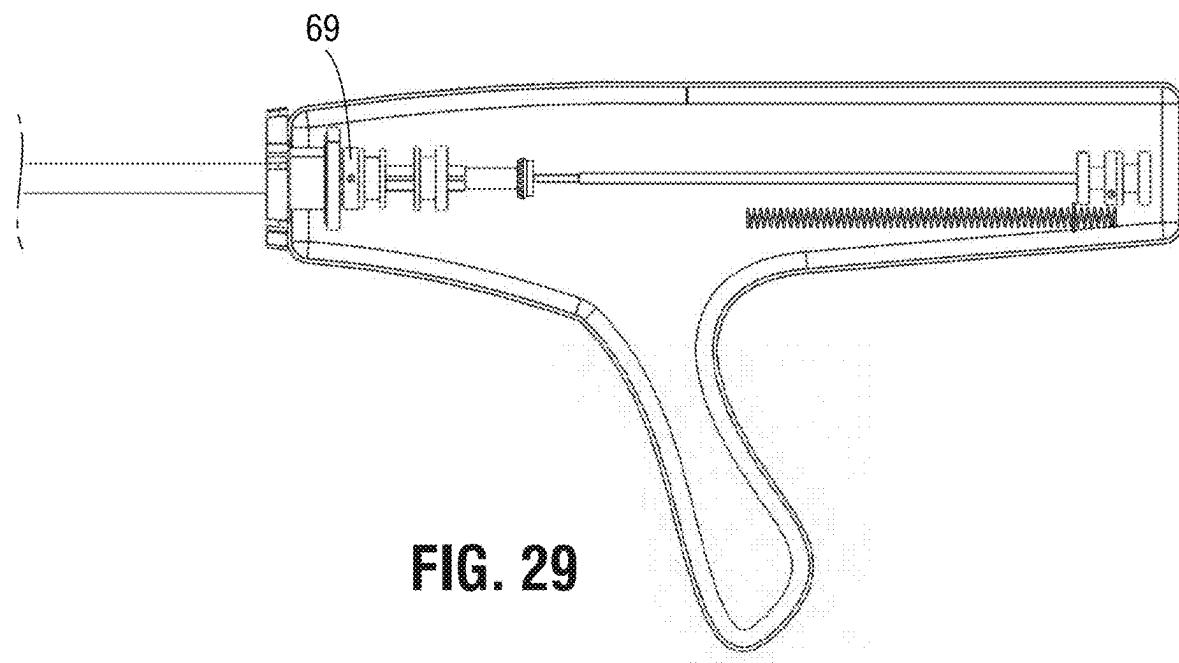


FIG. 30

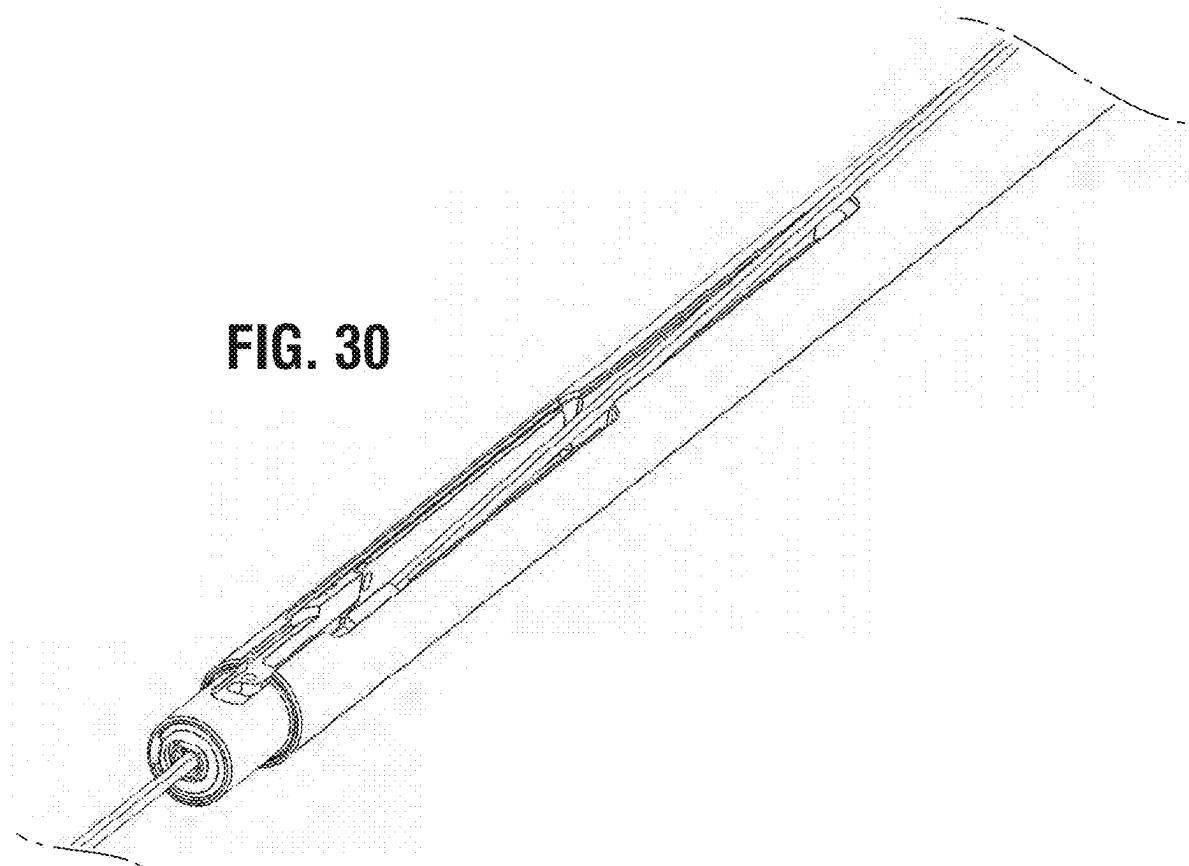


FIG. 31

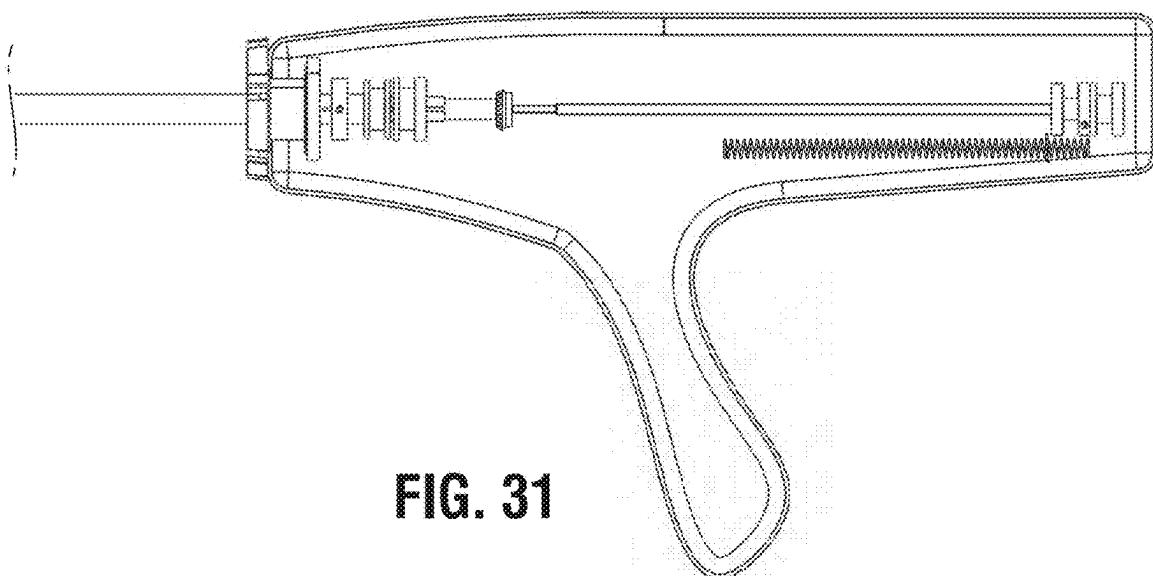


FIG. 32

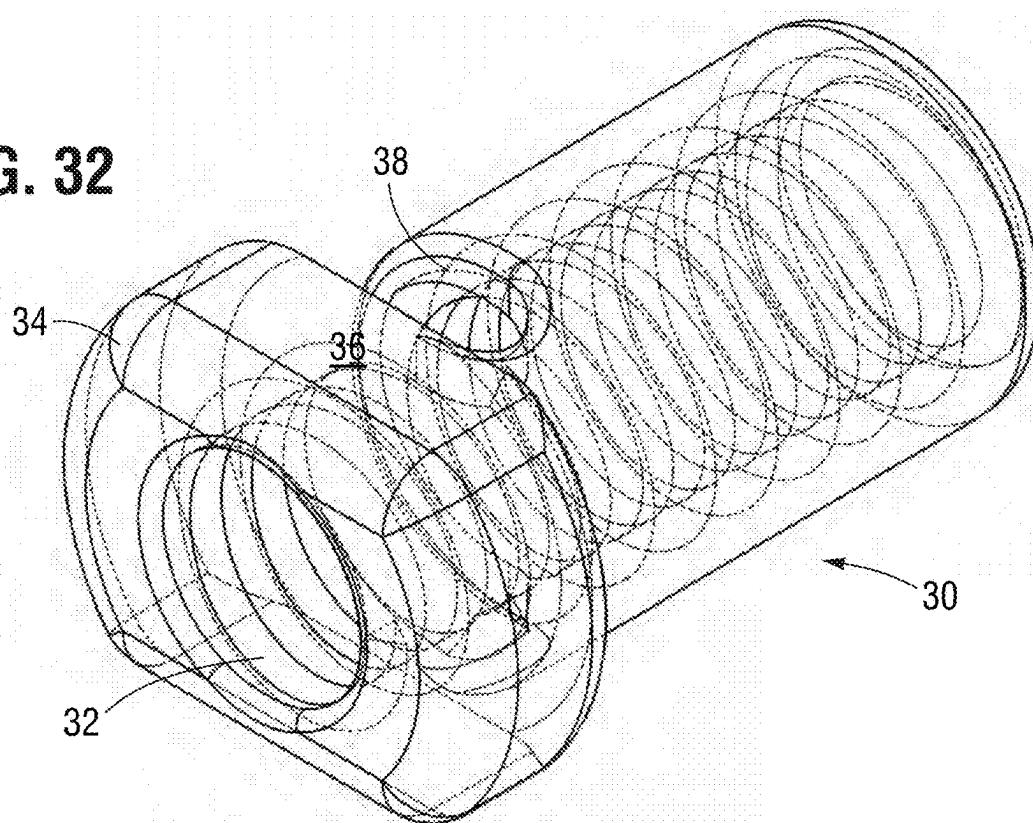
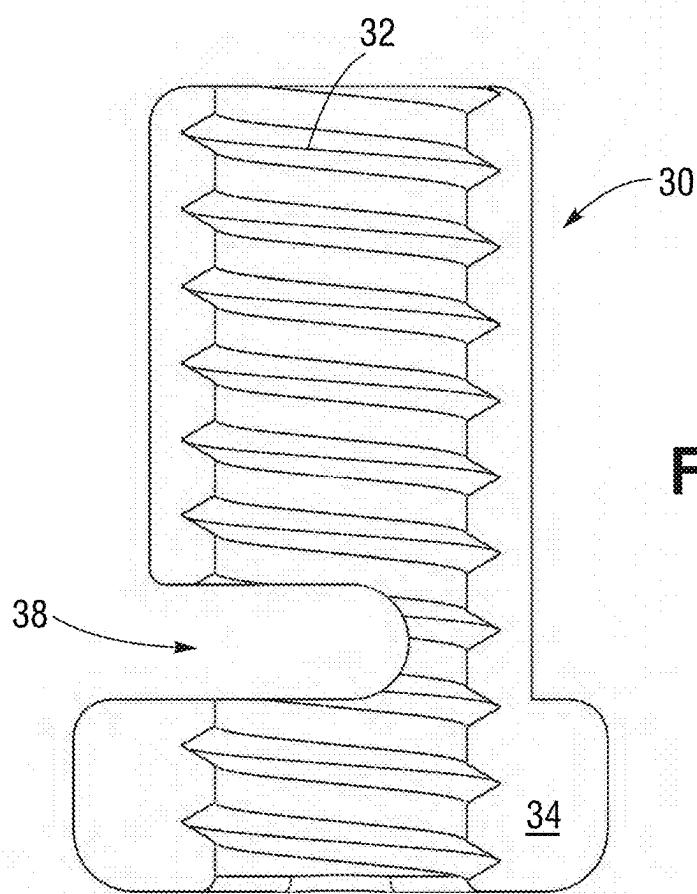
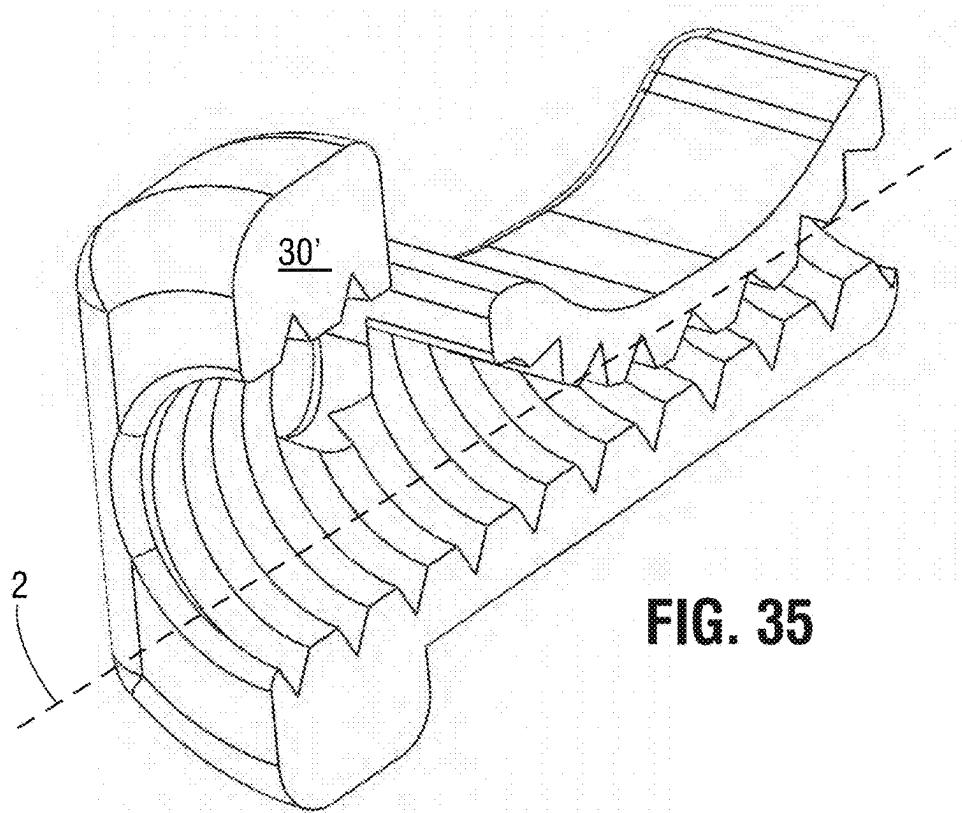
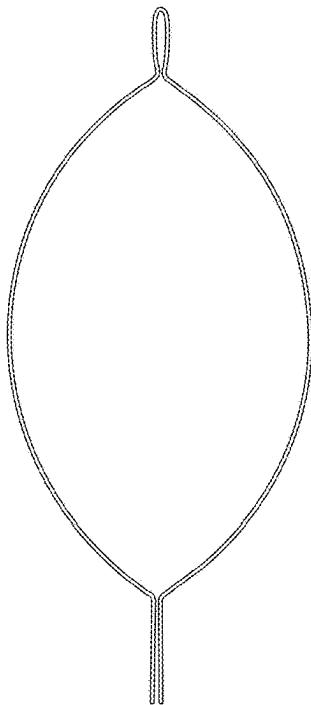
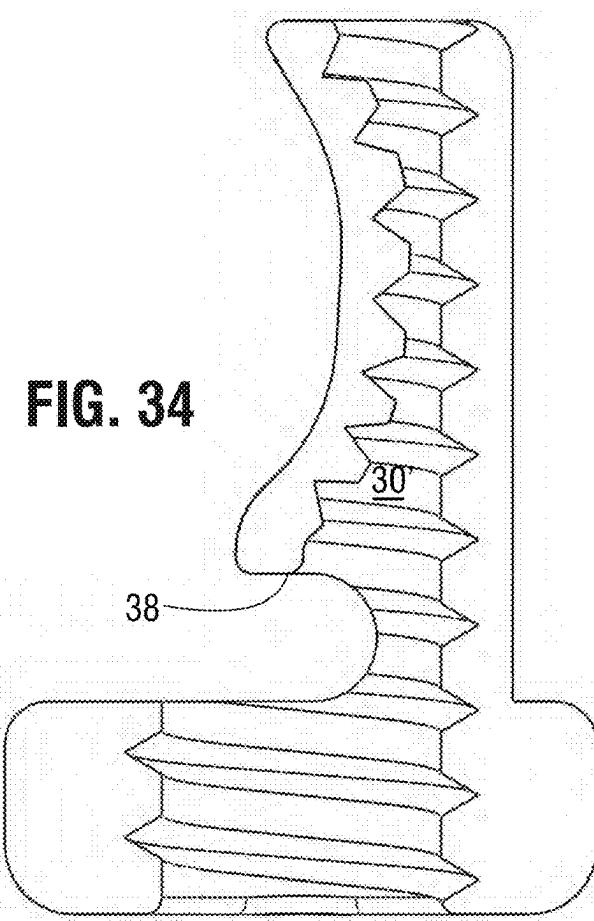


FIG. 33





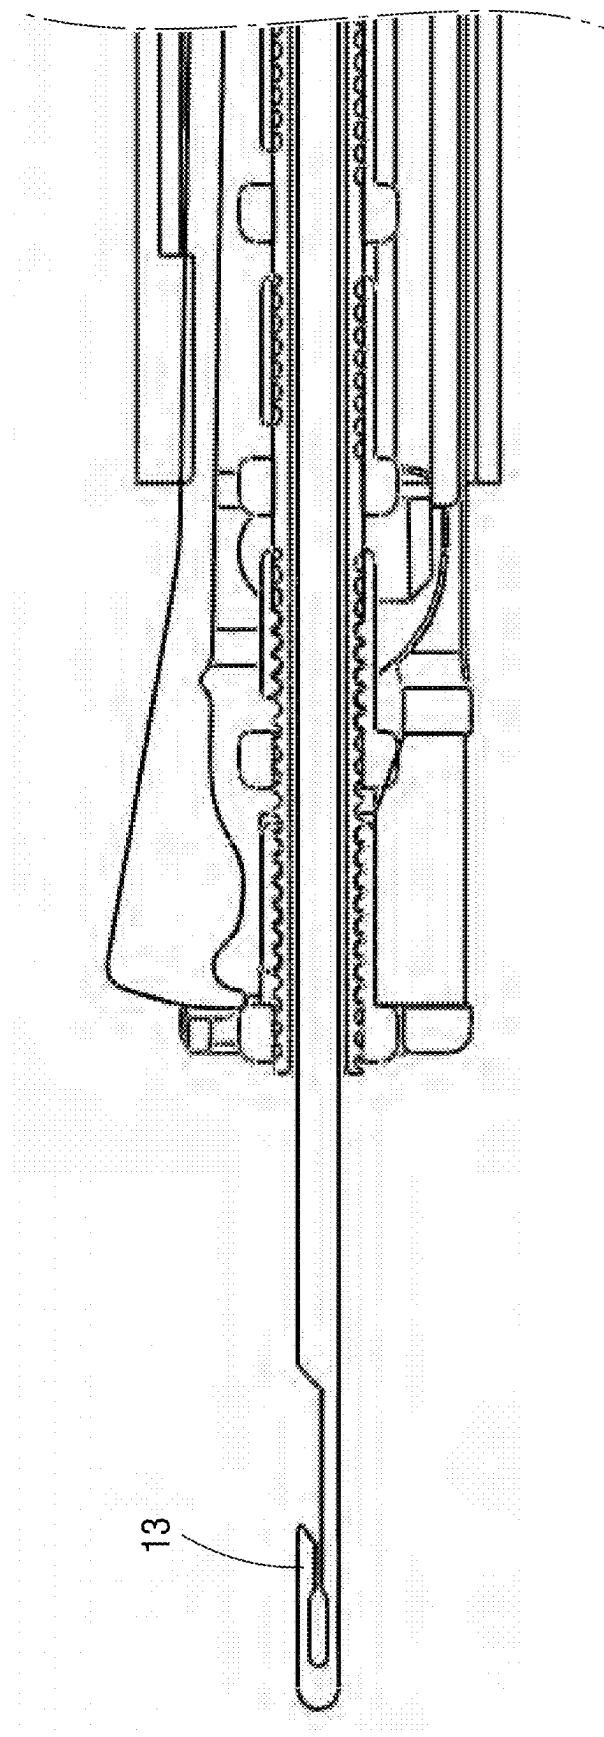


FIG. 39

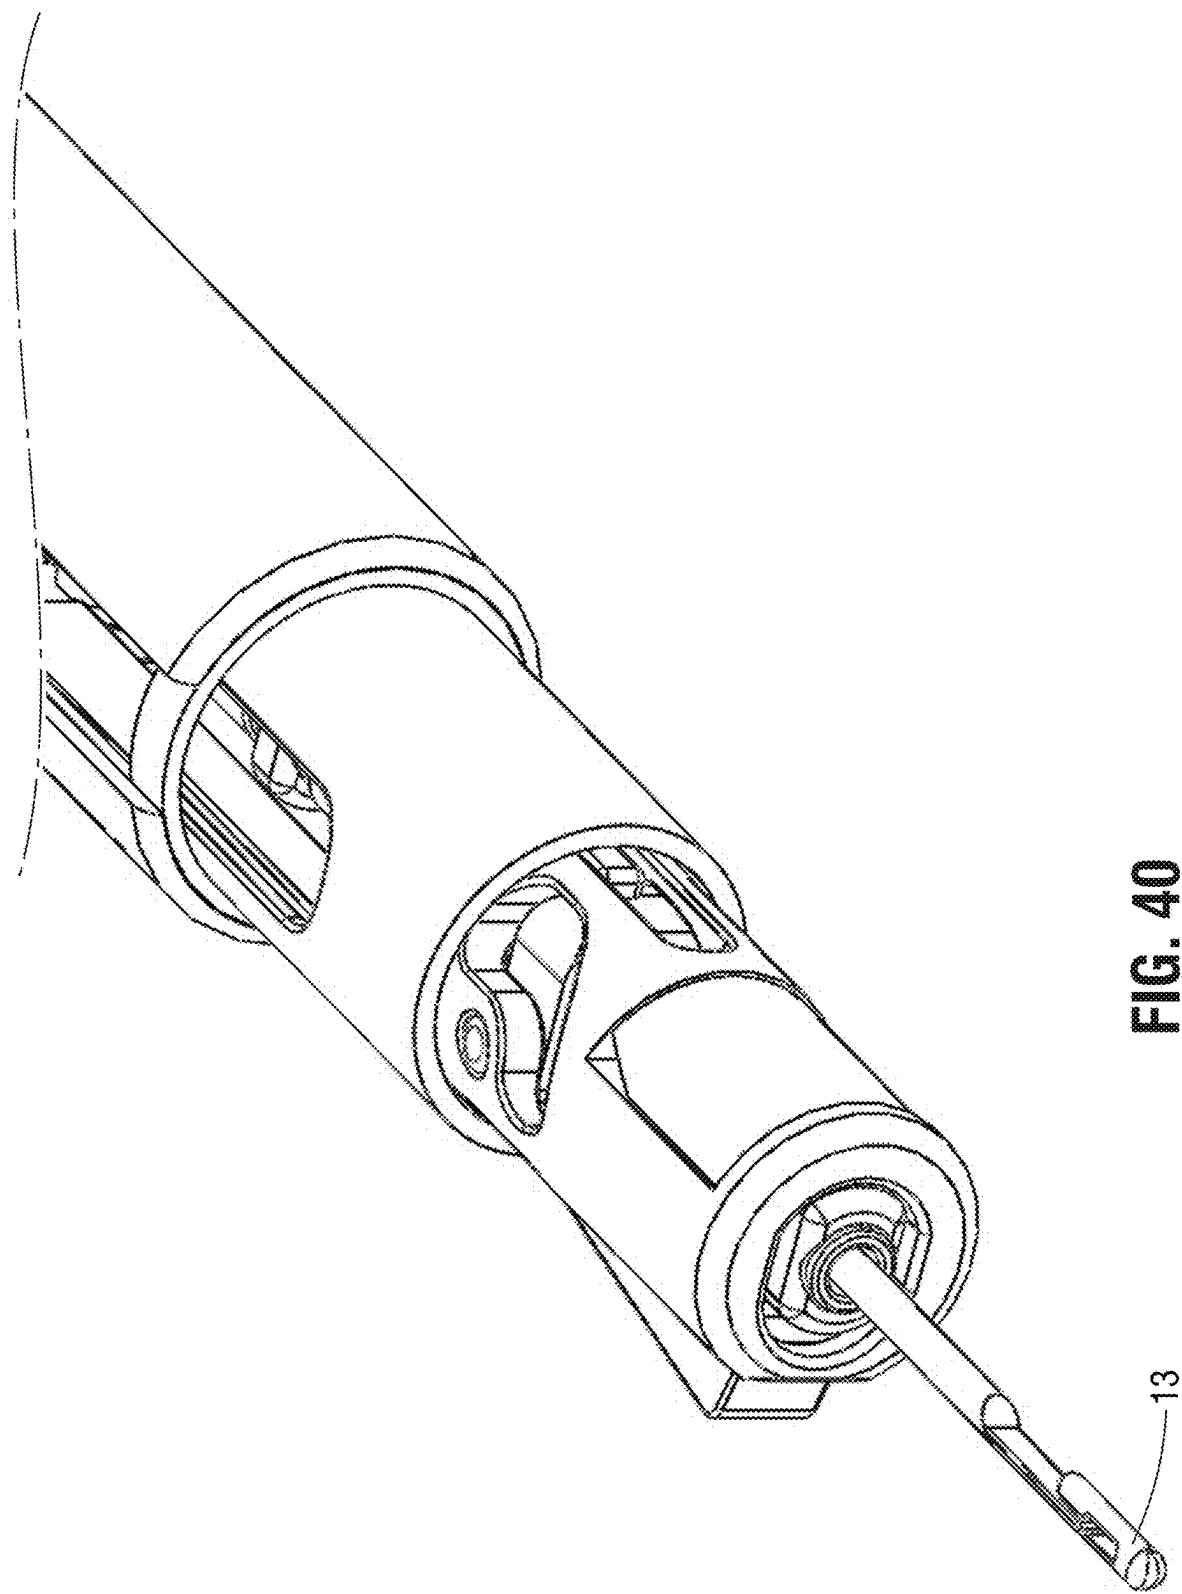
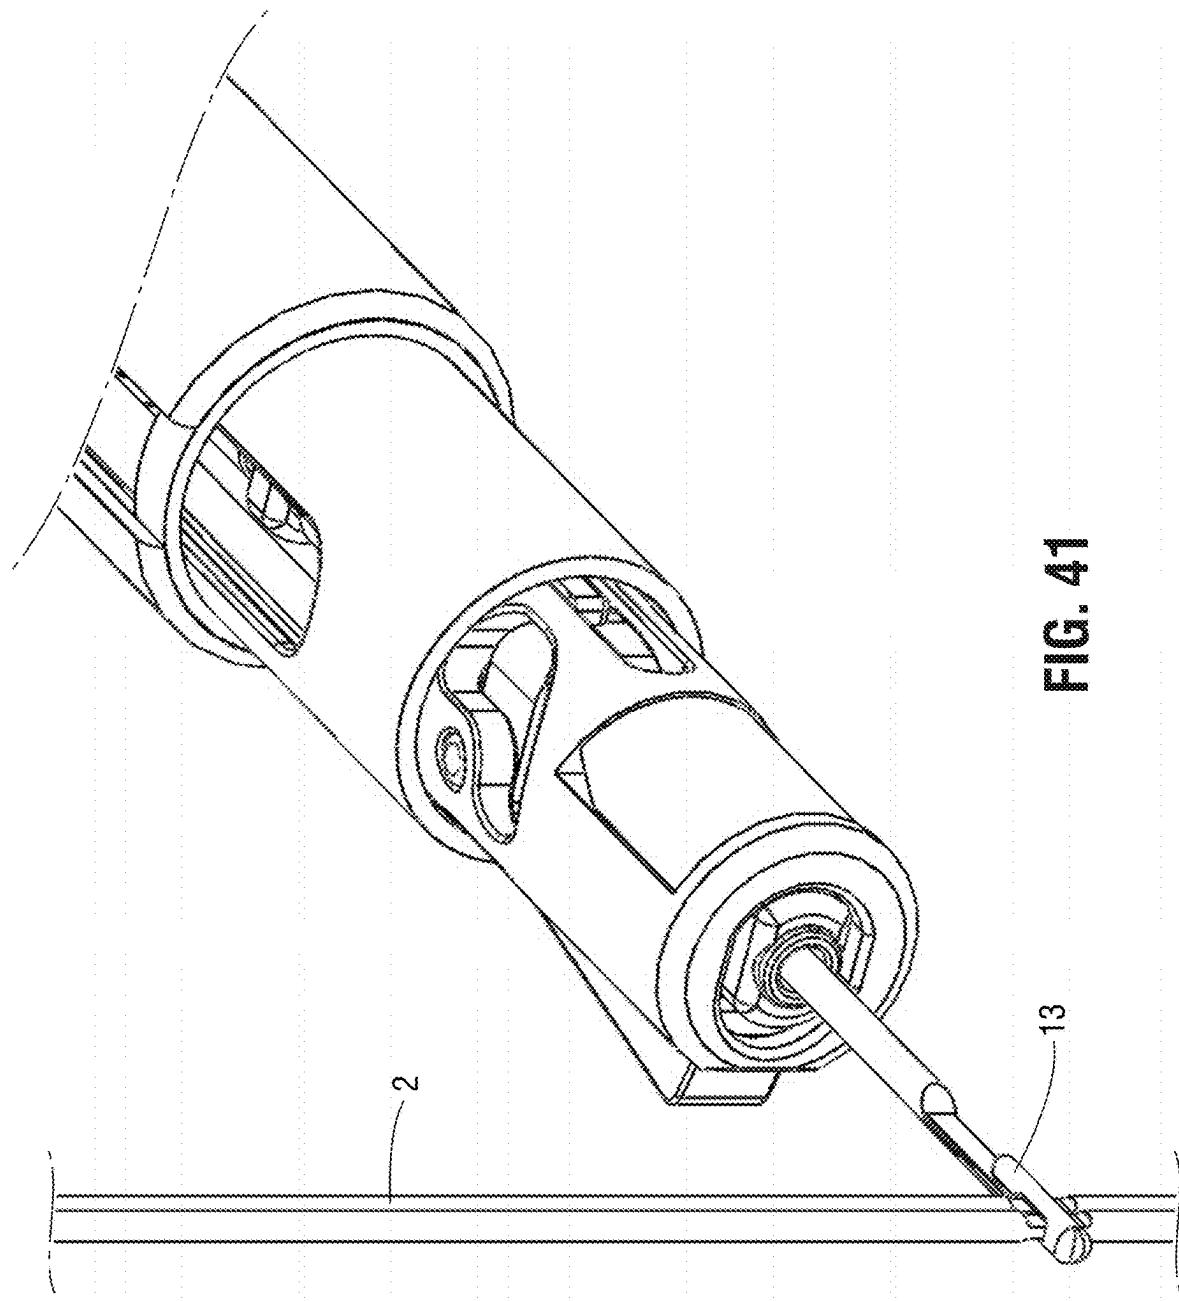
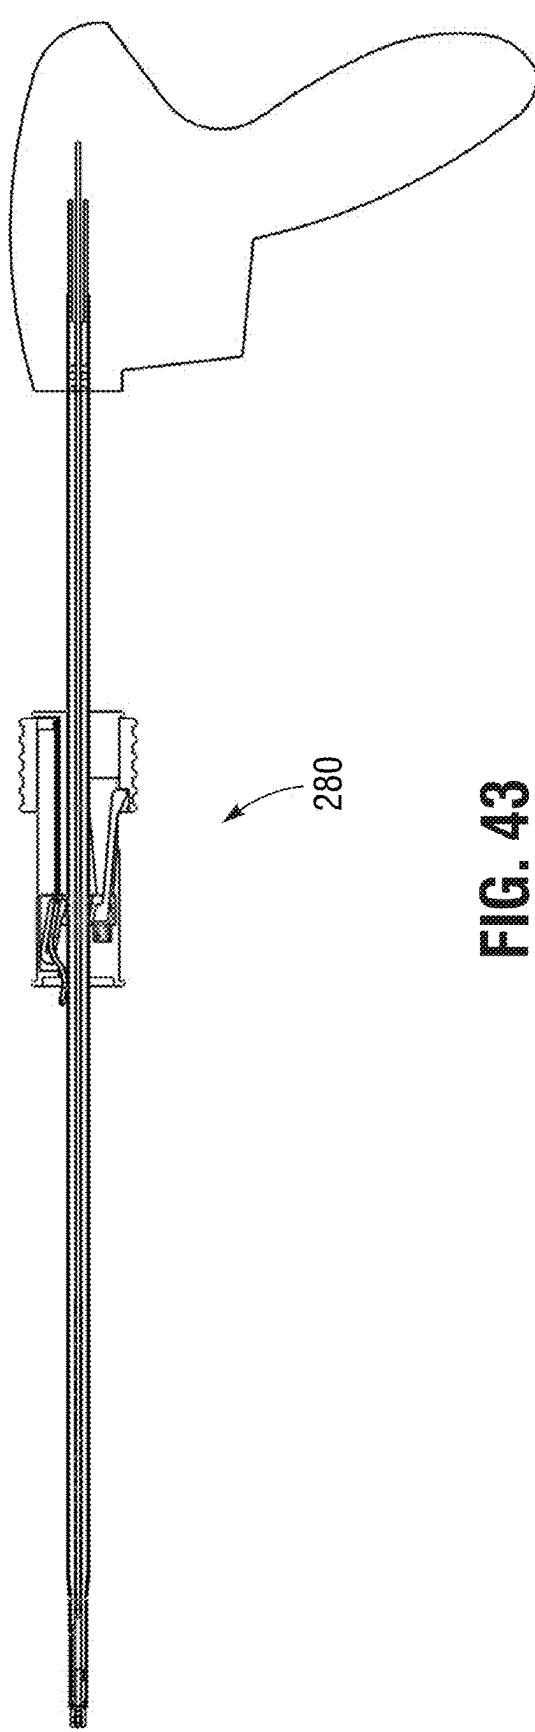
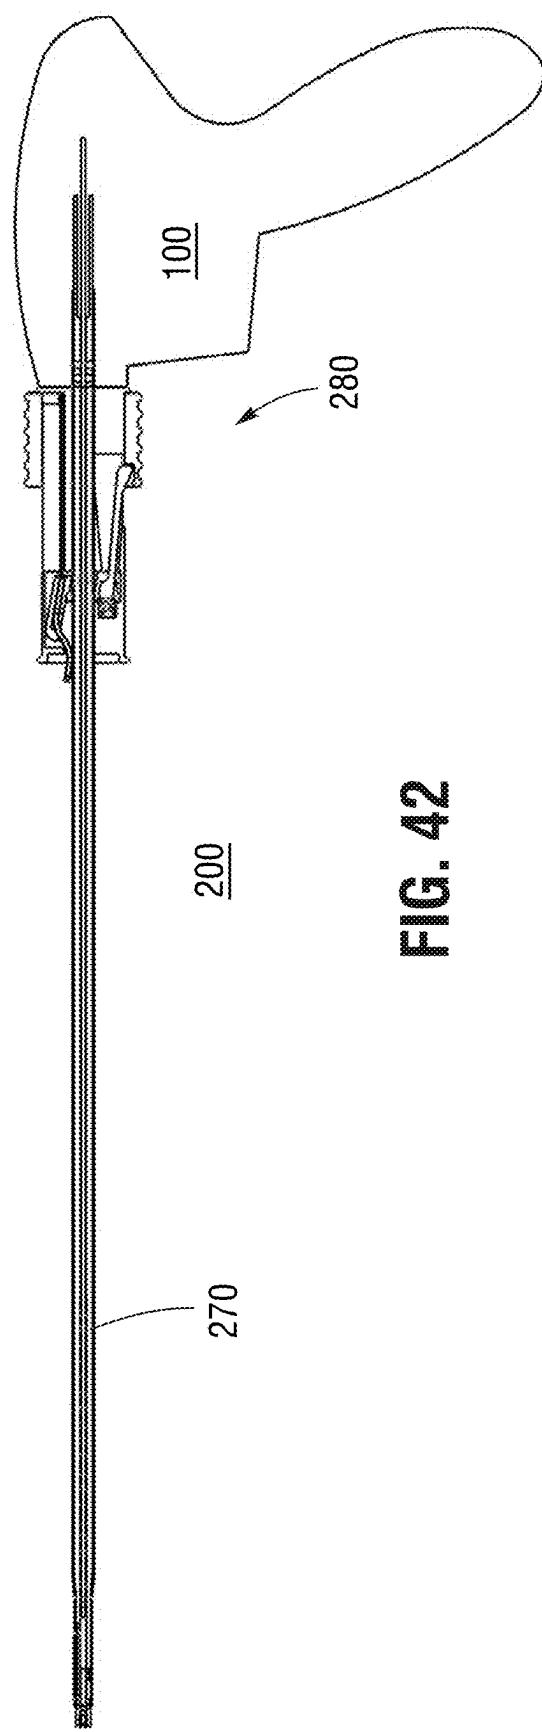


FIG. 40





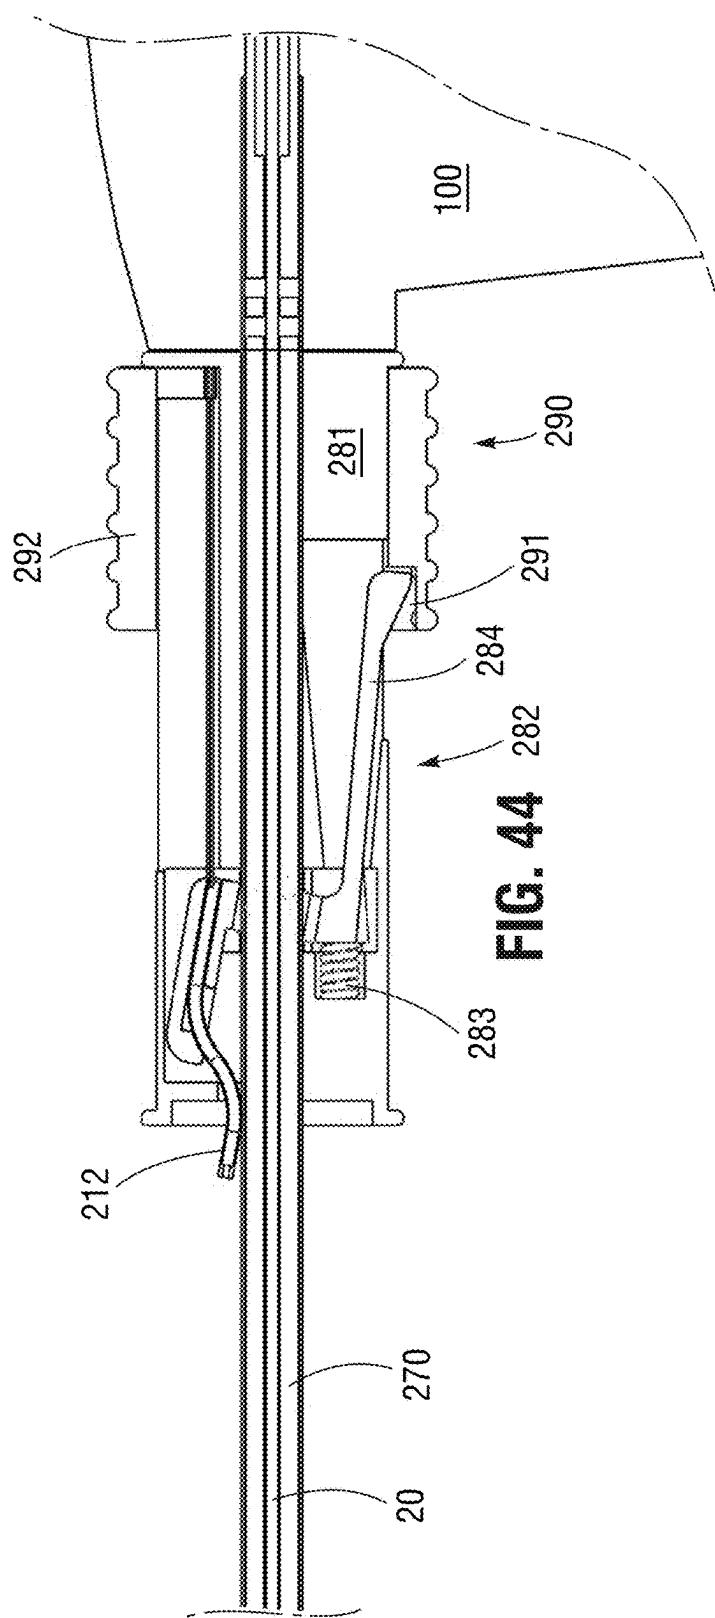


FIG. 44

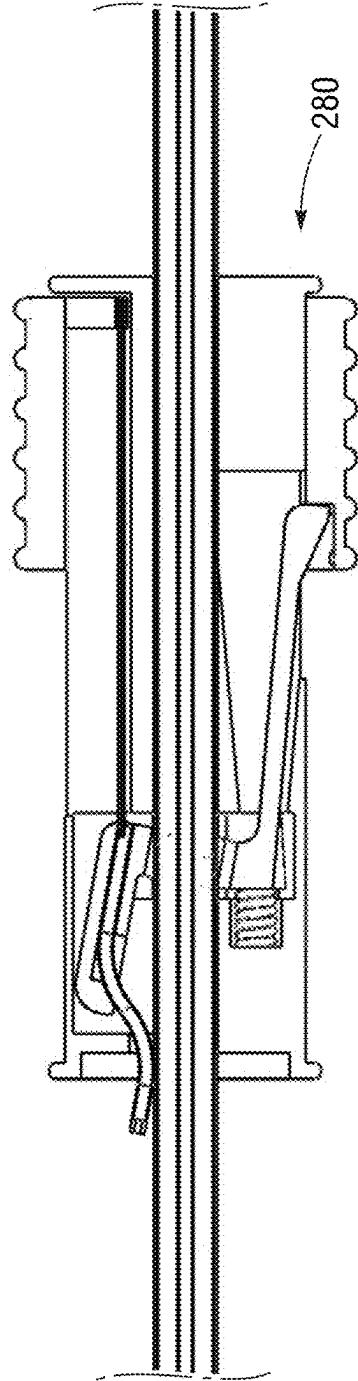


FIG. 45

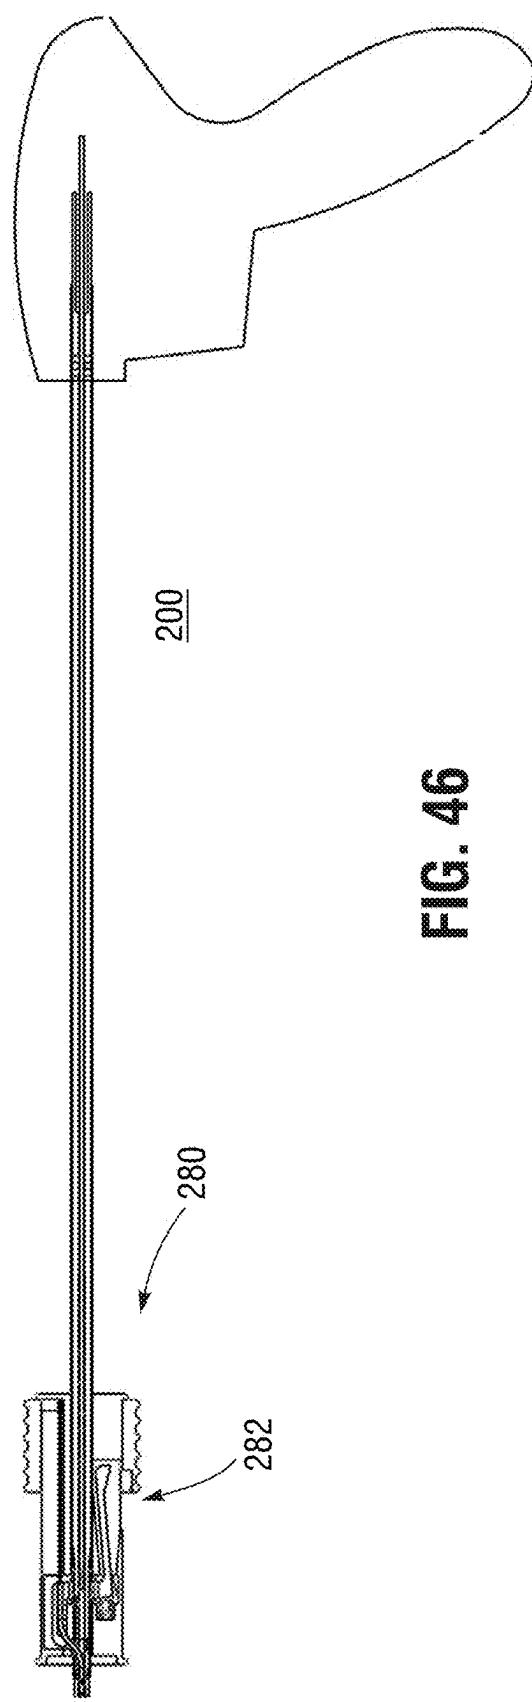


FIG. 46

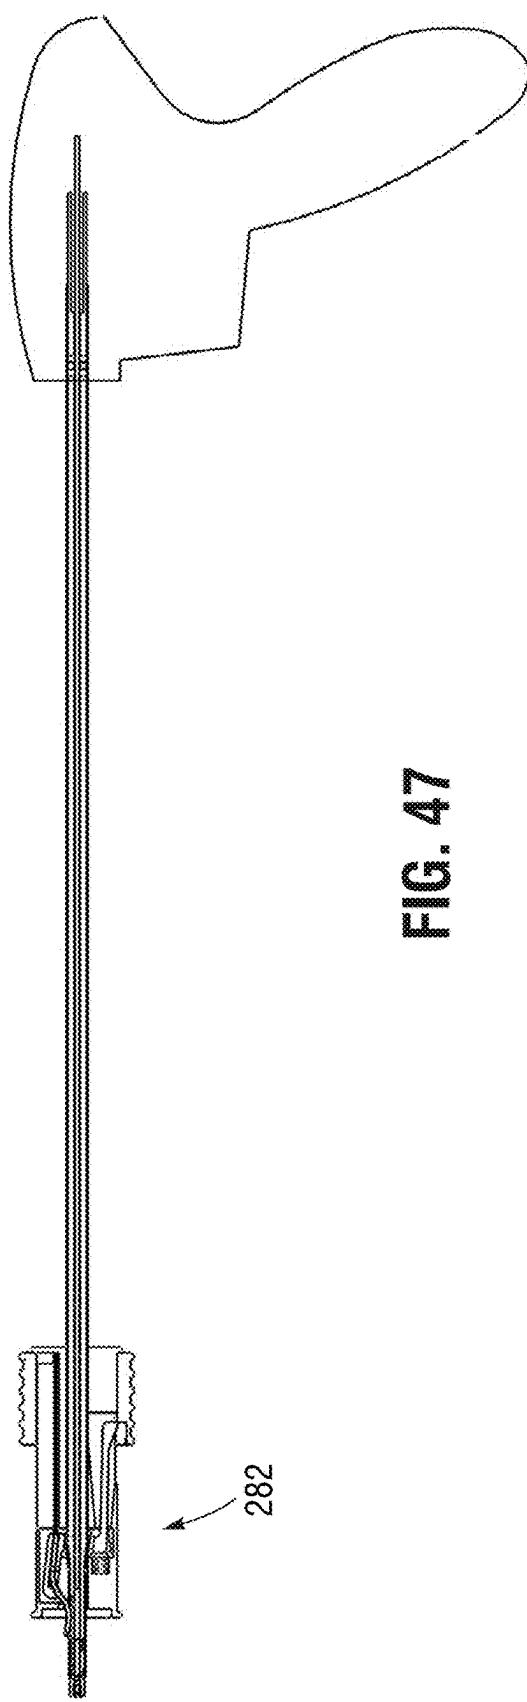


FIG. 47

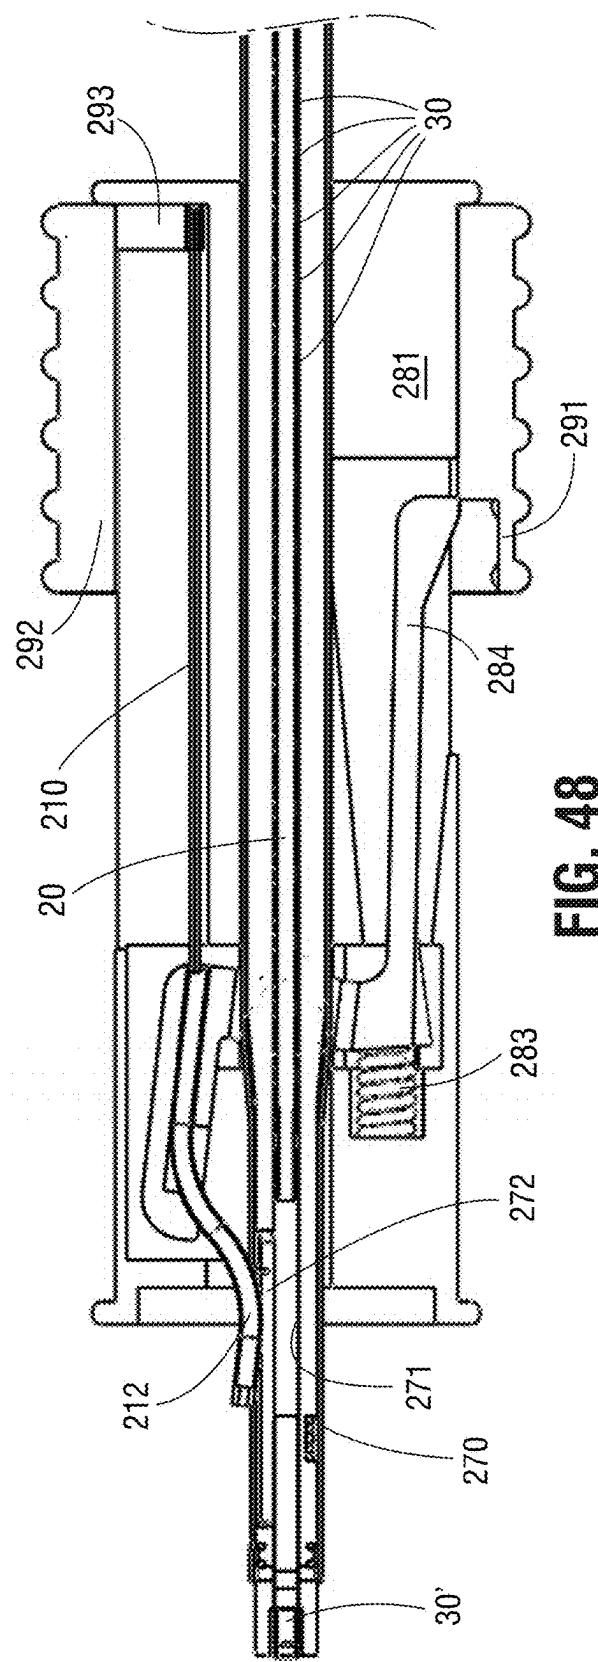


FIG. 48

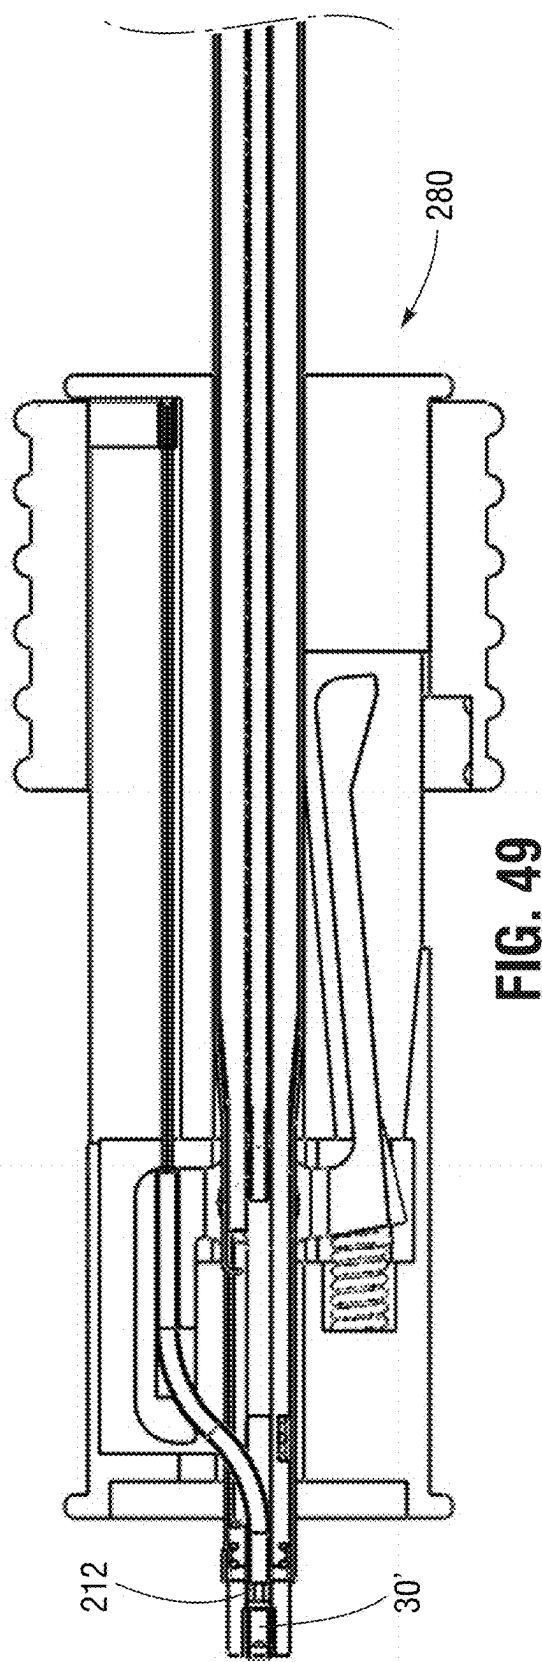


FIG. 49

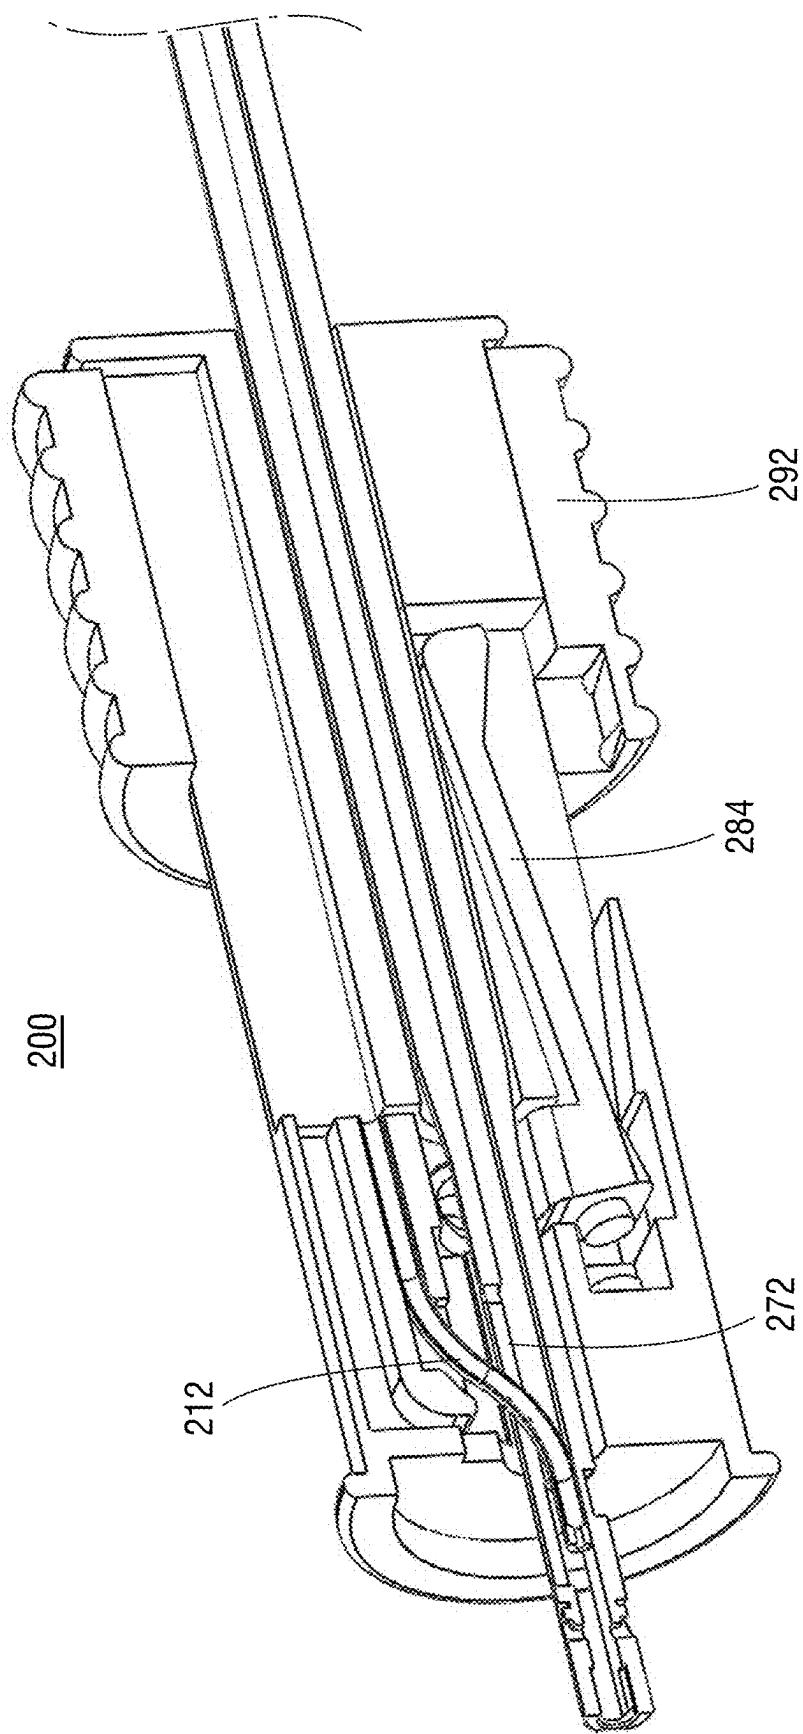


FIG. 50

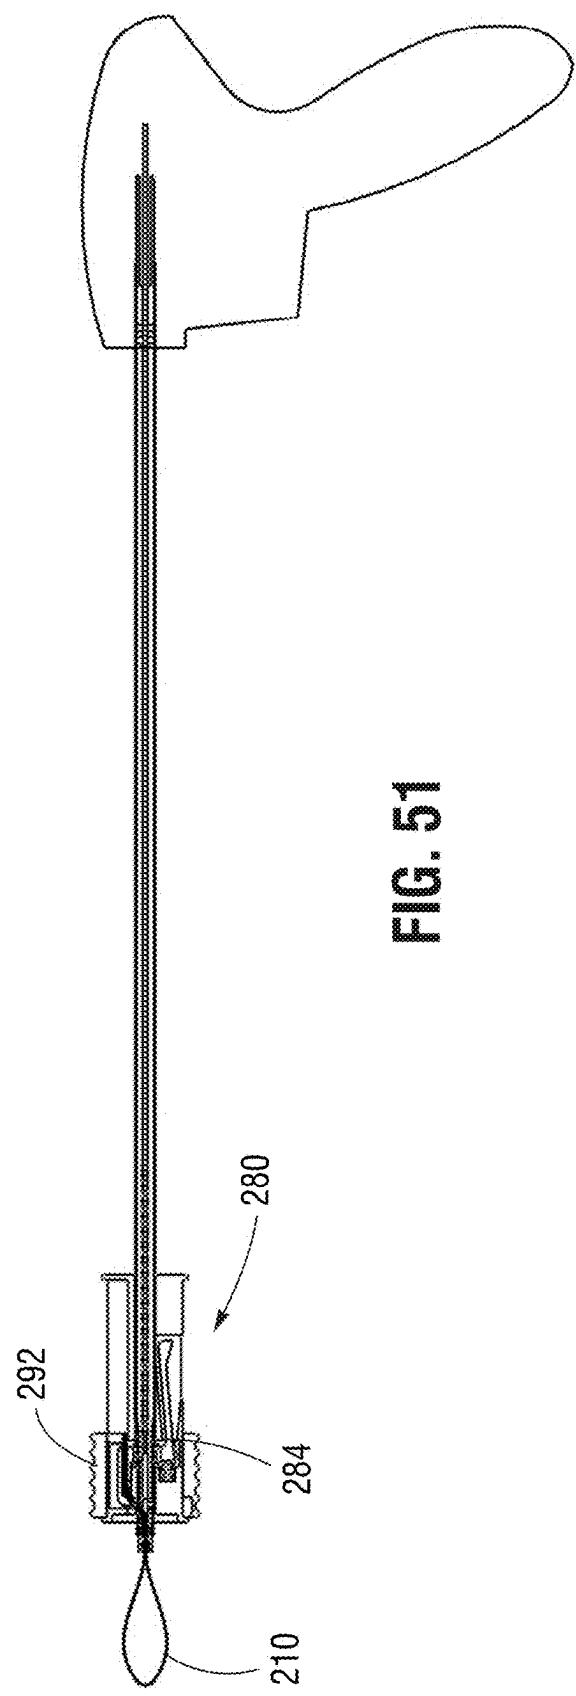


FIG. 51

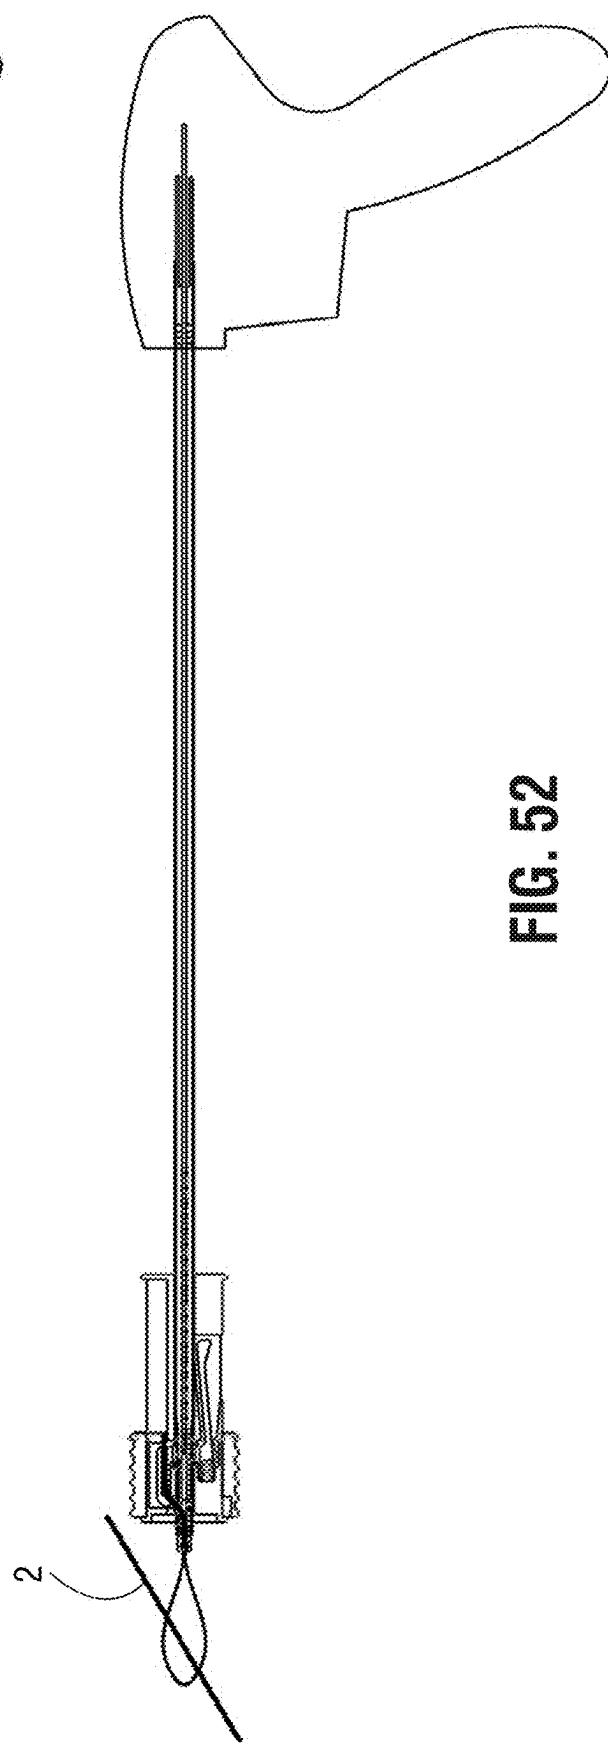
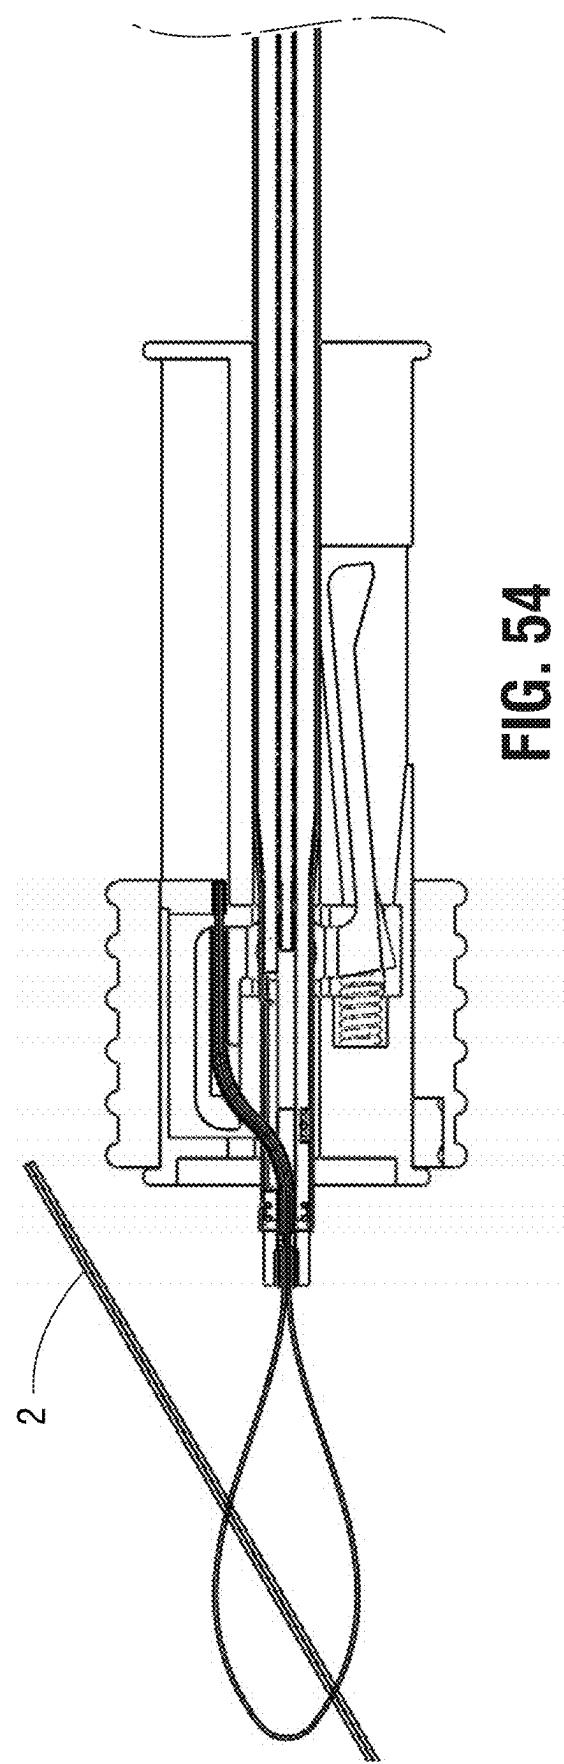
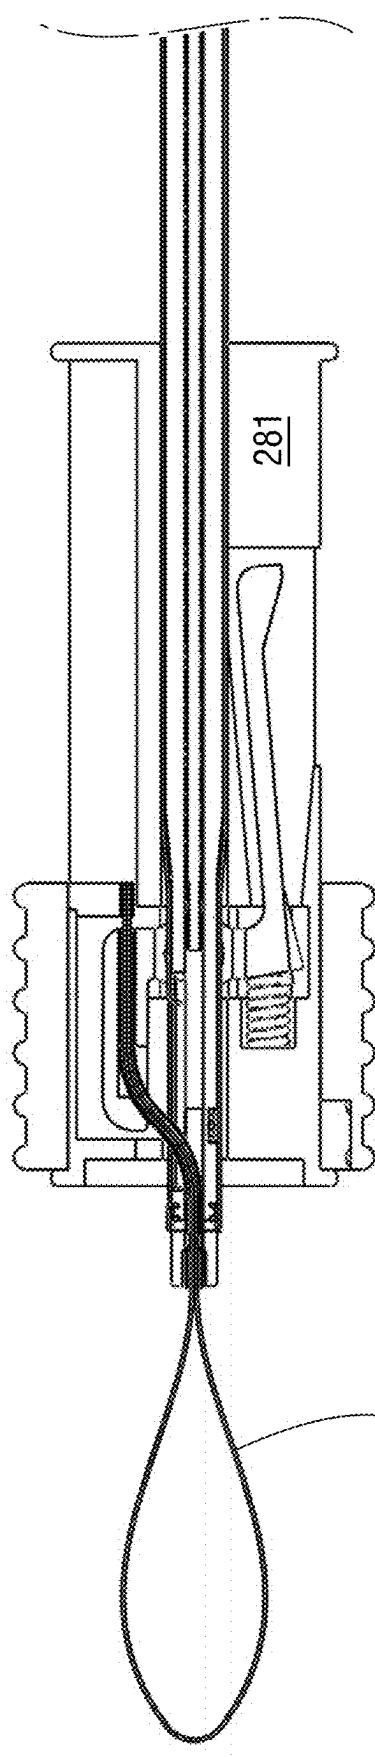


FIG. 52



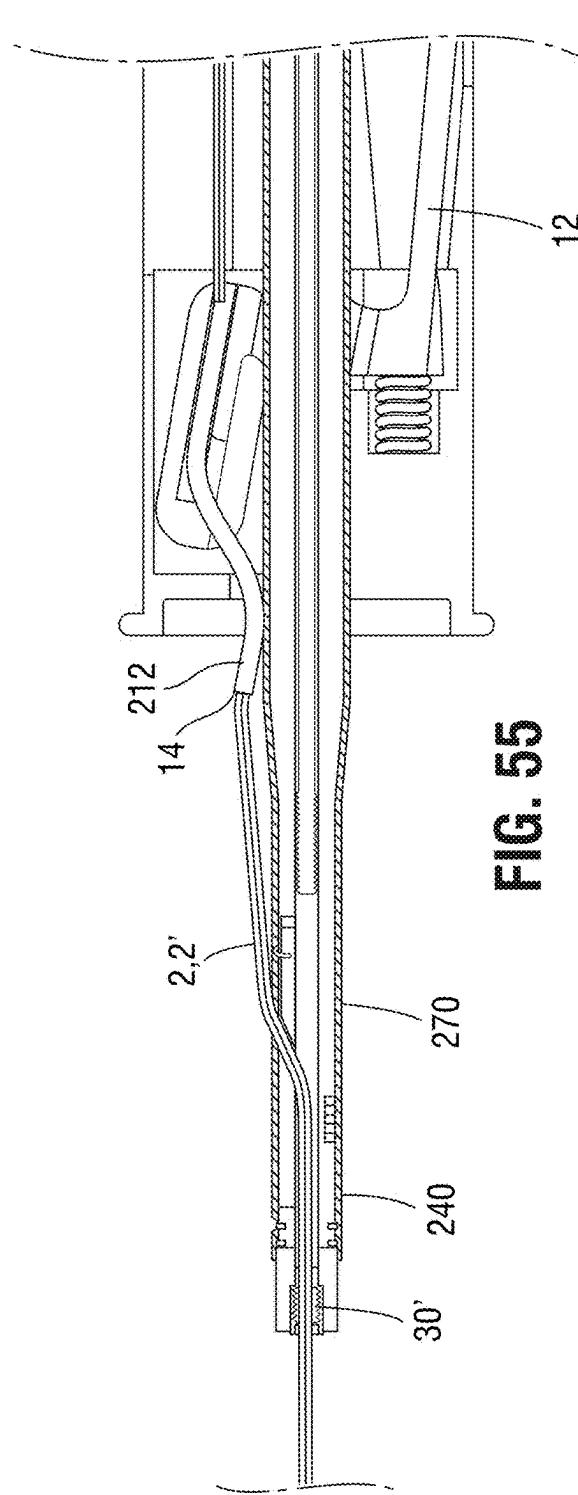


FIG. 55

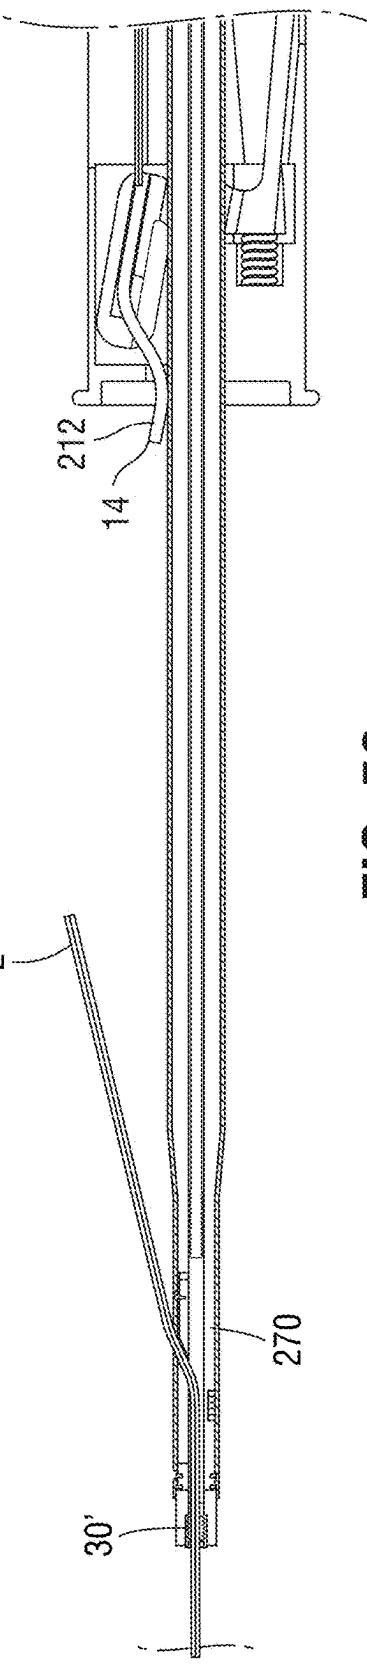


FIG. 56

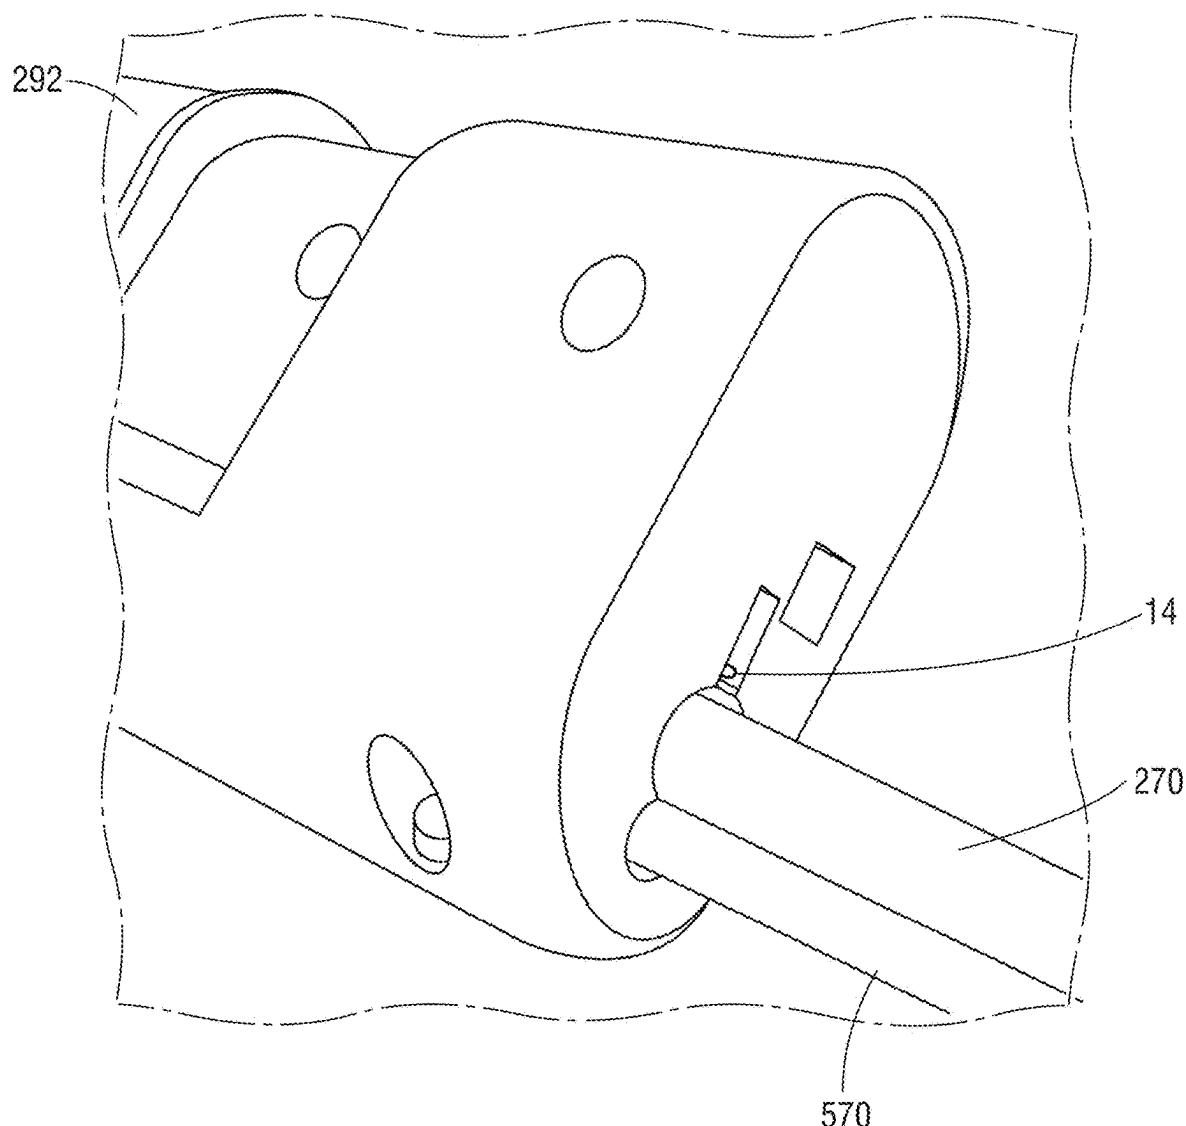
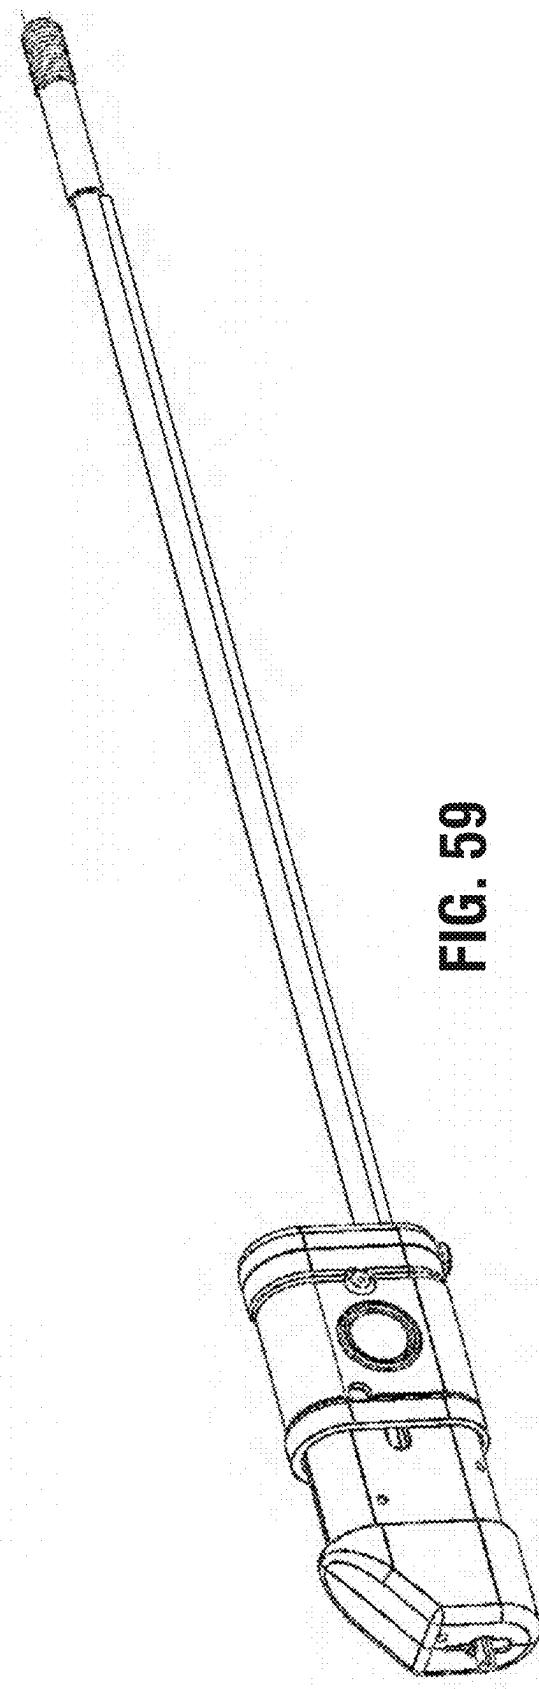
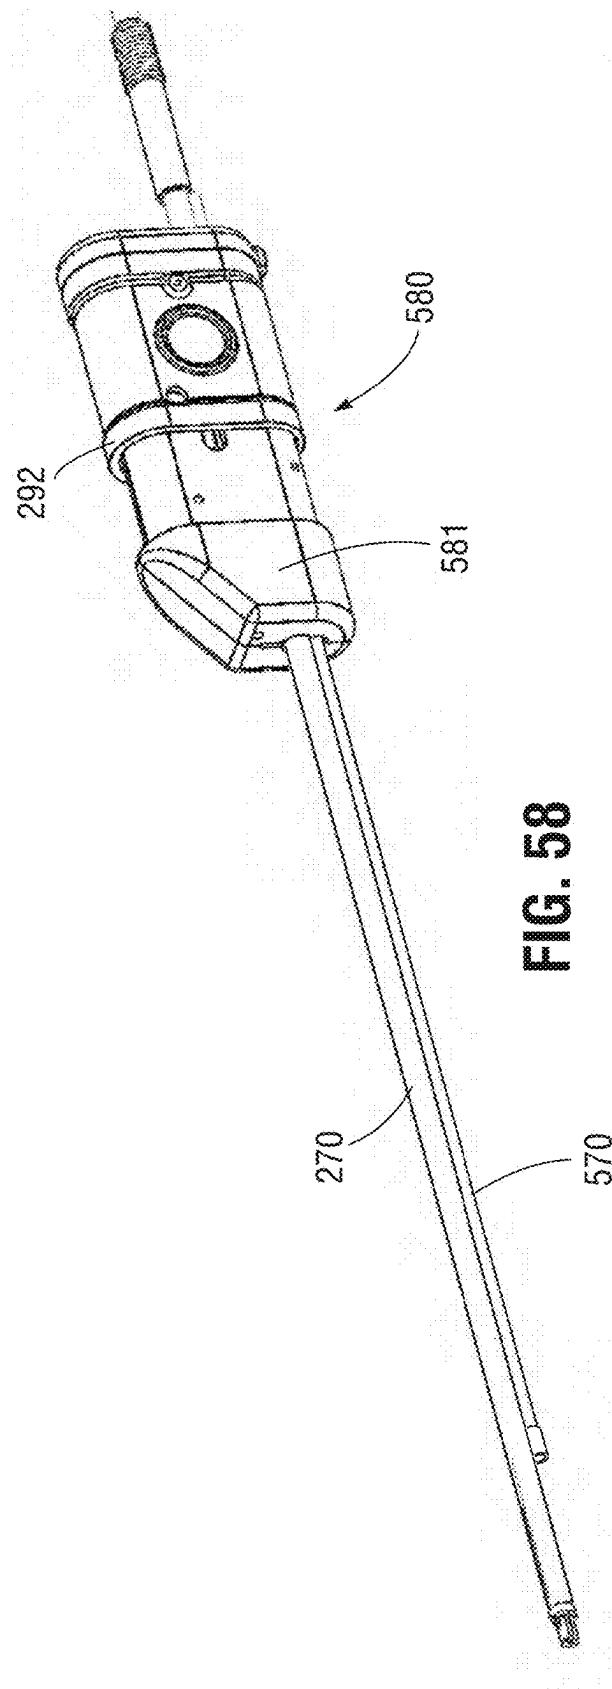


FIG. 57



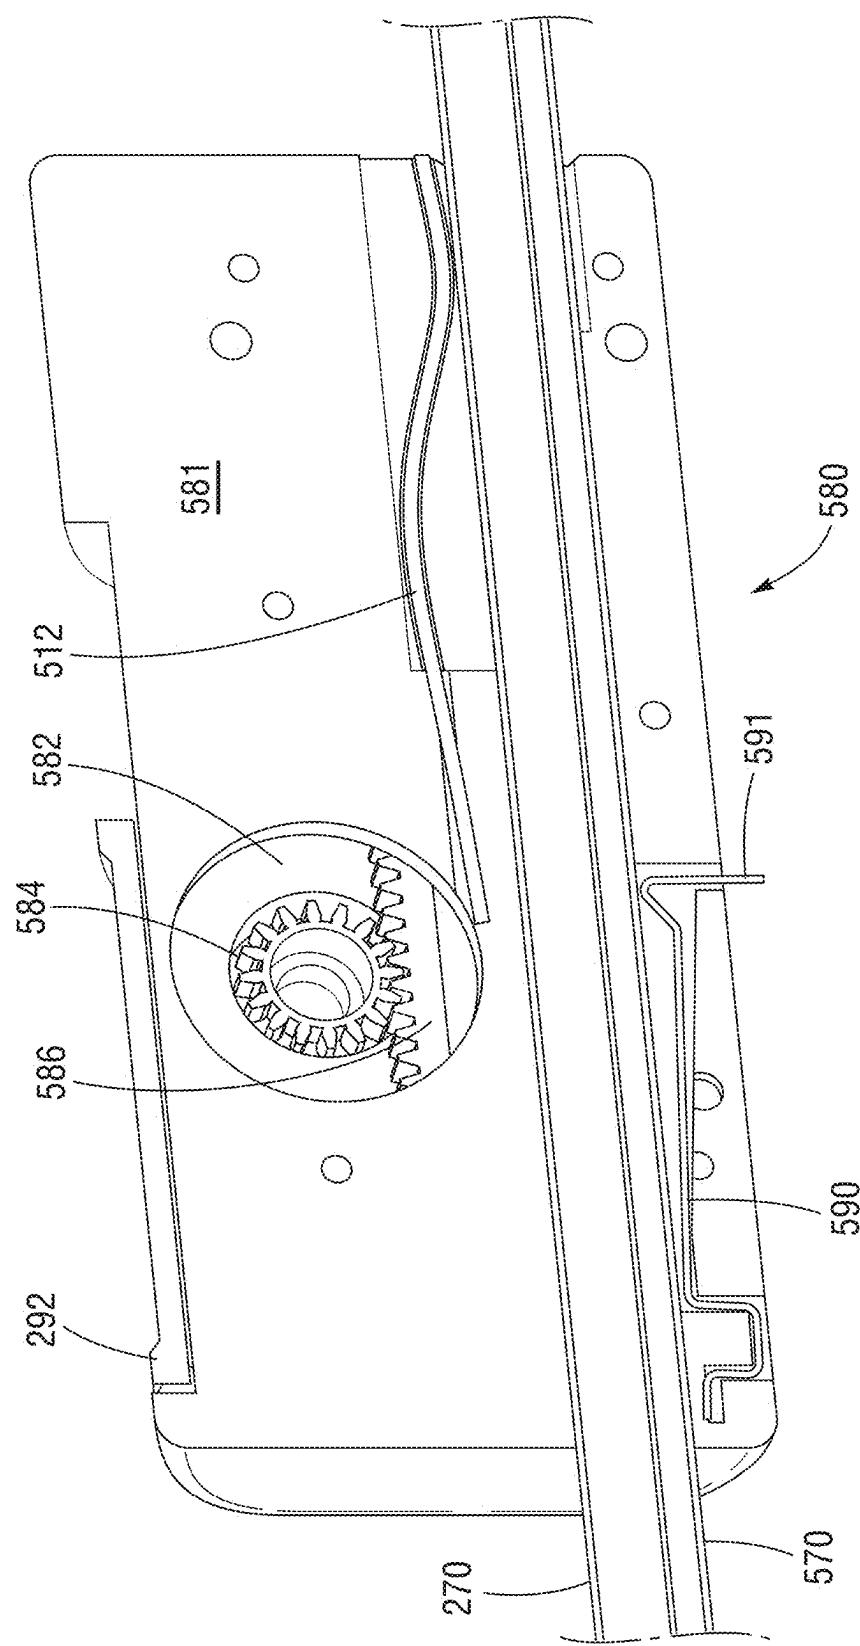


FIG. 60

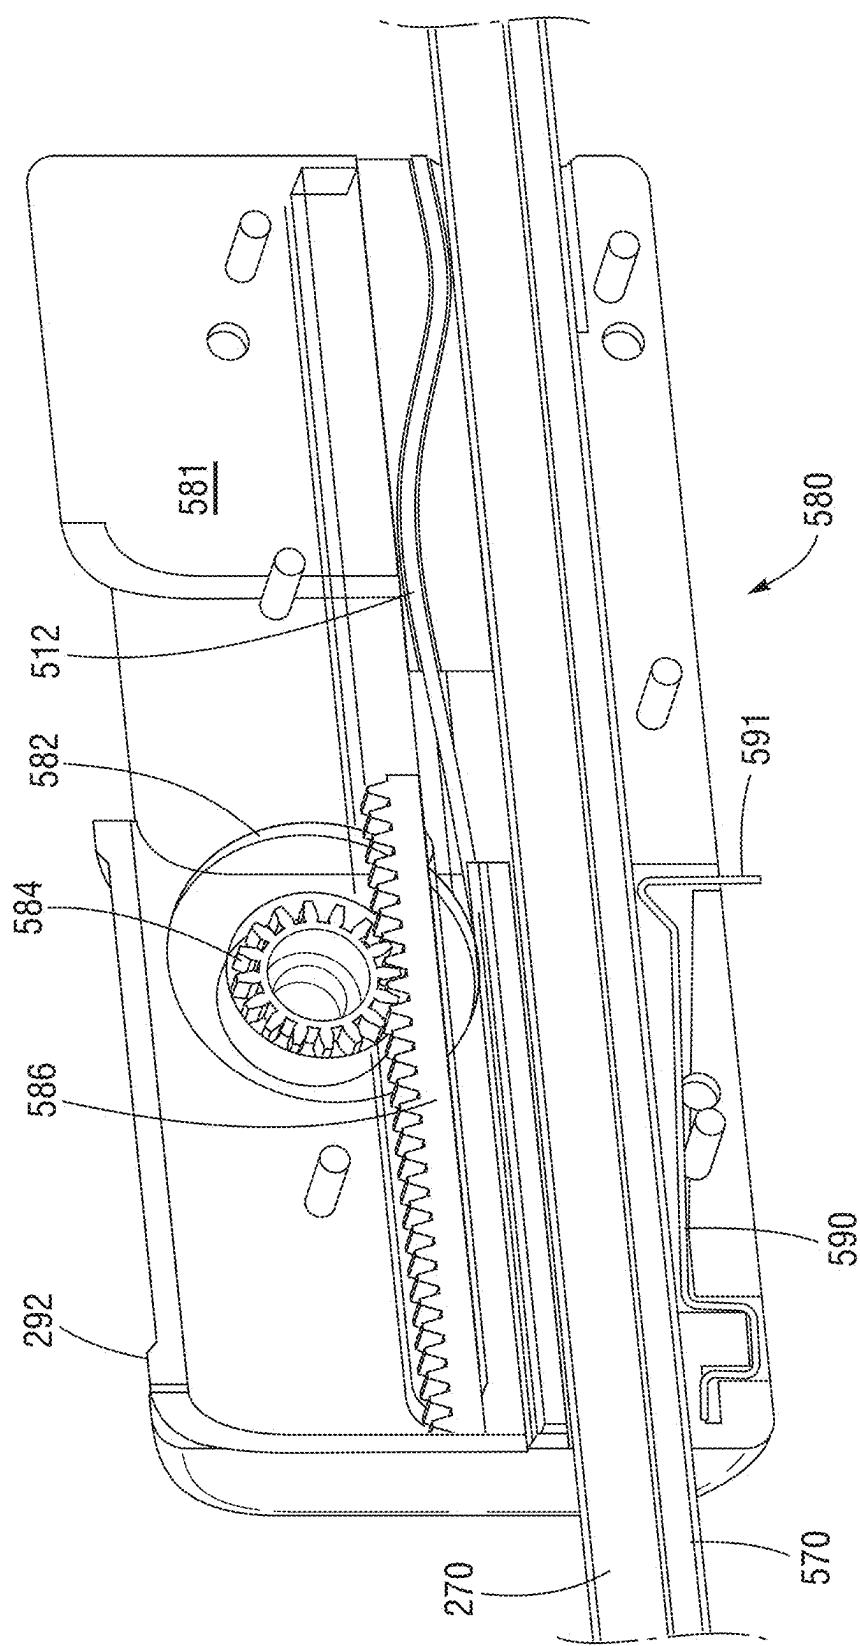


FIG. 61

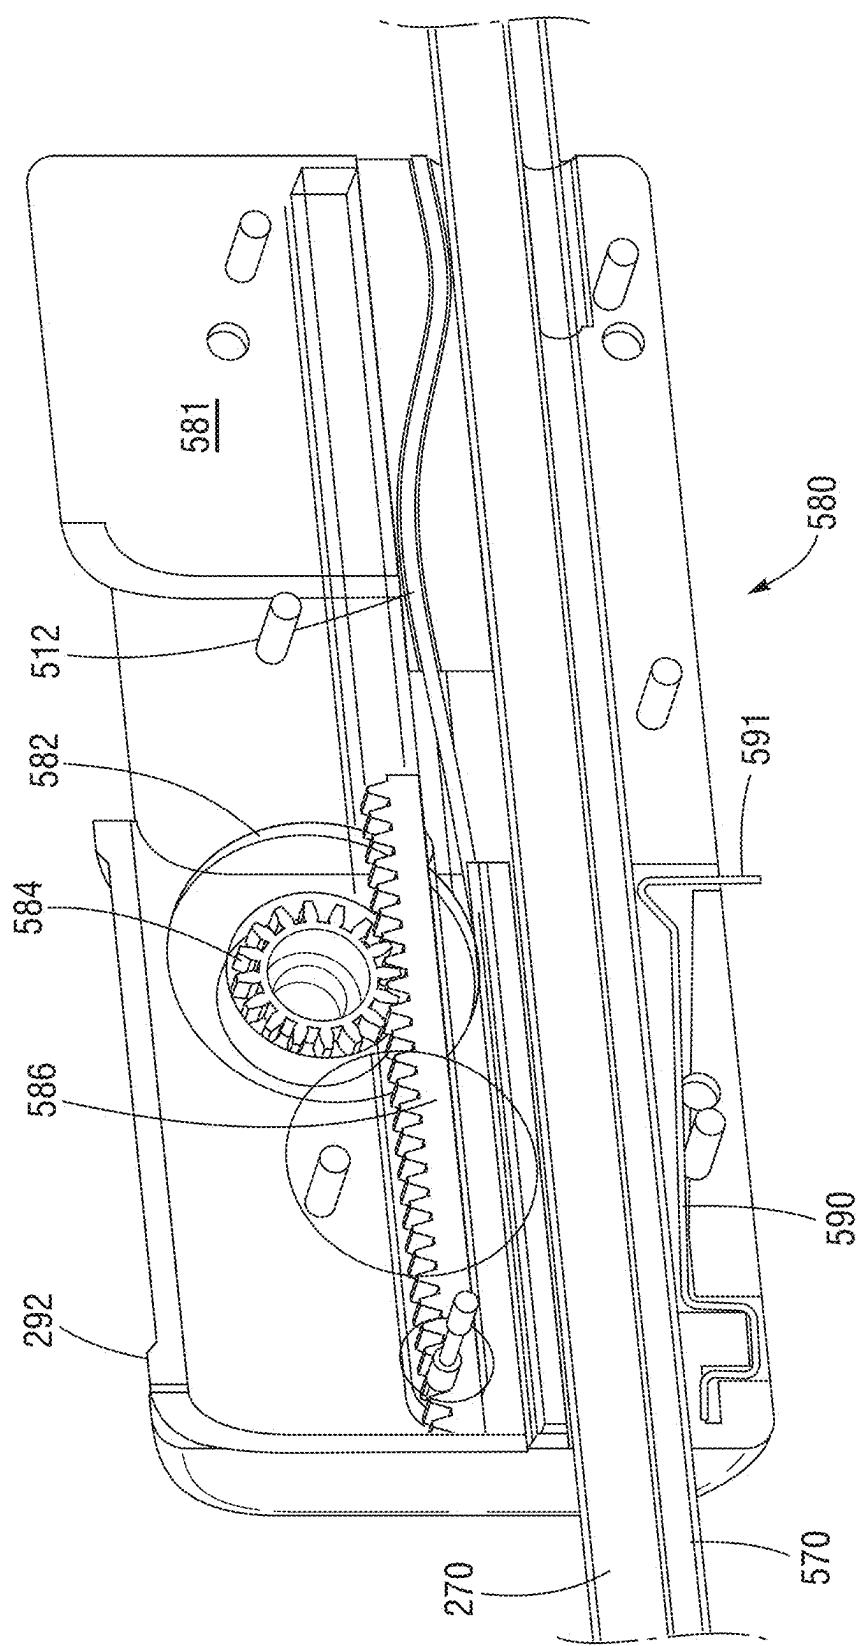


FIG. 62

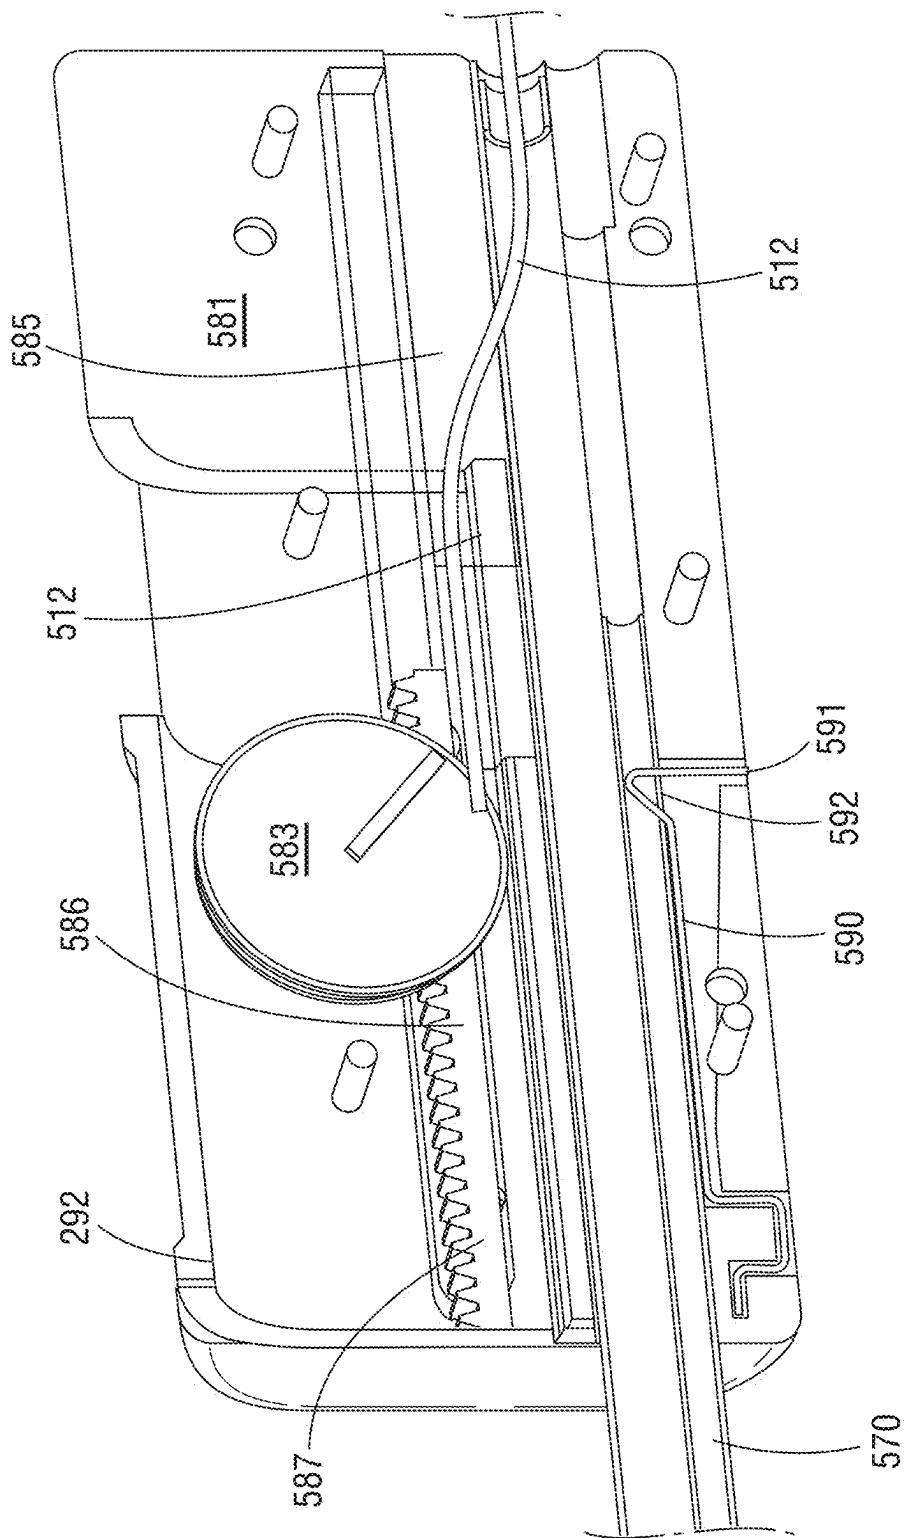


FIG. 63

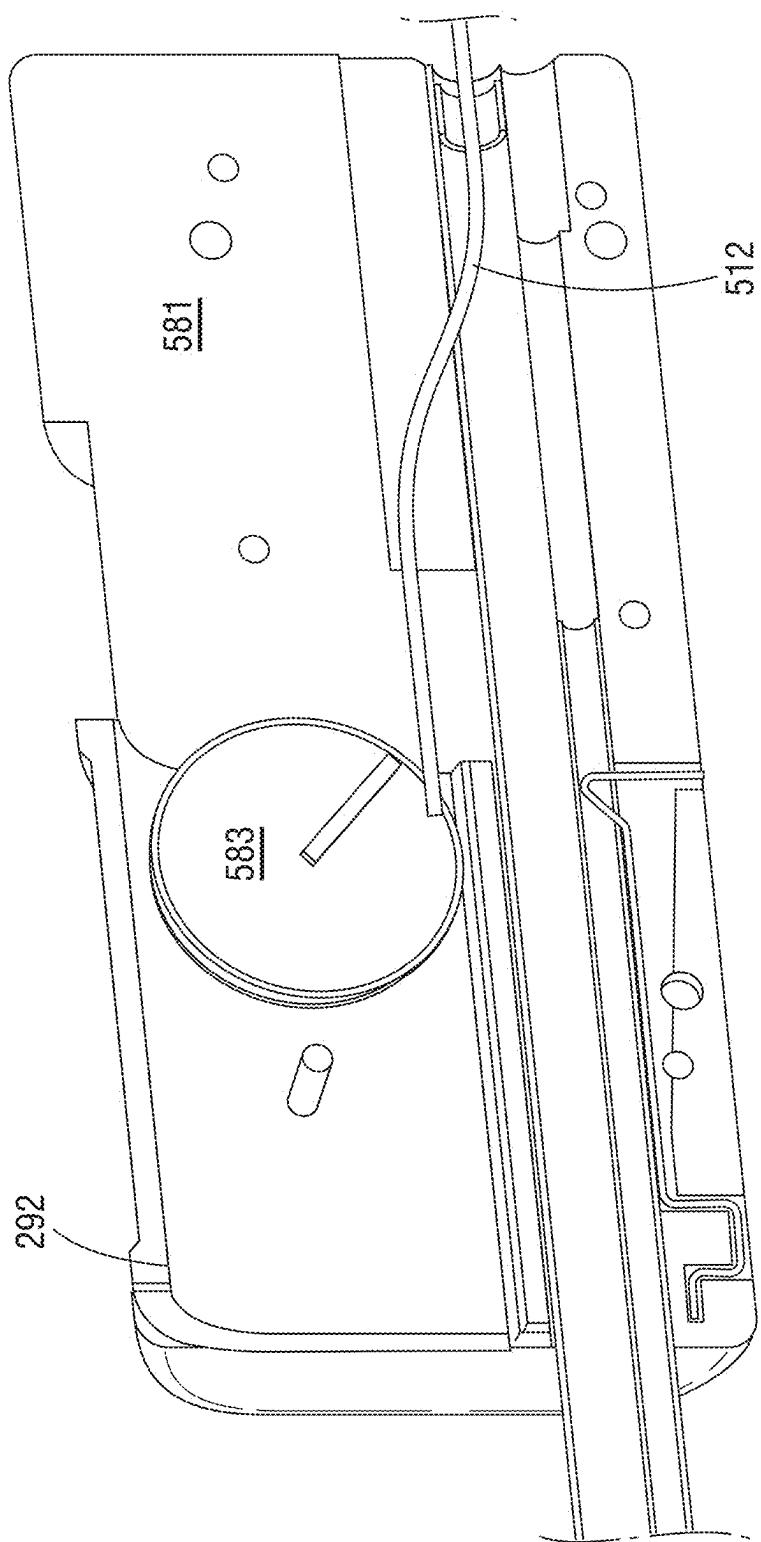


FIG. 64

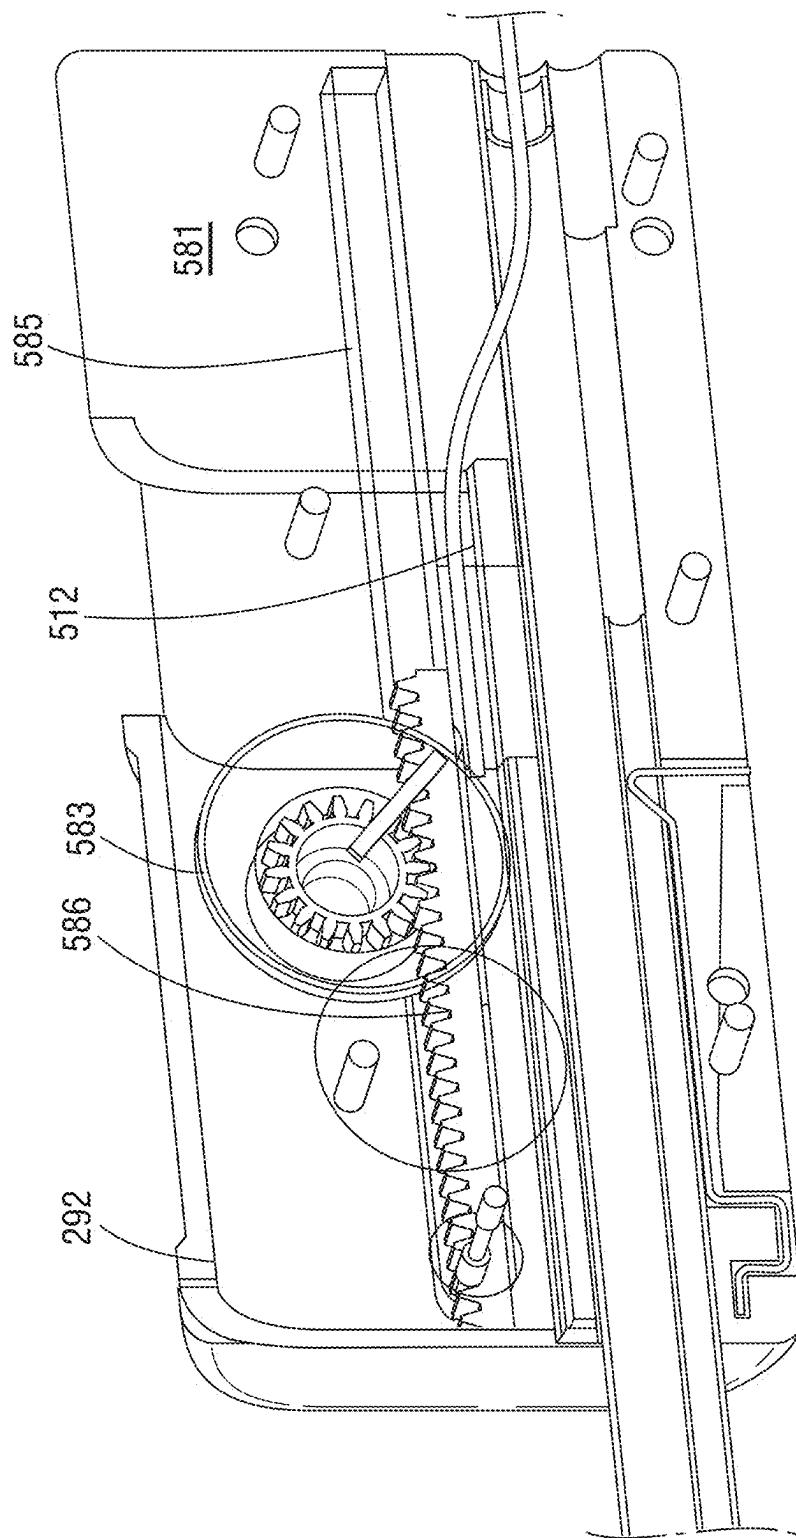


FIG. 65

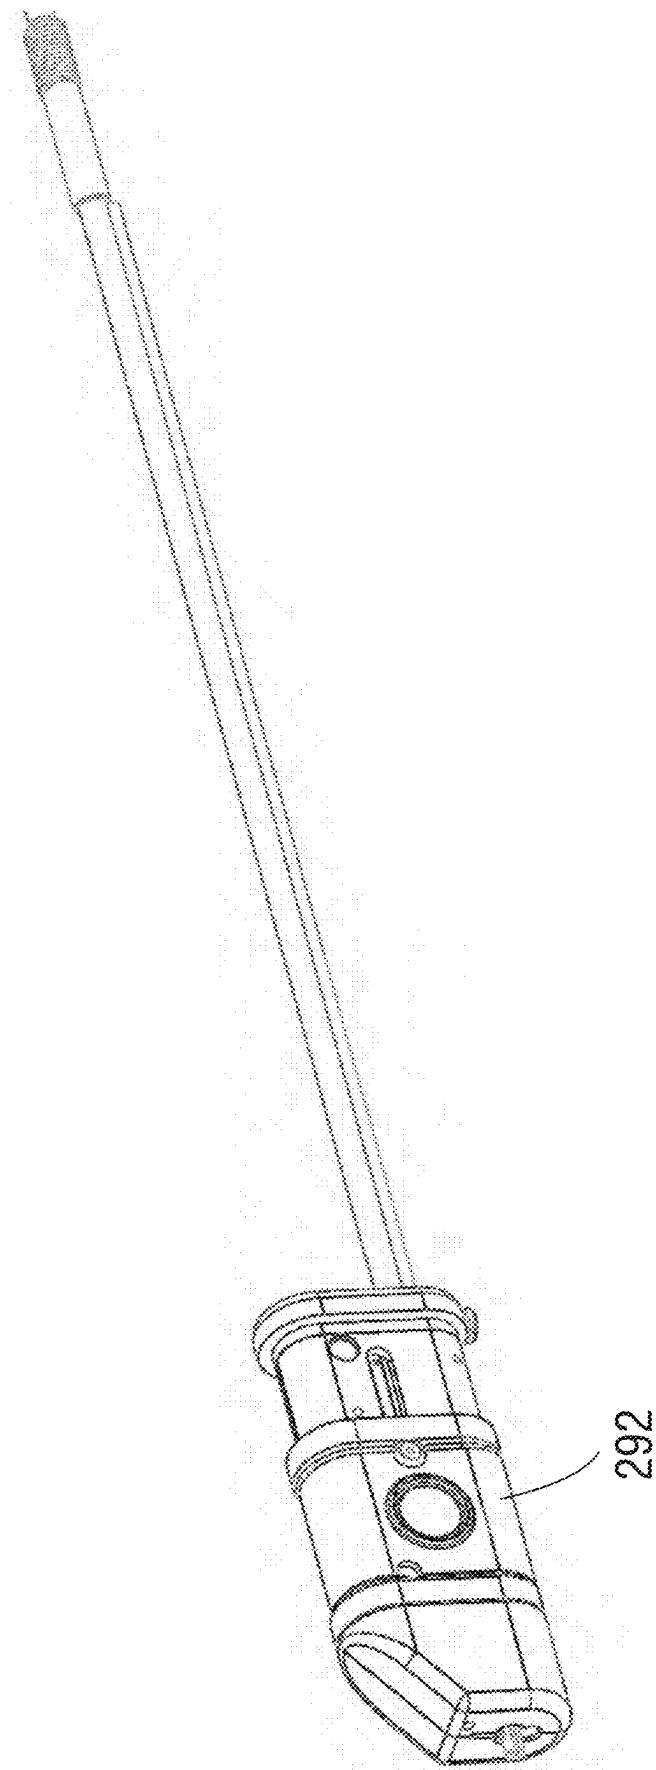


FIG. 66

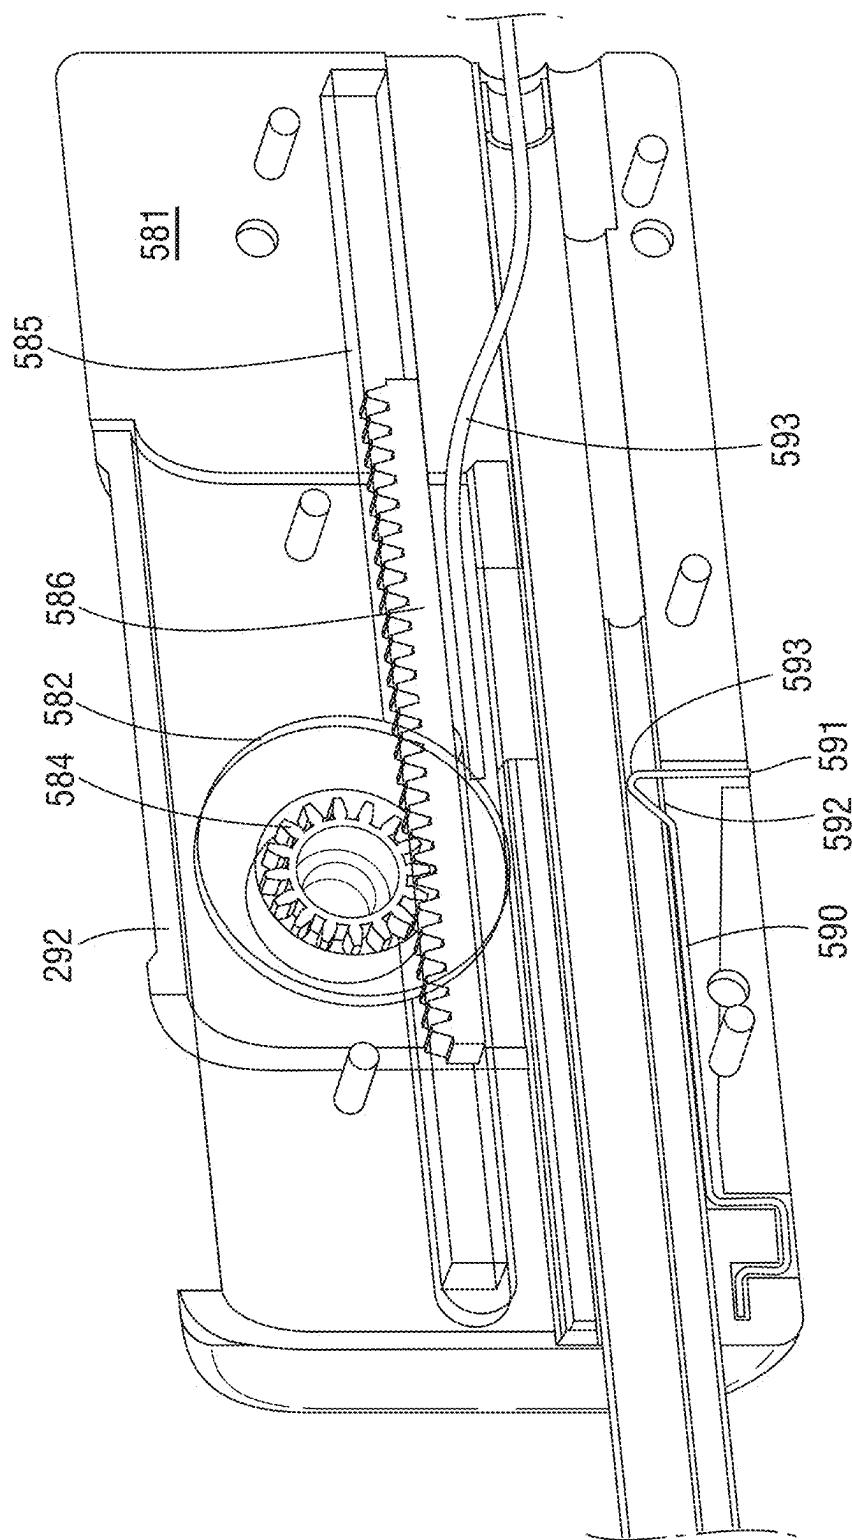


FIG. 67

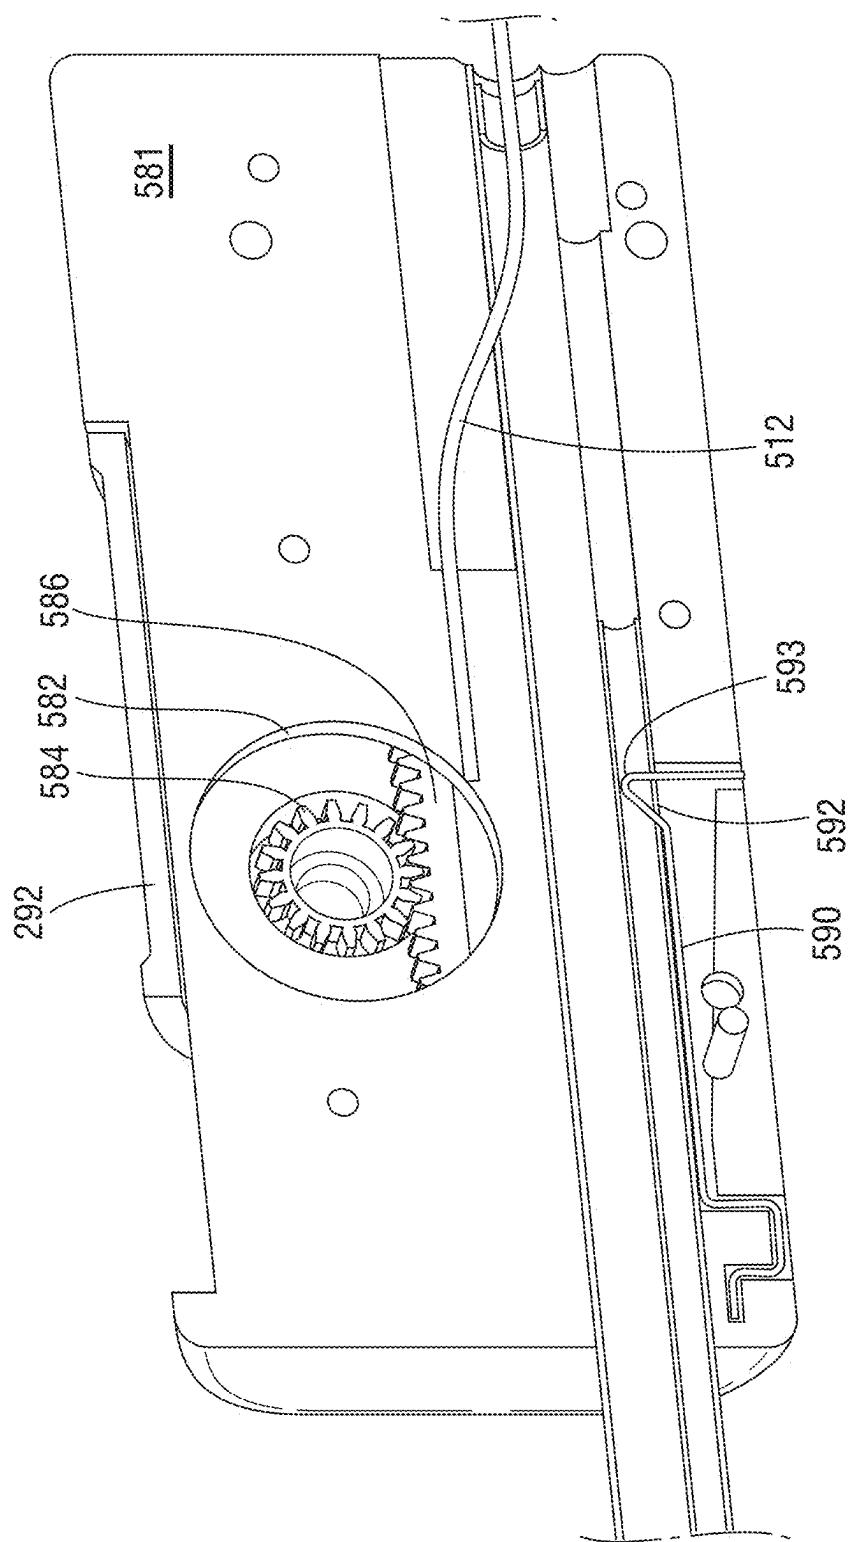


FIG. 68

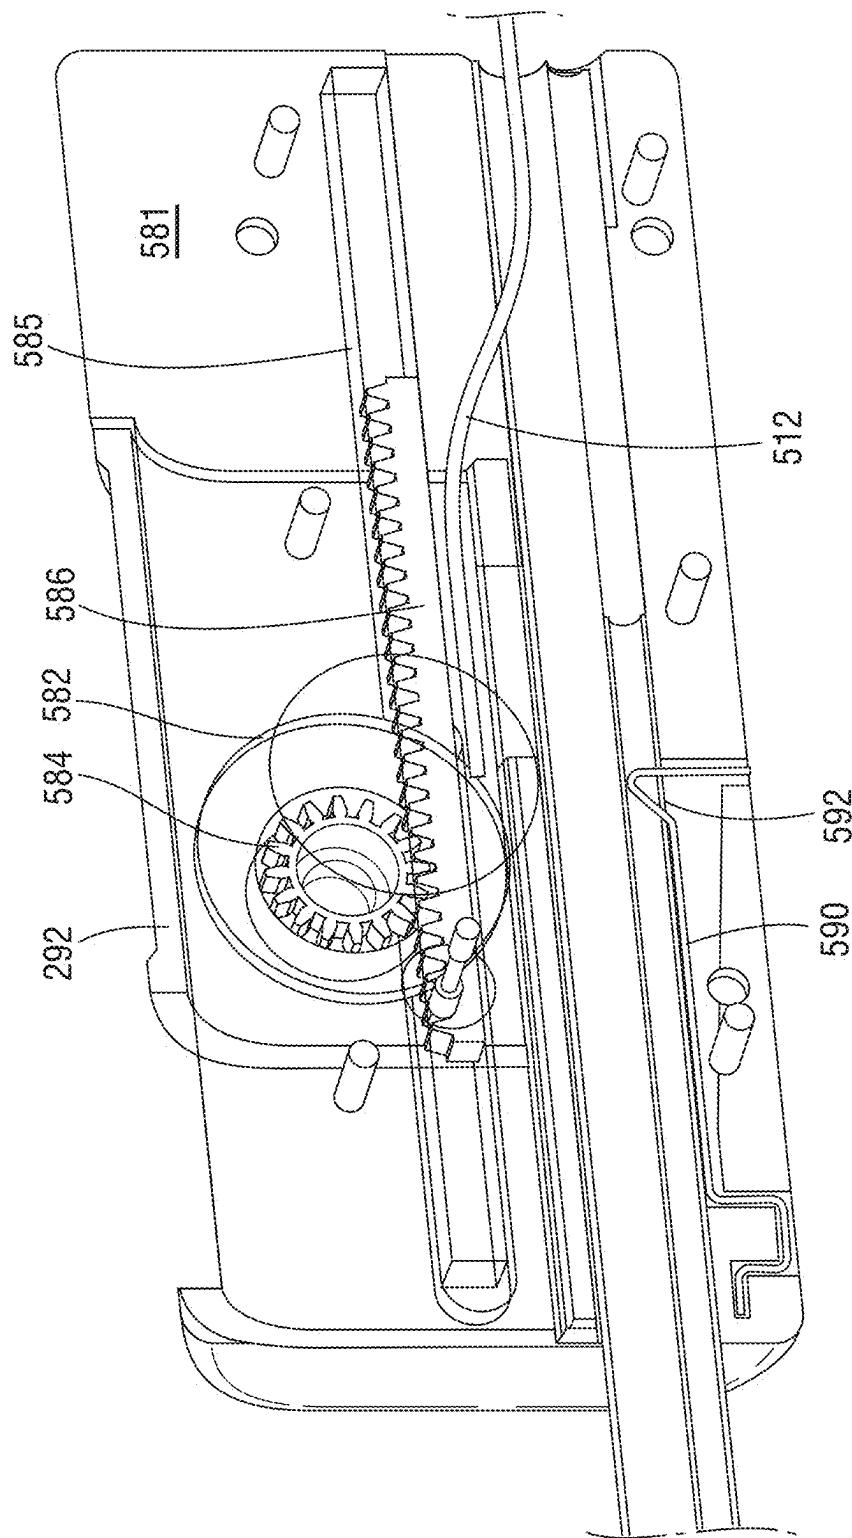


FIG. 69

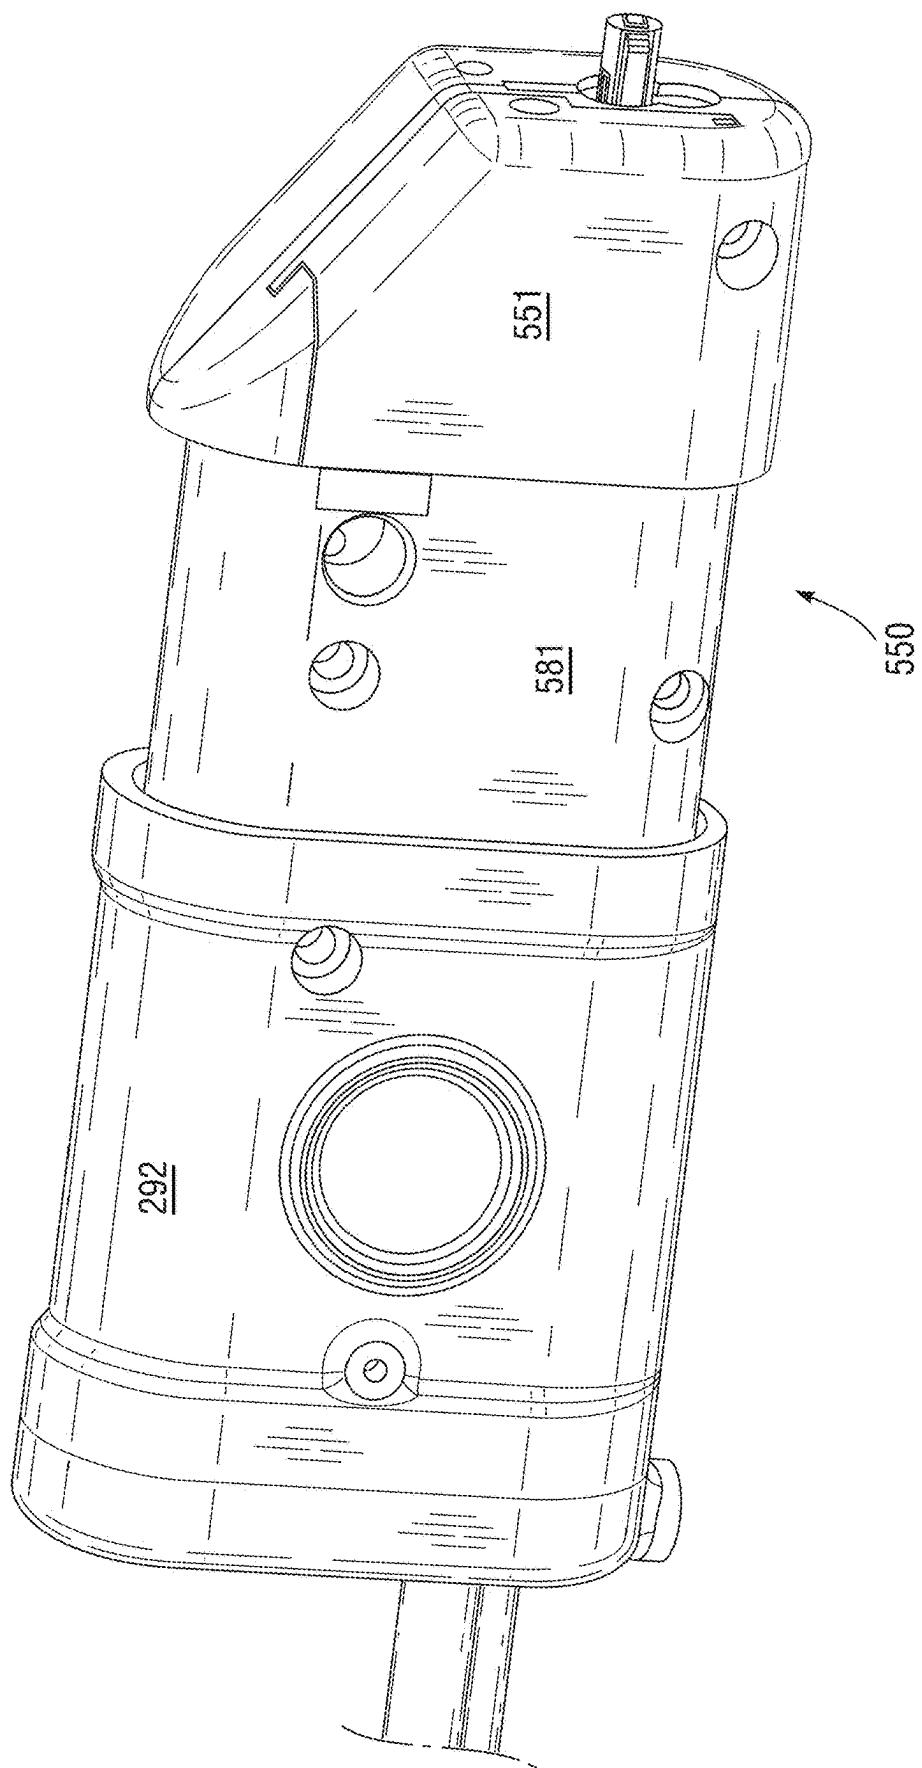


FIG. 70

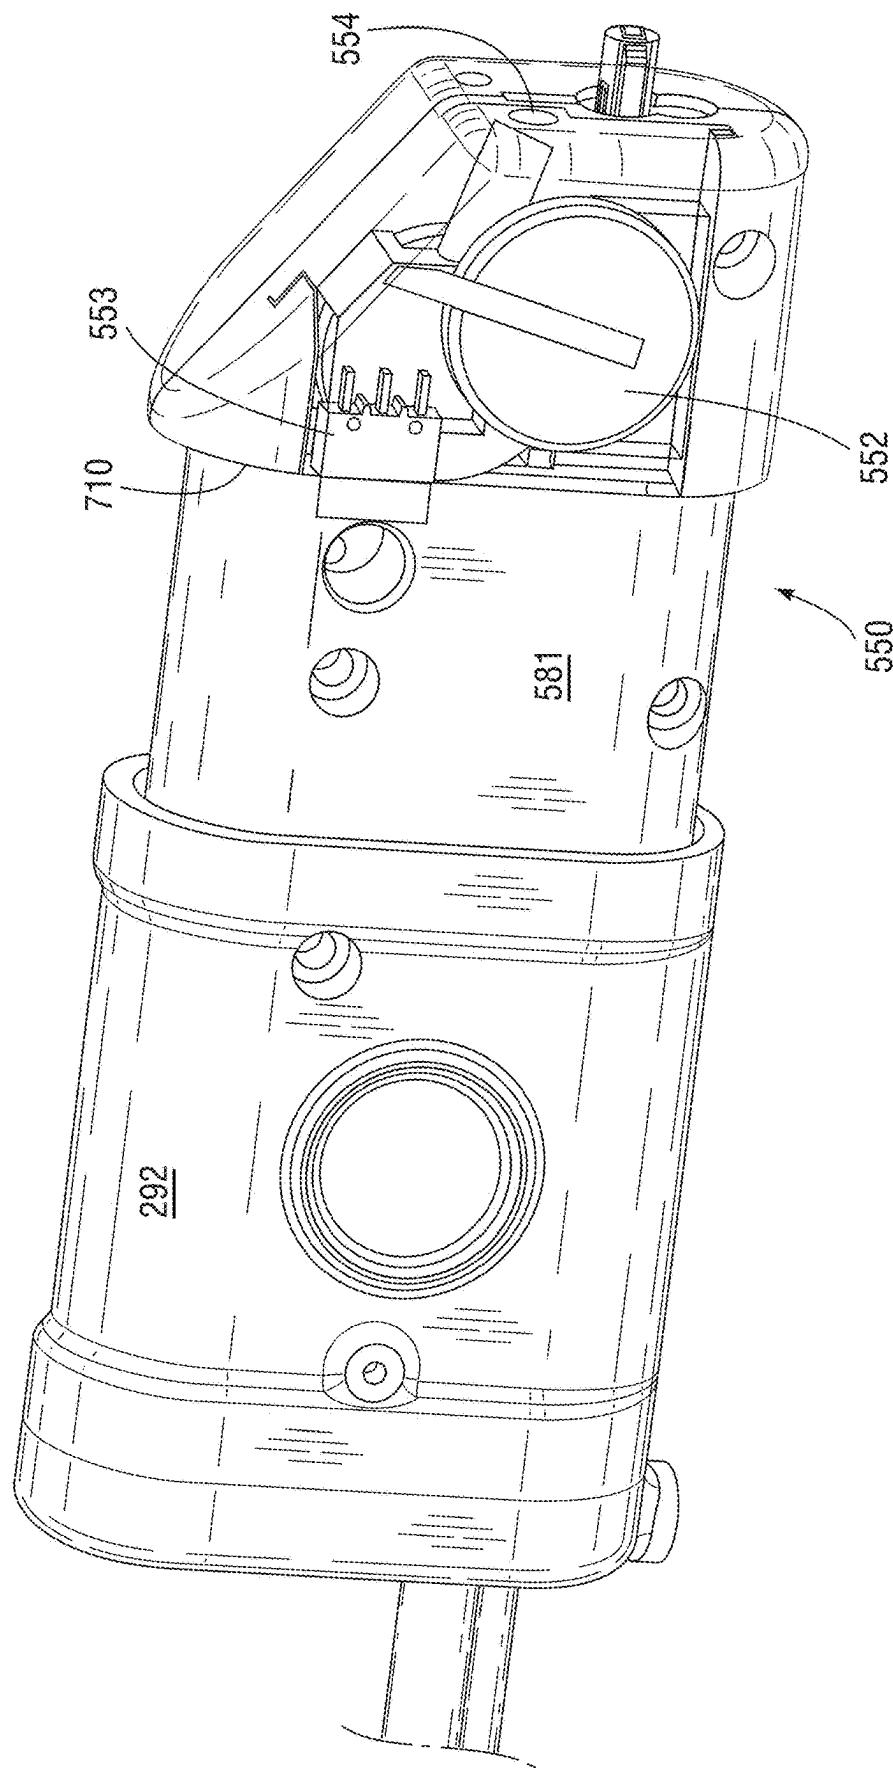


FIG. 71

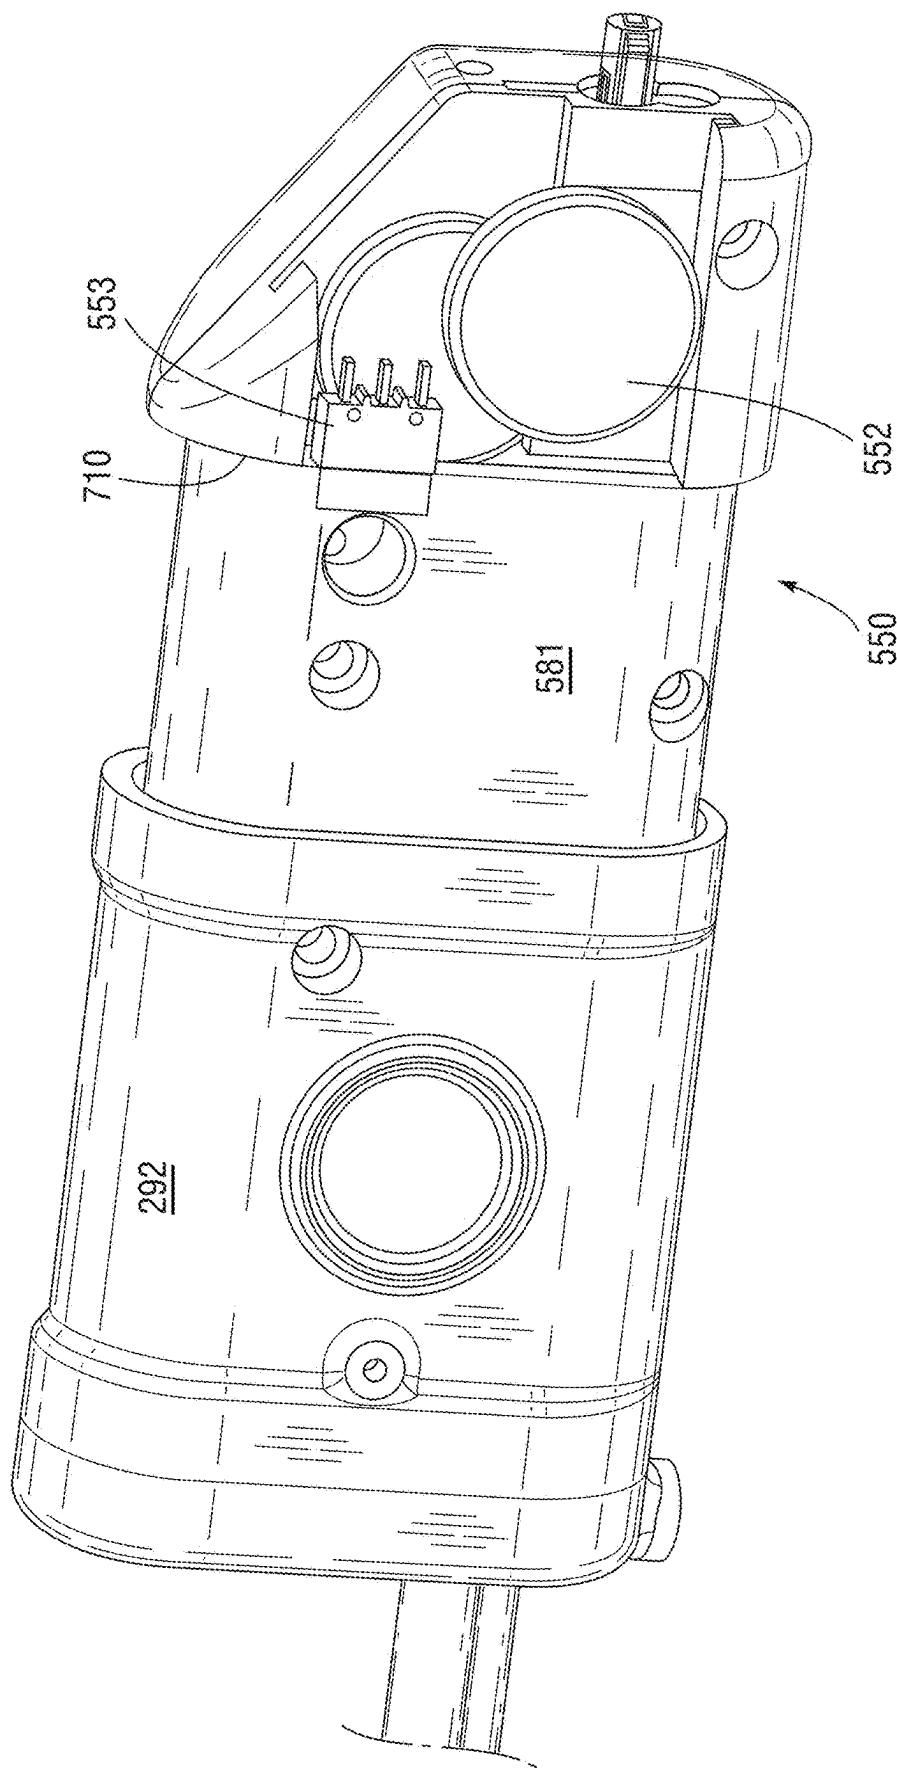


FIG. 72

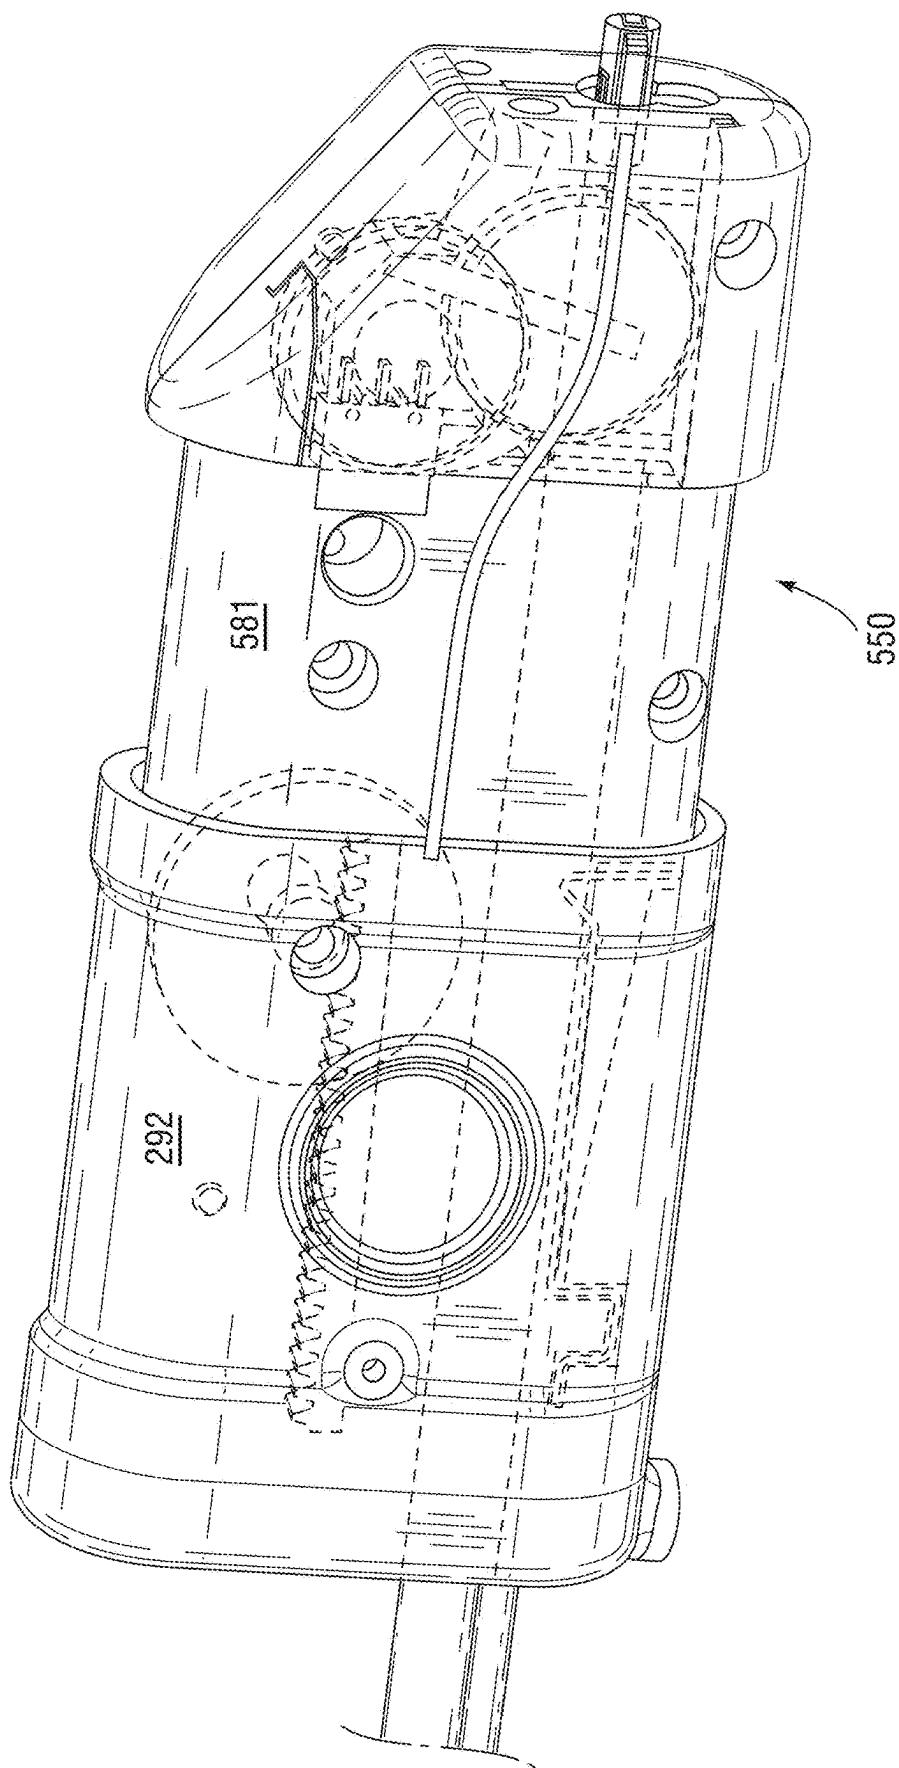


FIG. 73

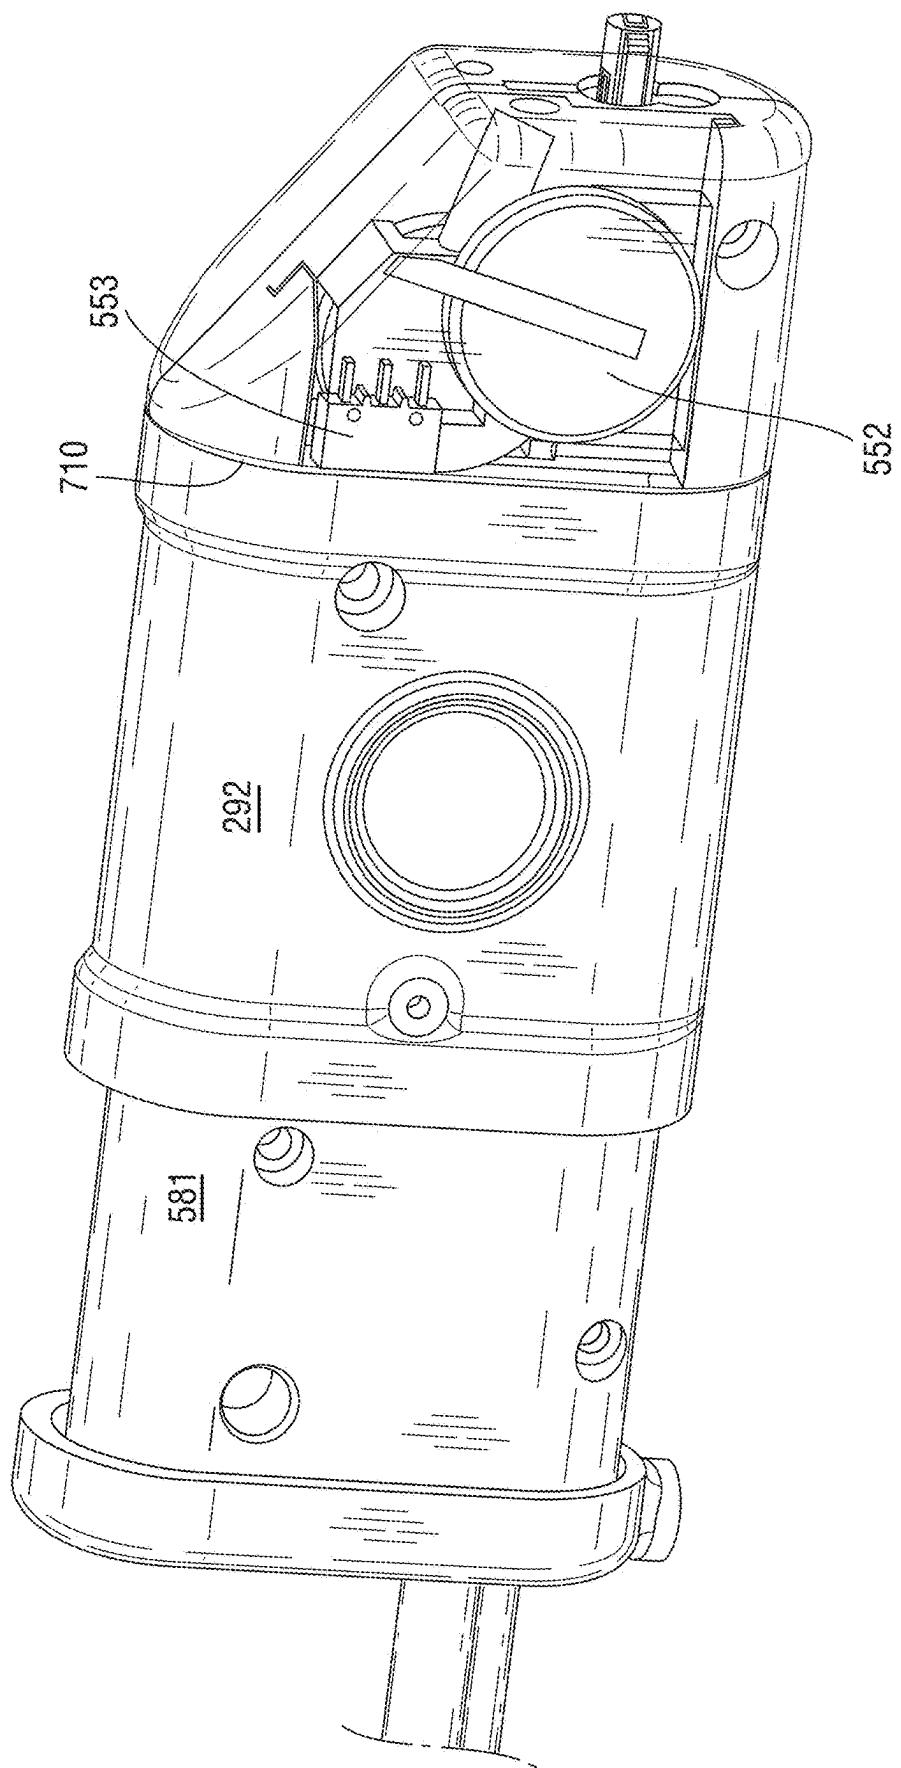


FIG. 74

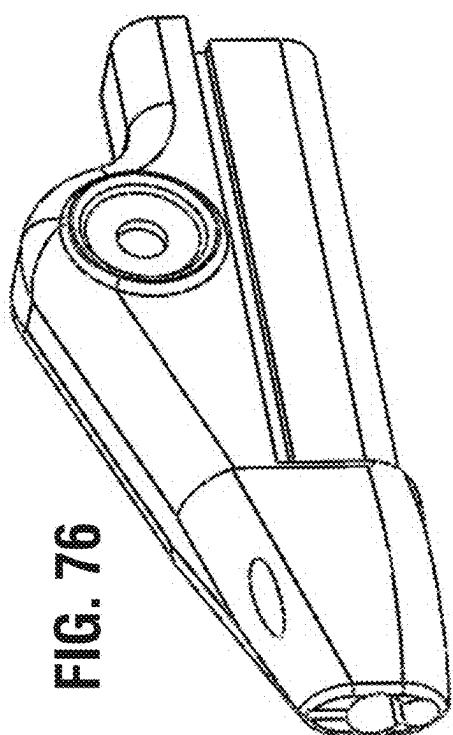


FIG. 76

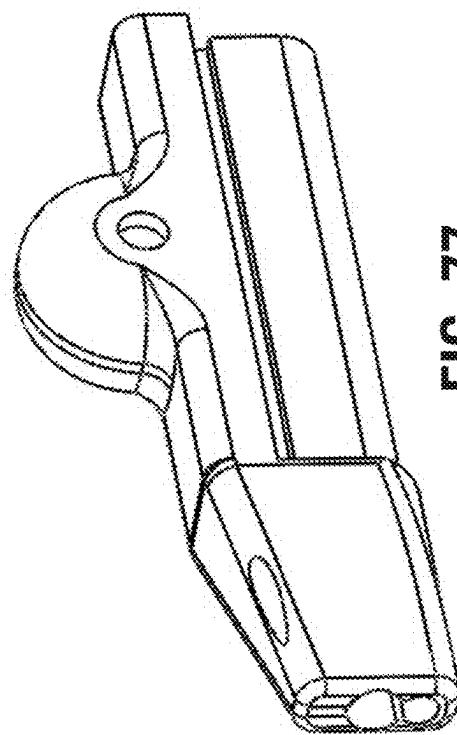


FIG. 77

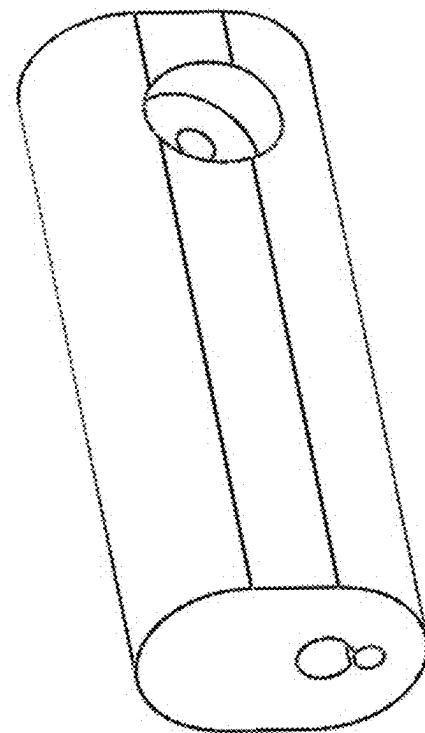


FIG. 75

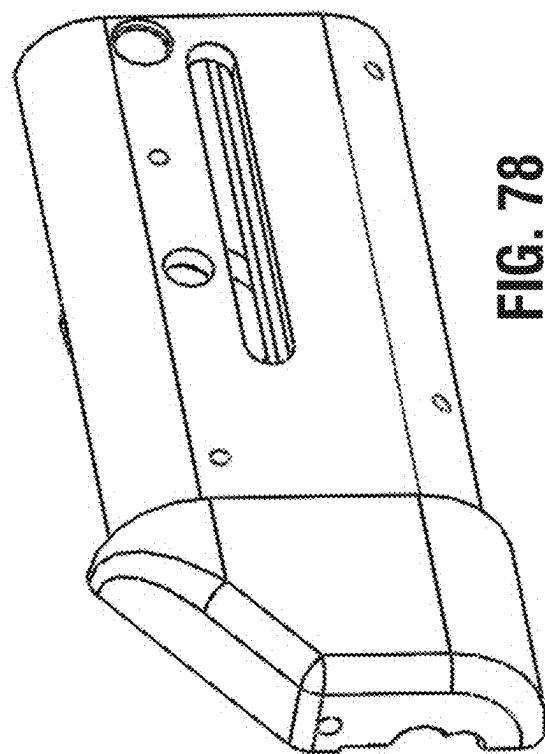


FIG. 78

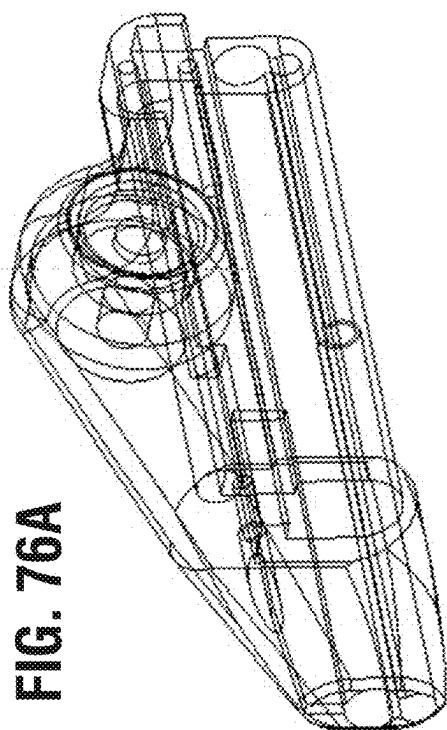


FIG. 76A

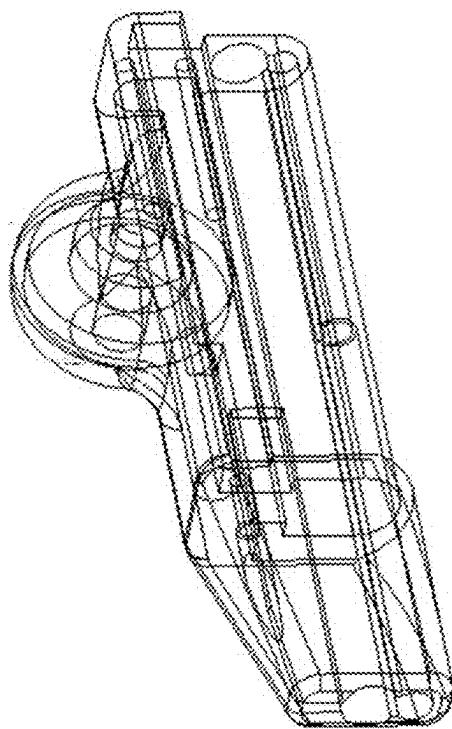


FIG. 77A

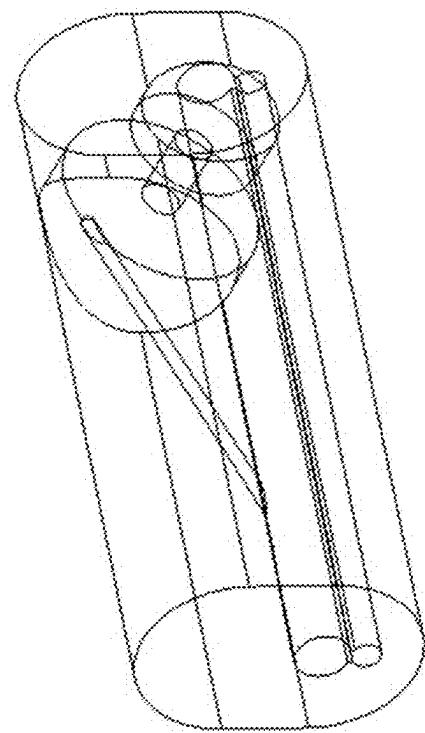


FIG. 75A

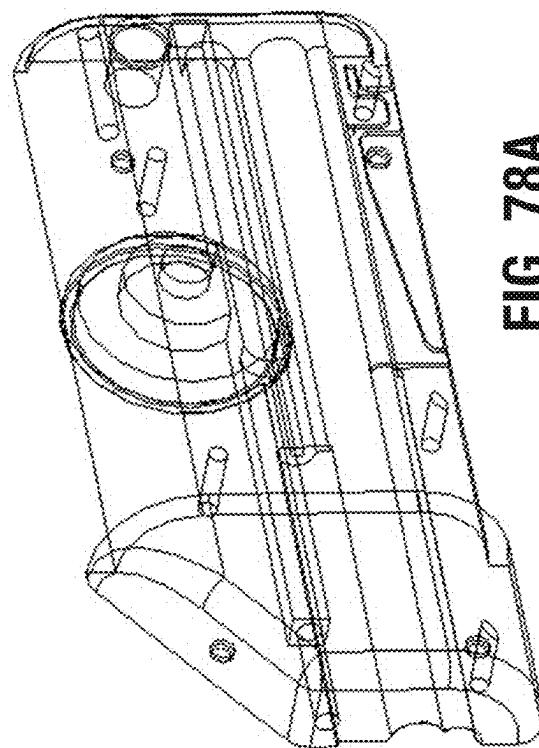


FIG. 78A

FIG. 75B

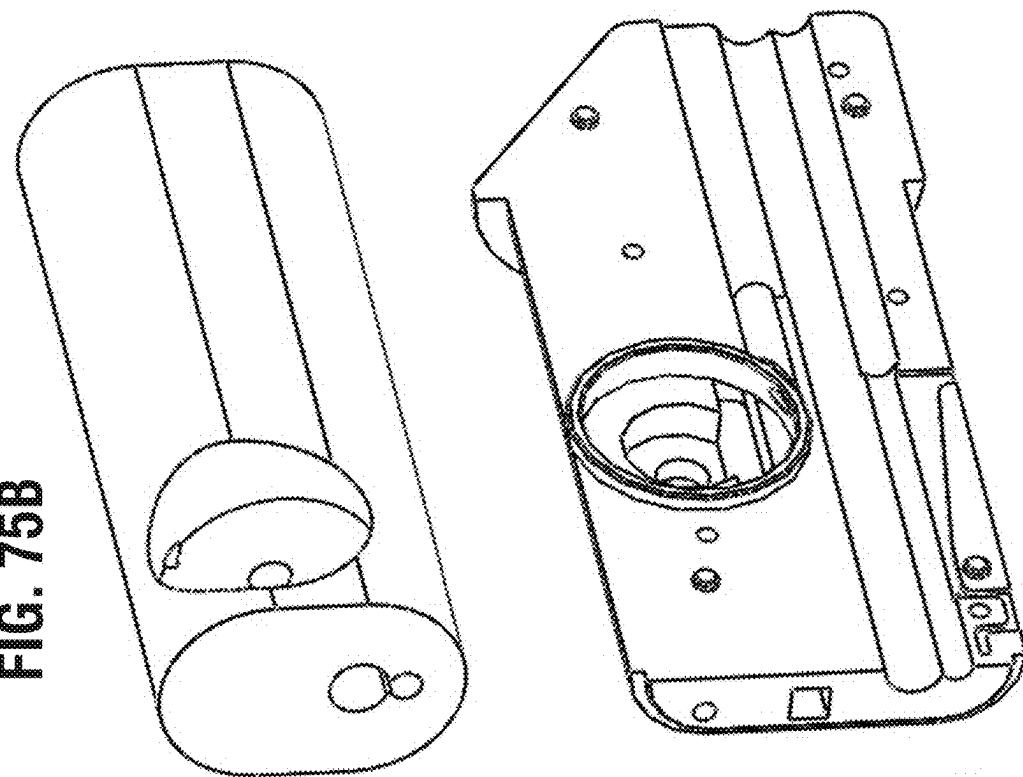


FIG. 76B

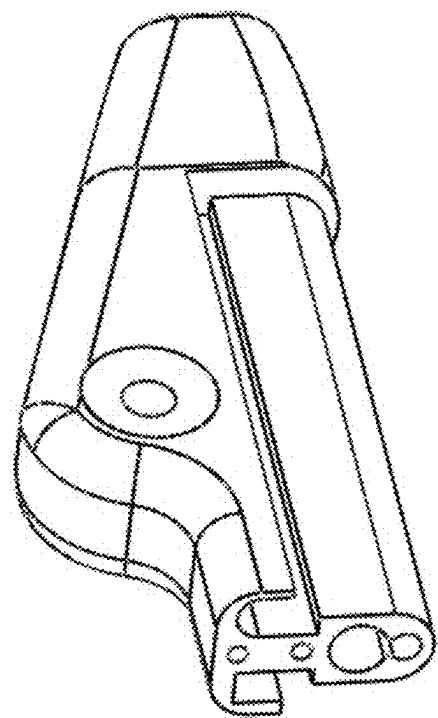


FIG. 77B

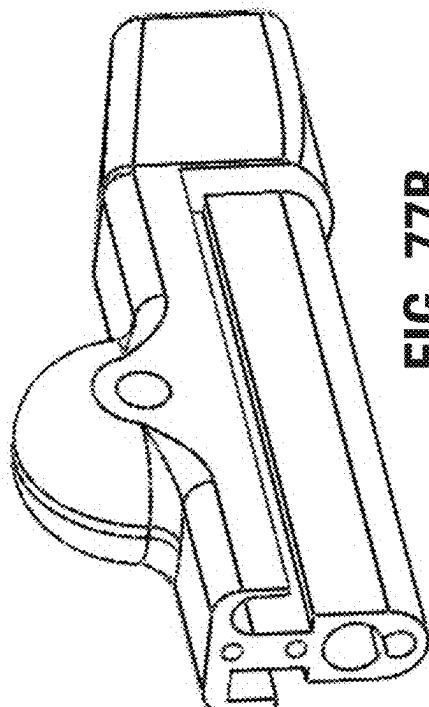
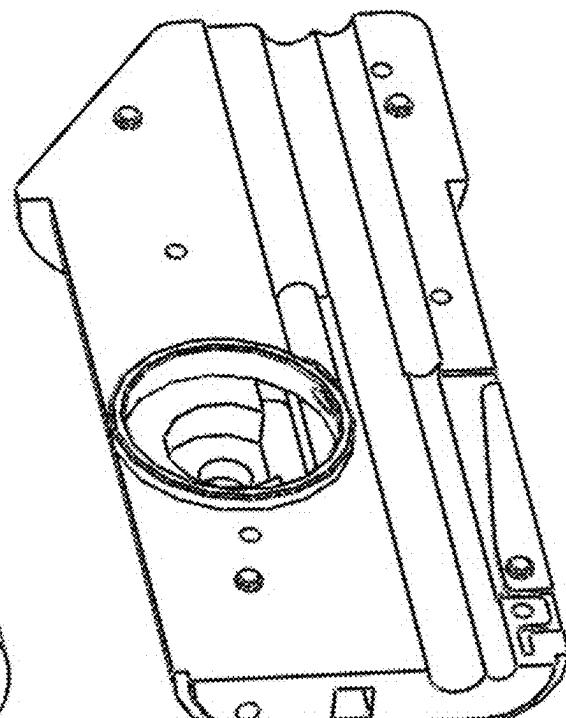


FIG. 78B



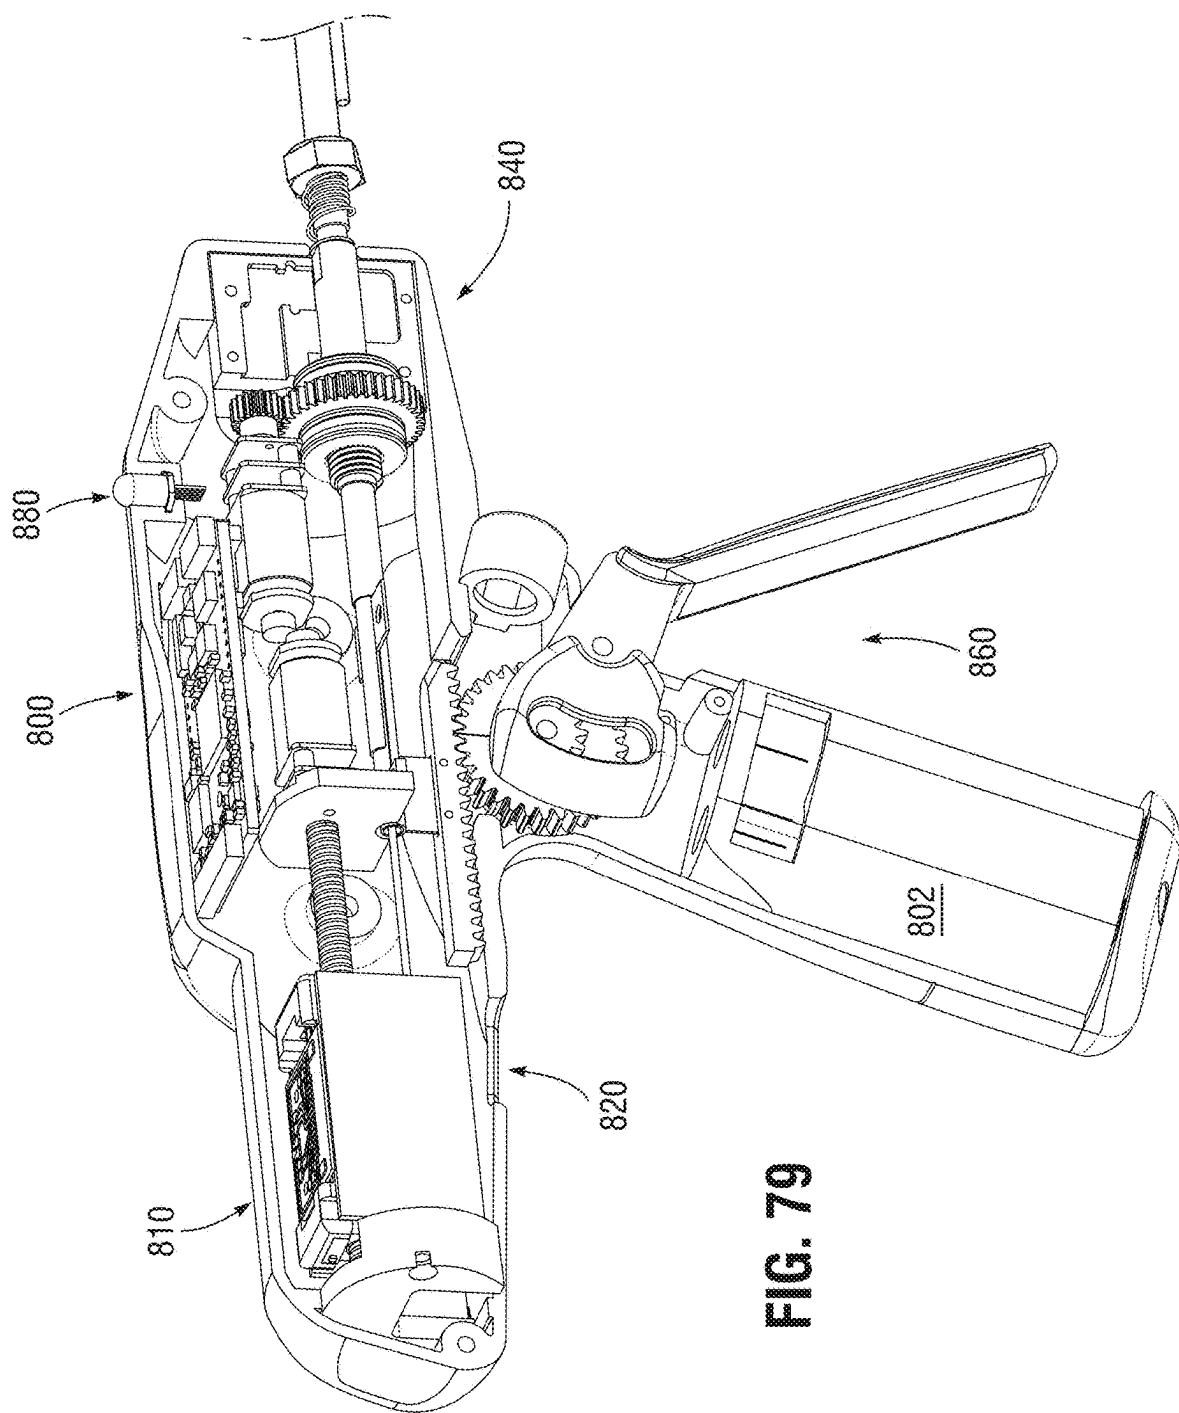


FIG. 7g

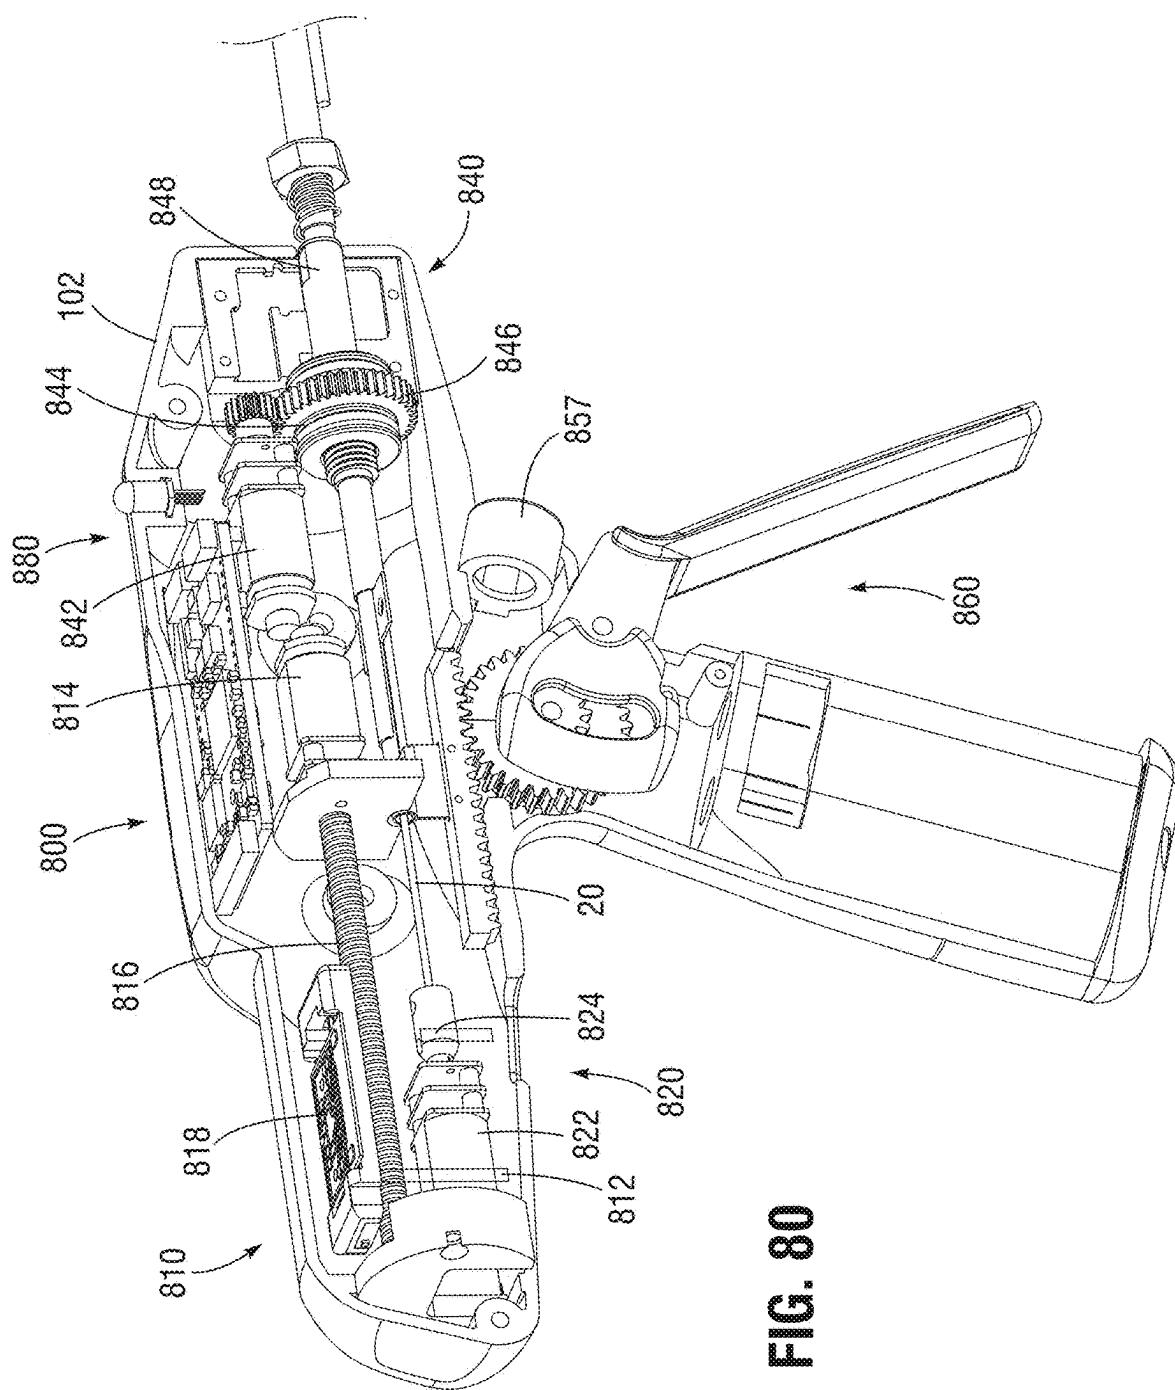


FIG. 80

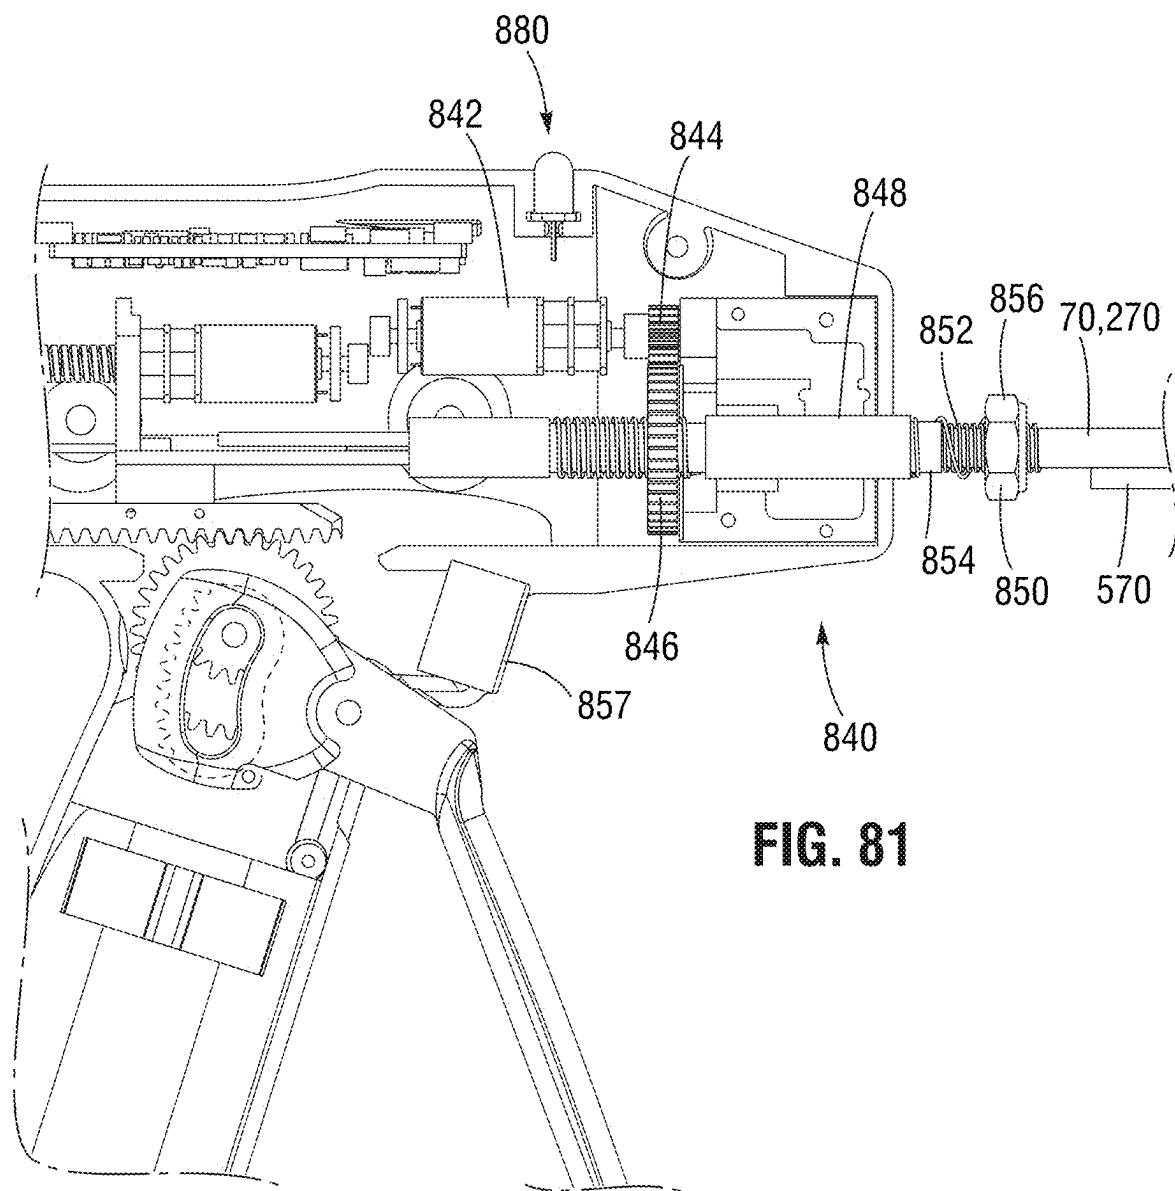


FIG. 81

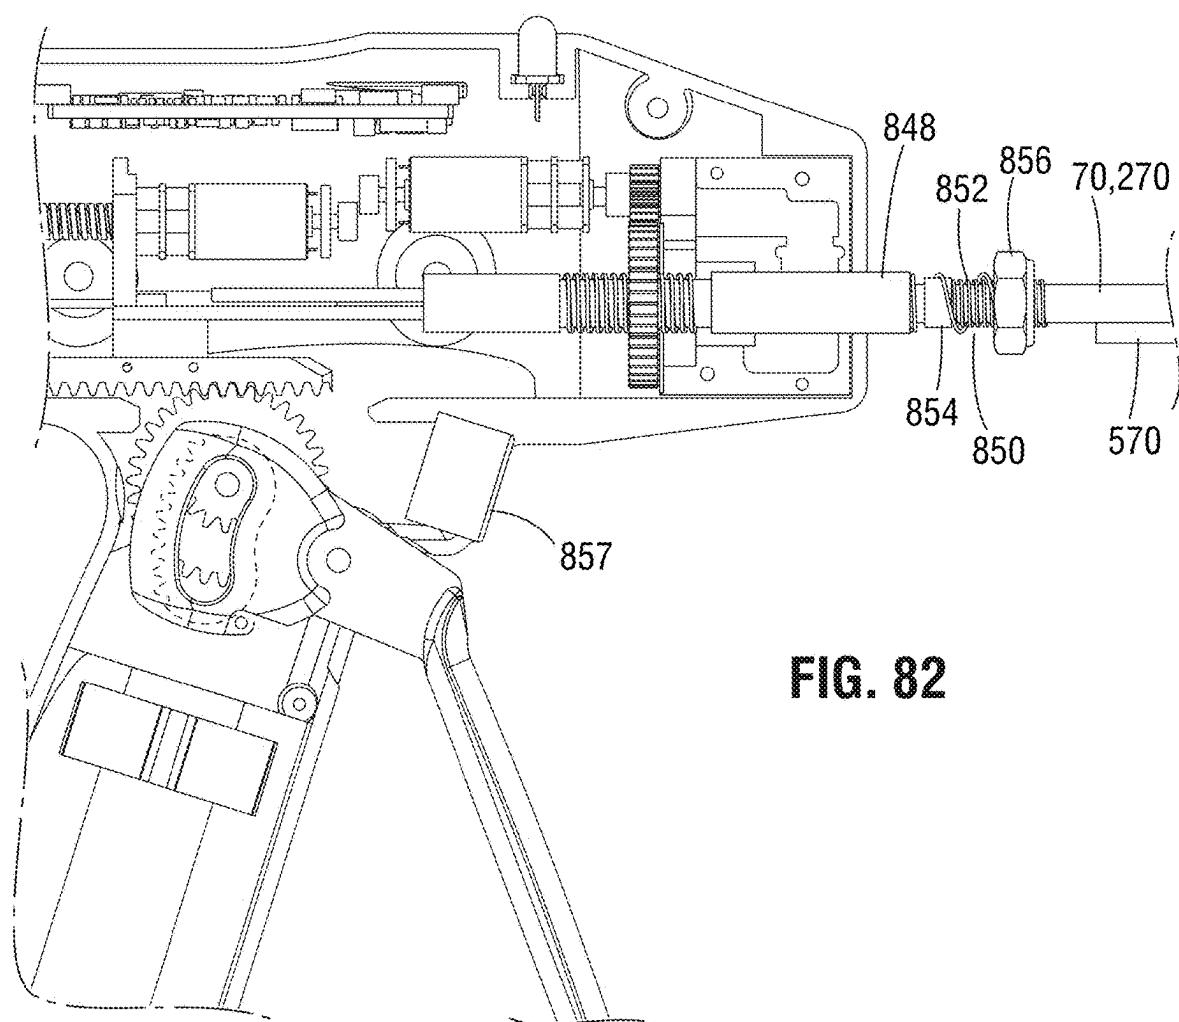


FIG. 82

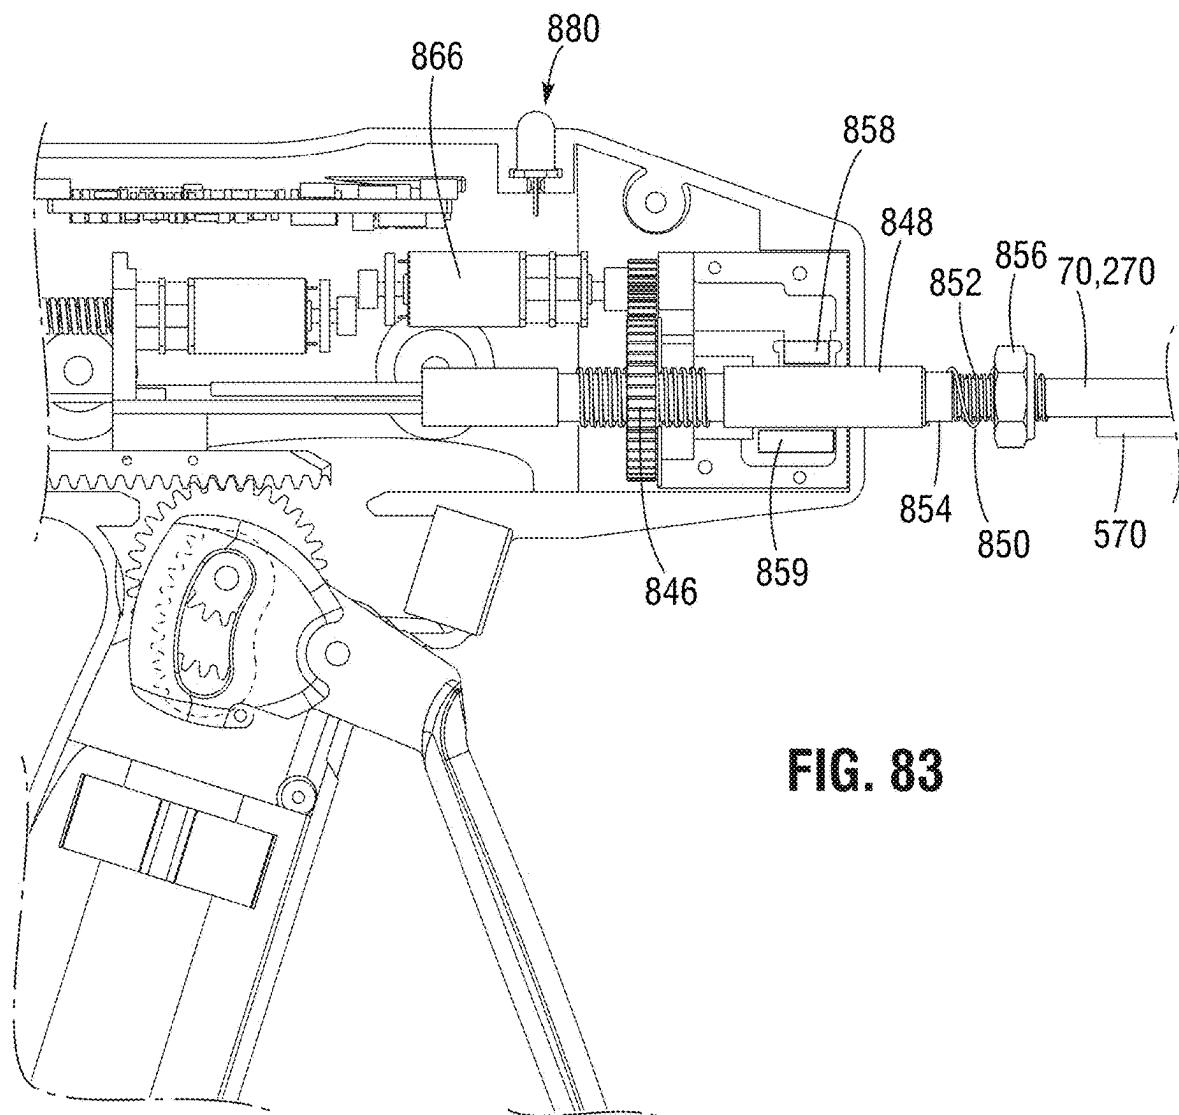


FIG. 83

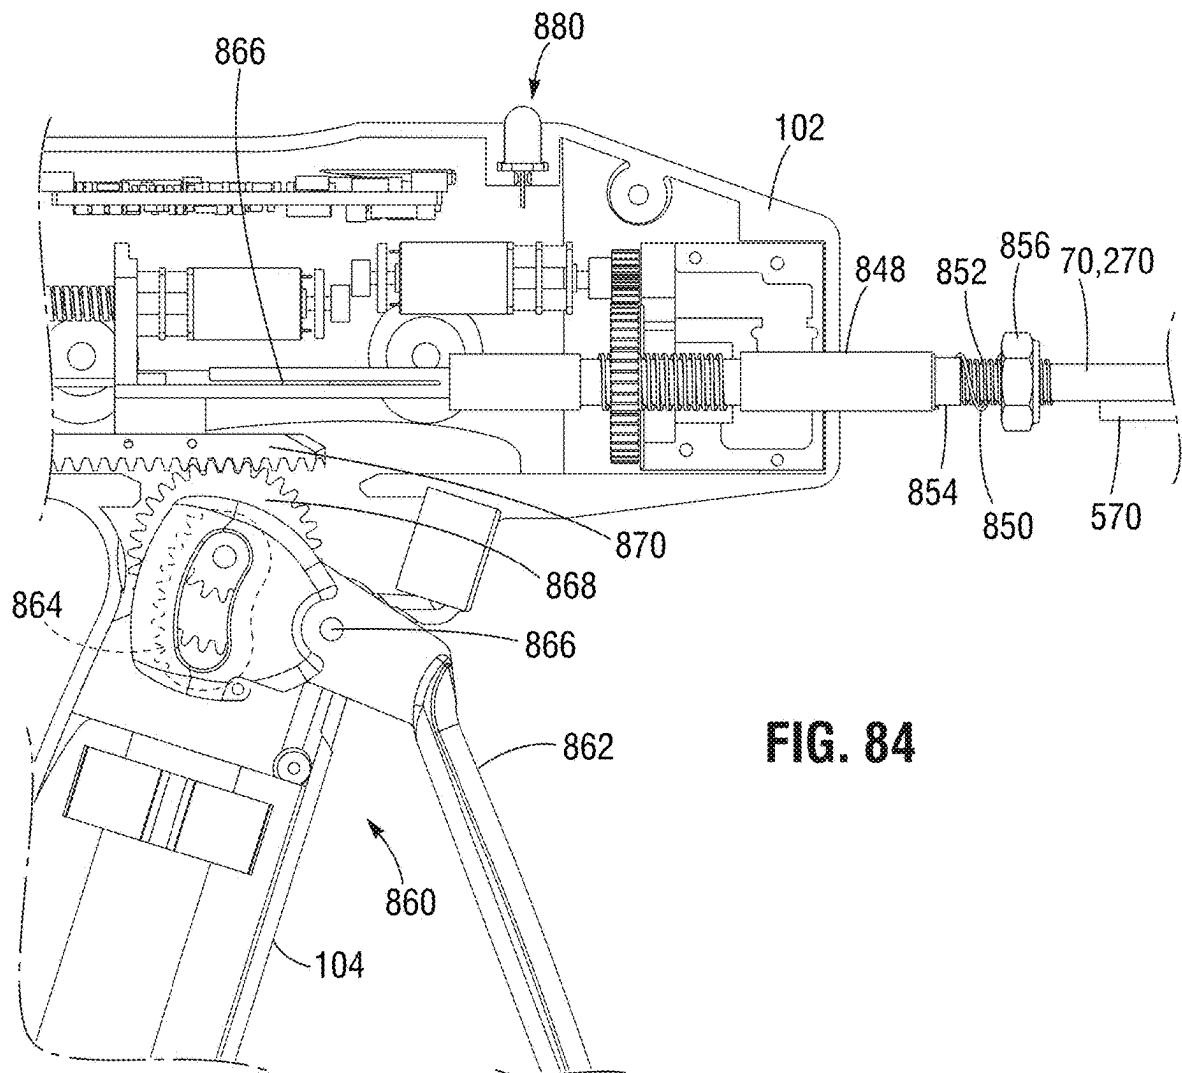


FIG. 84

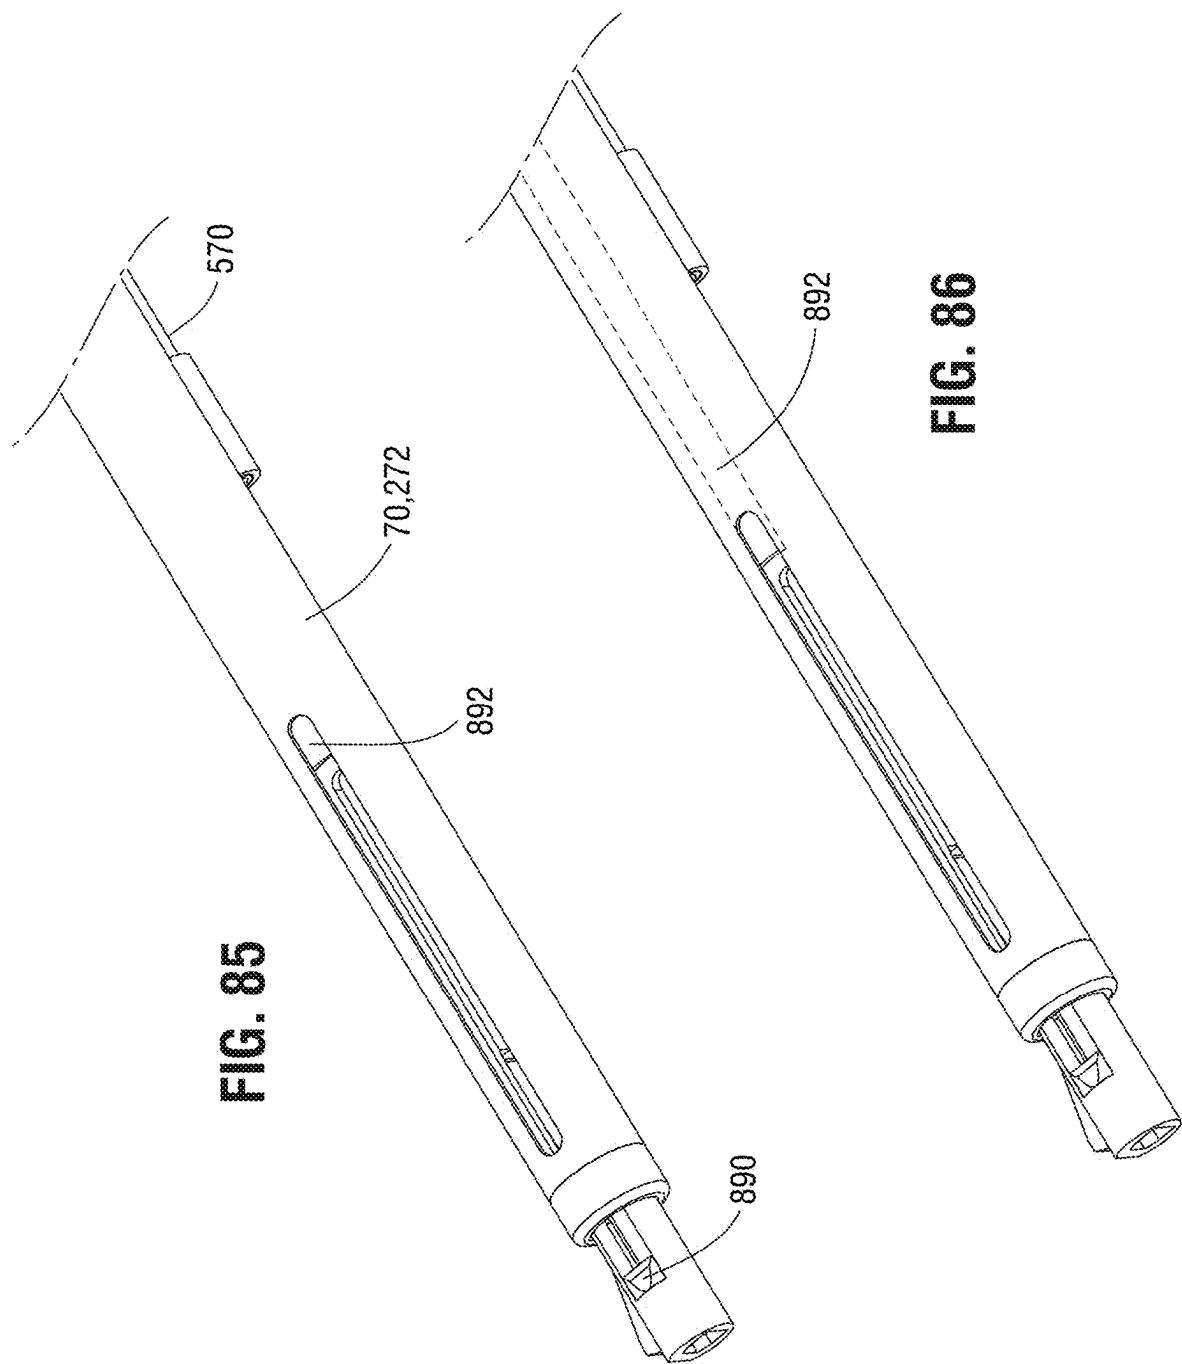


FIG. 87

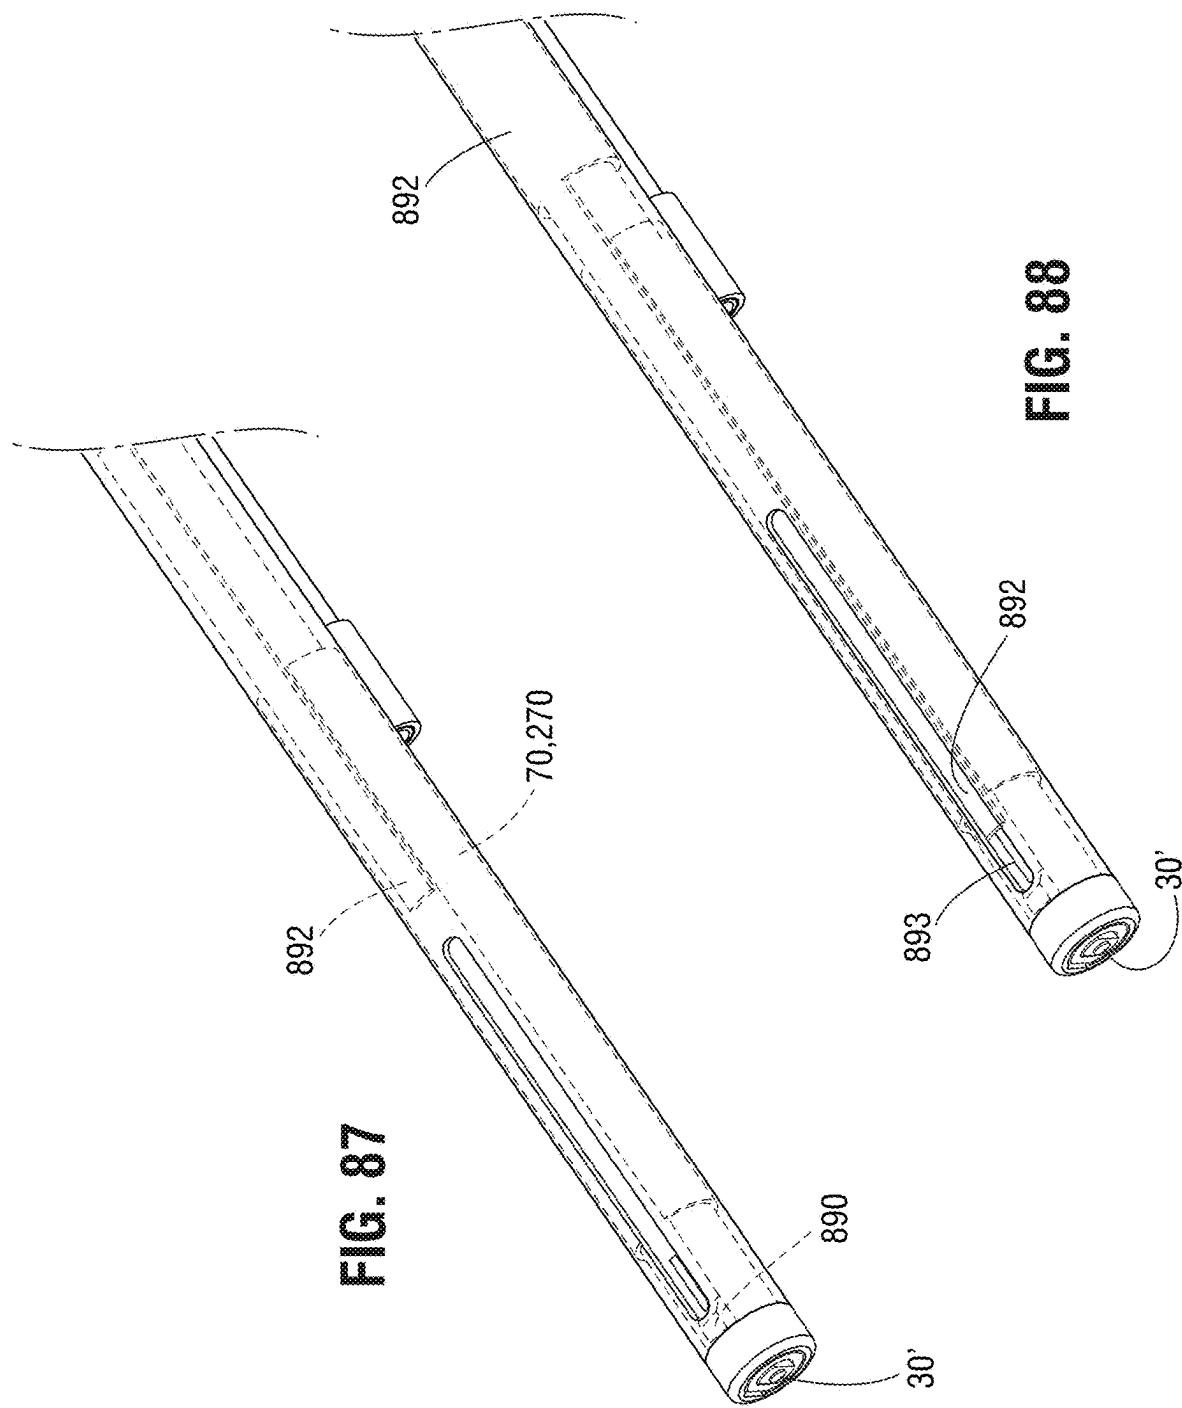
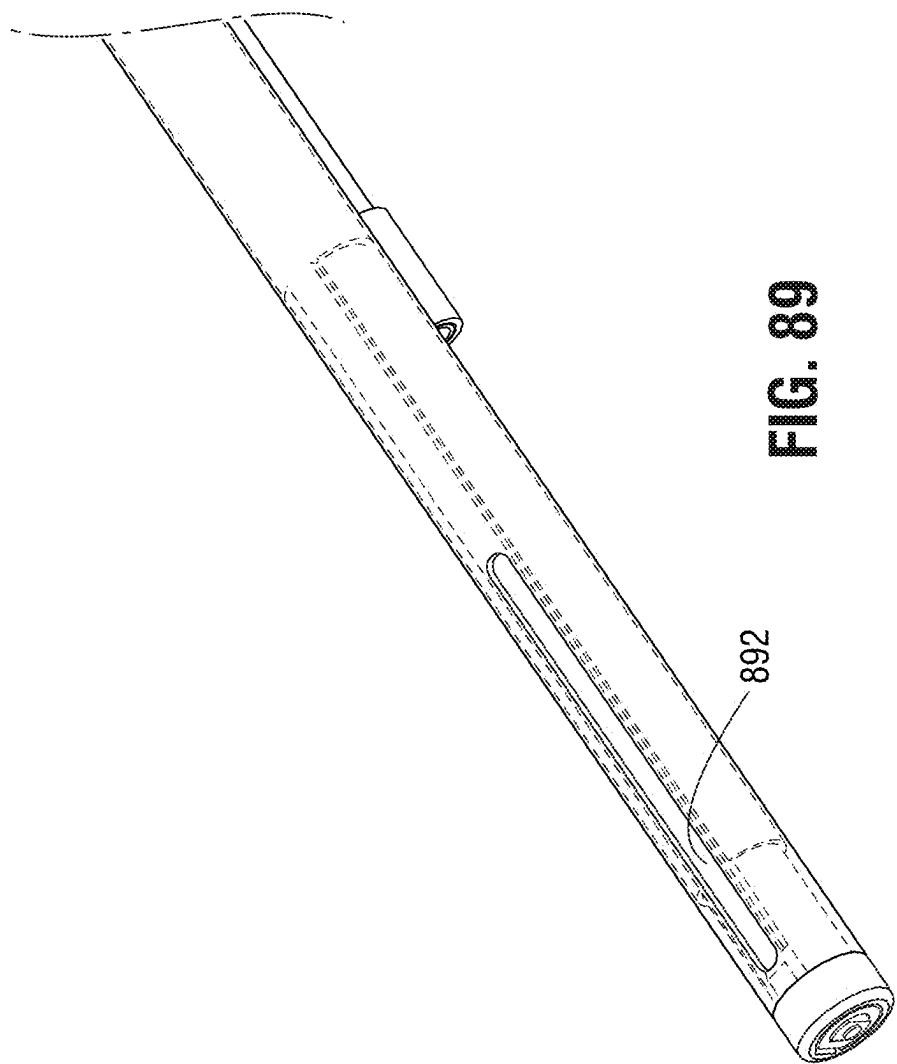
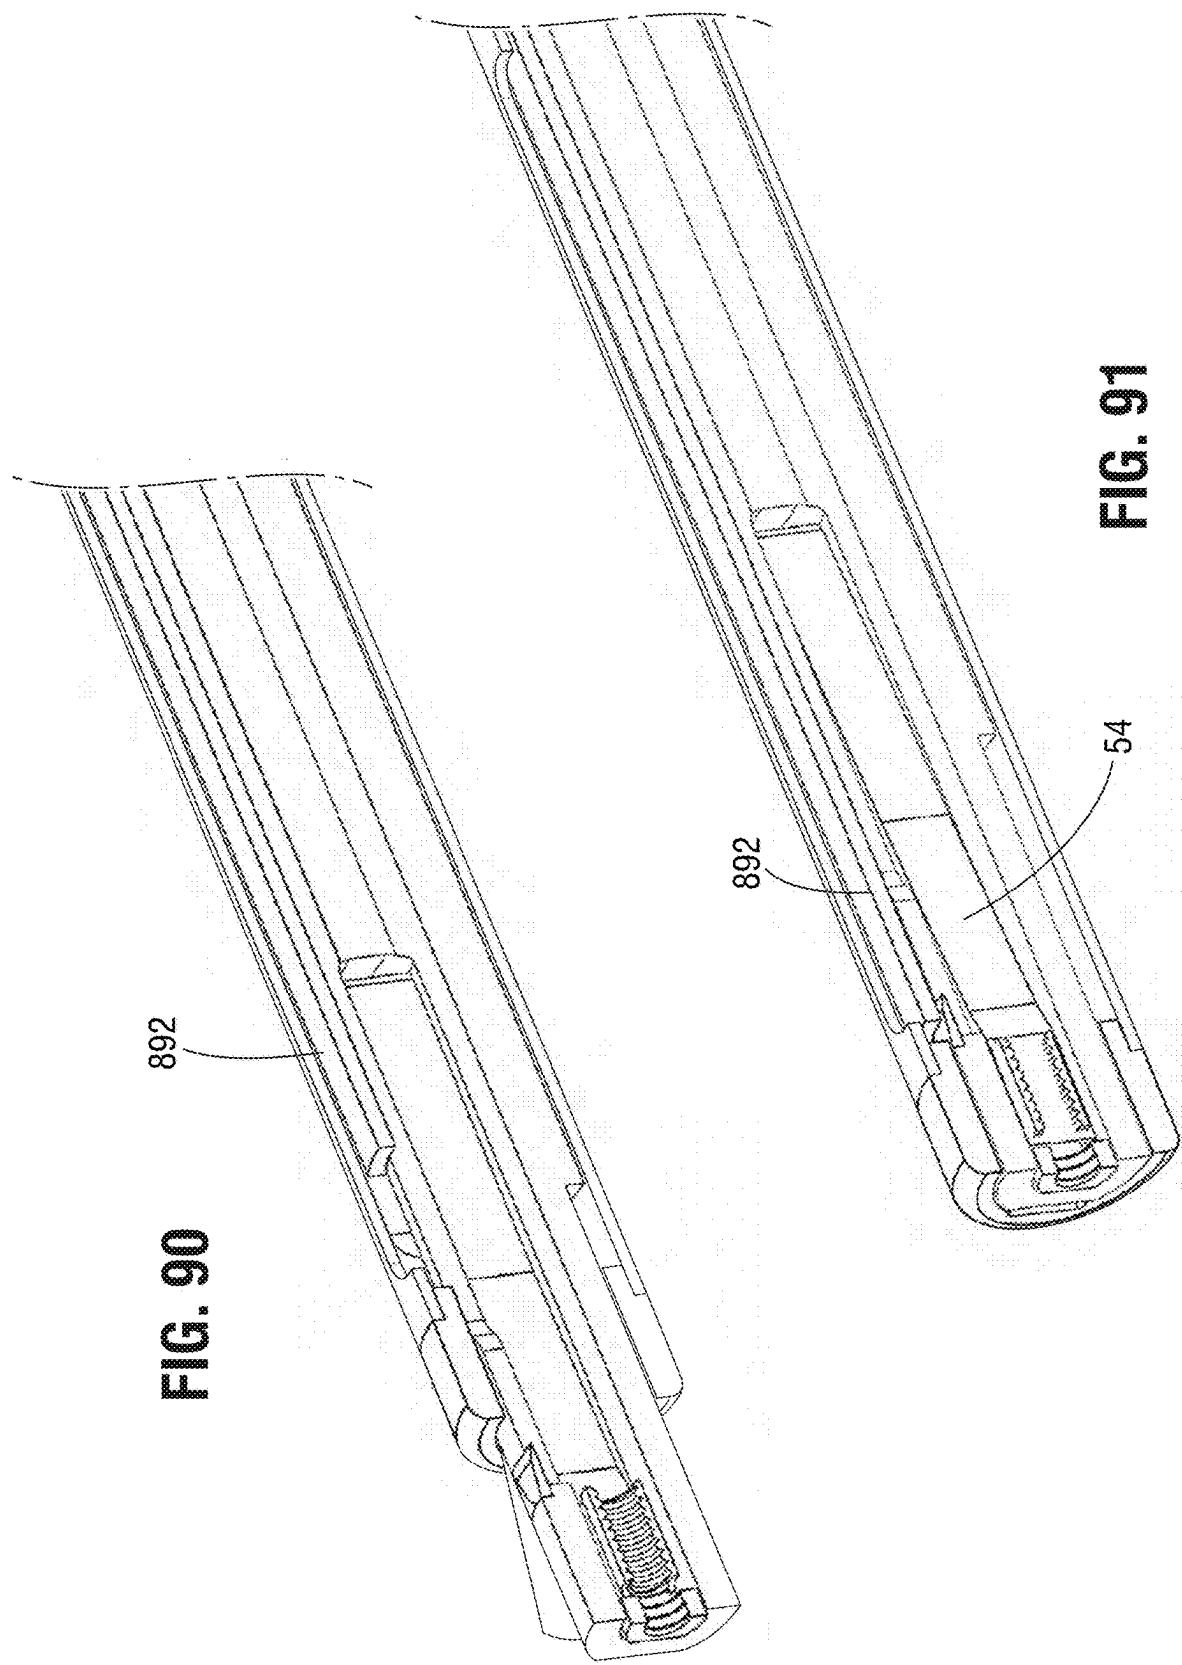


FIG. 88





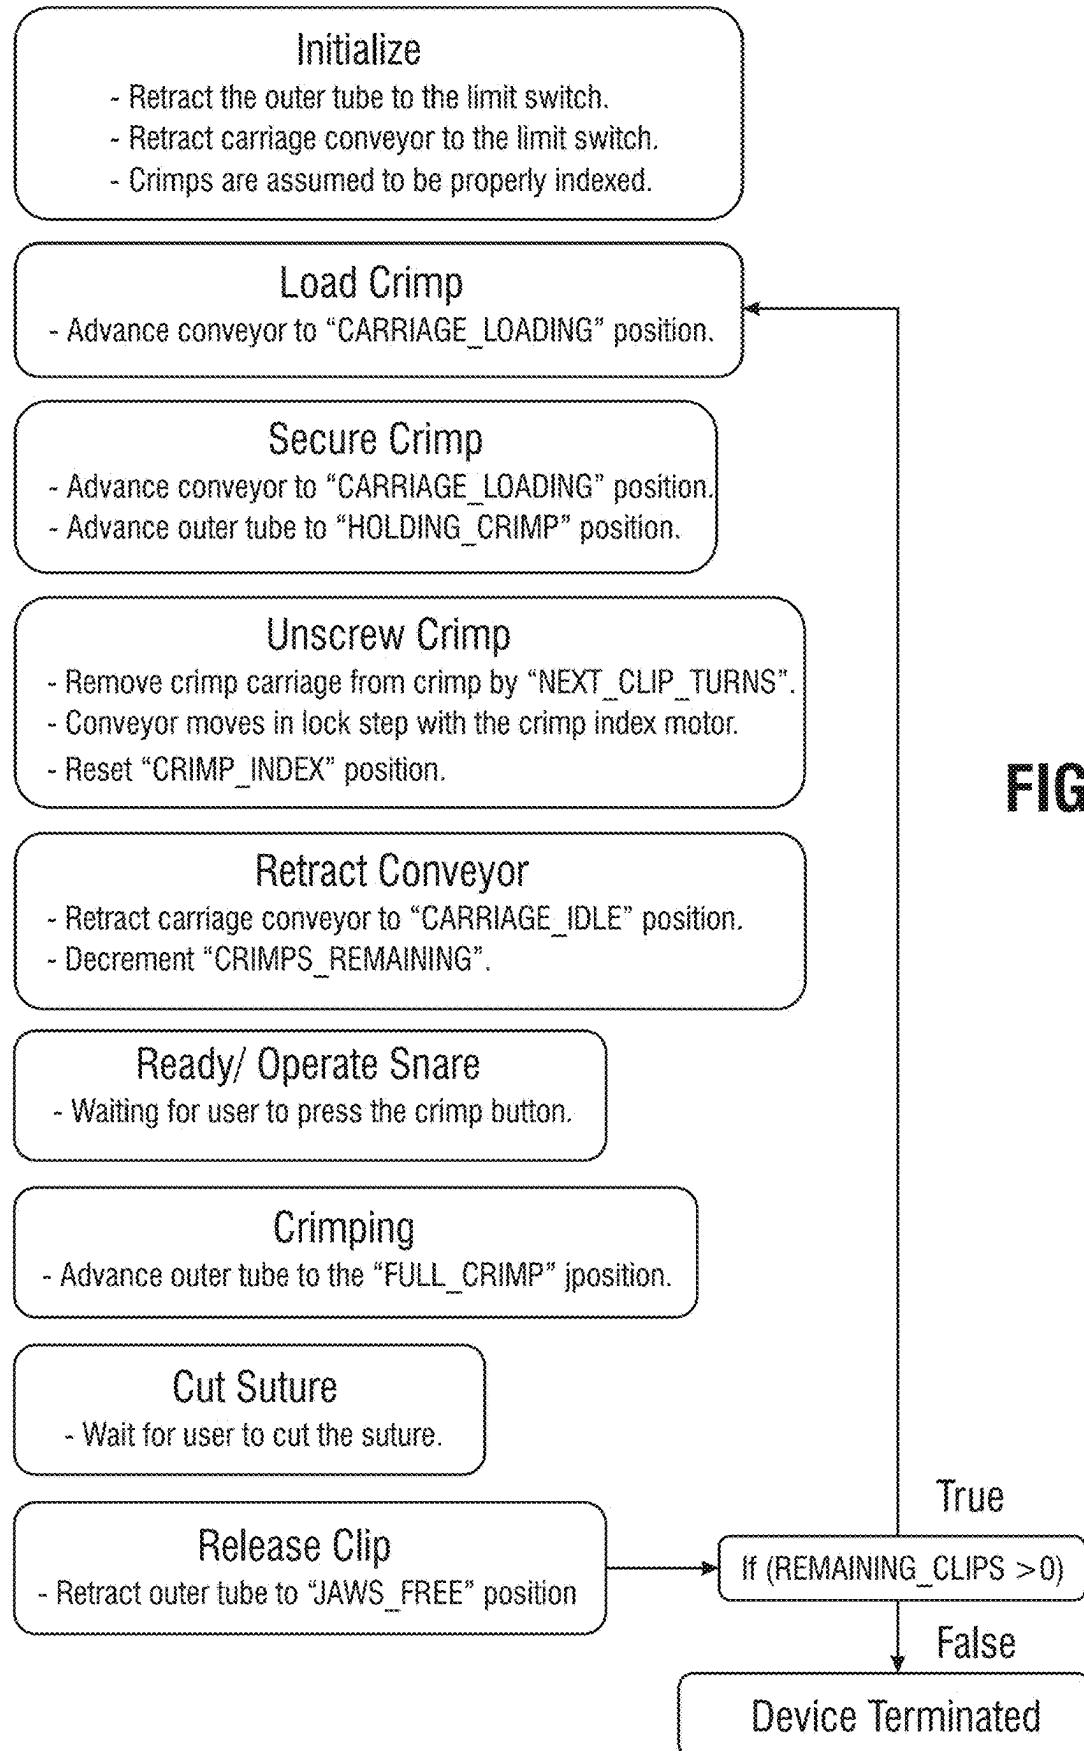
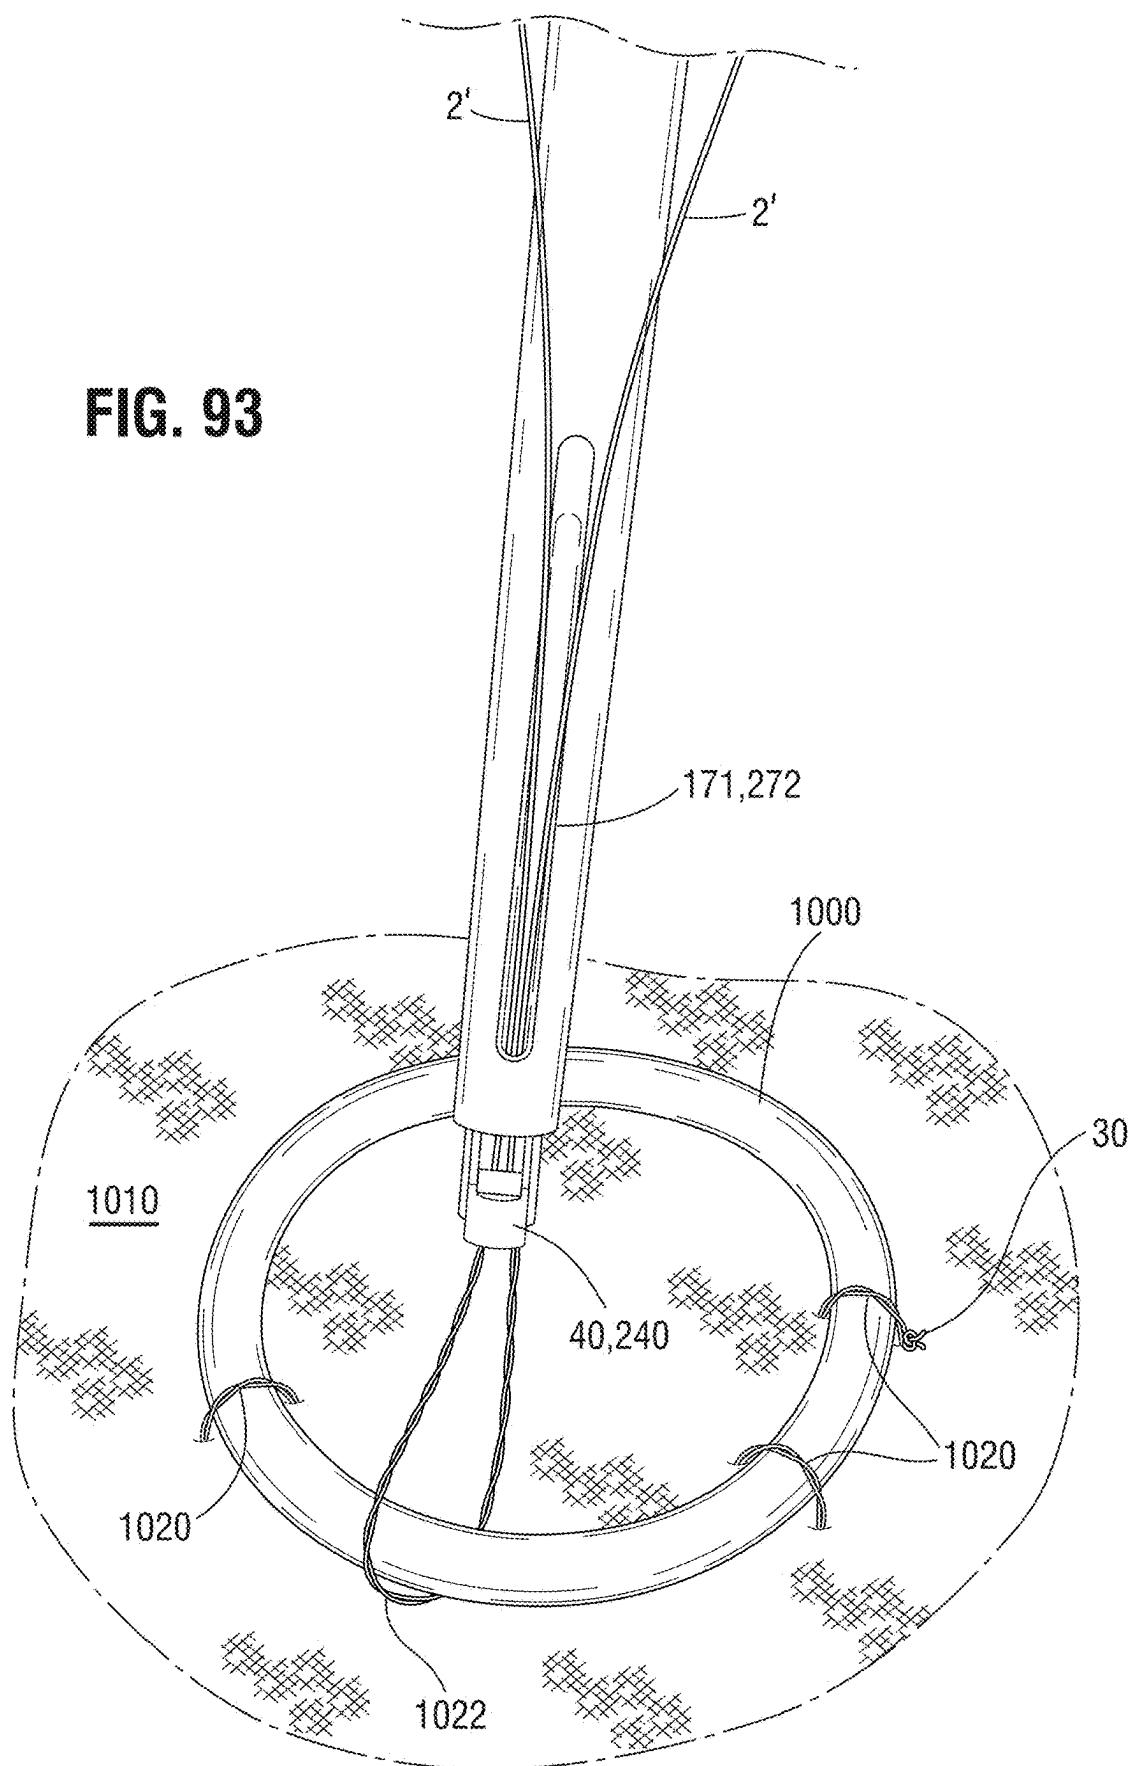
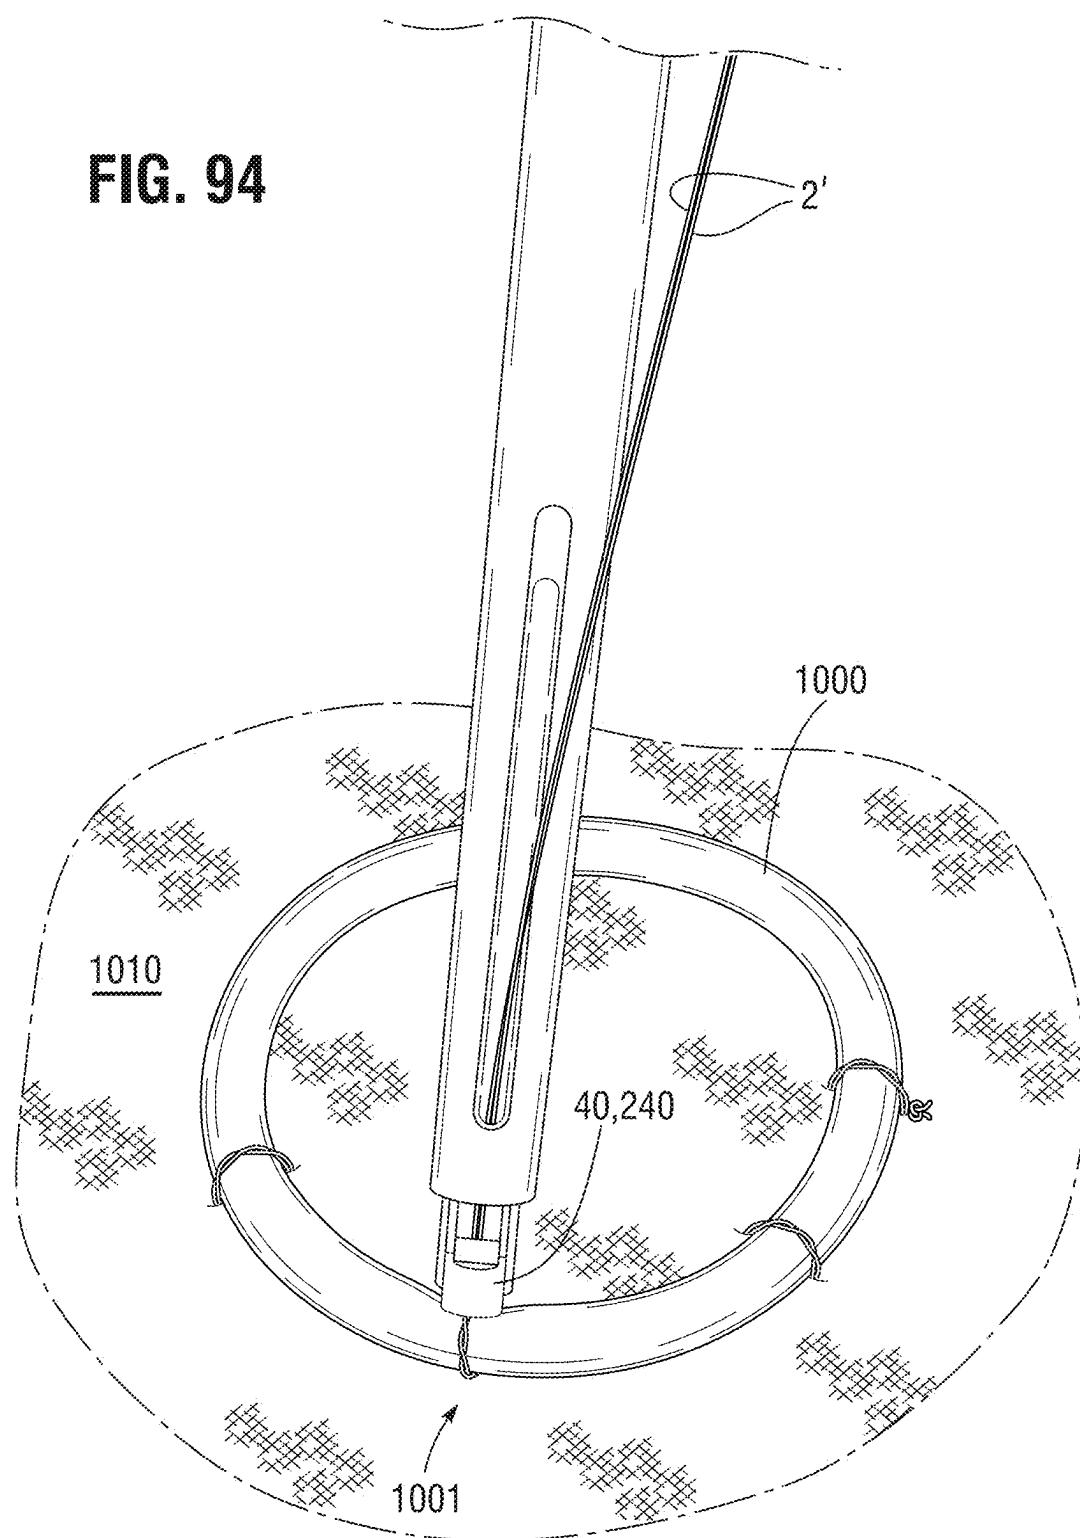


FIG. 92





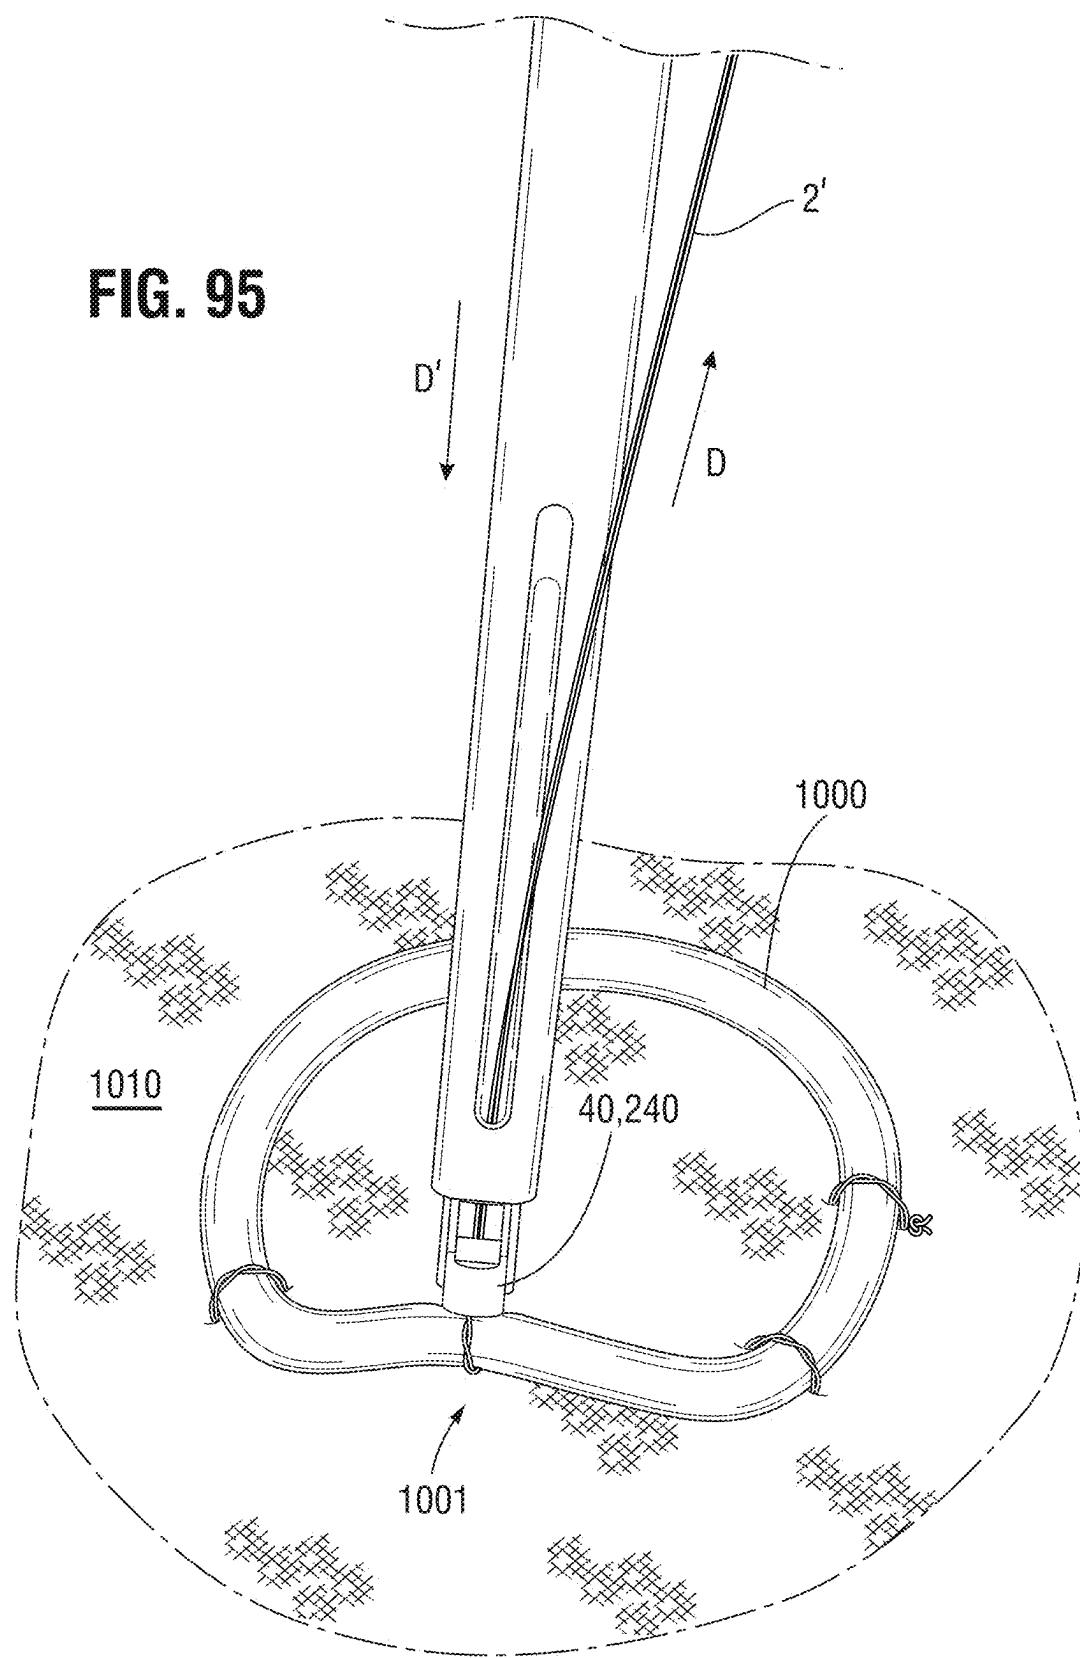
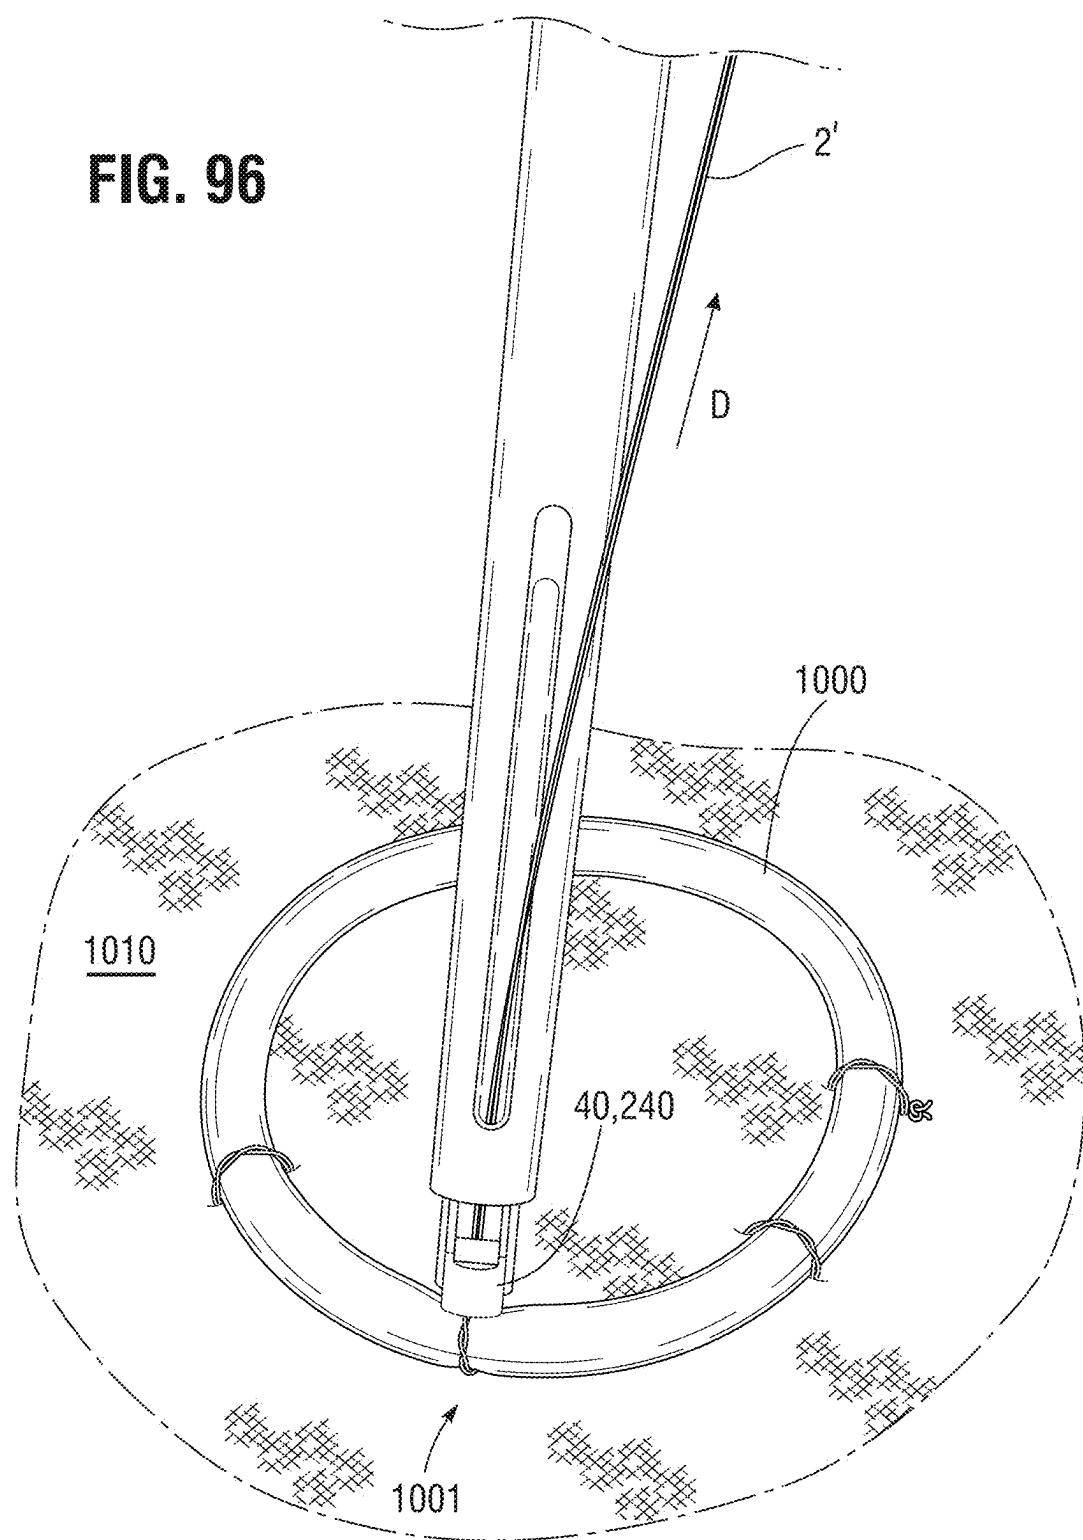


FIG. 96



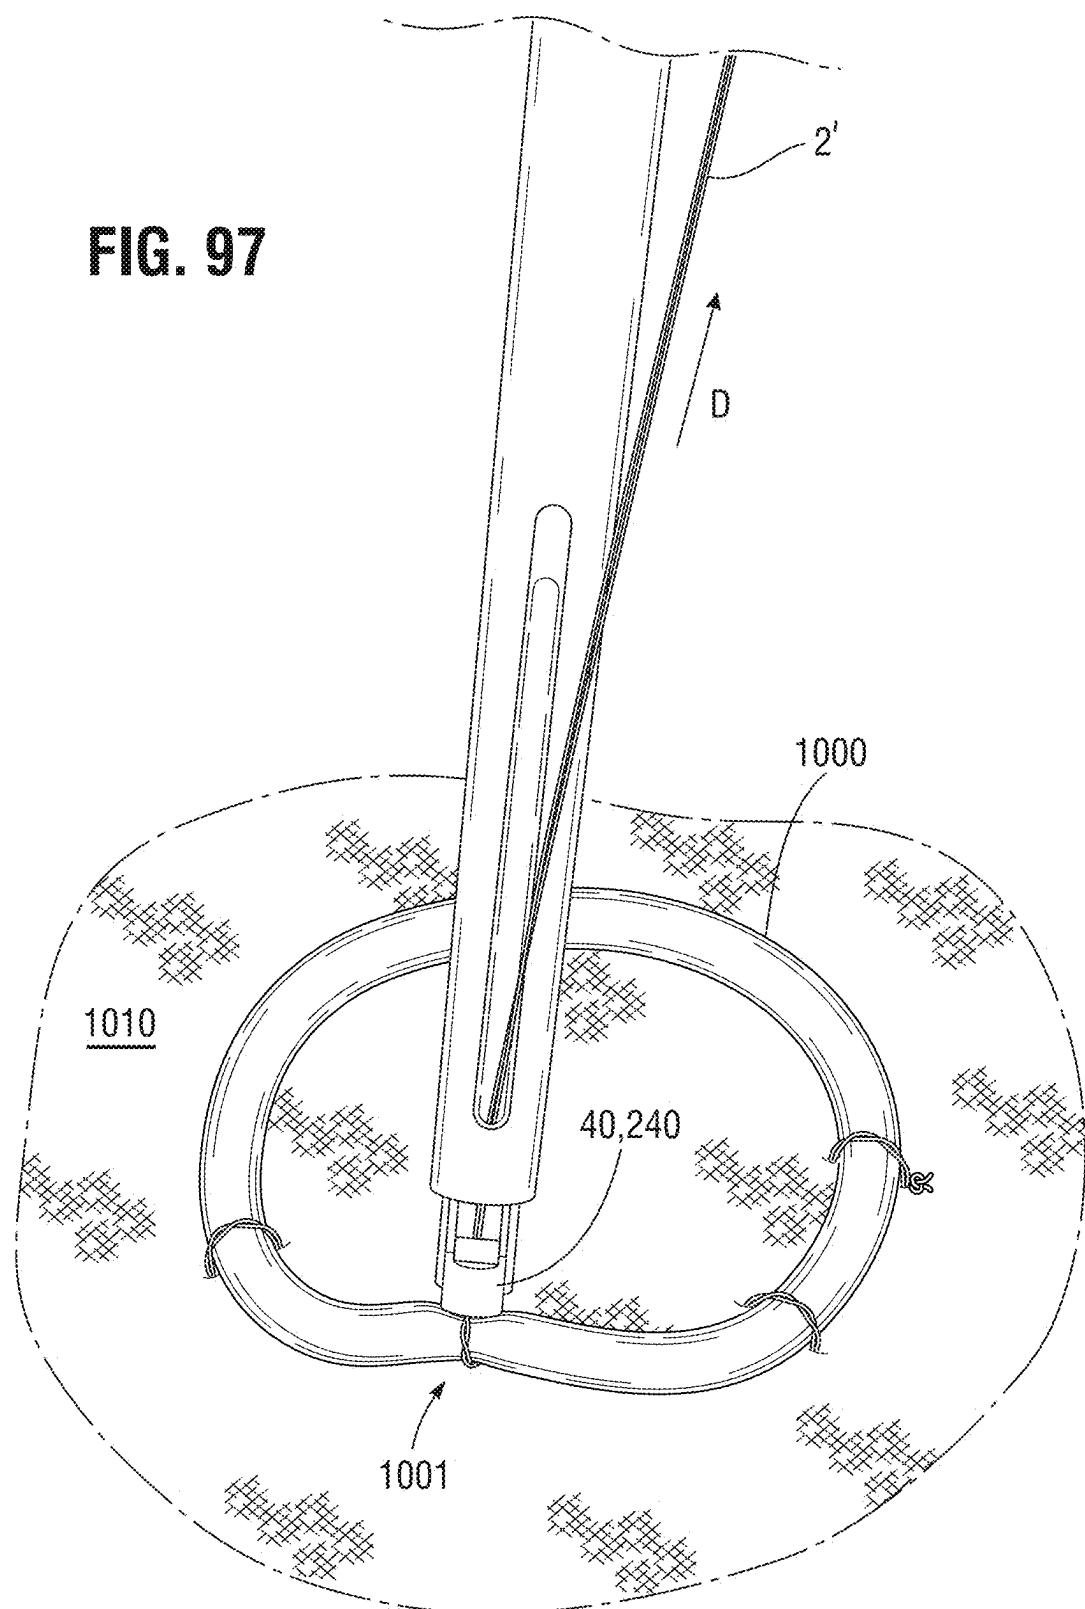
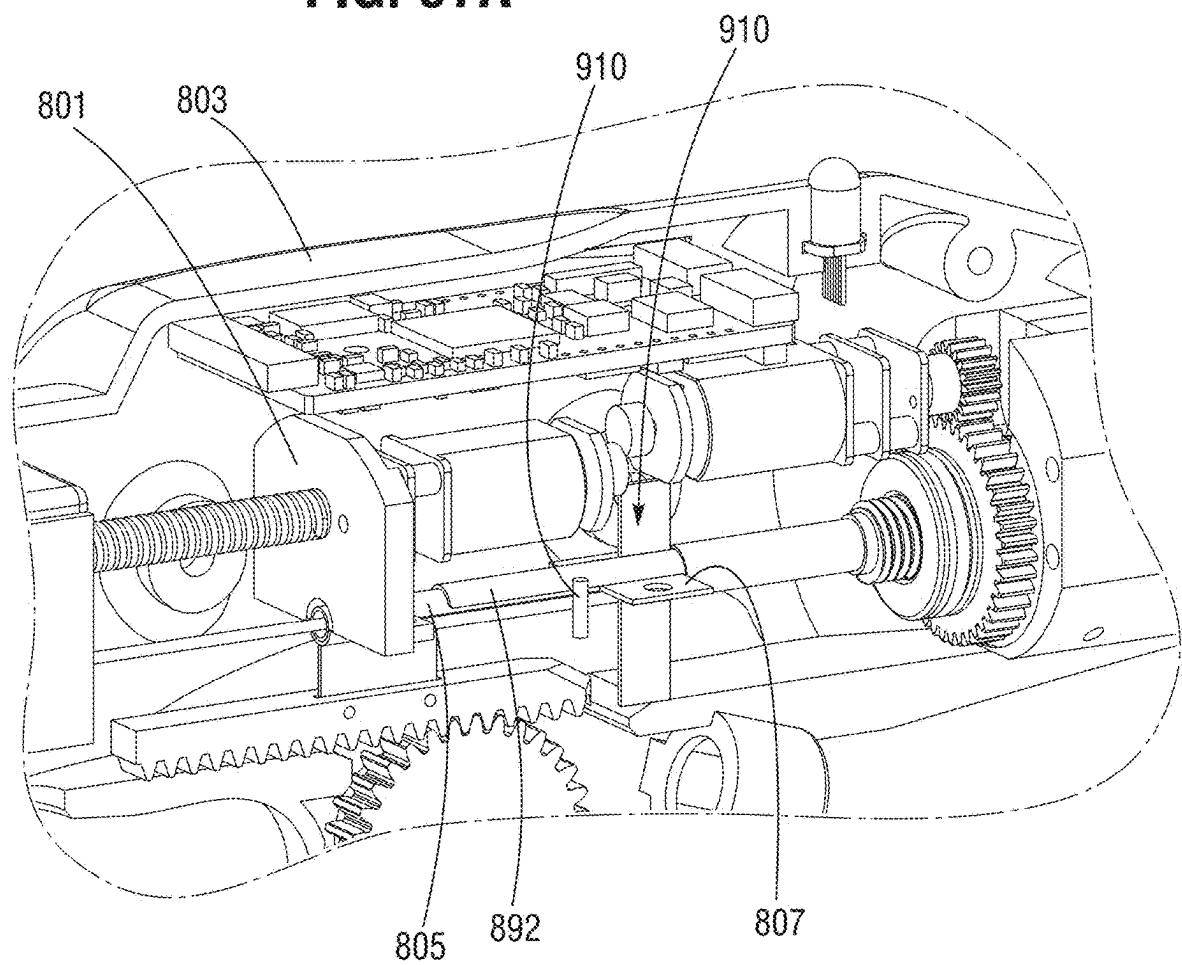
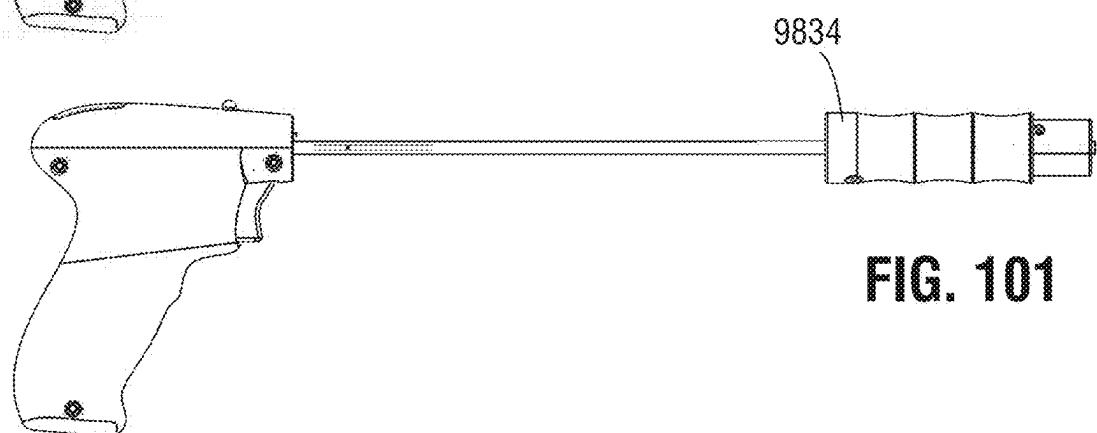
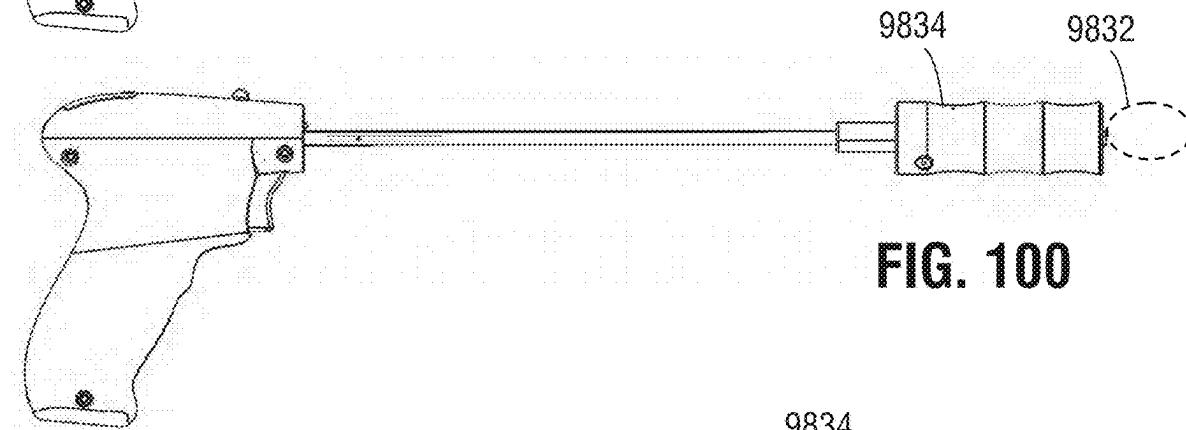
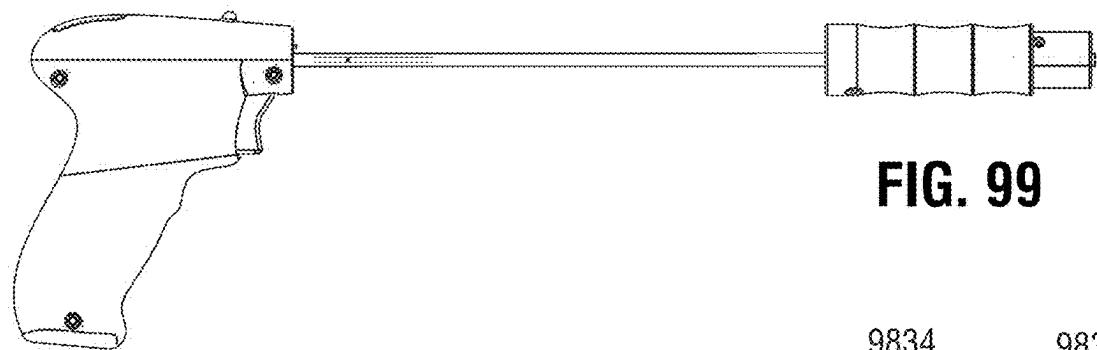
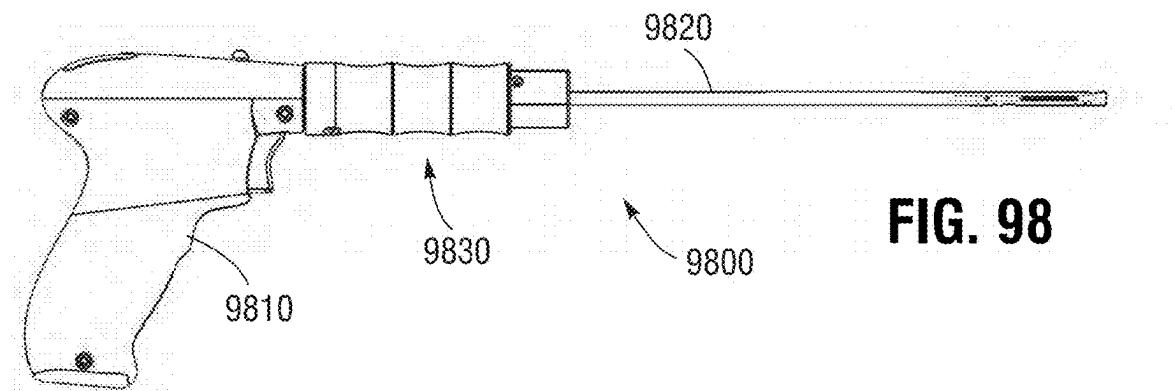


FIG. 97A





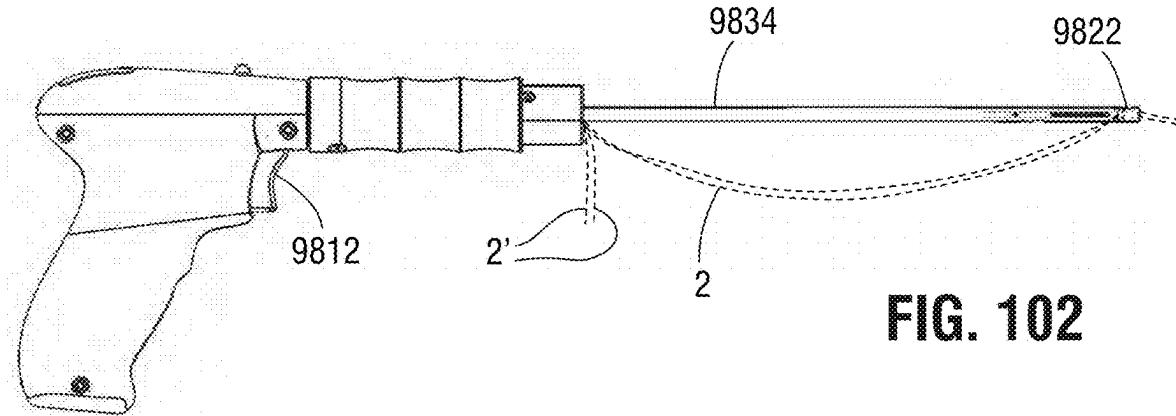


FIG. 102

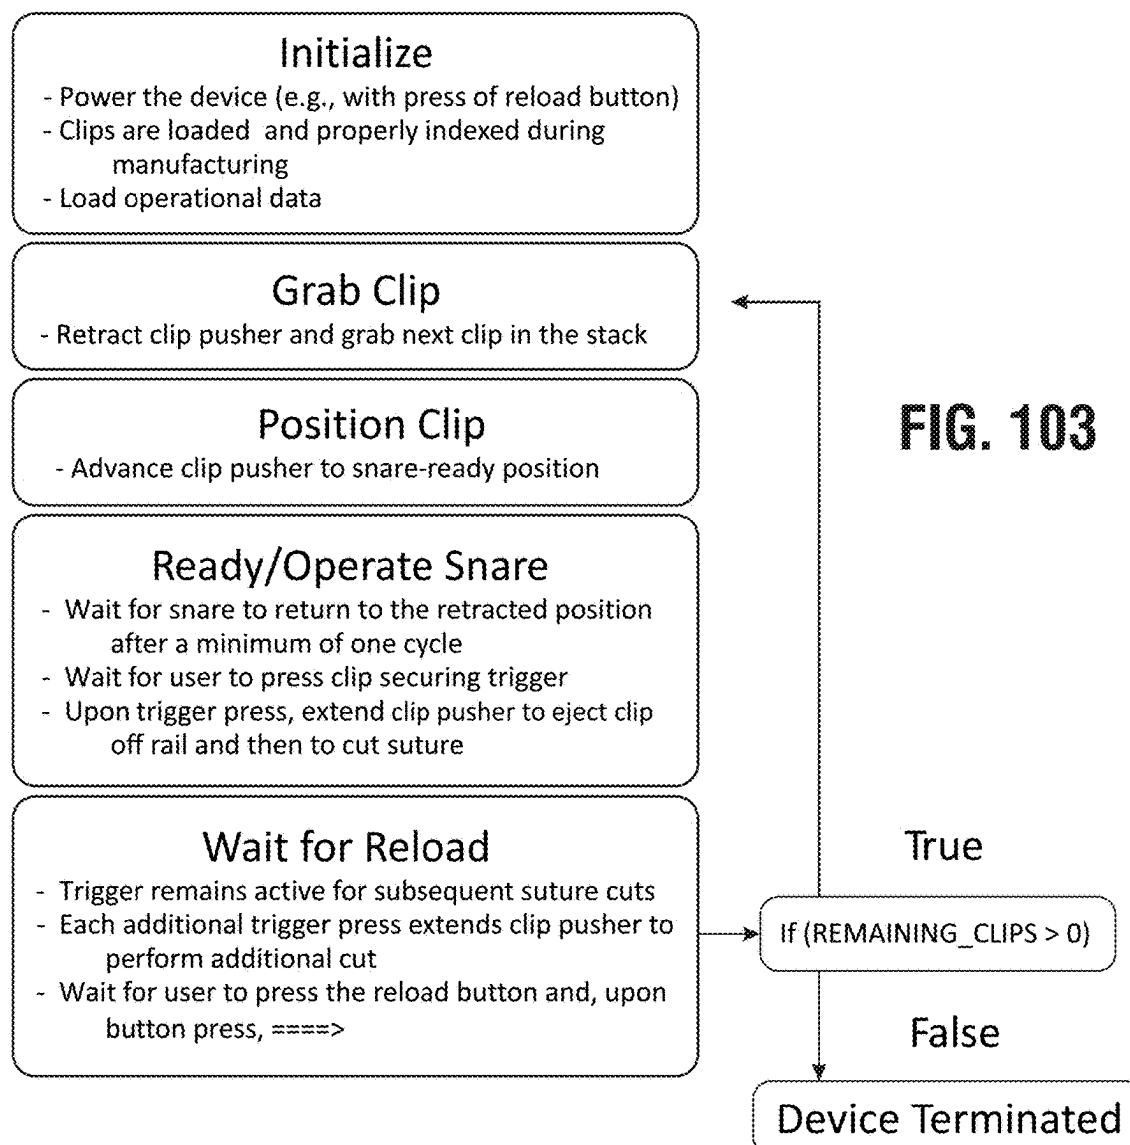


FIG. 103

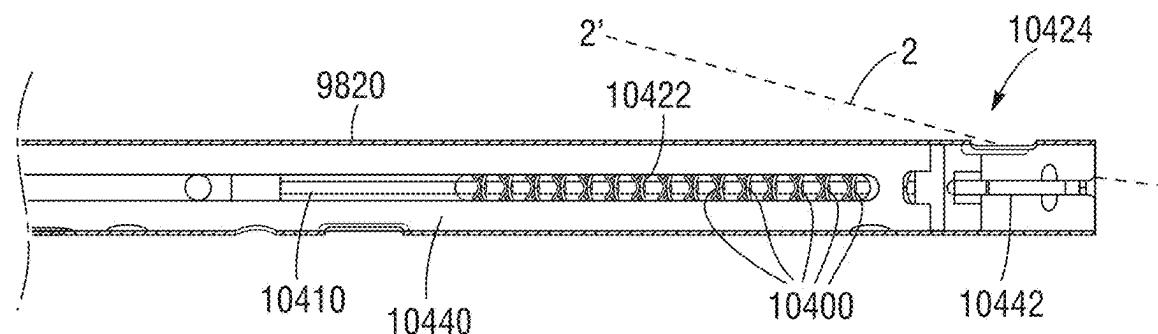


FIG. 104

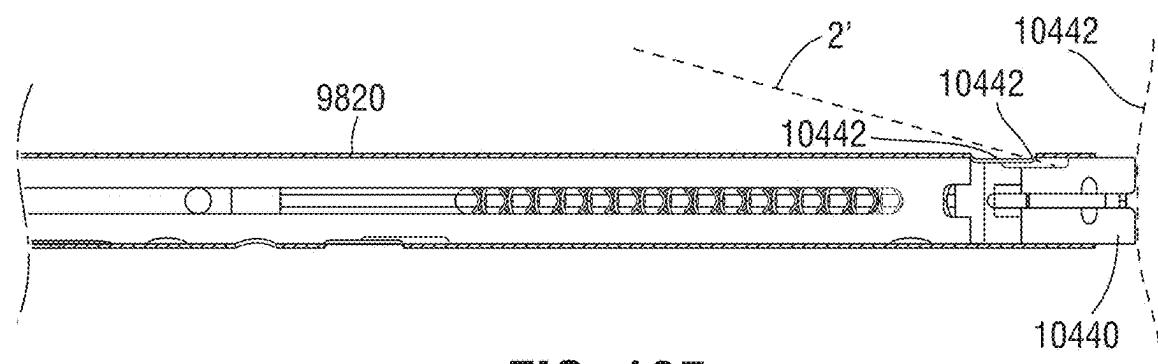


FIG. 105

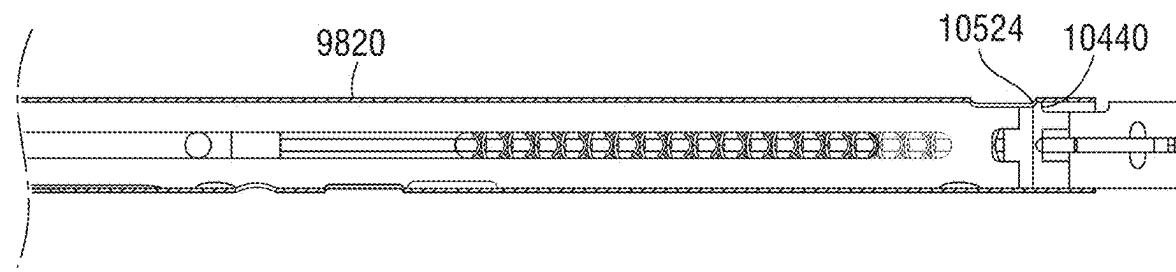


FIG. 106

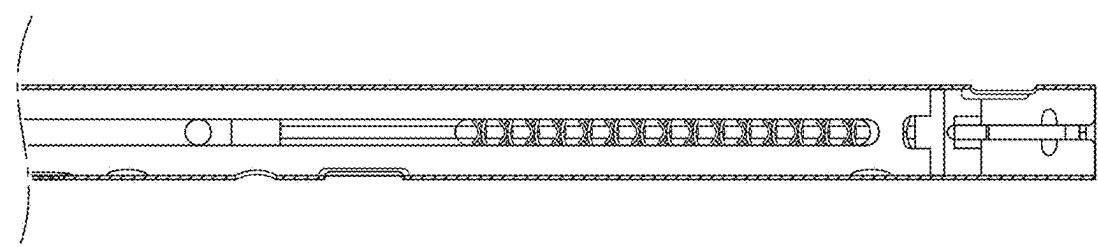


FIG. 107

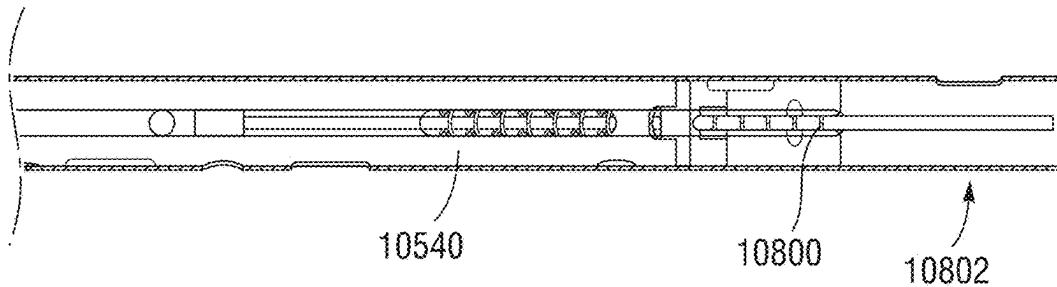


FIG. 108

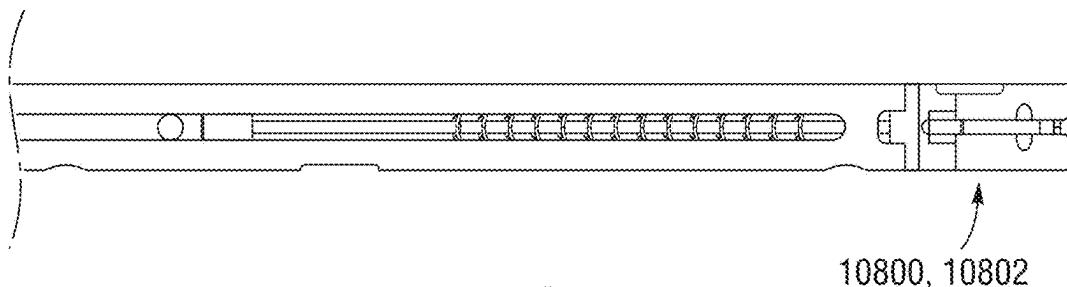


FIG. 109

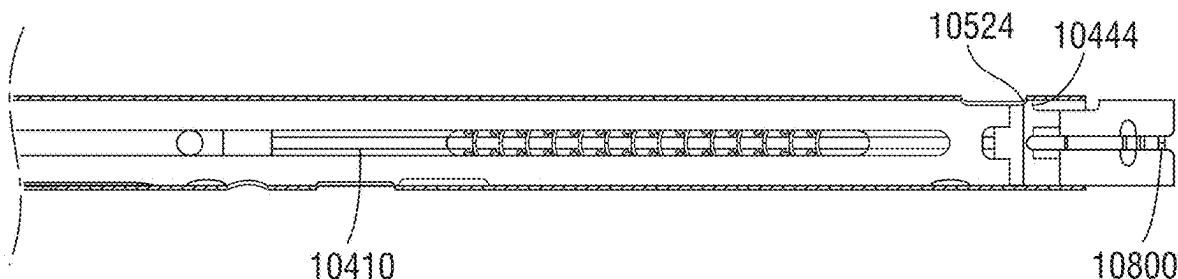


FIG. 110

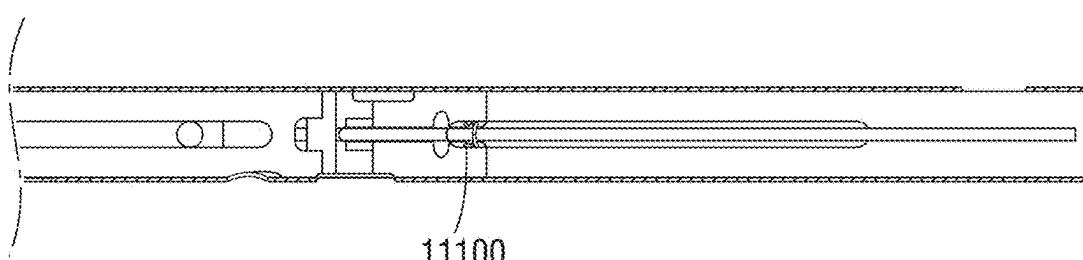
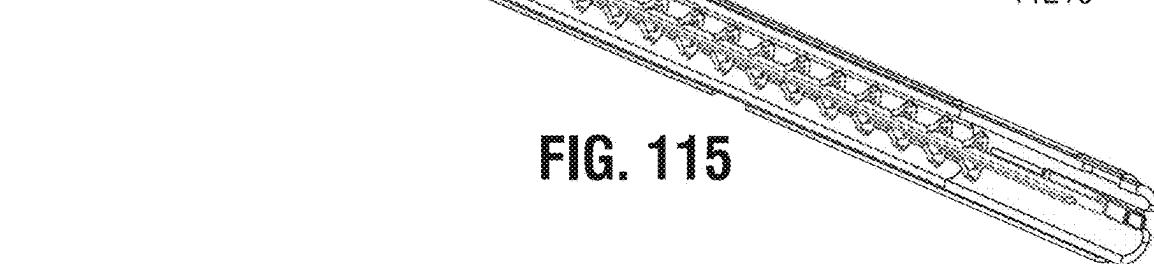
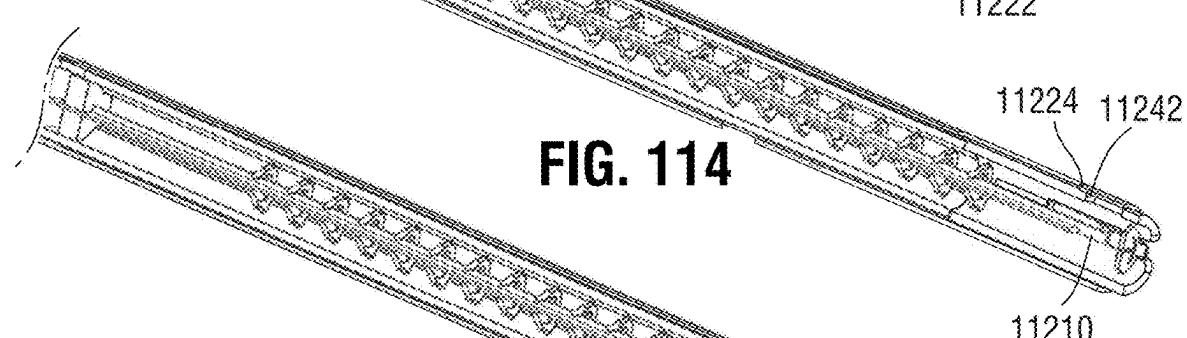
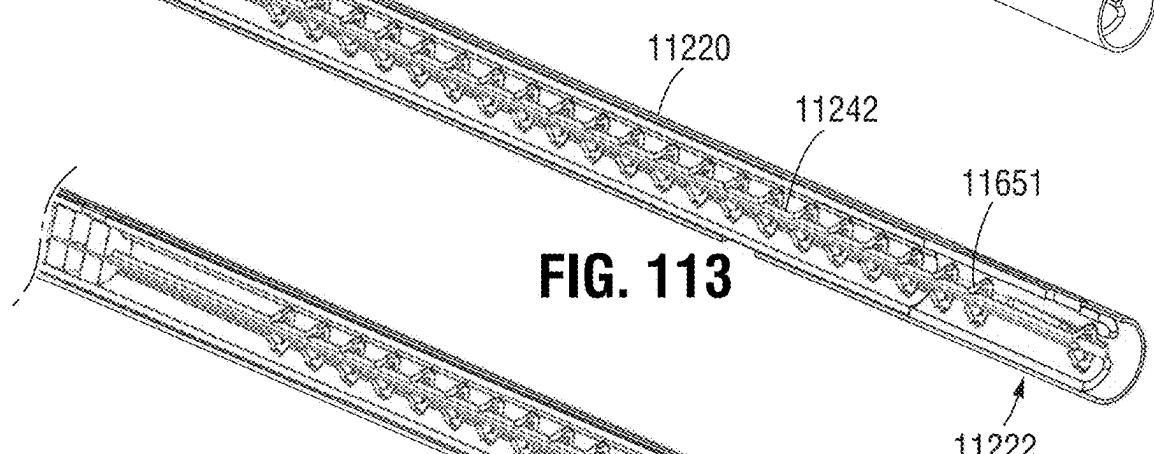
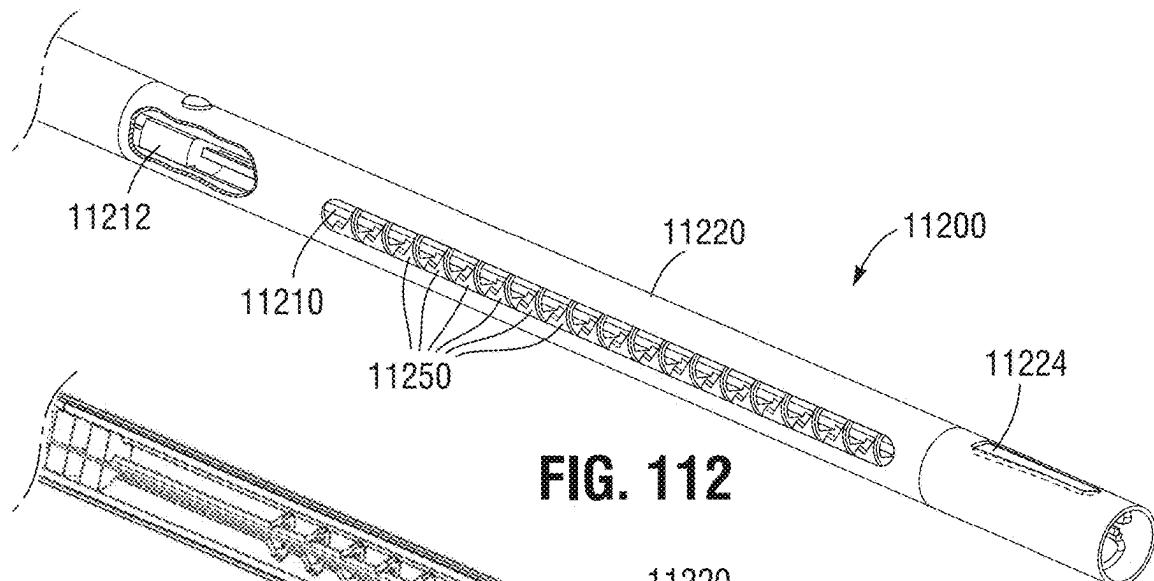
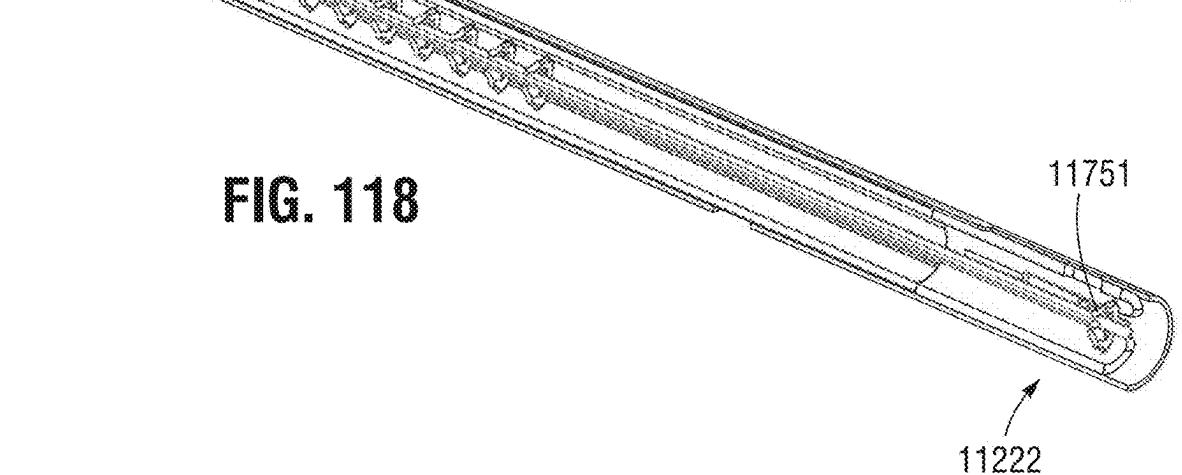
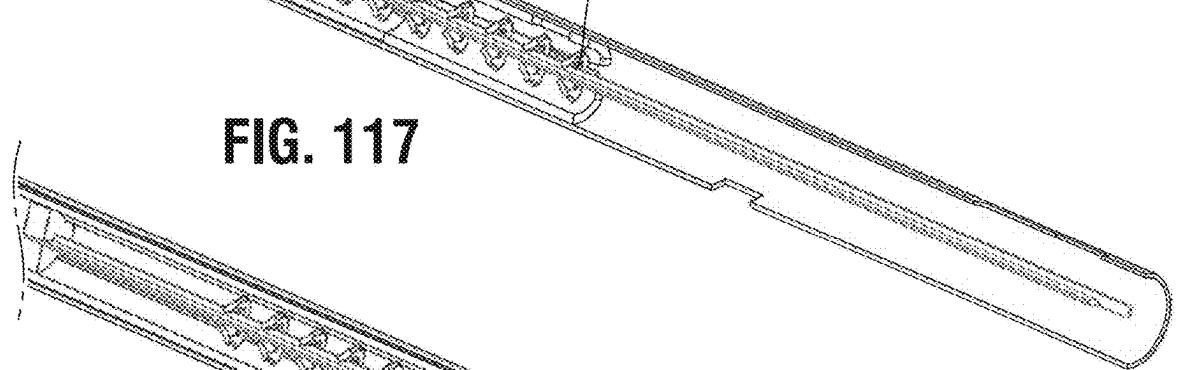
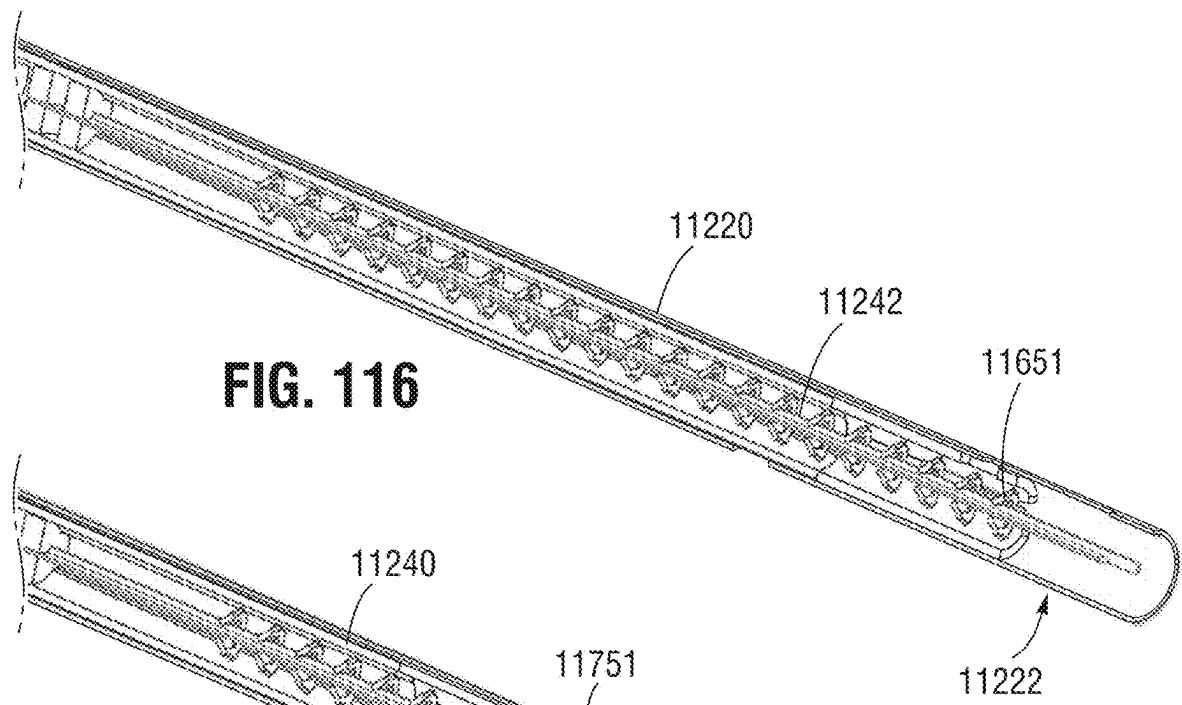
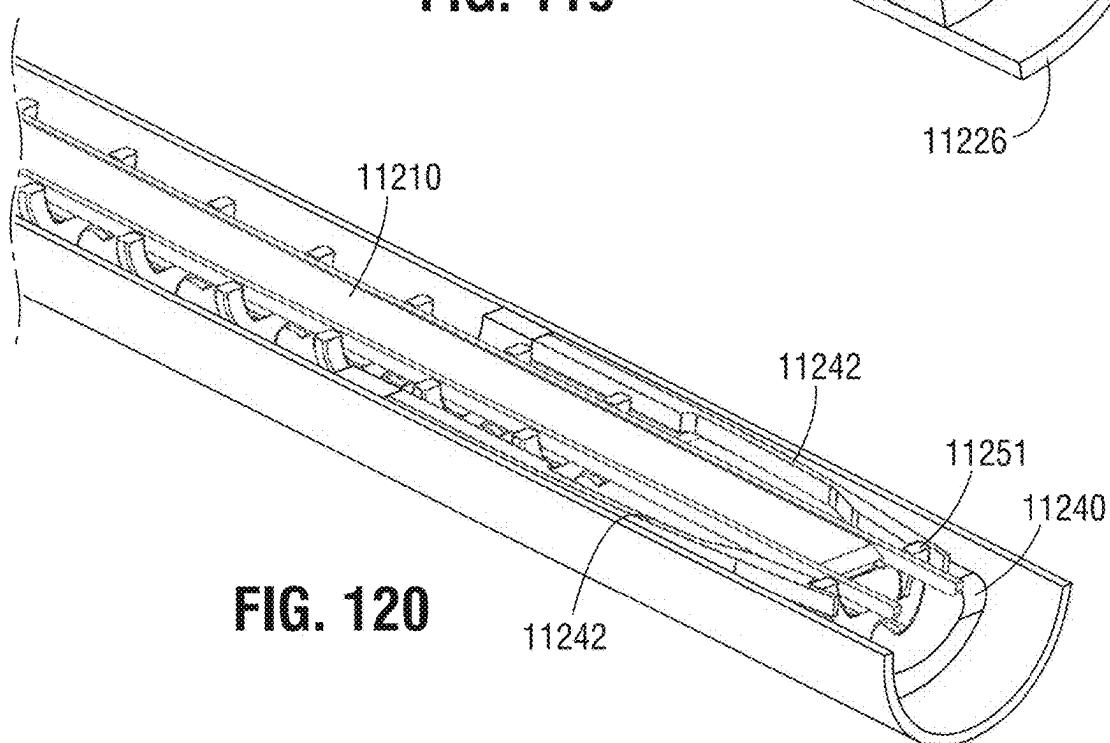
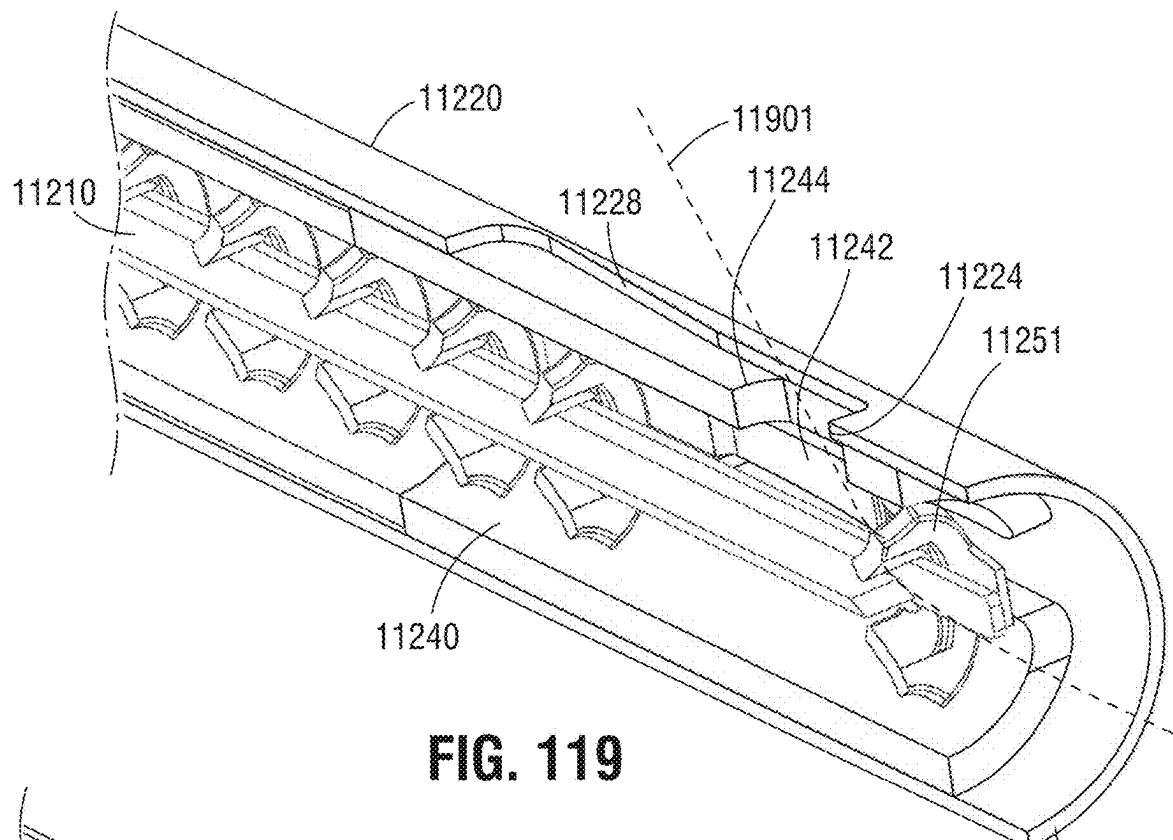
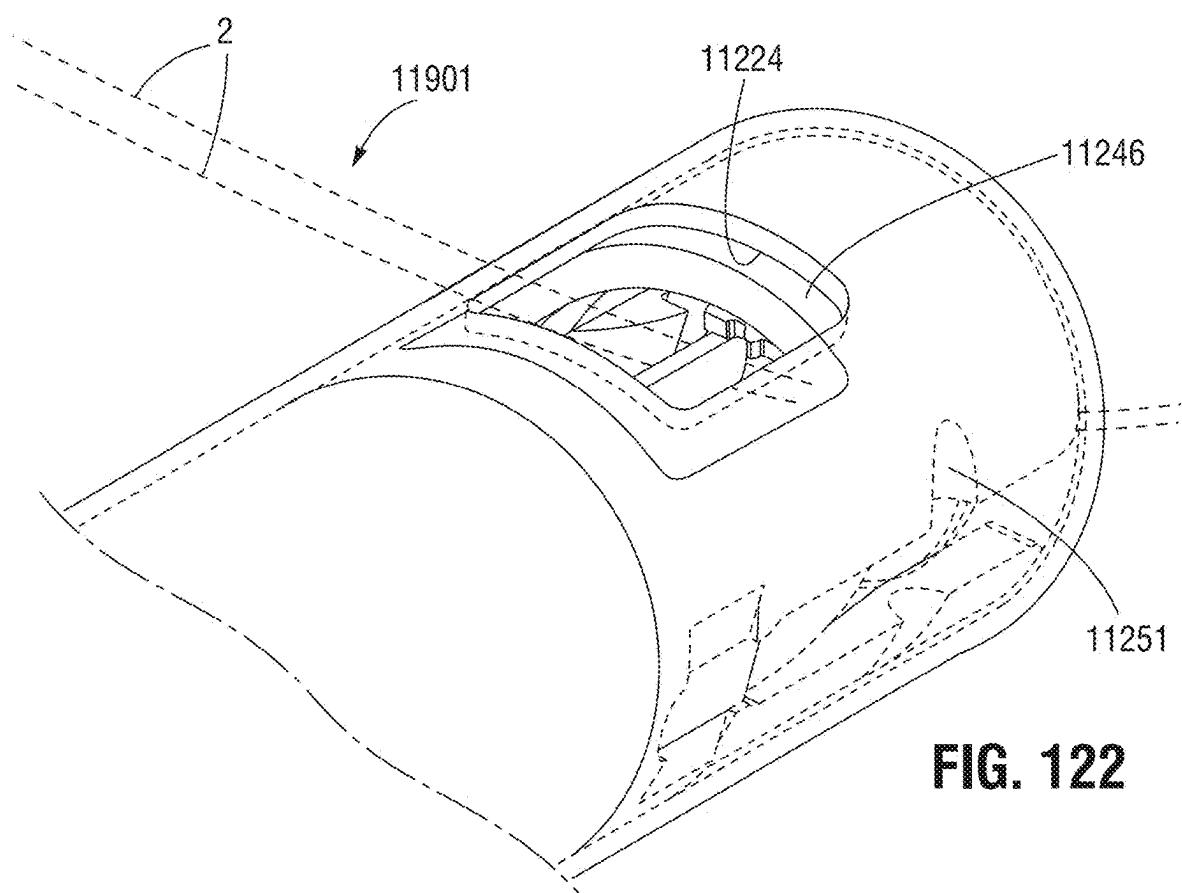
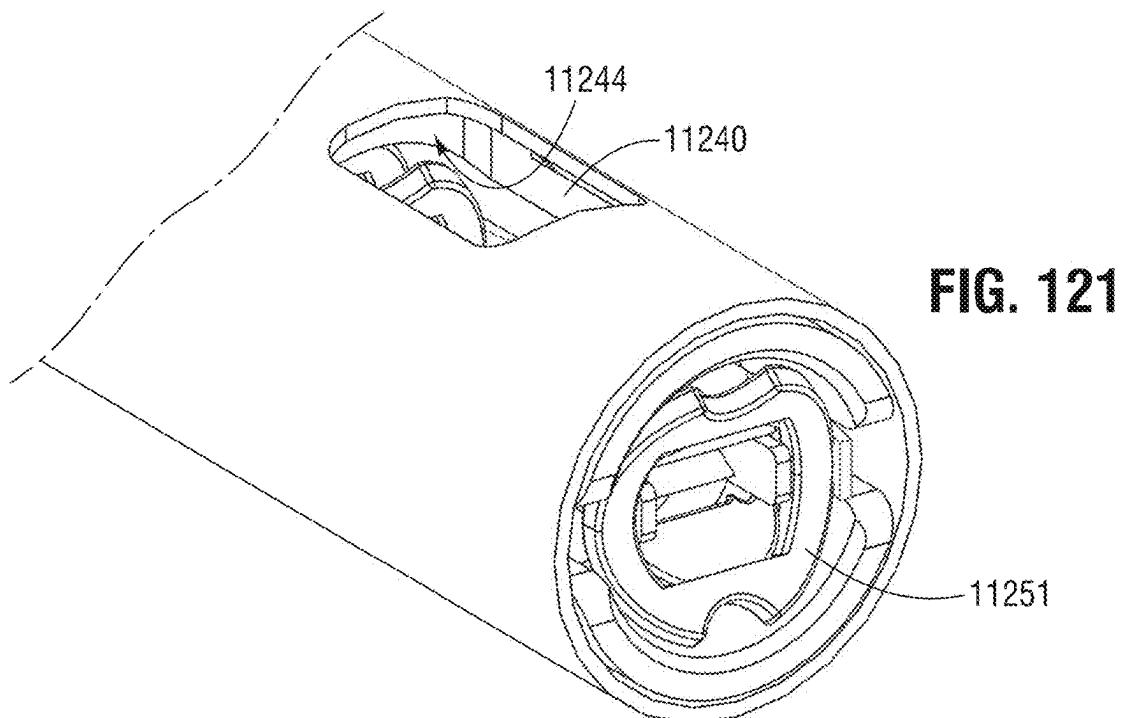




FIG. 111











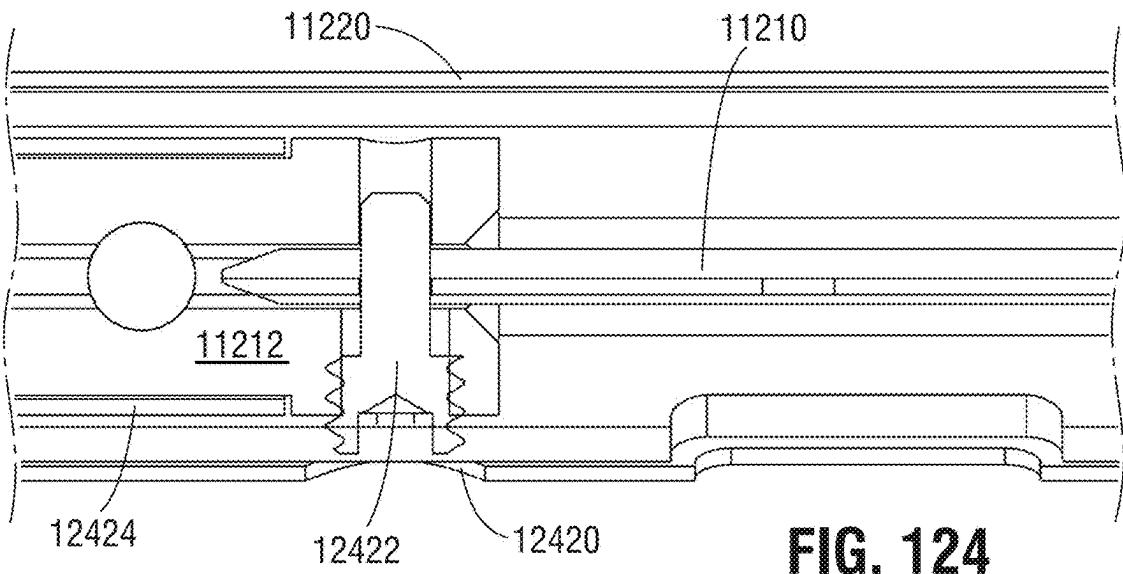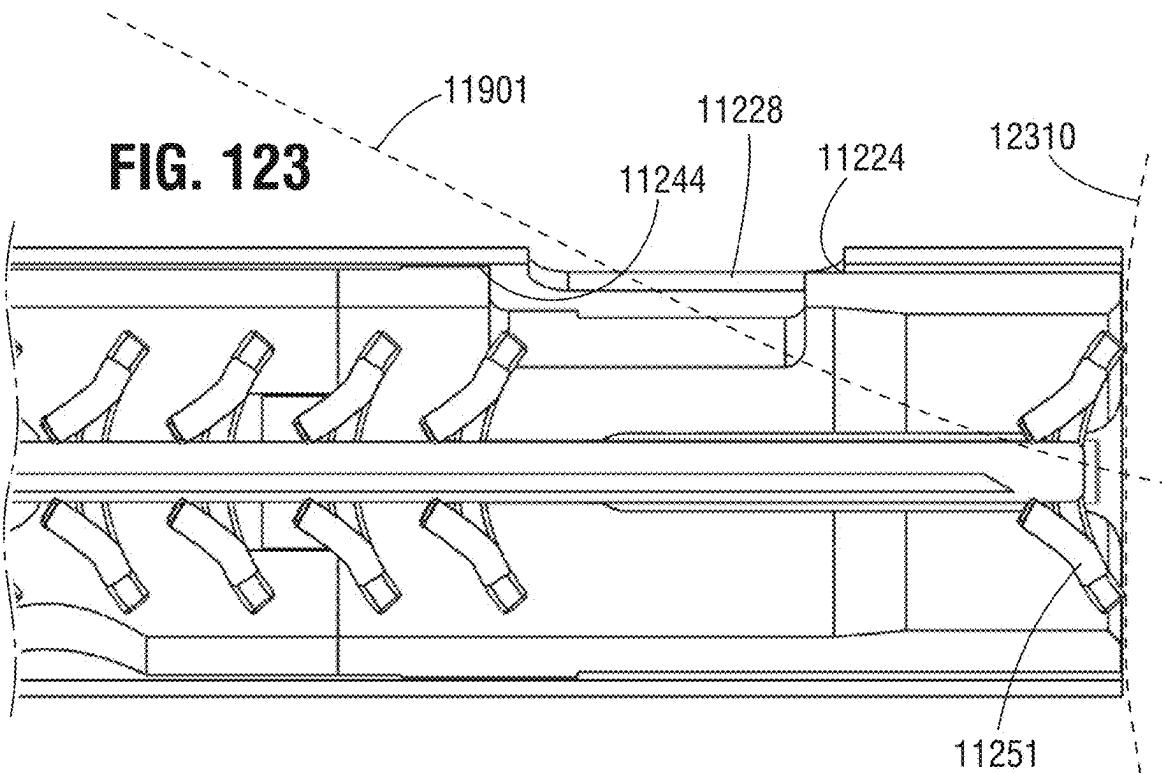

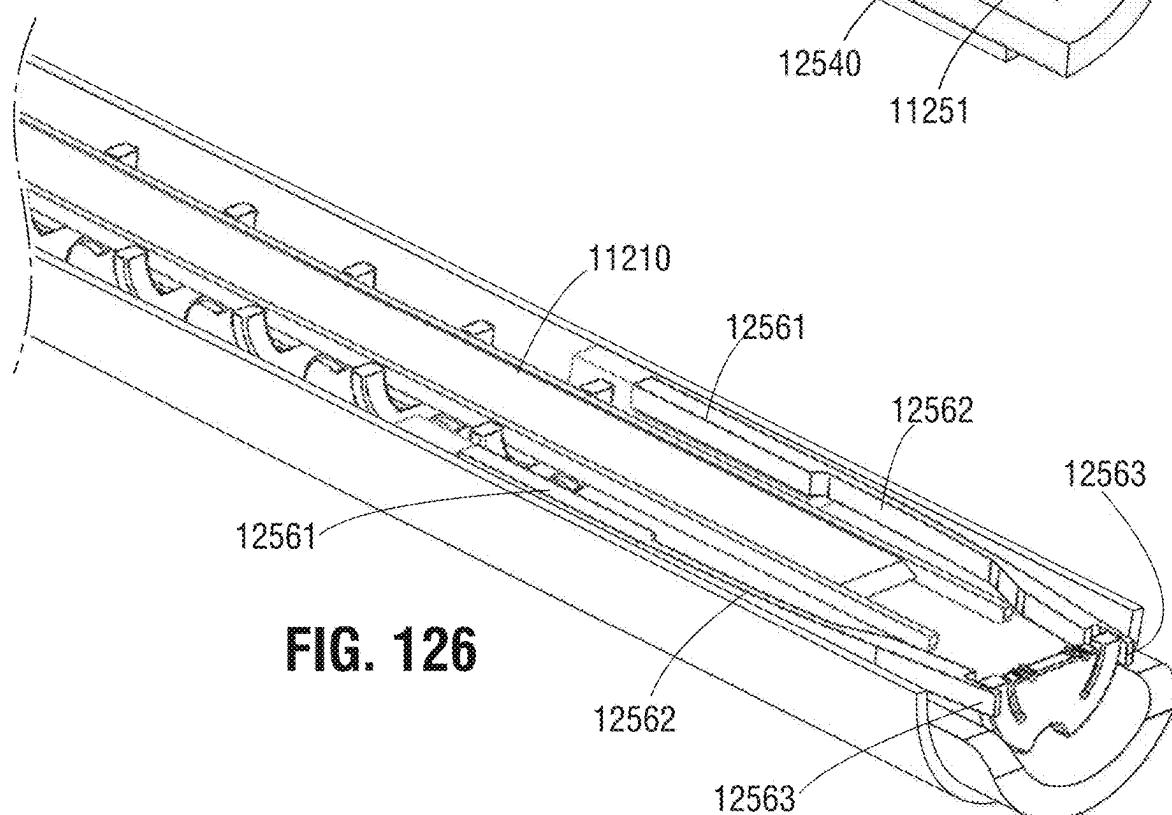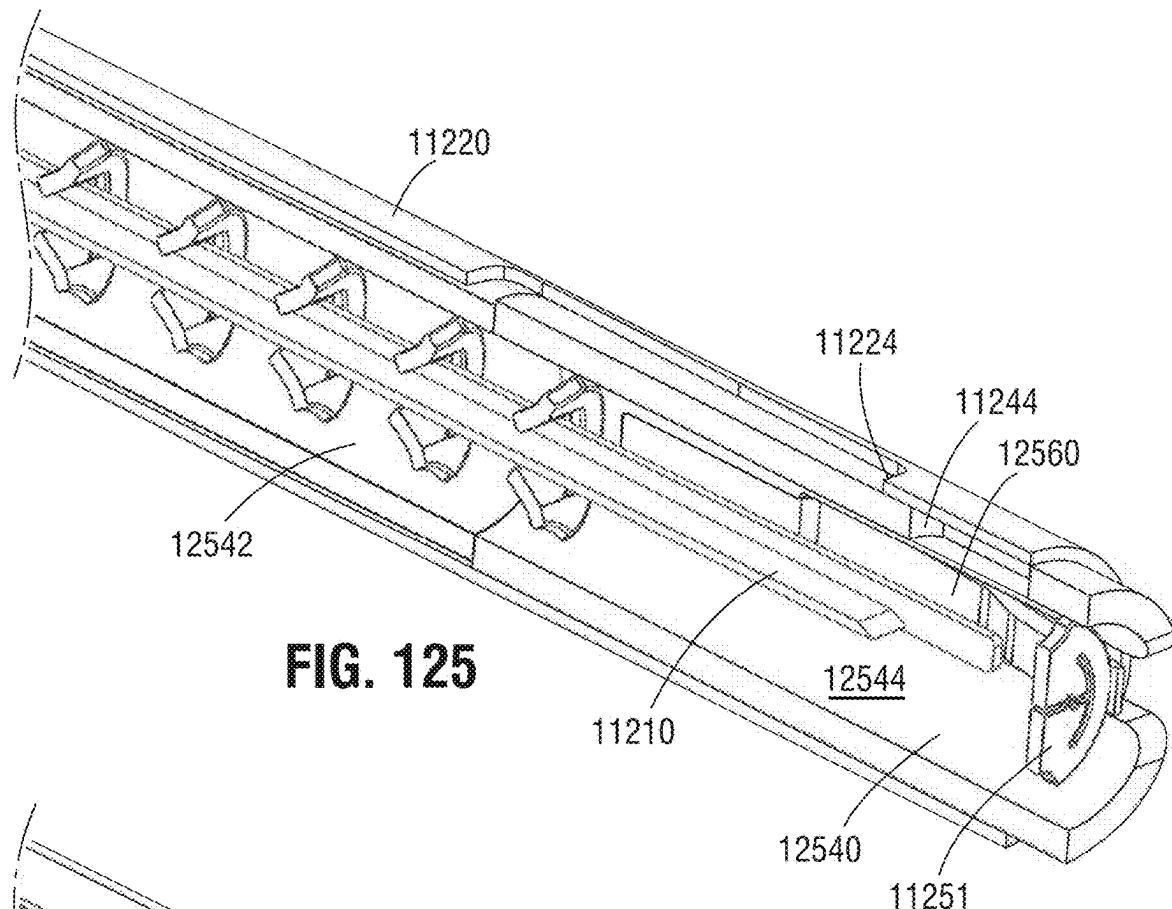

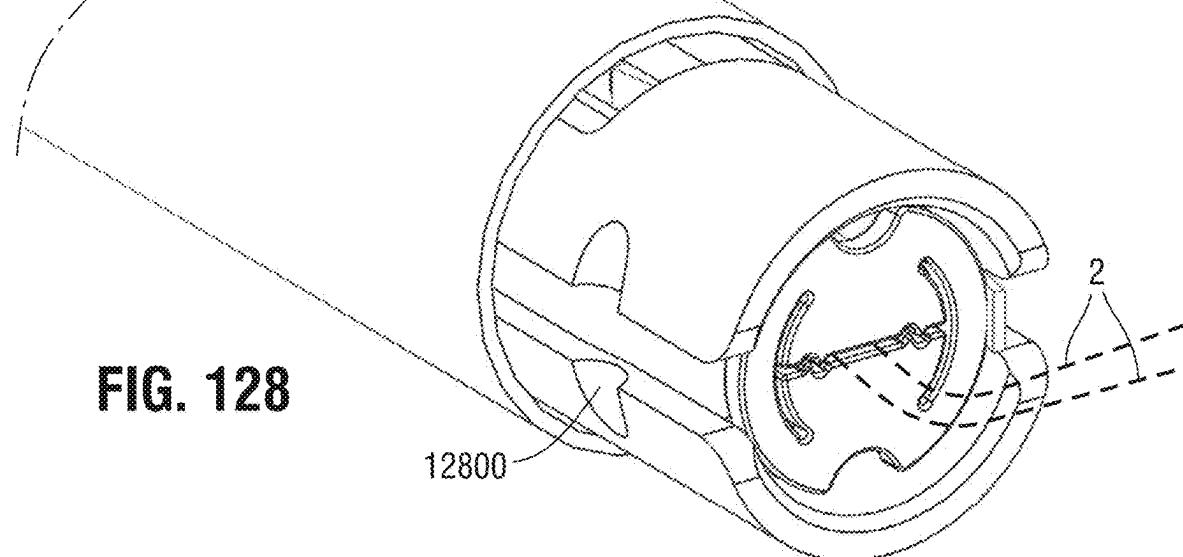
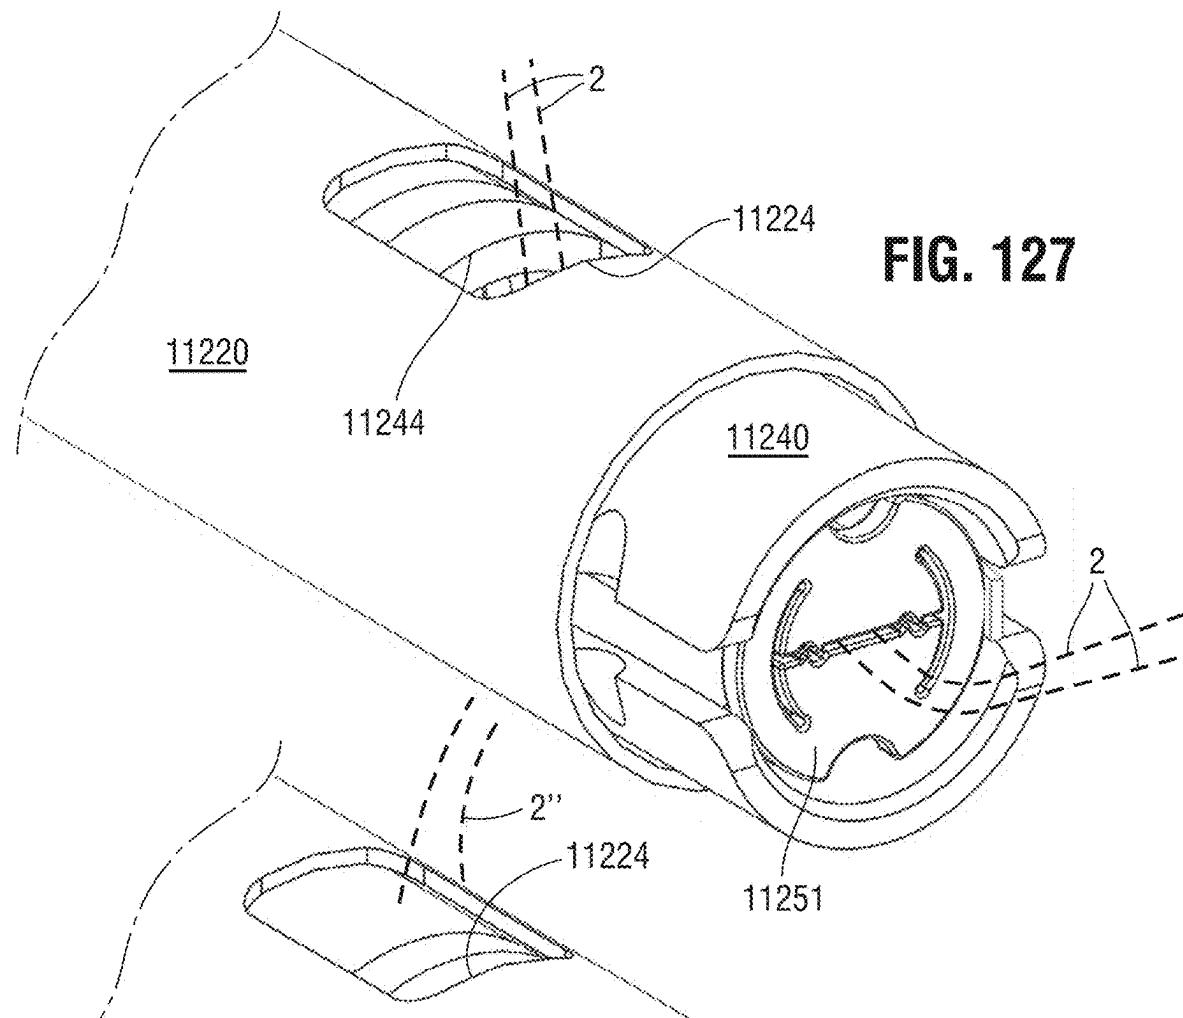


FIG. 129

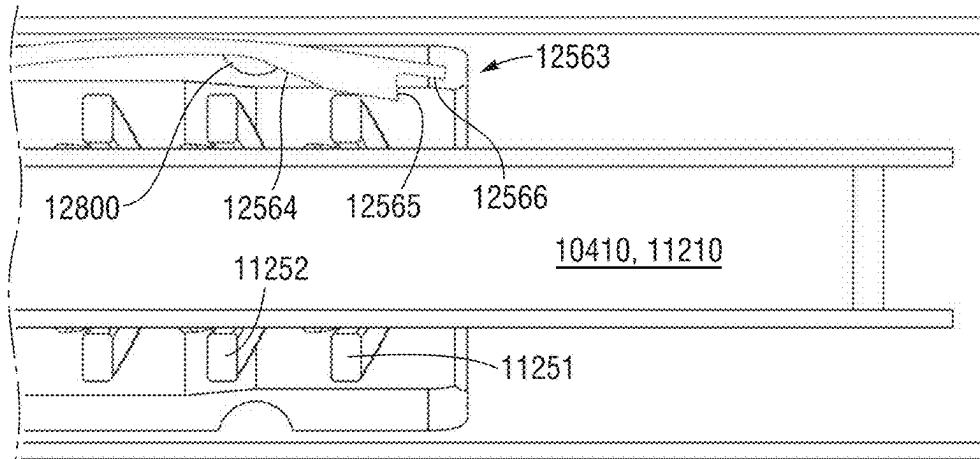


FIG. 130

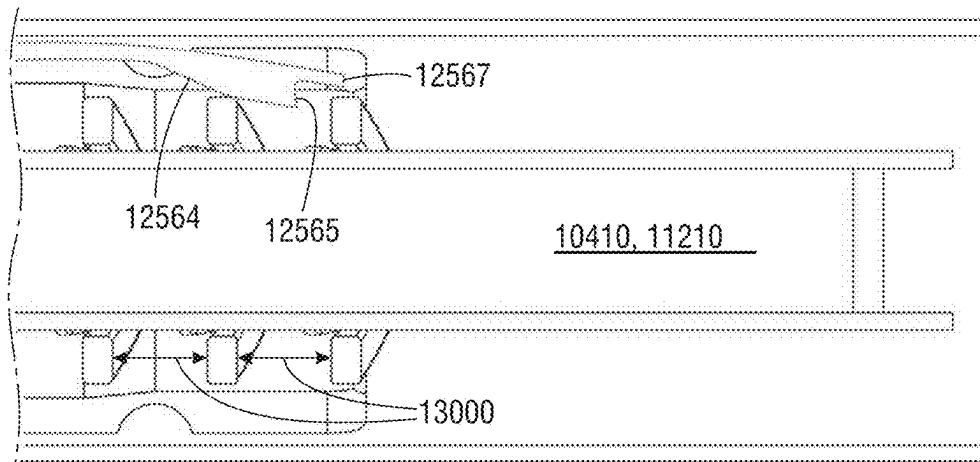


FIG. 131

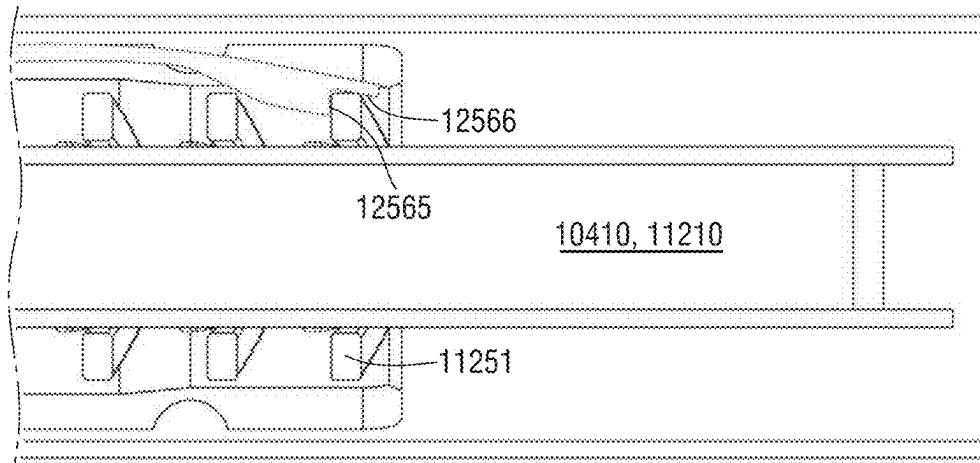


FIG. 132

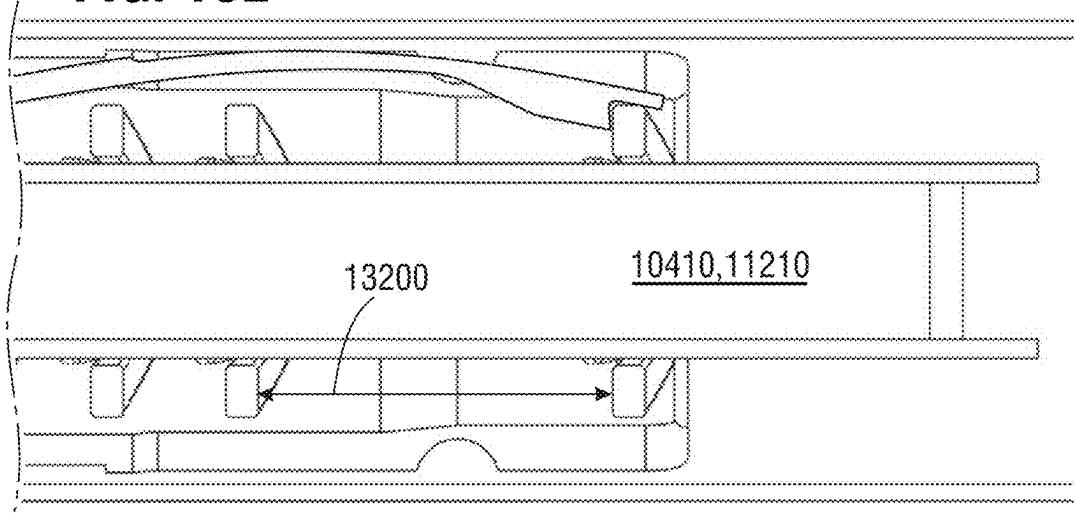


FIG. 133

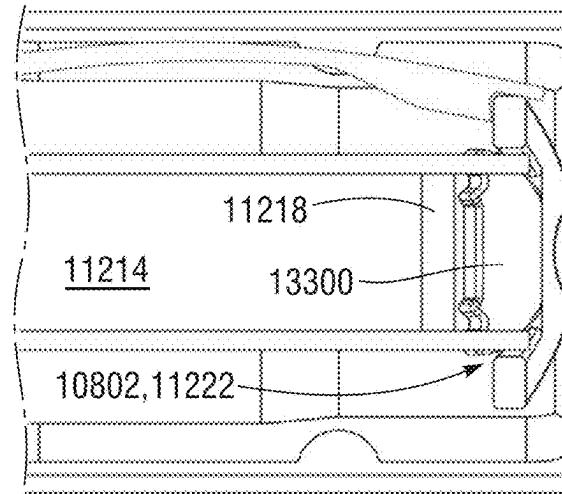


FIG. 135

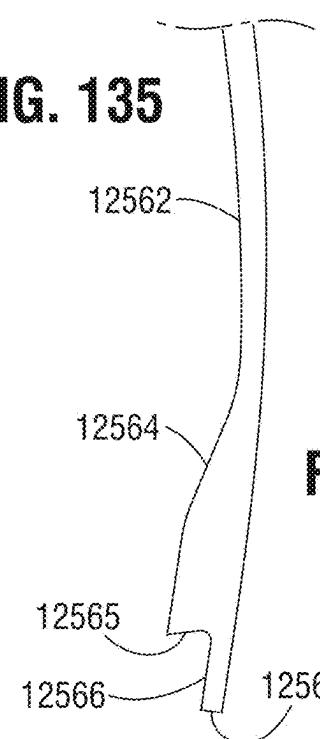
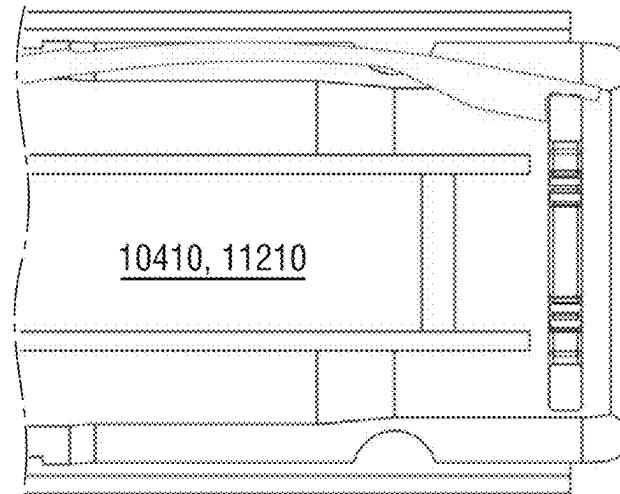
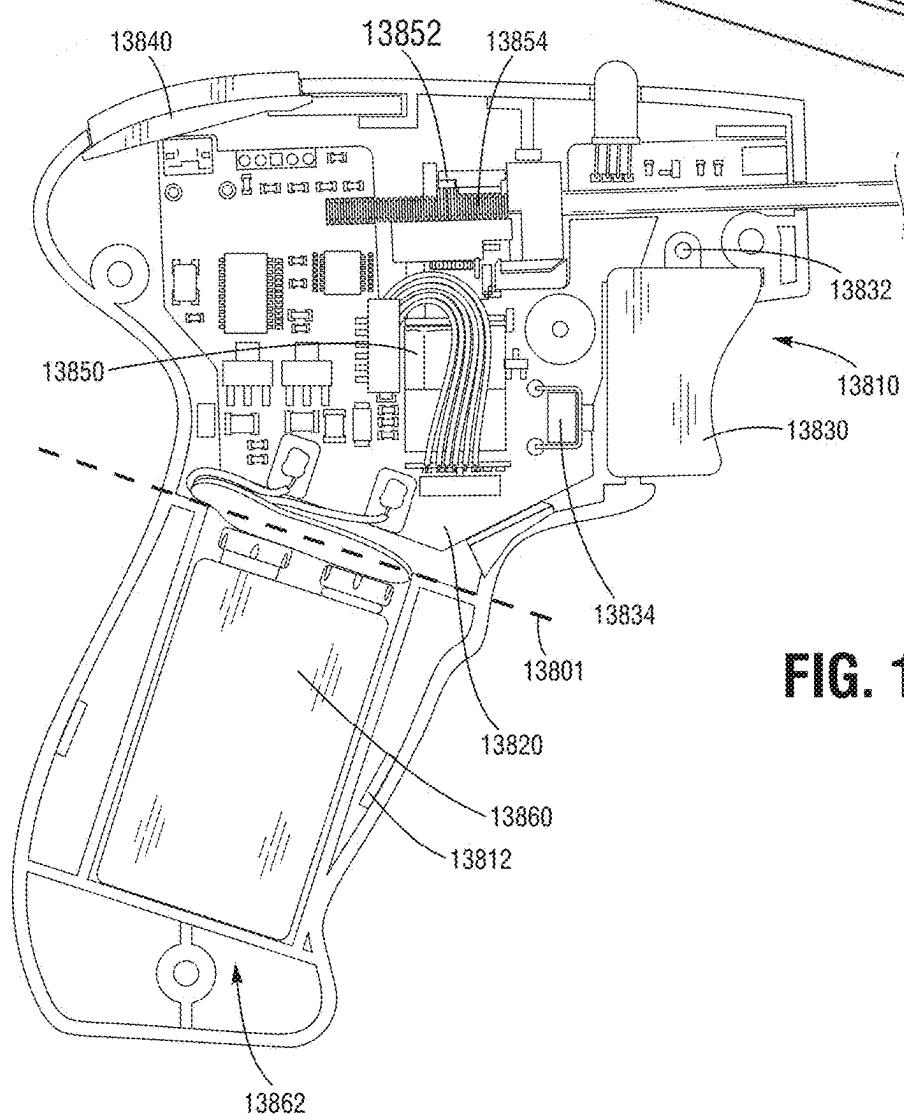
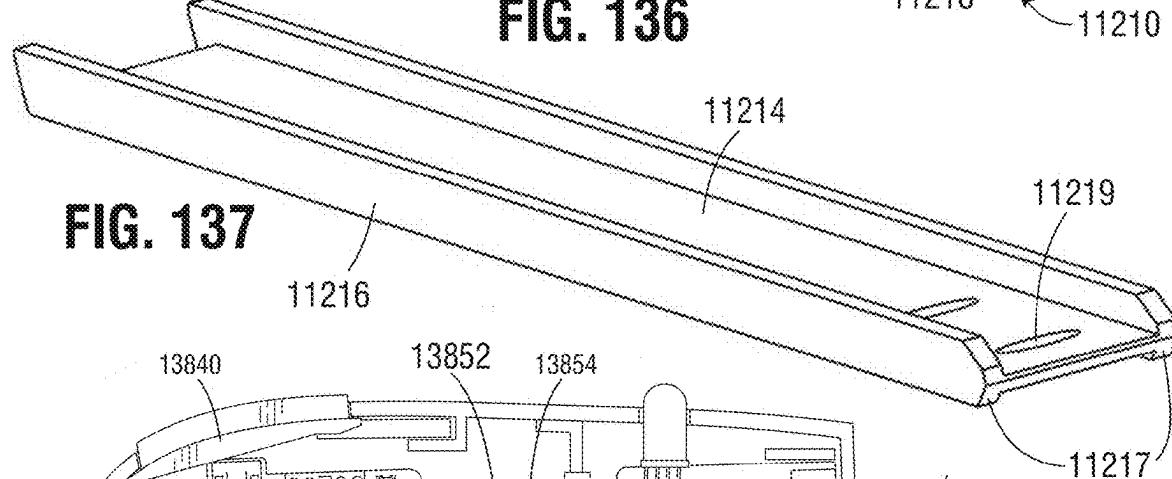
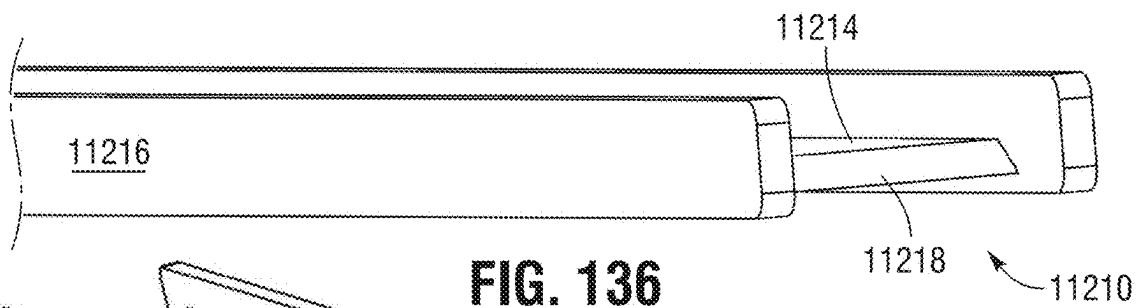
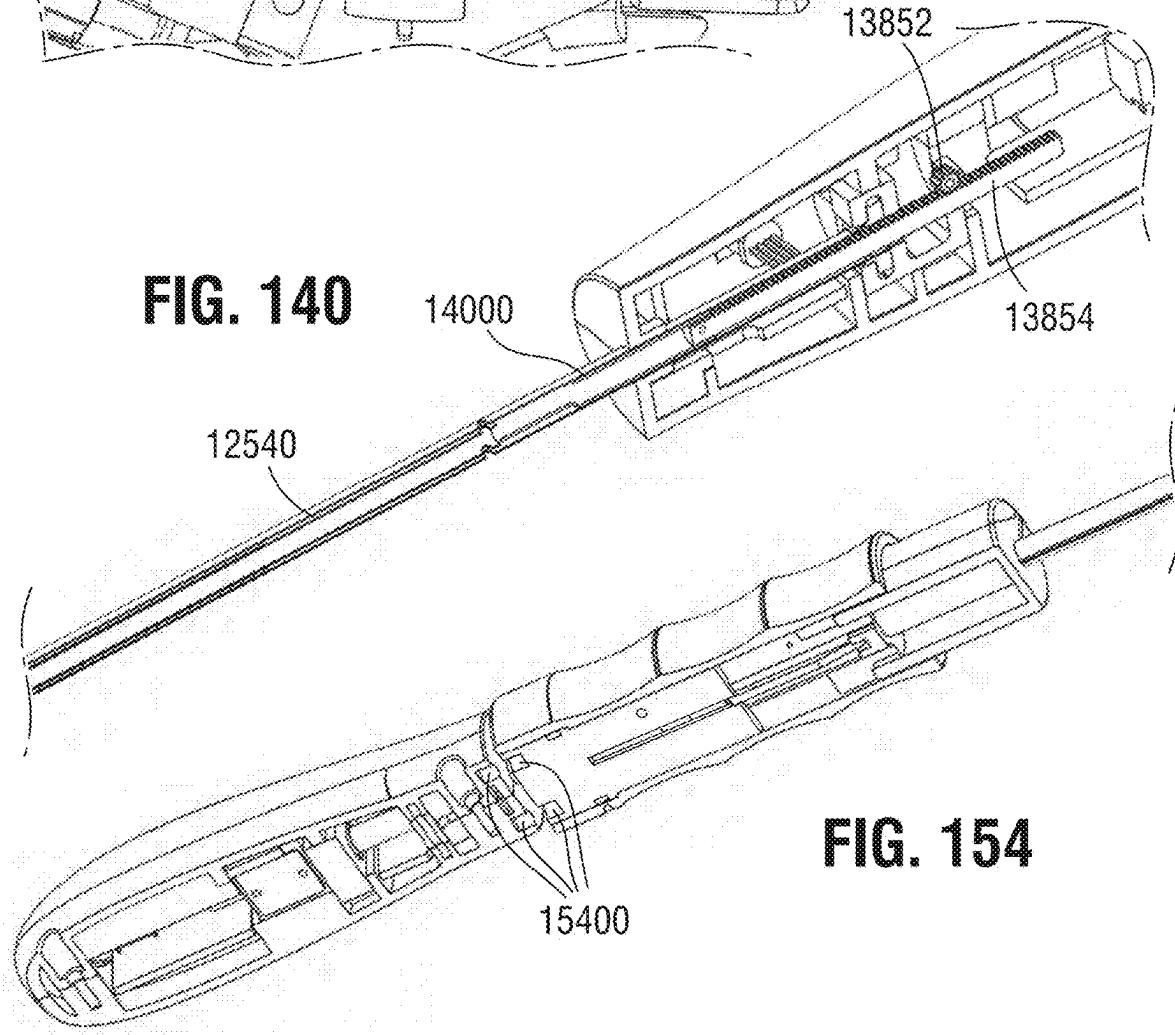
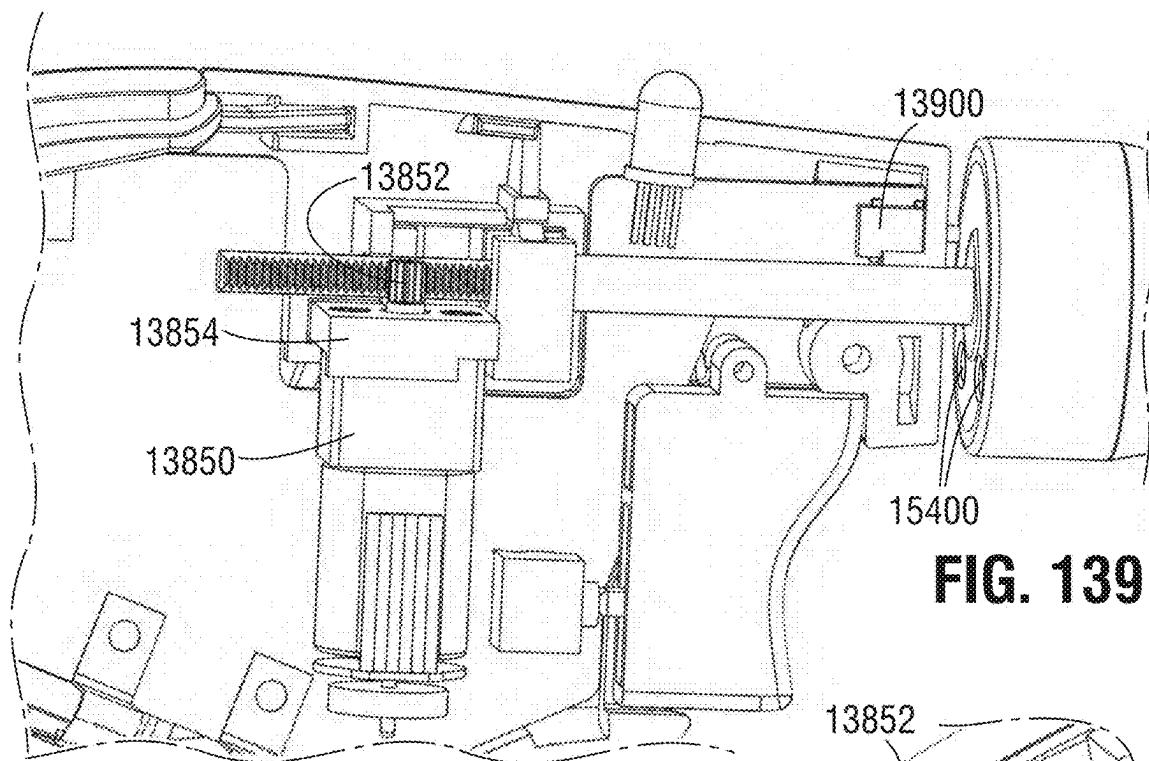


FIG. 134







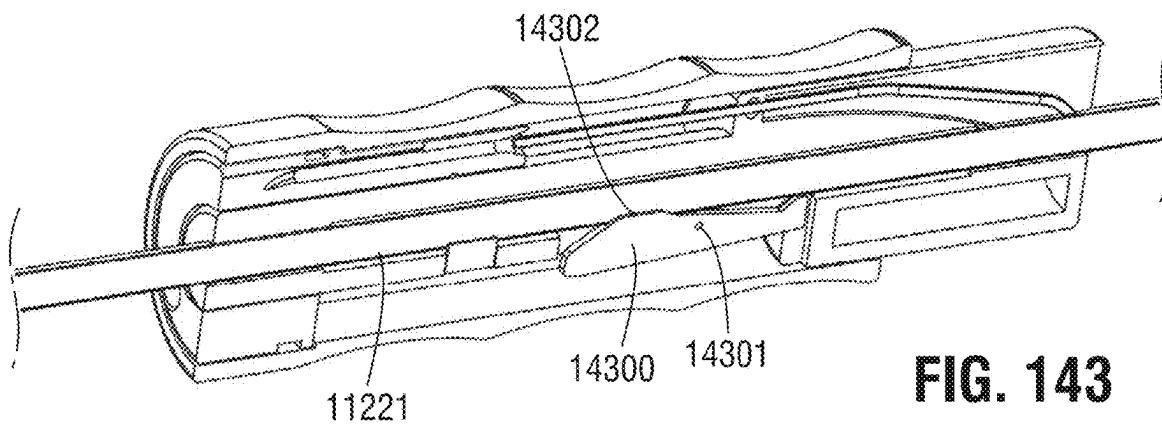
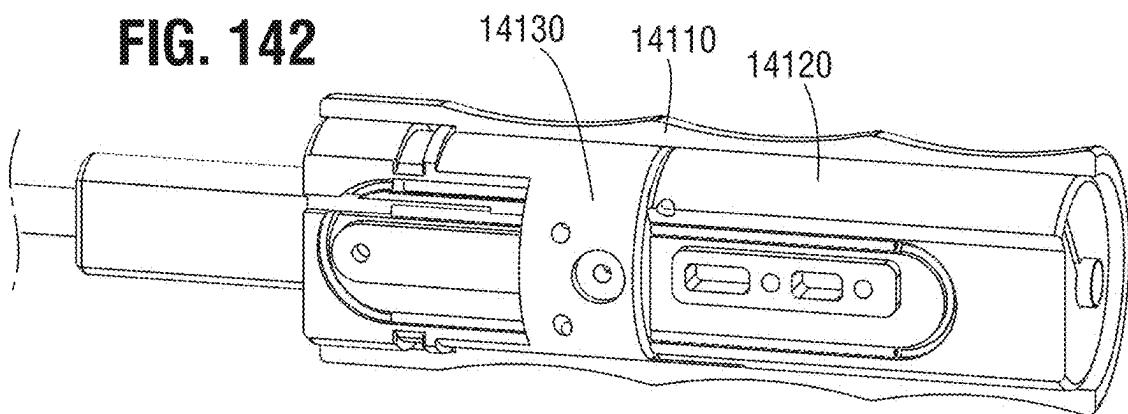
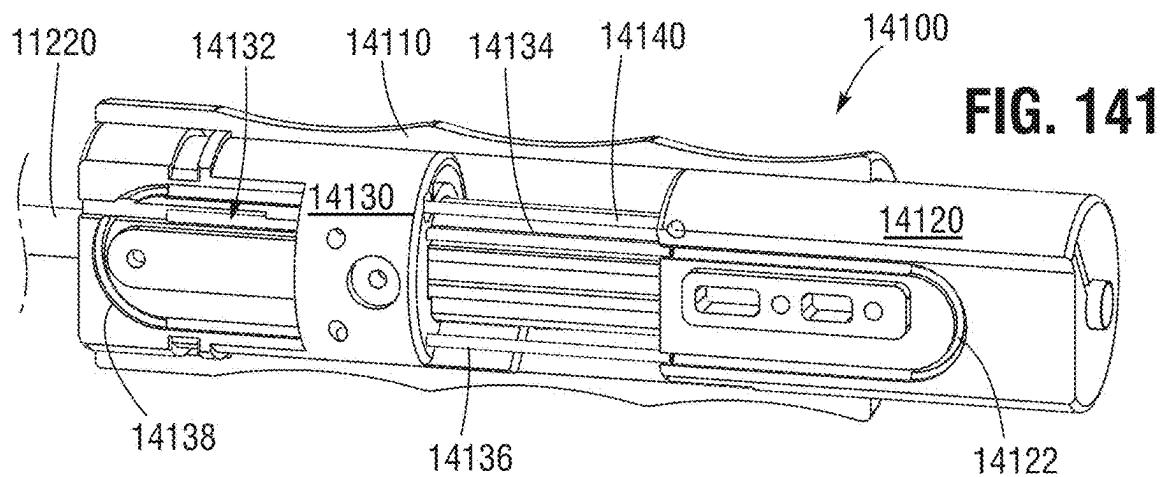


FIG. 144

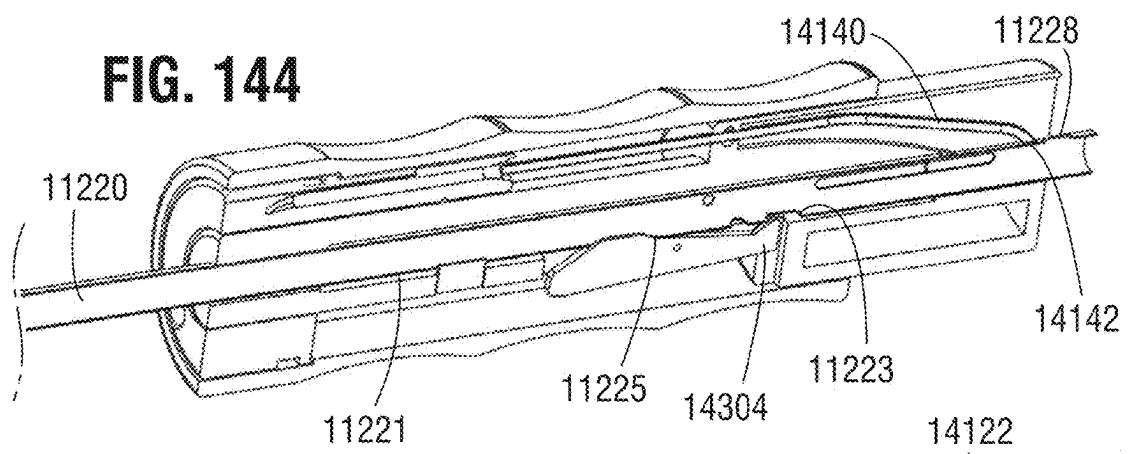


FIG. 145

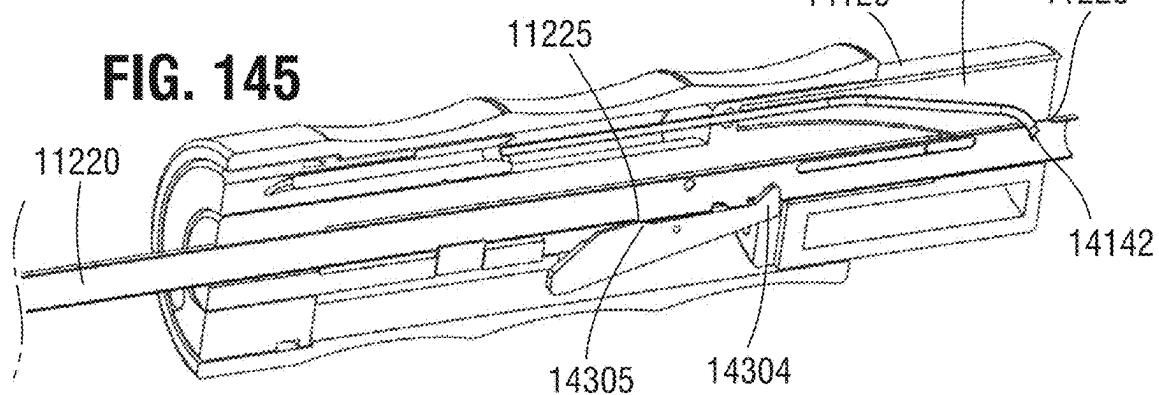
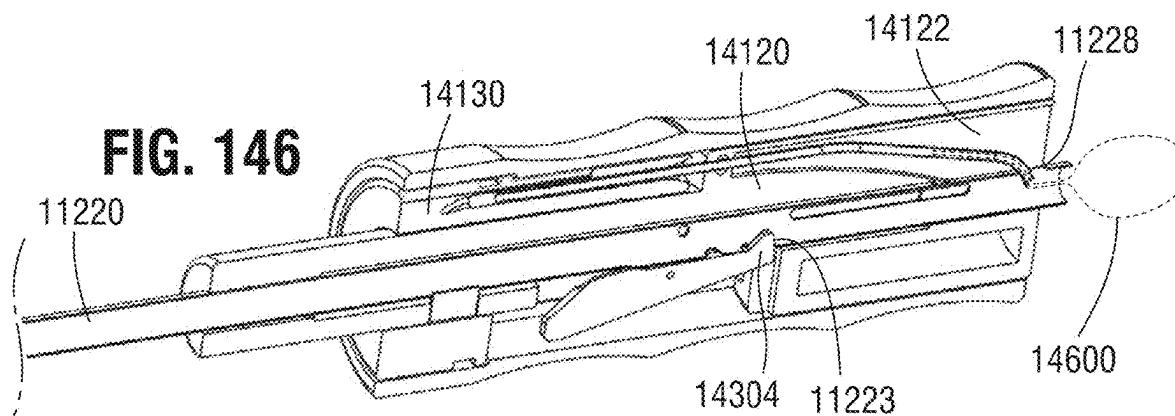
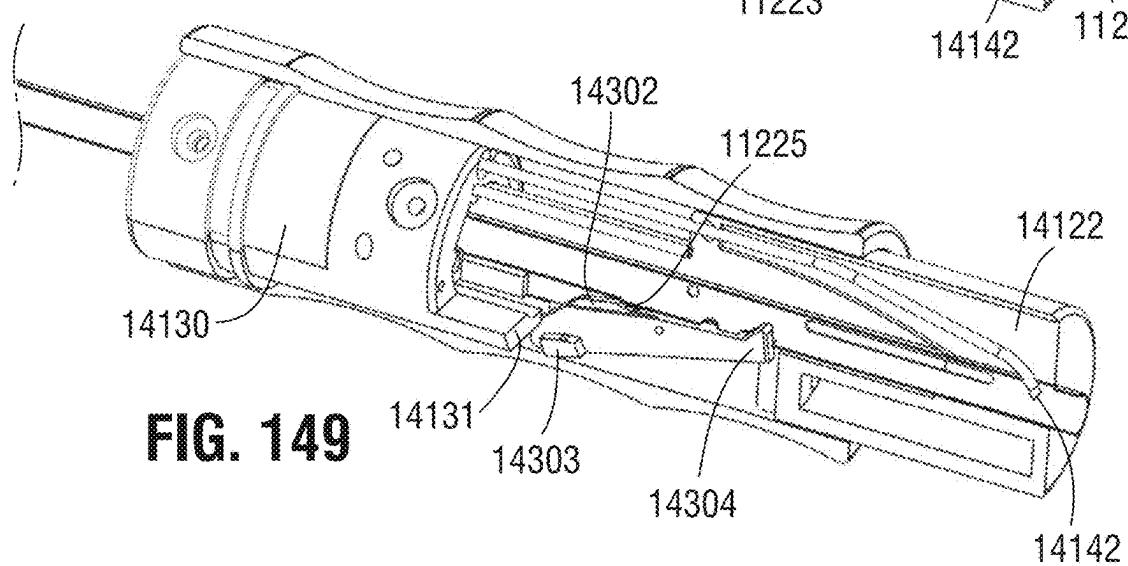
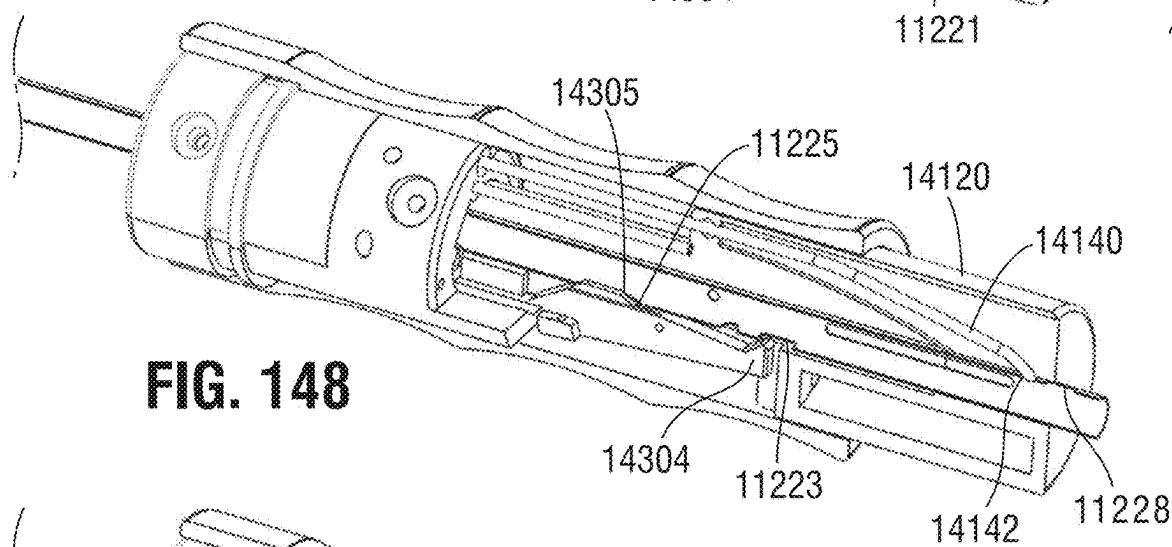
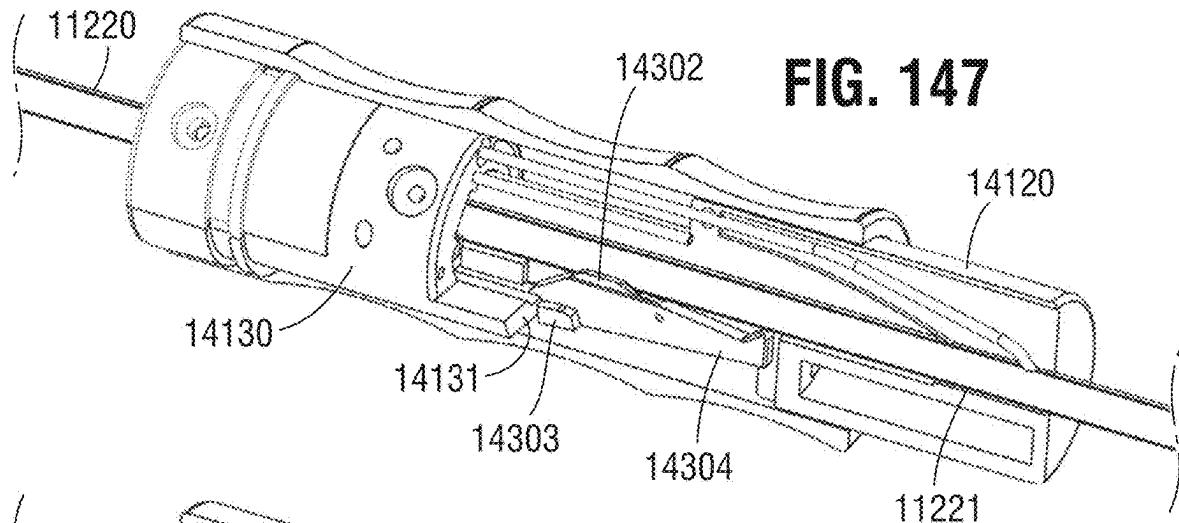


FIG. 146





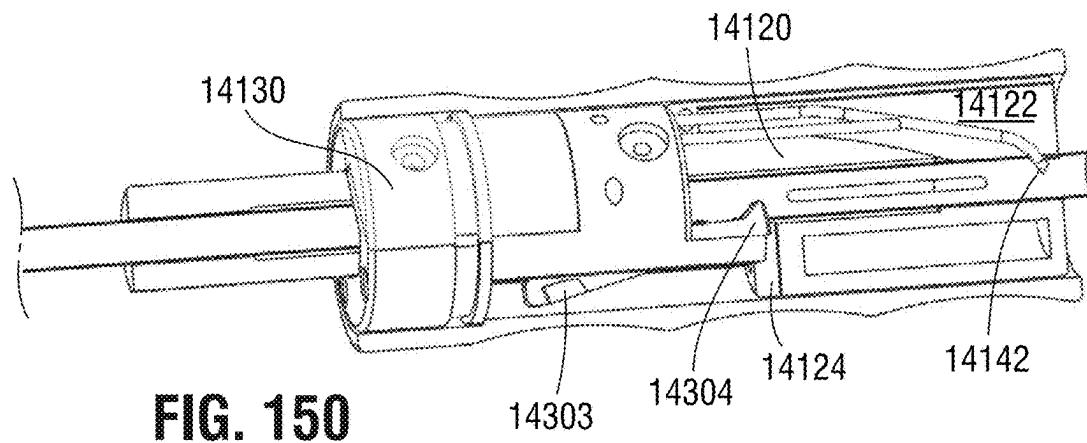


FIG. 150

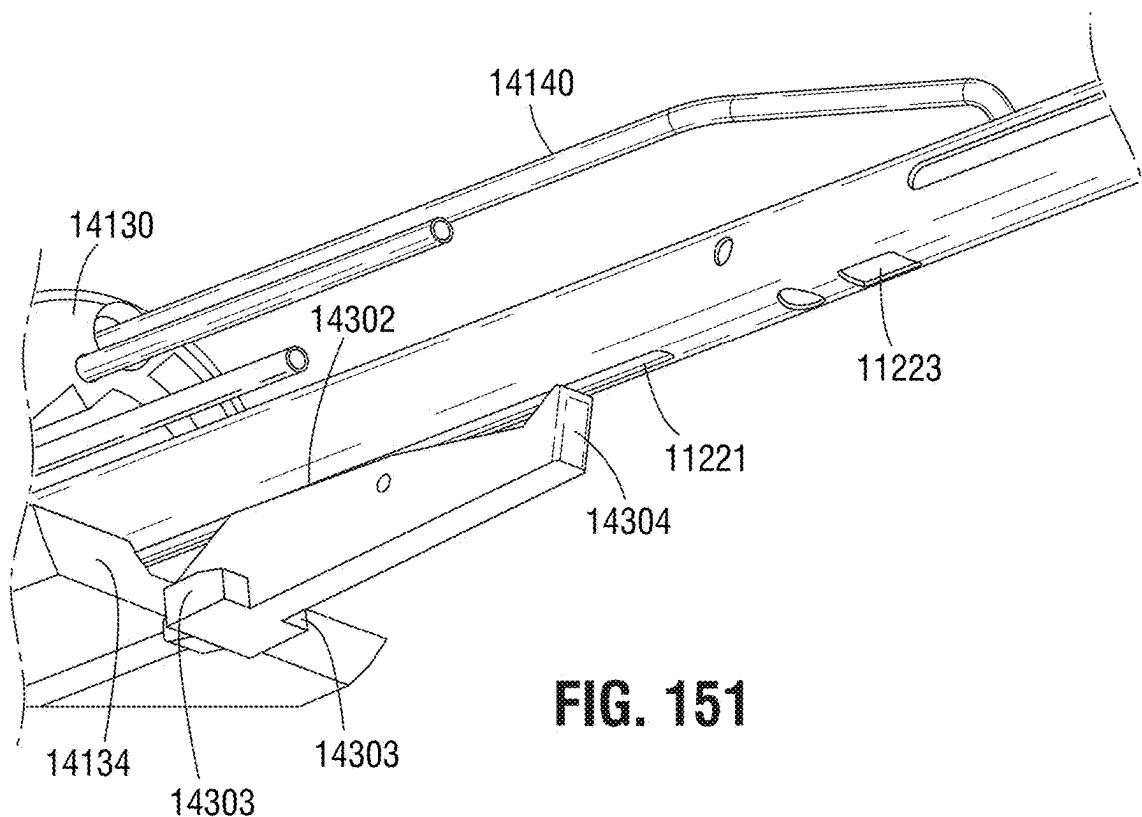
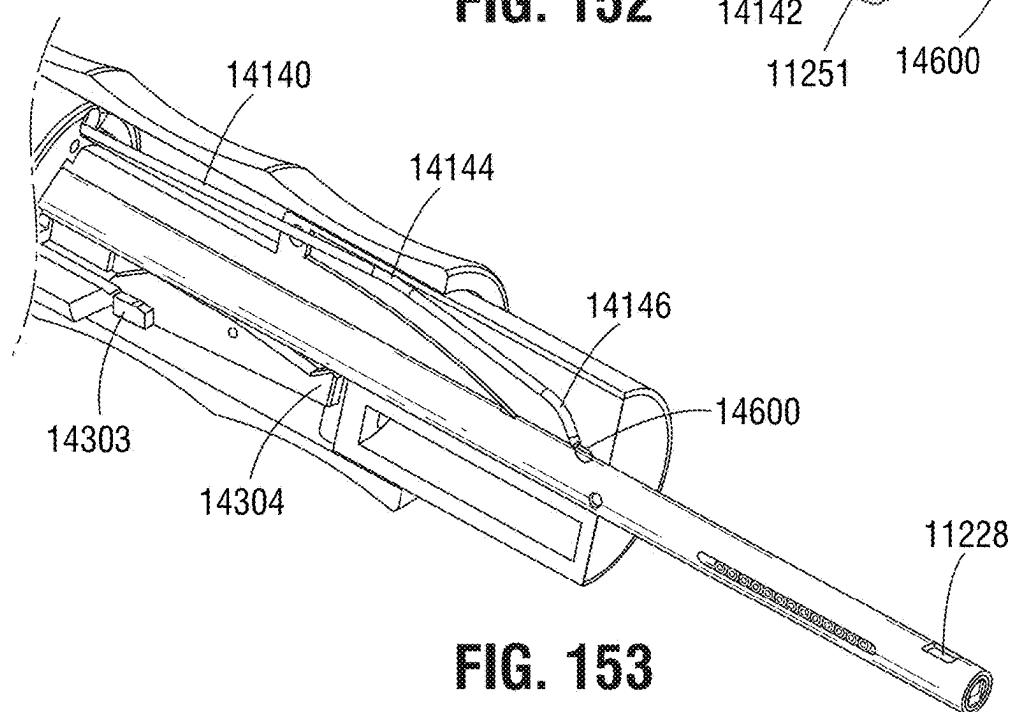
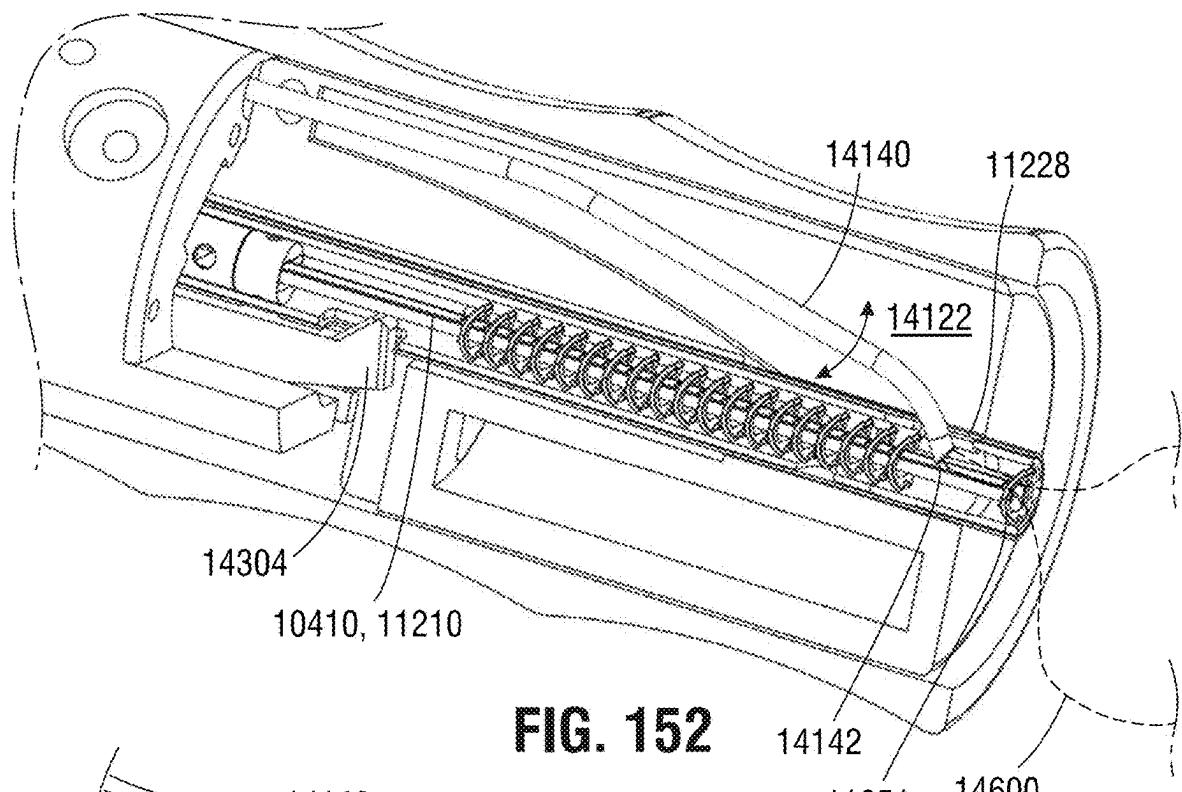
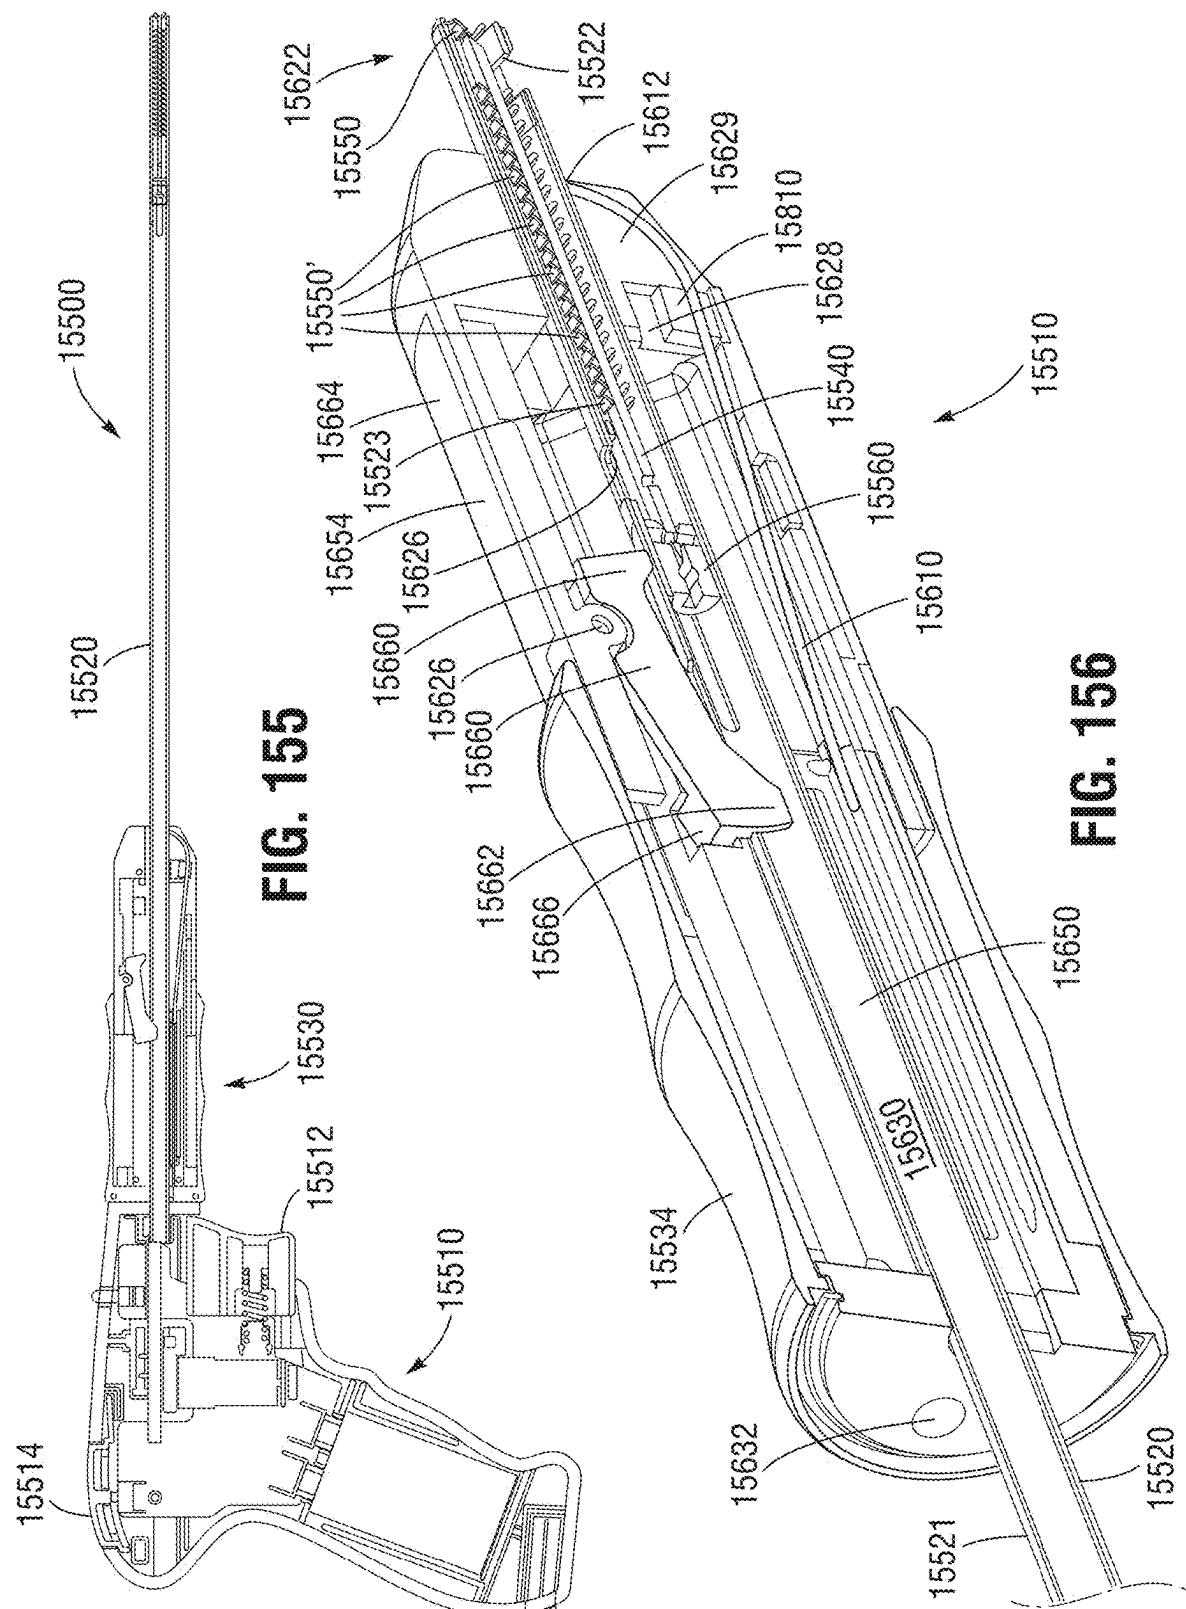
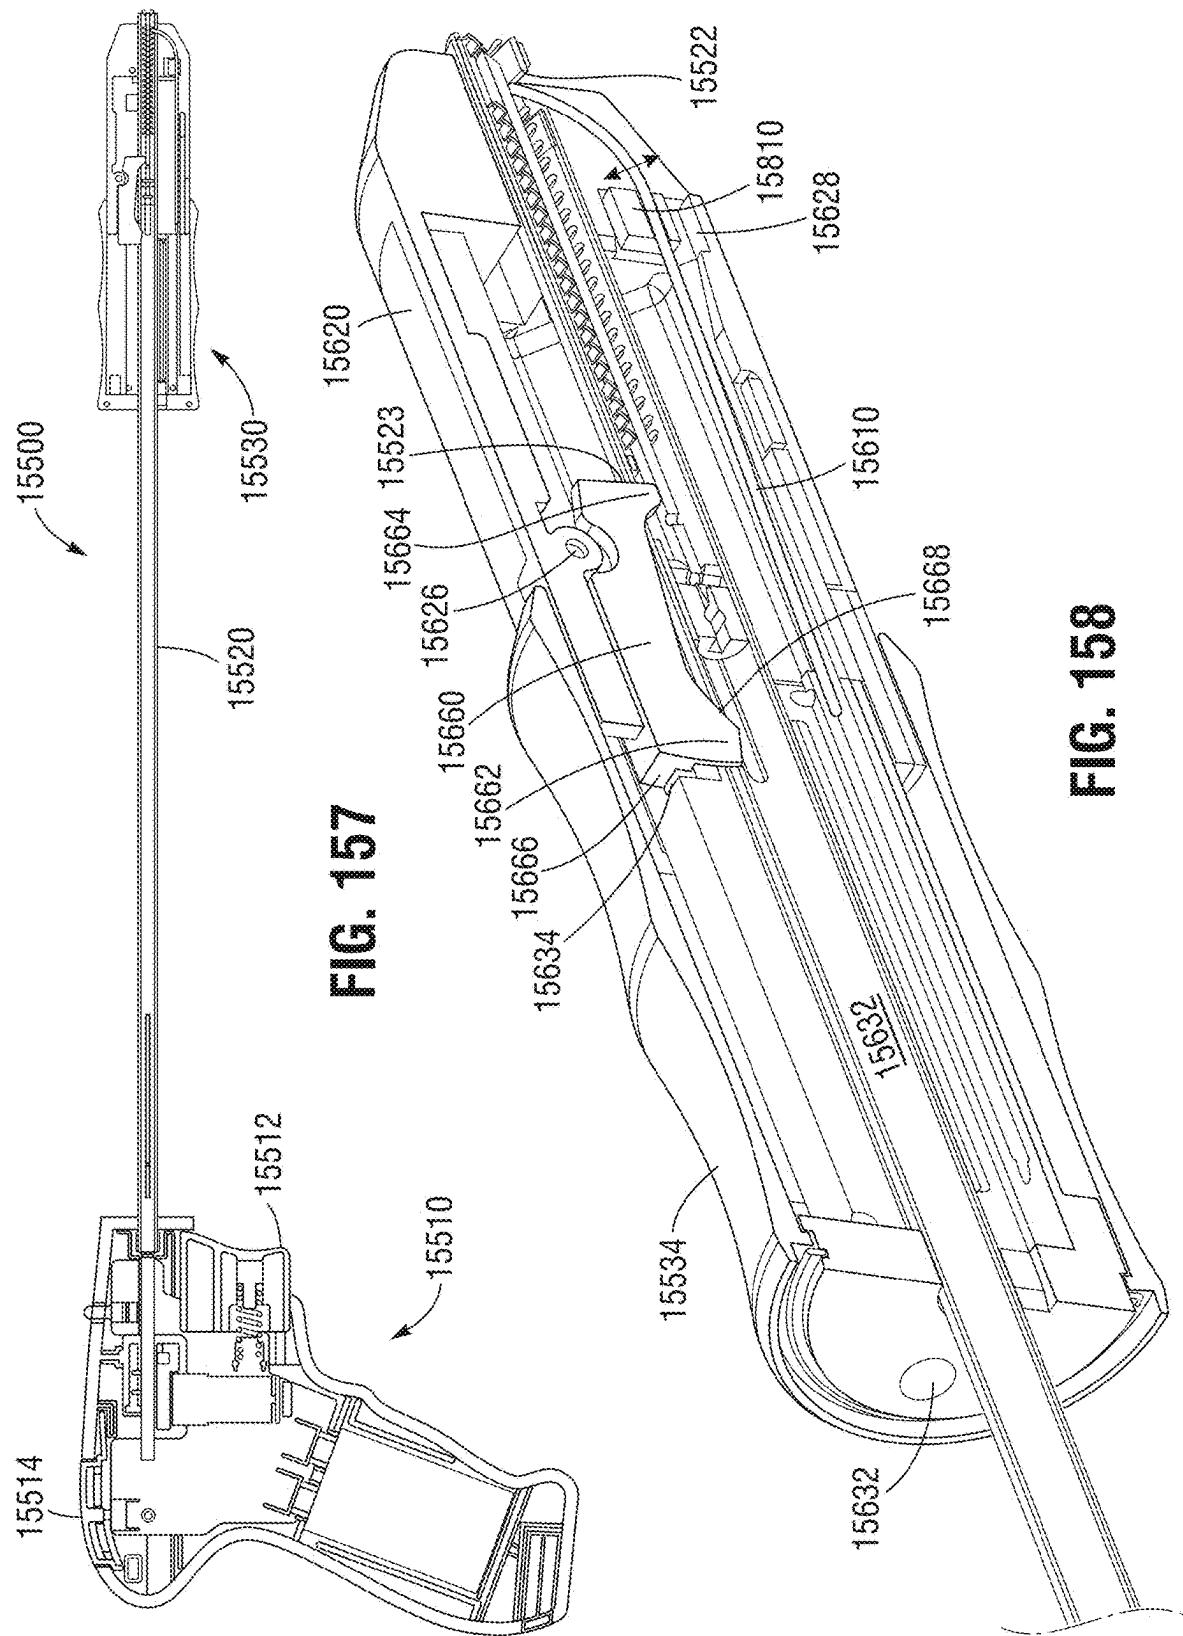
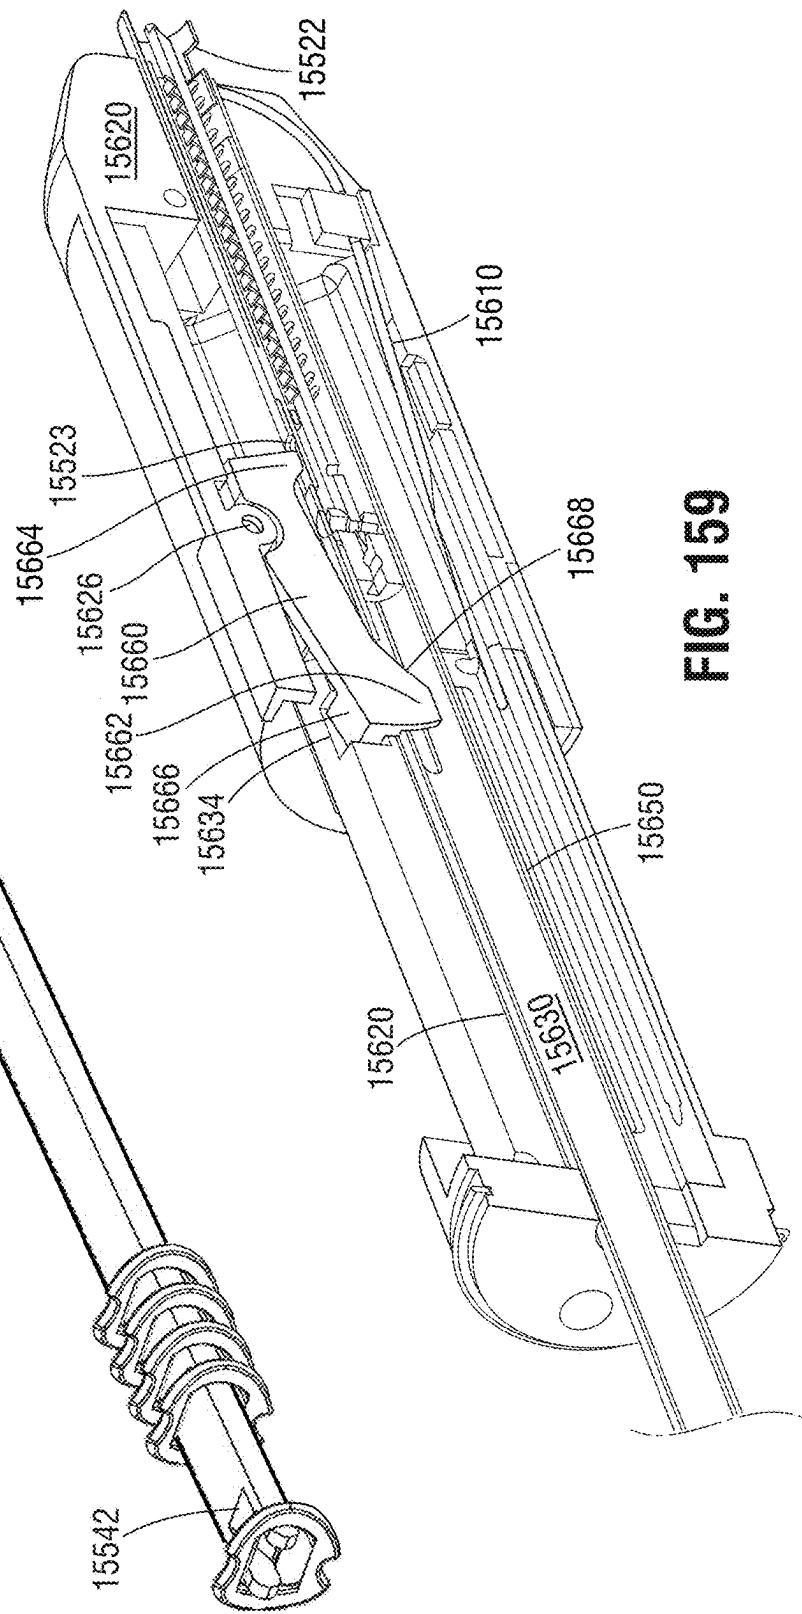
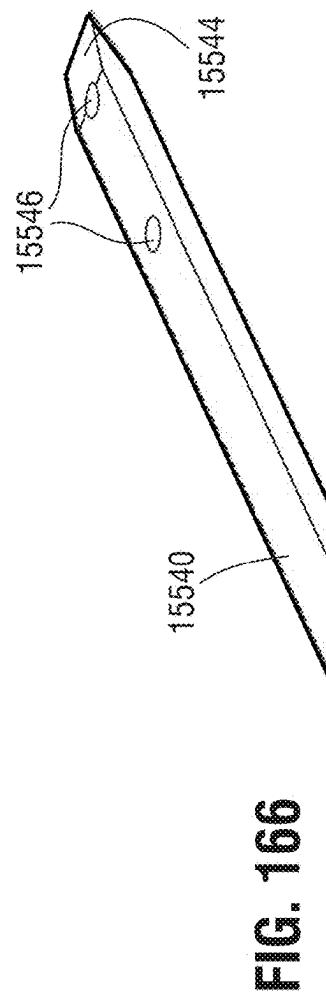



FIG. 151









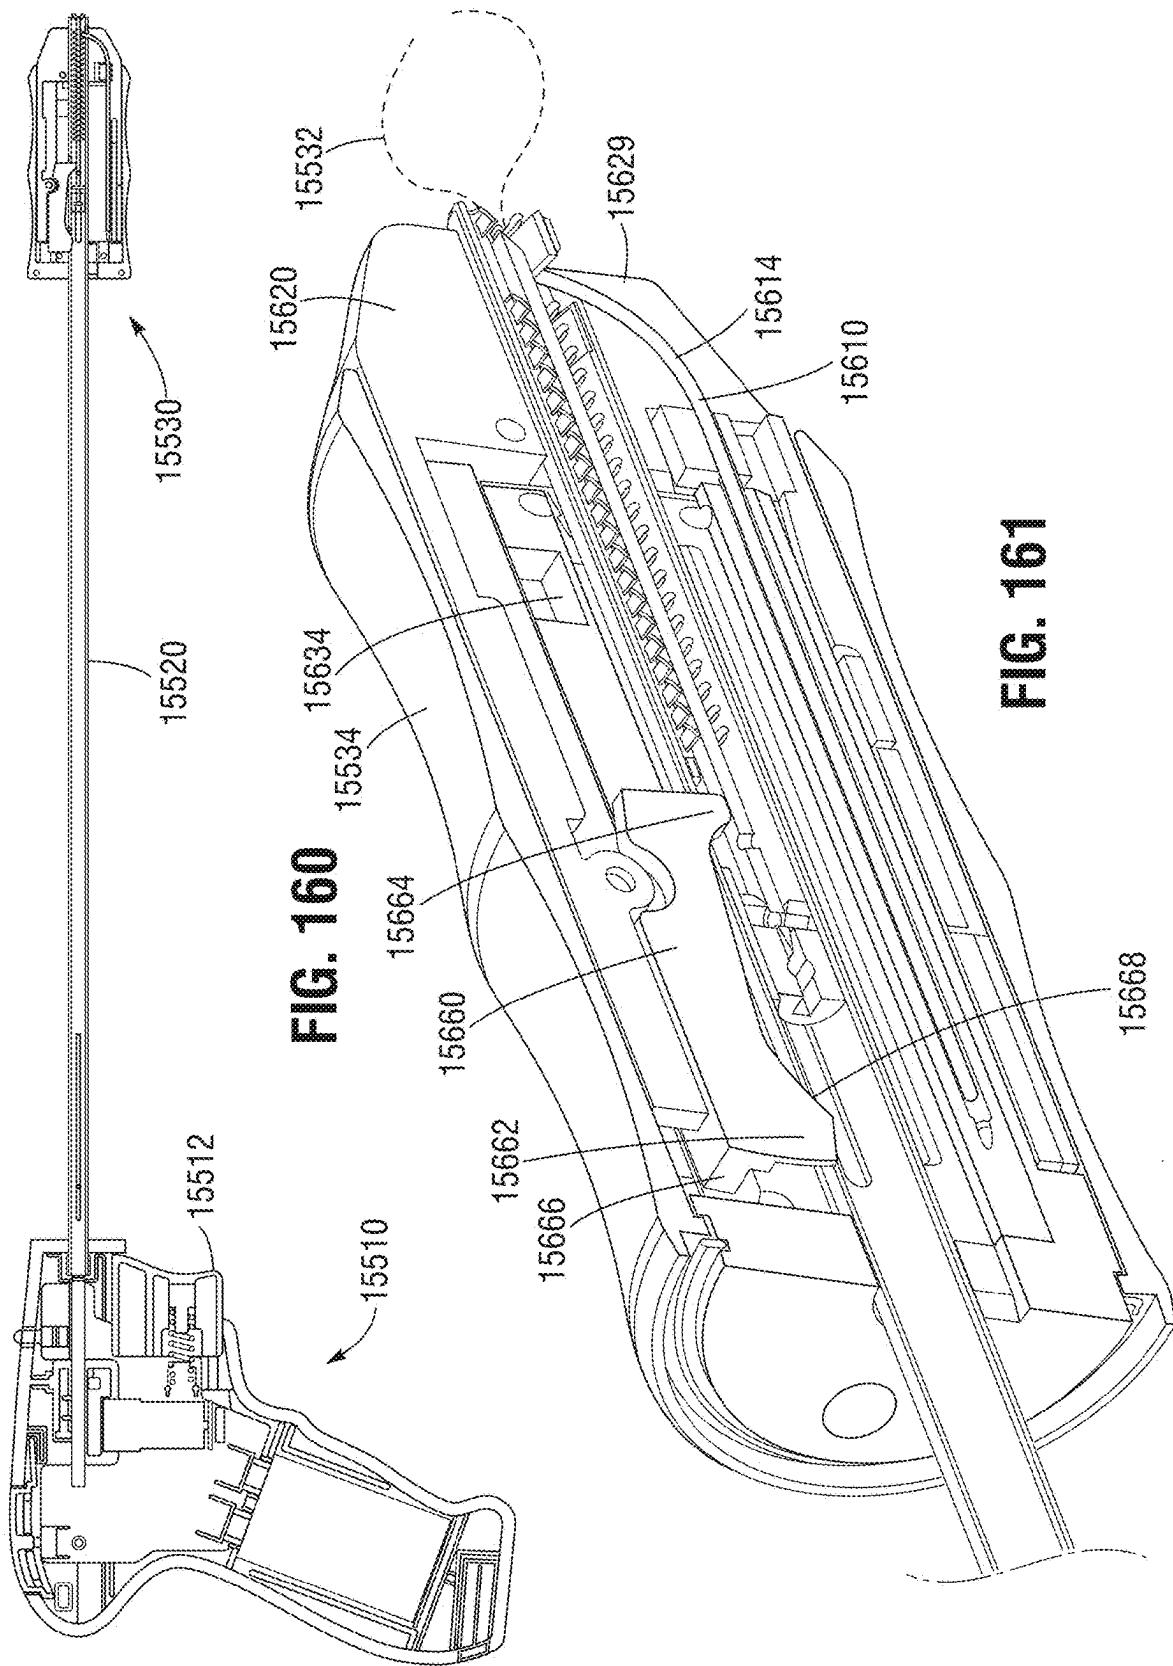

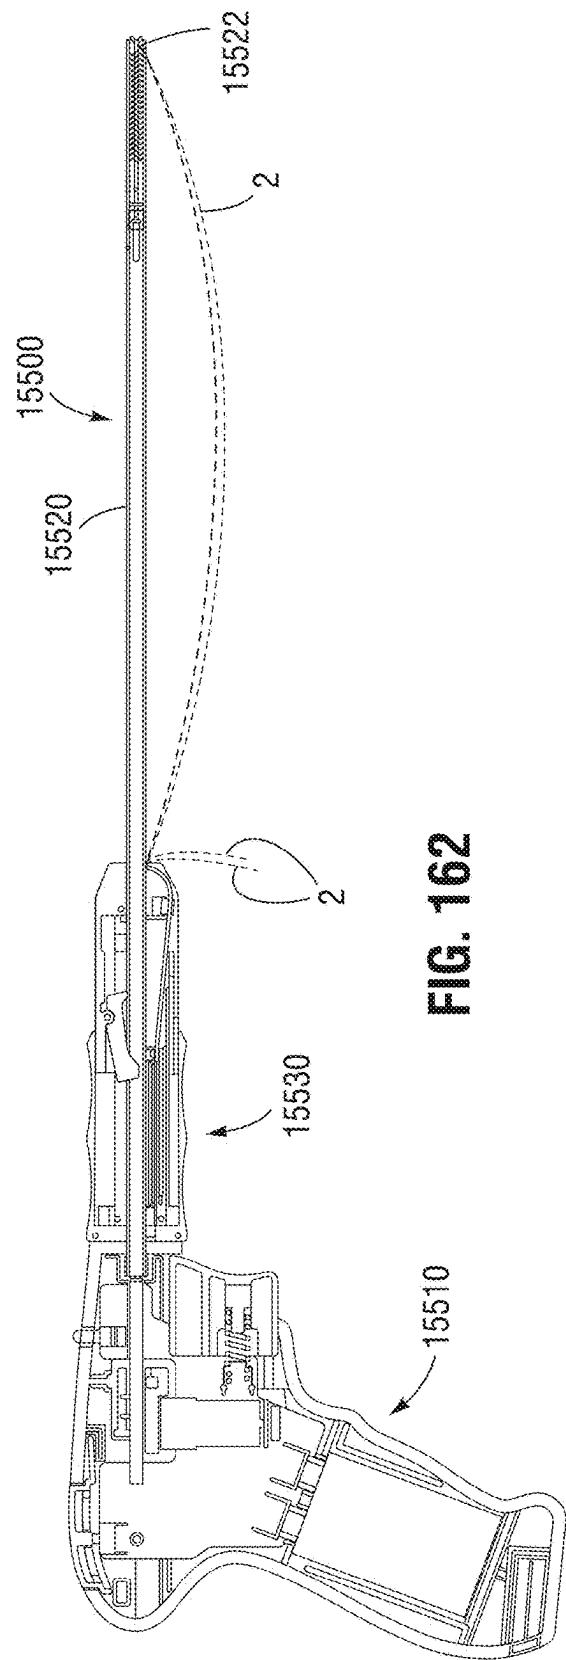


FIG. 162

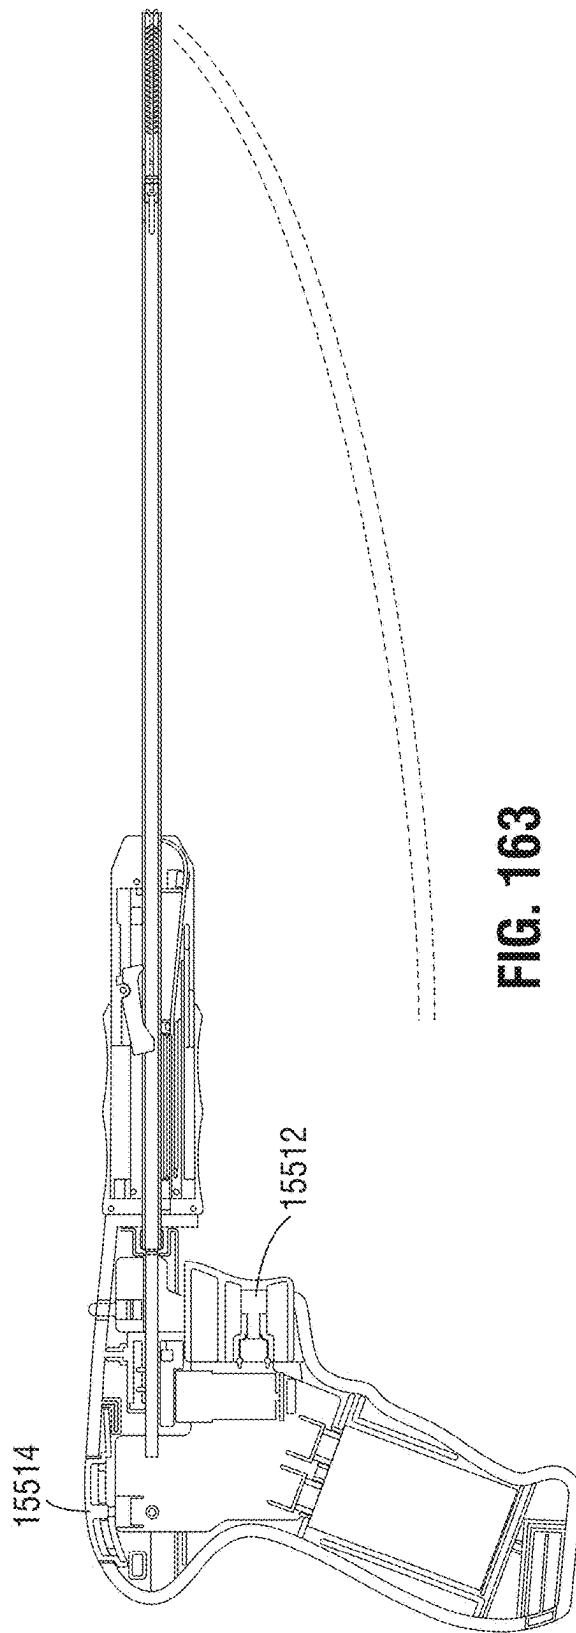


FIG. 163

FIG. 164

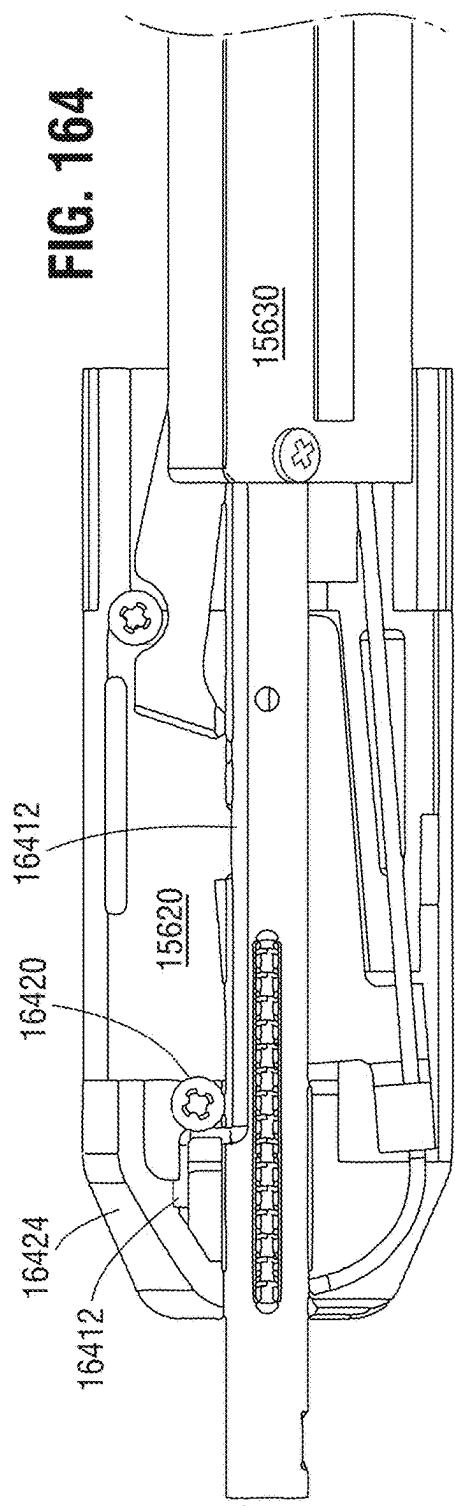
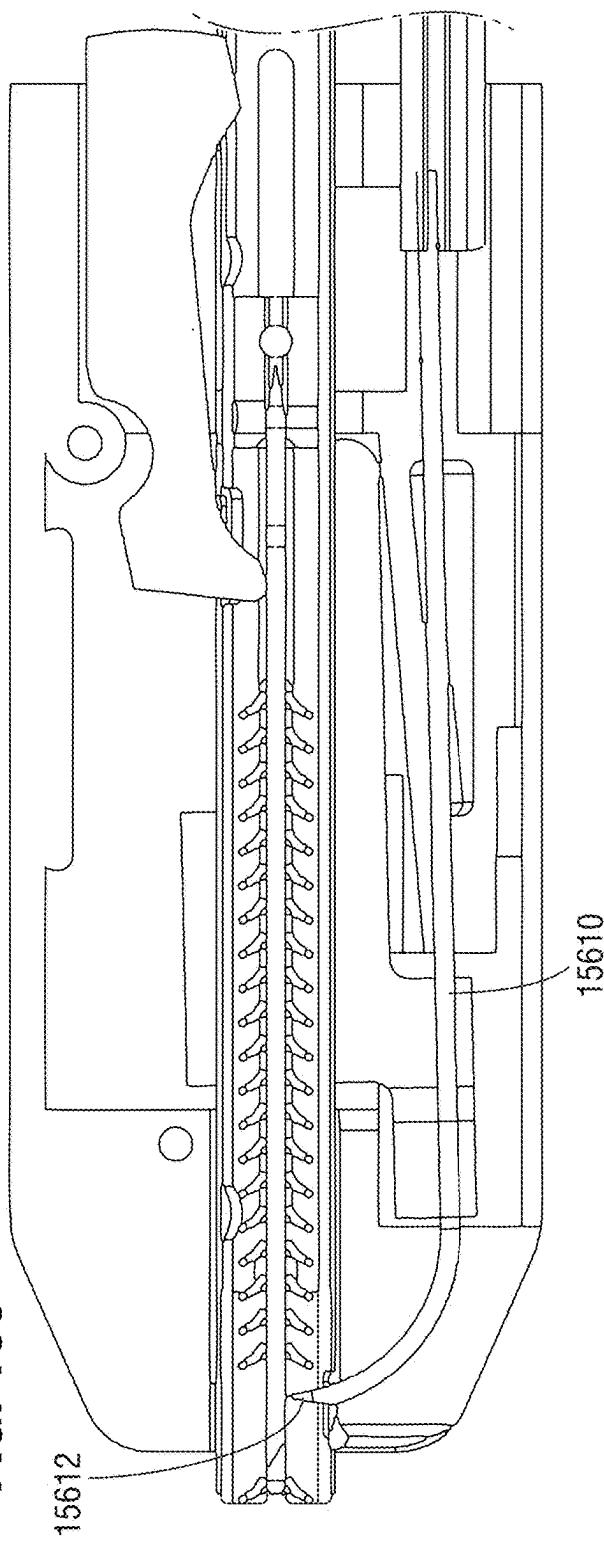
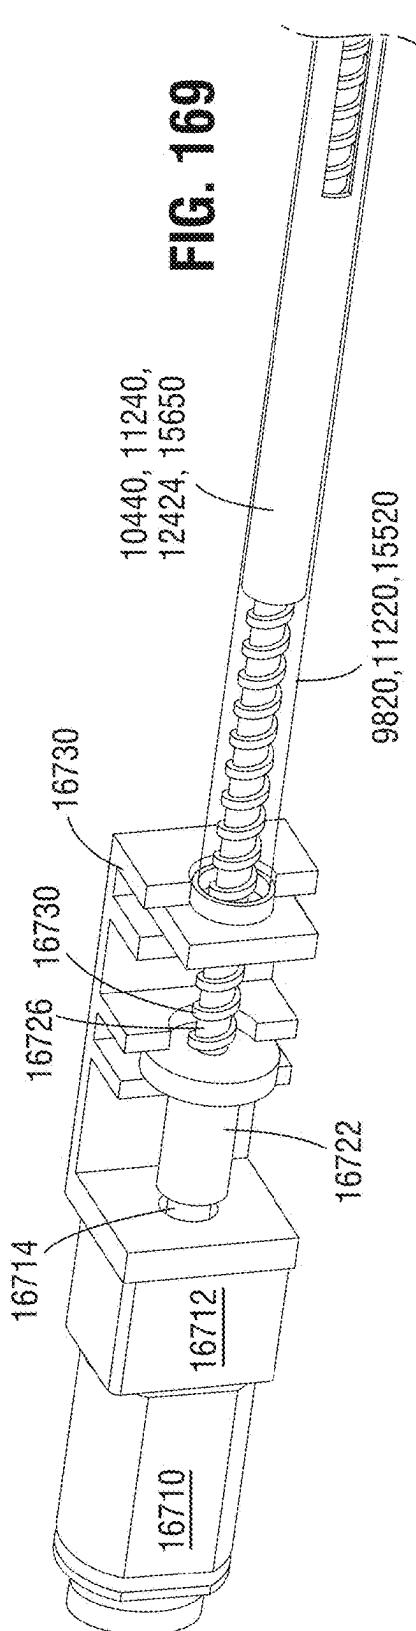
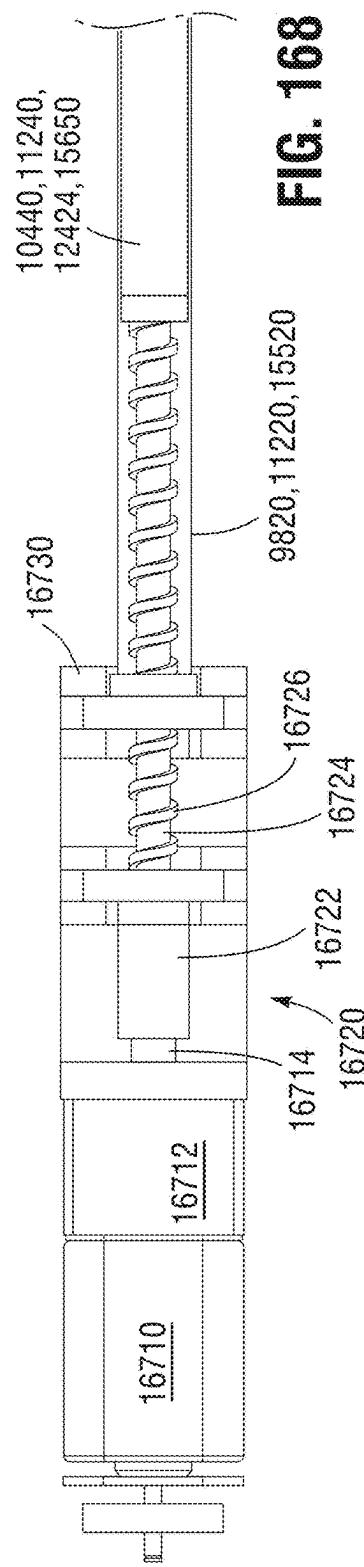
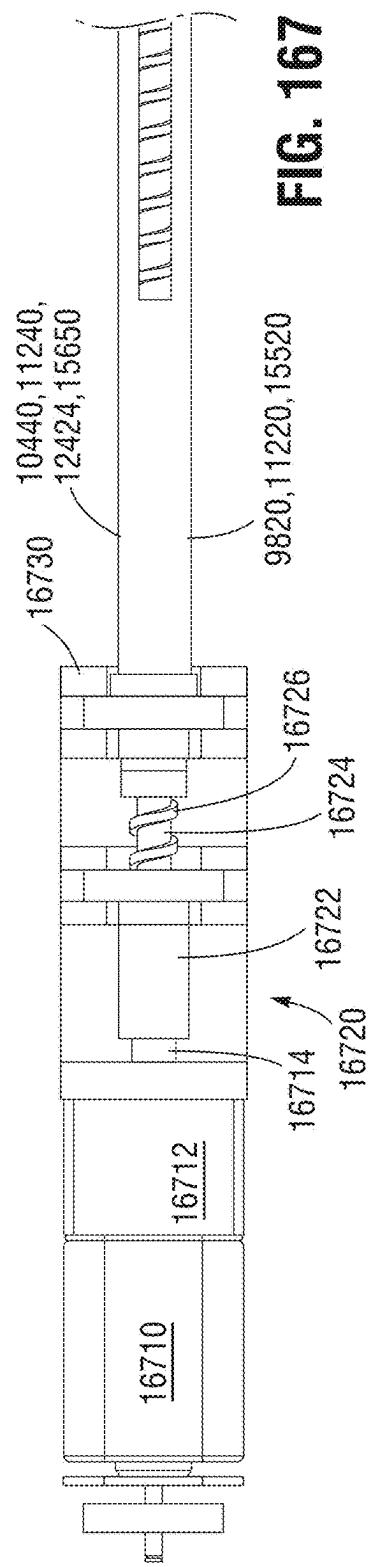
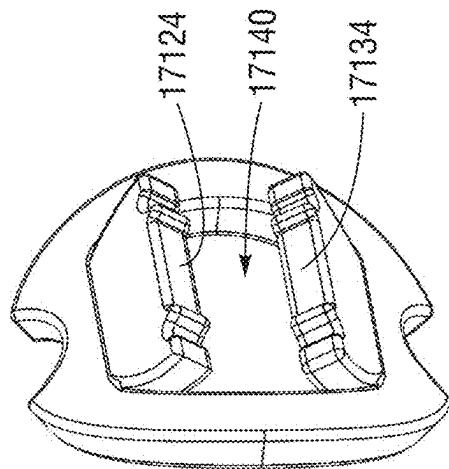
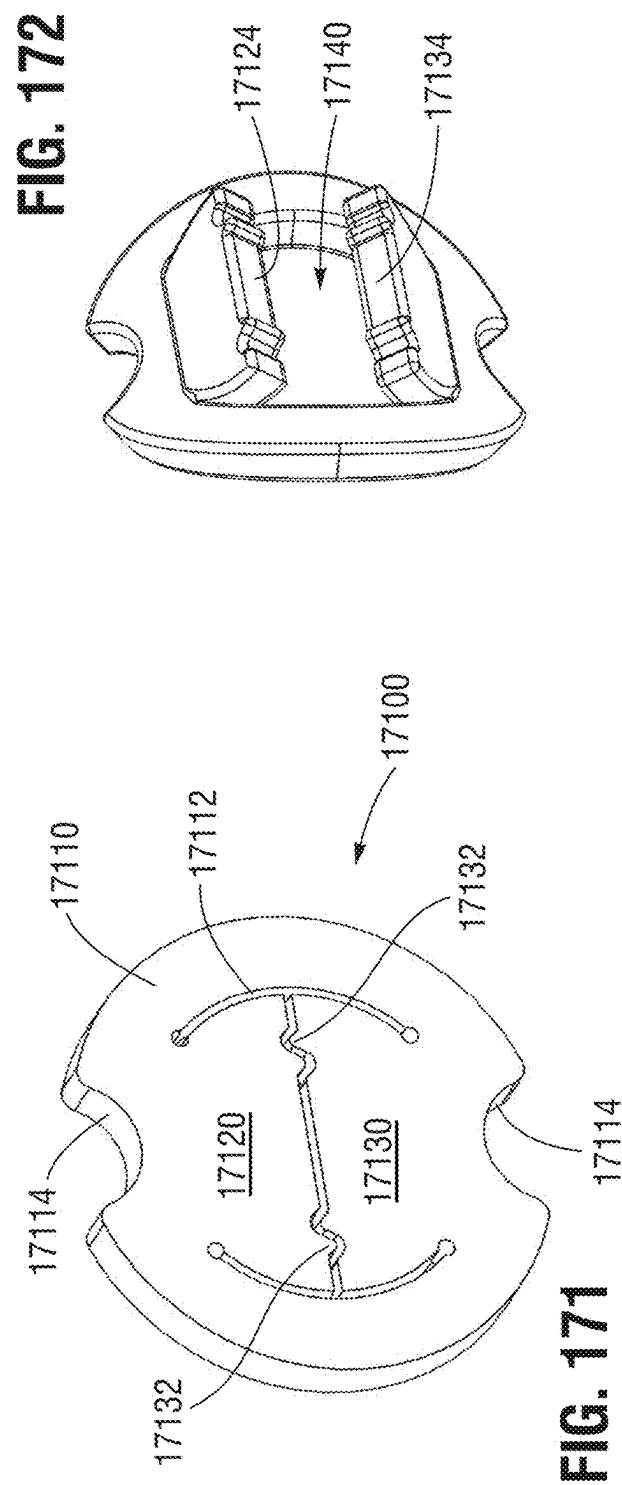
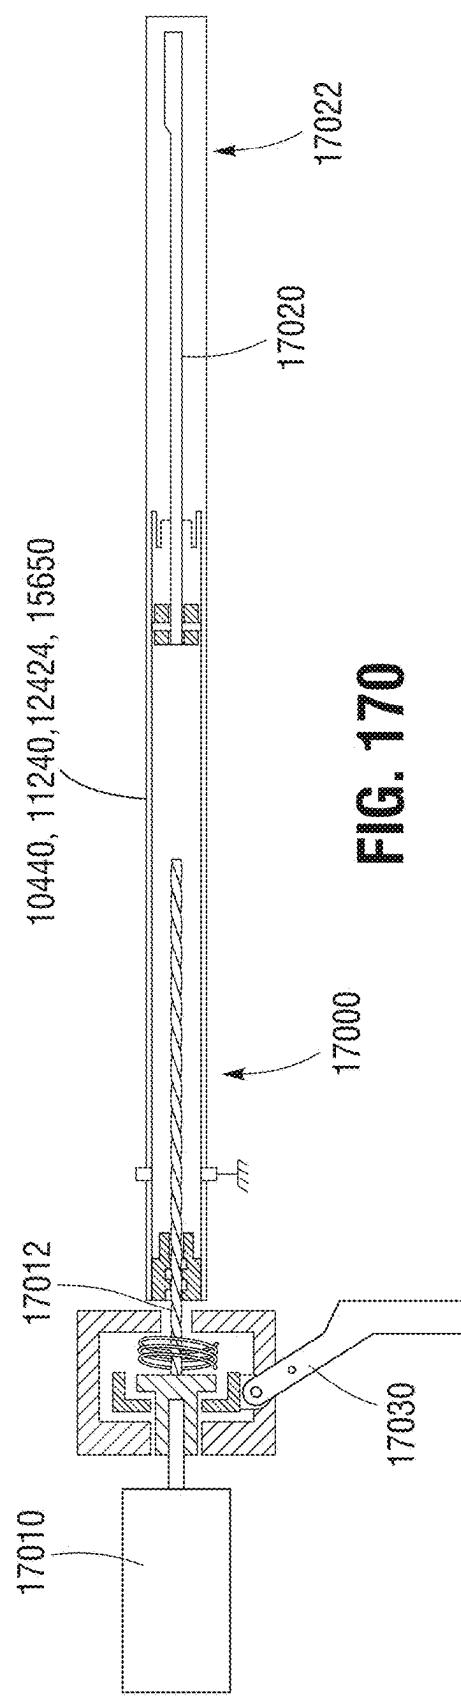


FIG. 165







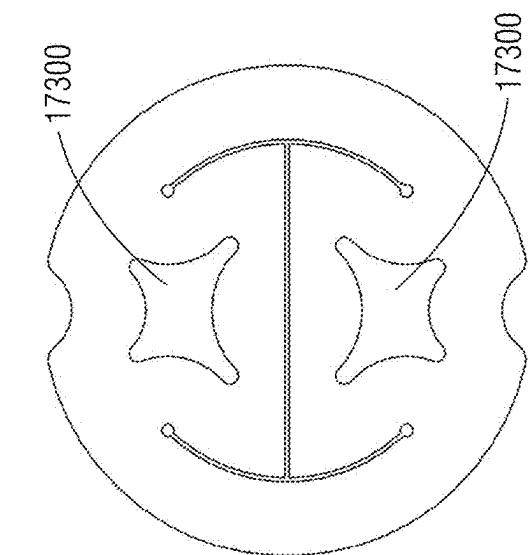


FIG. 173


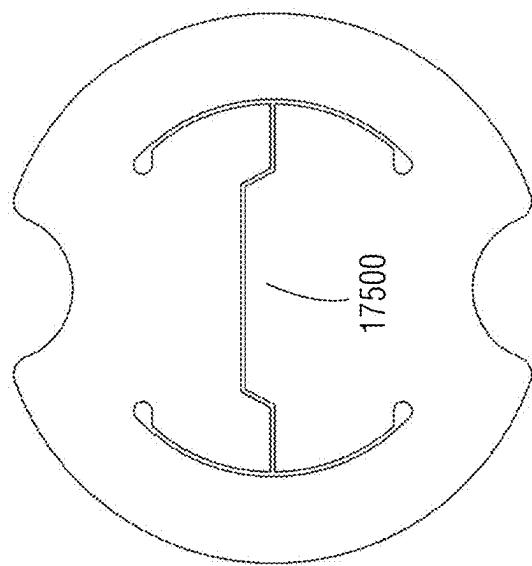


FIG. 174

FIG. 175

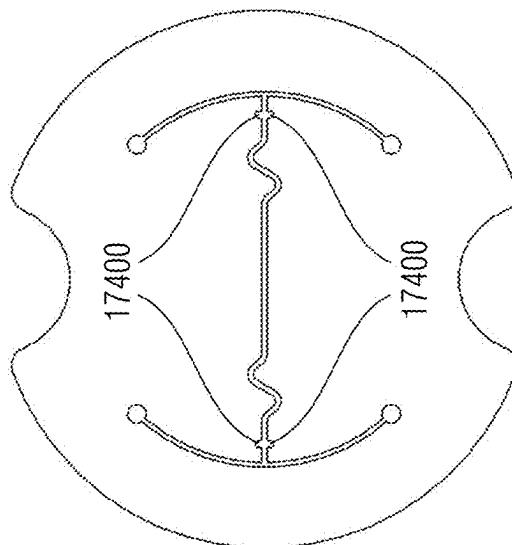

MULTIPLE-FIRING SUTURE FIXATION DEVICE AND METHODS FOR USING AND MANUFACTURING SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 17/455,215, filed Nov. 16, 2021, which is a continuation of U.S. patent application Ser. No. 16/355,373, filed Mar. 15, 2019, now U.S. Pat. No. 11,172,924, which is a continuation of U.S. patent application Ser. No. 14/965,323, filed Dec. 10, 2015, now U.S. Pat. No. 10,624,630, which claims the benefit of U.S. Patent Application No. 62/090,097, filed Dec. 10, 2014; U.S. Patent Application No. 62/103,045, filed Jan. 13, 2015; U.S. Patent Application No. 62/164,016, filed May 20, 2015; and U.S. Patent Application No. 62/096,749, filed Dec. 24, 2014, the entire disclosures all of which are incorporated by reference for all purposes. This application is also related to: U.S. patent application Ser. No. 13/715,640, filed Dec. 14, 2012, now U.S. Pat. No. 9,017,347; U.S. patent application Ser. No. 13/938,071, filed Jul. 9, 2013; U.S. patent application Ser. No. 14/307,694, filed Jun. 18, 2014; U.S. patent application Ser. No. 14/329,797, filed Jul. 11, 2014; U.S. patent application Ser. No. 14/543,240, filed Nov. 17, 2014; U.S. patent application Ser. No. 14/658,575, filed Mar. 16, 2015; and U.S. patent application Ser. No. 14/868,741, filed Sep. 29, 2015, the entire disclosures all of which are incorporated by reference for all purposes.

FIELD

[0002] The present invention lies in the field of securing cords, such as surgical sutures. The present disclosure relates to a multiple-firing securing device and methods for using and manufacturing same.

BACKGROUND

[0003] Tying sutures in surgical procedures is as old as the first stitch and knot used to close a wound. When stitching wounds, a cable, cord, or other string-like object is passed through both sides of the wound and is tightened down against the wound to close the two sides together. The most common way to tighten down the cord is to tie a knot. This entails forming a loop and passing one of the free ends of the cord through the loop at least once. When the free ends of the cord are pulled away from one another, the knot reduces until there is no more room for reduction. If left alone, the knot could come loose. Therefore, techniques for forming different and varying knots have been established. In each case, the surgeon desires the knot to be tied with a sufficient tying force, referred to herein as a locking state, that, if retained after letting go of the ends of the cord, will form a stitch that holds the wound closed. Therefore, in the process for securing the knot, a second knot can be employed directly over or after the first knot to retain the first knot in the locking state with a desired tying force. As long as the first knot does not move or loosen while the second securing knot is placed, then the locking state of the first knot remains. However, there are various counter-forces working against keeping the first knot within the locking state. These counter-forces include the removal of the original tying force, the physical structure of the compressed suture expanding back to its uncompressed steady state, the bends

of the knotted suture expanding back to their un-bent state, expansion or swelling of the wound tissue, and others. As such, once the surgeon places the first knot in the locking state and releases the first knot to tie the second locking knot, there is a great chance that that first knot will unravel and leave the locking state, thereby reducing the force from the desired tying force. Accordingly, when surgical stitching is done by hand, the surgeon is required to keep up the pulling force on the opposing ends of the suture knot throughout the time that the second knot is being considered, tied, and fastened. This is a technique practiced repeatedly by surgeons and requires the surgeon to use their relatively large fingertips. Even with the best skill, however, the first knot routinely leaves the desired locking state after the surgeon has moved from keeping the tying force constant on the first knot.

[0004] After much experience with tying surgical knots, a surgeon can tie them with approximately the same tying force, but this approximation is neither consistent nor accurate. For each surgical procedure, it is possible to accurately measure the desired tying force, but there is no way for a surgeon to know with any confidence that his/her hand-tied knot is tied close to or at the desired tying force.

[0005] Surgical instruments, such as the Cor-Knot (manufactured by LSI Solutions and as described in U.S. Pat. No. 7,833,237 to Sauer), are used to replace hand tied knots at remote sites within the body. Such instruments have both benefits and drawbacks.

[0006] Drawbacks of such surgical instruments include being limited to use with a single suture and a single crimp and generate significant waste during the suture tying process, which waste must be accounted for because there exists the possibility that the waste could be lost within the patient during surgery if safeguards are not taken. In this system “the Cor-Knot system”, a single suture crimp is loaded into the end effector and is secured for a single crimp use. To load the crimp and the snare that passes the suture through the crimp, a loading hook is passed through an end effector. The loading hook has the crimp at its distal end and is attached to a snare loop, which is threaded through the crimp. To secure the crimp between the handle and the snare loop, the snare loop is secured and held outwards as a loop by a teardrop shaped plastic handle. After the hook is threaded into the end effector and the crimp is pressed into the distal end of the end effector, the user must remove the large, plastic handle and dispose of it properly. As such, the action of loading a reload crimp into the device generates a teardrop shaped piece of plastic waste for every single crimp. Care must be taken because there is no positive method of securing the crimp into the ready position within the crimping device. If the crimp becomes dislodged, it may not form a proper securing crimp. This may require the suture to be replaced, which may be extremely difficult. Once the snare loop is used to pull the sutures through the crimp, the snare loop must also be discarded. If during the process of passing the sutures through the crimp the sutures do not fully pass through the crimp, it is possible that the very small crimp could be dislodged from the crimping device and potentially lost within the patient. It would be beneficial to provide a cord-loading device that has minimal or no waste generated during a procedure and that provides multiple securing structures that do not need to be individually loaded during the procedure.

[0007] With regard to keeping the locking state of a knot, such instruments are improved over hand-tied knots. First, the distal end of the instrument is much smaller than the tip of the smallest finger of the surgeon, which tip is used to hold down the first knot in the knot-tying process. These instruments allow the surgeon to keep the very small distal end of the instrument pressed against the first knot while they are tying the second knot. In this way, pressure against the first knot is maintained until just before the second knot is clamped down on the first knot. The time while the second knot is not against the first knot leaves a gap that allows the first knot to leave the locking state. It would be beneficial to minimize such a gap and to keep the tying force on the first knot to prevent unwinding or opening of the first knot. As with the surgeon's hands, there is no way for such prior art instruments to know whether the first knot is tied with a force that is close to or at the desired tying force and, especially, is not so much greater to cause harm at the surgical site. Accordingly, it would be beneficial to know, in advance, what is the desired tying force for a particular suture and, during suturing, to know if the suture is being tied and kept at the tying force.

[0008] Thus, a need exists to overcome the problems with the known systems, designs, and processes as discussed above.

SUMMARY

[0009] A multiple-firing securing device and methods for using and manufacturing same are described herein. In some embodiments, the described devices and methods can overcome the disadvantages of known devices and methods of this general type are described and shown herein.

[0010] The multiple-firing securing device does not generate waste during a procedure and allows enough securing structures (e.g., disks, crimps) for a complete procedure to be loaded before the procedure and, therefore, do not need to be individually loaded during the procedure. The multiple-firing securing device holds a number of securing structures within the device prior to performing a procedure. During the procedure, the multiple-firing securing device automatically loads a single securing structure in a delivery position that is ready to be secured and is in a position allowing cords to pass therethrough for securing after the cords are tightened. The multiple-firing securing device provides a mechanism that passes the cords through one securing structure, placing the securing structure in a ready-to-fire position. The multiple-firing securing device provides a reliable, reusable way of passing the cords through one securing structure at a time for each of the multiple loaded securing structures. There is no waste or separate parts to account for during or after a surgical procedure.

[0011] As used herein, the multiple-firing securing device is able to be used on cords. As defined herein, the term cords is not limited to a plurality of cords, cords can be a single cord as well and, therefore, cords and cord are used interchangeably. For example, four lengths of cord can be threaded through a securing structure for securing one or more of the cords therein after the securing step occurs. Cords also are not limited to a particular type of material. The material can be made of natural fibers, man-made or synthetic fibers, plastics, and/or metals, to name a few. Cords also are not limited to a particular structure. The material can be made of twisted strands, twisted strands with a central core, or a single strand or wire, to name a few. One

exemplary embodiment described herein relates to securing a surgical suture with a crimp of the multiple-firing crimp device and another exemplary embodiment described herein relates to securing a surgical suture with a disk of the multiple-firing disk device. The embodiments described herein, however, are not limited to surgical sutures, even though the example of surgical sutures is referred to or is used herein.

[0012] Traditionally, surgical sutures are cut by advancing a movable knife. One exemplary embodiment of the multiple-firing securing device uses a movable knife. Another exemplary embodiment of the multiple-firing securing device uses a fixed knife and a blunt pusher that contacts the suture and moves it to and against the fixed knife for cutting. This configuration prevents cutting from happening prematurely and allows precise control of the distance that the suture is cut from the securing device. A further exemplary embodiment of a multiple-firing securing device uses a movable inner cylinder movably housed within an outer cylinder having a window through which the cord is passed, the adjoining edges of the window and an edge of the inner cylinder forming scissors that cut the cord when the inner cylinder is moved distally past a given extent. This configuration prevents cutting from happening prematurely and allows precise control of the distance that the suture is cut from the disk.

[0013] In general, the systems and methods herein provide ways to pull cords such as surgical sutures through a set of cord securing structures, such as crimps, clips, and/or disks, all of which are used interchangeably herein. In any multi-fire applier device for fixing cords, a user must be able to pull the cords through a single securing structure where many of the securing structures are loaded in the device. In other words, the device must be a structure-threading device that can be reused during a single surgical procedure. The mechanism that pulls through the securing structure must be easy to use, have a low profile, should not produce waste during use, and significantly, should not be able to leave behind any separate parts. The challenges associated with such a device arise because the device must have a low profile in general and must be able to thread cords through a very small diameter securing structure (e.g., crimp, clip).

[0014] Many steps are undertaken in order to secure a structure onto cords with a multi-fire securing applier. First, the structure must be loaded from a magazine of multiple similar structures. Then, the cords must be threaded through that one structure that will secure the cords but not be threaded within or interfere with the other structures in the magazine. Then, the securing structure must be secured (e.g., crimped, crushed, released) onto the cords at a location that is, typically, very close to a cord-tying location (e.g., a surgical site). Finally, the device must be able to cut the cords extending out of the securing structure, dispose of the cut ends, and present a new securing structure for use next with as little user manipulation as possible.

[0015] It is beneficial to provide an automated device. In such a device, there are different moving assemblies, such as a carriage, a snare-extender, a cord lifter, a crimper or releaser, and a cutter. A handle contains automated motors, servos, and/or transmissions to carry out the functions of each of these movement assemblies. The handle is provided with a single mechanical control device for each of these assemblies or combination control devices that effect two or more functions. Alternatively, some or all of the automated

actions can be replaced with mechanical systems. In any embodiment, simplicity in the entire process of installing a new structure, securing the structure at the cords, and loading another structure for repetitive cycles is important. One exemplary embodiment provides a shuttle that translates on the shaft of the device and, when positioned distally, presents a loop into which the cords to be secured are passed. This loop is referred to as a snare herein. The loop is, then, pulled back into the shuttle before the shuttle begins to move proximally. The proximal motion of the shuttle utilizes the loop to draw the cords through the securing structure and expose them to the outside of the shaft. The shuttle has a formed wire guide or channel that resides outside of the outer diameter of the device's shaft and that wire guide is able to move from outside the shaft to inside the shaft, through a window in a side of the shaft (e.g., at an upper side), and then into or through a proximal end of the securing structure. When the tails of the cords are pulled through the securing structure with the shuttle, the tails are dropped off external to the shaft so that they can be grabbed by the user's hands for tensioning and subsequent securement.

[0016] In exemplary embodiments described, the snare is housed in the shuttle, which moves along the shaft attached to the handle of the securing device. If the snare is damaged during a procedure, the entirety of the shuttle containing the snare can be removed from the handle and the shaft and an entirely new shuttle from a separate, sterilized package can be used in place of the damaged shuttle.

[0017] In the exemplary embodiments, the shuttle contains various interlocks. One interlock prevents the formed wire snare from being presented until the shuttle is in a distal-most position. Another interlock prevents the shuttle from moving proximally if the snare is extended in any way. Another interlock holds the shuttle at a distal-most position for (1) extending the snare and (2) retracting the cords with movement of a shuttle saddle to position the cords in a radiused tip of the snare. Another interlock prevents the snare from moving when the cords reside in the tip and the shuttle is moving proximally to pass the cords through the crimp and thereafter present the cords outside the shaft for handling by the user.

[0018] An exemplary embodiment of the snare is formed and created from Nitinol and has a tight-radiused tip section that prevents the snare from pinching on the cords it snares while it pulls the cords through the securing device and then moves the cords to the outside of the shaft. This tight-radiused tip also ensures entry into a snare guide tube. The reservoir tip of the snare is stopped short of coming into the shuttle to form an open loop that allows the free tails of the cords to be exposed after passing through the securing device and falling free outside the shaft. The snare may be formed of any number of materials such as stainless steel, titanium, or a polymer.

[0019] Ideally, when the handle is in the middle of any of the crimping, cutting, or loading processes, the handle prevents the shuttle from moving away from the nose of the handle. In contrast, when the shuttle is advanced away from the handle, handle functions may be enabled or disabled as appropriate when the shuttle is either moving or is away from the nose.

[0020] Additional interlocks are present to enable/lock out functions in the handle based on a position of the shuttle when in its most proximal position, e.g., resting against the handle. After the shuttle is at the nose of the handle, the user

can pull on the cords that run through the securing device and hang loose through a window of the shaft. When in the snaring position, the shuttle can be held by friction and/or with one or more detents or interlocks.

[0021] With the foregoing and other objects in view, there is provided, a multiple-fire securing device including a hollow outer shaft, a reloader, a rail, a reloader movement assembly, and a plurality of securing structures each defining an inner securing orifice. The reloader is longitudinally movable within the outer shaft and has a distal end shaped to temporarily contact one of the securing structures. The rail is disposed within the reloader and the plurality of securing structures are disposed on the rail. The rail has an installing location. The reloader movement assembly moves the reloader longitudinally in a distal direction to deliver a first securing structure to the installing location from a first proximal position and moves the reloader proximally away from the installing location without the first securing structure to a position in which the distal end of the reloader temporarily contacts a second one of the securing structures.

[0022] In accordance with another feature, the inner clipping orifice is an H-shaped orifice.

[0023] In accordance with a further feature, the rail has an H-shape cross-section.

[0024] In accordance with an added feature, the rail has a rectangular cross-section.

[0025] In accordance with an additional feature, the reloader movement assembly moves the reloader longitudinally further in the distal direction to remove the first securing structure from the installing location and off of the rail before moving the reloader proximally away from the installing location to the second securing structure.

[0026] In accordance with yet another feature, when at least one cord to be secured is disposed through the inner securing orifice of the first securing structure, removal of the first securing structure from the rail causes the first securing structure to secure the at least one cord within the inner securing orifice of the first securing structure.

[0027] In accordance with yet a further feature, after the reloader contacts the second securing structure, the reloader movement assembly moves the reloader longitudinally in the distal direction to deliver the second securing structure distally along the rail to the installing location.

[0028] In accordance with yet an added feature, when at least one cord to be secured is disposed through the inner securing orifice of the second securing structure, removal of the second securing structure from the rail causes the second securing structure to secure the cord within the inner securing orifice of the second securing structure.

[0029] In accordance with another feature, there is also provided a multiple-fire securing device comprising a plurality of securing structures each defining an H-shaped orifice, a hollow outer shaft having an exterior surface, an interior, and a distal end, and defining a lateral opening proximal to the distal end and communicating between the interior and the environment outside the exterior surface, a hollow inner shaft longitudinally movable within the outer shaft and having fingers extending from an intermediate point distally to define opposing structure-grasping slots shaped to temporarily grasp one of the securing structures, an H-shaped rail longitudinally disposed within the inner shaft and shaped to slidably receive thereon the plurality of securing structures, the H-shaped rail having an installing location, an inner shaft movement assembly automatically

moving the inner shaft longitudinally in both distal and proximal directions and delivering one securing structure to the installing location by sliding a first securing structure longitudinally along the H-shaped rail from a first proximal position to the installing location and returning to a second proximal position without the first securing structure, and a snare movement assembly. The snare movement assembly has a snare with a snare opening and is shaped to pass through the H-shaped orifice of the first securing structure, to pass out of the interior of the outer shaft distally past the installing location, and to secure the at least one cord temporarily. The snare movement assembly moves the snare through the first securing structure past the installing location and out the distal end of the outer shaft to a snare position in which the at least one cord can be threaded through the snare opening and proximally to pull a portion of the at least one cord secured in the snare opening proximally through the first securing structure and out a side of the outer shaft through the lateral opening and present at least some of the portion of the at least one cord out through the lateral opening for access by a user.

[0030] An exemplary embodiment of the cord-securing devices and methods described herein includes a sensor associated with the device to detect and measure the amount of tying force that is being imparted by the user to the cords when tying a first knot at a location. This sensor supplies information to a display (e.g., on the handle) that shows either the amount of tying force or whether or not the amount of tying force is equal to or greater to a pre-set limit, or both. The display can take any form, such as an LCD display with graphics, an LED with yellow, green, and red display colors, or just a simple yes/no mechanical and/or electrical indicator that sufficient tying force is being applied. In this way, the user can maintain pressure against the first knot until the second knot secures the first knot. There is, accordingly, no time for loosening the first knot before the second knot secures the first knot in place with the tying force intact and leaving the first knot at the locking state. A surgeon can determine, with actual measurements or with pre-supplied data, the desired tying force for a particular cord to be tied (e.g., a surgical suture) and, during tying, to know dynamically if the cord is being tied and kept at the tying force after the cord is released.

[0031] Although the devices and methods are illustrated and described herein as embodied in a multiple-firing securing device and methods for using and manufacturing same, it is, nevertheless, not intended to be limited to the details shown because various modifications and structural changes may be made therein without departing from the spirit thereof and within the scope and range of equivalents of the claims. Additionally, well-known elements of exemplary embodiments will not be described in detail or will be omitted so as not to obscure the relevant details.

[0032] Additional advantages and other features characteristic of the present devices and methods will be set forth in the detailed description that follows and may be apparent from the detailed description or may be learned by practice of exemplary embodiments. Still other advantages may be realized by any of the instrumentalities, methods, or combinations particularly pointed out in the claims.

[0033] Other features that are considered as characteristic for the devices and methods are set forth in the appended claims. As required, detailed embodiments are disclosed herein; however, it is to be understood that the disclosed

embodiments are merely exemplary, which can be embodied in various forms. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one of ordinary skill in the art to variously employ the present devices and methods in virtually any appropriately detailed structure. Further, the terms and phrases used herein are not intended to be limiting; but rather, to provide an understandable description thereof. While the specification concludes with claims defining the features that are regarded as novel, it is believed that the devices and methods will be better understood from a consideration of the following description in conjunction with the drawing figures, in which like reference numerals are carried forward.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] The accompanying figures, where like reference numerals refer to identical or functionally similar elements throughout the separate views, which are not true to scale, and which, together with the detailed description below, are incorporated in and form part of the specification, serve to illustrate further various embodiments and to explain various principles and advantages all in accordance with the present devices and methods. Advantages of embodiments will be apparent from the following detailed description of the exemplary embodiments thereof, which description should be considered in conjunction with the accompanying drawings in which:

[0035] FIG. 1 is a fragmentary, longitudinal, cross-sectional view of an exemplary embodiment of an end effector for a multiple-firing crimp device with a crimp sub-assembly in a position ready to load a first crimp;

[0036] FIG. 2 is a fragmentary, longitudinal, cross-sectional view of the end effector of the multiple-firing crimp device of FIG. 1 with the crimp sub-assembly removed;

[0037] FIG. 3 is a fragmentary, side elevational and partially longitudinal cross-sectional view of an exemplary embodiment of a portion of a handle for operating the end effector of FIG. 2 with the crimp sub-assembly fully retracted;

[0038] FIG. 4 is a fragmentary, longitudinal, cross-sectional view of the end effector of FIG. 1 with the crimp sub-assembly in an extended position prior to seating of a crimp;

[0039] FIG. 5 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle portion of FIG. 3 with the crimp sub-assembly actuators in a carriage-extended position corresponding to FIG. 4;

[0040] FIG. 6 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 1 with the crimp sub-assembly in a crimp-seated position ready for use;

[0041] FIG. 6A is a fragmentary, longitudinally cross-sectional view of an enlarged distal portion of the end effector of FIG. 6;

[0042] FIG. 7 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle portion of FIG. 3 with the crimp sub-assembly actuators in a suture-use position corresponding to FIG. 6;

[0043] FIG. 8 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 6 with a snare in an extended snare position ready for capturing one or more cords;

- [0044] FIG. 9 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle portion of FIG. 3 with the snare sub-assembly actuator in a snare-use position corresponding to FIG. 8;
- [0045] FIG. 10 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 8 with a snare in an extended snare position ready for or capturing a suture and with the suture screw carriage disengaged from the distal-most clip and fully retracted;
- [0046] FIG. 11 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle portion of FIG. 3 with the snare sub-assembly actuator in a snare-use position corresponding to FIG. 10 and with the suture screw carriage disengaged from the distal-most crimp and fully retracted;
- [0047] FIG. 12 is a fragmentary, perspective view of the end effector of FIGS. 8 and/or 10 with cords to be captured extended within the loop of the snare;
- [0048] FIG. 13 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 10 enlarged with respect to FIG. 10, with the snare in a partially retracted snare position after capturing cords and with the cords having passed partially through the crimp;
- [0049] FIG. 14 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 13 reduced with respect to FIG. 13 and with the snare in a further partially retracted snare position after capturing the cords;
- [0050] FIG. 15 is a fragmentary, side elevational view of the end effector of FIG. 14;
- [0051] FIG. 16 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle of FIG. 11 with the snare sub-assembly actuator further retracted than the position of the snare corresponding to FIG. 12;
- [0052] FIG. 17 is a fragmentary, longitudinally cross-sectional view of the end effector of FIGS. 14 and 15 with a cord-lifting device in a lowered position;
- [0053] FIG. 18 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 17 with the cord-lifting device in a lifted position positioning the cords for grasping by a user;
- [0054] FIG. 19 is a fragmentary, perspective view of the end effector of FIG. 18;
- [0055] FIG. 20 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle of FIG. 16 with the cord-lifting device actuated to position the cord lifter to the position corresponding to FIGS. 18 and 19;
- [0056] FIG. 21 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 19 with the cord-lifting device in a lifted position, with the suture grasped by a user, and with the snare in the partially retracted position;
- [0057] FIG. 22 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 21 with the cord-lifting device in a lowered position, with the cords grasped by a user at an acute angle with the longitudinal axis of the end effector, and with the snare in a retracted position;
- [0058] FIG. 23 is a fragmentary, perspective view of the end effector of FIG. 22;
- [0059] FIG. 24 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle of FIG. 20 with the cord-lifting device returned to the unactuated position that places the cord-lifting device in the

lowered position corresponding to FIGS. 22 and 23 and with the snare actuator in the retracted position;

[0060] FIG. 25 is a fragmentary, longitudinally cross-sectional view of the end effector of FIG. 23 enlarged with respect to FIG. 23 and with the outer tube partially extended to move the hammer radially inwards and thereby crimp the crimp to the cords therewithin;

[0061] FIG. 26 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle of FIG. 24 with the outer tube extended distally into the position corresponding to FIG. 25;

[0062] FIG. 27 is fragmentary, longitudinally cross-sectional view of the end effector of FIG. 25 with the crimp and cords removed;

[0063] FIG. 28 is fragmentary, longitudinally cross-sectional view of the end effector of FIG. 25 with the cutter actuator fully extended to move the cutting blade and thereby cut the cords;

[0064] FIG. 29 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle of FIG. 26 with the cutter actuator fully extended distally into the position corresponding to FIG. 28 to thereby cut the captured cords;

[0065] FIG. 30 is a fragmentary, perspective view of the end effector of FIG. 25;

[0066] FIG. 31 is a fragmentary, side elevational and partially longitudinal cross-sectional view of the handle of FIG. 29 with the cutter and crimping actuators retracted proximally to release the crimped crimp and with the crimp sub-assembly ready to reload a new crimp into the end effector;

[0067] FIG. 32 is an enlarged perspective view of the crimp of FIG. 1;

[0068] FIG. 33 is a longitudinal cross-sectional view of the crimp of FIG. 1;

[0069] FIG. 34 is an enlarged perspective view of the crimp of FIGS. 33 and 34 after being crimped;

[0070] FIG. 35 is an enlarged perspective and longitudinal cross-sectional view of the crimp of FIGS. 32 and 33 after being crimped;

[0071] FIG. 36 is a photograph of an exemplary embodiment of a distal end of a snare with a loop and its tip expanded;

[0072] FIG. 37 is a photograph of an exemplary embodiment of a snare with a loop and its tip expanded;

[0073] FIG. 38 is a photograph of another exemplary embodiment of a distal end of a snare with a loop and its tip expanded;

[0074] FIG. 39 is a fragmentary, longitudinally cross-sectional view of an exemplary embodiment of an alternative end effector to the device shown in FIGS. 1 to 31 and similar to FIG. 8, wherein the snare is replaced with a distal hook that hooks the cords and draws them into the assembly for securing with a loaded crimp, this embodiment allowing the user to thread the crimp with a single hand that is holding the device's handle;

[0075] FIG. 40 is a fragmentary, enlarged perspective view of the end effector of FIG. 39;

[0076] FIG. 41 is a fragmentary, enlarged perspective view of the end effector of FIG. 40 with the hook holding two leads of a suture;

[0077] FIG. 42 is a fragmentary, longitudinally cross-sectional view of an exemplary embodiment of a multiple-

firing crimp device having an end effector with a manually actuated crimp sub-assembly in a position with a first crimp loaded for use;

[0078] FIG. 43 is a fragmentary, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 42 with the manually actuated crimp sub-assembly in a partial snare-movement position toward the first crimp;

[0079] FIG. 44 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 42;

[0080] FIG. 45 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 43;

[0081] FIG. 46 is a fragmentary, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 42 with the manually actuated crimp sub-assembly lowering the snare guide tube into the snare guide tube loading track and axially aligning with the center of the first crimp;

[0082] FIG. 47 is a fragmentary, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 42 with the manually actuated crimp sub-assembly inserting the snare guide tube up to the center of the first crimp for receiving therein the snare, the lowering of the snare guide tube unlocking the snare assembly for distal movement;

[0083] FIG. 48 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 46;

[0084] FIG. 49 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 47;

[0085] FIG. 50 is a fragmentary, enlarged, partially longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 47;

[0086] FIG. 51 is a fragmentary, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 42 with the manually actuated crimp sub-assembly extending the snare through the snare guide tube and through and out from the first crimp for receiving therein the cords to be snared, movement of the outer body being locked and only permitting movement of the snare assembly for snare movement;

[0087] FIG. 52 is a fragmentary, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 51 with cords in the snare;

[0088] FIG. 53 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 51;

[0089] FIG. 54 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 52;

[0090] FIG. 55 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 42 with the manually actuated crimp sub-assembly having retracted the snare and the cords along with the snare guide tube out from the distal end of the shaft assembly and having pulled the cords through the first crimp, movement of the outer body being free in the proximal direction and movement of the snare assembly being free to retract the snared cords;

[0091] FIG. 56 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 42 with the manually actuated crimp sub-assembly having completely retracted the snare from the cords to allow a user to manually pull the free ends of the previously

snared suture tight and to place the crimp adjacent to the loop of the cords where crimping is to take place after the user pulls tightly on the cords to place the distal end of the device at the cord-tying location;

[0092] FIG. 57 is a photograph of a fragmentary, perspective view of an exemplary embodiment of a shuttle for the multiple-firing crimp device of FIG. 42

[0093] FIG. 58 is a fragmentary, perspective view of an exemplary embodiment of a multiple-firing crimp device having an end effector with a manually actuated crimp sub-assembly in a position with a first crimp loaded for use, with a shuttle in a ready to use state, and with a handle removed;

[0094] FIG. 59 is a fragmentary, perspective view of the multiple-firing crimp device of FIG. 58 with the manually actuated crimp sub-assembly with the shuttle in a snare-movement position;

[0095] FIG. 60 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 58 with the shuttle in an intermediate position between the handle and the crimp and with a snare scroll removed;

[0096] FIG. 61 is a fragmentary, enlarged, partially transparent, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 58 with the shuttle in an intermediate position between the handle and the crimp and with the snare scroll removed;

[0097] FIG. 62 is a fragmentary, enlarged, transparent, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 58 with the shuttle in an intermediate position between the handle and the crimp and with the snare scroll removed;

[0098] FIG. 63 is a fragmentary, enlarged, partially transparent, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 59 with the shuttle in a snare-movement position;

[0099] FIG. 64 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 59 with the shuttle in the snare-movement position;

[0100] FIG. 65 is a fragmentary, enlarged, transparent, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 59 with the shuttle in the snare-movement position;

[0101] FIG. 66 is a fragmentary, perspective view of the multiple-firing crimp device of FIG. 58 with the manually actuated crimp sub-assembly with the shuttle in a snare-extended position;

[0102] FIG. 67 is a fragmentary, enlarged, partially transparent, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 66 with the shuttle in the snare-extended position;

[0103] FIG. 68 is a fragmentary, enlarged, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 66 with the shuttle in the snare-extended position;

[0104] FIG. 69 is a fragmentary, enlarged, transparent, longitudinally cross-sectional view of the multiple-firing crimp device of FIG. 66 with the shuttle in the snare-extended position;

[0105] FIG. 70 is a fragmentary, perspective view of an exemplary embodiment of a distal end of a multiple-firing crimp device having a distal headlight assembly in an off state and an end effector with a manually actuated crimp sub-assembly in a position with a first crimp loaded for use and with a shuttle in a ready to use state;

[0106] FIG. 71 is a fragmentary, partially transparent, perspective view of the multiple-firing crimp device of FIG. 70;

[0107] FIG. 72 is a fragmentary, perspective view of the multiple-firing crimp device of FIG. 70 with a headlight cover removed;

[0108] FIG. 73 is a fragmentary, transparent, perspective view of the multiple-firing crimp device of FIG. 70;

[0109] FIG. 74 is a fragmentary, partially transparent, perspective view of the multiple-firing crimp device of FIG. 70 with the shuttle in the snare-extended position;

[0110] FIG. 75 is a perspective view of a left side of an alternative exemplary embodiment of a shuttle body;

[0111] FIG. 75A is a transparent, perspective view of the shuttle body of FIG. 75;

[0112] FIG. 75B is a perspective view of a right side of the shuttle body of FIG. 75;

[0113] FIG. 76 is a perspective view of a left side of an alternative exemplary embodiment of a shuttle body with snare-extender slide removed;

[0114] FIG. 76A is a transparent, perspective view of the shuttle body of FIG. 76;

[0115] FIG. 76B is a perspective view of a right side of the shuttle body of FIG. 76;

[0116] FIG. 77 is a perspective view of a left side of a left half of an alternative exemplary embodiment of a shuttle body with snare-extender slide removed;

[0117] FIG. 77A is a transparent, perspective view of the shuttle body half of FIG. 77;

[0118] FIG. 77B is a perspective view of a right side of the shuttle body half of FIG. 77;

[0119] FIG. 78 is a perspective view of a left side of an alternative exemplary embodiment of a shuttle body with snare-extender slide removed;

[0120] FIG. 78A is a transparent, perspective view of the shuttle body of FIG. 78;

[0121] FIG. 78B is a perspective view of a right side of the shuttle body of FIG. 78;

[0122] FIG. 79 is a fragmentary, perspective view of a right side of an exemplary embodiment of a handle for a multiple-firing crimp device with the right half of the handle body removed;

[0123] FIG. 80 is a fragmentary, perspective view of the handle of FIG. 79 with a cover of a carriage movement assembly transparent;

[0124] FIG. 81 is a fragmentary, side elevational view of a right side of the handle of FIG. 79 in a crimp-retracted state;

[0125] FIG. 82 is a fragmentary, side elevational view of the right side of the handle of FIG. 79 in a crimp-holding state;

[0126] FIG. 83 is a fragmentary, side elevational view of the right side of the handle of FIG. 79 in a clutched state;

[0127] FIG. 84 is a fragmentary, side elevational view of the right side of the handle of FIG. 79 in a crimp-extended state;

[0128] FIG. 85 is a fragmentary, perspective view of an exemplary embodiment of an end effector of a multiple-firing crimp device with a fixed blade and a blade pushrod in a fully retracted position and a crimping assembly in a non-crimping state;

[0129] FIG. 86 is a fragmentary, perspective view of the end effector of FIG. 85 with the outer tube transparent;

[0130] FIG. 87 is a fragmentary, perspective view of the end effector of FIG. 86 with the crimping assembly in a crimped state;

[0131] FIG. 88 is a fragmentary, perspective view of the end effector of FIG. 87 with the blade pushrod in a partially actuated state before cutting;

[0132] FIG. 89 is a fragmentary, perspective view of the end effector of FIG. 88 with the blade pushrod in a fully actuated state after cutting;

[0133] FIG. 90 is a fragmentary, longitudinally cross-sectional, perspective view of a distal end of the end effector of FIG. 85;

[0134] FIG. 91 is a fragmentary, longitudinally cross-sectional, perspective view of a distal end of the end effector of FIG. 89;

[0135] FIG. 92 is a flow chart of a process for completing a crimping procedure with a multiple-firing crimping assembly;

[0136] FIG. 93 is a photograph of a fragmentary, perspective view of an exemplary embodiment of the distal end of the multiple-crimp firing device with a suture wrapped around but not cinched at an illustration of a surgical site;

[0137] FIG. 94 is a photograph of a fragmentary, perspective view of the distal end of the multiple-crimp firing device of FIG. 93 with the suture closed at the surgical site;

[0138] FIG. 95 is a photograph of a fragmentary, perspective view of the distal end of the multiple-crimp firing device of FIG. 93 with the suture and the distal end lifted from the surgical site;

[0139] FIG. 96 is a photograph of a fragmentary, perspective view of the distal end of the multiple-crimp firing device of FIG. 93 with the suture cinched at the surgical site before a tying force is reached;

[0140] FIG. 97 is a photograph of a fragmentary, perspective view of the distal end of the multiple-crimp firing device of FIG. 93 with the suture cinched at the surgical site when the tying force is reached;

[0141] FIG. 97A is a fragmentary, enlarged, perspective view of the right side of the handle of FIG. 79 with a load sensor for detecting and measuring an amount of force being imparted on the cords at the surgical site before being secured;

[0142] FIG. 98 is a right side elevational view of an exemplary embodiment of a multiple-clip securing device in a ready-to-use state, a snare contained within a retracted snare assembly;

[0143] FIG. 99 is a right side elevational view of the multiple-clip securing device of FIG. 98 in a shuttle-extended state with the snare still contained within the snare assembly;

[0144] FIG. 100 is a right side elevational view of the multiple-clip securing device of FIG. 98 in a snare-extended state with the snare, indicated by dashed lines, extended out from the snare assembly and the snare assembly locked in the shuttle-extended position while the snare is extended;

[0145] FIG. 101 is a right side elevational view of the multiple-clip securing device of FIG. 100 in the shuttle-extended state with the snare retracted back into the snare assembly and the snare assembly unlocked to permit retraction of the snare assembly;

[0146] FIG. 102 is a right side elevational view of the multiple-clip securing device of FIG. 101 in a ready-to-fire-clip state with the snare contained within the snare assembly

and the snare assembly locked in position to permit placement of a cord-retaining clip;

[0147] FIG. 103 is a flow chart of a process for performing and completing a securing procedure with a multiple-clip securing device;

[0148] FIG. 104 is a fragmentary, partially transparent, side elevational view of a distal end of an exemplary embodiment of a distal end of the multiple-clip securing device of FIG. 98 with a clip loaded at the distal end in a ready-to-clip state;

[0149] FIG. 105 is a fragmentary, partially transparent, side elevational view of the distal end of the multiple-clip securing device of FIG. 104 with a clip extended off a clip-holding rail and clipped to one or more cords but the cords not yet cut;

[0150] FIG. 106 is a fragmentary, partially transparent, side elevational view of the distal end of the multiple-clip securing device of FIG. 104 with a clip extended off a clip-holding rail and clipped to one or more cords after the cords are cut;

[0151] FIG. 107 is a fragmentary, partially transparent, side elevational view of the distal end of the multiple-clip securing device of FIG. 104 after a clip has been clipped to one or more cords and is ready to cut again or to reload another clip into a clip-ready location;

[0152] FIG. 108 is a fragmentary, partially transparent, side elevational view of the distal end of the multiple-clip securing device of FIG. 104 with a clip pusher moved proximally towards a clip-reloading position and with one of the clip-holding fingers removed for clarity;

[0153] FIG. 109 is a fragmentary, partially transparent, side elevational view of the distal end of the multiple-clip securing device of FIG. 108 with the clip pusher moved distally taking with it a subsequent clip and placing the subsequent clip into a clip-ready position and with one of the clip-holding fingers removed for clarity;

[0154] FIG. 110 is a fragmentary, partially transparent, side elevational view of the distal end of the multiple-clip securing device of FIG. 109 with a subsequent clip extended off a clip-holding rail and clipped to one or more cords after the cords are cut;

[0155] FIG. 111 is a fragmentary, partially transparent, side elevational view of the distal end of the multiple-clip securing device of FIG. 98 with a last clip on the clip-holding rail, a clip pusher proximal of the last clip, and with one of the clip-holding fingers removed for clarity;

[0156] FIG. 112 is a fragmentary, perspective and partially transparent view of an exemplary embodiment a distal end effector of a multiple-clip securing device with a cutting/reloading assembly in a ready-to-clip position;

[0157] FIG. 113 is a fragmentary, perspective, vertically cross-sectional view of the end effector of FIG. 112;

[0158] FIG. 114 is a fragmentary, perspective, vertically cross-sectional view of the end effector of FIG. 112 with the cutting/reloading assembly in a clip-delivered position before the first clip is ejected;

[0159] FIG. 115 is a fragmentary, perspective, vertically cross-sectional view of the end effector of FIG. 112 with the cutting/reloading assembly in a clip-delivered position after the first clip is ejected;

[0160] FIG. 116 is a fragmentary, perspective, vertically cross-sectional view of the end effector of FIG. 115 with the cutting/reloading assembly in a subsequent clip-retrieval position;

[0161] FIG. 117 is a fragmentary, perspective, vertically cross-sectional view of the end effector of FIG. 116 with the cutting/reloading assembly in a subsequent clip-retrieval position after the previous 11 clips have been ejected;

[0162] FIG. 118 is a fragmentary, perspective, vertically cross-sectional view of the end effector of FIG. 117 with the cutting/reloading assembly in a ready-to-clip position;

[0163] FIG. 119 is a fragmentary, perspective and vertically cross-sectional view of the distal end of the cutting/reloading assembly of FIG. 112;

[0164] FIG. 120 is a fragmentary, perspective and horizontally cross-sectional view of the distal end of the cutting/reloading assembly of FIG. 112;

[0165] FIG. 121 is a fragmentary, enlarged, perspective view from distal of a distal end of an exemplary embodiment of a shaft of the multiple-clip securing device of FIG. 98 with a clip in a snare-ready position and with one of the clip-holding fingers removed for clarity;

[0166] FIG. 122 is a fragmentary, enlarged, partially transparent, perspective view from proximal of the distal end of the shaft of FIG. 121 with a pair of cords, indicated in dashed lines, threaded through the clip before being clipped together to the clip and with both of the clip-holding fingers;

[0167] FIG. 123 is a fragmentary, enlarged, cross-sectional view of the distal end of the shaft of the multiple-clip securing device of FIG. 112 with the clip in a snare-ready position, a path for a cord to be clipped by the clip being indicated with a dashed line;

[0168] FIG. 124 is a fragmentary, enlarged, cross-sectional view of an intermediate portion of the shaft of the multiple-clip securing device of FIG. 112 with a set-screw holding the clip support beam within the shaft;

[0169] FIG. 125 is a fragmentary, perspective and vertically cross-sectional view of the distal end of the cutting/reloading assembly of FIG. 112 with the cutting/reloading assembly in a clip delivery position;

[0170] FIG. 126 is a fragmentary, perspective and horizontally cross-sectional view of the distal end of the cutting/reloading assembly of FIG. 125;

[0171] FIG. 127 is a fragmentary, enlarged, perspective view from distal of the distal end of the shaft of the multiple-clip securing device of FIG. 112 with the clip ejected from the clip guide beam, disposed within the distal end of the shaft, and clipping a pair of cords before the cords are cut and with one of the clip-holding fingers removed for clarity;

[0172] FIG. 128 is a fragmentary, enlarged, perspective view from distal of the distal end of the shaft of FIG. 127 with the clip clipped on the pair of cords after the cords are cut and before the clip exits the distal end of the shaft and with one of the clip-holding fingers removed for clarity;

[0173] FIG. 129 is a fragmentary, enlarged, cross-sectional view of the distal portion of the shaft of the multiple-clip securing device of FIG. 112 with the clip pushing arm in a first retracted reloading position for reloading a distal-most clip on the clip-guiding rail before the distal-most clip contacts a clip-pushing face of the clip-holding finger, the clip-holding finger being cammed outwards due to an interior cam surface, and with one of the clip-holding fingers being removed for clarity;

[0174] FIG. 130 is a fragmentary, enlarged, cross-sectional view of the distal portion of the shaft of the multiple-clip securing device of FIG. 112 with the clip pushing arm in a second retracted reloading position for reloading the

distal-most clip with the clip-pushing face of the clip-holding finger proximal of the distal-most clip, with the cam surface resting on a second distal-most clip and being cammed outwards due to the interior cam surface to retain the finger tip outside the outer diameter of the distal-most clip, and with one of the clip-holding fingers being removed for clarity;

[0175] FIG. 131 is a fragmentary, enlarged, cross-sectional view of the distal portion of the shaft of the multiple-clip securing device of FIG. 112 with the clip pushing arm in a third extended reloading position for reloading the distal-most clip by contacting the clip-pushing face of the clip-holding finger with the proximal side of the distal-most clip and the interior surface of the finger tip of the clip-holding finger with the exterior surface of the distal-most clip, and with one of the clip-holding fingers being removed for clarity;

[0176] FIG. 132 is a fragmentary, enlarged, cross-sectional view of the distal portion of the shaft of the multiple-clip securing device of FIG. 112 with the clip pushing arm in a fourth extended reloading position where the distal-most clip is in an intermediate reloading position on the clip-guiding rail, and with one of the clip-holding fingers being removed for clarity;

[0177] FIG. 133 is a fragmentary, enlarged, cross-sectional view of the distal portion of the shaft of the multiple-clip securing device of FIG. 112 with the clip pushing arm in the clip-loaded, ready-to-clip position, and with one of the clip-holding fingers being removed for clarity;

[0178] FIG. 134 is a fragmentary, enlarged, cross-sectional view of the distal portion of the shaft of the multiple-clip securing device of FIG. 112 with the clip pushing arm in a clipped position, the clip pushed off of the clip-guiding rail, before the clip exits the shaft, and with one of the clip-holding fingers being removed for clarity;

[0179] FIG. 135 is a fragmentary, enlarged, top plan view of a clip pushing arm of FIGS. 129 to 134;

[0180] FIG. 136 is a fragmentary, enlarged, perspective view of a distal portion of the clip-holding rail of the multiple-clip securing device of FIG. 112 showing an offset of an intermediate floor between two lateral walls;

[0181] FIG. 137 is an enlarged, perspective view of from proximal of a proximal end of the clip-holding rail of the multiple-clip securing device of FIG. 112 showing the chamfers at the proximal end that enable loading the clips thereon with an initially reduced stress;

[0182] FIG. 138 is a photograph of a fragmentary side view of a handle portion of an exemplary embodiment of a multiple-clip securing device with a right cover removed to reveal a power supply, a drop-in single circuit board with side-mounted switches to minimize a footprint of the electrically powered components, a multi-colored LED display, a clip-fire switch, a reload switch, and a motor and gearbox connected to a rack and pinion;

[0183] FIG. 139 is a fragmentary, side perspective view of a portion of the handle of FIG. 138;

[0184] FIG. 140 is a horizontal cross-sectional view of the handle of FIGS. 138 and 139 viewed from below to reveal an outer shaft sleeve, an inner clip movement tube, and the pinion and rack connected to a proximal portion of the clip movement tube;

[0185] FIG. 141 is a fragmentary, partially vertical cross-sectional, perspective view of an exemplary embodiment of a snare assembly having a movement body in a proximal

retracted position with respect to an interior body to place a snare in its most-retracted position yet still extending slightly out from a snare-guiding tube and a trombone-shaped snare guide path that, in the embodiment shown, provides an extension of the snare out from the snare-guiding tube to distance that is three times the length that the movement body traverse with respect to the interior body;

[0186] FIG. 142 is a fragmentary, partially vertical cross-sectional, perspective view of the snare assembly of FIG. 141 with the movement body in a distal position with respect to the interior body to place the snare in its distal-most extended position;

[0187] FIG. 143 is a fragmentary, vertical cross-sectional view of the snare assembly of FIG. 141 with the lockout in a first lockout state in which: the assembly can translate along the shaft from the handle to the distal end of the shaft while the canopy of the lockout rides in a groove of the shaft to key the interior body of the snare assembly in a fixed circumferential position about the shaft; and one or more side pontoons of the lockout prevent the movement body from moving with respect to the interior body to retain the snare within the snare assembly, and with the components internal to the outer shaft tube removed for clarity;

[0188] FIG. 144 is a fragmentary, vertical cross-sectional view of the snare assembly of FIG. 141 with the lockout in the first lockout state and just before a second lockout state in which the lockout pivots and a wider tail of the lockout enters a lower window of the shaft and the canopy remains within the groove of the shaft or can exit the groove, and with the components internal to the outer shaft tube removed for clarity;

[0189] FIG. 145 is a fragmentary, vertical cross-sectional view of the snare assembly of FIG. 141 with the lockout in a second lockout state in which the lockout pivots and: keeps the interior body circumferentially fixed, either the canopy remains within the groove or the canopy exits the groove while the tail enters the lower window of the shaft distal of the groove or both; and the side pontoons pivot down to no longer prevent the movement body from moving distally with respect to the interior body, thereby allowing the snare to exit, and with the components internal to the outer shaft tube removed for clarity;

[0190] FIG. 146 is a fragmentary, vertical cross-sectional view of the snare assembly of FIG. 141 with the lockout in the second lockout state in which the movement body has moved distally with respect to the interior body and a snare exits for snaring cords to be clipped, and with the components internal to the outer shaft tube removed for clarity;

[0191] FIG. 147 is a fragmentary, partially vertical cross-sectional, perspective view of the snare assembly of FIG. 143 about the shaft with the lockout in the first lockout state, and with the components internal to the outer shaft tube removed for clarity;

[0192] FIG. 148 is a fragmentary, partially vertical cross-sectional, perspective view of the snare assembly of FIG. 144 about the shaft with the lockout in the first lockout state, and with the components internal to the outer shaft tube removed for clarity;

[0193] FIG. 149 is a fragmentary, partially vertical cross-sectional, perspective view of the snare assembly of FIG. 145 about the shaft with the lockout in the second lockout state in which the movement body is free to move distally and, when moved distally, secures the interior body to this

distal-most position on the shaft, and with the components internal to the outer shaft tube removed for clarity;

[0194] FIG. 150 is a fragmentary, partially vertical cross-sectional, perspective view of the snare assembly of FIG. 146 about the shaft with the lockout in the second lockout state, and with the components internal to the outer shaft tube removed for clarity;

[0195] FIG. 151 is a fragmentary, enlarged, perspective view of a distal portion of the snare assembly of FIG. 141 illustrating the relative sizes of the groove and lower window of the outer shaft tube and the canopy and tail of the lockout;

[0196] FIG. 152 is a fragmentary, enlarged, partially vertical cross-sectional, perspective view of a distal portion of the snare assembly of FIG. 146 with the lockout in the second lockout state and with the movement body in a distal position with respect to the interior body and the snare extended for snaring cords to be secured;

[0197] FIG. 153 is a fragmentary, partially vertical cross-sectional, perspective view of a distal portion of the snare assembly of FIG. 143 with the lockout in the first lockout state and with the movement body in a proximal retracted position with respect to the interior body and with the snare in its most-retracted position extending slightly out from the guiding tube;

[0198] FIG. 154 is a horizontal cross-sectional view of a top portion of the handle of FIG. 98 viewed from the bottom to reveal a portion of the handle with magnet holding orifices for receiving magnets that retain the snare assembly at the handle and the snare assembly with a movable outer sleeve, magnet holding orifices for receiving magnets that retain the snare assembly at the distal end of the handle, and a lock-out subassembly including a pivoting lockout;

[0199] FIG. 155 is a vertical cross-sectional view of an exemplary embodiment of a multiple-clip securing device with a drop-in single circuit board with side-mounted switches to minimize a footprint of the electrically powered components, a multi-colored LED display, a clip-fire switch, a reload switch, a distal shaft, a motor and gearbox connected to a rack and pinion disposed in the shaft, and a snare assembly in a proximal-most position on the shaft;

[0200] FIG. 156 is a fragmentary, enlarged, vertical cross-sectional, perspective view of the snare assembly of FIG. 155 in an intermediate position on the shaft;

[0201] FIG. 157 is a vertical cross-sectional view of the multiple-clip securing device of FIG. 155 with the snare assembly at a distal position on the shaft before a snare is extended;

[0202] FIG. 158 is a fragmentary, enlarged, vertical cross-sectional, perspective view of the snare assembly of FIG. 157;

[0203] FIG. 159 is a fragmentary, enlarged, vertical cross-sectional, perspective view of the snare assembly of FIG. 158 with a snare extension handle removed;

[0204] FIG. 160 is a vertical cross-sectional view of the multiple-clip securing device of FIG. 155 with the snare assembly at the distal position on the shaft in a snare extended configuration, the snare not illustrated;

[0205] FIG. 161 is a fragmentary, enlarged, vertical cross-sectional, perspective view of the snare assembly of FIG. 160;

[0206] FIG. 162 is a vertical cross-sectional view of the multiple-clip securing device of FIG. 155 with the snare

assembly returned to the distal-most position on the shaft in a cord-snared configuration with a snared cord draped below the shaft;

[0207] FIG. 163 is a vertical cross-sectional view of the multiple-clip securing device of FIG. 162 with the cord-securing trigger depressed to secure the cord and the cut cords falling away from below the shaft;

[0208] FIG. 164 is a fragmentary, enlarged, partially vertical cross-sectional and perspective view of the snare assembly of FIG. 156 in an intermediate position on the shaft and with the snare and snare guide tube secured to the shuttle body with a Z-bend;

[0209] FIG. 165 is a fragmentary, enlarged, vertical cross-sectional view of the snare assembly of FIG. 164 in a distal position on the shaft with the snare guiding tube extended into the shaft;

[0210] FIG. 166 is an enlarged perspective view of an exemplary embodiment of a clip-sliding rail of the multiple-clip securing device of FIG. 155 and a set of clips thereon, one in a clip-securing position;

[0211] FIG. 167 is a fragmentary, side elevational and partially transparent view of a proximal securement-movement assembly of an exemplary embodiment of a multiple-fire securing device with a securement moving inner tube shaft in a retracted position and with a proximal handle not illustrated;

[0212] FIG. 168 is a fragmentary, side elevational and partially transparent view of the securement-movement assembly of FIG. 167 with the securement moving inner tube in an extended position;

[0213] FIG. 169 is a fragmentary, perspective and partially transparent view of the securement-movement assembly of FIG. 168;

[0214] FIG. 170 is a diagrammatic, longitudinally vertical cross-sectional view of an exemplary embodiment of a multiple-firing securement device having a motor-controlled mechanism that moves the inner tube shaft to grasp various securements installed on the guide rail at successively further distances on the guide rail from the securement-installing location and a mechanical lever that moves the entire inner tube shaft assembly distal to perform cutting; and

[0215] FIG. 171 is an enlarged, perspective view of an exemplary embodiment of a cord-securing clip in a steady state;

[0216] FIG. 172 is an enlarged, perspective view of the cord-securing clip of FIG. 171 in an expanded, ready-to-clip state;

[0217] FIG. 173 is an enlarged, front elevational view of another exemplary embodiment of a cord-securing clip in a steady state;

[0218] FIG. 174 is an enlarged, front elevational view of a further exemplary embodiment of a cord-securing clip in a steady state; and

[0219] FIG. 175 is an enlarged, front elevational view of still another exemplary embodiment of a cord-securing clip in a steady state.

DETAILED DESCRIPTION

[0220] As required, detailed embodiments of the systems and methods are disclosed herein; however, it is to be understood that the disclosed embodiments are merely exemplary of the systems and methods, which can be embodied in various forms. Therefore, specific structural

and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the systems and methods in virtually any appropriately detailed structure. Further, the terms and phrases used herein are not intended to be limiting; but rather, to provide an understandable description of the systems and methods. While the specification concludes with claims defining the features of the systems and methods that are regarded as novel, it is believed that the systems and methods will be better understood from a consideration of the following description in conjunction with the drawing figures, in which like reference numerals are carried forward.

[0221] In the following detailed description, reference is made to the accompanying drawings which form a part hereof, and in which are shown by way of illustration embodiments that may be practiced. It is to be understood that other embodiments may be utilized and structural or logical changes may be made without departing from the scope. Therefore, the following detailed description is not to be taken in a limiting sense, and the scope of embodiments is defined by the appended claims and their equivalents.

[0222] Alternate embodiments may be devised without departing from the spirit or the scope of the invention. Additionally, well-known elements of exemplary embodiments of the systems and methods will not be described in detail or will be omitted so as not to obscure the relevant details of the systems and methods.

[0223] Before the systems and methods are disclosed and described, it is to be understood that the terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting. The terms "comprises," "comprising," or any other variation thereof are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus. An element proceeded by "comprises . . . a" does not, without more constraints, preclude the existence of additional identical elements in the process, method, article, or apparatus that comprises the element. The terms "including" and/or "having," as used herein, are defined as comprising (i.e., open language). The terms "a" or "an", as used herein, are defined as one or more than one. The term "plurality," as used herein, is defined as two or more than two. The term "another," as used herein, is defined as at least a second or more. The description may use the terms "embodiment" or "embodiments," which may each refer to one or more of the same or different embodiments.

[0224] The terms "coupled" and "connected," along with their derivatives, may be used. It should be understood that these terms are not intended as synonyms for each other. Rather, in particular embodiments, "connected" may be used to indicate that two or more elements are in direct physical or electrical contact with each other. "Coupled" may mean that two or more elements are in direct physical or electrical contact (e.g., directly coupled). However, "coupled" may also mean that two or more elements are not in direct contact with each other, but yet still cooperate or interact with each other (e.g., indirectly coupled).

[0225] For the purposes of the description, a phrase in the form "A/B" or in the form "A and/or B" or in the form "at

least one of A and B" means (A), (B), or (A and B), where A and B are variables indicating a particular object or attribute. When used, this phrase is intended to and is hereby defined as a choice of A or B or both A and B, which is similar to the phrase "and/or". Where more than two variables are present in such a phrase, this phrase is hereby defined as including only one of the variables, any one of the variables, any combination of any of the variables, and all of the variables, for example, a phrase in the form "at least one of A, B, and C" means (A), (B), (C), (A and B), (A and C), (B and C), or (A, B and C).

[0226] Relational terms such as first and second, top and bottom, and the like may be used solely to distinguish one entity or action from another entity or action without necessarily requiring or implying any actual such relationship or order between such entities or actions. The description may use perspective-based descriptions such as up/down, back/front, and top/bottom. Such descriptions are merely used to facilitate the discussion and are not intended to restrict the application of disclosed embodiments. Various operations may be described as multiple discrete operations in turn, in a manner that may be helpful in understanding embodiments; however, the order of description should not be construed to imply that these operations are order dependent.

[0227] As used herein, the term "about" or "approximately" applies to all numeric values, whether or not explicitly indicated. These terms generally refer to a range of numbers that one of skill in the art would consider equivalent to the recited values (i.e., having the same function or result). In many instances these terms may include numbers that are rounded to the nearest significant figure.

[0228] It will be appreciated that embodiments of the systems and methods described and/or shown herein may be comprised of one or more conventional processors and unique stored program instructions that control the one or more processors to implement, in conjunction with certain non-processor circuits and other elements, some, most, or all of the functions of the powered injector devices described and/or shown herein. The non-processor circuits may include, but are not limited to, signal drivers, clock circuits, power source circuits, and user input and output elements. Alternatively, some or all functions could be implemented by a state machine that has no stored program instructions, or in one or more application specific integrated circuits (ASICs) or field-programmable gate arrays (FPGA), in which each function or some combinations of certain of the functions are implemented as custom logic. Of course, a combination of these approaches could also be used. Thus, methods and means for these functions have been described herein.

[0229] The terms "program," "software," "software application," and the like as used herein, are defined as a sequence of instructions designed for execution on a computer system. A "program," "software," "application," "computer program," or "software application" may include a subroutine, a function, a procedure, an object method, an object implementation, an executable application, an applet, a servlet, a source code, an object code, a shared library/dynamic load library and/or other sequence of instructions designed for execution on a computer system.

[0230] Herein various embodiments of the systems and methods are described. In many of the different embodiments, features are similar. Therefore, to avoid redundancy,

repetitive description of these similar features may not be made in some circumstances. It shall be understood, however, that description of a first-appearing feature applies to the later described similar feature and each respective description, therefore, is to be incorporated therein without such repetition.

[0231] Described now are exemplary embodiments. Referring now to the figures of the drawings in detail and first, particularly to FIGS. 1 to 35, there is shown a first exemplary embodiment of a multiple-firing crimp device 1. FIG. 1 shows an end effector of the multiple-firing crimp device 1 with a crimp assembly in a position ready to load a first crimp. From the center to the exterior of the crimp assembly, the innermost structure is a snare 10. In an exemplary embodiment, the snare 10 is laser cut out of a sheet of Nitinol or is a Nitinol wire and is heat set in a snare shape. Exemplary heat-set embodiments are shown in FIGS. 36 to 38. The snare 10 has a very low profile sufficient to fit, as shown in FIG. 1, within a hollow tube having an inner diameter of approximately 0.025". A contained area or loop 12 is formed in the snare 10 to provide a large opening in which the user threads the cords to be connected together (e.g., ends of a surgical suture). For example, the loop 12 is approximately ovoidal with a major axis approximately 1.25" long and a minor axis approximately 1" long. The snare 10 is formed with a distal tip 14 that is described in further detail below. Herein, various snares are described and shown and are equally applicable to temporarily secure a cord or cords. Shapes of the snares described and/or shown herein are not exclusive and are not to be taken as the only shapes and/or configurations possible for snaring a cord/cords. Shapes can include closed or open loops, hooks, curves, or other shapes.

[0232] Surrounding the snare 10 is a crimp carriage 20. The crimp carriage 20 has a central lumen 22 with an inner diameter of approximately 0.025" to house therein the snare 10. One or more of the inner surface of the central lumen 22 and the snare 10 is lubricious so that the snare 10 can move out from and back into the central lumen 22 with little friction and without catching. As the snare 10 exits the central lumen 22, the loop 12 expands and forms its heat-set shape after the entirety of the loop 12 exits the distal end of the central lumen 22 (see, e.g., FIGS. 36 to 38). The outer surface of the crimp carriage 20 has an exterior thread 24. This exterior thread 24 is described in further detail below with regard to the crimps 30 and has a shape corresponding to an interior thread 32 of each crimp 30. As such, the length of the exterior thread 24 can be as long as the crimp carriage 20 but it can also be only as long as is needed to thread the desired number of crimps 30 thereon in series. Five of the crimps 30 are illustrated as threaded onto the crimp carriage 20 in FIG. 1 but the threads are only shown diagrammatically in FIG. 1 within one crimp 30 and half of a second crimp 30 (this is done for illustration purposes only). These threads are present on the crimp carriage 20 at least for the length of all of the crimps 30 that are to be loaded on the carriage 20. Alternatively the carriage can be smooth and have the crimps stacked up on it with a retention feature disposed on the end of the carriage that prevents the crimps from falling off the end of the carriage. In such an embodiment, the crimps are biased toward the retention feature by a slide that is, itself, biased distally by a compression spring. The slide has a mechanism that only allows it to slide distally along the carriage. In this way, the crimps are

advanced into position and, once the distal-most crimp is moved into the ready position, the stack of remaining crimps index forward moving the next crimp into position.

[0233] Surrounding the crimp carriage 20 at the distal end of the device is the end effector body 40, which is best seen in FIGS. 17 to 22. The end effector body 40 defines a crimp loading orifice 42 in which a crimp 30 is loaded and, when loaded, is ready for firing. FIG. 1 does not show a crimp 30 in a loaded crimping position. A crimping device 50 is disposed at the orifice 42 and, in the exemplary embodiment shown, is positioned on opposing sides of the orifice 42. More particularly, an anvil 52 is present on one side of the orifice 42 and a hammer 54 is present on the other side of the orifice 42 opposite the anvil 52. The anvil 52 can be of a different material than the end effector body 40 or it can be integral with the end effector body 40. A cutting assembly 60 is also present at the end effector body 40. The cutting assembly 60, in the exemplary embodiment shown, includes a cutter 62 that is biased in a non-cutting position (shown) by a non-illustrated spring, for example. The cutter 62 is moved (e.g., rotated) by a cutter push-rod 64, 66 that extends back to the handle 100 of the multiple-firing crimp device 1; the handle 100 is diagrammatically shown in FIG. 3, for example, and is actuated by any number of actuation mechanisms, such as a motor, a relay, a lever, and/or a rack-and-pinion. To bias at least one of the movement assemblies in a proximal direction, a bias device 3 is provided and is diagrammatically shown in the handle 100 adjacent the movement assemblies. In this example, the bias device 3 is a spring.

[0234] An outer tube 70 surrounds the end effector body 40 and surrounds at least part of the cutting assembly 60 as it moves distal and proximal with respect to the end effector body 40. Also disposed within the outer tube 70 is a suture lifter 80, which is explained in further detail below.

[0235] To explain how the multiple-firing crimp device 1 operates, reference is made to the progression of FIGS. 2 through 31. The multiple-firing crimp device 1 comes pre-loaded to the user with a number of crimps 30 on the crimp carriage 20. This number is sufficient to accomplish a particular procedure. For example, if a heart valve replacement is the procedure and there are nine, twelve, or fifteen sutures needed to fix the replacement heart valve within the native valve orifice (this assumes an even spacing on a tri-leaflet valve), then the crimp carriage 20 will be fitted with nine, twelve, or fifteen crimps 30 (e.g., six crimps 30 are shown on the crimp carriage 20 in FIG. 4).

[0236] When the multiple-firing crimp device 1 is loaded with crimps 30 and is ready to use, the movement devices of the various loading/retracting, crimping, and cutting sub-assemblies within the handle 100 will be at a first rest or start position. These assemblies are shown diagrammatically within FIGS. 3, 5, 7, 9, 11, 12, 16, 20, 24, 26, 29, and 31. Ways that each of the movement sub-assemblies can actuate the various tasks of the multiple-firing crimp device 1 include any combination of levers, motors, relays, and other mechanical structures, such as a rack-and-pinion. Thus, they are not described in further detail. Here, each of the movement sub-assemblies includes a movement spool as an exemplary structure for actuating the assembly, each of which will be identified when the particular movement assembly is referenced herein. Spools are used to allow for longitudinal translation with free rotation.

[0237] When the multiple-firing crimp device 1 is loaded with crimps 30 prior to use, as shown in FIGS. 2 and 3, the crimp carriage 20 is retracted proximally out of the end effector body 40. Thus, the carriage spool 29 is in the furthest retracted position (i.e., proximal or closest to the user). In this state, the cutter 62 is retracted and the hammer 54 is in its steady or resting state away from the anvil 52. Significantly, no crimp 30 is loaded within the crimp orifice 42. In this state, the snare 10 is also retracted with the crimp carriage 20 and, therefore, the snare spool 19 is in the furthest retracted position as well.

[0238] To load the multiple-firing crimp device 1 with a crimp 30 and make it ready for use, the crimp carriage 20 is extended distally. This is done by placing the carriage spool 29, along with the snare spool 19, in the position shown in FIG. 5. In this step, the snare spool 19 can be free-floating because the carriage spool 29 (having a shaft within a shaft attached to the snare spool 19) forces the snare spool 19 distally as far as the carriage spool 29 is moved. To secure the distal-most crimp 30' within the crimp orifice 42, the head 34 of the soon-to-be-loaded crimp 30' must pass the distal ends of the hammer 54 and the anvil 52, a state that is shown in FIG. 4. To describe how the crimp 30' is loaded into the crimp orifice 42 and held there, it is beneficial to first describe an exemplary embodiment of a crimp 30, which is shown in FIGS. 32 and 33. To thread the crimp 30 onto the externally threaded crimp carriage 20, the crimp 30 defines a bore having internal threads 32 corresponding to the external threads 24 of the crimp carriage 20. In this way, each crimp 30 can simply be placed in loading position at the distal end of the crimp carriage 20 and rotation of the crimp carriage 20 in a particular direction serially loads each crimp 30 thereon one after the other, as shown, for example, in FIG. 1. To prevent the crimps 30 from rotating while the crimp carriage 20 is rotating, each crimp 30 has a head 34 formed with at least one polygonal surface 36. The end effector body 40 has a corresponding shape to the polygonal surface that acts as a structure to keep each crimp 30 aligned therewithin and prevent rotation of the crimp 30. The crimp 30 has various advantageous characteristics. First, its shape delivers the highest clamp force density. Next, it presents a closed profile that houses the cord(s) therein. Finally, it is easily deformed to restrain the cord(s) therein in a reliable and secure manner.

[0239] Once the crimp carriage 20 is retracted from the crimp 30', it would, without more, rest within the crimp orifice 42 and, potentially, could fall out with movement of the multiple-firing crimp device 1. Accordingly, to positively lock the crimp 30' within the crimp orifice 42, each crimp 30 is provided with a catch 38, which can take any shape and, in the exemplary embodiment shown, is a transverse groove or cut adjacent a proximal side of the head 34 (the top side of the head 34 in the view of FIG. 33). The catch 38 can be any shape or structure and need not be the shape depicted in the figures. The catch 38 can be a hole or other depression but it can even be an extension such as a protruding boss. To effect a catch-and-securement of the crimp 30' within the crimp orifice 42, the hammer 54 is provided with a distal feature 56 having a shape that, when aligned with the catch 38, mates therewith. See, e.g., FIG. 6A. In the exemplary embodiment, the distal feature 56 is a protruding nose having a longitudinal length shorter than the longitudinal length of the catch 38. In this way, when the head 34 of the crimp 30' passes the distal feature 56 and is then retracted

just slightly proximal, the distal surface of the distal feature 56 abuts the proximal surface of the head 34 and extension of the distal feature 56 into the catch prevents both proximal and distal movement. Thus, along with the polygonal surface 36, the crimp 30' is held in place in all dimensions as shown in FIGS. 6 and 6A. The distal end in FIG. 6A shows the interaction of the catch 38 and the distal feature 56 and the contact with both the distal faces of the hammer 54 and the anvil 52 to provide a proximal stop for the crimp 30'.

[0240] It is desirable to provide additional holding force on the crimp 30' to retain the crimp 30' therein. Accordingly, the hammer 54, which is shaped as a flex beam secured distally to the end effector body 40 at one or more contact points 58, has an interiorly extending section 53 that acts as a cam along the edge of the crimp 30'. As such, with the distal end 72 of the outer tube 70 preventing the intermediate portion of the hammer 54 from flexing outward, the remaining exposed portion 74 of the distal end of the hammer 54 flexes radially outward and, thereby, imparts a strong radially inward bias against the crimp 30'. The position of the crimp carriage 20 and the snare 10 in this state defines the corresponding positions of the carriage spool 20 and the snare spool 19 that are shown in FIG. 7.

[0241] Now that the crimp 30' is in position for use, in order to thread the cords into and through the hollow center of the crimp 30', the snare 10 is extended distally through the crimp 30' with the tip 14 of the snare 10 moving distally away from the distal end of the end effector body 40. As the tip 14 moves further distally, the loop 12 is permitted to open to its pre-set shape (e.g., heat-set), an example of which is shown in FIG. 8. Extension of the snare 10 occurs by moving the snare spool 19 distally away from the carriage spool 29, as shown in FIG. 9. At this point, the cords can be inserted through the loop 12 for entry into and through the crimp 30'. However, the crimp 30' is still attached to the crimp carriage 20. Accordingly, the crimp carriage 20 is rotated (by a non-illustrated device that spins the carriage spool 29, for example) to disengage the crimp 30' from the distal end of the crimp carriage 20. At the same time or either before or after, the crimp carriage 20 is moved distally out of the end effector body and is rotated further to cause the distal end thereof to move and place the previously second crimp 30" in line into the distal-most crimp position, thereby converting the second crimp 30" into the next crimp 30' to be used for the next crimping procedure. The depiction in FIG. 10 illustrates the end effector with the crimp carriage 20 entirely disengaged from the distal-most crimp 30' and retracted out of at least a portion of the end effector body 40 to not interfere with subsequent steps (even though it is shown completely out of the view of FIG. 10, this does not mean that such a distant retraction is required. It is sufficient if the carriage 20 is retracted sufficiently far enough to not interfere with subsequent steps prior to loading the next crimp 30'). The orientation of the snare and carriage movement sub-assemblies for this state is depicted with the positions of the snare spool 19 and the carriage spool 29 in FIG. 11.

[0242] In the example of FIG. 12, the free ends 2' of a looped cord 2 are passed through the loop 12 (from the left to the right in the drawing). At this point, the cords 2 are ready to be threaded through the crimp 30'. The snare 10 is drawn proximally to catch the cords 2 within the loop 12 and then in the tip 14, which, in an exemplary embodiment, forms a small extension area of the interior of the loop 12 in

which the cords 2 are moved as the loop closes and moves proximally. As the proximal end of the loop 12 is drawn proximally into the crimp 30', the loop 12 compresses flat, as in the orientation of FIG. 6, and the cords 2 are, then, folded in half and reside within the interior of the tip 14. Further proximal movement draws the cords 2 through the crimp 30' as depicted in FIG. 13. The looped ends of the cords 2 in the tip 14 are drawn in further proximally into the device as shown in FIG. 14 until the free ends 2' of the cords 2 enter the end effector body 40, as shown in FIGS. 15 and 17. The orientation of the snare and carriage movement sub-assemblies for this state is depicted with the positions of the snare spool 19 and the carriage spool 29 in FIG. 16.

[0243] Now that the cords 2 are through the crimp 30' and the ends 2' are pulled sufficiently far enough into the shaft of the device, the process for presenting these ends 2' to the user begins.

[0244] FIGS. 17 to 24 illustrate this process with an exemplary embodiment of a cord-lifting device 170, which is one possible way to present the ends 2' to a user. The cord-lifting device 170 is fastened to the end effector body 40 at a pivot 172 so that the cord-lifting device 170 is able to pivot away from the central axis of the outer tube 70. With this pivot 172, when the cord-lifting device 170 is actuated, the cord-lifting plate 174 pivots to lift the cords 2 out of the outer tube 70 through a window or lateral opening 171, as shown in FIG. 18. The lifting can be effected with any mechanism, for example, a push rod extending from the handle 100 and attached in an intermediate position of the cord-lifting plate 174 or extending adjacent the pivot 172 to connect to a lever that lifts the cord-lifting plate 174 when either pushed or pulled. This actuation device is not depicted for drawing clarity. At this point, the snare 10 still grasps the cords 2. Accordingly, either the snare 10 can move distally to keep retention of the cords 2, as shown in FIG. 18, or the snare 10 can remain in place and, as the cord-lifting device 170 lifts the cords 2 outwards, either the length of the cords 2 distal of the crimp 30' are pulled into the crimp 30' or the ends 2' of the cords 2 are caused to shorten their distance from the tip 14 of the snare 10. FIG. 19 illustrates the lifted cords 2 still attached to the snare 10 and the cord-lifting device 170 lifted. FIG. 20 illustrates the positions of the various movement sub-assemblies for this state.

[0245] As the snare 10 is pulled further distally, the ends 2' of the cords 2 become freed therefrom and now rest outside the outer tube 70 of the device. The user can, therefore, grasp these ends 2' and, after the cord-lifting device 170 is lowered, can pull them taut as shown in FIGS. 22 and 23. At this point, the snare 10 can be retracted in the device as shown in FIG. 24 by the position of the snare spool 19. Now, the crimp 30' can be installed/crimped/deformed on the cords 2.

[0246] Movement of the distal end of the device with respect to the opposite ends of the cords 2 held by the user (not illustrated but to the lower left of FIG. 23) will depend on the location that the user desires to fix the crimp 30'. If the current location is sufficient, then crimping will occur with the length of the cords shown to the lower left of FIG. 23 remaining as is. However, if the distance from the opposite ends of the cords 2 is desired to be short, then the user will move the device distally along the cords 2 while holding onto the free ends 2' and keeping them taut. If, for example, the cords 2 are surgical sutures and the opposite ends of the cords 2 are fixed at a surgical location, and if the

surgeon wishes to have the crimp 30' be applied as close to the surgical location as possible, then the top of the head 34 of the crimp 30' will be moved along the sutures distally and up against the surgical site. When there, with tension on the sutures, the surgeon can fix the crimp 30' at a location closest to the surgical site.

[0247] Crimping occurs by moving the outer tube 70 distally, which is indicated in FIG. 26 by the distal movement of the crimp spool 79. As the distance for crimping the crimp 30' is very short, the crimp spool 79 needs to only move a short distance distally. This movement can be caused manually by a lever, a toggle, or a button, for example, or by an electrical motor, such as a stepper motor. Crimping occurs by the outer surface 55 of the hammer 54 acting as a cam profile with the distal end of the outer tube 70. As the outer tube 70 moves distally parallel to the longitudinal axis of the device, the rising cam surface with respect to the outer tube 70 causes the hammer 54 to press inwards against the crimp 30' with a force sufficient to deform the crimp 30' and fix it to the cords 2, as shown in FIGS. 25, 34, and 35. In this state, the crimp 30' is crimped and, thereby, fixed to the cords 2 therewithin (shown diagrammatically with the dashed line in FIG. 35). For ease of visualization, FIG. 27 illustrates the hammer 54 in the crimping position without the crimp 30' present.

[0248] It is noted that the internal threads 32 of the crimp 30' provide additional friction and holding power when crimped onto the cords 2. The internal threads of the crimp can be adjusted to not be full depth threads. The threads also can be adjusted to optimize the ID of the crimp for clearance to pass the cords and snare as well as to present a less damaging but still gripping surface to the cords upon crimping. The catch 38 also provides crimp relief and length reduction for when the crimp 30' is squeezed. The distalmost section of the crimp 30' remains undistorted to provide a smooth transitional surface that the cords 2 can follow to prevent high stress that might damage the cords 2.

[0249] After crimping occurs, the lengths of the cords 2 on the proximal side of the fixed crimp 30' are to be trimmed off. The cutting assembly 60 described above is able to cut the cords 2 with a cutter pushrod having a relatively stiff proximal portion 64 and a relatively flexible distal portion 66 that is able to bend as the pivoting blade 62 moves (see, for example, FIG. 28). As such, cutting of the cords 2 occurs when an actuator at the handle 100 causes the proximal portion 64 to move distally. This, in turn, causes the distal portion 66 to move distally and, because it is fixed to the proximal side of the blade 62, causes the blade 62 to move about its pivot point and allow the cutting edge 68 to sever the cords 2. As the blade 62 is only required to move a very short distance, the distance that the cutting rod 64, 66 needs to move is also very short and is illustrated by the relative positions of the cutting spool 69 in FIGS. 26 and 29. It is noted that the outer tube 70 and tube spool 79 also move along with the cutting spool 69, but this movement is optional. In order to assure cutting is complete and the device is unobstructed for use of the next crimp 30, the cutting movement assembly is biased proximally (e.g., with a spring) to automatically retract the knife 62 after a cut is complete.

[0250] This cutting configuration of the cutter assembly 60 is merely one exemplary embodiment. Another embodiment can include a pusher that cuts the cords 2 by pressing the cords 2 against a fixed blade as described in further detail

below. A further embodiment can have the knife cut against a cut block or stop. Yet another embodiment can apply electric current to the knife and allow it to cut as a hot wire. In any case, it is desirable to have the knife cut close to location of the crimped crimp 30' to reduce the remaining length of the cords 2 extending from the end of the crimp 30 opposite the head 34.

[0251] Like the cutting movement assembly, the movement assembly for the outer tube 70 is biased proximally (e.g., with a spring, even the same spring as the cutting movement assembly) to automatically retract the outer tube 70 after a crimp 30' fixation is complete. In this way, the hammer 54 is allowed to spring back to its ready-to-crimp position when the outer tube 70 is disengaged.

[0252] An alternative to the loop 12 of the snare 10 is a hook needle configuration shown in FIGS. 39 to 41. Instead of the loop 12, the snare 10 has a hook 13 that is able to catch and hold the cords 2 as shown in FIG. 41. Like the loop 12, the hook 13 is pulled proximally until the ends 2' of the cords 2 release from the hook 13 and become loose for presentation to a user. The presentation can include the cord-lifting device 170, for example.

[0253] Another exemplary embodiment of a multiple-firing crimp device 200 is illustrated in FIGS. 42 to 56. In this multiple-firing crimp device 200, the crimp carriage 20 and the crimps 30 along with their respective movement sub-assemblies can be similar or identical to the previous embodiments described and shown. Thus, where identical structures are present, the same reference numerals may be used herein. Different structures, in contrast, have numbers with a prefix of two hundred. In the embodiment of FIGS. 42 to 56, the movement devices for placing and operating the snare 10 are included within a shuttle 280 that is movably displaced along the outer tube 270. In order to keep the shuttle 280 rotationally aligned in one orientation about the outer tube 270, the shuttle 280 and the outer tube 270 contain an alignment structure that can take many forms. One possible form is a tongue-and-groove in which one of the shuttle 280 and the outer tube 270 has the groove and the other has the tongue. A further alignment device can attach a secondary tube or rod 570 to the bottom of the outer tube 270 and form a rail upon which a corresponding longitudinal orifice in the shuttle 280 slidably resides. In such a configuration, the cross-section of the outer tube 270 and rail can take the shape of an "8" (as shown in FIG. 57). The rail can have a different diameter than the diameter of the outer tube 270, for example, it can be smaller. Alternatively the outer tube 270 can have a non-round profile such as an oval or a hexagon. It is noted that all of the features of the handle 100 need not be illustrated and, therefore, only a diagrammatic portion of the handle 100 is shown.

[0254] The process for completing a crimp installation is described and/or shown in the transition from FIGS. 42 through 56, in which the various parts are introduced. The steps of loading the crimp 30' into the end effector body 240 and then withdrawing the crimp carriage 20 proximally for crimping is not repeated or shown here for the sake of brevity. In these figures, the crimp 30' has already been set into the end effector body 240 and is ready to be used and crimped on cords 2.

[0255] In FIG. 42, the manually actuated shuttle 280 is in a fully retracted position, in which position the steps of loading the crimp 30' into the end effector body 240 and then withdrawing the crimp carriage 20 proximally occurs.

Accordingly, the first crimp 30' is in a position for use. FIG. 43 illustrates the shuttle 280 moving distally towards the end effector body 240. In both the fully retracted and intermediate positions almost to the distal end of the outer tube 270 (see FIGS. 44 to 48), a snare-extension tube 212 resides outside the outer tube 270.

[0256] The shuttle 280 includes a snare-aligning assembly 282 and a snare-movement assembly 290, both of which are illustrated, for example, in FIG. 44. The snare-aligning assembly 282 pivots the snare-extension tube 212 into and out of alignment with the central axis of the outer tube 270 so that the distal end of the snare-extension tube 212 can be placed adjacent or even enter the longitudinal cavity of the crimp 30' from the proximal side and, thereby, allow extension of the snare 210 directly through the crimp 30'. The pivot of the snare-aligning assembly 282 is disposed approximately at the midpoint of a vertical height of the shuttle body 281 and, because the outer tube 270 is present in these figures, the pivot is obscured from view. The pivoting action can be seen in the transition from FIG. 48 to 49. The snare-aligning assembly 282 is biased with a force from a bias device 283 that presses the snare-extension tube 212 downwards against the outer surface of the outer tube 270. In this manner, the outer surface of the outer tube 270 acts as a cam surface to the snare-extension tube 212.

[0257] Additionally, the snare-aligning assembly 282 also has a lock-out arm 284 extending proximally from the bias device 283 and residing in a pocket 291 of the snare-movement assembly 290. The lock-out arm 284 has a proximal surface that opposes the distal-facing interior surface of the pocket 291 and, when the proximal end of the lock-out arm 284 is disposed in the pocket 291, the proximal surface prevents distal longitudinal movement of a snare-extender slide 292 until the lock-out arm 284 exits the pocket 291. In this manner, until the snare-aligning assembly 282 is able to pivot the snare-extension tube 212 into alignment with the crimp 30', the snare-extender slide 292 is longitudinally fixed from moving distally.

[0258] FIGS. 46 and 47 illustrate the longitudinal positions of the shuttle 280 on the outer tube 270 at which the pivoting movement of the snare-aligning assembly 282 is made possible, which movement unlocks the snare-extender slide 292. FIGS. 48 and 49 are close-up views of the shuttle 280 in its respective positions in FIGS. 46 and 47. Movement of the snare-extension tube 212 is dependent upon the exterior surface of the outer tube 270. Accordingly, to allow the distal end of the snare-extension tube 212 to align with the lumen in which the crimp carriage 20 travels, the outer tube 270 has a longitudinal slot 272. The shape of the slot 272 acts as a track to guide and insert the distal end of the snare-extension tube 212 up to or into the proximal end of the crimp 30'. As such, when the shuttle 280 passes the position on the outer tube 270 shown in FIG. 48, the snare-extension tube 212 enters the slot 272 and drops against and into the inner carriage lumen 271 of the outer tube 270, as shown in FIGS. 49 and 50. When this dropping movement occurs, the pivot of the snare-aligning assembly 282 is complete and the lock-out arm 284 no longer impedes distal movement of the snare-extender slide 292. In this state, the distal opening of the snare-extension tube 212 is axially aligned with the center of the crimp 30'.

[0259] Also revealed in detail in FIGS. 48 and 49 is the crimp carriage 20 carrying a set of crimps 30. In these views, eighteen crimps 30 are illustrated. This number, however, is

only exemplary and the number can be as little or as great as desired dependent upon the procedure being carried out. In these figures, the carriage lumen 271 has the polygonal shape to keep the crimps 30 aligned but this keying feature is not illustrated.

[0260] With the snare-extender slide 292 unlocked for distal movement, extension of the snare is now made possible. The snare 210 is different from the above embodiments in that the distal end is no longer connected to the handle 100. Here, in contrast, the snare 210 is connected, at its proximal end, to a tab 293 that is fixed to or integral with the snare-extender slide 292. As such, the longitudinal length of the snare 210 (or its movement shaft) is significantly shorter than those in the previous embodiments. In this manner, when the snare-extender slide 292 moves distally, the snare 210 also moves distally. In these figures, the distal portion of the snare with the loop 12 and the tip 14 are within the snare-extension tube 212 but are hidden for clarity. As the snare 210 is relatively flexible and could possibly buckle when pushed distally out of the snare-extension tube 212, a non-illustrated support tube (typically polymer based) surrounds the proximal portion of the snare 210 within the shuttle body 281. This support tube can be attached to or be integral with the snare-extender slide 292. The length of the support tube should be such that the distal end of the support tube is not able to be freed from the proximal end of the snare-extension tube 212, thus keeping the two always aligned and preventing exit of the snare 210 from either.

[0261] The snare 210 can now be extended, as shown in FIGS. 51 and 53. As the snare-extender slide 292 moves distally, the distal end of the snare 210 emerges from inside the crimp 30' and finally exits to the environment distal of the shuttle 280 so that the loop 12 opens to define an area into which the cords 2 are inserted, as shown in FIGS. 52 and 54. In FIGS. 51 to 54, the tip 14 of the snare 210 is not illustrated for clarity.

[0262] It is undesirable for the shuttle 280 to move longitudinally in any way while the snare 210 is moving distally from the position shown in FIGS. 49 and 50. Accordingly, movement of the shuttle body 281 is locked when the snare-extender slide 292 moves. Such a movement prevention device is not illustrated in FIGS. 42 to 56, but there is one shown in FIG. 60, in which a spring clip 590 engages an opening in the shaft 270 (or 570) when the shuttle is in its distal-most, snare-extending position. The motion of the spring clip 590 into the opening frees the snare-extender slide 292, allowing it to now move distally while simultaneously locking the shuttle 280 in the snare-extending position.

[0263] Once the cords 2 are inserted into the exposed and expanded loop 12 of the snare 10, retraction of the cords 2 through the center of the crimp 30' is now possible. To effect this retraction, the user moves the snare-extender slide 292 proximally, in which position all but the tip 14 of the snare 210 is retracted back into the shuttle body 281, as shown in FIGS. 57 and 153. The orientation of the tip 14 while the snare-extender slide 292 is in its proximal-most position is illustrated in FIGS. 57 and 153. At this point, a portion or all of the free ends of the cords 2 are still within the end effector body 240 or are distal of the crimp 30' while the cords 2 are threaded through the tip 14. Now that the snare-extender slide 292 is proximal, proximal movement of the shuttle body 281 becomes possible given the fact that the spring clip

590 is free to flex back to its home position outside the opening in the shaft 270, 570 (because the interlock holding the shuttle body 281 has disengaged). The user continues retraction of the shuttle 280 with the snare and the coupled cords 2 proximally until the free ends 2' pass entirely through the crimp 30', exit the shaft through slot 272, completely shorten, and finally exit the tip 14, as is shown in the transition from FIG. 55 to FIG. 56.

[0264] At this point, the user is presented with the free ends 2' outside the outer tube 270 and is now able to manually pull the free ends 2' of the previously snared cords 2 tight and place the crimp 30' adjacent to the distal loop of the cords 2 (not illustrated but to the left of FIG. 56) where crimping is to take place. While pulling tightly on the free ends 2' of the cords 2, the user can place the distal end of the device where the crimp 30' is being held at a cord-fixing location. Actuation devices of the handle 100 (as described above) cause the crimp 30' to compress on and fix the cords 2 together and, thereafter or simultaneously, also cut the cords 2 just proximal of the crimped crimp 30'. The shuttle 280 is moved to its start position shown in FIGS. 42 and 44, thereby placing the device in a position to load the next crimp 30" into the crimp orifice 42.

[0265] The snare 10 is secured at its proximal end to the snare-extender slide 292 (e.g., at tab 293) positioned adjacent the proximal end of the shuttle 280. Because the travel distance of the snare-extender slide 292 is greater than or equal to the length of the snare that is to extend outward from the shuttle 280 in the distal direction, the shuttle 280 must have a longitudinal length that is dependent upon and is at least as long as the length of that snare. In other words, the extension of the snare 10 by the snare-extender slide 292 is 1:1. If the length of the shuttle 280 requires it to have significant weight or to have a length that is greater than is needed, it would be desirable to provide an assembly that permits a greater than 1:1 ratio and reduces the longitudinal length and/or weight.

[0266] In the embodiments of FIGS. 58 to 74, the movement devices for placing and operating the snare 10 are included within a shuttle 580 that is movably displaced along the outer tube 270. This shuttle 580 is able to be shorter and lighter than the shuttle 280. To keep the shuttle 580 rotationally aligned in one orientation about the outer tube 270, the shuttle 580 and the outer tube 270 contain an alignment structure that can take many forms. One possible form is a tongue-and-groove in which one of the shuttle 580 and the outer tube 270 has the groove and the other has a tongue. A further alignment device can attach a secondary tube or rod 570 to the bottom of the outer tube 270 and form a rail upon which a corresponding longitudinal orifice in the shuttle 580 slidably resides. In such a configuration, as shown in FIG. 58, the cross-section of the outer tube 270 and the rail 570 takes the shape of an "8". As above, the rail 570 can have a different diameter than the diameter of the outer tube 270, for example, it can be smaller. It is noted here that all of the features of the handle 100 need not be illustrated here and, therefore, the handle 100 is omitted.

[0267] The shuttle 580 depicted in FIGS. 58 to 74 provides a snare extension to slide movement length in a ratio that is greater than 1:1 and, at the same time, reduces the longitudinal length and weight of the shuttle 580. These features are provided by removing the longitudinal tube fixed to the snare-movement slide and replacing it with a rack-and-pinion snare-movement assembly having the snare wrapped

around a snare discharge spool. In this shuttle **580** for the multiple-firing crimp devices herein, the crimp carriage **20** and the crimps **30** along with their respective movement sub-assemblies can be similar or identical to the previous embodiments described and shown. Thus, where identical structures are present, the same reference numerals will be used herein. Different structures, in contrast, will have numbers with a prefix of five hundred.

[0268] FIGS. **58** and **59**, respectively, depict the shuttle translating from a retracted position against the handle **100** to an extended position where the snare-extension tube **512** drops into the slot **272** of the outer tube **270**. FIGS. **60** to **62** illustrate the shuttle **580** in a state where the snare-extension tube **512** has not reached the slot **272** and, therefore, still remains against the outer surface of the outer tube **270**. In comparison, FIGS. **63** to **65** illustrate the shuttle **580** in a state where the snare-extension tube **512** has dropped into the slot **272** and is ready to extend the snare within the outer tube **270** through the crimp **30'** (which is not illustrated here). All of the steps for aligning the snare-extension tube **512** are the same as above and, therefore, the details of which are not repeated here.

[0269] The body **581** defines an interior snare spool cavity **582** in which a snare spool **583** and a pinion **584** rotatably reside. The snare spool **583** is rotationally fixed to the pinion **584** so that rotation of the pinion **584** results in a corresponding rotation of the snare spool **583**. The snare spool **583** is illustrated in cross-section in FIG. **63**. The body **581** also defines an interior rack cavity **585** in which a rack **586** resides for longitudinal movement within the rack cavity **585**. A distal end of the rack **586** is fixed to the snare-extender slide **292**, for example, it is pinned thereto at point **587**. The snare **10**, which is not illustrated in FIGS. **59** to **68** for purposes of clarity, has a proximal end that is pinned to the snare spool **583**. In an exemplary embodiment of the snare spool **583** in FIG. **63**, the snare spool **583** has a radial bore extending radially inwards from a spool outer contact surface. The distal end of the snare **10** is positioned inside the bore and is fixed there, for example, with a set screw or pin. The snare **10** is then wound around the snare spool **583** (e.g., counterclockwise with respect to FIG. **63**) on the spool contact surface and is threaded into the snare-extension tube **512**. The spool sides are raised to have a diameter greater than a diameter of the spool contact surface to keep the snare **10** from sliding off the snare spool **583** laterally.

[0270] With such a configuration, as the snare-extender slide **292** is moved distally by the user, the rack **586** moves distally as well, thereby rotating the pinion **584** and the snare spool **583**. Because the diameter of the pinion **584** is smaller than the diameter of the snare spool **583**, the pinion **584** acts as a speed increasing gear to enable a larger movement of the snare spool **583** and, thereby, a length of the snare **10** that is wound about the snare spool **583**. In particular, the overall length of the snare **10** is set to position the tip **14** just outside the distal end of the snare-extension tube **512** when the snare-extender slide **292** and the rack **586** are in their proximal-most, unactuated position (shown in FIG. **63**). This tip **14** position is shown, for example, in FIG. **57**. As the rack **586** moves distally, the snare spool **583** unwinds the snare **10** (e.g., in a counterclockwise direction with regard to FIG. **63**) and extends the snare **10** out from the distal end of the snare-extension tube **512**. FIGS. **66** to **69** show the snare-extender slide **292** (and, therefore, the rack **586**) extended distally to the fullest extent to, thereby, move the

non-illustrated snare **10** out from the distal face of the shuttle **580**. With the gearing shown, an approximately one inch (1") movement of the rack **586** causes approximately two and one-half inches (2.5") of snare **10** extension out from the distal end. Thus, the overall length of the shuttle **580** can be reduced significantly.

[0271] As indicated above, it is desirable to prevent the shuttle body **581** from movement when the shuttle **580** is in a position where the snare **10** is to be moved. Various retaining features can be provided. One example of this retaining feature is a body interlock **590**. In this example, the body interlock **590** is a leaf spring with an extension **593** that rides along the bottom surface of the guide rod **570** as the shuttle **580** moves and, when the shuttle **580** is in a position where snare **10** movement is permitted, a port **592** in the guide rod **590** is located to catch the extension **593** of the body interlock **590** therein and substantially prevent longitudinal movement of the shuttle **580** on the outer tube **270**. Once the leaf spring of the body interlock **590** is allowed to move into the port **592**, the free end **591** of the body interlock **590** moves out of the way of the extender slide **292**, allowing the extender slide **292** to move distally. It is noted that the wrap-around extender slide **292** embodiment of FIGS. **58**, **59**, **66**, and **70** to **74** entirely wraps around the shuttle body **581**. In this configuration, the free end **591**, is able to positively engage the extender slide **292** and prevent movement. In contrast, the exemplary embodiment of the short extender slide **292** in FIGS. **60** to **65** and **67** to **69** does not wrap around to the bottom surface of the shuttle body **581**. Thus, the configuration of the body interlock **590** would not engage the short extender slide **292**. For the short extender slide **292** in FIGS. **60** to **65** and **67** to **69**, the body interlock **590** would be positioned behind the shaft **270**, **570** in the figures and, therefore, would not be visible in these figures. Accordingly, the body interlock **590** is left at the lower surface of the shuttle body **581** for purposes of clarity only.

[0272] Once the extender slide **292** has moved any distance distally, it forcibly holds the leaf spring of the body interlock **590** in the port **592** thereby locking the shuttle **580** into the shuttle's distal-most position. When the extender slide **292** is returned to its proximal position (e.g., FIG. **60**), the body interlock **590** remains engaged in the port **592**. As the body interlock **590** is a leaf spring with ramps on either side of the extension **593**, a sufficient force by the user to move the shuttle **580** proximally, overcomes the interlock and slides the extension **593** out from the port **592**. In action, the body interlock **590** acts as a removable detent that provides sufficient force to retain the shuttle **580** in position when snare functions occur but that is insufficient to prevent retraction movement of the shuttle **580** by a force imposed by the user.

[0273] When the devices described and/or shown herein are used in surgery, the location where the snare **10** is to capture cords **2** (e.g., sutures), is typically within a surgical site. Even though there is light from the surgical environment, many obstacles present shadows where the snare **10** is located during use. The color and size of the snare **10** also can make it difficult for a surgeon to see the snare **10** within the background of the surgical site. To alleviate this issue, the shuttle body **581** is provided with a distal headlight assembly **550**. One or both of the sides of the shuttle body **581** is hollowed out and provided with a cover **551** to contain parts of the headlight assembly **550**, as shown in

FIGS. 70 to 74. The cover 551 is made transparent in FIG. 71 to show thereunder a power supply 552 (in the form of one or more coin cells) and a headlamp switch 553, which is, in this exemplary embodiment, a micro-switch having the switch on a proximal side thereof with the body of the micro-switch positioned flush with an end-of-travel surface 710 of the shuttle body 581 for the snare-extender slide 292 and with the switch plunger projecting distally from the end-of-travel surface 710. In such a configuration, when the snare-extender slide 292 reaches a point where the snare 10 is extended for snaring one or more cords (as shown in FIG. 74), the switch automatically depresses, thereby turning on the headlamp 554, which can take the form of one or more LEDs, for example. In this configuration, the headlamp 554 remains on until the snare-extender slide 292 is retracted proximally, in which case the snare 10 is within the shuttle 580 and has captured the one or more cords 2.

[0274] The shuttle body 581 is not limited to the shapes shown hereinabove. There are other configurations in which various characteristics are maximized or minimized. FIGS. 75, 75A, and 75B illustrate an exemplary embodiment of a shuttle body that allows the snare-extender tube to be relatively straight and positions the snare's exit from the snare spool from above the snare spool instead of below. FIGS. 76, 76A, and 76B illustrate an exemplary embodiment of a shuttle body configuration that removes some of the body material to lighten the shuttle and places the snare-extender slide only on the bottom half of the shuttle. A headlight assembly is also provided. The exemplary configuration in FIGS. 77, 77A, and 77B removes even more material from the shuttle body to further lighten the shuttle. The exemplary configuration of the left half of the shuttle body in FIGS. 78, 78A, and 78B is similar to the shuttle body embodiment of FIGS. 58 to 74 and shows differences in configuration, size, and material from the other shuttle bodies.

[0275] An exemplary embodiment of a handle 100 for the multiple-firing crimp device is illustrated in FIGS. 79 and 80, in FIG. 80, the carriage movement assembly is transparent to illustrate the structures therein. Within the handle 100 are various movement assemblies. Some of the movement assemblies are manual and some are automatic. As set forth herein, any of the automatic movement assemblies shown and described can be manual and any of the manual movement assemblies shown and described can be automatic. In this handle embodiment, the movement assemblies include a system control assembly 800, a carriage movement assembly 810, a carriage rotation assembly 820, a crimping assembly 840, a cutting assembly 860, a display assembly 880, and a force-measuring and indicating assembly 900.

[0276] The system control assembly 800 includes all circuitry sufficient to power and control all electronics on the multiple-firing crimp device. The system control assembly 800 is electrically connected to a power supply 802, which can be, for example, a pack of batteries, such as one or more CR2 or CR123 batteries. The power supply 802 can be powered by any electricity delivery measures including a supply mains.

[0277] The carriage movement assembly 810 includes a carriage conveyor 812 with a transparent cover that is best shown in FIG. 80. Also included in the carriage movement assembly 810 is a carriage motor 814 fixed to the handle 100 and rotating a conveyor spindle 816 that, when rotated, either moves the carriage conveyor 812 proximally or dis-

tally with respect to the handle body 102. The carriage conveyor 812 has a rotation sub-assembly 820 that, at its distal end, includes a coupler 824 that is rotationally and longitudinally fixed to the crimp carriage 20. As such, when the carriage conveyor spindle 816 rotates and causes the conveyor 812 to move proximally or distally, the crimp carriage 20 moves correspondingly with the coupler 824. In this regard, the carriage motor 814 is the device that positions the crimp(s) 30 towards and away from the crimp orifice 42 as well as positions the crimp 30' within the crimp orifice 42. Two non-illustrated limit switches are present in the carriage movement assembly 810 to define the extension and retraction limits of carriage conveyor 812 and, thereby, the crimp carriage 20.

[0278] The carriage rotation assembly 820 is part of the carriage movement assembly 810 and resides inside the carriage conveyor 812. The carriage rotation assembly 820 comprises a carriage rotation motor 822 and the coupler 824, which is rotationally fixed to the output of the carriage rotation motor 822. As such, when the carriage rotation motor 822 rotates, the crimp carriage 20 rotates to shuttle the crimps 30 and to withdraw from the crimp 30' within the crimp orifice 42. Electrical signals/power are supplied to the carriage rotation assembly 820 through a movable wiring harness 818 that is electrically connected to the main circuit board of the system control assembly 800.

[0279] The crimping assembly 840 includes a crimping motor 842 fixed to the handle body 102 and rotationally connected a crimping pinion 844. The teeth of the crimping pinion 844 mesh with teeth of a flying gear 846. The flying gear 846 has a central bore with an interior thread corresponding to an exterior thread of a crimping clutch 848. Movement and functionality of the crimping clutch 848 is described with regard to FIGS. 81 to 84. In particular, there are two states in which the outer tube 70, 270, 570 is to be moved. The first is slightly forward so that the hammer 54 is gently pressed against the crimp 30' to hold it within the crimp orifice 42 and to not deform the crimp 30', and the second is forward to have the hammer 54 actively deform and fully crush the crimp 30'. To provide the first function of gently pressing the crimp 30', a clutch bias 850 (in the exemplary form of a spring) is disposed between a distal end of the crimping clutch 848 and a point on the outer tube 70, 270 a distance away from the distal end of the crimping clutch 848. This point is defined by a clutch stop 852 that has a proximal vertical surface 854 intended to contact the distal vertical surface of the crimping clutch 848 and prevent it, after such contact, from moving independent of the outer tube 70, 270. The clutch stop 852 can be simply a radial extension from the outer surface of the outer tube 70, 270, such as an integral collar, which is not adjustable, or it can be an adjustable clutch stop 852, 854, 856 that is formed on or is integral with the outer tube 70, 270 and has, for example, exterior threads 852 and a nut 856 threaded thereon as shown in FIGS. 81 to 84. With the clutch bias 850 disposed between the distal vertical surface of the crimping clutch 848 and the proximal vertical surface of the nut 856, the crimping clutch 848 is able to move asymmetrically with respect to the outer tube 70, 270 as it compresses the clutch bias 850. In this regard, with the clutch stop 852 disposed just distal of the distal end of the crimping clutch 848 to define a clutch distance therebetween and the clutch bias 850 therearound this intermediate portion, as the crimping clutch 848 starts to move distally (as shown in the transition from

FIG. 81 to FIG. 82), the clutch bias 850 starts to compress and only moves the outer tube 70, 270 with a force that is proportional to the clutch bias 850. This force is set to be lower than the point at which the hammer 54 actually compresses the crimp 30'. In FIG. 82, for example, the crimping clutch 848 moves distally slightly (as compared to FIG. 81), compresses the clutch bias 850 and, thereby, moves the outer tube 70, 270, 570 distally but only with the force that compressed the spring. In the transition from FIG. 82 to FIG. 83, the crimping clutch 848 closed the distance and contacted the proximal vertical surface of the clutch stop 852. Because the spring of the clutch bias 850 has a coefficient less than a force able to compress the crimp 30', the spring is compressed without further movement of the outer tube 70, 270, 570 in this transition. However, after the crimping clutch 848 contacts the proximal vertical surface of the clutch stop 852, any further movement of the crimping clutch 848 corresponds to a 1:1 movement of the outer tube 70, 270, 570 and, thereby, causes movement of the outer tube 70, 270, 570 and crimping of the crimp 30'.

[0280] A limit switch 858 is present adjacent the crimping clutch 848 to determine when the crimping clutch 848 has reached it furthest distance from the flying gear 846 and indicates to the system control assembly 800 that the crimping motor 842 should be stopped and prevent further turning of the flying gear 846. Also, to prevent the crimping clutch 848 from rotating with respect to the handle body 102, a keying assembly 859 is provided. This keying assembly can take the form of a pin and slotted block, a tongue-and-groove, or any similar rotation-preventing device.

[0281] As is indicated, the crimping assembly 840 is automated with the various motors and gears. The crimping process is started by depressing a non-illustrated trigger button disposed in a button orifice 857 of the handle 100. When this button is pressed, crimping of the crimp 30' occurs. The crimping assembly 840 holds the crimp 30' down and waits to reset the next crimp 30" until there is confirmation that the cords 2 have been cut, at which time a new crimp 30' is transitioned to the crimp orifice 42. Associated with the cutting assembly 860 is a non-illustrated limit switch that indicates a position at which the cutting blade is known to be or past a point where the cords 2 could be on the cutting blade pushrod is known to be or past the cutting tip of a fixed blade. When this limit switch is triggered, the crimping assembly 840 retracts to the crimp-ready position. An exemplary embodiment of an end effector portion of the cutting assembly 860 having a moving pushrod and a fixed blade is explained below with regard to FIGS. 85 to 91.

[0282] Exemplary embodiments of a handle portion of the cutting assembly 860 are shown in FIGS. 81 to 84. With particular reference to FIG. 84, the handle portion of the cutting assembly includes a lever 862 with a kidney-shaped slot having, at a distal surface thereof, teeth 864 that are each disposed on a fixed radius from a pivot point 866 of the lever 862. Centrally fixed but rotatably disposed with respect to handle body 102 is a gear assembly 868 having a smaller gear interfacing with the teeth 864 and a larger gear interfacing with a rack 870. In this configuration with the smaller and larger gears of the gear assembly 868, closing the lever 862 onto the handgrip 104 of the handle 100 causes a distance-multiplied linear translation of the rack 870. The rack 870 is fixedly connected to the cutter push rod 64,

thereby effecting a distal displacement of the cutter push rod 64 when the lever 862 is closed.

[0283] An alternative embodiment to the rotating cutter described above is a linear cutter shown in FIGS. 85 to 91. FIGS. 85, 86, and 90 illustrate an end effector of a multiple-firing crimp device with a fixed blade 890 and a blade pushrod 892 in a fully retracted position and with the crimping assembly 840 in a non-cramping state, in other words, the outer tube 70, 270 is retracted. FIG. 87 shows the crimping assembly 840 in a crimped state with the outer tube 70, 270 extended to crimp the crimp 30'. FIG. 88 shows the blade pushrod 892 in a partially actuated state before cutting occurs. It is noted from the right side of FIG. 88 that the blade pushrod 892 is a tube that rides inside the outer tube 70, 270. To insure that the cords 2 are pressed against the fixed blade 890, the slot in which the cords 2 extend out the side of the outer tube 70, 270 narrows at a distal end 893 and terminates at the tip of the blade 890. FIGS. 89 and 91 show the blade pushrod 892 in a fully actuated state after cutting has occurred. (Due to limitations of the graphics software, the inwardly compressed hammer 54 in FIG. 91 is shown within the crimp 30'.)

[0284] The display assembly 880 is connected to the system control assembly 800 and, in this exemplary embodiment, is shown as an LED, which can be, for example, an RGB LED that can produce light in various colors; each distinct color (or even a flashing pattern) is able to indicate a particular function or status. The display assembly 880, in an alternative embodiment, can be an LCD or LED or OLED display panel that can produce any colors, text, video, or pictures indicating status or any other characteristic of the multiple-firing crimp device.

[0285] FIG. 92 shows a flow chart of a process for completing a crimping procedure with a multiple-firing crimp device described herein. In order to initialize the device, the outer tube and the crimp carriage are retracted. It is assumed that the crimps come preloaded on the crimp carriage before it is passed to a user. Of course, there can be a pre-initialization requirement that has the user load the crimp carriages with the crimps. Once initialized, the first crimp (the distal-most one) is advanced to the crimp loading orifice. The first crimp is secured at the crimp loading orifice by advancing the outer tube to gently press the hammer against the first crimp and hold it in the orifice. The crimp carriage is then rotated out from the first crimp (e.g., by a predefined number of turns) and further rotated to put the second crimp into a first crimp position at the distal end of the crimp carriage. The crimp carriage is moved proximally away from the end effector sufficiently far to prevent any interference with the crimping procedure into an idle position. The second crimp alignment can occur before, during, or after movement of the crimp carriage. As one crimp is no longer on the crimp carriage, the system can decrement a counter to keep track of the number of remaining crimps. At this point, the device is ready to use.

[0286] The user then carries out the manual steps of extending the snare, capturing the cord(s) within the snare, retracting the snare back to hold the cord(s), and then lifting the cord lifter or moving the shuttle proximally to present the end of the cord(s) outside the shaft of the device. The user grasps the exposed free end(s) of the cord(s) and pulls it/them taut. The end effector is then moved distally along the cord(s) to the place where the user desires to set the crimp. For example, where the cord is a surgical suture, the

crimp is desired at the surgical site with no length of the suture between the crimp and the tissue. In such a case, the user will move the end effector up against the tissue to make the crimp ready to be fixed, such as shown in FIGS. 95 to 97.

[0287] The automatic crimping can now occur. The user presses the crimp-start button (for example) and the outer tube is advanced to the distal position where the hammer crushes the crimp. The tube is held there in place distally until the cutting assembly is actuated to cut the free ends of the cord/suture at the proximal side of the fixed crimp. When the system indicates that cutting has completed (e.g., when the cutting stroke is sufficient to insure that cords have been cut), the cutting assembly retracts to its idle position and the outer tube also retracts to its idle position, during which the now-crimped first crimp is released from the end effector. Now, the device is in its state for the next crimping process to begin, which starts with advancing the crimp conveyor to load the next crimp.

[0288] The process for crimping a cord in the exemplary embodiment of a heart valve replacement surgery is described with regard to FIGS. 93 to 97. This process and the devices described and/or shown are not limited to such a surgery. This surgery, in contrast, provides a good example for explaining the methods and systems. A ring 1000 is used as a surrogate for an actual replacement heart valve in this exemplary embodiment. The surgical site, e.g., the aortic valve seat in a heart, is indicated with a surface 1010, for example, made of neoprene. In this example, three sutures 1020 have been employed to secure the ring 1000 at the surgical site 1010 by the multiple-firing crimp device 1 and a fourth suture 1022 is in the process of being secured at a surgical site 1001 (for illustrative purposes, the suture 1022 does not penetrate the surface 1010). An illustrative example of an installed crimp 30 can be seen on one of the sutures 1020 to the right of FIG. 93.

[0289] In the view of FIG. 93, the suture 1022 to be crimped is wrapped around the ring 1000 and has already been threaded: through the crimp 30' that is loaded in the orifice 42; through the end effector body 40, 240; through a portion of the outer tube 70; and out the lateral opening 171, 272 of the outer tube 70. The ends 2' of the suture are distal of the end effector body 240 and are being held by the surgeon (see FIG. 97). To secure the suture 1022 for crimping, the suture ends 2' are pulled taut and the multiple-firing crimp device 1 is slid down the suture 2 until the end effector body 40, 240 along with the crimp 30' (not shown) rests against the position where crimping is to take place, which state is shown in FIG. 94. At this point, if the suture ends 2' are held in place with respect to the multiple-firing crimp device 1, both the suture ends 2' and the multiple-firing crimp device 1 can be raised or lowered without putting force on the surgical site 1001. Raising of the suture ends 2' and the multiple-firing crimp device 1 is shown in FIG. 95. In this state where the two items are moved together, any force imposed on the surgical site by pulling of the suture ends 2' in direction D is being counteracted by and is equal to the force D' in the opposite direction, thereby resulting in a net zero force on both the multiple-firing crimp device 1 and on the surgical site 1001. What is desired to be known is the force in which the suture 1022 is being knotted at the surgical site 1001, in other words, the tying force. The tying force can be determined because any force D that is imparted on the suture ends 2' is imparted directly upon the end effector body 40, 240, which force is transmitted directly to

the handle 100 being held by the surgeon. Thus, if the distal end of the multiple-firing crimp device 1 is made to be movable with respect to the handle 100, then the exact amount of force D imposed by the surgeon on the suture ends 2' can be measured by placing the force-measuring and indicating assembly 900 between the distal end of the multiple-firing crimp device 1 and the handle 100.

[0290] In the exemplary embodiments described above and/or shown, the end effector body 40, 240 is grounded to the handle 100. The view of FIGS. 79 and 80 is suitable for understanding how the end effector body 40, 240 is grounded and the enlarged view of FIG. 97A is especially suitable for this purpose. Initially, it is noted that all of the internal components within the handle 100 are not individually connected to the handle 100. They are connected to a chassis 801 that actually is transparent in FIGS. 79 to 84 and 97 but is visible at least by its exterior lines. All of the components are connected to the chassis 801 and the chassis 801 is fixed to the interior surface of the handle body 803. If the handle body 803 is of a clam-shell configuration, the chassis 801 can be secured to one side and the second side can be secured to one or both of the one side and the chassis 801. To ground the end effector body 40, 240 to the chassis 801 (and thereby the handle 100), the end effector body 40, 240 is fixed to a grounding shaft 805 that runs proximally back and into the handle 100. The grounding shaft 805 is, then, fixed to the chassis 801. In this state, any force acting upon the end effector body 40, 240 is transmitted to the chassis 801 and handle 100. Grounding can be accomplished in a variety of ways, one exemplary configuration being shown by a wing 807 that is fixed/integral with the grounding shaft 805. By providing the handle 100 or the chassis 801 with a non-illustrated slot corresponding to the exterior dimensions of the wing 807, the grounding shaft 805 can be secured to the handle 100 and/or to the chassis 801. With a transverse throughbore in the wing 807 and a corresponding throughbore in the slot, a screw or other fastener can fix the wing 807 to the handle 100 or the chassis 801. In such a configuration, any force D imposed by the surgeon pulling upon the suture ends 2' will be counteracted by the grounding supplied by the handle 100.

[0291] This configuration, therefore, provides an appropriate location for determining how much force is being applied by the surgeon when the tying force is being applied and, thereby, received at the end effector body 40, 240. To allow such a force to be measured, the wing 807 is decoupled from the chassis 801/handle 100 and the grounding shaft 805 is connected indirectly to the chassis 801/handle 100 through the force-measuring and indicating assembly 900, which permits the grounding shaft 805 to move just enough with respect to the chassis 801/handle 100 to allow measurement of the tying force imposed on the end effector body 40, 240. To permit this movement, the proximal-most end of the blade pushrod 892 (in which the grounding shaft 805 resides) is provided with a longitudinal slot through which projects the wing 807. The force-measuring and indicating assembly 900 is disposed between the chassis 801 (or the handle 100) and the wing 805 and allows the grounding shaft 805 to move far enough to receive and measure the tying force imposed on end effector body 40, 240. In particular with regard to FIG. 97A, a load cell 910 (diagrammatically indicated) is fixed with respect to the chassis 801 (or handle 100) to receive any proximally directed force from the grounding shaft 805 (which is

longitudinally connected to the end effector body 40, 240. The load cell 910 detects and measures the amount of tying force that is being imparted by the surgeon to the suture ends 2' when cinching the suture 1022 at the surgical site 1001. The load cell 910 supplies information corresponding to the tying force to the system control assembly 800 and/or the display assembly 880. Communication connectivity between the load cell 910 and the system control assembly 800 and/or the display assembly 880 is not illustrated for reasons of clarity. The amount of the tying force can be indicated in any way, for example, with a level indicator, with a dial, or with simple binary or tertiary indicators (e.g., yes/no or yes/no/too much). If a pre-set limit of the tying force is desired, an input function of the control assembly 800 can be used by the surgeon or the staff to set that force. Then, when in use, an indicator showing whether or not the amount of tying force is equal to or greater to the pre-set limit can be displayed. The display can take any form including those already described, for example, an LCD display with graphics, an LED with yellow, green, and red display colors, or simple yes/no mechanical and/or electrical indicators that show when sufficient tying force is being applied. Both audio and haptic feedback can be employed in addition to or instead of the visual indicators. A sound can be increasing in staccato until the desired tying force is imparted, at which time the sound is constant. Likewise, the handle can be still until the tying force is reached, at which time, the handle 100 vibrates. In this way, the user can maintain an exact and desired pressure (without putting too much force) against the surgical site 1001 by the suture 1022 until the crimp 30' is secured on the suture 2. When the indicator tells the surgeon that the tying force is within the desired range or at the desired level, the user can effect the crimping process to secure the crimp 30' to the suture 2.

[0292] With such a force-measurement assembly, reference is made to FIG. 96. Here, the surgeon can secure the suture 1022 as desired. First, the end effector body 40, 240 is pressed against the surgical site 1001 and the surgeon starts pulling on the suture ends 2' in direction D. During this process, the surgeon is looking at the indicator at the handle 100 and/or waiting for audio/haptic feedback. When the desired or pre-set tying force is reached, for example, as shown in the view FIG. 97, the surgeon actuates the crimping process and the crimp 30' is secured at the surgical site 1001. Alternatively, the device and method can have the crimping occur automatically once the desired/pre-set tying force is met and, thereafter, cutting can also occur, either automatically or manually. As a corollary to this, the crimping can be entirely prevented and locked out unless and until a desired or pre-set tying force is detected/measured by the force-measuring and indicating assembly 900. With the various forms of feedback that can be communicated to the surgeon, the tying force can be indicated to the user that there is not enough force being imparted upon the suture ends 2' or too much force is being imparted. The systems and methods are not limited to the various electrical embodiments described for supplying force level feedback. Mechanical systems and processes can also be incorporated. For example, a dial or needle on a scale can be provided to show the tying force being imparted. Regardless of the way that the tying force is measured, the system can record all of the data that is experienced by the various sensors and provide it as output for later read out or analysis.

[0293] In the above text, a load cell 910 is indicated as the device that measures the tying force. Any similar and/or equivalent structure or device can be substituted for the load cell 910 to measure the force imparted onto the distal end of the multiple-firing crimp device 1 by pulling on the suture ends 2'.

[0294] The multi-securing devices described and/or shown herein are not limited to securing with crimps. Other exemplary embodiments include securing devices that are clips. One exemplary embodiment for a multiple-clip securing device 9800 is shown in FIGS. 98 to 102. A user handle 9810 includes a shaft 9820 in which resides a plurality of cord-securing clips described in detail below. Slidably disposed on the shaft 9820 is a snare assembly 9830. As in the other exemplary embodiments herein, the securing process includes moving the snare assembly 9830 to the distal end of the shaft 9820, as shown in FIG. 99. When the cords are ready to be snared, the snare 9832 is extended by moving a snare-extender slide 9834 distally, as shown in FIG. 100, the snare 9832 being represented diagrammatically with dashed lines. Moving the snare-extender slide 9834 proximally, as shown in FIG. 101, withdraws the snare 9832 and captures the cords 2 within the snare assembly 9830 for movement through a securing clip and out the side of the shaft 9820 for manipulation by the user. Sliding the snare assembly 9830 proximally, as shown in FIG. 102, pulls the ends of the cords 2 through the clip and out a snare-access window 9822 of the shaft 9820 to an orientation that allows a user to manipulate the free ends 2' of the cords 2. In this exemplary embodiment, the snare-access window 9822 is at the top of the shaft 9820 but it can be at another orientation along the circumference of the shaft 9820. When the cords 2 are ready to be secured by the clip, a clip-securing trigger 9812 of the handle 9810 is depressed to install the clip and activate a cord-cutting assembly within the handle 9810 and the shaft 9820 as described in further detail below. Finally, a reload trigger 9814 is pressed to automatically reload a clip for a further clip-securing procedure.

[0295] FIG. 103 shows a flow chart of a process for completing a cord-securing procedure with a multiple clip-securing device 9800. In order to initialize the device 9800, the snare assembly 9830 is in its retracted home position at the handle 9810. It is assumed that the clips come preloaded within the shaft 9820 before it is passed to a user, the clips being loaded, for example, at the manufacturer. Of course, there can be a pre-initialization requirement that has the user load the shaft 9820 with the clips. Once initialized, if the first clip (the distal-most one) is not already at a cord-securing location, it is advanced to the cord-securing location, examples of which are shown in FIGS. 104, 119, 121, 122, and 133. At this point, the device is ready to use.

[0296] One exemplary embodiment of a distal end of the multiple clip-securing device 9800 is depicted in FIGS. 104 to 111. As can be seen through a side window 10422 of an exemplary embodiment of the shaft 9820, a set of clips 10400 are installed on a guide rail 10410 for use in subsequent clip-securing operations. It is desirable to provide the outer surface of the shaft 9820 with the side window 10422 to allow a user to count the number of clips 10400 remaining in the multiple-clip securing device 9800. As can be seen, for example, in FIGS. 104, 107, 109 and, in particular, in FIG. 121, the inner and outer tubes of the shaft 9820 are flush at the distal end of the multiple-clip securing device 9800. This is desirable to allow a positioning of the clip 10400 flush to

the inner and outer tube ends to aid in tensioning the device on cords 2 to be secured with the clip 10400 and to present the most blunt edge possible to the sewing cuff or tissue that is being affixed.

[0297] The distal-most clip 10400 in the clip-securing position is not visible in the view of FIG. 104 because the clip 10400 is behind clip-movement arms 10442 and the body of a cutting/reloading assembly 10440. The user then carries out the manual steps for capturing the cords. In summary, first, the user distally extends the snare assembly 9830 from a proximal position at the handle 9810. During this movement, a snare-guiding tube 14140 will lower from the snare assembly 9830, enter a snare access window 10424, 11228 of the shaft 9820, and extend distally to place a distal exit 14142 of the snare-guiding tube 14140 just proximal of the distal-most clip 10400 to be used in the present clip-securing operation. In such an orientation, the distal exit 14142 is aligned with the opening within the clip 10400. Therefore, when the user distally extends the snare 9832 after the snare assembly 9830 reaches its distal end stop on the shaft 9820, the snare 9832 passes through the opening of the clip 10400 and opens up to receive cords 2 therein to be secured. The user manually captures the cord(s) 2 within the snare 9832 by, for example, threading sutures through the central opening of the snare 9832. Capturing is completed when the user retracts the snare 9832 proximally to hold the cord(s) 2 at the distal end of the snare assembly 9830. Assuming the user is satisfied with the way that the cords 2 are captured in the snare 9832, the user will, then, return the snare assembly 9830 proximally back to its proximal position at the handle 9810 to present the free ends 2' of the cord(s) 2 outside the shaft 9820. If the snaring is not acceptable, the snare 9832 is extended again for acceptable recapture. An orientation of the distal end of the shaft 9820 when the snare has moved proximally back to the handle 9810 and has threaded the cords 2 through the clip 10400 in this ready-to-secure state is depicted in FIG. 104. The cords 2 are depicted as being pulled taut by the user.

[0298] The distal end of the shaft 9820 is then slid distally along the cord(s) 2 to a place where the user desires to set the clip 10400 housed inside the distal end of the shaft 9820. For example, where the cord 2 is a surgical suture, a securing point of the clip 10400 is as close to the surgical site as possible with no length of the suture between the clip and the tissue. In such a case, the user moves the distal end of the shaft 9820 up against the tissue, diagrammatically depicted with reference numeral 10510, to place the clip 10400 in a ready to be fixed location, shown for example, in FIG. 105. Automatic clip securement can now occur. The user presses the clip-securing trigger 9812 and, in doing so, two actions occur. First, the clip 10400 is fixed to the cords 2 and, second, the cord(s) 2 is/are cut. FIG. 105 depicts the cutting/reloading assembly 10440 in an intermediate cutting position where the moving portion 10442 of the two cutting surfaces has moved distally towards the fixed portion 10524 of the two cutting surfaces. With further distal movement of the cutting/reloading assembly 10440, as shown in FIG. 106, cutting of the cords 2 is completed by placing the moving portion 10442 of the two cutting surfaces distally past the fixed portion 10524, thereby creating a scissor effect on the cords 2 with the two surfaces 10524, 10442 while, at the same time, sliding the clip 10400 off of the guide rail 10410 and entirely unsecuring it from the multiple clip-securing device 9800. Movement of the multiple clip-securing device

9800 away from the securing site 10510 reveals to the user that the clip 10400 is secured on the cords 2 and the cords 2 are cut on the side of the clip 10400 facing away from the site 10510. The multiple clip-securing device 9800 indicates (by visual, audible, tactile measures) that a cutting action has completed but a user can actuate the clip-securing trigger 9812 again, if desired, and the cutting action will repeat. FIG. 107 illustrates the device 9800 in state that is ready for recutting or reloading.

[0299] In order to reload the device 9800, the user presses the reload trigger 9814 and a procedure for placing a new distal-most clip 10800 at a cord-securing location 10802 at the distal end of the shaft 9820 can begin. The clip 10800 is visible because the clip-movement arms 10442 are not shown in this figure. The device 9800 automatically moves the cutting/reloading assembly 10440 rearward to a position where the clip-movement arms 10442 catch the clip 10800, which position is shown in FIG. 108. Then, the cutting/reloading assembly 10440 extends distally to place the clip 10800 at the cord-securing location 10802, which is hidden by the clip-movement arms 10442 in FIG. 109. The securing and cutting operations are repeated as before to secure the second clip 10800 on new cords 2 and move the clip 10800 off of the guide rail 10410, which orientation is depicted in FIG. 110. The clip-securing processes are repeated for as many times as needed in a given procedure. In the exemplary embodiment of FIGS. 108 to 111, there are fourteen clips illustrated. FIG. 111 illustrates the cutting/reloading assembly 10440 in a reloading position for the last clip 11100 after the other thirteen clips have been used. As can be understood, the cutting/reloading assembly 10440 moves a distance proximally that increases for each new clip that is being reloaded. The movement algorithm is set within the device 9800 as described in further detail below.

[0300] Another exemplary embodiment of a distal end of the multiple clip-securing device 11200 is depicted in FIGS. 112 to 137. Many of the features in this embodiment are similar or even the same as previous embodiments of the device. Even though such features may be referenced with a different numeral, that designation, alone, does not mean that the feature is different and can be the same. Likewise, where features are referenced with the numeral, that designation, alone, does not mean that the feature is the same and can be different.

[0301] Depicted in FIGS. 112 to 118 is an exemplary embodiment of a distal end of the shaft 11220 in which is disposed a set of clips 11250 loaded on a guide rail 11210 that is fixedly secured within the shaft 11220 through a rail block 11212. Also disposed within the shaft 11220 is a distal portion of a cutting/reloading assembly 11240, which is slidably disposed within the shaft 11220. FIGS. 112 and 118 show the device 11200 a ready-to-secure state, the former showing an example where the device 11200 is full with clips 11250 and the latter showing the device 11200 having nine clips 11250 in addition to the one in the ready-to-secure state. In this state, the cutting/reloading assembly 11240 has delivered a distal-most clip 11251 to a distal cord-securing location 11222 within the shaft 11220. At this point, the user then carries out the manual steps for capturing the cords. In summary, first, the user distally extends the snare assembly 9830 from a proximal position at the handle 9810. During this movement, a snare-guiding tube 14140 will lower from the snare assembly 9830, enter a snare access window 10424, 11228 of the shaft 11220, and extend distally to place

a distal exit **14142** of the snare-guiding tube **14140** just proximal of the distal-most clip **11251** to be used in the present clip-securing operation. In such an orientation, the distal exit **14142** is aligned with the opening within the clip **11251**, as can be seen in FIG. 152, for example. Therefore, when the user distally extends the snare **9832** after the snare assembly **9830** reaches its distal end stop on the shaft **11220**, the snare **9832** passes through the opening of the clip **11251** and opens up to receive cords **2** therein to be secured. The user manually captures the cord(s) **2** within the snare **9832** by, for example, threading sutures through the central opening of the snare **9832**. Capturing is completed when the user retracts the snare **9832** proximally to hold the cord(s) **2** at the distal end of the snare assembly **9830**. Assuming the user is satisfied with the way that the cords **2** are captured in the snare **9832**, the user will, then, return the snare assembly **9830** proximally back to its proximal position at the handle **9810** to present the free ends **2'** of the cord(s) **2** outside the shaft **11220**. If the snaring is not acceptable, the snare **9832** is extended again for acceptable recapture. An orientation of the distal end of the shaft **11220** when the snare has moved proximally back to the handle **9810** and has threaded the cords **2** through the clip **10400** in this ready-to-secure state is depicted in FIGS. 122 and 123. The cords **2** are depicted as being pulled taut by the user.

[0302] The distal end of the shaft **11220** is then slid distally along the cord(s) **2** to a place where the user desires to set the clip **11251** housed inside the distal end of the shaft **11220**. For example, where the cord **2** is a surgical suture, a securing point of the clip **11251** is as close to the surgical site as possible with no length of the suture between the clip and the tissue. In such a case, the user moves the distal end of the shaft **11220** up against the tissue, diagrammatically depicted in FIG. 123 with reference numeral **12310**, to place the clip **11251** in a ready to be fixed location. Automatic clip securing can now occur. The user presses the clip-securing trigger **9812** and, in doing so, two actions occur. First, the clip **11251** is fixed to the cords **2** and, second, the cord(s) **2** is/are cut. With distal movement of the cutting/reloading assembly **11240**, as shown in FIG. 127, cutting of the cords **2** is completed by placing the moving portion **11242** of the two cutting surfaces distally past the fixed portion **11224**, thereby creating a scissor effect on the cords **2** with the two surfaces **11224**, **11242** while, at the same time, sliding the clip **11251** off of the distal end of the guide rail **11210** and entirely unsecuring it from the multiple clip-securing device **11200**. Movement of the multiple clip-securing device **11200** away from the securing site **12310** reveals to the user that the clip **11251** is secured on the cords **2** and the cords **2** are cut on the side of the clip **11251** facing away from the site **12310**. The multiple clip-securing device **11200** indicates (by visual, audible, tactile measures) that a cutting action has completed but a user can actuate the clip-securing trigger **9812** again, if desired, and the cutting action will repeat. FIG. 116 illustrates the device **11200** in state that is ready for recutting and FIG. 115 illustrates the device **11200** in state that is ready for reloading.

[0303] To reload the device **11200**, the user presses the reload trigger **9814** and a procedure for placing a new distal-most clip **11651** at the cord-securing location **11222** at the distal end of the shaft **11220** can begin. The device **11200** automatically moves the cutting/reloading assembly **11240** rearward to a position where the clip-movement arms **11242** (only one is shown in FIGS. 113 to 116) catch the clip **11651**.

Then, the cutting/reloading assembly **11240** extends distally to place the clip **11651** at the cord-securing location **11222**. The securing and cutting operations are repeated as before to secure the second clip **11651** on new cords **2** and move the clip **11651** off of the guide rail **11210**. The clip-securing processes are repeated for as many times as needed in a given procedure. In the exemplary embodiment of FIGS. 117 and 118, the procedure has been carried out until there are only ten clips left on the guide rail **11210**. FIG. 117 illustrates the cutting/reloading assembly **11240** in a reloading position for a tenth-to-last clip **11751** after the preceding clips have been used. Likewise, FIG. 118 illustrates the cutting/reloading assembly **11240** reloading the tenth-to-last clip **11751** into the cord-securing location **11222**. As can be understood, the cutting/reloading assembly **11240** moves a distance proximally that increases for each new clip that is being reloaded. The movement algorithm is set within the device **11200** as described in further detail below.

[0304] FIGS. 119 to 134 are various views of enlarged portions of the distal end of the device **11200** in various stages of the clip-securing process. Each will be described in turn.

[0305] FIGS. 119 to 123 illustrate the ready-to-secure state shown in FIGS. 121 and 122. Particularly in FIG. 120, it can be seen that the clip-movement arms **11242** have characteristic curves and thickenings, which will be described in further detail below. When the body of the cutting/reloading assembly **11240** is in this state, the moving portion **11244** of the cord-cutting surfaces is set away from the fixed portion **11224** of the cord-cutting surfaces. In the exemplary embodiment of FIGS. 119 and 120, the cord-securing location **11222** for the clip **11251** is set back proximally from the extreme distal end **11226** of the shaft **11220**. Also illustrated in FIGS. 119 and 120 are various features of the guide rail **11210**, which features will be described in further detail below. A diagrammatic illustration of the path **11901** of cords **2** is shown in FIG. 119 after they have been snared and pulled through the clip **11251**, through the snare access window **11228**, and out the side of the shaft **11220** for manipulation by a user. The cords **2**, therefore, pivot or curve around the lower surface of the upper interior bending plate of the clip **11251**. Similar views of the distal end of the shaft **11220** are shown in FIGS. 121 and 122, but these are not in cross-section. The path **11901** of the cords **2** can be seen well in both of these figures as well as in FIG. 123, and the fixed portion **11224** of the cutting surfaces can be seen especially well in FIG. 122 to be protected by the outer surface **11246** of the body of the cutting/reloading assembly **11240**.

[0306] FIG. 124 illustrates an exemplary embodiment of how the guide rail **11210** is secured to the rail block **11212**. In this embodiment, a port **12420** in the shaft **11220** allows a set screw **12422** to fix the proximal end of the guide rail **11210** to the rail block **11212**. In turn, the rail block **11212** is fixed (e.g., by welding, soldering, press-fitting, threading) to an internal shaft **12424** that is fixed to the handle **9810** and, therefore, that does not move with respect to the shaft **11220**. Alternatively, this can be made as a subassembly that is all welded or otherwise fixed together by any measures.

[0307] In comparison to FIGS. 119 to 123, FIGS. 125 to 128 illustrate the clip **11251** in a cord-secured state, in which the cords **2** are clamped or clipped between the upper and lower surfaces of the respective upper and lower interior bending plates of the clip **11251**. In the view of FIGS. 125, the body of the cutting/reloading assembly **11240** has moved

the clip **11251** distally from the cord-securing location on the guide rail **11210** to a position where the cords **2** are cut and the clip **11251** is free from the guide rail **11210**. The cutting of the cords **2** is accomplished by distally moving the moving portion **11244** of the cord-cutting surfaces past the fixed portion **11224** of the cord-cutting surfaces. In this view, only the clip-movement arms **12560** are holding the clip **11251** and, with any proximal movement of the shaft **11220** by the user, that gripping force will be overcome to release the clip **11251** at the site where it has been clipped. FIG. **126** illustrates how the distal fingers **12563** of the clip-movement arms **12560** hold the clip **11251** in this manner before release. FIGS. **127** and **128** are views approximately of FIGS. **125** and **126** without the cross-section. FIG. **127** depicts the end of the device **11200** after the clipping has occurred but before cutting of the cords **2** have occurred. Here, the body of the cutting/reloading assembly **11240** has moved the clip **11251** distally from the cord-securing location on the guide rail **11210** to a position where the clip **11251** is free from the guide rail **11210**. However, the moving portion **11244** of the cord-cutting surfaces is still proximal of the fixed portion **11224** of the cord-cutting surfaces before cutting occurs. In contrast, FIG. **128** depicts the end of the device **11200** after both clipping and cutting of the cords **2** have occurred. As in FIG. **127**, the body of the cutting/reloading assembly **11240** has moved the clip **11251** distally from the cord-securing location on the guide rail **11210** to a position where the clip **11251** is free from the guide rail **11210**. Additionally, the moving portion **11244** of the cord-cutting surfaces is distal of the fixed portion **11224** of the cord-cutting surfaces to effect cutting of the cords **2**.

[0308] The snare access window **11228** that allows the cords **2** to be passed from distal of the device through the clip **11250** proximally and outside the shaft **11220** is placed to provide various desirable features. As can be seen in FIGS. **121** to **128**, the two edges **11224**, **11244** forming the scissor for cutting cords **2** are protected when not in use. First, as shown in FIGS. **121** and **123**, the upper cutting edge **11244** of the movable inner tube **11240** is protected by offsetting the proximal edge of the window **11228** distally with respect to the upper cutting edge **11244** when in the ready-to-fire position. Second, the lower cutting edge **11224** of the outer shaft **11220** is covered and, thereby, protected when the inner tube **11240** is in the non-cutting state as shown in FIGS. **122** and **123**. Particularly with respect to FIG. **123**, the portion of the inner tube **11240** that protects the lower cutting edge can be formed from a short-length tubular section **12540** that is very precise in its diameter to lower the drag of the inner tube **11240** within the outer shaft **11220** while providing the best edge for improved cutting. This short-length, precision-diameter section **12540** can be integral with the inner tube **122542** or it can be a separate piece that is attached to the inner tube. See, for example, FIGS. **119** and **125**.

[0309] With regard to the connection between the cutting/reloading assembly **10440**, **11240** and the securing devices, e.g., the clip **10400**, **10800**, **11250**, **11251**, various exemplary embodiments include a tube that slides back and forth within the shaft **9820**, **11220**, a body of that tube having, at its distal end, two clip-movement arms **10442**, **11242**, **12560**. FIGS. **129** to **134** illustrate the details of the clip-movement arms **10442**, **11242**, **12560** and how they interact with the clip **10400**, **10800**, **11250**, **11251** in order to carry out the cord-securing processes of the device **9800**, **11200**.

For ease of understanding, only clip-movement arms **12560** will be referred to but this single reference applies to all embodiments of the clip-movement arms, including arms **10442** and **11242**. Likewise, only clip **11251** will be referred to but this single reference applies to all embodiments of the clip, including clips **10400**, **10800**, and **11250**.

[0310] As can be seen in FIGS. **125** and **126**, an exemplary embodiment of the arm-carrying tube of the cutting/reloading assembly **12540** can be made from two parts, a proximal portion **12542** and a distal portion **12544**. The proximal portion **12542**, because of its long length within a narrow shaft **9820**, **11220**, is made of a material having strong torque and flexion features, for example, it is of stainless steel 304 or 316 that can be easily drawn into tubing. The distal portion **12544** carries the two clip-movement arms **12560**. To secure the clip-movement arms **12560** thereto, the distal portion **12544** is made of a material, for example, able to bond through welding such as Stainless 17-7 but is substantially harder to make for an improved cutting edge. The clip-movement arms **12560** can be made of a similarly hard material, such as SS17-7 or 17-4, which can be hardened to a spring temper to allow the arms **12560** to flex and return to their original position.

[0311] In the exemplary embodiment, the clip-movement arms **12560** have three portions, a proximal base **12561**, an intermediate flex spring **12562**, and a distal finger **12563**. The proximal base **12561** is shaped and configured to fixedly attach to the distal portion **12544**. It can be press-fit, bonded, welded, or secured in any way so that, when so secured, it moves with the distal portion **12544** within the shaft **9820**, **11220**. The intermediate flex spring **12562** is, in this exemplary embodiment, in the form of a flexible, rectangular plate spring that is thinner (in the radial direction of the shaft **9820**, **11220**) than the proximal base **12561**. This radial thickness difference from the proximal base **12561** is not a requirement. Finally, the distal finger **12563** has a number of features that is best described with reference to FIGS. **129** to **134** and, in particular, to FIG. **133**.

[0312] When the clip-movement arms **12560** are in the orientation of FIG. **115**, they flex radially inwards, due to the pre-set form of the flex spring **12562**, and the fingers **12563** are in a radial position further inwards than that shown in FIGS. **112** to **114**, i.e., when a clip **11251** is being held between the opposing fingers **12563**. In such a state, a new, distal-most clip **11251** is desired to be loaded into the cord-securing location **11222**. As described and/or shown herein, the cutting/reloading assembly **10440**, **11240** retracts proximally for this action to occur. For a distance, the arms **12560** are still distal of the clip **11251** and do not touch any of the clips **12560**. At a point illustrated in FIG. **129**, an inside angled cam surface **12564** of each arm **12560** makes contact with the distal-most clip **11251**. This cam surface **12564** is angled to form a guide rail that gradually moves each of the fingers **12563** radially outward, one of which is shown in FIG. **129**. The distal end of the cam surface **12564** terminates at a clip step **12565**, which, along with a distally extending fingernail **12566** at the outer end of the clip step **12565**, forms a pocket or ledge that grasps and is used to move the clip **11251** from its pre-loaded position to the cord-securing location **10802**, **11222** and, then, off of the guide rail **10410**, **11210**. In other words, the fingernail **12566** of each of the arms covers a side of the clip **11251** and the clip step **12565** acts as a pushing face that moves the clip **11251** distally by pressing against a proximal side of the clip

11251. The fingernail **12566** keeps the clip step **12565** engaged evenly at the edges of the clip **11251** to make sure that the clip **11251** is pushed straight and true. The fingernail **12566** also keeps the flexible arm **12560** straight to apply its forces in straight column loading. To pick up and move the distal-most clip **11251**, the clip step **12565** must be on the proximal side of that clip **11251**. But, if the clip step **12565** is moved too far proximally, there is a danger that the arms **12560** may pass the distal-most clip **11251** and the nose **12567** of the fingernail **12566** will fall proximally behind the distal-most clip **11251** and, thereafter, be unable to pick up that clip **11251**. This situation is to be avoided. To ensure that such an event does not occur, the longitudinal length of the cam surface **12564** and the width of the arm **12560** are selected so that proximal movement of the arms **12560** allows the cam surface **12564** to touch the second distal-most clip **11252** as shown in FIG. 130 and, therefore, if the nose **12567** does happen to move proximal of the rear plane of the clip **11251**, the nose **12567** will, nevertheless, still be positioned to the outside of the clip **11251** and will not be trapped behind the clip **11251**. In other words, the cam surface **12564** has a length such that its radial thickness engages the next (e.g., second distal-most) clip **11252** before the fingernail **12566** disengages from the first clip **11251** to be loaded.

[0313] The clips **11251** are spaced apart from one another at known, pre-set distances **13000**. By having the length of the cam surface **12564** be long enough to contact the second distal-most clip **11252**, longitudinal control of the cutting/reloading assembly is provided with play to insure that the clip step **12565** will be moved proximally behind the distal-most clip **11251** every time a reloading procedure is undertaken and will fall radially inwardly to place the distal surface of the clip step **12565** against the proximal side of the clip **11251** and the inner surface of the fingernail **12566** against the outer side of the clip **11251**—a position shown in FIG. 131. This position insures positive control of the clip **11251** from its pre-installed position (shown in FIG. 131), distally along the guide rail **10410, 11210** to an intermediate position **12200** before the cord-securing location (shown in FIG. 132), to the cord-securing location **10802, 11222** (shown in FIG. 133), and then off the distal end of the guide rail **10410, 11210** (shown in FIG. 134). An enlarged separated view of a distal portion of the arms **12560** is shown in FIG. 135.

[0314] Each of the arms **12560** flexes outwards to provide a positive bias against the clip **11251** that aids in holding the clip **11251** during all relevant steps where forces could act against the clip **11251**. The fingernail features (**12565, 12566**) aid in stabilizing the arms **12560** so that they can be biased inward to a greater extent than needed. This forces the pushing faces to be held even with the outside edges of the clip **11251** and still have a biasing force against the clip **11251**. For research and development purposes, a hold-open feature **12800** is provided (as shown in FIG. 128) to allow a field-reloadable magazine (e.g., with a funnel on its end to hold open the fingers) to reload a set of clips or for reprocessing the multiple-clip securing device. As can be seen in FIG. 129, a non-illustrated tool can be inserted into the feature **12800** to apply a force that moves the arms **10442, 11242** radially outward to, thereby, provide room for reloading clips **11251** onto the guide rail **10410, 11210**.

[0315] The guide rail **10410, 11210** also possesses features that enhance the clip-securing processes of the exemplary

systems **9800, 11200**, exemplary embodiments of which are illustrated in FIGS. 136 and 137. For ease of understanding, only guide rail **11210** will be referred to but this single reference applies to all embodiments of the guide rail, including guide rail **10410**. In the exemplary embodiment of FIG. 136, the clip-holding guide rail **11210** is H-shaped (in cross-section) with an intermediate bridge **11214** between opposing walls **11216**. Here, the bridge **11214** is offset from center, but it can be centered in an alternative embodiment. The H-shape allows the clips **11251** to be held open with a minimal amount of contact area between the clip **11251** and the upper and lower edges of the walls **11216**. This configuration can prevent damage to the clip **11251** as it is being slid over the length of the guide rail **11210**. Polishing and surface treatments can further reduce any friction and/or wear that occurs during the sliding movement of the clips **11251**. Other advantages of having an H-shape cross-section is that it provides an open space through which the cord-capturing snare **9832** can be passed to slide along the upper surface of the bridge **11214** and pass through the proximal face of the open clip **11251**. To aid in guiding the snare through the internal opening of the clip **11251**, the distal end of the intermediate bridge **11214** has a tapered slope **11218**. This configuration allows for more precise and accurate movement of the snare **9832** out from its guiding tube, through the clip **11251**, and out to a user. The angle of the slope **11218** can be set at any value, however, one beneficial angle is a value that is approximately equal to the angle that the lower internal flexing wall **13300** of the clip **11251** makes with respect to the bridge **11214**. In this way, if the snare **9832** slides against the upper surface of the bridge **11214** and then down the slope **11218**, having the lower surface of the wall **13300** match the slope **11218** permits travel of the snare **9832** substantially without friction or snagging. This is especially true if the central edge of the wall **13300** is just below the distal end of the slope **11218**.

[0316] During manufacture of the multiple-clip securing device **9800, 11200**, it is desirable to preload all of the clips **11251** onto the guide rail **11210** before the guide rail **11210** is installed in the handle **9810**. To assist with this preloading, the proximal ends **11217** of the walls **11216** are ramped or chamfered. The ramp can start from a point or from almost a point and can taper outwards (up/down) until reaching a wall height that is desirable for extending the snare **9832** through the opening within the clip **11251**. This means that the walls **11216** can have a variable height over a length of the guide rail **11210** that starts small to place a lower load on the internal features of the clip **11251**, for example, for storage purposes, and only place the higher load on the internal features when the clip **11251** is at the distal end of the guide rail **11210** ready to be used. The walls **11216** at the distal end of the guide rail **11210** extend past the slope **11218** to create a fork that provides a larger opening in the available space through which the snare **9832** and cords **2** can be maneuvered. For manufacturing ease, one or more retainer holes **11219** can be made in the intermediate bridge **11214**, as shown in FIG. 137, which holes **11219** do not interfere with the clean polished surfaces on which the clips **11251** slide. These holes **11219** can also be used to support the guide rail **11210** as the clips **11251** are loaded thereon. Shapes other than an H-shaped cross-section of the guide rail **11210** can be used to hold the clips **11251** open and ready for use. For example, a square bar that transitions to

an H-shape, two independent square/round rods, a W-rail, a double U-shaped rail, a C-channel, or a rectangular cross-section bar.

[0317] The guide rail **11210** can be fabricated using various production methods including grinding, milling, wire EDM, stamping, laser cut and welding, extrusion with hardcoat, roll-formed, wire spool and welding, from ceramic, MIM, and/or DMLS. Some of the materials that can be used to form the guide rail **11210** include, but are not limited to, stainless steel, nickel and nickel alloys (e.g., MP5N), titanium, CoCr, aluminum with hardcoat, carbide, tool steel, and sapphire. Exemplary surface finish processes for the guide rail **11210** include, but are not limited to, materials that make the surface smooth, polishing (e.g., abrasive/mirror/electro), and grain orientation.

[0318] The handle of the multiple-clip securing devices contains various novel features. An exemplary embodiment of circuitry and proximal portions of the cutting/reloading assembly are contained in and attached to a single, drop-in, circuit board **13820**, all of which is housed within a handle **13810** shown in FIG. 138.

[0319] All of the switches, including the clip-securing trigger **13830**, the clip-reload button **13840**, and the parking switch **13900** are side-mounted onto the circuit board **13820** to decrease the footprint within the handle **13810**. The clip-securing trigger **13830** is, in this exemplary embodiment, pivoted about a pivot pin **13832**. Actuation of the clip-securing **13830** is carried out by depressing a micro-switch or tact-switch **13834** that is surface-mounted on the circuit board **13820**. In an alternative embodiment shown, for example in FIG. 155, the pivoting trigger **13830** is replaced by a sliding trigger **15512**. A trigger that slides provides a longer stroke than the pivoting trigger **13830** and, by including a relatively heavier spring, the sliding trigger **15512** gives the user time to decide if firing should be cancelled, which makes the device less sensitive to inadvertent clip firing.

[0320] An exemplary embodiment of proximal portions of the cutting/reloading assembly is depicted in FIGS. 138 to 140. Included in the cutting/reloading assembly is a motor **13850** having a pinion **13852** that is operably connected to a proximal portion of a rack **13854**. The exemplary embodiment of the motor **13850** shown has an internal gear box that terminates with the external pinion **13852**. The distal portion of the rack **13854** is fixed longitudinally to the tube **12540** carrying the clip-movement arms **11242, 12560**. Because it is desirable for the outer tube of the shaft **9820, 11220** to have an outer diameter that is no greater than 5 mm, to improve control of the device, a torque stiffening tube **14000** (which is free from interruptions and/or slots) is connected between the rack **13854** and the tube **12540**. This functions to prevent torsional bending or twisting of the shaft **9820, 11220** in use. Another exemplary configuration for stiffening the two nested tubes **9820, 11220, 12540** in torque includes non-illustrated cross-pins at either end.

[0321] A power supply **13860**, such as a battery, can be electrically connected to the circuit board **13820** by a wired connector as shown in FIG. 138 or by board-mounting. For various reasons, easy battery disposal is desirable. To provide such a feature, the handle **13810** in FIG. 138 shows the left-side clamshell **13812** but the right side clam-shell is removed. This right-side clamshell can be in two parts, which are delimited by the dashed breakaway line **13801**. One part will be fixed to the left-side clamshell **13812** and

will cover the circuit board and all of the components in the upper section above line **13801** and the second part will be a non-illustrated breakaway section that is the structure on the right side below the line **13801** in FIG. 138. This breakaway section, when pried away by a hemostat or other object inserted within a seam or a pocket below the line **13801** will expose the battery **13860** and allow it to be removed with ease. The battery **13860** is shown as being clipped into a standard 9V press-fit connection. In an alternative non-illustrated exemplary embodiment, the battery **13860** is pressed upwards, e.g., by a lower spring, to merely physically connect to two contacts that are on the top surface of the battery compartment **13862** adjacent the circuit board **13820**. The ability to remove the battery **13860** can be accomplished in many other ways, such as a structure similar to a gun magazine, which can be released and slid out of the bottom of the grip portion or the entire grip portion containing the battery can be separated from the device to remove the battery and render the device unusable. This is of concern for a circumstance where separation is necessary for disposal of the battery for recycling purposes.

[0322] FIGS. 98 to 102 illustrates one exemplary embodiment of a movable snare assembly **9830**. Another exemplary embodiment of a snare assembly **14100** is depicted in FIGS. 141 to 153. The snare assembly **14100** provides various complex functions. First, it is disposed on the shaft **11220** so that it can move longitudinally thereon from a retracted proximal position at the handle **13810** to an extended distal position in which the snare is extended through the snare access window **9822, 10424, 11228** and through the clip **10400, 11250** to a position distal of the shaft **11220** for capture of the cords **2**. Second, the snare assembly **14100** provides various lockouts during this movement along the shaft **11220**, for example, to prevent extension of the snare at all times except when the snare delivery tube is correctly positioned just proximal of the clip **10400, 11250**. Third, the snare assembly **14100** extends the snare to a distal position that is maximized for easy cord snaring by a user but, at the same time, is to be as physically compact as possible for good human ergonomics.

[0323] FIGS. 141 and 142 illustrate the third feature, how the snare assembly **14100** extends the snare to a distance while the actual snare assembly **14100** is relatively small. To start, the snare assembly **14100** comprises three main parts, including an outer snare-extending sleeve **14110** that freely rotates about an interior body **14120** that is connected to a snare-movement body **14130**. The ability of the snare-extending sleeve **14110** to rotate freely about the interior body **14120** allows the user to not be concerned about how his/her hand is placed on the sleeve **14110** as the device is being rotated constantly during a surgical procedure. Free rotation also prevents torque from being imparted to the snare assembly **14100**, which torque would cause additional drag during longitudinal translation on the shaft **11220**.

[0324] These three parts provide a mechanism that allows the snare (not illustrated here but appearing in further figures) to extend out from the distal end of the snare assembly to a distance that is a multiple of the distance that the snare-movement body **14130** moves with respect to the interior body **14120**. This feature is best shown in FIGS. 141 and 142, in which a snare, for example with the shape shown in FIGS. 8, 12, 36, and 37 but not illustrated in FIGS. 141 and 142, is grounded at its proximal end at a grounding area **14132** within the movement body **14130**. In this exemplary

embodiment, the grounding area **14132** is a proximal end of a first tube **14134** that is fixed to the movement body **14130** and in which the proximal end of the snare is fixed, e.g., crimped. The snare progresses proximally in a first extent through the first tube **14134** and then through a 180-degree first bend **14122** within the interior body **14120**. After the first bend **14122**, the snare continues through a second tube **14136** that is slidably received through a portion of the movement body **14130**. The snare then continues through a 180-degree second bend **14138**, which terminates at the proximal end of a snare-guiding tube **14140** that, in this exemplary embodiment is substantially in a J-shape. The distal snaring portion of the snare is collapsed within the snare-guiding tube **14140** while in the non-extended state of the snare—the state shown in FIG. 141—with a terminal snare end (e.g., loop **12**) extending slightly out of the distal end of the snare-guiding tube **14140**. This configuration is referred to as a double trombone shape because it has two 180-degree U-turn bends (trombones). In essence, this configuration has three lengths traversing a total snare movement area. Therefore, motion of the snare by moving the movement body **14130** towards the interior body **14120** is amplified by a factor of three—thus, a 2 cm displacement of the movement body **14130** distally results in a 6 cm movement of the snare from its captured position within the snare-guiding tube **14140** to its final extended orientation outside the distal end of the snare assembly **14100**. If the first tube **14134** is removed to form a single trombone, then two lengths will cross the intermediate movement area and the ratio of snare movement to movement body displacement is 2:1. An alternative to this relatively planar trombone configuration is a non-illustrated three-dimensional spiral corkscrew track, which also provides an increase in snare end movement as compared to the travel distance of the movement body **14130**. FIG. 142 illustrates the snare assembly **14100** in the snare-extended state with the sleeve **14110** displacing the movement body **14130** distally to touch the proximal side of the interior body **14120** and, thereby, extend the snare distally out through a clip to its fullest extent.

[0325] Another feature of the snare assembly **14100** is that it provides various lockouts during movement along the shaft **11220**. The many different lockouts are provided by a single device having a complex shape, which device interacts with other features within the snare assembly **14100** and the shaft **11220**. This exemplary embodiment of the multi-function lockout **14300** has a shape similar to a silhouette of a helicopter. Depending on the state of the snare assembly and/or on the state of the movement body **14130**, the lockout **14300** provides a different lockout function.

[0326] In a first lockout state, it is desired to retain the snare in its fully retracted position and prevent it from extending. This first state exists while the snare assembly **14100** is proximal of its distal-most position. FIGS. 143, 147, and 151 show the multi-function lockout **14300** in this first lockout state in which the snare assembly **14100** is able to translate along the shaft **11220** from the handle to the distal end of the shaft **11200**. To fix the interior body **14120** in a single circumferential position about the shaft **11220**, a canopy **14302** of the lockout **14300** rides in a groove **11221** of the shaft **11220** to act as a key within the keyway of the groove **11221**. This groove **11221** is especially visible in FIG. 151. The blade feature of the canopy **14302** that is positively engaged in the groove **11221** on the shaft **11220**

can selectively become disengaged from the keyway at the distal-most position while the tail **14304** keeps the snare assembly **14100** in position and clocking. Alternatively, the blade feature of the canopy **14302** can be made to stay continuously engaged in the groove **11221**. In an alternative embodiment, there can be a separate key continuously engages the groove **11221**. Other embodiments for clocking the interior body **14120** can include a keyway that is internal or external to the shaft **11220**. Another exemplary embodiment for keeping the interior body **14120** clocked with respect to the shaft **11220** includes placing a secondary tube along the outside surface of the shaft **11220** to form a “snowman” cross-section. Likewise, that secondary tube can be replaced with an external blade or square wire or a hexagonal or other polygonal rod. The exterior shape of the shaft **11220** can also be altered to provide the keying feature. Other external configurations include a comb and slot or an integral stop such as a cross-pin, a horseshoe, or a fin on the shaft **11220**. In another exemplary embodiment, the entire snare assembly **14100** can be freely rotating proximal to a given point on the shaft **11220** but, after passing a set distal location, the interior body **14120** is forced to clock into a given orientation. This can be accomplished, for example, with a funnel and pin assembly. All of these various features together define a method for keeping the snare assembly **14100** clocked onto the shaft **11220**.

[0327] The lockout **14300** pivots about a pin **14301** that is oriented transverse to the shaft **11200**. The rotational orientation of the lockout **14300** shown in FIGS. 143 and 147 keeps the tail **14304** below the shaft **11220** because the tail **14304** has a width greater than the width of the groove and, therefore, it is also wider than the canopy **14302**. The cross-sectional views of FIGS. 143 and 144 do not allow the thickness of the tail **14304** or the sides of the lockout **14300** to be seen. Those features can be seen, however, in FIG. 147 and, especially in FIG. 151, in which the width of the tail **14304** and the canopy **14302** are apparent and it can also be seen that one or more side pontoons **14303** of the lockout **14300** extend laterally from the side of the lockout **14300**. In this orientation, the pontoon **14303** opposes a blocking surface **14131** of the movement body **14130** to prevent the movement body **14130** from moving towards the interior body **14120**, thereby keeping the movement body **14130** in its proximal position in which the snare is retained in its retracted position and cannot extend.

[0328] FIGS. 145 and 149 illustrate how the pontoon(s) **14303** is(are) moved out of the way of the blocking surface **14131** by various other features of the snare assembly **14100**. First, the shaft **11220** defines a tail orifice **11223** just distal of a distal end **11225** of the groove **11221**. The tail **14304** cannot move into the tail orifice **11223** by itself because it is biased with a clockwise force (in the view of FIGS. 143 to 149) by a non-illustrated bias device (e.g., a spring). What causes the desired tail-raising movement (i.e., counter-clockwise rotation of the lockout **14300**) is a cam action that occurs when the sloped rear canopy edge **14305** comes into contact with and continues to contact the distal end **11225** of the groove **11221**. Further distal movement of the interior body **14120** on the shaft **11220** causes the distal end **11225** of the groove **11221** to force the canopy **14302** downwards to thereby, move the tail **14304** into the tail orifice and, thereby, prevent any further distal movement of the interior body **14120**—because the distal edge of the tail orifice **11223** forcibly contacts the distal face of the tail

14304. When this occurs, as shown in FIG. 149 and, especially, FIG. 150, the lockout 14300 has pivoted to such an extent to move the pontoon(s) 14303 radially downwards sufficiently far to move out of the way of the blocking surface 14131, thereby freeing the movement body 14130 from its fixed state with respect to the interior body 14120. Simultaneously, the distal exit 14142 of the snare-guiding tube 14140 is at a position in which it can enter a snare access window 11228 in the shaft 11220.

[0329] The snare-guiding tube 14140 is grounded at its proximal end to provide support to the snare while being able to flex. As shown in FIGS. 143 to 153, the snare-guiding tube 14140 has a double bend 14144, 14146 to provide clearance so that the distal exit 14142 can flex upwards (with regard to the views of the drawings) when the distal end of the snare-guiding tube 14140 is not present at the snare-access window 10424, 11228 as shown in the difference between FIGS. 152 and 153. The flexing movement of the distal end of the snare-guiding tube 14140 is illustrated in FIG. 152 with the double-headed arrow. An alternative to this exemplary shape is a recurve or S-tube that can align the exit opening more in line with the top surface of the bridge of the guide rail so that the snare is presented with less ricochet into the opening of the clip. The S-tube can provide features to vertically position its exit relative to the guide rail, relative to the shaft, and/or, relative to the snare assembly. Another alternative embodiment of the snare-guiding tube includes an open cut scoop or similar shape that deflects the snare and directs it toward the clip opening.

[0330] Because a distal extent of the snare-guiding tube 14140 is pre-bent with a bias towards the shaft 11220, when the distal exit 14142 is not within the snare-access window 11228, the distal exit 14142 rides along the top exterior surface of the shaft 11220, as shown in FIG. 153. The tube 14140 remains in that radially outward flexed state until the distal exit 14142 of the snare-guiding tube 14140 enters the snare access window 11228 (as shown in FIGS. 145, 146, 149, 150, and 152), at which time, a radially extending cavity 14126 in which the distal extent of the snare-guiding tube 14140 resides allows that distal extent to spring radially inwards into the snare access window 11228 to an orientation in which the distal exit 14142 is aligned with the central opening of the clip that is loaded in the cord-securing location 10802, 11222 ready to secure cords 2, which orientation is especially visible in FIG. 152. At the point when the pontoon 14303 lowers, no lock of the lockout 14300 prevent the movement body 14130 from translating distally all the way until its distal surface meets a proximal side 14124 of the interior body 14120 (as shown in FIGS. 146, 150, and 152) at which time, the snare 14600 has extended out through the distal exit 14142 and, because the guide rail 10410, 11210 is disposed within the shaft 11220 (not shown in FIGS. 143 to 150 but shown in FIG. 152), the snare 14600 slides along the bridge 11214 of the guide rail 10410, 11210 and exits through the central opening of the clip 11251 to open and be ready to capture cords 2 within the snare opening. It is noted that the snare 14600 is prevented from being exposed to the environment outside the interior body 14120 when in the middle of reloading due to the length of the snare access window 11228, as shown in FIG. 153.

[0331] When the snare assembly 14100 is at its distal-most position, the lockout 14300 releases forward movement of the snare 14600 but also locks the snare assembly at its

distal-most position—the tail 14304 prevents both distal and proximal movement of the movement body 14130 when the snare 14600 is extended. This means that, when at this distal-most position, the snare assembly 14100 is locked on the shaft 11220 at all times when the snare is being extended or retracted. Only after the snare 14600 is fully retracted into the snare assembly 15100 (i.e., where a small eyelet remains outside the snare-guiding tube 14140 as shown in FIG. 153), the lockout 14300 disengages the snare assembly 14100 from the end of the shaft 11220 but reengages fixation of the snare extension parts to prevent any movement of the snare when the snare assembly 14100 is not present at its distal-most, clip-snaring position on the shaft 11220. Leaving a small eyelet of the snare 14600 exposed allows the cords 2 to slide freely as the snare assembly 14100 is moved proximally along the shaft 11220. A mechanism such as a ramp or cam can be used to further forcibly flex the tip of the snare-guiding tube 14140 away from the outside of the shaft 11220 to enable freer movement of the cords. This action can be increased to a point where the cords 2 are separated far enough from the shaft 11220 to assist the operator in being able to grasp the cords 2.

[0332] The snare can be of different shapes and diameters, some of which are shown in FIGS. 8, 12, 36, and 37. In an exemplary embodiment, the area of the oval/circle encapsulated by the snare is between approximately 5 and 15 cm², in particular, between approximately 8 and 10 cm². Preferably, the distal end of the snare defines a small catch that positively places the cord(s) to be secured at the distal-most end of the snare. An example of such a catch or loop is shown in FIGS. 8, 12, 36, and 37. This distal-most end always remains partially extended to prevent binding of the suture cords as shown in FIGS. 57 and 153.

[0333] In operation of the snare, the snare-guiding tube houses the operative end of the snare and guides it through the tube opening of the shaft, along the upper surface of the guide rail, through the clip in the cord-securing location, and out the distal end of the multiple-clip securing device to be presented to the user for receiving one or more cords therein. The movement body ejects the snare out from the snare-guiding tube with enough force against guide rail to cause snare deflection along the top surface of the bridge of the guide rail (e.g., ricochet) and through the center of the securing device (e.g., the clip). In an exemplary embodiment, such as that shown in FIG. 152, the distal exit of the snare-guiding tube is cut at an angle to assist with snare positioning to ensure that it passes through the clip. As described and/or shown herein, it is beneficial for the snare tip to be exposed out from the snare-guiding tube at all times to ensure that it passes through the clip each time the snare is extended.

[0334] The snare access window 10424, 11228 can be of various shapes. FIGS. 104 to 111, 121 to 123, 127, 128 show the window with a curve-cornered rectangular shape and FIGS. 112, 119, 125 show the window having a funnel shape. The window having a proximal funnel shape that decreases in width in the distal direction provides the snare-guiding tube with easier access into the window.

[0335] It is desirable to retain the snare assembly adjacent the handle as shown in FIG. 139. One exemplary low-footprint embodiment for retaining this placement provides opposing magnets at both the distal end of the handle and the proximal end of the snare assembly. This retaining structure keeps the snare assembly parked in its most-proximal posi-

tion. Locations **15400** for magnets forming the retaining structure can be found, for example, in FIGS. 139 and **154**. A switch that detects when the snare assembly is parked, i.e., parking switch **13900**, can be a hall-effect sensor that detects when the snare assembly is in its most-proximal position and the magnets at the locations **15400** can be used to trigger this hall-effect sensor. The sensor can be used to determine if the snare assembly **14100, 15530** has been advanced away from the handle **13810, 15510** when there is no clip in the ready-to-thread position. In this case, the drive system (e.g., **13850, 13852, 13854**) can move the inner tube **12540, 15650** proximally by a small distance, which movement will make the openings **11223, 15523** that are normally aligned for receiving the stop **14304, 15664** to be closed by the inner tube **12540, 15650**, thus entirely preventing extension of the snare.

[0336] Another exemplary embodiment for a multiple-clip securing device **15500** is shown in FIGS. **155** to **166**. Many of the features in this embodiment are similar or even the same as previous embodiments of the device. Even though such features may be referenced with a different numeral, that designation, alone, does not mean that the feature is different and can be the same. Likewise, where features are referenced with the numeral, that designation, alone, does not mean that the feature is the same and can be different.

[0337] In the multiple-clip securing device **15500**, a user handle **15510** includes a shaft **15520** in which resides a plurality of cord-securing clips described in detail below. Slidably disposed on the shaft **15520** is a snare assembly **15530**. As in the other exemplary embodiments herein, the securing process includes moving the snare assembly **15530** to the distal end of the shaft **15520**, as shown in FIGS. **157** and **160**. When the cords are ready to be snared, the snare **15532** is extended by moving a snare-extender sleeve **15534** distally, as shown in FIG. **161**, the snare **15532** being represented diagrammatically with dashed lines. Moving the snare-extender sleeve **15534** proximally, as shown in FIG. **158**, withdraws the snare **15532** and captures the cords **2** within the snare assembly **15530** for movement through a securing clip **15550** and out the side of the shaft **15520** for manipulation by the user. Sliding the snare assembly **15530** proximally, as shown in FIGS. **162** and **163**, pulls the ends of the cords **2** through the clip **15550** and out a snare-access window **15522** of the shaft **15520** to an orientation that allows a user to manipulate the free ends **2'** of the cords **2**. In this exemplary embodiment, the snare-access window **15522** is at the bottom of the shaft **15520** but it can be at another orientation along the circumference of the shaft **15520**. Having the opening on the bottom allows the cords **2** to drape due to gravity and preferentially opening a loop that is easier for an operator to grasp. When the cords **2** are ready to be secured by the clip **15550**, a clip-securing trigger **15512** of the handle **15510** is depressed to install the clip **15550** and activate a cord-cutting assembly within the handle **15510** and the shaft **15520** as described in further detail below. Finally, a reload trigger **15514** is pressed to automatically reload a clip **15550** for a further clip-securing procedure.

[0338] The flow chart of FIG. 103 describes an exemplary process for completing a cord-securing procedure with the multiple clip-securing device **15500**. In order to initialize the device **15500**, the snare assembly **15530** is in its retracted home position at the handle **15510**. It is assumed that the clips **15550** come preloaded within the shaft **15520** before it

is passed to a user, the clips **15550** being loaded, for example, at the manufacturer. Of course, there can be a pre-initialization requirement that has the user load the shaft **15520** with the clips **15550**. Once initialized, if the first clip **15550** (the distal-most one) is not already at a cord-securing location **15622**, it is advanced to the cord-securing location **15622**, examples of which are shown in FIGS. **156** and **158**. At this point, the device is ready to use.

[0339] An exemplary embodiment of a distal end of the shaft **15520** is depicted in FIGS. **155** to **163**. As can be seen, a set of clips **15550'** are installed on a guide rail **15540** for use in subsequent clip-securing operations. The guide rail **15540** is fixedly secured within the shaft **15520** through a rail block **15560**. Also disposed within the shaft **15520** is a distal portion of a cutting/reloading shaft **15650**, which is slidably disposed within the shaft **11220**. It is desirable to provide the outer surface of the shaft **15520** with the side window to allow a user to count the number of clips **15550'** remaining in the multiple-clip securing device **15500**, but that side window is not illustrated in the cross-sections of FIG. **155** et seq. and an example can be seen in FIGS. **104** to **111**.

[0340] To carry out the manual steps for capturing the cords **2**, the user distally extends the snare assembly **15530** from a proximal position at the handle **15510** (seen in FIG. **155**). During this movement, a snare-guiding tube **15610** will move from a position where the distal exit **15612** is sliding along the outer surface of the shaft **15520** to a radial-inward position in which it enters a snare access window **15522** of the shaft **15520**, to place the distal exit **15612** of the snare-guiding tube **15610** just proximal of the distal-most clip **15550** to be used in the present clip-securing operation. In such an orientation, the distal exit **15612** is aligned with the opening within the clip **15550**. Therefore, when the user distally extends the snare **15532** after the snare assembly **15530** reaches its distal end stop on the shaft **15520**, the snare **15532** passes through the opening of the clip **15550** and opens up to receive cords **2** therein to be secured. The user manually captures the cord(s) **2** within the snare **15532** by, for example, threading sutures through the central opening of the snare **15532**. Capturing is completed when the user retracts the snare **15532** proximally to hold the cord(s) **2** at the distal end of the snare assembly **15530**. Assuming the user is satisfied with the way that the cords **2** are captured in the snare **15532**, the user will, then, return the snare assembly **15530** proximally back to its proximal position at the handle **15510** to present the free ends **2'** of the cord(s) **2** outside the shaft **15520**. If the snaring is not acceptable, the snare **15532** is extended again for acceptable recapture. An orientation when the snare assembly **15530** has moved proximally back to the handle **15510** and has threaded the cords **2** through the clip **15550** in this ready-to-secure state is depicted in FIG. **162**.

[0341] The distal end of the shaft **15520** is then slid distally along the cord(s) **2** to a place where the user desires to set the clip **15550** housed inside the distal end of the shaft **15520**. For example, where the cord **2** is a surgical suture, a securing point of the clip **15550** is as close to the surgical site as possible with no length of the suture between the clip and the tissue. In such a case, the user moves the distal end of the shaft **15520** up against the tissue to place the clip **15550** in a ready to be fixed location. Automatic clip securement can now occur. The user presses the clip-securing trigger **15512** and, in doing so, two actions occur. First, the clip **15550** is

fixed to the cords 2 and, second, the cord(s) 2 is/are cut, the latter of which is depicted in FIG. 163. Movement of the multiple clip-secur ing device 15500 away from the securing site reveals to the user that the clip 15550 is secured on the cords 2 and the cords 2 are cut on the side of the clip 15550 facing away from the site. The multiple clip-secur ing device 15500 indicates (by visual, audible, tactile measures) that a cutting action has completed but a user can actuate the clip-secur ing trigger 15512 again, if desired, and the cutting action will repeat.

[0342] To reload the device 15500, the user presses the reload trigger 15514 and a procedure for placing a new distal-most clip 15550' at a cord-secur ing location 15622 at the distal end of the shaft 15520 can begin. The device 15500 automatically moves the cutting/reloading shaft 15650 rearward to a position where the clip-movement arms catch the clip 15550'. Then, the cutting/reloading shaft 15650 extends distally to place the clip 15550' at the cord-secur ing location 15622. The securing and cutting operations are repeated as before to secure the second clip 15550 on new cords 2 and move the clip 15550 off of the guide rail 15540. The clip-secur ing processes are repeated for as many times as needed in a given procedure. In the exemplary embodiment of FIGS. 155 to 163, there is one clip 15550 and twenty reload clips 15550' illustrated. As can be understood, the cutting/reloading shaft 15650 moves a distance proximally that increases for each new clip that is being reloaded. The clips are loaded with a known and fixed separation distance between each clip. In this example, they are disposed 0.050" apart. The drive mechanism includes a position sensor so that the device knows precisely its position along the central axis, which can include, for example, a linear encoder or a rotary encoder on the motor or drive pinion. In such a case, the control system would know exactly how to move the clip positioning mechanism a distance incremented by the spacing (0.050" in this example) with each subsequent clip that it is picking up. The movement algorithm is set within the device 9800, 11200, 15500 and starts in a ready position by holding a clip with the cutting/reloading shaft (i.e., the reloader) at the distal end of the shaft. This position aligns the shaft and the cutting/reloading shaft in a way that allows for snare access and securing of a cord or cords. When the user triggers the device to dispense the clip (e.g., by pulling in the clip-secur ing trigger), the cutting/reloading shaft is moved distally until the clip falls free from the guide rail and the two cord cutting edges closed. This movement is determined by a fixed displacement. The cutting/reloading shaft returns to a ready position upon release of the clip-secur ing trigger and waits for further user input. Upon triggering a reload (i.e., by depressing the reloading trigger), the reloader retracts proximally by a predetermined amount to a location of the next distal-most clip in the stack, which amount is incremented each time another distal-most clip is moved distally and dispensed. The reloader completes the movement sequence by moving distally and returning to the ready position.

[0343] With regard to the connection between the cutting/reloading assembly and the securing devices, e.g., the clip 10400, 10800, 11250, 11251, 15550, various exemplary embodiments include a cutting/reloading shaft 15650 that slides back and forth within the shaft 9820, 11220, 15520, a body of that cutting/reloading shaft 15650 having, at its distal end, two non-illustrated clip-movement arms. Exemplary embodiments of the clip-movement arms 10442,

11242, 12560 and how they interact with the clip 10400, 10800, 11250, 11251, 15550 in order to carry out the cord-secur ing processes of the device 9800, 11200, 15500 are illustrated FIGS. 129 to 134. The cutting/reloading shaft 15650 has all of the features of the arm-carrying tube of the cutting/reloading assemblies described above and/or shown and is, therefore, not repeated here.

[0344] The guide rail 15540 is similar to the other exemplary embodiments of the guide rail 10410, 11210. The guide rail 15540 also possesses features that enhance the clip-secur ing processes of the exemplary systems 9800, 11200, 15500. For ease of understanding, only guide rail 15540 will be referred to but this single reference applies to all embodiments of the guide rail.

[0345] In contrast to the exemplary embodiment of FIG. 136, the clip-holding guide rail 15540 is rectangular in cross-section with no intermediate bridge or opposing walls. The rectangular shape allows the clips 15550 to be held open with a virtually complete contact area between the two opposing, interior clipping surfaces of the clip 15550 and the upper and lower surfaces of the guide rail 15540. This configuration can prevent damage to the clip 15550 as it is being slid over the length of the guide rail 15540. Polishing and surface treatments can further reduce any friction and/or wear that occurs during the sliding movement of the clips 15550. The open space through which the cord-capturing snare 15532 is to be passed to slide along the upper surface of the guide rail 15540 and pass through the proximal face of the open clip 15550 is defined by a tapered slope 15542. The angle of the slope 15542 can be set at any value, however, one beneficial angle is a value that is approximately equal to the angle that the lower internal flexing wall 13300 of the clip 15550 makes with respect to the upper/lower surface of the guide rail 15540. In this way, if the snare 15532 slides against the upper surface of the guide rail 15540 and then down the slope 15542, having the surface of the lower internal flexing wall 13300 match the slope 15542 permits travel of the snare 15532 substantially without friction or snagging. This is especially true if the central edge of the wall 13300 is just below the distal end of the slope 15542.

[0346] During manufacture of the multiple-clip securing device 15500, it is desirable to preload all of the clips 15550 onto the guide rail 15540 before the guide rail 15540 is installed in the handle 15510. To assist with this preloading, the proximal end 15544 of the guide rail 15540 is ramped or chamfered. The ramp can start from a point or from almost a point and can taper outwards (up/down) until reaching a height that is desirable for extending the snare 15532 through the opening within the clip 15550. This means that the thickness of the guide rail 15540 (top/bottom) can be variable over the longitudinal length of the guide rail 15540 that starts small to place a lower load on the internal features of the clip 15550, for example, for storage purposes, and only place the higher load on the internal features when the clip 15550 is at the distal end of the guide rail 15540 ready to be used. For manufacturing ease, one or more retainer holes 15546 can be bored in the guide rail 15540. These holes 15546 can also be used to support the guide rail 15540 as the clips 15550 are loaded thereon. Shapes other than a rectangular cross-section of the guide rail 15540 can be used to hold the clips 15550 as mentioned herein.

[0347] The guide rail 15540 can be fabricated in the various production methods described and/or shown with

respect to guide rail 11210, with the materials that can be used to form the guide rail 15540 and the surface finishing being selected from the same variations as well.

[0348] The handle 15510 of the multiple-clip securing device 15500 can be configured to contain the various features described with regard to other exemplary embodiment described and/or shown herein, including, for example, the single, drop-in, circuit board 13820, the power supply 13860, the motor 13850, pinion 13852 and rack 13854, and the side-mounted switches. As opposed to the clip-securing trigger 13830 which pivots about a pivot pin 13832, in this exemplary embodiment, the clip-securing trigger 15512 is a sliding trigger to provide a longer stroke than the pivoting trigger 13830 and to give the user time to decide if firing should be cancelled, which makes the device less sensitive to inadvertent clip firing.

[0349] FIGS. 98 to 102 and 141 to 153 illustrate exemplary embodiments of a movable snare assembly 9830, 14100. FIGS. 155 to 165 depict another exemplary embodiment of the snare assembly 15530. The snare assembly 15530 provides various complex functions. First, it is disposed on the shaft 15520 so that it can move longitudinally thereon from a retracted proximal position at the handle 15510 to an extended distal position in which the snare is extended through the snare access window 9822, 10424, 11228, 15522 and through the clip 10400, 11250, 15550 to a position distal of the shaft 15520 for capture of the cords 2. Second, the snare assembly 15530 provides various lockouts during this movement along the shaft 15520, for example, to prevent extension of the snare at all times except when the snare-guiding tube 15610 is correctly positioned just proximal of the clip 10400, 11250, 15550. Third, the snare assembly 15530 extends the snare 15532 to a distal position that is maximized for easy cord snaring by a user but, at the same time, is to be as physically compact as possible for good human ergonomics.

[0350] How the snare assembly 15530 extends the snare 15532 to a distance while the actual snare assembly 15530 is relatively small is explained with respect to other embodiments and is not repeated herein.

[0351] The snare assembly 15530 comprises three main parts, including the outer snare-extending sleeve 15534 that freely rotates about an interior body 15620, which is connected to a snare-movement body 15630. The ability of the snare-extending sleeve 15534 to rotate freely about the interior body 15620 allows the user to not be concerned about how his/her hand is placed on the sleeve 15620 as the device is being rotated constantly during a surgical procedure. Free rotation also prevents torque from being imparted to the snare assembly 15530, which torque would cause additional drag during longitudinal translation on the shaft 15520.

[0352] These three parts provide a mechanism that allows the non-illustrated snare to extend out from the distal end of the snare assembly 15530 to a distance that is a multiple of the distance that the snare-movement body 15630 moves with respect to the interior body 15620. As in the previous embodiments, motion of the snare 15532 occurs by moving the snare-movement body 15630 towards the interior body 15620 resulting in a movement of the snare 15532 from its captured position within the snare-guiding tube 15610 to its final extended orientation outside the distal end of the snare assembly 15530. The snare 15532 progresses through the distance multiplication features and terminates at the proximal end of the snare-guiding tube 15610 that, in this exemplary embodiment is substantially in a J-shape. The distal snaring portion of the snare 15532 is collapsed within the snare-guiding tube 15610 while in the non-extended state of the snare 15532—the state shown in FIGS. 155 to 159—with a terminal snare end (e.g., loop 12) extending slightly out of the distal end of the snare-guiding tube 15610.

[0353] In FIG. 159, the lockout 15660 is in a position that exists during sliding of the snare assembly 15530 along the shaft 15520. In this position, the anti-rotation fin 15662 acting as a key is engaged in the groove 15521 along the length of the shaft 15520. As the snare assembly 15530 reaches the distal end of the shaft 15520, the sloped distal fin edge 15668 hits the terminal wall of the groove 15521 and forces the lockout 15660 to pivot, thereby moving the stop 15664 into the stop orifice 15523 to halt motion of the snare assembly 15530 along the shaft 15520. FIGS. 160 and 161 illustrate the snare assembly 15530 in the snare-extended state with movement of the sleeve 15534 displacing the snare-movement body 15630 distally to touch the proximal side of the interior body 15620 and, thereby, extend the snare 15532 distally out through a clip to its fullest extent.

[0354] Grounding of the snare 15532 is illustrated in FIG. 164. The snare 15532 is grounded at its proximal end at a grounding area 15624 within the interior body 15620. In this exemplary embodiment, the grounding area 15624 is a crevice having a Z-shape that corresponds to an outer shape of a grounding end 16412 of a snare-grounding tube 16410. The grounding end 16412 is fixed to the interior body 15620 (e.g., with a screw 16420) and in which the proximal end of the snare 15532 is fixed, e.g., crimped. Also with respect to FIG. 164 and FIG. 165 as well, it can be seen that the outer tube of the shaft 15520 and the inner tube of the cutting/reloading shaft 15650 are flush at the distal end of the multiple-clip securing device 15500. This is desirable to allow a positioning of the clip 15550 flush to the inner and outer tube ends to aid in tensioning the device on cords 2 to be secured with the clip 15550 and to present the most blunt edge possible to the sewing cuff or tissue that is being affixed.

[0355] Another feature of the snare assembly 15530 is that it provides various lockouts during movement along the shaft 15520. The many different lockouts are provided by a single device having a complex shape, which device interacts with other features within the snare assembly 15530 and the shaft 15520. This exemplary embodiment of the multi-function lockout 15660 is a rocker pivoting about a pivot 15626 on the interior body 15620 and having fins and varying surface features and heights. Depending on the state of the snare assembly 15530 and/or on the state of the snare-movement body 15630, the lockout 15660 provides a different lockout function.

[0356] In a first lockout state, it is desired to retain the snare 15532 in its fully retracted position and prevent it from extending. This first state exists while the snare assembly 15530 is proximal of its distal-most position. FIGS. 155 to 159 show the multi-function lockout 15660 in this first lockout state in which the snare assembly 15530 is able to translate along the shaft 15520 from the handle 15510 to the distal end of the shaft 15520. To fix the interior body 15620 in a single circumferential position about the shaft 15520, an anti-rotation fin 15662 of the lockout 15660 rides in a groove 15521 of the shaft 15520 to act as a key within the keyway of the groove 15521. The blade feature of the fin 15662 that

is positively engaged in the groove **15521** on the shaft **15520** is selected to have a length that remains within the groove **15521** at all times. In an alternative embodiment, the fin **15662** can selectively become disengaged from the keyway at the distal-most position while another portion of the lockout **15660** (e.g., the stop **15664**) keeps the snare assembly **15530** in position and clocking. In a further alternative embodiment, there can be a separate key on parts of the snare assembly **15530** that continuously engages the groove **15521**. Other embodiments for clocking the interior body **15620** can include a keyway that is internal or external to the shaft **15520**. Another exemplary embodiment for keeping the internal body **15620** clocked with respect to the shaft **15520** includes placing a secondary tube along the outside surface of the shaft **15520** to form a “snowman” cross-section. Likewise, that secondary tube can be replaced with an external blade or square wire or a hexagonal or other polygonal rod. The exterior shape of the shaft **15520** can also be altered to provide the keying feature. Other external configurations include a comb and slot or an integral stop such as a cross-pin, a horseshoe, or a fin on the shaft **15520**. In a further exemplary embodiment, the entire snare assembly **15530** can be freely rotating proximal to a given point on the shaft **15520** but, after passing a set distal location, the internal body **15620** is forced to clock into a given orientation. This can be accomplished, for example, with a funnel and pin assembly. All of these various features together define a method for keeping the snare assembly **15530** clocked onto the shaft **15520**.

[0357] The lockout **15660** pivots about the pivot **15626** that is oriented transverse to the shaft **15520**. The rotational orientation of the lockout **15660** shown in FIGS. 143 and 147 keeps the stop **15664** below the shaft **15520** because the stop **15664** has a width greater than the width of the groove **15521** and, therefore, it is also wider than the fin **15662**. The cross-sectional views of FIGS. 155 to 165 do not allow the thickness of the stop **15664** or the sides of the lockout **15660** to be seen. Nonetheless, the width of the stop **15664** is greater than the fin **15662** so that the stop **15664** remains in the position shown in FIGS. 155 to 159 until the lockout **15660** moves distally to align the stop **15664** with a stop orifice **15523** of the shaft **15520**. Also seen in FIGS. 155, 156, 159, and 161 is a side boss **15666** extending laterally from at least one side of the lockout **15660**. In the orientation shown in these figures, the side boss **15666** rests within a slot **15634** of the snare-movement body **15630** to prevent the snare-movement body **15630** from moving either towards or away from the interior body **15620**, thereby keeping the snare-movement body **15630** in its proximal position in which the snare **15532** is retained in its retracted position and cannot extend.

[0358] FIGS. 157 and 158 illustrate how the side boss **15666** is moved out of the slot **15634** by various other features of the snare assembly **15530**. First, the shaft **15520** defines the stop orifice **15523** just distal of a distal end of the groove **15521**. The stop **15664** slides along the outside surface of the shaft **15520** and, because the stop **15664** is wider than the groove **15521**, a non-illustrated bias device (e.g., a spring) keeps the lockout **15660** biased in a counter-clockwise position (in the view of FIGS. 155 to 163) until it comes to the stop orifice **15523**. What causes the desired fin-raising movement (i.e., clockwise rotation of the lockout **15660**) is a cam action that occurs when the sloped distal fin edge **15668** comes into contact with and continues to contact

the distal end of the groove **15521**, which is depicted in FIG. 159. Further distal movement of the interior body **15620** on the shaft **15520** causes the distal end of the groove **15521** to force the fin **15662** upwards and, thereby, move the stop **15664** into the stop orifice **15223**, which prevents any further distal movement of the interior body **15620**—because the distal edge of the stop orifice **15523** forcibly contacts the distal face of the stop **15664**. When this occurs, as shown in FIGS. 158 and 161, the lockout **15660** has pivoted to such an extent to move the side boss **15666** radially upwards sufficiently far to move out of the slot **15634**, thereby freeing the snare-movement body **15630** from its fixed state with respect to the interior body **15620**. Simultaneously, the distal exit **15612** of the snare-guiding tube **15610** is at a position in which it can enter a tube opening **15522** in the shaft **15620**.

[0359] The snare-guiding tube **15610** is grounded near its distal end by a pivot supporting tube guide block **15810**, which allows the snare-guiding tube **15610** to move freely up and down through an arc similar to that accomplished by the previously proximally grounded tube but with an advantage of a much shorter length, because the area of flexing of the tube is also part of the length of the trombone tube that is used to extend the snare. As shown in FIGS. 155 to 161, the snare-guiding tube **15610** has a bend **15614** to provide clearance so that the distal exit **15612** can flex downwards (with regard to the views of the drawings) when the distal exit **15612** of the snare-guiding tube **15610** is not present at the snare-access window **15522** as shown in the difference between FIGS. 158 and 158. The flexing movement of the distal end of the snare-guiding tube **15610** is illustrated in FIG. 158 with the double-headed arrow, a corresponding movement being carried out with the tube guide block **15810** that slides within a block cavity **15628** of the interior body **15620**. An alternative to this exemplary shape is a double-bend or a recurve or S-tube that can align the opening of the distal exit **15612** more in line with the top surface of the guide rail **15540** so that the snare **15532** is presented with less ricochet into the opening of the clip **15550**. Such an S-tube can provide features to vertically position its exit relative to the guide rail **15540**, relative to the shaft **15510**, and/or, relative to the snare assembly **15530**. Another alternative embodiment of the snare-guiding tube **15610** includes an open cut scoop or similar shape that deflects the snare **15532** and directs it toward the clip opening.

[0360] Because a distal extent of the snare-guiding tube **15610** is pre-bent with a bias towards the shaft **15620**, when the distal exit **15612** is not within the snare-access window **15522**, the distal exit **15612** rides along the top exterior surface of the shaft **15620**, as shown in FIG. 156. The snare-guiding tube **15610** remains in that radially outward flexed state until the distal exit **15612** of the snare-guiding tube **15610** enters the snare-access window **15522** (as shown in FIGS. 157, 158, 160, and 161), at which time, a radially extending cavity **15629** in which the distal extent of the snare-guiding tube **15610** resides allows that distal extent to spring radially inwards into the snare-access window **15522** to an orientation in which the distal exit **15612** is aligned with the central opening of the clip **15550** that is loaded in the cord-securing location **10802, 11222, 15622** ready to secure cords **2**, which orientation is especially visible in FIG. 158. At a point when the side boss **15666** raises, no lock of the lockout **15660** prevents the snare-movement body

15630 from translating distally all the way until its distal surface meets a proximal side of the interior body **15620** (as shown in FIGS. 160 and 161) at which time, the snare **15532** has extended out through the distal exit **15612** and, because the guide rail **15540**, is disposed within the shaft **15620**, the snare **15532** slides along the surface of the guide rail **15540** and exits through the central opening of the clip **15550** to open and be ready to capture cords **2** within the snare opening. It is noted that the snare **15532** is prevented from being exposed to the environment outside the interior body **15620** when in the middle of reloading due to the length of the snare-access window **15522**, as shown in FIG. 159.

[0361] Also shown in FIG. 159 is a secondary lock that prevents the lockout **15660** from rotating clockwise during the reloading operation. In particular, when the cutting/reloading shaft **15650** moves proximally, which it must do during any reloading operation, the opening in the cutting-reloading shaft **15650** that is aligned with the snare-access window **15522**, is no longer aligned and, therefore, completely covers the stop orifice **15523** to prevent the stop **15664** from entering the stop orifice **15523**. This, in turn, completely prevents the user from attempting to move the snare-movement body **15630** distally and deploy the snare **15532** while reloading.

[0362] To summarize the movement, when the snare assembly **15530** is at its distal-most position, the lockout **15660** releases forward movement of the snare-movement body **15630** (i.e., the snare **15532**) but also locks the snare assembly **15530** at its distal-most position—the stop **15664** prevents both distal and proximal movement of the snare-movement body **15630** when the snare **15532** is extended. This means that, when at this distal-most position, the snare assembly **15530** is locked on the shaft **15520** at all times when the snare **15532** is being extended or retracted. Only after the snare **15532** is fully retracted into the snare assembly **15530** (i.e., where only the small eyelet remains outside the snare-guiding tube **15610** as shown in FIG. 153), the lockout **15660** disengages the snare assembly **15530** from the end of the shaft **15520** but reengages fixation of the snare extension parts to prevent any movement of the snare **15532** when the snare assembly **15530** is not present at its distal-most, clip-snaring position on the shaft **15520**.

[0363] In operation of the snare **15532**, the snare-guiding tube **15610** houses the operative end of the snare **15532** and guides it through the snare-access window **15522**, along the upper surface of the guide rail **15540**, through the clip **15550** in the cord-securing location **15622**, and out the distal end of the multiple-clip securing device **15500** to be presented to the user for receiving one or more cords **2** therein. The snare-movement body **15630** ejects the snare **15532** out from the snare-guiding tube **15610** with enough force against guide rail **15540** to cause snare deflection along the top surface thereof (e.g., ricochet) and through the center of the securing device (e.g., the clip).

[0364] In this exemplary embodiment, the snare **15532** can be of different shapes and diameters as explained herein. These features are not repeated. Likewise, the snare access window **10424, 11228, 15522** can be of various shapes. FIGS. 156 and 161 show the window **15522** with a curve-cornered rectangular shape but the window **10424, 11228, 15522** can be of any desired shape including those described and/or shown herein.

[0365] It is desirable to retain the snare assembly **15530** adjacent the handle **15510** as shown in FIGS. 155, 162, and

163. One exemplary low-footprint embodiment for retaining this placement provides opposing magnets at both the distal end of the handle **15510** and the proximal end of the snare assembly **15530**. This retaining structure keeps the snare assembly parked in its most-proximal position. Locations **15632** for magnets forming the retaining structure can be found, for example, in FIGS. 156 and 158. A switch that detects when the snare shuttle is parked, i.e., parking switch, can be a hall-effect sensor that detects when the snare assembly is in its most-proximal position and the magnets at the locations **156320** can be used to trigger this hall-effect sensor.

[0366] All together, the various features of the handle **13810, 15510** provide ways to minimize the so-called footprint of the multiple-clip securing device. An alternative embodiment to the pistol-shaped handle of FIGS. 98 to 102, 138, and 155 is a pear-shaped ball (similar to a conductor's wand) that can be rotated within a user's hand in all pitch, roll, and yaw axes.

[0367] With regard to the securing devices themselves, in general, they are stored-energy devices that use the stored energy to secure the cords. The clips have no stored energy before being forced onto the guide rail. However, when forced thereon and opened before firing, the energy for clipping is stored in the clip. The entire amount of energy can be stored right as the clip is slid onto the guide rail, or a variable amount can be stored depending on where the clip is placed on the H-rail. Also envisioned is an E-shaped clip that uses a rail different from the H-rail.

[0368] Various clips have been mentioned herein and exemplary embodiments of the clip have been shown. One exemplary embodiment of the clip **11251, 15550** shown within other parts in various figures is shown by itself in FIGS. 171 and 172. For ease of understanding, reference numeral **17100** will be used to describe the clip **17100**, which is in its rest or steady state in FIG. 171. Portions of this clip **17100** include a base **17110** having a cutout shape **17112** that defines an upper internal flexing wall **17120** and a lower internal flexing wall **17130**. Here, the cutout shape **17112** has variations, the shape of which creating teeth **17122, 17132** on the opposing cord-securing surfaces **17124, 17134**. As shown in FIG. 172, when the clip **17100** is installed on a guide rail, for example, the upper and lower internal flexing walls **17120, 17130** flex outward to define an opening **17140** and create a securing location between the opposing cord-securing surfaces **17124, 17134** and imparting cord-securing energy for future use of the clip **17100**. The body **17110** of the clip **17100** can also be formed with handling surfaces **17114** for loading the clip **17100** onto a guide rail. Alternative exemplary embodiments of the cutout shape in a clip **17100** are depicted in FIGS. 173, 174, and 175. FIG. 173 illustrates ports **17300** and does not include teeth. FIG. 174 includes variations **17400** in the cord-securing surfaces. Finally, FIG. 175 shows a variation of a tooth **17500** formed by the cord-securing surfaces.

[0369] Motion of the securing devices (e.g., the clips) can be accomplished in various ways. Exemplary embodiments of a rack-and-pinion drive are shown in FIGS. 138 to 140 and 155 to 163. In another exemplary embodiment shown in FIGS. 167 to 169, linear-motion of the clips can be imparted by a screw drive and/or a variable pitch screw within the handle for high speed on exchange and high force for firing/cutting. Only the screw drive components are shown in FIGS. 167 to 169 for clarity but these components are

envisioned to replace other drive components described and/or shown herein. In particular, an exemplary embodiment of a screw drive 16700 contains a motor 16710 (which can have an internal gear box 16712) having an output shaft 16714. A screw assembly 16720 includes a drive connector 16722 connected to the output shaft to receive the rotational movement thereof. The drive connector 16722 is fixedly connected or connected through a non-illustrated clutch to a screw 16724, which can have a constant or variable pitched thread 16726 depending on the circumstances of use. The outer shaft 9820, 11220, 15520 of the device is held immovable with respect to the motor 16710 and the screw 16724 by a frame 16730 that longitudinally holds the drive connector 16722 in place while allowing the drive connector 16722 to freely rotate along with the output shaft 16714. The cutting/reloading assembly/shaft 10440, 11240, 12424, 15650 has an internal guide with a correspondingly pitched internal thread (not illustrated) to the exterior threads 16726 of the screw 16724. In this way, rotation of the screw 16724 in a first direction will move the cutting/reloading assembly/shaft 10440, 11240, 12424, 15650 distally, as shown in the transition from FIG. 167 to FIG. 168, or proximally if rotated in the opposite direction. One advantage of a screw drive is the compactness of the long stroke because it submerges the screw into shaft.

[0370] To track motion of the any drives described and/or shown herein, an encoder can be mounted on the motor. Alternatively or additionally, a linear encoder can be mounted on the rack to determine absolute position independent of the motor. With a drive screw directly mounted to the motor, as shown in FIGS. 167 to 169, an encoder can be associated with the drive screw. A screw/nut drive also can be used. One drawback to this particular configuration is that two-times the stroke is needed or the screw needs to be buried inside the shaft. It is possible to have the nut small enough to be embedded within the shaft to shorten the handle length. An encoder can also be mounted on the main circuit board. For calibration of the drive, in an exemplary embodiment, position can be calibrated based on a sacrificial clip.

[0371] FIG. 170 illustrates an exemplary embodiment of an electro-mechanical way to deploy securing devices and to only use the gearbox for reloading and positioning the next securing device. This has the advantage of possibly improving the tactile feel by the user of deploying the securing device. This exemplary embodiment of a multiple-firing securement device 17000 has a motor-controlled screw mechanism 17010 that turns a screw 17012 to move the inner cutting/reloading assembly/shaft 10440, 11240, 12424, 15650 to thereby grasp various securing devices (e.g., clips) installed on the guide rail 17020 retainer at successively further distances on the guide rail 17020 from the securement-installing location 17022 and a mechanical lever 17030 that moves the entire cutting/reloading assembly/shaft 10440, 11240, 12424, 15650 distally to perform cutting of the cords 2.

[0372] Software of the control circuit of any of the exemplary embodiments can perform various functions for operating the multiple-clip securing device. First, error checking can be done based on the draw of current, which measures the torque that the motor is experiencing. Also, a distal detent position can be sensed using either or both of torque and current. Sensing of high current can be used to indicate that the device has picked up more than one or multiple

clips. Sensing of low current can be used to indicate that the clip has been missed and not picked up by the reloading process. A self-clearing function can be added to the knife action based on a measurement of drag. Counting the number of securing devices can be done with a program that determines movement of the snare assembly before enabling the ability to fire the device and install the securing device. Based on a position of the parking switch, the device can lock out any reloading or firing if the snare assembly is not parked in the distal position. An alarm can be included to indicate motion of the snare assembly before a reload occurs. The LED on the circuit board as a user-interface can indicate (by color, flashing, patterns, etc.) various and many different states of the device. Also, voltage can be sensed on the battery to determine various operating conditions. These are only a few examples of how software can be used to monitor, report, display, and otherwise control use of the multiple-clip securing device.

[0373] With regard to powering on any of the multiple-clip securing devices, the multiple-clip securing device can be placed in packaging that, when the multiple-clip securing device is removed, a grenade pin is pulled or remains with the packaging to enable and, thereby power-on, the device. A battery-drain feature can also be provided to prevent multiple uses after a set amount of time occurs when the multiple-clip securing device has been removed from the packaging.

[0374] When any motors are described and/or shown herein, they also include, where desirable, any gearing or transmissions that are necessary to reduce the motor turns rate to affect the function of that motor. These transmissions are not described herein in further detail.

[0375] It is noted that various individual features of the inventive processes and systems may be described only in one exemplary embodiment herein. The particular choice for description herein with regard to a single exemplary embodiment is not to be taken as a limitation that the particular feature is only applicable to the embodiment in which it is described. All features described herein are equally applicable to, additive, or interchangeable with any or all of the other exemplary embodiments described herein and in any combination or grouping or arrangement. In particular, use of a single reference numeral herein to illustrate, define, or describe a particular feature does not mean that the feature cannot be associated or equated to another feature in another drawing figure or description. Further, where two or more reference numerals are used in the figures or in the drawings, this should not be construed as being limited to only those embodiments or features, they are equally applicable to similar features or not a reference numeral is used or another reference numeral is omitted.

[0376] The foregoing description and accompanying drawings illustrate the principles, exemplary embodiments, and modes of operation of the devices and methods. However, the devices and methods should not be construed as being limited to the particular embodiments discussed above. Additional variations of the embodiments discussed above will be appreciated by those skilled in the art and the above-described embodiments should be regarded as illustrative rather than restrictive. Accordingly, it should be appreciated that variations to those embodiments can be made by those skilled in the art without departing from the scope thereof as defined by the following claims.

What is claimed is:

1. A surgical suture-snaring device, comprising:
 - a handle body;
 - an automated carriage movement assembly that moves a carriage conveyor proximally and distally relative to the handle body, the automated carriage movement assembly comprising at least a first crimp;
 - an end effector body extending distally relative to the handle, the end effector body having a distal end defining a distal opening through which suture material is snared and an internal crimp loading position into which the first crimp can be loaded prior to crimping;
 - an outer tube surrounding the end effector and movable proximally and distally relative to the handle body and the end effector body;
 - an automated crimping assembly actuatable to deform the first crimp onto snared suture material adjacent the crimp loading position to crimp the first crimp to the snared suture material; and
 - a cutting assembly actuatable to cut the snared suture material on a proximal side of the first crimp, thereby separating the first crimp and the snared suture material distal of the first crimp from the device.
2. The device of claim 1, wherein the automated carriage movement assembly comprises a carriage motor operable to move the carriage conveyor proximally and distally relative to the handle body.
3. The device of claim 1, wherein the carriage conveyor is linked by a coupler to a crimp carriage, and wherein the crimp carriage is operable to shuttle crimps distally and to move the first crimp to the crimp loading position.
4. The device of claim 1, further comprising a snare movement device for moving a snare distally relative to the end effector body to snare suture material and moving the snare proximally to draw the snared suture material into the device.
5. The device of claim 1, wherein the automated crimping assembly comprises a crimping motor and a hammer.
6. The device of claim 5, wherein the outer tube is moved distally to a holding position to slightly engage the hammer with the first crimp and to hold the first crimp in the crimp loading position.
7. The device of claim 5, wherein the outer tube is moved distally to a crimping position to move the hammer against the first crimp in the crimp loading position and deform the first crimp onto the snared suture material.
8. The device of claim 1, wherein the automated crimping assembly comprises a clutch, a flying gear and a pinion.
9. The device of claim 1, further comprising a control assembly that controls operation of the automated carriage movement assembly, the automated crimping assembly and the cutting assembly.
10. The device of claim 1, further comprising at least one of a visual indicator, an audio indicator and a haptic indicator for indicating at least one state of the device to a user.
11. The device of claim 1, wherein the cutting assembly comprises a movable pushrod and fixed blade.
12. A surgical suture-snaring device, comprising:
 - a handle body;
 - an automated carriage movement assembly that moves a carriage conveyor proximally and distally relative to the handle body, the automated carriage movement assembly comprising at least a first crimp;
 - an end effector body extending distally relative to the handle, the end effector body having a distal end defining a distal opening through which suture material is snared and an internal crimp loading position into which the first crimp can be loaded prior to crimping;
 - an automated crimping assembly actuatable to deform the first crimp onto snared suture material adjacent the crimp loading position to crimp the first crimp to the snared suture material;
 - a cutting assembly actuatable to cut the snared suture material on a proximal side of the first crimp, thereby separating the first crimp and the snared suture material distal of the first crimp from the device; and
 - a control assembly that controls operation of the automated carriage movement assembly, the automated crimping assembly and the cutting assembly.
13. The device of claim 12, further comprising a force-measuring and indicating assembly connected to the control assembly and positioned between the distal end and the handle, wherein the force-measuring and indicating assembly is configured to measure a tying force in the suture material imposed on the end effector body.
14. The device of claim 13, wherein the end effector is grounded to the handle.
15. The device of claim 13, wherein the tying force is defined by contact between the end effector body and a surgical site while the user is pulling on ends of the suture material from a side of the device.
16. The device of claim 13, wherein the force-measuring and indicating assembly comprises a load cell.
17. The device of claim 13, wherein the force-measuring and indicating assembly is configured to enable crimping when the detected tying force is within a predetermined tying force range.
18. The device of claim 13, wherein the force-measuring and indicating assembly is configured to automatically trigger crimping to occur upon detecting that the tying force is within a predetermined range.
19. The device of claim 13, wherein the force-measuring and indicating assembly is configured to cause at least one of a visual, audio or haptic signal to occur upon detecting that the tying force is at least equal to a predetermined minimum tying force.
20. The device of claim 13, wherein the force-measuring and indicating assembly is configured to lock out operating of the automated crimping assembly if the detected tying force is above or below a predetermined tying force range.

* * * * *