



US012387965B2

(12) **United States Patent**
Gomm

(10) **Patent No.:** **US 12,387,965 B2**
(45) **Date of Patent:** ***Aug. 12, 2025**

(54) **ELECTROSTATIC CHUCK FOR USE IN SEMICONDUCTOR PROCESSING**

(71) Applicant: **Lam Research Corporation**, Fremont, CA (US)

(72) Inventor: **Troy Alan Gomm**, Tigard, OR (US)

(73) Assignee: **Lam Research Corporation**, Fremont, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/481,886**

(22) Filed: **Oct. 5, 2023**

(65) **Prior Publication Data**

US 2024/0038568 A1 Feb. 1, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/652,243, filed on Feb. 23, 2022, now Pat. No. 11,817,341, which is a (Continued)

(51) **Int. Cl.**
H01L 21/683 (2006.01)
C23C 16/458 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01L 21/6833** (2013.01); **C23C 16/4586** (2013.01); **C23C 16/46** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC . H01L 21/6833; C23C 16/4586; C23C 16/46; C23C 16/509; H01J 37/32532;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,491,167 A 12/1949 Drew
2,684,698 A 7/1954 Shaff
(Continued)

FOREIGN PATENT DOCUMENTS

CN 200956667 Y 10/2007
CN 101495670 A 7/2009
(Continued)

OTHER PUBLICATIONS

CN Office Action dated Feb. 28, 2023 in Application No. 201880057283.X with English translation.

(Continued)


Primary Examiner — Charlee J. C. Bennett

(74) *Attorney, Agent, or Firm* — Weaver Austin Villeneuve & Sampson LLP

(57) **ABSTRACT**

A semiconductor substrate processing apparatus includes a vacuum chamber having a processing zone in which a semiconductor substrate may be processed, a process gas source in fluid communication with the vacuum chamber for supplying a process gas into the vacuum chamber, a showerhead module through which process gas from the process gas source is supplied to the processing zone of the vacuum chamber, and a substrate pedestal module. The substrate pedestal module includes a pedestal made of ceramic material having an upper surface configured to support a semiconductor substrate thereon during processing, a stem made of ceramic material, and coplanar electrodes embedded in the platen, the electrodes including an outer RF electrode and inner electrostatic clamping electrodes, the outer RF electrode including a ring-shaped electrode and a radially extending lead extending from the ring-shaped electrode to a central portion of the platen, wherein the ceramic material of the platen and the electrodes comprise a unitary body made in a single sintering step.

8 Claims, 6 Drawing Sheets

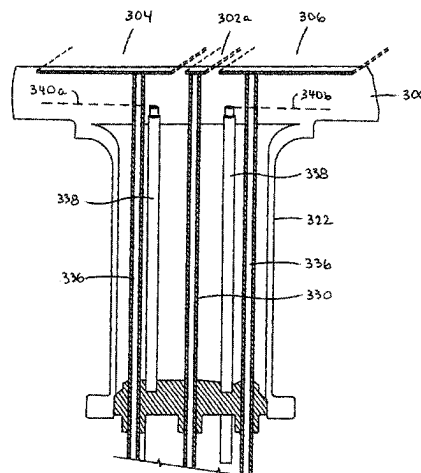

Related U.S. Application Data		8,136,820 B2 *	3/2012	Morioka	H01L 21/6831
continuation of application No. 15/612,423, filed on Jun. 2, 2017, now Pat. No. 11,289,355.		9,213,021 B2	12/2015	Plant et al.	279/128
		9,805,965 B2	10/2017	Sadjadi et al.	
		9,850,573 B1	12/2017	Sun	
		10,079,154 B1	9/2018	Le et al.	
		10,083,818 B2	9/2018	Khaja et al.	
		10,121,641 B2	11/2018	Long et al.	
		10,147,610 B1 *	12/2018	Lingampalli	C23C 16/45514
		10,403,535 B2	9/2019	Ye et al.	
		10,431,467 B2 *	10/2019	Lingampalli	C23C 16/045
		10,515,781 B1	12/2019	Long et al.	
		10,784,083 B2	9/2020	Long et al.	
		10,847,345 B2	11/2020	Long et al.	
		10,937,684 B2	3/2021	Horiuchi	
		11,086,233 B2	8/2021	Topping et al.	
		11,183,368 B2 *	11/2021	French	H01J 37/32541
		11,289,355 B2 *	3/2022	Gomm	C23C 16/46
		11,469,084 B2	10/2022	Thomas et al.	
		11,724,362 B2	8/2023	Bajaj et al.	
		11,745,302 B2	9/2023	Ganapathiappan et al.	
		11,776,789 B2	10/2023	Dorf et al.	
		11,817,341 B2	11/2023	Gomm	
		11,835,868 B2	12/2023	Topping et al.	
		11,848,176 B2	12/2023	Dorf et al.	
		11,990,360 B2	5/2024	Vasquez et al.	
		12,217,939 B2	2/2025	French et al.	
		12,243,725 B2	3/2025	Thomas et al.	
		2001/0019472 A1 *	9/2001	Kanno	H01L 21/6833
					361/234
		2001/0027972 A1 *	10/2001	Yamaguchi	H05B 3/283
					219/468.1
		2001/0042744 A1	11/2001	Tachikawa et al.	
		2002/0027762 A1 *	3/2002	Yamaguchi	G03F 7/707
					279/128
		2003/0051665 A1	3/2003	Zhao et al.	
		2003/0089600 A1	5/2003	Natsuhara et al.	
		2003/0180459 A1	9/2003	Redeker et al.	
		2004/0074869 A1	4/2004	Wang et al.	
		2004/0120095 A1	6/2004	Yanagida	
		2004/0137169 A1	7/2004	Carollo	
		2005/0003179 A1	1/2005	Ito et al.	
		2005/0042881 A1	2/2005	Nishimoto et al.	
		2005/0045618 A1 *	3/2005	Ito	C04B 35/62655
					219/548
		2005/0183669 A1	8/2005	Parkhe et al.	
		2005/0191827 A1	9/2005	Collins et al.	
		2005/0213279 A1 *	9/2005	Hayakawa	H01L 21/6833
					361/234
		2005/0258160 A1 *	11/2005	Goto	H01L 21/67103
					219/270
		2005/0274324 A1	12/2005	Takahashi et al.	
		2006/0005930 A1	1/2006	Ikeda et al.	
		2006/0011611 A1 *	1/2006	Goto	H01L 21/67103
					219/444.1
		2006/0081558 A1	4/2006	Collins et al.	
		2006/0120011 A1	6/2006	Handa et al.	
		2006/0158821 A1	7/2006	Miyashita	
		2006/0237442 A1	10/2006	Goto et al.	
		2006/0280875 A1	12/2006	Tomita et al.	
		2007/0042897 A1 *	2/2007	Aihara	H01L 21/6833
					501/88
		2007/0141729 A1	6/2007	Dhindsa et al.	
		2007/0223173 A1 *	9/2007	Fujisawa	H02N 13/00
					361/234
		2007/0253139 A1	11/2007	Nakano et al.	
		2007/0256786 A1	11/2007	Zhou et al.	
		2008/0009417 A1	1/2008	Lou et al.	
		2008/0029032 A1	2/2008	Sun et al.	
		2008/0037195 A1	2/2008	Himori et al.	
		2008/0062609 A1 *	3/2008	Himori	H01L 21/6833
					361/234
		2008/0089001 A1 *	4/2008	Parkhe	H01L 21/6831
					279/128
		2008/0167720 A1	7/2008	Melkent	
		2008/0236493 A1	10/2008	Sakao	
		2008/0258411 A1	10/2008	Miura et al.	
		2009/0059462 A1	3/2009	Mizuno et al.	

(51) Int. Cl.

C23C 16/46 (2006.01)

C23C 16/509 (2006.01)

H01J 37/32 (2006.01)

(52) U.S. Cl.

CPC C23C 16/509 (2013.01); H01J 37/32532 (2013.01); H01J 37/32541 (2013.01); H01J 37/32568 (2013.01); H01J 37/32697 (2013.01); H01J 37/32715 (2013.01)

(58) Field of Classification Search

CPC H01J 37/32541; H01J 37/32568; H01J 37/32697; H01J 37/32715

USPC 118/715-733, 55
See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

3,895,832 A	7/1975	Ellis et al.	
4,384,918 A *	5/1983	Abe	C23C 14/50 204/298.31
4,552,430 A	11/1985	Myers	
4,657,616 A	4/1987	Benzing et al.	
4,692,836 A *	9/1987	Suzuki	H01L 21/6831 279/128
4,897,853 A	1/1990	Argent	
5,463,526 A	10/1995	Mundt	
5,507,874 A	4/1996	Su et al.	
5,560,780 A	10/1996	Wu et al.	
5,633,073 A	5/1997	Cheung et al.	
5,668,331 A *	9/1997	Schintag	G01D 5/345 324/207.2
5,737,178 A	4/1998	Herchen	
5,812,362 A	9/1998	Ravi	
5,829,791 A	11/1998	Kotsubo et al.	
5,841,624 A	11/1998	Xu et al.	
5,880,922 A *	3/1999	Husain	H01L 21/6831 279/128
5,942,282 A	8/1999	Tada et al.	
6,066,836 A	5/2000	Chen et al.	
6,072,685 A	6/2000	Herchen	
6,081,414 A	6/2000	Flanigan et al.	
6,104,596 A *	8/2000	Hausmann	H01L 21/6833 279/128
6,151,203 A	11/2000	Shamouilian et al.	
6,156,686 A *	12/2000	Katsuda	C04B 38/0074 501/153
6,213,478 B1	4/2001	Nishikawa	
6,221,221 B1	4/2001	Al-Shaikh et al.	
6,239,403 B1	5/2001	Dible et al.	
6,261,977 B1	7/2001	Tsai et al.	
6,303,879 B1 *	10/2001	Burkhart	H01L 23/49827 174/262
6,403,491 B1	6/2002	Liu et al.	
6,466,881 B1	10/2002	Shih et al.	
6,483,690 B1 *	11/2002	Nakajima	H01L 21/6833 361/234
6,592,709 B1	7/2003	Lubomirsky	
6,776,892 B1	8/2004	Ritzdorf et al.	
6,858,265 B2	2/2005	Redeker et al.	
6,860,965 B1 *	3/2005	Stevens	C23C 14/566 156/345.31
6,879,051 B1	4/2005	Singh et al.	
6,964,812 B2 *	11/2005	Ito	H01L 21/6831 428/209
7,625,227 B1	12/2009	Henderson et al.	
7,701,693 B2 *	4/2010	Hattori	H01L 21/6831 361/234

(56)

References Cited

U.S. PATENT DOCUMENTS

(56) References Cited					2017/0140970	A1	5/2017	Boyd, Jr. et al.	
U.S. PATENT DOCUMENTS					2017/0256431	A1	9/2017	Parkhe	
2009/0197401	A1	8/2009	Li et al.		2017/0365907	A1	12/2017	Kapoor et al.	
2009/0274590	A1 *	11/2009	Willwerth H01L 21/68792	2018/0025891	A1	1/2018	Marakhtanov et al.	
				422/186.04	2018/0061684	A1	3/2018	Parkhe	
2009/0283933	A1 *	11/2009	Kobayashi C04B 35/645	2018/0096869	A1	4/2018	Yoshida et al.	
				264/271.1	2018/0112311	A1	4/2018	Fenwick et al.	
2009/0284894	A1	11/2009	Cooke		2018/0308738	A1	10/2018	Tobe	
2009/0285360	A1	11/2009	Cao et al.		2018/0318890	A1	11/2018	Yasseri et al.	
2009/0314208	A1	12/2009	Zhou et al.		2018/0323039	A1	11/2018	Woo et al.	
2010/0039747	A1	2/2010	Sansoni et al.		2018/0350568	A1 *	12/2018	Mitsumori H01J 37/32027
2010/0104852	A1	4/2010	Fletcher et al.		2018/0350610	A1 *	12/2018	Lingampalli C23C 16/45514
2010/0126847	A1	5/2010	Dhindsa et al.		2018/0350649	A1	12/2018	Gomm	
2010/0323124	A1	12/2010	Vartabedian et al.		2019/0019713	A1	1/2019	Hidaka et al.	
2011/0005686	A1	1/2011	Tanaka et al.		2019/0051497	A1	2/2019	Long et al.	
2011/0031217	A1 *	2/2011	Himori H01J 37/32165	2019/0067076	A1	2/2019	Zvokelj	
				216/71	2019/0071778	A1	3/2019	Thomas et al.	
2011/0096461	A1 *	4/2011	Yoshikawa H01L 21/6833	2019/0115241	A1	4/2019	Vellore et al.	
				361/234	2019/0136373	A1	5/2019	Yeh et al.	
2012/0044609	A1	2/2012	Cooke et al.		2019/0157052	A1	5/2019	Doan et al.	
2012/0164834	A1 *	6/2012	Jennings H01J 37/32532	2019/0218663	A1	7/2019	Funakubo et al.	
				438/694	2019/0221406	A1	7/2019	Funakubo et al.	
2012/0247678	A1	10/2012	Takahashi et al.		2019/0237341	A1	8/2019	Yu et al.	
2013/0027838	A1	1/2013	Hori et al.		2019/0237353	A1	8/2019	Thomas et al.	
2013/0070384	A1	3/2013	Cooke et al.		2019/0267268	A1	8/2019	Abel et al.	
2013/0087447	A1	4/2013	Bodke et al.		2019/0276366	A1	9/2019	Sun et al.	
2013/0126206	A1	5/2013	Zhou et al.		2019/0294050	A1	9/2019	Topping et al.	
2013/0133394	A1	5/2013	Hasenberg et al.		2019/0341289	A1	11/2019	Parkhe	
2013/0155569	A1	6/2013	Suuronen et al.		2019/0355556	A1 *	11/2019	Takahashi H01J 37/32724
2014/0048720	A1	2/2014	Hayakawa et al.		2019/0385821	A1	12/2019	Long et al.	
2014/0069585	A1	3/2014	Aoto et al.		2020/0013590	A1	1/2020	Liu et al.	
2014/0087587	A1	3/2014	Lind		2020/0043703	A1	2/2020	French et al.	
2014/0118880	A1	5/2014	He et al.		2020/0111644	A1	4/2020	Long et al.	
2014/0154465	A1	6/2014	Sun et al.		2020/0126767	A1	4/2020	Takeda et al.	
2014/0159325	A1	6/2014	Parkhe et al.		2020/0340102	A1 *	10/2020	Kimura C23C 16/46
2014/0177123	A1	6/2014	Thach et al.		2021/0043490	A1	2/2021	Vasquez et al.	
2014/0203526	A1	7/2014	Banda et al.		2021/0071300	A1	3/2021	Bajaj et al.	
2014/0334060	A1	11/2014	Parkhe et al.		2021/0263542	A1	8/2021	Breitlow et al.	
2014/0355169	A1	12/2014	Maeta et al.		2021/0265138	A1 *	8/2021	Ikeda H01J 37/32568
2014/0356538	A1	12/2014	Schmitt et al.		2021/0333715	A1	10/2021	Topping et al.	
2015/0043123	A1 *	2/2015	Cox H01L 21/6833	2021/0340668	A1	11/2021	Macpherson et al.	
				29/611	2022/0005680	A1	1/2022	Suetsugu et al.	
2015/0044947	A1	2/2015	Lu et al.		2022/0044909	A1 *	2/2022	French C23C 16/5096
2015/0116889	A1	4/2015	Yamasaki et al.		2022/0181127	A1	6/2022	Erickson et al.	
2015/0179412	A1	6/2015	Chhatre et al.		2022/0181184	A1 *	6/2022	Gomm H01J 37/32541
2015/0228528	A1	8/2015	Behdjat		2022/0334554	A1	10/2022	Feng et al.	
2015/0241783	A1	8/2015	Carcasi et al.		2022/0375719	A1	11/2022	Topping et al.	
2015/0311043	A1	10/2015	Sun et al.		2022/0415620	A1	12/2022	Thomas et al.	
2015/0311105	A1	10/2015	Sadjadi et al.		2024/0045344	A1	2/2024	Topping et al.	
2015/0311108	A1	10/2015	Horiuchi		2024/0266202	A1	8/2024	Vasquez et al.	
2015/0323050	A1	11/2015	Ohno		2025/0118535	A1	4/2025	French et al.	
2015/0371876	A1	12/2015	Terauchi et al.						
2016/0002779	A1 *	1/2016	Lin H01L 21/67103					
				118/500					
2016/0035610	A1	2/2016	Park et al.						
2016/0064264	A1	3/2016	Kulshreshtha et al.						
2016/0086772	A1	3/2016	Khaja et al.						
2016/0090650	A1	3/2016	Qian et al.						
2016/0111315	A1	4/2016	Parkhe						
2016/0196984	A1	7/2016	Lill et al.						
2016/0225652	A1	8/2016	Tran et al.						
2016/0281230	A1	9/2016	Varadarajan et al.						
2016/0333475	A1	11/2016	Gomm et al.						
2016/0336210	A1	11/2016	Cooke et al.						
2016/0336213	A1	11/2016	Gomm et al.						
2016/0340781	A1	11/2016	Thomas et al.						
2016/0343600	A1	11/2016	Parkhe						
2016/0358755	A1	12/2016	Long et al.						
2016/0372307	A1	12/2016	Yang et al.						
2017/0004925	A1	1/2017	Abrecht et al.						
2017/0018411	A1	1/2017	Sriraman et al.						
2017/0040148	A1	2/2017	Augustino et al.						
2017/0040198	A1 *	2/2017	Lin H01L 21/67103					
2017/0103908	A1 *	4/2017	Lew H01L 21/6838					
2017/0110358	A1	4/2017	Sadjadi et al.						
2017/0110385	A1	4/2017	Kawajiri et al.						

FOREIGN PATENT DOCUMENTS			
CN	101542712	A	9/2009
CN	102024736	A	4/2011
CN	102077338	A	5/2011
CN	103069550	A	4/2013
CN	105981156	A	9/2016
CN	106148915	A	11/2016
CN	106148916	A	11/2016
CN	106356274	A	1/2017
CN	106575634	A	4/2017
CN	107452616	A	12/2017
CN	107665804	A	2/2018
CN	107710378	A	2/2018
EP	2015343	A2	1/2009
JP	H04236449	A	8/1992
JP	H07169737	A	7/1995
JP	H07201496	A	8/1995
JP	H08154387	A	6/1996
JP	H09176860	A	7/1997
JP	H09213778	A	8/1997
JP	2001156162	A	6/2001
JP	2001237051	A	8/2001
JP	2002512448	A	4/2002
JP	2003124296	A	4/2003
JP	2003160874	A	6/2003
JP	2004095722	A	3/2004

FOREIGN PATENT DOCUMENTS

CN	101542712	A	9/2009
CN	102024736	A	4/2011
CN	102077338	A	5/2011
CN	103069550	A	4/2013
CN	105981156	A	9/2016
CN	106148915	A	11/2016
CN	106148916	A	11/2016
CN	106356274	A	1/2017
CN	106575634	A	4/2017
CN	107452616	A	12/2017
CN	107665804	A	2/2018
CN	107710378	A	2/2018
EP	2015343	A2	1/2009
JP	H04236449	A	8/1992
JP	H07169737	A	7/1995
JP	H07201496	A	8/1995
JP	H08154387	A	6/1996
JP	H09176860	A	7/1997
JP	H09213778	A	8/1997
JP	2001156162	A	6/2001
JP	2001237051	A	8/2001
JP	2002512448	A	4/2002
JP	2003124296	A	4/2003
JP	2003160874	A	6/2003
JP	2004095722	A	3/2004

(56)

References Cited**FOREIGN PATENT DOCUMENTS**

JP	2005018992	A	1/2005
JP	2005072286	A	3/2005
JP	2005235890	A	9/2005
JP	2005347620	A	12/2005
JP	2006302887	A	11/2006
JP	2007273915	A	10/2007
JP	4034145	B2	1/2008
JP	2008270197	A	11/2008
JP	2009123929	A	6/2009
JP	2009256789	A	11/2009
JP	2010109316	A	5/2010
JP	2011049428	A	3/2011
JP	2011061040	A	3/2011
JP	2014038928	A	2/2014
JP	2014503362	A	2/2014
JP	2014082449	A	5/2014
JP	2016213456	A	12/2016
JP	2016213463	A	12/2016
JP	2016225376	A	12/2016
JP	2017055100	A	3/2017
JP	2017228526	A	12/2017
JP	2018117024	A	7/2018
JP	7476169	B2	4/2024
KR	20050115940	A	12/2005
KR	20060050341	A	5/2006
KR	20080077202	A	8/2008
KR	20090081717	A	7/2009
KR	20100120199	A	11/2010
KR	101333631	B1	11/2013
KR	101415551	B1	7/2014
KR	20140097312	A	8/2014
KR	101465640	B1	11/2014
KR	20150099400	A	8/2015
KR	20160000400	A	1/2016
KR	20160127717	A	11/2016
KR	20170042359	A	4/2017
KR	20170054239	A	5/2017
KR	20180000291	A	1/2018
KR	20180011711	A	2/2018
KR	20190090283	A	8/2019
TW	200402095	A	2/2004
TW	201119524	A	6/2011
TW	201525184	A	7/2015
TW	201535453	A	9/2015
TW	201535588	A	9/2015
WO	WO-2010087385	A1	8/2010
WO	WO-2011099481	A1	8/2011
WO	WO-2012087737	A2	6/2012
WO	WO-2013162820	A1	10/2013
WO	WO-2014057771	A1	4/2014
WO	WO-2015105647	A1	7/2015
WO	WO-2020010153	A1	1/2020

OTHER PUBLICATIONS

CN Office Action dated Jun. 24, 2024 in CN Application No. 201980011267.1 with English translation.

CN Office Action dated Mar. 18, 2023, in Application No. CN201880036474.8 with English translation.

CN Office Action dated May 9, 2024 in CN Application No. 201980063428.1, with English Translation.

CN Office Action dated Oct. 9, 2023, in Application No. CN201980063428.1 with English translation.

EP Extended European Search Report dated Dec. 5, 2023 in EP Application No. 23173104.3.

EP Extended European Search report dated Feb. 8, 2021 in EP Application No. 18809325.6.

European Extended Search Report dated Feb. 8, 2021 issued in Application No. EP 188093256.

Final Office Action dated Apr. 30, 2020 issued in U.S. Appl. No. 15/612,423.

Final Office Action dated Mar. 25, 2021 issued in U.S. Appl. No. 15/612,423.

International Preliminary Report on Patentability and Written Opinion dated Dec. 12, 2019 in PCT Application No. PCT/US2018/034998.

International Preliminary Report on Patentability dated Aug. 13, 2020 issued in Application No. PCT/US2019/015865.

International Preliminary Report on Patentability dated Dec. 12, 2019 issued in Application No. PCT/US2018/034998.

International Preliminary Report on Patentability dated Mar. 10, 2020 issued in Application No. PCT/US2018/049267.

International Preliminary Report on Patentability dated Oct. 1, 2020 issued in Application No. PCT/US2019/022046.

International Preliminary Report on Patentability issued on Feb. 2, 2021, in Application No. PCT/US2019/044113.

International Search Report and Written Opinion dated Jun. 28, 2019 issued in Application No. PCT/US2019/022046.

International Search Report and Written Opinion dated May 17, 2019 issued in Application No. PCT/US2019/015865.

International Search Report and Written Opinion dated Sep. 6, 2018 in PCT Application No. PCT/US2018/034998.

International Search Report and Written Opinion dated Sep. 6, 2018 issued in Application No. PCT/US2018/034998.

International Search Report and Written Opinion issued on Dec. 19, 2019, in Application No. PCT/US2019/044113.

JP Office Action dated Jun. 14, 2022, in Application No. JP2019-566224 With English Translation.

JP Office Action dated Apr. 4, 2023, in Application No. JP2020-541696 with English translation.

JP Office Action dated Apr. 16, 2024 in JP Application No. 2023-23008, with English Translation.

JP Office Action dated Jun. 13, 2023 in Application No. JP2021-505710 with English translation.

JP Office Action dated Nov. 21, 2023 in JP Application No. 2021-505710, with English Translation.

JP Office Action dated Oct. 18, 2022, in Application No. JP2019-566224 With English Translation.

Korean Office Action dated Jun. 7, 2021 issued in Application No. KR 10-2021-0056493.

KR Office Action and Search report dated Aug. 30, 2019 in Application No. KR10-2019-0073864 With English Translation.

KR Office Action dated Sep. 28, 2022 in Application No. KR10-2021-7032163 with English translation.

KR Office Action dated Apr. 6, 2022, in Application No. KR1020217032163 with English translation.

KR Office Action dated Apr. 6, 2022, in Application No. KR1020217033272 with English translation.

KR Office Action dated Apr. 6, 2022, in Application No. KR1020217033273 with English translation.

KR Office Action dated Apr. 27, 2023 in Application No. KR10-2020-7030025 with English translation.

KR Office Action dated Aug. 2, 2022 in Application No. KR10-2022-0034122 with English translation.

KR Office Action dated Aug. 30, 2019 in Application No. 10-2019-0073864.

KR Office Action dated Dec. 21, 2021, in Application No. KR10-2021-0056493 with English translation.

KR Office Action dated Feb. 3, 2023 in Application No. KR10-2021-7032163 with English translation.

KR Office Action dated Feb. 3, 2023 in Application No. KR10-2021-7033272 with English translation.

KR Office Action dated Feb. 23, 2023 in Application No. KR10-2020-7000026 with English translation.

KR Office Action dated Feb. 27, 2023, in Application No. KR10-2020-7025028 with English translation.

KR Office Action dated Jan. 31, 2023 in Application No. KR10-2021-7033273 with English translation.

KR Office Action dated Jul. 20, 2023, in application No. KR10-2023-0039502 with English translation.

KR Office Action dated Jul. 21, 2023, in Application No. KR10-2022-7040239 with English Translation.

KR Office Action dated Jun. 26, 2023, in Application No. KR10-2020-7000026 with English translation.

KR Office Action dated Mar. 23, 2022, in Application No. KR 10-2019-7037514 with English Translation.

(56)

References Cited**OTHER PUBLICATIONS**

KR Office Action dated Mar. 28, 2024 in KR Application No. 10-2023-7014797, with English translation.

KR Office Action dated Mar. 28, 2024 in KR Application No. 10-2023-7033439 with English translation.

KR Office Action dated May 6, 2022, in Application No. KR1020207000026.

KR Office Action dated May 16, 2023, in application No. KR10-2023-0039502 with English translation.

KR Office Action dated Nov. 27, 2023 in KR Application No. 10-2020-7030025 with English Translation.

KR Office Action dated Sep. 25, 2022 in Application No. KR10-2020-7000026 with English translation.

KR Office Action dated Sep. 26, 2022 in Application No. KR10-2021-7033273 with English translation.

KR Office Action dated Sep. 27, 2022, in Application No. KR10-2021-7033272 with English translation.

KR Office Action dated Sep. 27, 2023, in application No. KR10-2020-7025028 with English translation.

KR Search Report issued on Aug. 1, 2019, in Application No. 10-2019-0073864 with English translation.

Merriam-Webster Dictionary definition of “distal” retrieved from Merriam-Webster.com (Year: 2023).

Notice of Allowance dated Apr. 8, 2021 issued in U.S. Appl. No. 15/926,349.

Notice of Allowance dated Nov. 24, 2021 issued in U.S. Appl. No. 15/612,423.

Office Action dated Jan. 3, 2020 issued in U.S. Appl. No. 15/612,423.

Office Action dated Oct. 16, 2020 issued in U.S. Appl. No. 15/926,349.

Office Action dated Oct. 6, 2020 issued in U.S. Appl. No. 15/612,423.

PCT International Search Report and Written Opinion of the International Searching Authority issued in corresponding International Patent Application No. PCT/US2018/049267 on Dec. 26, 2018 (Forms PCT/ISA/220, 210, 237) (12 total pages).

Schwartz, M., “Encyclopedia and Handbook of Materials, Parts, and Finishes”, 3rd Edition, Glass-Ceramics Taylor & Francis, 2016, 27 pages.

SG Office Action dated Mar. 2, 2022, in Application No. SG11201911409S.

Singapore Notice of Eligibility and Examination Report dated Mar. 2, 2022 issued in Application No. SG 11201911409S.

Singapore Search Report and Written Opinion dated Feb. 2, 2021 issued in Application No. SG 11201911409S.

TW Office Action dated Aug. 15, 2023, in application No. TW111140610 with English translation.

TW Office Action dated Aug. 18, 2023, in application No. TW107130798 with English translation.

TW Office Action dated May 30, 2023, in application No. TW108126884 with English translation.

TW Office Action dated Oct. 22, 2021, in application No. TW107118835 with English translation.

TW Office Action dated Sep. 30, 2022 In Application No. TW107130798 with English translation.

U.S. Advisory Action dated Feb. 6, 2023 in U.S. Appl. No. 17/369,694.

U.S. Advisory Action dated May 3, 2024 in U.S. Appl. No. 17/823,744.

U.S. Advisory Action dated Oct. 23, 2023 in U.S. Appl. No. 16/966,833.

U.S. Corrected Notice of Allowance dated Sep. 27, 2023, in U.S. Appl. No. 17/369,694.

U.S. Final office Action dated Aug. 7, 2023 in U.S. Appl. No. 16/966,833.

U.S. Final Office Action dated Feb. 26, 2024 in U.S. Appl. No. 17/823,744.

US Final Office Action dated Jan. 19, 2022 issued in U.S. Appl. No. 15/696,068.

U.S. Final office Action dated Nov. 21, 2022 in U.S. Appl. No. 17/369,694.

US Final Office Action dated Sep. 14, 2020 issued in U.S. Appl. No. 15/696,068.

U.S. Non-Final office Action dated Jan. 20, 2023 in U.S. Appl. No. 17/652,243.

U.S. Non-Final Office Action dated Jan. 19, 2023 in U.S. Appl. No. 16/966,833.

U.S. Non-Final Office Action dated Jul. 28, 2022, in U.S. Appl. No. 17/369,694.

U.S. Non-Final Office Action dated Jun. 21, 2024 in U.S. Appl. No. 17/823,744.

U.S. Non-Final Office Action dated Mar. 7, 2023 in U.S. Appl. No. 17/369,694.

U.S. Non-Final Office Action dated May 9, 2024 in U.S. Appl. No. 17/451,975.

U.S. Non-Final Office Action dated Sep. 25, 2023, in U.S. Appl. No. 17/823,744.

U.S. Notice of Allowance dated Jan. 18, 2024 in U.S. Appl. No. 16/966,833.

U.S. Notice of Allowance dated Jul. 11, 2023 in U.S. Appl. No. 17/652,243.

U.S. Notice of Allowance dated Jul. 25, 2023 in U.S. Appl. No. 17/369,694.

U.S. Notice of Allowance dated Jun. 1, 2022 in U.S. Appl. No. 15/696,068.

U.S. Notice of Allowance dated Nov. 3, 2023 in U.S. Appl. No. 17/369,694.

U.S. Notice of Allowance dated Oct. 17, 2023 in U.S. Appl. No. 17/652,243.

US Notice of Allowance issued on Jul. 23, 2021, issued in U.S. Appl. No. 16/052,877.

US Office Action dated Apr. 28, 2020 issued in U.S. Appl. No. 15/696,068.

US Office Action dated Jun. 30, 2021 issued in U.S. Appl. No. 15/696,068.

US Office Action issued on Apr. 15, 2021, issued in U.S. Appl. No. 16/052,877.

U.S. Appl. No. 18/637,111, inventors Vasquez M.B, et al., filed Apr. 16, 2024.

U.S. Restriction Requirement dated Jan. 24, 2020 in U.S. Appl. No. 15/696,068.

CN Office Action dated Jun. 24, 2024 in CN Application No. 201980020652.2 with English translation.

International Search Report and Written Opinion dated Aug. 20, 2024 in PCT Application No. PCT/US2024/027101.

KR Office Action dated Aug. 26, 2024 in KR Application No. 10-2020-7030025, with English Translation.

TW Notice of Allowances dated Aug. 2, 2024 in TW Application No. 112143249 with English translation.

U.S. Notice of Allowance dated Sep. 19, 2024 in U.S. Appl. No. 17/451,975.

CN Office Action dated Dec. 16, 2024 in CN Application No. 201980011267.1, with English Translation.

CN Office Action dated Dec. 25, 2024 in CN Application No. 201980020652.2, with English Translation.

JP Office Action dated Dec. 24, 2024 in JP Application No. 2024-35429, with English Translation.

JP Office Action dated Oct. 29, 2024 in JP Application No. 2023-23008 with English translation.

KR Office Action dated Dec. 24, 2024 in KR Application No. 10-2023-7014797, with English Translation.

KR Office Action dated Dec. 26, 2024 in KR Application No. 10-2020-7030025, with English Translation.

KR Office Action dated Nov. 28, 2024 in KR Application No. 10-2023-7033439, with English Translation.

U.S. Corrected Notice of Allowance dated Dec. 30, 2024 in U.S. Appl. No. 17/451,975.

U.S. Corrected Notice of Allowance dated Jan. 29, 2025 in U.S. Appl. No. 17/823,744.

U.S. Notice of Allowance dated Oct. 23, 2024 in U.S. Appl. No. 17/823,744.

U.S. Appl. No. 18/983,055, inventors French D et al., filed Dec. 16, 2024.

(56)

References Cited

OTHER PUBLICATIONS

CN Office Action dated Mar. 31, 2025 in CN Application No.
201980011267.1, with English Translation.

* cited by examiner

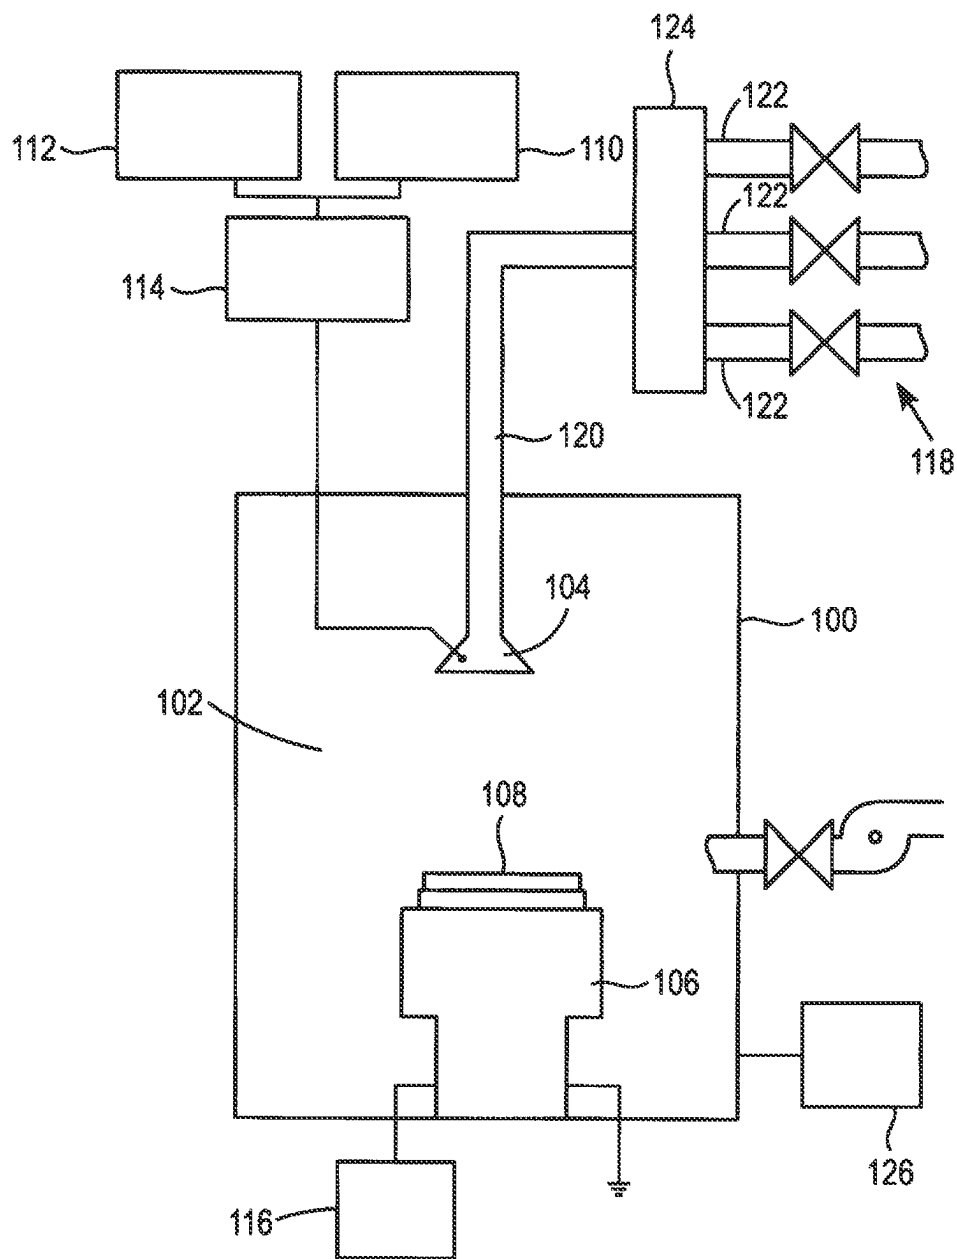


FIG. 1

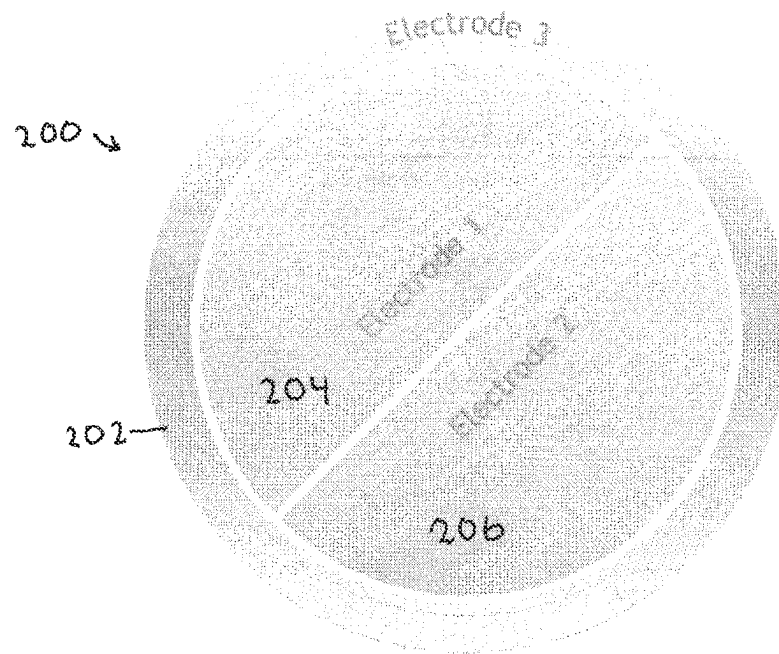


FIG. 2

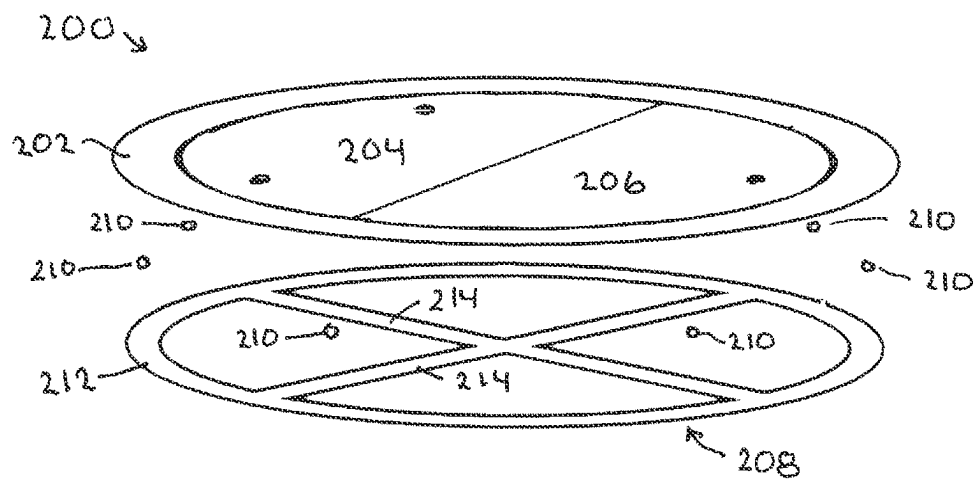


FIG. 3

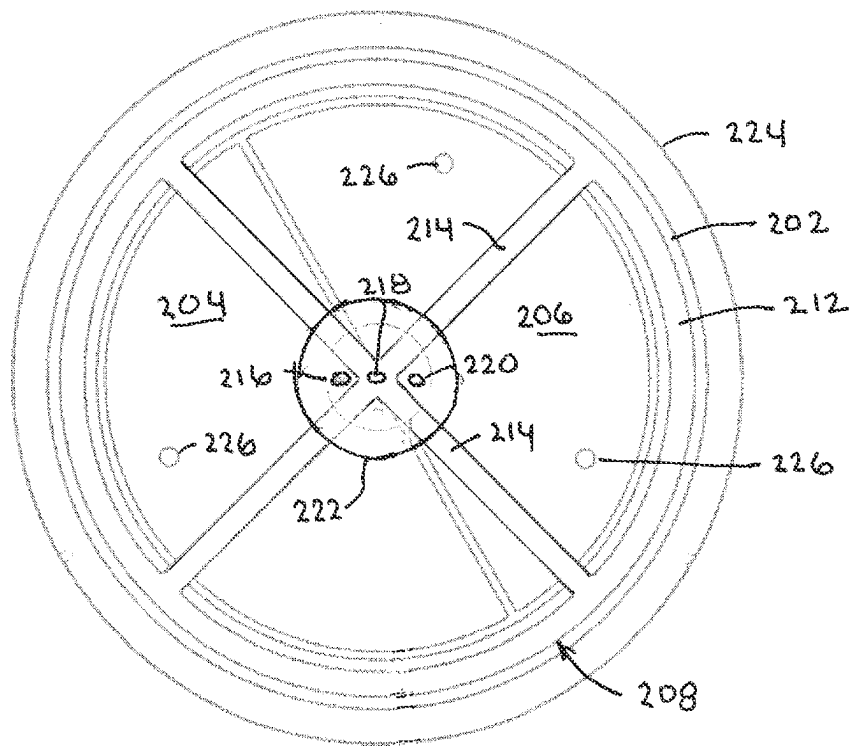


FIG. 4

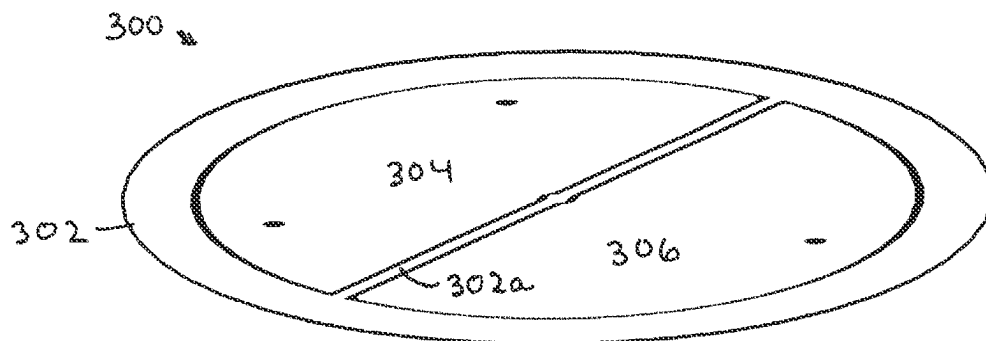


FIG. 5

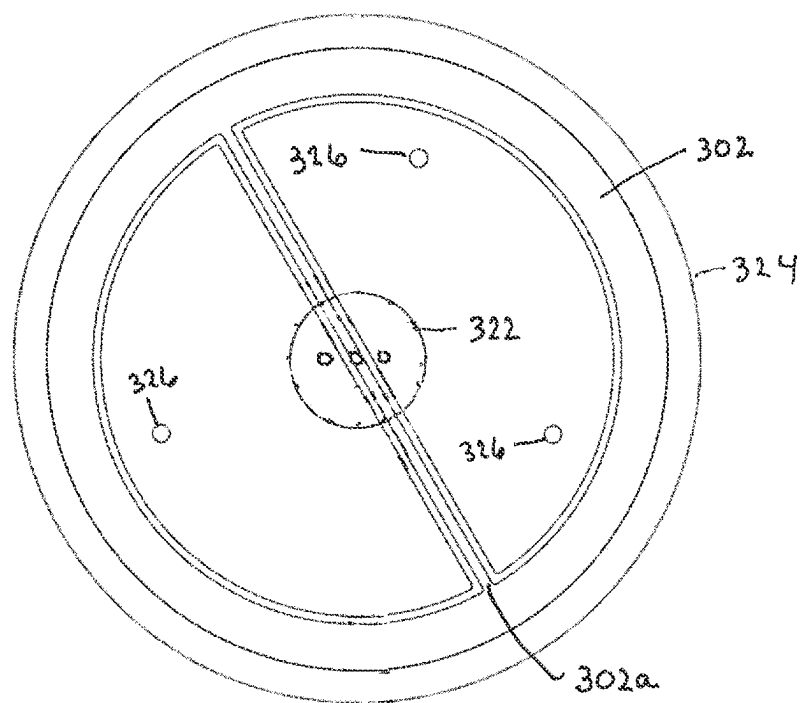


FIG. 6

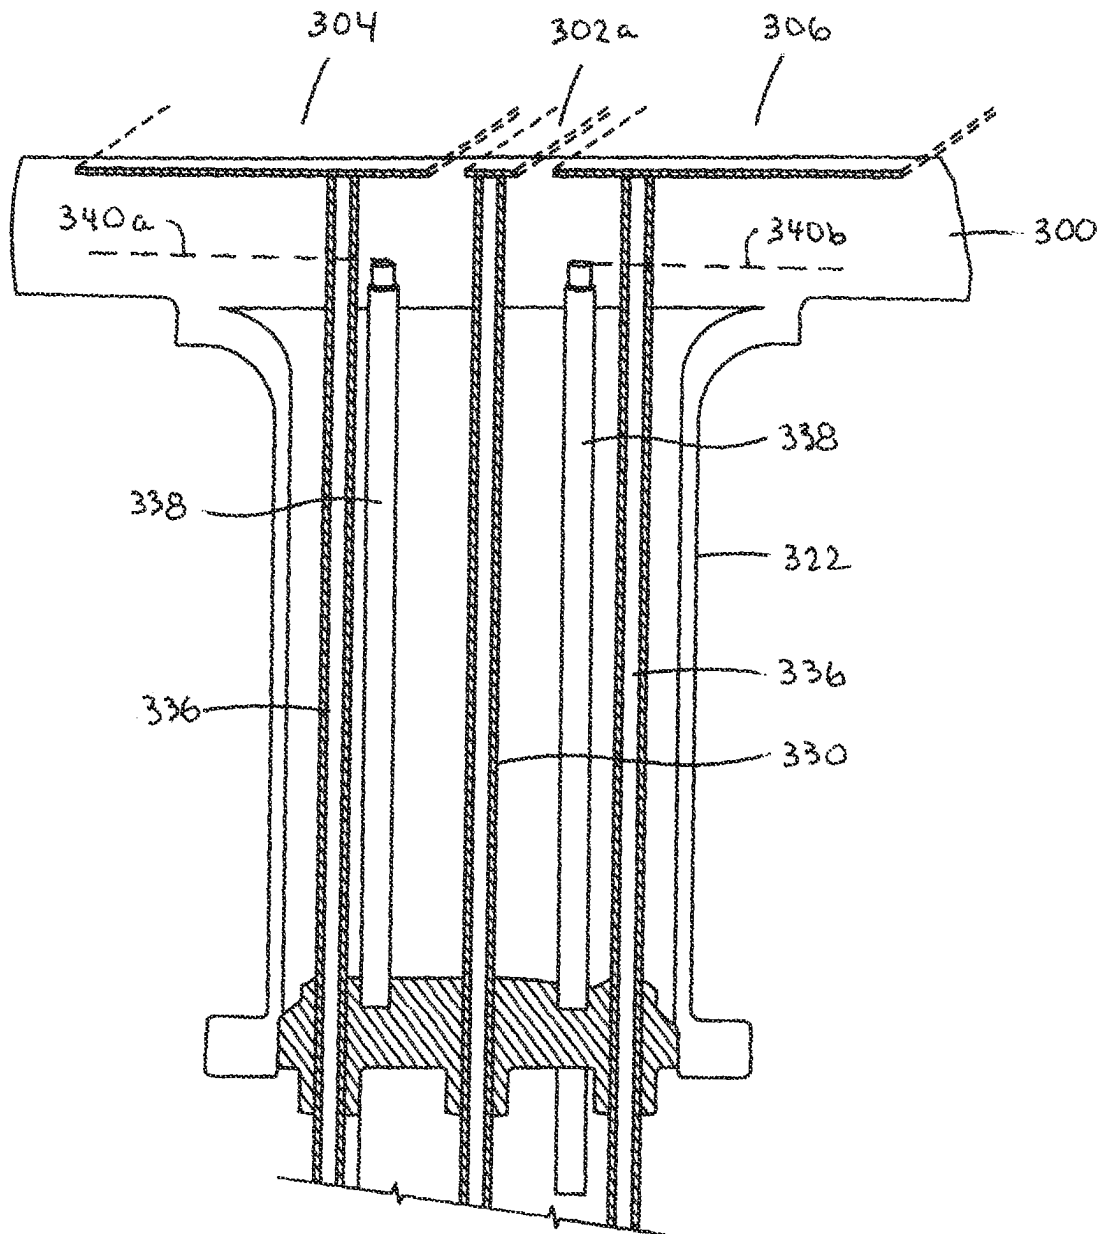


FIG. 7

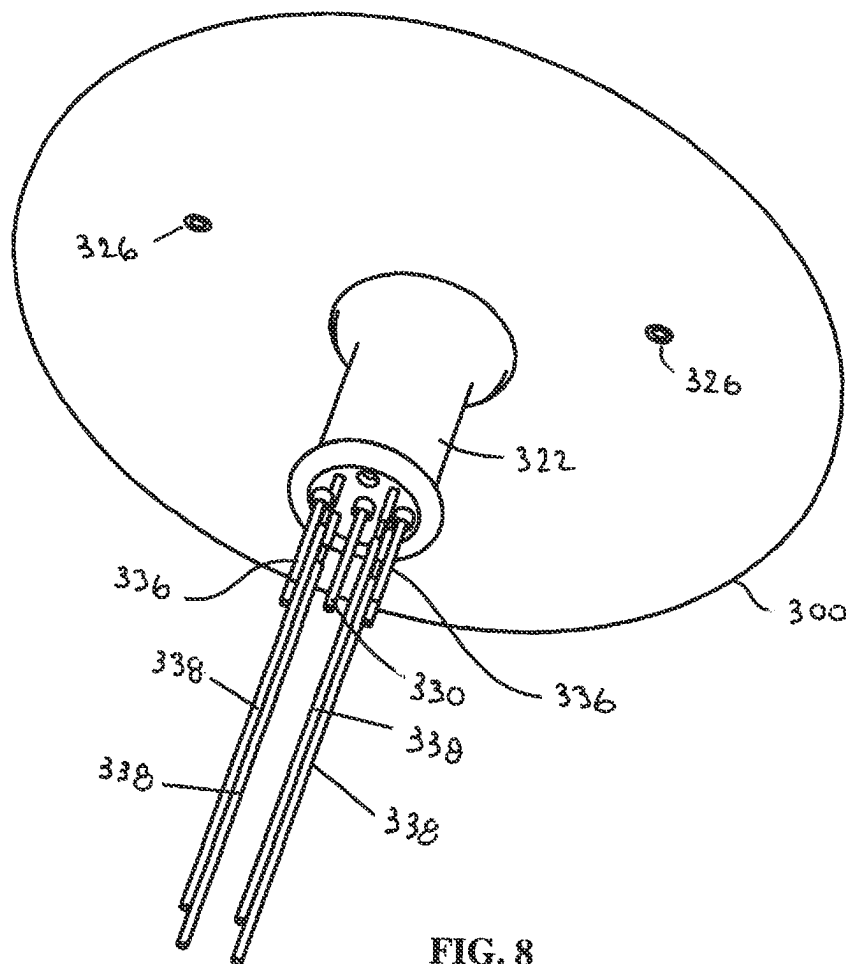


FIG. 8

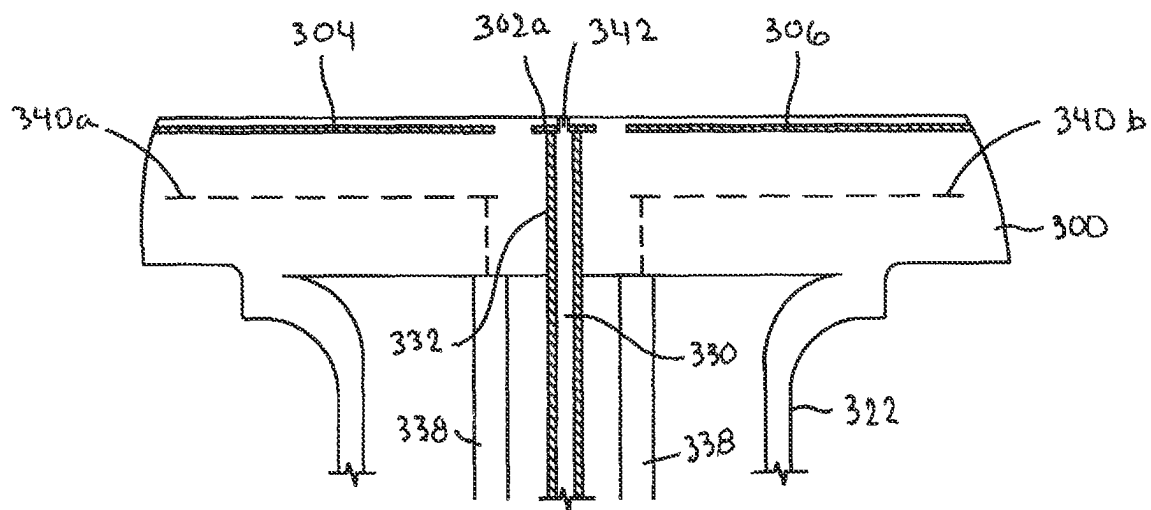


FIG. 9

1

ELECTROSTATIC CHUCK FOR USE IN SEMICONDUCTOR PROCESSING

INCORPORATION BY REFERENCE

An Application Data Sheet is filed concurrently with this specification as part of the present application. Each application that the present application claims benefit of or priority to as identified in the concurrently filed Application Data Sheet is incorporated by reference herein in their entireties and for all purposes.

FIELD OF THE INVENTION

This invention pertains to semiconductor substrate processing apparatuses for processing semiconductor substrates, and may find particular use in plasma-enhanced chemical vapor depositions processing apparatuses operable to deposit thin films.

BACKGROUND

Semiconductor substrate processing apparatuses are used to process semiconductor substrates by techniques including etching, physical vapor deposition (PVD), chemical vapor deposition (CVD), plasma-enhanced chemical vapor deposition (PECVD), atomic layer deposition (ALD), plasma-enhanced atomic layer deposition (PEALD), pulsed deposition layer (PDL), plasma-enhanced pulsed deposition layer (PEPDL), and resist removal. One type of semiconductor substrate processing apparatus is a plasma processing apparatus that includes a reaction chamber containing upper and lower electrodes wherein a radio frequency (RF) power is applied between the electrodes to excite a process gas into plasma for processing semiconductor substrates in the reaction chamber.

SUMMARY

Disclosed herein is a semiconductor substrate processing apparatus for processing semiconductor substrates, comprising a vacuum chamber including a processing zone in which a semiconductor substrate may be processed; a process gas source in fluid communication with the vacuum chamber for supplying a process gas into the vacuum chamber; a showerhead module through which process gas from the process gas source is supplied to the processing zone of the vacuum chamber; and a substrate pedestal module including a platen made of ceramic material having an upper surface configured to support a semiconductor substrate thereon during processing; a stem made of ceramic material having an upper stem flange that supports the platen; and coplanar electrodes embedded in the platen, the electrodes including an outer RF electrode and inner electrostatic clamping electrodes, the outer RF electrode including a ring-shaped electrode and at least one radially extending lead extending from the ring-shaped electrode to a central portion of the platen, wherein the ceramic material of the platen and the electrodes comprise a unitary body made in a single sintering step.

According to an embodiment, the platen includes first and second D-shaped electrostatic clamping electrodes inward of the ring-shaped electrode, the radially extending lead extending diagonally across the platen and connected to the ring-shaped electrode at two locations 180° apart with the first and second D-shaped electrodes on opposite sides of the radially extending lead. The platen can include a first

2

terminal at a center of the platen, a second terminal radially offset from the first terminal, and a third terminal radially offset from the first terminal, the first terminal electrically connected to the radially extending lead of the ring-shaped electrode, the second terminal electrically connected to the first D-shaped electrode and the third terminal electrically connected to the second D-shaped electrode. The first, second and third terminals can extend axially through openings in the platen and the second and third terminals can be aligned along a diagonal line passing through the location of the first terminal.

In another arrangement, the platen can include first, second, third and fourth electrostatic clamping electrodes inward of the ring-shaped electrode, the at least one radially extending feed strip comprising two feed strips extending diagonally across the platen, each of the feed strips connected to the ring-shaped electrode at two locations 180° apart, the feed strips intersecting at the center of the platen with the first, second, third and fourth electrostatic clamping electrodes located between the diagonally extending feed strips.

The platen can be made of any suitable ceramic material and the electrodes can be made of any suitable electrically conductive material. For example, the platen can be made of aluminum nitride and the electrodes can be made of tungsten. The platen can include three through holes configured to receive lift pins and the platen can have a diameter of at least 300 mm.

In the embodiment wherein the electrostatic clamping electrodes are D-shaped electrodes, the ring-shaped electrode can be separated from the D-shaped electrodes by a first continuous wall of ceramic material extending around the first D-shaped electrode and a second continuous wall of ceramic material extending around the second D-shaped electrode. The first and second walls of ceramic material can have the same width with the width of the first and second walls of ceramic material being less than a width of the radially extending lead.

Also disclosed herein is an electrostatic chuck useful for processing semiconductor substrates in a vacuum chamber including a processing zone in which a semiconductor substrate may be processed. The electrostatic chuck comprises a platen made of ceramic material having an upper surface configured to support a semiconductor substrate thereon during processing and coplanar electrodes embedded in the platen. The electrodes include an outer RF electrode and inner electrostatic clamping electrodes, the outer RF electrode including a ring-shaped electrode and at least one radially extending lead extending from the ring-shaped electrode to a central portion of the platen, wherein the ceramic material of the platen and the electrodes comprise a unitary body made in a single sintering step.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

FIG. 1 illustrates a schematic diagram showing an overview of a chemical deposition apparatus in accordance with embodiments disclosed herein.

FIG. 2 shows a top view of a ceramic high temperature chuck wherein a power distribution circuit is located below three coplanar electrodes.

FIG. 3 is an exploded view of the coplanar electrodes shown in FIG. 2 and a power distribution circuit below the electrodes.

FIG. 4 is a bottom view of the chuck shown in FIG. 3.

3

FIG. 5 is a top perspective view of a ceramic high temperature electrostatic chuck wherein an outer ring-shaped electrode includes a radially extending lead which can be electrically connected to a centrally located terminal on an underside of the chuck.

FIG. 6 is a bottom perspective view of the chuck shown in FIG. 5.

FIG. 7 is a cutaway view showing electrical connections of the platen shown in FIG. 5.

FIG. 8 is a perspective view of an underside of the platen shown in FIG. 5.

FIG. 9 is a cross section of the platen shown in FIG. 5.

DETAILED DESCRIPTION

In the following detailed description, numerous specific embodiments are set forth in order to provide a thorough understanding of the apparatus and methods disclosed herein. However, as will be apparent to those skilled in the art, the present embodiments may be practiced without these specific details or by using alternate elements or processes. In other instances, well-known processes, procedures, and/or components have not been described in detail so as not to unnecessarily obscure aspects of embodiments disclosed herein. As used herein the term "about" refers to $\pm 10\%$.

As indicated, present embodiments provide apparatus and associated methods for processing a semiconductor substrate in a semiconductor substrate processing apparatus such as a chemical vapor deposition apparatus or a plasma-enhanced chemical vapor deposition apparatus. The apparatus and methods are particularly applicable for use in conjunction with high temperature processing of semiconductor substrates such as a high temperature deposition processes wherein a semiconductor substrate being processed is heated to temperatures greater than about 550° C., such as about 550° C. to about 650° C. or more.

Embodiments disclosed herein are preferably implemented in a plasma-enhanced chemical deposition apparatus (i.e. PECVD apparatus, PEALD apparatus, or PEPDL apparatus), however, they are not so limited.

FIG. 1 provides a simple block diagram depicting various semiconductor substrate plasma processing apparatus components arranged for implementing embodiments as disclosed herein. As shown, a semiconductor substrate plasma processing apparatus 100 includes a vacuum chamber 102 that serves to contain plasma in a processing zone, which is generated by a capacitor type system including a showerhead module 104 having an upper RF electrode (not shown) therein working in conjunction with a substrate pedestal module 106 having a lower RF electrode (not shown) therein. At least one RF generator is operable to supply RF energy into a processing zone above an upper surface of a semiconductor substrate 108 in the vacuum chamber 102 to energize process gas supplied into the processing zone of the vacuum chamber 102 into plasma such that a plasma deposition process may be performed in the vacuum chamber 102. For example, a high-frequency RF generator 110 and a low-frequency RF generator 112 may each be connected to a matching network 114, which is connected to the upper RF electrode of the showerhead module 104 such that RF energy may be supplied to the processing zone above the semiconductor substrate 108 in the vacuum chamber 102.

The power and frequency of RF energy supplied by matching network 114 to the interior of the vacuum chamber 102 is sufficient to generate plasma from the process gas. In an embodiment both the high-frequency RF generator 110 and the low-frequency RF generator 112 are used, and in an

4

alternate embodiment, just the high-frequency RF generator 110 is used. In a process, the high-frequency RF generator 110 may be operated at frequencies of about 2-100 MHz; in a preferred embodiment at 13.56 MHz or 27 MHz. The low-frequency RF generator 112 may be operated at about 50 kHz to 2 MHz; in a preferred embodiment at about 350 to 600 kHz. The process parameters may be scaled based on the chamber volume, substrate size, and other factors. Similarly, the flow rates of process gas, may depend on the free volume of the vacuum chamber or processing zone.

An upper surface of the substrate pedestal module 106 supports a semiconductor substrate 108 during processing within the vacuum chamber 102. The substrate pedestal module 106 can include a chuck to hold the semiconductor substrate and/or lift pins to raise and lower the semiconductor substrate before, during and/or after the deposition and/or plasma treatment processes. In an alternate embodiment, the substrate pedestal module 106 can include a carrier ring to raise and lower the semiconductor substrate before, during and/or after the deposition and/or plasma treatment processes. The chuck may be an electrostatic chuck, a mechanical chuck, or various other types of chuck as are available for use in the industry and/or research. Details of a lift pin assembly for a substrate pedestal module including an electrostatic chuck can be found in commonly-assigned U.S. Pat. No. 8,840,754, which is incorporated herein by reference in its entirety. Details of a carrier ring for a substrate pedestal module can be found in commonly-assigned U.S. Pat. No. 6,860,965, which is incorporated herein by reference in its entirety. A backside gas supply 116 is operable to supply a heat transfer gas or purge gas through the substrate pedestal module 106 to a region below a lower surface of the semiconductor substrate during processing. The substrate pedestal module 106 includes the lower RF electrode therein wherein the lower RF electrode is preferably grounded during processing, however in an alternate embodiment, the lower RF electrode may be supplied with RF energy during processing.

To process a semiconductor substrate in the vacuum chamber 102 of the semiconductor substrate plasma processing apparatus 100, process gases are introduced from a process gas source 118 into the vacuum chamber 102 via inlet 120 and showerhead module 104 wherein the process gas is formed into plasma with RF energy such that a film may be deposited onto the upper surface of the semiconductor substrate. In an embodiment, multiple source gas lines 122 may be connected to a heated manifold 124. The gases may be premixed or supplied separately to the chamber. Appropriate valving and mass flow control mechanisms are employed to ensure that the correct gases are delivered through the showerhead module 104 during semiconductor substrate processing. During the processing, a backside heat transfer gas or purge gas is supplied to a region below a lower surface of the semiconductor substrate supported on the substrate pedestal module 102. Preferably, the processing is at least one of chemical vapor deposition processing, plasma-enhanced chemical vapor deposition processing, atomic layer deposition processing, plasma-enhanced atomic layer deposition processing, pulsed deposition layer processing, or plasma-enhanced pulsed deposition layer processing.

In certain embodiments, a system controller 126 is employed to control process conditions during deposition, post deposition treatments, and/or other process operations. The controller 126 will typically include one or more memory devices and one or more processors. The processor

may include a CPU or computer, analog and/or digital input/output connections, stepper motor controller boards, etc.

In certain embodiments, the controller **126** controls all of the activities of the apparatus. The system controller **126** executes system control software including sets of instructions for controlling the timing of the processing operations, frequency and power of operations of the low-frequency RF generator **112** and the high-frequency RF generator **110**, flow rates and temperatures of precursors and inert gases and their relative mixing, temperature of a semiconductor substrate **108** supported on an upper surface of the substrate pedestal module **106** and a plasma exposed surface of the showerhead module **104**, pressure of the vacuum chamber **102**, and other parameters of a particular process. Other computer programs stored on memory devices associated with the controller may be employed in some embodiments.

High temperature chucks typically include a ceramic pedestal and a smaller diameter ceramic stem joined to the underside of the platen. See, for example, commonly-assigned U.S. Patent Publication Nos. 2016/0340781; 2016/0336213; and 2016/0333475, each of which is hereby incorporated by reference in its entirety.

FIG. **2** shows a platen **200** having three co-planar electrodes **202**, **204**, **206** embedded in a ceramic body (not shown). Electrode **202** is an outer ring-shaped electrode which surrounds D-shaped electrostatic clamping electrodes **204** and **206**. In order to supply power to the outer ring-shaped electrode **202**, a power distribution circuit **208** (see FIG. **3**) is embedded in the ceramic body below the electrodes **202**, **204**, **206** and vertically extending conductive vias **210** connect the outer ring electrode **202** to the power distribution circuit **208**. The power distribution circuit **208** includes an outer ring **212** underlying the outer ring-shaped electrode **202** and arms **214** extending diagonally across the outer ring **212**. The power distribution circuit **208** allows power to be fed from a power feed terminal (not shown) located near the center of the underside of the platen. The electrostatic clamping electrodes **204**, **206** are connected to power feed terminals (not shown) located near the center of the underside of the platen in spaces between the arms **214** of the power distribution circuit **208**.

FIG. **4** shows an underside of the platen **200** wherein the arrangement of electrodes **202**, **204**, **206** can be seen along with terminals **216**, **218**, **220** located inside hollow ceramic stem **222** attached to ceramic body **224**. Terminal **216** is attached to electrostatic clamping electrode **204**, terminal **220** is attached to electrostatic clamping electrode **206**, and terminal **218** is attached to the intersection of arms **214** of power distribution circuit **208**. Thus, to manufacture the platen **200**, it is necessary to carry out multiple sintering steps to embed the conductive power distribution circuit in the ceramic body **224** below the electrodes **202**, **204**, **206** with the result that the arms **214** and ring **212** can act as inductors and create undesired inductance effects during processing of a wafer. The ceramic body **224** includes three through holes **226** sized for passage of lift pins (not shown) for lifting and lowering a wafer onto a support surface of the platen **200**.

FIG. **5** shows an electrostatic chuck comprising platen **300** having an outer ring-shaped electrode **302** surrounding electrostatic clamping electrodes **304**, **306**. The outer ring-shaped electrode **302** is designed in a way which obviates the need for a power distribution circuit. As shown, the outer ring-shaped electrode **302** includes a radially extending lead (power feed strip) **302a** which extends diagonally across the ring-shaped electrode **302**. The lead **302a** allows a terminal

(not shown) at a center of the underside of the platen **300** to be electrically connected to the outer ring-shaped electrode **302**. The electrostatic chuck is preferably a bipolar chuck with one or more pairs of clamping electrodes having opposed polarities. For instance, the electrostatic chuck can include four clamping electrodes separated by feed strips extending diagonally across the outer ring-shaped electrode **302**. In such case, the feed strips would be perpendicular and the clamping electrodes would be located inside the four quadrant shaped spaces formed by the outer ring-shaped electrode **302** and the diagonally extending feed strips.

FIG. **6** shows an underside of the platen **300** wherein a hollow ceramic stem **322** is attached to ceramic body **324**. Terminal **316** is attached to electrostatic clamping electrode **304**, terminal **320** is attached to electrostatic clamping electrode **306**, and terminal **318** is attached to lead **302a** of the ring-shaped outer electrode **302**. The ceramic body **324** includes three through holes **326** sized for passage of lift pins (not shown) for lifting and lowering a wafer onto a support surface of the platen **300**.

The platen **300** can be used as a high temperature electrostatic chuck of a substrate support module for sequential processing of individual semiconductor wafers wherein the platen **300** is a unitary body made in a single sintering step to provide coplanar electrostatic clamping and RF electrodes and one or more heaters below the coplanar electrodes. As mentioned above, in prior platen designs, an embedded power distribution circuit below the RF and electrostatic clamping electrodes included power distribution electrode arms which created undesirable inductance effects during wafer processing. By eliminating the power distribution electrode arms, it is possible to eliminate out-of-plane inductors and simplify the manufacturing process by conducting a single sintering step. In addition, by providing a feed strip **302** which extends diagonally across the outer ring-shaped electrode **302**, it is possible to minimize adverse effects of disturbances to the RF field above the wafer being processed.

The pedestal **300** and stem **322** are preferably of ceramic material and a bottom surface of the pedestal **300** can be joined to a flange at an upper end of the stem **322** such as by brazing, friction welding, diffusion bonding, or other suitable technique. The interior of the stem **322** can include power supply leads, one or more thermocouple leads, and one or more gas supply tubes which supply an inert gas such as argon (Ar) or a heat transfer gas such as helium (He) which is delivered via suitable fluid passages to an underside of a semiconductor substrate located on support surface.

The power leads can be one or more feed rods which supply radio-frequency (RF), direct current (DC) and/or alternating current (AC) to electrodes embedded in the pedestal **300**. The pedestal **300** is preferably a unitary body of sintered ceramic material such as aluminum oxide (alumina), yttria, aluminum nitride, boron nitride, silicon oxide, silicon carbide, silicon nitride, titanium oxide, zirconium oxide, or other suitable material or combination of materials. Each electrode preferably has a planar configuration and is preferably made of an electrically conductive metallic material (e.g., tungsten, molybdenum, tantalum, niobium, cobalt) or electrically conductive non-metallic material (e.g., aluminum oxide-tantalum carbide, aluminum oxide-silicon carbide, aluminum nitride-tungsten, aluminum nitride-tantalum, yttrium oxide-molybdenum). The electrodes can be formed from powder materials which are co-fired with the ceramic material of the pedestal. For example, the electrodes can be formed of conductive paste which is co-fired with layers of the ceramic material forming the body of the

pedestal. For example, the paste can include conductive metal powder of nickel (Ni), tungsten (W), molybdenum (Mo), titanium (Ti), manganese (Mn), copper (Cu), silver (Ag), palladium (Pd), platinum (Pt), rhodium (Rh). Alternatively, the electrodes can be formed from a deposited material having a desired electrode pattern or a deposited film which is etched to form a desired electrode pattern. Still yet, the electrodes can comprise preformed grids, plates, wire mesh, or other suitable electrode material and/or configuration. In an embodiment, the electrodes include at least one electrostatic clamping electrode which is powered by a DC power source to provide DC chucking voltage (e.g., about 200 to about 2000 volts), at least one RF electrode powered by a RF power source to provide RF bias voltage (e.g., one or more frequencies of about 400 KHz to about 60 MHz at power levels of about 50 to about 3000 watts) and/or at least one electrode powered by DC and RF power sources via suitable circuitry.

The platen can be made by arranging coplanar electrodes in ceramic material and conducting a single sintering step to embed the electrodes in the sintered ceramic material. Examples of techniques for manufacturing ceramic chucks can be found in commonly-assigned U.S. Pat. Nos. 5,880,922; 6,483,690; and 8,637,194, the disclosures of which are hereby incorporated by reference. For example, the outer ring-shaped electrode with integral radially extending lead and the ESC electrodes can be screen printed on a green sheet of aluminum nitride, a green sheet of aluminum nitride or other suitable dielectric material can be placed over the screen printed electrodes, and the resulting compact can be heated pressed and sintered to form the platen. Terminals in holes extending into the underside of the sintered ceramic material can be bonded to each of the electrodes and the stem can be bonded to the underside of the platen.

FIG. 7 illustrates a platen 300 which includes electrically conductive electrodes 304, 306 such as an electrically conductive grids and feed strip electrode 302a which is electrically connected to an outer ring-shaped electrode 302 (not shown) embedded therein and a hollow ceramic support stem 322. The platen 300 and stem 322 are preferably made of a ceramic material such as aluminum nitride and a bottom surface of the platen 300 is joined to an upper end of the stem 322 such as by brazing, friction welding, diffusion bonding, or other suitable technique. A centrally located electrically conductive tube 330 is located inside the stem 322 with an upper end of the tube 330 electrically connected to embedded feed strip electrode 302a. An outlet of the tube 330 is in fluid communication with a gas passage 342 in an upper surface of the platen 300. The tube 330 can be supplied an inert gas such as argon (Ar) or nitrogen (N₂) or a heat transfer gas such as helium (He) which is delivered via gas passage 342 to an underside of a semiconductor substrate (not shown) supported on the platen 300. The outer surface of the tube 330 can be sealed to the platen 300 by a hermetic seal 332. The inside of the stem 322 also houses other components such as electrical feed rods 338 which deliver power to other electrodes such as resistance heaters 340a, 340b and additional feed rods 336 which deliver power to electrostatic clamping electrodes 304, 306 in the platen 300. The rods 336 can be hollow for deliver gas through outlets to the underside of a wafer supported on the pedestal 300.

During processing of a semiconductor substrate such as deposition of films on a silicon wafer supported on the platen 300, the platen 300 may cycle between temperatures ranging from about 20° C. to 500° C. and higher. For processing a 300 mm wafer, the platen 300 can have a thickness of up to

about 1 inch and a diameter of about 15 inches, the stem 322 can have a diameter of about 3 inches and the distance between the bottom of the stem 322 and the upper surface of the platen 300 can be about 5 inches. The tubes 330, 336 can have a diameter of about 4 mm, a length of about 7 to 8 inches. The inside of the stem 322 accommodates components such as electrical feeds such as palladium/rhodium (Pd/Rh) coated stainless steel or nickel (Ni) rods.

The feed rods 338 can be solid metal rods such as nickel (Ni) rods arranged at circumferentially spaced apart locations inward of an inner surface of the stem 322, and the two outer electrically conductive feed rods 336 (which can optionally be hollow rods to deliver gas to the upper surface of platen 300) are electrically connected to electrostatic clamping electrodes 304, 306. The solid feed rods 338 can supply power to resistance heaters 340a, 340b embedded in the platen 300 at a location below the electrostatic clamping electrodes 304, 306. Electrical connections between the central tube 330 and feed strip 302a, between the feed rods 336 and the electrodes 304, 306, and between the feed rods 338 and the heaters 340a, 340b can include solid terminals/studs/sockets as disclosed in commonly-assigned U.S. Pat. No. 9,088,085, the disclosure of which is hereby incorporated by reference. During manufacture of the platen 300, the tube 330 and feed rods 336, 338 can be bonded to the platen 300 and electrodes 302, 304, 306 via suitable sintering and/or brazing techniques.

FIG. 8 shows a bottom perspective view of the substrate support pedestal 106. As shown, central tube 330, feed rods 338 and outer tubes 336 extend outward from a lower end of the stem 322.

FIG. 9 is a cross-sectional view of the substrate support pedestal 106. As shown, the central tube 330 is electrically connected to feed strip electrode 302a and two feed rods 338 are electrically connected to one or more resistance heaters 340a, 340b embedded in the platen 300 at a location below the electrodes 302, 304, 306. For instance, a pair of feed rods 338 can be connected to an inner heater and another pair of feed rods 338 can be connected to an outer heater. If desired a single heater or more than two heaters can be embedded in the platen 300 in any desired geometrical arrangement. The central tube 330 supplies gas to an outlet 342 in the upper surface of the platen 300.

While the substrate pedestal module of the semiconductor substrate processing apparatus has been described in detail with reference to specific embodiments thereof, it will be apparent to those skilled in the art that various changes and modifications can be made, and equivalents employed, without departing from the scope of the appended claims.

What is claimed is:

1. An electrostatic chuck, comprising:

- a platen having an upper surface configured to support a substrate;
- a first electrostatic clamping electrode embedded within the platen;
- a second electrostatic clamping electrode embedded within the platen;
- an outer ring-shaped RF electrode, embedded within the platen, that surrounds the first and second electrostatic clamping electrodes and comprises a feed strip that extends radially across the platen between the first and second electrostatic clamping electrodes; and
- a plurality of hollow feed rods configured to supply power to the first and second electrostatic clamping electrodes and to the outer ring-shaped RF electrode.

9

2. The electrostatic chuck of claim 1, wherein the first and second electrostatic clamping electrodes have opposite polarities.

3. The electrostatic chuck of claim 1, wherein the first and second electrostatic clamping electrodes are configured to be powered by a DC chucking voltage between about 200 V and about 2000 V to electrostatically clamp the substrate, and wherein the outer ring-shaped RF electrode is configured to be powered by an RF power source configured to provide an RF bias voltage at a frequency between about 400 kHz and about 60 MHz at a power between about 50 W and about 3000 W.

4. The electrostatic chuck of claim 1, further comprising: a stem attached to the platen; and at least three terminals located inside the stem.

5. The electrostatic chuck of claim 4, wherein the plurality of hollow feed rods are located inside the stem and config-

10

ured to supply the power to the first and second electrostatic clamping electrodes and the outer ring-shaped RF electrode via the at least three terminals.

6. The electrostatic chuck of claim 1, wherein the outer ring-shaped RF electrode, the first electrostatic clamping electrode, and the second electrostatic clamping electrode are coplanar.

7. The electrostatic chuck of claim 1, further comprising: a plurality of resistance heaters embedded in the platen at a location beneath the first and second electrostatic clamping electrodes.

8. The electrostatic chuck of claim 1, wherein the feed strip extends diagonally across the platen between the first and second electrostatic clamping electrodes to connect to the outer ring-shaped RF electrode at two locations 180 degrees apart.

* * * * *