US 20250267242A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2025/0267242 A1**

Takeuchi et al. (43) **Pub. Date: Aug. 21, 2025**

(54) **PROJECTION METHOD, SYSTEM, AND NON-TRANSITORY COMPUTER-READABLE STORAGE MEDIUM STORING PROGRAM**

(71) Applicant: **SEIKO EPSON CORPORATION**, Tokyo (JP)

(72) Inventors: **Kota Takeuchi**, Azumino-shi (JP); **Kosuke Saku**, Matsumoto-shi (JP)

(73) Assignee: **SEIKO EPSON CORPORATION**, Tokyo (JP)

(21) Appl. No.: **19/056,860**

(22) Filed: **Feb. 19, 2025**

(30) **Foreign Application Priority Data**

Feb. 20, 2024 (JP) 2024-023491

Publication Classification

(51) **Int. Cl.**
H04N 9/31 (2006.01)

(52) **U.S. Cl.**
CPC ***H04N 9/3185*** (2013.01); ***H04N 9/3188*** (2013.01); ***H04N 9/3194*** (2013.01)

(57) **ABSTRACT**

A projection method includes: projecting a projection image onto projection surface from projector; acquiring picked-up image formed by picking up projection image with camera having a first internal parameter; generating a first correspondence relationship in which coordinates of a plurality of first pixels in picked-up image and coordinates of a plurality of second pixels on display panel of projector are associated with each other; acquiring state information indicating a state of an optical system of projector; estimating a second internal parameter of optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and estimating external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

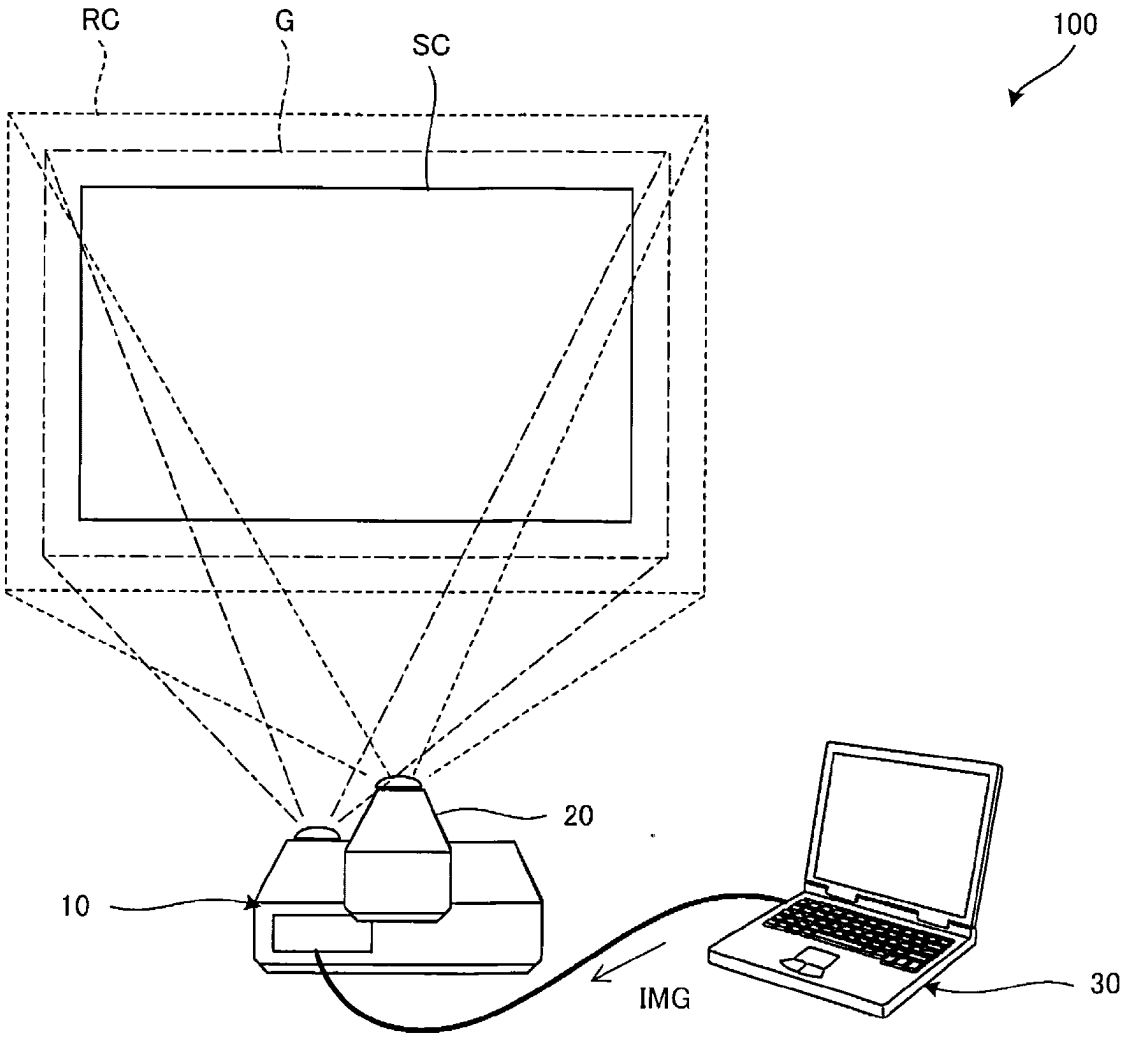

FIG. 1

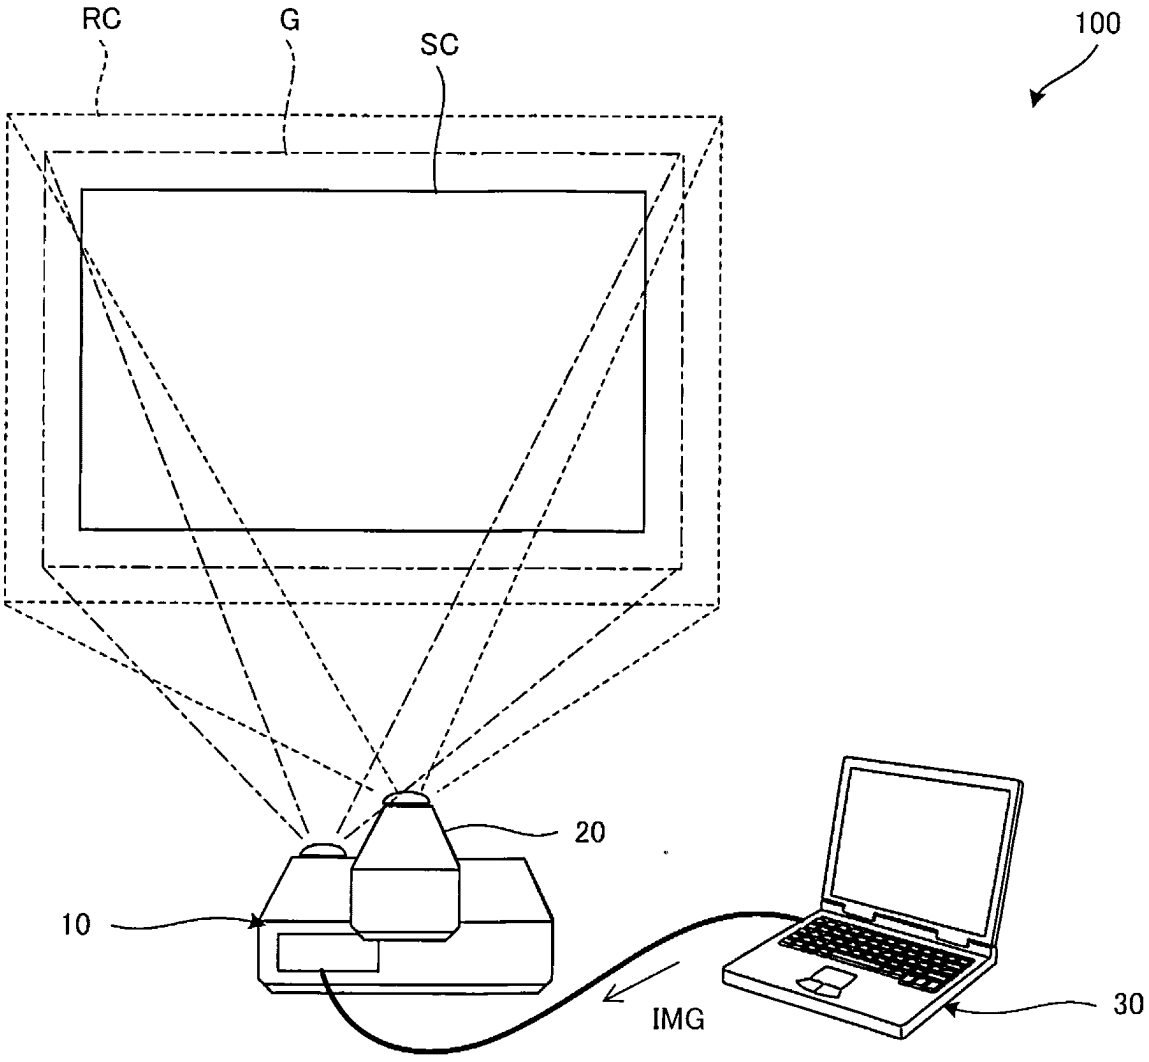

FIG. 2

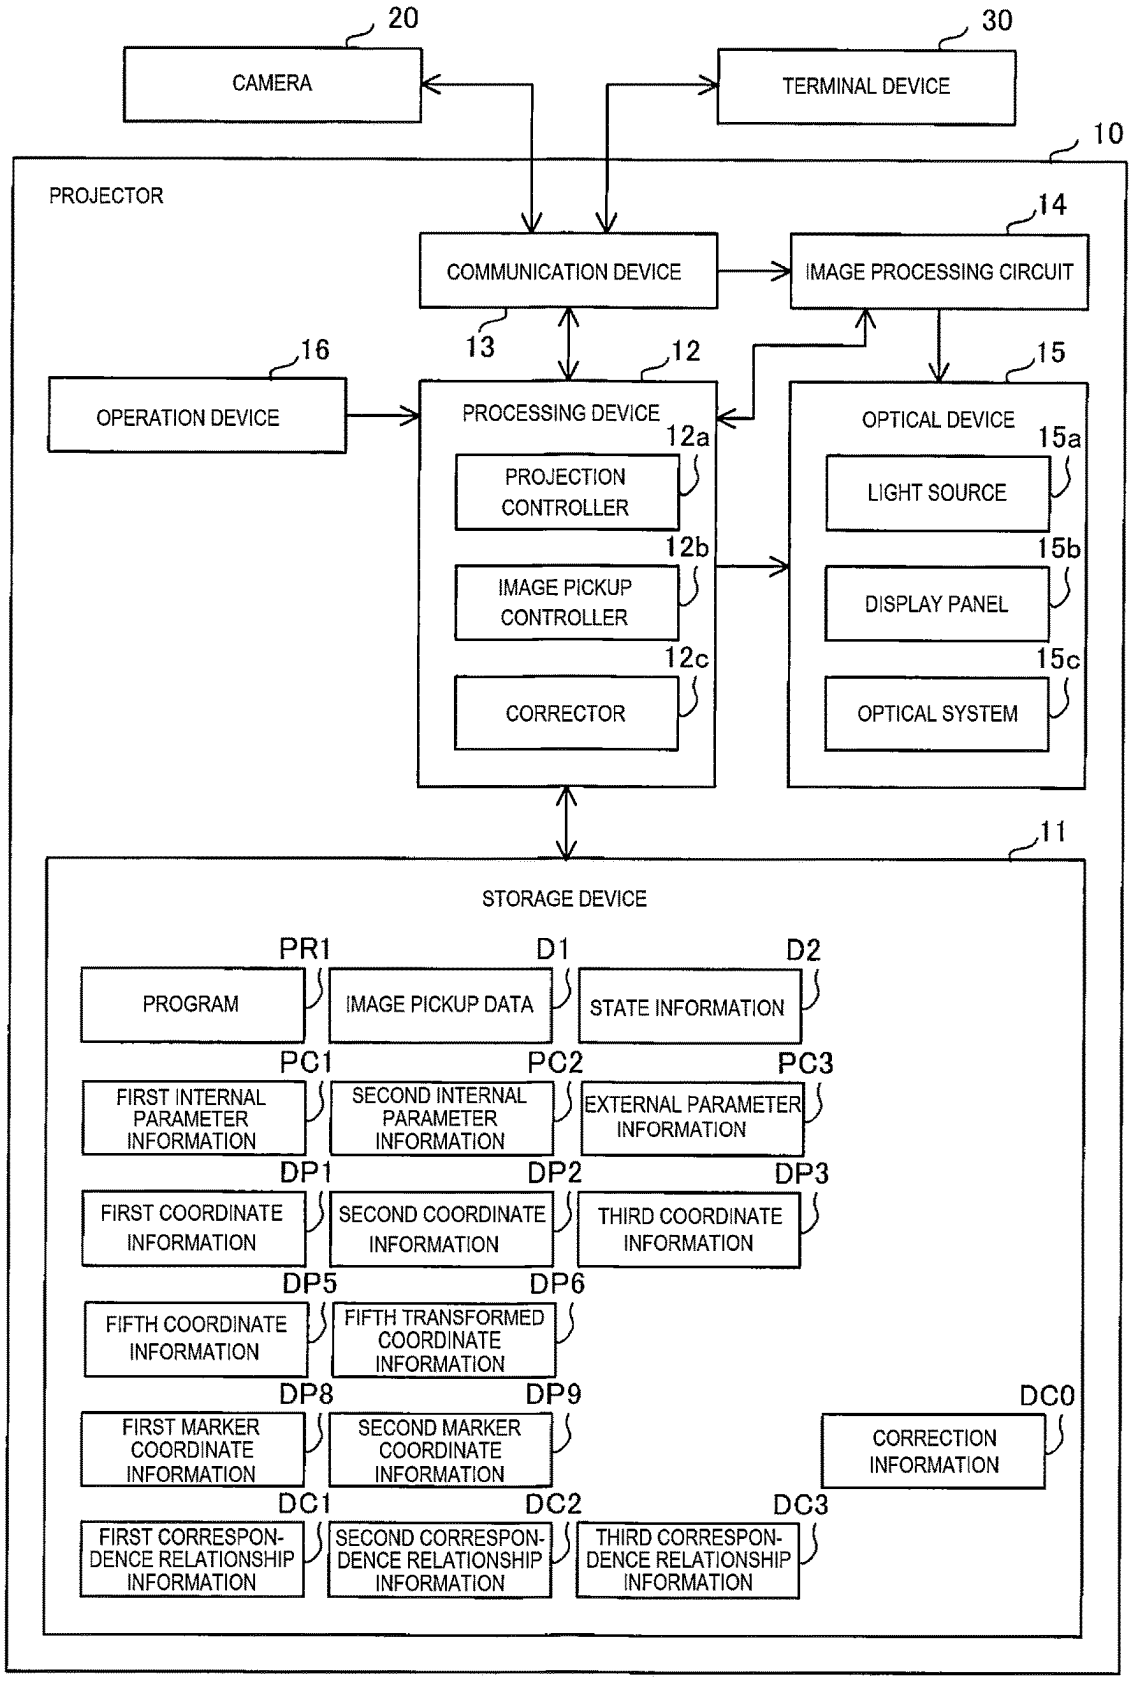
20
CAMERA
30
TERMINAL DEVICE
10
PROJECTOR
14
COMMUNICATION DEVICE
IMAGE PROCESSING CIRCUIT
13
16
12
15
OPERATION DEVICE
PROCESSING DEVICE
OPTICAL DEVICE
12a
PROJECTION CONTROLLER
15a
LIGHT SOURCE
12b
IMAGE PICKUP CONTROLLER
15b
DISPLAY PANEL
12c
CORRECTOR
15c
OPTICAL SYSTEM
11
STORAGE DEVICE
PR1
PROGRAM
D1
IMAGE PICKUP DATA
D2
STATE INFORMATION
PC1
FIRST INTERNAL PARAMETER INFORMATION
PC2
SECOND INTERNAL PARAMETER INFORMATION
PC3
EXTERNAL PARAMETER INFORMATION
DP1
FIRST COORDINATE INFORMATION
DP2
SECOND COORDINATE INFORMATION
DP3
THIRD COORDINATE INFORMATION
DP5
FIFTH COORDINATE INFORMATION
DP6
FIFTH TRANSFORMED COORDINATE INFORMATION
DP8
FIRST MARKER COORDINATE INFORMATION
DP9
SECOND MARKER COORDINATE INFORMATION
DC0
CORRECTION INFORMATION
DC1
FIRST CORRESPON-DENCE RELATIONSHIP INFORMATION
DC2
SECOND CORRESPON-DENCE RELATIONSHIP INFORMATION
DC3
THIRD CORRESPON-DENCE RELATIONSHIP INFORMATION

FIG. 3

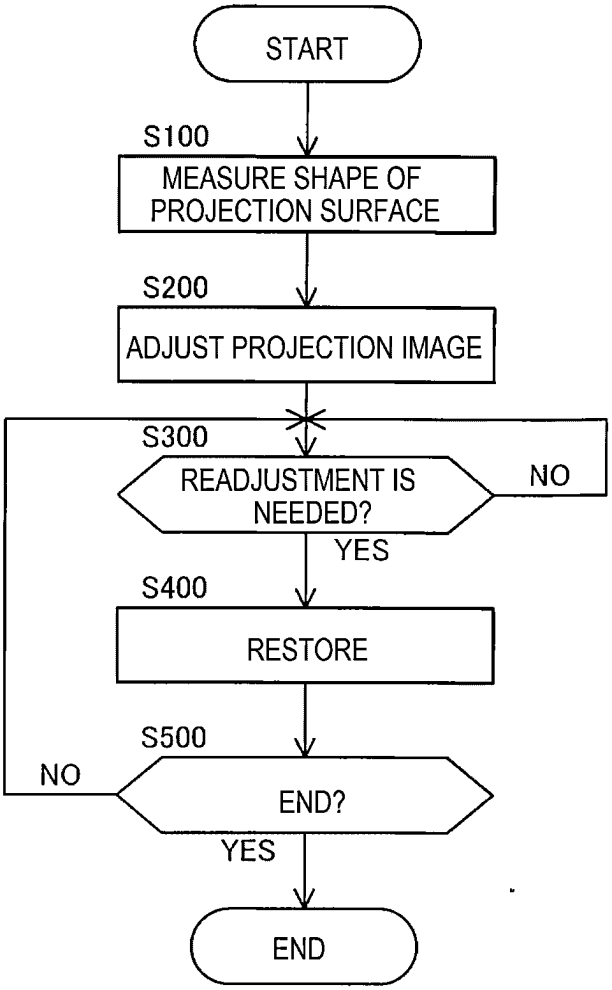
START
S100
MEASURE SHAPE OF PROJECTION SURFACE
S200
ADJUST PROJECTION IMAGE
S300
READJUSTMENT IS NEEDED?
NO
YES
S400
RESTORE
S500
NO
END?
YES
END

FIG. 4

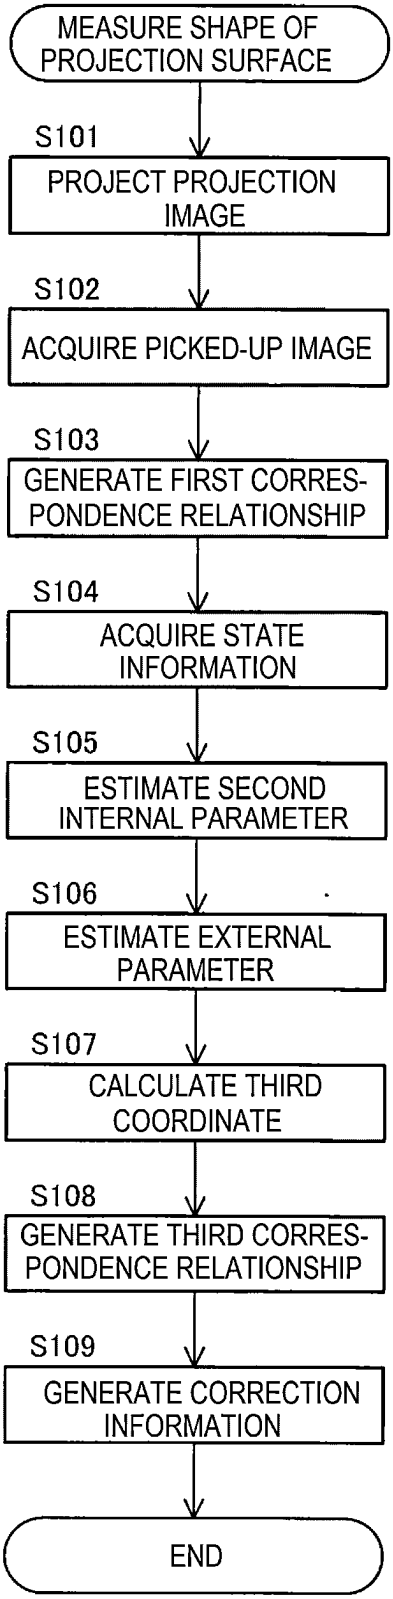
MEASURE SHAPE OF PROJECTION SURFACE
S101
PROJECT PROJECTION IMAGE
S102
ACQUIRE PICKED-UP IMAGE
S103
GENERATE FIRST CORRES-PONDENCE RELATIONSHIP
S104
ACQUIRE STATE INFORMATION
S105
ESTIMATE SECOND INTERNAL PARAMETER
S106
ESTIMATE EXTERNAL PARAMETER
S107
CALCULATE THIRD COORDINATE
S108
GENERATE THIRD CORRES-PONDENCE RELATIONSHIP
S109
GENERATE CORRECTION INFORMATION
END

FIG. 5

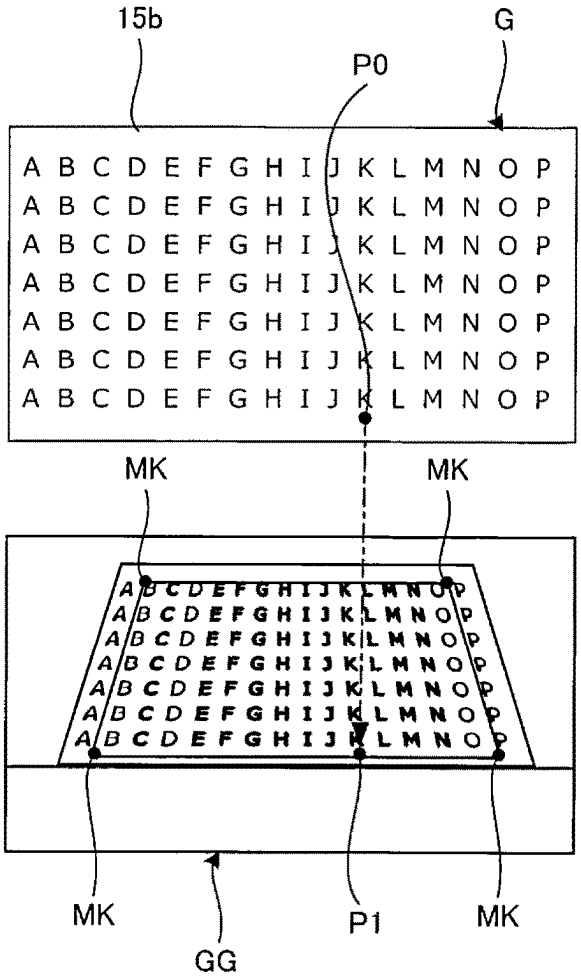
15b
G
P0
A B C D E F G H I J K L M N O P
MK
MK
MK
MK
GG
P1

FIG. 6

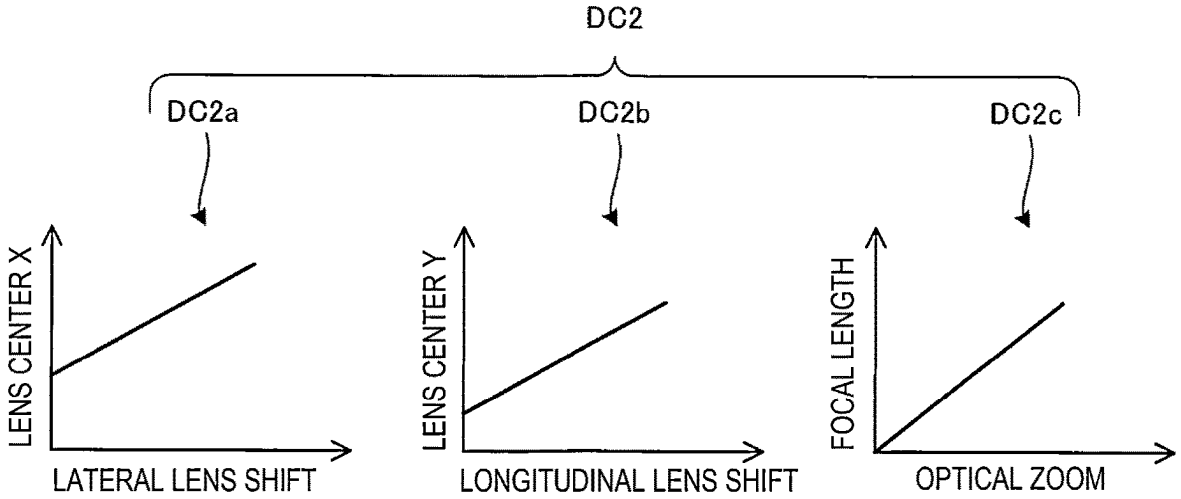
DC2
DC2a
DC2b
DC2c
LENS CENTER X
LATERAL LENS SHIFT
LENS CENTER Y
LONGITUDINAL LENS SHIFT
FOCAL LENGTH
OPTICAL ZOOM

FIG. 7

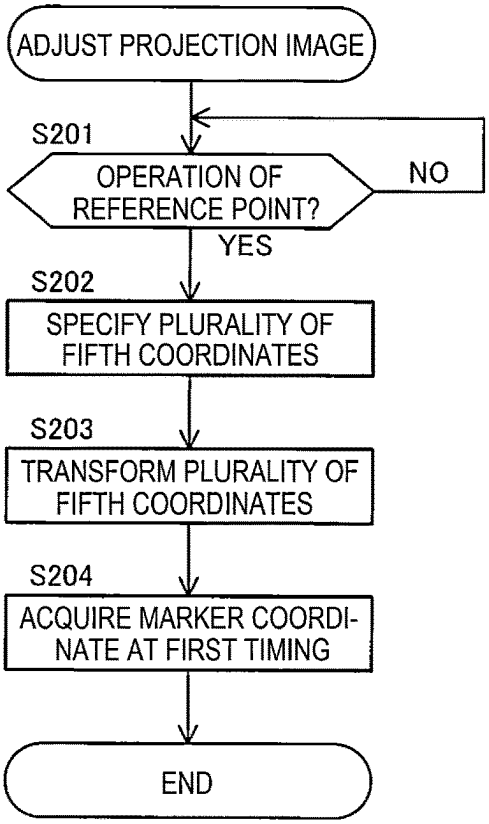
ADJUST PROJECTION IMAGE
S201
OPERATION OF REFERENCE POINT?
NO
YES
S202
SPECIFY PLURALITY OF FIFTH COORDINATES
S203
TRANSFORM PLURALITY OF FIFTH COORDINATES
S204
ACQUIRE MARKER COORDINATE AT FIRST TIMING
END

FIG. 8

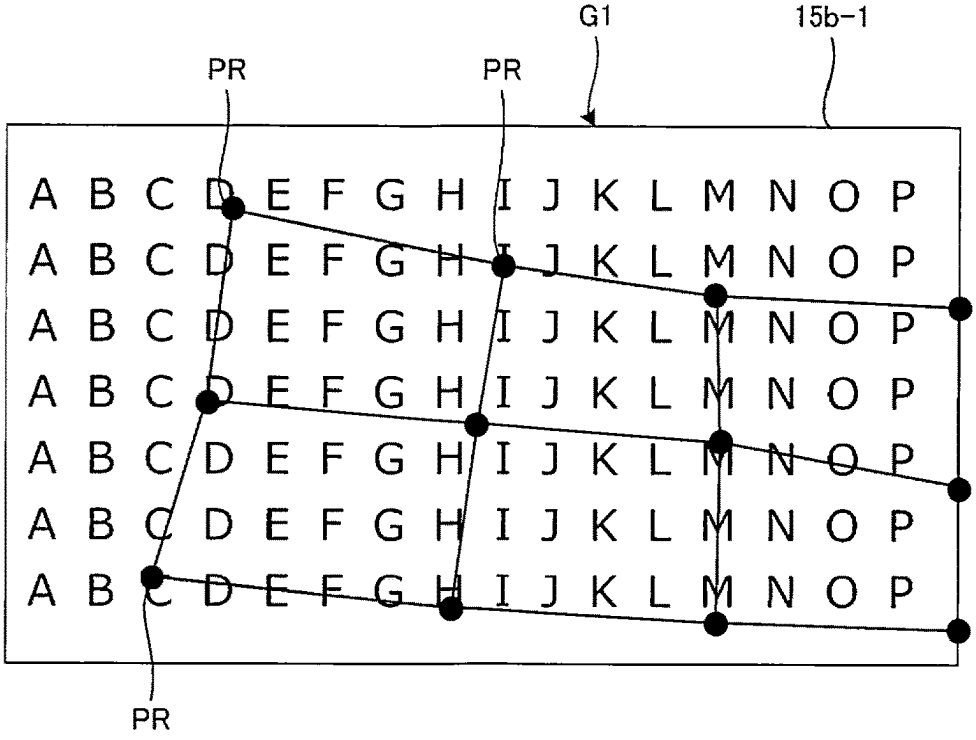
G1
15b-1
PR
PR
PR
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P

FIG. 9

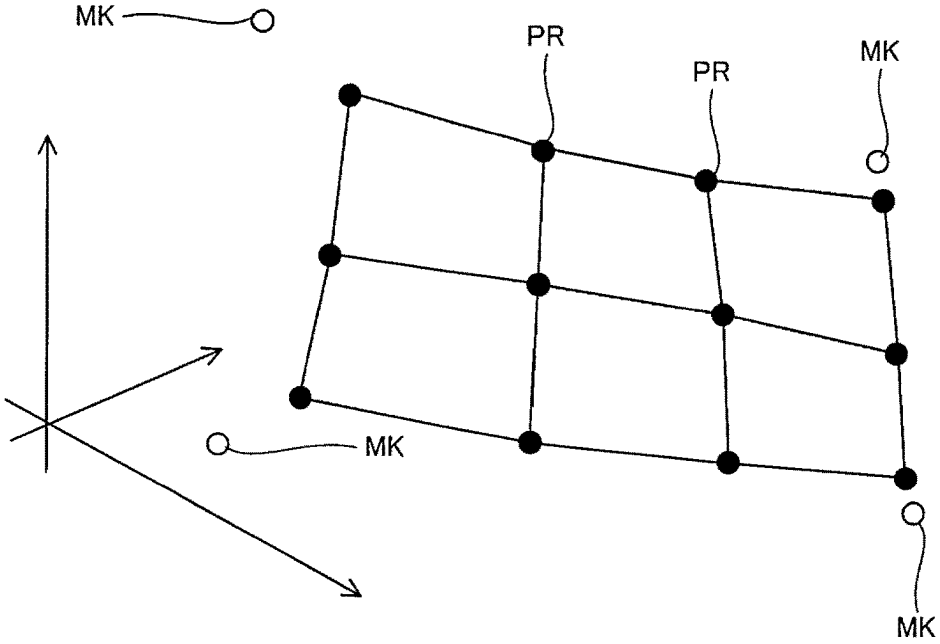
MK
PR
PR
MK
MK
MK

FIG. 10

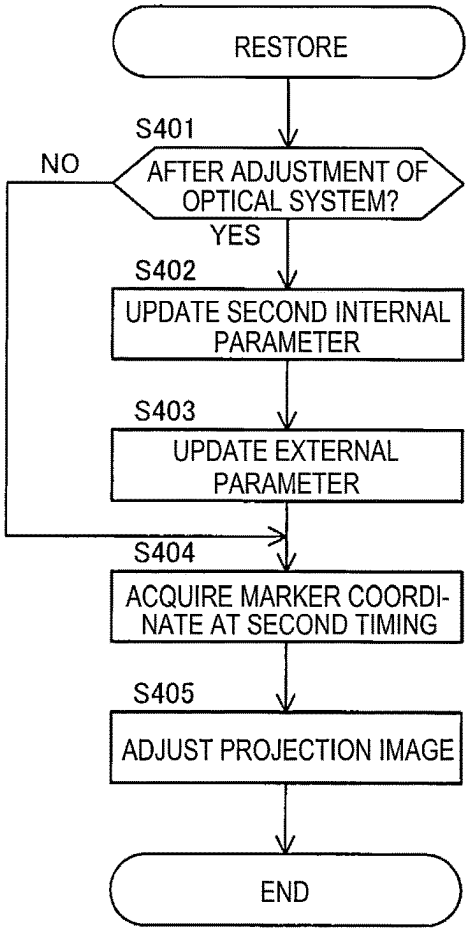
RESTORE
S401
NO
AFTER ADJUSTMENT OF OPTICAL SYSTEM?
YES
S402
UPDATE SECOND INTERNAL PARAMETER
S403
UPDATE EXTERNAL PARAMETER
S404
ACQUIRE MARKER COORDINATE AT SECOND TIMING
S405
ADJUST PROJECTION IMAGE
END

FIG. 11

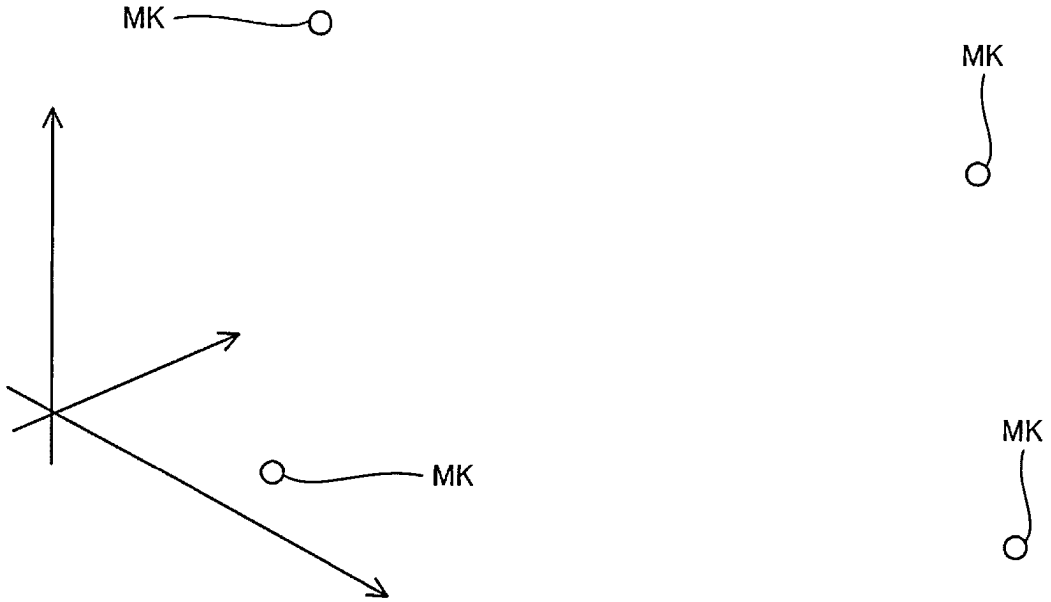

FIG. 12

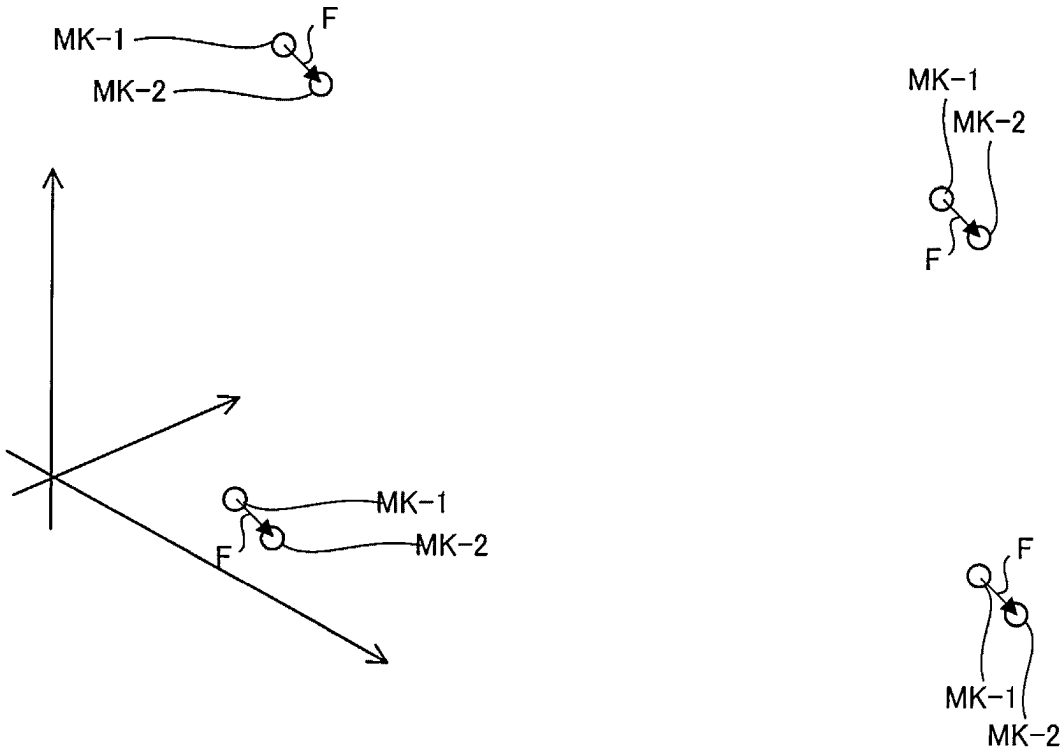

FIG. 13

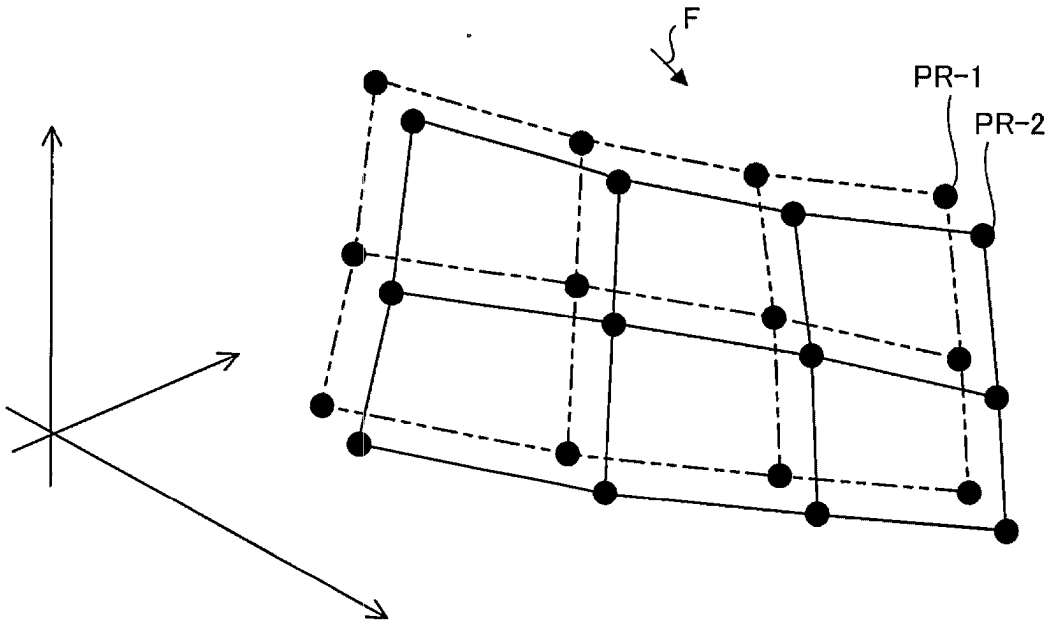

FIG. 14

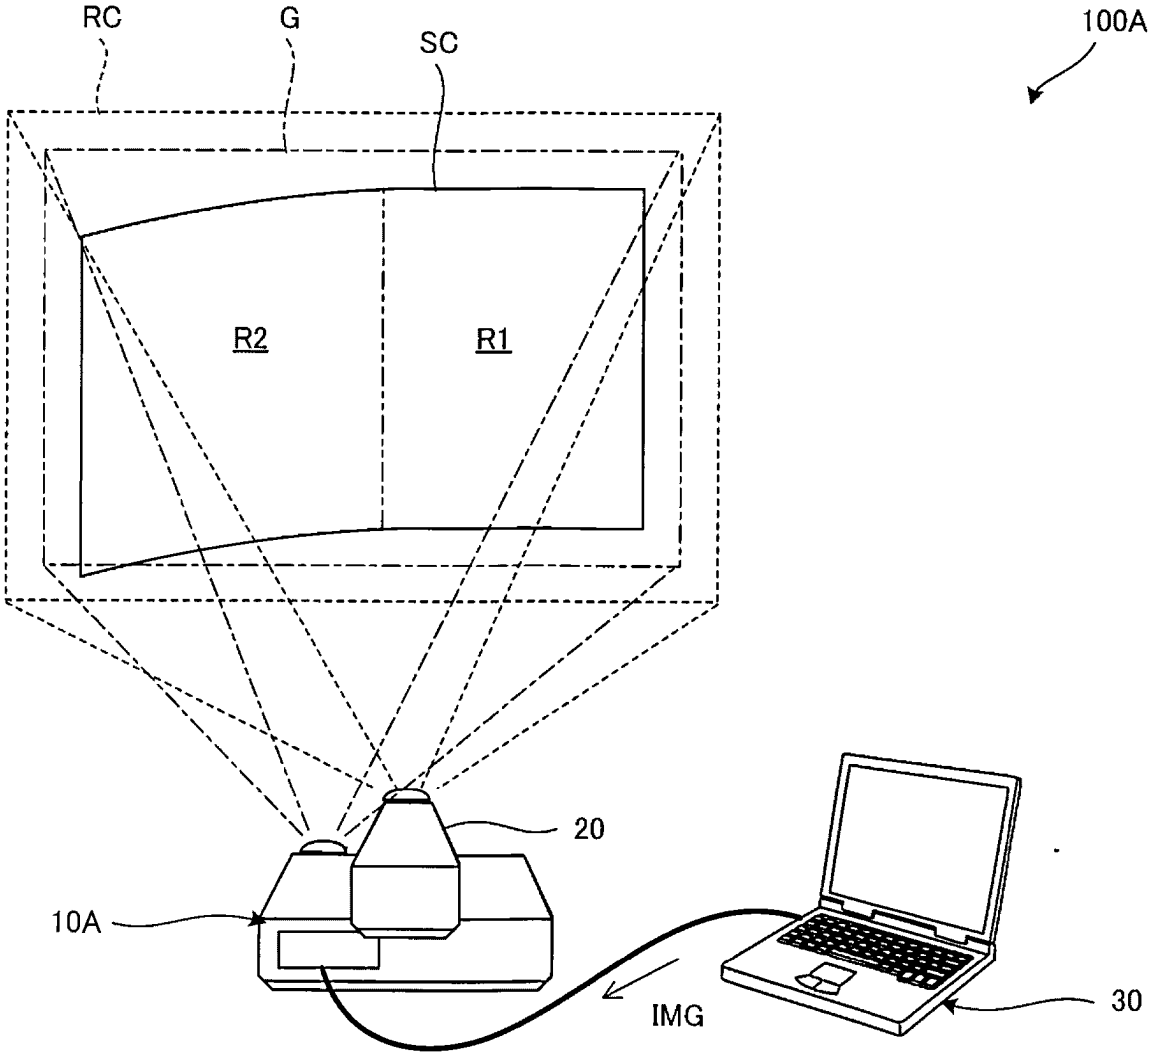

FIG. 15

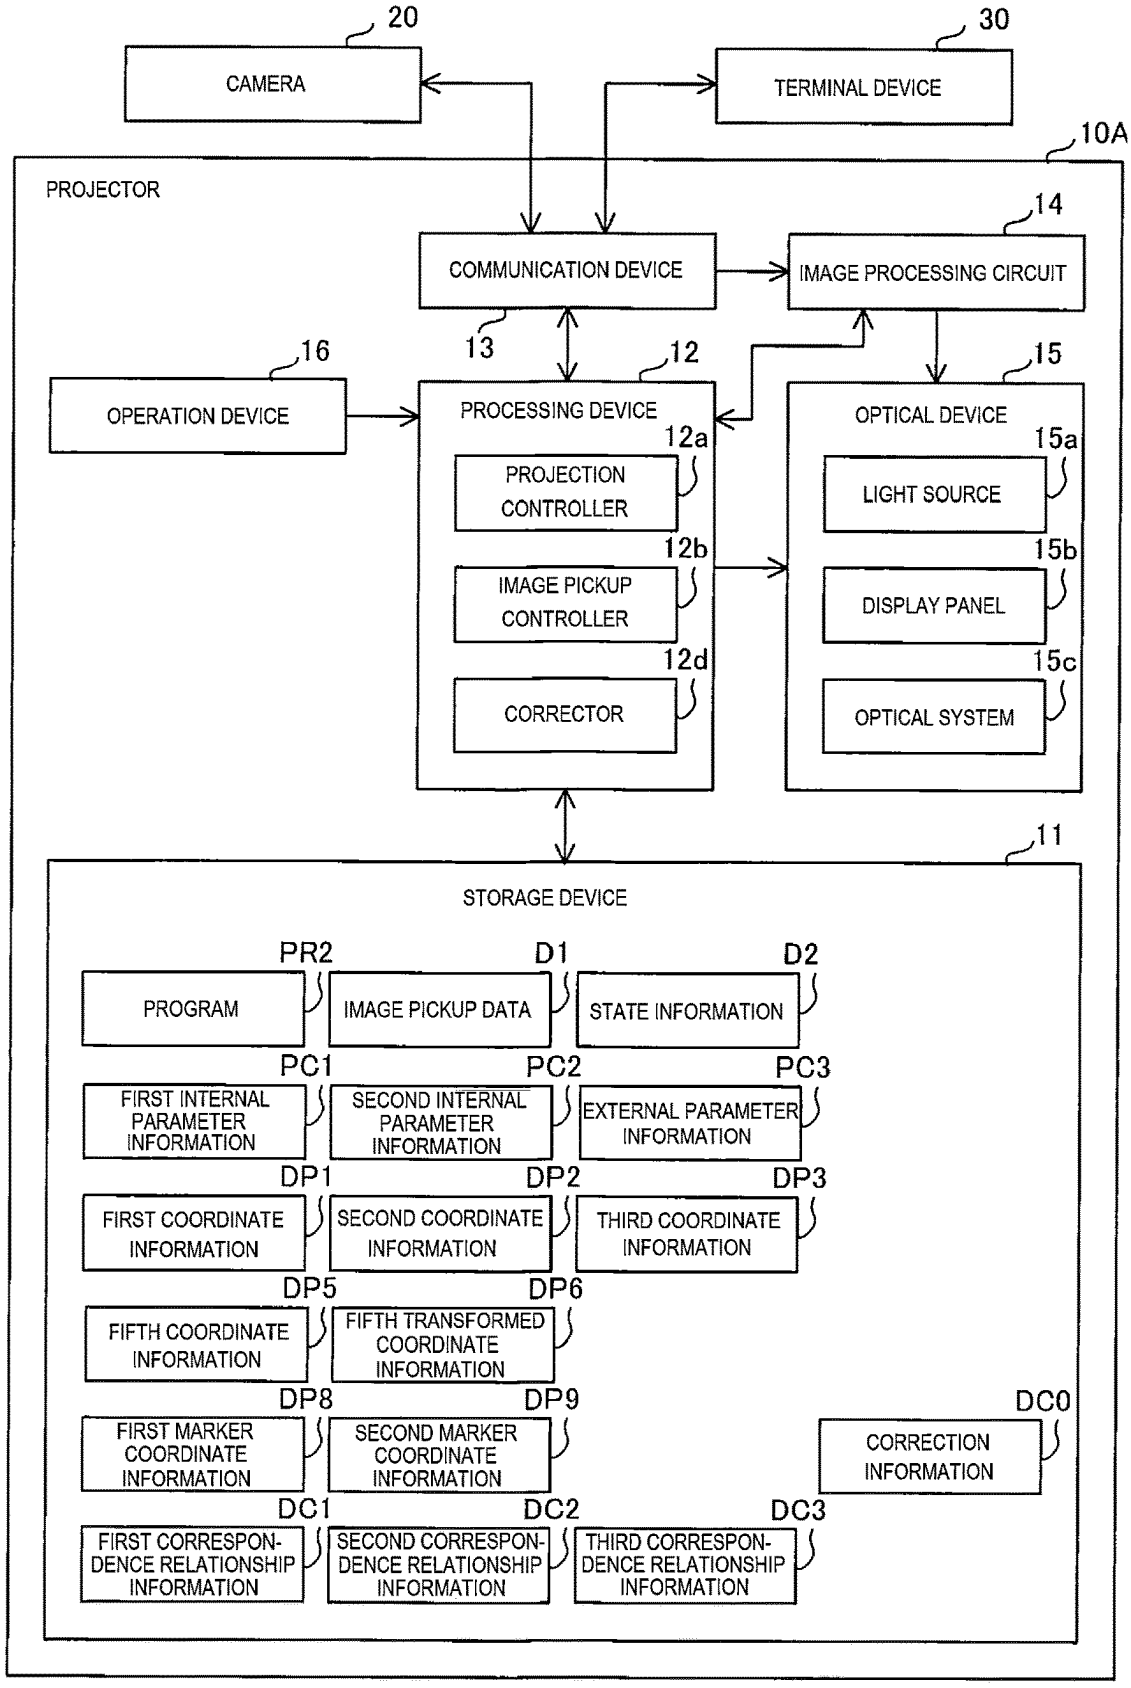
20
CAMERA
30
TERMINAL DEVICE
10A
PROJECTOR
14
COMMUNICATION DEVICE
IMAGE PROCESSING CIRCUIT
13
16
12
15
OPERATION DEVICE
PROCESSING DEVICE
OPTICAL DEVICE
12a
PROJECTION CONTROLLER
15a
LIGHT SOURCE
12b
IMAGE PICKUP CONTROLLER
15b
DISPLAY PANEL
12d
CORRECTOR
15c
OPTICAL SYSTEM
11
STORAGE DEVICE
PR2
PROGRAM
D1
IMAGE PICKUP DATA
D2
STATE INFORMATION
PC1
FIRST INTERNAL PARAMETER INFORMATION
PC2
SECOND INTERNAL PARAMETER INFORMATION
PC3
EXTERNAL PARAMETER INFORMATION
DP1
FIRST COORDINATE INFORMATION
DP2
SECOND COORDINATE INFORMATION
DP3
THIRD COORDINATE INFORMATION
DP5
FIFTH COORDINATE INFORMATION
DP6
FIFTH TRANSFORMED COORDINATE INFORMATION
DP8
FIRST MARKER COORDINATE INFORMATION
DP9
SECOND MARKER COORDINATE INFORMATION
DC0
CORRECTION INFORMATION
DC1
FIRST CORRESPON-DENCE RELATIONSHIP INFORMATION
DC2
SECOND CORRESPON-DENCE RELATIONSHIP INFORMATION
DC3
THIRD CORRESPON-DENCE RELATIONSHIP INFORMATION

FIG. 16

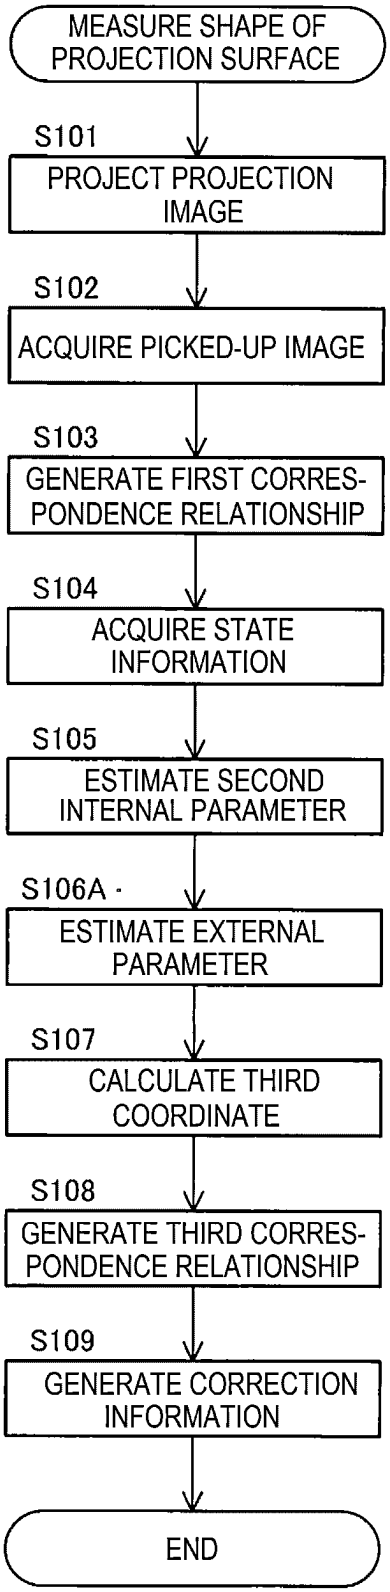
MEASURE SHAPE OF PROJECTION SURFACE
S101
PROJECT PROJECTION IMAGE
S102
ACQUIRE PICKED-UP IMAGE
S103
GENERATE FIRST CORRES-PONDENCE RELATIONSHIP
S104
ACQUIRE STATE INFORMATION
S105
ESTIMATE SECOND INTERNAL PARAMETER
S106A
ESTIMATE EXTERNAL PARAMETER
S107
CALCULATE THIRD COORDINATE
S108
GENERATE THIRD CORRES-PONDENCE RELATIONSHIP
S109
GENERATE CORRECTION INFORMATION
END

FIG. 17

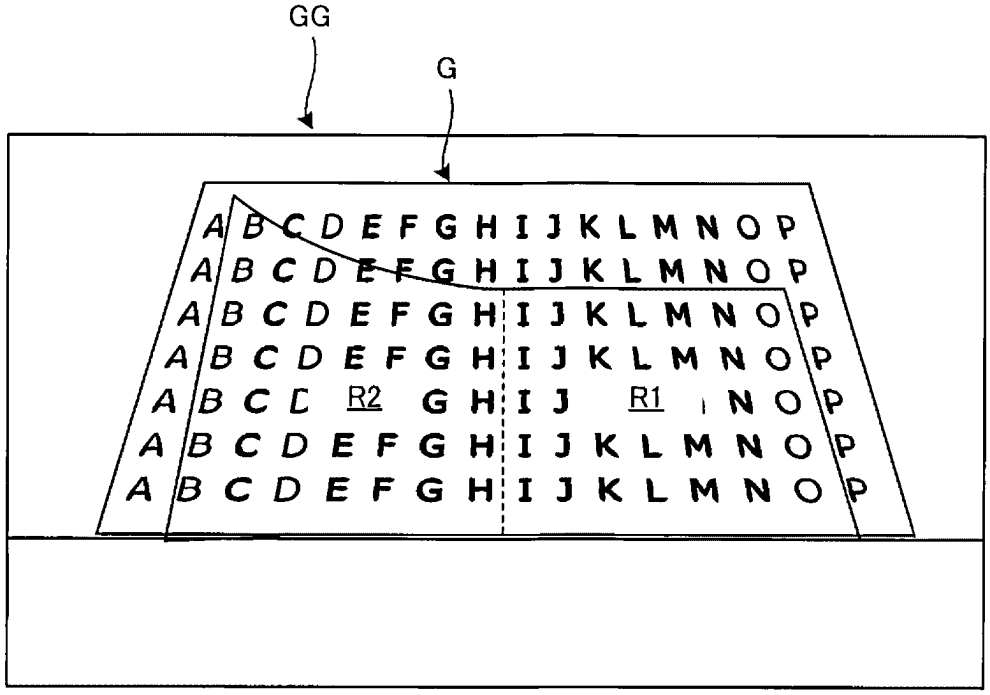
GG
G
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P
A B C D R2 G H I J R1 N O P
A B C D E F G H I J K L M N O P
A B C D E F G H I J K L M N O P

PROJECTION METHOD, SYSTEM, AND NON-TRANSITORY COMPUTER-READABLE STORAGE MEDIUM STORING PROGRAM

[0001] The present application is based on, and claims priority from JP Application Serial Number 2024-023491, filed Feb. 20, 2024, the disclosure of which is hereby incorporated by reference herein in its entirety.

BACKGROUND

1. Technical Field

[0002] The present disclosure relates to a projection method, a system, and a non-transitory computer-readable storage medium storing a program.

2. Related Art

[0003] For example, US 2008/0285843 discloses a technique of capturing, with a camera, an image of calibration plate with a yellow pattern printed thereon in a state where a red calibration pattern is projected on the calibration plate from a projector, and calculating an internal parameter of the projector, based on the result of the image capture.

[0004] US 2008/0285843 is an example of the related art.

[0005] The internal parameter of the projector is used to calculate, for example, one or both of the position and the attitude of the projector in relation to the camera, as an external parameter of the projector. In the technique of US 2008/0285843, not only the projector and the camera but also the calibration plate need to be prepared when calculating the internal parameter, and this takes time and effort from the user.

SUMMARY

[0006] According to an aspect of the present disclosure, a projection method includes: projecting a drawn image drawn on a display panel of a projector onto a projection surface from the projector as a projection image; picking up the projection image with a camera having a first internal parameter and thus acquiring a picked-up image; generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the drawn image are associated with each other; acquiring state information indicating a state of an optical system of the projector; estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

[0007] According to another aspect of the present disclosure, a system includes a projector and a camera having a first internal parameter, and the projector executes: projecting a projection image onto a projection surface from the projector; picking up the projection image with the camera and thus acquiring a picked-up image; generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the projection image on a display panel of the projector are associated with each other; acquiring state information indicating a state of an optical system of the projector; estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

[0008] According to still another aspect of the present disclosure, a non-transitory computer-readable storage medium storing a program is provided, the program causing a computer to execute: projecting a projection image onto a projection surface from a projector; picking up the projection image with a camera having a first internal parameter and thus acquiring a picked-up image; generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the projection image on a display panel of the projector are associated with each other; acquiring state information indicating a state of an optical system of the projector; estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. **1** is a diagram illustrating an overview of a system used for a projection method according to a first embodiment.

[0010] FIG. **2** is a block diagram illustrating a projector used in the system according to the first embodiment.

[0011] FIG. **3** is a flowchart showing the flow of the projection method according to the first embodiment.

[0012] FIG. **4** is a flowchart showing the flow of measurement of the shape of a projection surface according to the first embodiment.

[0013] FIG. **5** is a diagram illustrating the relationship between coordinates of a projection image on a display panel and coordinates in a picked-up image.

[0014] FIG. **6** is a diagram illustrating an example of a second correspondence relationship.

[0015] FIG. **7** is a flowchart showing the flow of adjustment of the projection image.

[0016] FIG. **8** is a diagram illustrating a plurality of reference points of the projection image on the display panel.

[0017] FIG. **9** is a diagram illustrating three-dimensional coordinates of a marker at a first timing.

[0018] FIG. **10** is a flowchart illustrating the flow of restoration.

[0019] FIG. **11** is a diagram illustrating three-dimensional coordinates of the marker at a second timing.

[0020] FIG. **12** is a diagram illustrating three-dimensional coordinates of the marker at the first timing and the second timing.

[0021] FIG. **13** is a diagram illustrating adjustment of the projection image.

[0022] FIG. **14** is a diagram illustrating an overview of a system used for a projection method according to a second embodiment.

[0023] FIG. **15** is a block diagram illustrating a projector used in the system according to the second embodiment.

[0024] FIG. **16** is a flowchart illustrating the flow of measurement of the shape of a projection surface according to the second embodiment.

[0025] FIG. **17** is a diagram illustrating the shape measurement of a first part and a second part of the projection surface.

DESCRIPTION OF EMBODIMENTS

[0026] Preferred embodiments according to the present disclosure will now be described with reference to the accompanying drawings. In the drawings that the dimension and scale of each part differ from actual values as appropriate, and some parts may be schematically shown in order to facilitate understanding. The scope of the present disclosure is not limited to the embodiments described below unless the description particularly states that limitations are applied to the present disclosure.

1. First Embodiment

1-1. Overview of System

[0027] FIG. **1** is a diagram illustrating an overview of a system **100** used for a projection method according to a first embodiment. The system **100** is a projection system for projecting a projection image G onto a projection surface SC.

[0028] The projection surface SC is a surface of an object such as a screen. In the example shown in FIG. **1**, the projection surface SC is a planar surface. The shape of the projection surface SC is not limited to the example illustrated in FIG. **1**, and for example, the projection surface SC may be a surface having a part curved in a concave shape as in a second embodiment, described later, or a surface having a part curved in a convex shape.

[0029] As illustrated in FIG. **1**, the system **100** includes a projector **10**, a camera **20**, and a terminal device **30**.

[0030] The projector **10** is a display device that projects a projection image G represented by image data IMG output from the terminal device **30**, onto the projection surface SC. In the example illustrated in FIG. **1**, the projection image G is projected onto an area including the projection surface SC. The projection position of the projection image G in relation to the projection surface SC is not limited to the example illustrated in FIG. **1** and may be any position.

[0031] The projector **10** in the present embodiment has a function of controlling the operations of the camera **20** and a function of adjusting the shape of the projection image G, using a result of image pickup by the camera **20**. The camera **20** is a digital camera having an image pickup device such as a charge-coupled device (CCD) or a complementary metal-oxide semiconductor (CMOS). The camera **20** picks up an image of an area RC. The area RC is an area including the projection image G projected on the projection surface SC. The camera **20** may be an element of the projector **10**.

[0032] The terminal device **30** is a computer having a function of supplying the image data IMG to the projector **10**. In the example shown in FIG. **1**, the terminal device **30** is a laptop computer. Note that the terminal device **30** is not limited to a laptop computer and may be, for example, a desktop computer, a smartphone, or a tablet terminal or the like, or may be a video player, a digital versatile disk (DVD) player, a Blu-ray disc player, a hard disk recorder, a television tuner, a set-top box for cable television (CATV), a video game console, or the like.

1-2. Projector

[0033] FIG. **2** is a block diagram illustrating the projector **10** used in the system **100** according to the first embodiment. FIG. **2** shows the coupling state of the camera **20** and the terminal device **30** to the projector **10** in addition to the illustration of the projector **10**.

[0034] As shown in FIG. **2**, the projector **10** includes a storage device **11**, a processing device **12**, a communication device **13**, an image processing circuit **14**, an optical device **15**, and an operation device **16**. These devices are communicably coupled to one another.

[0035] The storage device **11** is a storage device that stores a program to be executed by the processing device **12** and data to be processed by the processing device **12**. The storage device **11** includes, for example, a hard disk drive or a semiconductor memory. A part or all of the storage device **11** may be provided in a storage device, a server, or the like outside the projector **10**.

[0036] The storage device **11** stores a program PR**1**, image pickup data D**1**, state information D**2**, first internal parameter information PC**1**, second internal parameter information PC**2**, external parameter information PC**3**, first coordinate information DP**1**, second coordinate information DP**2**, third coordinate information DP**3**, fifth coordinate information DP**5**, fifth transformed coordinate information DP**6**, first marker coordinate information DP**8**, second marker coordinate information DP**9**, first correspondence relationship information DC**1**, second correspondence relationship information DC**2**, third correspondence relationship information DC**3**, and correction information DC**0**.

[0037] The program PR**1** is a program for executing a projection method described in detail below.

[0038] The image pickup data D**1** is information representing a picked-up image GG described below that is acquired by picking up the projection image G with the camera **20**.

[0039] The state information D**2** is information indicating the state of an optical system **15***c* of the projector **10**. The state of the optical system **15***c* of the projector **10** is the state of optical characteristics such as optical distortion, amount of lens shift, and projection range (throw ratio), and is represented by, for example, information such as the number of steps of a motor driving the optical system **15***c*, an applied current or an applied voltage to the motor, and a detection value of a sensor detecting the position of a lens provided in the optical system **15***c*. The lens provided in the optical system **15***c* refers to a projection lens. The optical distortion

varies from one amount of lens shift to another and therefore is mapped for each amount of lens shift.

[0040] The first internal parameter information PC**1** is information indicating a first internal parameter of the camera **20**. The first internal parameter is a known parameter representing an optical characteristic such as the optical center, the focal length, or the aberration of the camera **20**. Hereinafter, the first internal parameter indicated by the first internal parameter information PC**1** may be simply referred to as a "first internal parameter".

[0041] The second internal parameter information PC**2** is information indicating a second internal parameter, which is an internal parameter of the projector **10**. The second internal parameter is a parameter representing an optical characteristic such as the angle of view or the optical center of the optical device **15** of the projector **10**. The angle of view varies depending on the throw ratio or the optical zoom. The optical center varies depending on the lens offset or the lens shift. Hereinafter, the second internal parameter indicated by the second internal parameter information PC**2** may be simply referred to as a "second internal parameter".

[0042] The external parameter information PC**3** is information indicating an external parameter indicating one or both of the position and the attitude of the projector **10** in relation to the camera **20**. Hereinafter, the external parameter indicated by the external parameter information PC**3** may be simply referred to as an "external parameter".

[0043] The first coordinate information DP**1** is information indicating a plurality of first coordinates, which are coordinates of a plurality of first pixels in the picked-up image GG described below that is represented by the image pickup data D**1**. The first pixel is a pixel of the camera **20**. The first coordinates are coordinates of the first pixel in the coordinate system of the picked-up image GG described later that is acquired by the camera **20**. The first coordinates are two-dimensional coordinates.

[0044] The second coordinate information DP**2** is information indicating a plurality of second coordinates, which are coordinates of a plurality of second pixels on a display panel **15***b* of the projector **10**. The second pixel is a pixel of the display panel **15***b*. The second coordinates are coordinates of the second pixel in the coordinate system of the display panel **15***b*. The second coordinates are two-dimensional coordinates. A drawn image based on the image data IMG is drawn on the display panel **15***b*, and the drawn image is projected as the projection image G via the projection lens. The pixels forming the drawn image are the second pixels.

[0045] The third coordinate information DP**3** indicates a plurality of third coordinates, which are three-dimensional coordinates of the projection image G on the projection surface SC. In this specification, the three-dimensional coordinates on the projection surface SC are coordinates in a world coordinate system, which is a three-dimensional coordinate system set in a real space where the projection surface SC is installed or a virtual three-dimensional space corresponding to the real space. In the description below, the three-dimensional coordinate system may be simply referred to as a "three-dimensional coordinate system". The three-dimensional coordinates may be simply referred to as "three-dimensional coordinates".

[0046] The fifth coordinate information DP**5** is information indicating a plurality of fifth coordinates, which are coordinates of a plurality of reference points PR, described later, of the projection image G on the display panel **15***b* of the projector **10**. The fifth coordinates are coordinates of a pixel corresponding to a reference point PR, described later, in the coordinate system of the display panel **15***b*.

[0047] The fifth transformed coordinate information DP**6** is information indicating coordinates obtained by transforming the plurality of fifth coordinates indicated by the fifth coordinate information DP**5** into three-dimensional coordinates.

[0048] The first marker coordinate information DP**8** is information indicating three-dimensional coordinates of a marker MK, described later, at a first timing.

[0049] The second marker coordinate information DP**9** is information indicating three-dimensional coordinates of the marker MK, described later, at a second timing later than the first timing.

[0050] The first correspondence relationship information DC**1** is information indicating a first correspondence relationship in which the plurality of first coordinates indicated by the first coordinate information DP**1** and the plurality of second coordinates indicated by the second coordinate information DP**2** are associated with each other. That is, the first correspondence relationship indicated by the first correspondence relationship information DC**1** is the correspondence relationship between the coordinate system of the picked-up image GG, described later, that is acquired by the camera **20**, and the coordinate system of the display panel **15***b* of the projector **10**. The first correspondence relationship is the correspondence relationship between a plurality of first coordinates, which are coordinates of a plurality of first pixels forming the projection image G in the picked-up image GG, and a plurality of second coordinates, which are coordinates of a plurality of second pixels forming the drawn image. Hereinafter, the first correspondence relationship indicated by the first correspondence relationship information DC**1** may be simply referred to as a "first correspondence relationship".

[0051] The second correspondence relationship information DC**2** is information indicating a second correspondence relationship in which the second internal parameter, which is the internal parameter of the optical system **15***c*, and the state of the optical system **15***c* are associated with each other. The second correspondence relationship information DC**2** includes information indicating the second correspondence relationship for each temperature of the optical system **15***c*. Hereinafter, the second correspondence relationship indicated by the second correspondence relationship information DC**2** may be simply referred to as a "second correspondence relationship". The second correspondence relationship information DC**2** is acquired using a result of calculating the second correspondence relationship by an experiment or the like, and is stored in the storage device **11** in advance.

[0052] The third correspondence relationship information DC**3** is information indicating a third correspondence relationship in which the plurality of first coordinates indicated by the first coordinate information DP**1** and the plurality of third coordinates indicated by the third coordinate information DP**3** are associated with each other. That is, the third correspondence relationship indicated by the third correspondence relationship information DC**3** is the correspondence relationship between the coordinate system of the picked-up image GG, described later, that is acquired by the camera **20**, and the three-dimensional coordinate system.

Hereinafter, the third correspondence relationship indicated by the third correspondence relationship information DC**3** may be simply referred to as a "third correspondence relationship".

[0053] The correction information DC**0** is information indicating a correspondence relationship in which the plurality of second coordinates indicated by the second coordinate information DP**2** and the plurality of third coordinates indicated by the third coordinate information DP**3** are associated with each other. That is, the correspondence relationship indicated by the correction information DC**0** is the correspondence relationship between the three-dimensional coordinate system and the coordinate system of the display panel **15***b* of the projector **10**.

[0054] The processing device **12** is a processing device having a function of controlling each part of the projector **10** and a function of processing various kinds of data. For example, the processing device **12** includes a processor such as a central processing unit (CPU). The processing device **12** may be configured with a single processor or may be configured with a plurality of processors. A part or all of the functions of the processing device **12** may be implemented by hardware such as a digital signal processor (DSP), an application-specific integrated circuit (ASIC), a programmable logic device (PLD), or a field-programmable gate array (FPGA). The processing device **12** may be integrated with at least a part of the image processing circuit **14**.

[0055] The communication device **13** is a communication device that can communicate with various devices, and acquires the video data IMG from the terminal device **30** and communicates with the camera **20**. For example, the communication device **13** is a wired communication device such as a wired local area network (LAN), a universal serial bus (USB), and a high-definition multimedia interface (HDMI), or a wireless communication device such as a low power wide area (LPWA), wireless LAN including Wi-Fi, and a Bluetooth device. Each of "HDMI", "Wi-Fi", and "Bluetooth" is a registered trademark.

[0056] The image processing circuit **14** is a circuit that performs necessary processing on the image data IMG from the communication device **13** and inputs the data to the optical device **15**. The image processing circuit **14** has, for example, a frame memory, not illustrated, loads the image data IMG in the frame memory, executes various kinds of processing such as resolution conversion processing, resizing processing, and distortion correction processing, as appropriate, and inputs the data to the optical device **15**. The above-described correction information DC**0** is used in the various kinds of processing as appropriate. The image processing circuit **14** may execute processing such as on-screen display (OSD) processing of generating image information for showing a menu, operation guidance, or the like, and combining the information with the image data IMG, according to need.

[0057] The optical device **15** is a device that projects image light on the projection surface SC. The optical device **15** includes a light source **15***a*, the display panel **15***b*, and the optical system **15***c*.

[0058] The light source **15***a* includes, for example, light sources such as halogen lamps, xenon lamps, ultra-high-pressure mercury lamps, light-emitting diodes (LEDs), or laser light sources, which respectively emit red, green, and blue lights. The display panel **15***b* is a light modulator including three light modulation elements provided corresponding to red, green, and blue. The light modulation elements include, for example, transmissive liquid crystal panels, reflective liquid crystal panels, or digital mirror devices (DMDs) or the like, and modulate corresponding color lights to generate image lights of the respective colors. The image lights of the respective colors generated by the display panel **15***b* are combined together by a light combining system into a full-color image light. The optical system **15***c* is a projection system including a projection lens or the like that forms an image of the full-color image light from the display panel **15***b* and projects the image on the projection surface SC.

[0059] The operation device **16** is an device that accepts an operation from the user. For example, the operation device **16** includes an operation panel and a remote control light receiver, not illustrated. The operation panel is provided in an exterior casing of the projector **10** and outputs a signal based on an operation by the user. The remote control light receiver receives an infrared signal from a remote controller, not illustrated, decodes the infrared signal, and outputs a signal based on the operation of the remote controller. The operation device **16** is provided according to need and may be omitted.

[0060] In the above-described projector **10**, the processing device **12** executes the program PR**1** stored in the storage device **11** and thus functions as a projection controller **12***a*, an image pickup controller **12***b*, and a corrector **12***c*. Therefore, the processing device **12** includes the projection controller **12***a*, the image pickup controller **12***b*, and the corrector **12***c*.

[0061] The projection controller **12***a* controls operations of the image processing circuit **14** and the optical device **15**. More specifically, the projection controller **12***a* controls the operation of the optical device **15** to project the projection image G onto the projection surface SC.

[0062] The image pickup controller **12***b* controls operations of the camera **20**. More specifically, the image pickup controller **12***b* causes the camera **20** to pick up the projection image G projected on the projection surface SC, thus acquires the image pickup data D**1**, and stores the acquired image pickup data D**1** in the storage device **11**.

[0063] The corrector **12***c* performs a correction to adjust the shape of the projection image G.

[0064] More specifically, the corrector **12***c* generates the first coordinate information DP**1** and the second coordinate information DP**2**, based on the image pickup data D**1**, generates the first correspondence relationship information DC**1**, based on the first coordinate information DP**1** and the second coordinate information DP**2**, and stores the generated first correspondence relationship information DC**1** in the storage device **11**.

[0065] The corrector **12***c* acquires the state information D**2**, generates the second internal parameter information PC**2**, based on the second correspondence relationship information DC**2** and the state information D**2**, and stores the generated second internal parameter information PC**2** in the storage device **11**. For example, the corrector **12***c* monitors, for example, the state of the optical characteristics such as the optical distortion, the amount of lens shift, and the projection range (throw ratio) of the optical system **15***c*, and updates the state information D**2** when the state is changed. When information related to the state information D**2** is stored in the storage device **11** separately from the state information D**2** or in another storage device **11**, or when a

sensor for detecting the state of the optical system **15***c* is provided, the corrector **12***c* may update the state information D**2** at the time of execution of step S**104**, described later.

[0066] Also, the corrector **12***c* generates the external parameter information PC**3**, based on the first internal parameter information PC**1**, the first correspondence relationship information DC**1**, and the second internal parameter information PC**2**, and causes the storage device **11** to store the generated external parameter information PC**3**. The corrector **12***c* estimates the external parameter, using the second correspondence relationship corresponding to the temperature of the optical system **15***c*.

[0067] Also, the corrector **12***c* generates the third coordinate information DP**3**, based on the first internal parameter information PC**1**, the second internal parameter information PC**2**, the first correspondence relationship information DC**1**, and the external parameter information PC**3**, and causes the storage device **11** to store the generated third coordinate information DP**3**.

[0068] Moreover, the corrector **12***c* generates the third correspondence relationship information DC**3**, based on the first coordinate information DP**1** and the third coordinate information DP**3**, and causes the storage device **11** to store the generated third correspondence relationship information DC**3**.

[0069] Also, the corrector **12***c* generates the correction information DC**0**, based on the first correspondence relationship information DC**1** and the third correspondence relationship information DC**3**, and causes the storage device **11** to store the generated correction information DC**0**.

[0070] Moreover, when the optical system **15***c* of the projector **10** is adjusted, the corrector **12***c* updates one or both of the second internal parameter information PC**2** and the external parameter information PC**3**, based on the result of capturing, with the camera **20**, the projection image G projected after the optical system **15***c* is adjusted.

[0071] Also, the corrector **12***c* generates the fifth coordinate information DP**5**, based on the plurality of reference points PR, described later, in the projection image G, and causes the storage device **11** to store the generated fifth coordinate information DP**5**.

[0072] Moreover, the corrector **12***c* transforms the fifth coordinate information DP**5**, using the correction information DC**0**, thus generates the fifth transformed coordinate information DP**6**, and causes the storage device **11** to store the generated fifth transformed coordinate information DP**6**.

[0073] Also, the corrector **12***c* generates the first marker coordinate information DP**8**, based on the fifth coordinate information DP**5** and the third correspondence relationship information DC**3**, and causes the storage device **11** to store the generated first marker coordinate information DP**8**.

[0074] Moreover, the corrector **12***c* generates the second marker coordinate information DP**9**, based on the fifth transformed coordinate information DP**6** and the third correspondence relationship information DC**3**, and causes the storage device **11** to store the generated second marker coordinate information DP**9**.

[0075] The corrector **12***c* adjusts the projection image G, based on the first marker coordinate information DP**8**, the second marker coordinate information DP**9**, the fifth transformed coordinate information DP**6**, the second internal parameter information PC**2**, and the external parameter information PC**3**. The corrector **12***c* generates the fifth coordinate information DP**5**, based on the result of accepting, from the user, an operation of moving the plurality of reference points PR, described later, in order to adjust the shape of the projection image G.

1-3. Control Method

[0076] FIG. **3** is a flowchart showing the flow of the projection method according to the first embodiment. The projection method is performed by the processing device **12**, which is an example of a "computer", executing the program PR**1** using the system **100** including the projector **10** and the camera **20** described above. As shown in FIG. **3**, the projection method includes steps S**100** to S**500**.

[0077] Specifically, first, in step S**100**, the shape of the projection surface SC is measured. Details of step S**100** will be described later with reference to FIGS. **4** to **6**.

[0078] After step S**100**, the projection image G is adjusted in step S**200**. By this adjustment, the fifth coordinate information DP**5**, the fifth transformed coordinate information DP**6**, and the first marker coordinate information DP**8** are acquired. Details of the acquisition will be described later with reference to FIGS. **7** to **9**.

[0079] Then, in step S**300**, whether the projection image G needs to be readjusted is determined. For example, when the amount of change in the positional relationship of the projector **10** in relation to the projection surface SC is equal to or greater than a predetermined amount, it is determined that the projection image G needs to be readjusted. It may be determined that the projection image G needs to be readjusted, based on an instruction from the user, or it may be determined that the projection image G needs to be readjusted, based on an output of a sensor or the like that detects the amount of change in the positional relationship of the projector **10** in relation to the projection surface SC.

[0080] Step S**300** is repeated until it is determined that the projection image G needs to be readjusted (NO in step S**300**), and when it is determined that the projection image G needs to be readjusted (YES in step S**300**), in step S**400**, the projection image G is readjusted and the projection state of the projection image G in relation to the projection surface SC is thus restored from the state at the second timing to the state at the first timing. Details of this restoration will be described below with reference to FIGS. **10** to **13**.

[0081] After step S**400**, whether an instruction to end is given is determined in step S**500**. This determination is made, for example, based on whether an instruction to end based on an operation from the user is given.

[0082] When an instruction to end is not given (NO in step S**500**), the foregoing step S**300** is executed. Thus, the foregoing steps S**300** and S**400** are repeated until an instruction to end is given. Meanwhile, when an instruction to end is given (YES in step S**500**), the processing is ended.

[0083] FIG. **4** is a flowchart showing the flow of the measurement of the shape of the projection surface SC in the first embodiment. Step S**100** shown in FIG. **3** includes steps S**101** to S**109** as shown in FIG. **4**.

[0084] Specifically, in step S**101**, the projection image G is projected from the projector **10** onto the projection surface SC. This projection is performed by the projection controller **12***a* controlling the operation of the projector **10**.

[0085] In step S**102**, the projection image G is picked up by the camera **20** and the picked-up image GG, described later, is thus acquired. The acquisition is performed by the image pickup controller **12***b* controlling the operation of the

camera **20**. The acquired picked-up image GG is stored in the storage device **11** as the image pickup data D**1**.

[0086] In step S**103**, the first correspondence relationship is generated. This generation is performed by the corrector **12***c* associating the plurality of first coordinates, which are the coordinates of the plurality of first pixels forming the projection image G in the picked-up image GG, described later, with the plurality of second coordinates, which are the coordinates of the plurality of second pixels forming the projection image G on the display panel **15***b* of the projector **10**. The generated first correspondence relationship is stored in the storage device **11** as the first correspondence relationship information DC**1**.

[0087] In step S**104**, the state information D**2** is acquired. This acquisition is performed by the corrector **12***c* detecting the state of the optical system **15***c*. The acquired state information D**2** is stored in the storage device **11**.

[0088] In step S**105**, the second internal parameter is estimated. This estimation is performed by the corrector **12***c*, based on the second correspondence relationship and the state information D**2**. The estimated second internal parameter is stored in the storage device **11** as the second internal parameter information PC**2**.

[0089] In step S**106**, the external parameter indicating one or both of the position and the attitude of the projector **10** in relation to the camera **20** is estimated. This estimation is performed by the corrector **12***c*, based on the first internal parameter, the first correspondence relationship, and the second internal parameter. The estimated external parameter is stored in the storage device **11** as the external parameter information PC**3**.

[0090] In step S**107**, a plurality of third coordinates, which are three-dimensional coordinates of the projection image G in the projection surface SC, are calculated. The plurality of third coordinates are calculated by the corrector **12***c*, based on the first internal parameter, the second internal parameter, the first correspondence relationship, and the external parameter. The plurality of third coordinates, thus calculated, are stored in the storage device **11** as the third coordinate information DP**3**.

[0091] In step S**108**, the third correspondence relationship is generated. This generation is performed by the corrector **12***c* associating the plurality of first coordinates with the plurality of third coordinates. The generated third correspondence relationship is stored in the storage device **11** as the third correspondence relationship information DC**3**.

[0092] In step S**109**, a correspondence relationship in which the plurality of second coordinates indicated by the second coordinate information DP**2** and the plurality of third coordinates indicated by the third coordinate information DP**3** are associated is generated. This generation is performed by the corrector **12***c*, based on the first correspondence relationship indicated by the first correspondence relationship information DC**1** and the third correspondence relationship indicated by the third correspondence relationship information DC**3**. The generated correspondence relationship is stored in the storage device **11** as the correction information DC**0**.

[0093] Steps S**101** to S**110** in the above overview will now be described in detail with reference to FIGS. **5** and **6**.

[0094] FIG. **5** is a diagram illustrating the relationship between the coordinates of the projection image G on the display panel **15***b* and the coordinates in the picked-up image GG. FIG. **5** illustrates the correspondence relationship between a first pixel P**1**, which is a pixel of the picked-up image GG indicated by the image pickup data D**1**, and a second pixel P**0**, which is a pixel on the display panel **15***b* displaying the projection image G.

[0095] In step S**101**, the projection image G is projected onto the projection surface SC. At this time, as illustrated at the top of FIG. **5**, the projection image G is displayed on the display panel **15***b*. In the example illustrated in FIG. **5**, the projection image G is an image in which a plurality of alphabets are arrayed. The projection image G is an image for detecting the correspondence of the first pixel P**1** in relation to the second pixel P**0** and is not limited to the example illustrated in FIG. **5** and may be a phase shift pattern, a gray code pattern, a pattern image, or the like.

[0096] In step S**102**, the camera **20** picks up the projection image G projected onto the projection surface SC, and the picked-up image GG represented by the image pickup data D**1** is thus acquired, as illustrated at the bottom of FIG. **5**. In the picked-up image GG, a plurality of markers MK, described later, are captured in addition to the projection surface SC and the projection image G.

[0097] In step S**103**, first, the first coordinate information DP**1** is generated, based on are plurality of first coordinates, which are the coordinates of a plurality of first pixels P**1** in the coordinate system of the picked-up image GG, and the second coordinate information DP**2** is generated, based on a plurality of second coordinates, which are the coordinates of a plurality of second pixels on the display panel **15***b*. In step S**103**, based on the first coordinate information DP**1** and the second coordinate information DP**2**, the first correspondence relationship information indicating the first correspondence relationship in which the plurality of first coordinates and the plurality of second coordinates are associated with each other is generated.

[0098] The plurality of first pixels P**1** and the plurality of second pixels P**0** correspond to each other. Such a correspondence between the plurality of first pixels P**1** and the plurality of second pixels P**0** is detected by a known measurement method. In FIG. **5**, for the sake of convenience of description, one first pixel P**1** and one second pixel P**0** are illustrated.

[0099] In step S**104**, the corrector **12***c* reads and acquires the state information D**2** from the storage device **11**. In step S**105**, the corrector **12***c* estimates the second internal parameter indicated by the second internal parameter information PC**2**, based on the second correspondence relationship indicated by the second correspondence relationship information DC**2** and the state information D**2**.

[0100] FIG. **6** is a diagram illustrating an example of the second correspondence relationship indicated by the second correspondence relationship information DC**2**. In the example illustrated in FIG. **6**, the second correspondence relationship information DC**2** includes information DC**2***a*, DC**2***b*, and DC**2***c*.

[0101] As shown on the left side in FIG. **6**, the information DC**2***a* is information indicating the relationship between the amount of lens shift in the lateral direction of the optical system **15***c* and the position of the lens center. Therefore, based on the amount of lens shift in the lateral direction indicated by the state information D**2** and the relationship indicated by the information DC**2***a*, the position of the lens center in the lateral direction of the optical system **15***c* can be estimated.

[0102] As shown at the center in FIG. **6**, the information DC**2***b* is information indicating the relationship between the amount of lens shift in the longitudinal direction of the optical system **15***c* and the position of the lens center. Therefore, based on the amount of lens shift in the longitudinal direction indicated by the state information D**2** and the relationship indicated by the information DC**2***b*, the position of the lens center in the longitudinal direction of the optical system **15***c* can be estimated.

[0103] As shown on the right side of FIG. **6**, the information DC**2***c* is information indicating the relationship between the amount of optical zoom and the focal length of the optical system **15***c*. Therefore, based on with the amount of optical zoon indicated by the state information D**2** and the relationship indicated by the information DC**2***c*, the focal length of the optical system **15***c* can be estimated.

[0104] The optical characteristics of the optical system **15***c* vary depending on the temperature of the optical system **15***c*. For example, a plurality of information DC**2***a*, DC**2***b*, and DC**2***c* may be provided for each predetermined temperature range. When a plurality of sets of information DC**2***a*, DC**2***b*, and DC**2***c* are provided for each predetermined temperature range, the corrector **12***c* selects and uses one set of information DC**2***a*, DC**2***b*, and DC**2***c* from the plurality of sets of information DC**2***a*, DC**2***b*, and DC**2***c*, based on the result of detection by a temperature sensor, not illustrated.

[0105] The information DC**2***a*, DC**2***b*, and DC**2***c* may be in the form of a function such as a linear function, or may be in the form of a lookup table. The information DC**2***a*, DC**2***b*, and DC**2***c* are not limited to the example illustrated in FIG. **6**, and may include, for example, information about optical distortion.

[0106] As described above, in step S**105**, the second internal parameter indicated by the second internal parameter information PC**2** is estimated, using the state information D**2**. The final result of estimation in step S**105** may be the result of estimating the second internal parameter, using the state information D**2**, or may be a value optimized by processing such as reprojection error minimization using the estimated value as an initial value.

[0107] In step S**106**, the external parameter indicating one or both of the position and the attitude of the projector **10** in relation to the camera **20** is estimated, based on the first internal parameter, the first correspondence relationship, and the second internal parameter, using the coordinate system of the picked-up image GG, described later, that is acquired from the camera **20**, as reference coordinates. For this estimation, a known technique such as a five-point algorithm such as OpenCV is used. The position is represented by, for example, a three-dimensional vector (tx, ty, tz). The attitude is represented by, for example, a three-dimensional vector (rx, ry, rz) or a 3×3 rotation matrix.

[0108] In the camera **20**, when coordinates in an image sensor are represented as (u, v) and normalized coordinates calculated by normalizing the foregoing coordinates with a focal length f of the camera are represented as (x, y), these coordinates have a relationship expressed by the following equation.

$$\begin{pmatrix} u \\ v \\ 1 \end{pmatrix} = \begin{pmatrix} f & 0 & c_u \\ 0 & f & c_v \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} x \\ y \\ 1 \end{pmatrix} = A \begin{pmatrix} x \\ y \\ 1 \end{pmatrix}$$

[0109] In the above equation, (c_u, c_v) is an optical center coordinates of the camera. The internal parameter of the camera **20** is represented by an internal parameter matrix A, which is the product of the optical center coordinates (c_u, c_v) and the focal length f. The internal parameter of the camera **20** may be calculated by multiplying the internal parameter matrix A by another parameter such as a lens distortion coefficient.

[0110] In step S**107**, a plurality of three-dimensional coordinates on the projection surface SC are calculated by triangulation between the projection surface SC, the camera **20**, and the projector **10**, using the second internal parameter information PC**2**, the external parameter information PC**3**, and the first correspondence relationship information DC**1** that are already acquired. The plurality of third coordinates calculated by such triangulation are acquired as the third coordinate information DP**3**.

[0111] After the third coordinate information DP**3** is acquired in step S**107** in this way, in step S**108**, the third correspondence relationship information DC**3** indicating the third correspondence relationship in which the plurality of first coordinates and the plurality of third coordinates are associated with each other is generated, based on the first coordinate information DP**1** and the third coordinate information DP**3**.

[0112] After the third correspondence relationship information DC**3** is acquired in step S**108** in this way, in step S**109**, the correction information DC**0** indicating the correspondence relationship in which the plurality of second coordinates and the plurality of third coordinates are associated is generated, based on the third correspondence relationship information DC**3** and the first correspondence relationship information DC**1**.

[0113] FIG. **7** is a flowchart illustrating the flow of the adjustment of the projection image G. Step S**200** shown in FIG. **3** includes steps S**201** to S**204** as shown in FIG. **7**.

[0114] Specifically, in step S**200**, first, in step S**201**, whether an operation on the plurality of reference points PR, described later, in the projection image G is performed is determined. This determination is performed by the corrector **12***c*, based on whether an operation by the user for moving the plurality of reference points PR is accepted. When the operation is accepted, it is determined that an operation on the plurality of reference points PR in the projection image G is performed. In this way, in step S**201**, the operation of moving the plurality of reference points PR in order to adjust the shape of the projection image G is accepted from the user.

[0115] Step S**201** is repeated until the operation on the plurality of reference points PR in the projection image G is performed (NO in step S**201**) and, when the operation on the plurality of reference points PR in the projection image G is performed (YES in step S**201**), in step S**202**, a plurality of fifth coordinates, which are the coordinates of the plurality of reference points PR on the display panel **15***b*, are specified. The plurality of fifth coordinates are stored in the storage device **11** as the fifth coordinate information DP**5**. In this way, in step S**202**, the plurality of fifth coordinates are

specified after the operation of moving the plurality of reference points PR in order to adjust the shape of the projection image G.

[0116] After step S**202**, in step S**203**, the plurality of fifth coordinates indicated by the fifth coordinate information DP**5** are transformed into three-dimensional coordinates. This transformation is performed by the corrector **12***c* using the correspondence relationship indicated by the correction information DC**0**. By this conversion, the fifth transformed coordinate information DP**6** is generated and the generated fifth transformed coordinate information DP**6** is stored in the storage device **11**.

[0117] After step S**203**, in step S**204**, three-dimensional coordinates of the marker MK, described later, that is set on the projection surface SC are acquired. This acquisition is performed by transforming the coordinates of the marker MK in the picked-up image GG into three-dimensional coordinates, using the third correspondence relationship indicated by the third correspondence relationship information DC**3**. The acquired third three-dimensional coordinate is stored in the storage device **11** as the first marker coordinate information DP**8**.

[0118] Steps S**201** to S**204** in the above overview will now be described in detail with reference to FIGS. **8** and **9**.

[0119] FIG. **8** is a diagram illustrating the plurality of reference points PR on the display panel **15***b* of the projection image G. FIG. **8** illustrates a form in which the plurality of reference points PR are arranged in a grid pattern on the display panel **15***b*. In the example illustrated in FIG. **8**, the plurality of reference points PR include a plurality of reference points PR arranged along a part corresponding to the outer edge of the projection surface SC on the display panel **15***b*. The arrangement and the number of the reference points PR on the display panel **15***b* are not limited to the example illustrated in FIG. **8** and may be freely set.

[0120] Each reference point PR can be moved by an operation by the user according to need. When two or more reference points PR selected by the user from among the plurality of reference points PR are moved, as the interval between the plurality of reference points PR changes, a part corresponding to the interval, of the projection image G, is deformed. Thus, the shape of the projection image G can be adjusted to fit the shape of the projection surface SC.

[0121] In step S**201**, whether such an operation is performed is determined. After step S**201**, in step S**202**, the fifth coordinate information DP**5** indicating the plurality of fifth coordinates, which are the coordinates of the plurality of reference points PR on the display panel **15***b*, is acquired.

[0122] After step S**202**, in step S**203**, the fifth coordinate information DP**5** is transformed, using the correspondence relationship indicated by the correction information DC**0**, and the fifth transformed coordinate information DP**6** is thus generated.

[0123] FIG. **9** is a diagram illustrating the three-dimensional coordinates of the marker MK at the first timing. FIG. **9** illustrates the plurality of reference points PR explained above and a plurality of markers MK detected based on the picked-up image GG in a three-dimensional coordinate system set in a real space where the projection surface SC is installed or in a virtual three-dimensional space corresponding to the real space.

[0124] The plurality of markers MK are marks set at any positions on the projection surface SC. The shape, the position, and the number of the markers MK on the projection surface SC are not limited to the example illustrated in FIG. **9** and may be freely set. However, when the shape of the markers MK is not a shape that enables the determination of the attitude of the projection surface SC, the markers MK are set at any three or more positions on the projection surface SC.

[0125] In step S**204**, after the coordinates of the marker MK in the picked-up image GG are detected using a known technique such as a phase shift method or an image recognition technique, the coordinates are transformed using the third correspondence relationship information DC**3**, and the first marker coordinate information DP**8** indicating the three-dimensional coordinates of the marker MK at the first timing is thus generated.

[0126] FIG. **10** is a flowchart illustrating the flow of the restoration. Step S**400** show in FIG. **3** includes steps S**401** to S**405** as shown in FIG. **10**.

[0127] Specifically, first, in step S**401**, whether an adjustment of the optical system **15***c* is performed is determined. This determination is performed by the corrector **12***c*, based on whether an adjustment such as a lens shift of the optical system **15***c* is performed. When an adjustment such as a lens shift of the optical system **15***c* is performed, it is determined that an adjustment of the optical system **15***c* is performed.

[0128] When the adjustment of the optical system **15***c* is performed (YES in step S**401**), the second internal parameter indicated by the second internal parameter information PC**2** is updated in step S**402**. This update is performed by executing the foregoing step S**105** again, using the result of capturing, with the camera **20**, the projection image G projected after the adjustment of the optical system **15***c*. Thus, when the optical system **15***c* of the projector **10** is adjusted, the second internal parameter indicated by the second internal parameter information PC**2** is updated, based on the result of capturing, with the camera **20**, the projection image G projected after the adjustment of the optical system **15***c*. The updated second internal parameter is stored in the storage device **11** as the second internal parameter information PC**2**.

[0129] After step S**402**, the external parameter indicated by the external parameter information PC**3** is updated. This update is performed by executing the foregoing step S**106** again, using the result of capturing, the camera **20**, the projection image G projected after the adjustment of the optical system **15***c*. Thus, when the optical system **15***c* of the projector **10** is adjusted, the external parameter indicated by the external parameter information PC**3** is updated, based on the result of capturing, with the camera **20**, the projection image G projected after the adjustment of the optical system **15***c*. The updated external parameter is stored in the storage device **11** as the external parameter information PC**3**.

[0130] After step S**403** or when the adjustment of the optical system **15***c* is not performed (NO in step S**401**), in step S**404**, the three-dimensional coordinates of the marker MK at the second timing later than the first timing are acquired. This acquisition is performed by the corrector **12***c* performing processing similar to the foregoing step S**204**, based on a picked-up image formed by picking up an image of the projection surface SC with the camera **20** again. The acquired three-dimensional coordinates are stored in the storage device **11** as the second marker coordinate information DP**9**.

[0131] After step S**404**, the projection image G is adjusted in step S**405**. This adjustment is performed by the corrector

12*c*, based on the three-dimensional coordinates of the marker MK at the first timing, the three-dimensional coordinates of the marker MK at the second timing, the coordinates formed by transforming the plurality of fifth coordinates indicated by the fifth coordinate information DP**5** into the three-dimensional coordinates, the first internal parameter indicated by the first internal parameter information PC**1**, the second internal parameter indicated by the second internal parameter information PC**2**, and the external parameter indicated by the external parameter information PC**3**.

[0132] Step S**405**, of the above steps S**401** to S**405**, will now be described in detail with reference to FIGS. **11** to **13**.

[0133] FIG. **11** is a diagram illustrating the three-dimensional coordinates of the marker MK at the second timing. FIG. **11** illustrates a plurality of markers MK detected based on the result of image pickup in step S**404** in a three-dimensional coordinate system set in a real space where the projection surface SC is installed or a virtual three-dimensional space corresponding to the real space.

[0134] FIG. **12** is a diagram illustrating the three-dimensional coordinates of the marker MK at the first timing and the second timing. In FIG. **12**, in a three-dimensional coordinate system set in a real space where the projection surface SC is installed or a virtual three-dimensional space corresponding to the real space, a plurality of markers MK detected based on the picked-up image GG are indicated as markers MK-**1** and a plurality of markers MK detected based on the result of image pickup in step S**404** are indicated as markers MK-**2**.

[0135] In step S**405**, first, a function F representing a change in the position and the attitude of the projection surface SC from the first timing to the second timing is calculated, based on the coordinates of the plurality of markers MK-**1** and the coordinates of the plurality of markers MK-**2**. The function F is a function representing three-dimensional affine transformation including three-dimensional translation, three-dimensional rotation, and scale transform.

[0136] FIG. **13** is a diagram illustrating the adjustment of the projection image G. In FIG. **13**, in a three-dimensional coordinate system set in a real space where the projection surface SC is installed or a virtual three-dimensional space corresponding to the real space, a plurality of reference points PR at the first timing are indicated as a plurality of reference points PR-**1**, and a plurality of reference points PR at the second timing are indicated as a plurality of reference points PR-**2**.

[0137] In step S**405**, as described above, after the function F representing the change in the position and the attitude of the projection surface SC from the first timing to the second timing is calculated, the transformation from the plurality of reference points PR-**1** to the plurality of reference points PR-**2** is performed by using the function F. Thus, the projection image G is adjusted.

[0138] The above-described projection method includes steps S**101** to S**106**. Thus, the external parameter is estimated, using the second internal parameter estimated based on the second correspondence relationship and the state information D**2**, and therefore a calibration plate for estimating the external parameter need not be prepared. Therefore, a projection method that can save time and effort of the user can be provided.

[0139] As described above, the projection method according to the present embodiment includes step S**107** and step S**108**. Thus, the third correspondence relationship that is necessary for various controls can be generated, using the second correspondence relationship.

[0140] Also, as described above, the external parameter is estimated, using the second correspondence relationship in accordance with the temperature of the optical system **15***c*. Thus, the external parameter can be suitably adjusted in accordance with the change in the optical characteristics due to the change in the temperature of the optical system **15***c*.

[0141] Moreover, as described above, the projection method according to the present embodiment includes steps S**402** and S**403**. Thus, the external parameter can be updated in accordance with the change in the state of the optical system **15***c* of the projector **10**.

[0142] Also, as described above, the projection method according to the present embodiment includes steps S**202** to S**204**, steps S**404** and S**405**. Thus, even when the projection image G at the second timing is displaced in relation to the projection image G at the first timing on the projection surface SC, the projection image G can be returned to the state of the projection image G at the first timing.

2. Second Embodiment

[0143] A second embodiment of the present disclosure will now be described. In the embodiment described below, elements having effects and functions similar to those in the first embodiment are denoted by the same reference numerals used in the first embodiment, and the detailed description thereof will be omitted as appropriate.

[0144] FIG. **14** is a diagram illustrating an overview of a system **100**A used for a projection method according to the second embodiment. The system **100**A has a configuration similar to the system **100** in the first embodiment except that a projector **10**A is provided instead of the projector **10** in the first embodiment.

[0145] In the present embodiment, as illustrated in FIG. **14**, the projection surface SC includes a first part R**1** that is a planar surface and a second part R**2** that is a concave curved surface. In the example illustrated in FIG. **14**, the projection surface SC is divided into the first part R**1** and the second part R**2** in the width direction. The first part R**1** is a planar surface similar to a part in the width direction of the projection surface SC in the first embodiment. The second part R**2** is a curved surface that is curved in a concave shape so as to extend toward the front in the illustration as it goes in the width direction from one end of the first part R**1** in the width direction.

[0146] FIG. **15** is a block diagram illustrating the projector **10**A used in the system **100**A according to the second embodiment. The projector **10**A has a configuration similar to the projector **10** in the first embodiment except that a program PR**2** is used instead of the program PR**1** in the first embodiment.

[0147] In the projector **10**A, the processing device **12** executes the program PR**2** stored in the storage device **11** and thus functions as the projection controller **12***a*, the image pickup controller **12***b*, and a corrector **12***d*. Therefore, the processing device **12** includes the projection controller **12***a*, the image pickup controller **12***b*, and the corrector **12***d*.

[0148] The corrector **12***d* is similar to the corrector **12***c* in the first embodiment except that, in the estimation of the external parameter, the relationship related to the second part R**2**, of the first correspondence relationship, is not used, and the relationship related to the first part R**1** is used.

[0149] FIG. **16** is a flowchart showing the flow of the measurement of the shape of the projection surface SC in the second embodiment. The projection method according to the present embodiment is similar to the projection method according to the first embodiment except that step S**106**A is provided instead of step S**106** in the first embodiment.

[0150] In step S**106**A, the external parameter is estimated. This estimation is performed by the corrector **12***d*, based on the first internal parameter, the first correspondence relationship, and the second internal parameter. However, in this estimation, the relationship relating to the second part R**2**, of the first correspondence relationship, is not used, and the relationship related to the first part R**1** is used. Thus, the external parameter can be estimated as in the first embodiment. The estimated external parameter is stored in the storage device **11** as the external parameter information PC**3**.

[0151] FIG. **17** is a diagram illustrating the measurement of the shape of the first part R**1** and the second part R**2** of the projection surface SC. FIG. **17** illustrates the picked-up image GG formed by picking up the projection image G projected on the projection surface SC having the first part R**1** and the second part R**2**.

[0152] As illustrated in FIG. **17**, each of the first part R**1** and the second part R**2** is captured in the picked-up image GG in the state of overlapping the projection image G. Therefore, as in the first embodiment, in step S**107**, a plurality of three-dimensional coordinates in the first part R**1** and the second part R**2** can be calculated by triangulation between the projection surface SC, the camera **20**, and the projector **10**A, using the second internal parameter information PC**2**, the external parameter information PC**3**, and the first correspondence relationship information DC**1** that are already acquired.

[0153] According to the above second embodiment, a projection method that can save time and effort of the user can be provided.

3. Modification Examples

[0154] The embodiments described above by way of example can be modified in various manners. Specific aspects of modifications applicable to the foregoing embodiments will be described below by way of example. Two or more aspects freely selected from the examples given below can be combined together as appropriate to the extent that no contradiction occurs.

3-1. Modified Example 1

[0155] In the foregoing embodiments, an aspect in which the processing device **12** of the projector **10**, **10**A executes the program PR**1**, PR**2** is described as an example, but the present disclosure is not limited to this aspect, and for example, a processing device of a computer communicably coupled to the projector **10**, **10**A and the camera **20** may execute the program PR**1**, PR**2**.

3-2. Modified Example 2

[0156] In the foregoing embodiments, an aspect in which the correspondence relationship indicated by the correction information DC**0** is used for the adjustment of the projection image G is described as an example, but the present disclosure is not limited to this aspect, and for example, the correspondence relationship may be used for displaying a grid-like pattern or the like having uniformity on the projection surface SC or may be used for drawing a picture on a three-dimensional shaped model of the projection surface SC viewed from the camera **20** after reflecting this model on three-dimensional image editing software or the like, for causing a PC monitor or the like to display how the picture is seen from the projector **10**, **10**A, or for causing the projector **10**, **10**A to project the picture.

4. Appendices

[0157] The present disclosure will be summarized below in the form of appendices.

[0158] (Appendix 1) According to a first aspect, which is a preferred example of the projection method according to the present disclosure, a projection method includes: projecting a drawn image drawn on a display panel of a projector onto a projection surface from the projector as a projection image; picking up the projection image with a camera having a first internal parameter and thus acquiring a picked-up image; generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the drawn image are associated with each other; acquiring state information indicating a state of an optical system of the projector; estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

[0159] According to the above aspect, the external parameter is estimated, using the second internal parameter estimated based on the second correspondence relationship and the state information, and therefore a calibration plate for estimating the external parameter need not be prepared. Therefore, a projection method that can save time and effort of the user can be provided.

[0160] (Appendix 2) According to a second aspect, which is a preferred example of the first aspect, the projection method includes: calculating a plurality of third coordinates which are three-dimensional coordinates of the projection image on the projection surface, based on the first internal parameter, the second internal parameter, the first correspondence relationship, and the external parameter; and generating a third correspondence relationship in which the plurality of first coordinates and the plurality of third coordinates are associated with each other. According to the above aspect, the third correspondence relationship necessary for various controls can be generated, using the second correspondence relationship.

[0161] (Appendix 3) According to a third aspect, which is a preferred example of the first aspect or the second aspect, the projection method further includes adjusting the external parameter in accordance with the temperature of the optical system. According to the above aspect, the external parameter can be suitably adjusted in accordance with the change in the optical characteristics due to the change in the temperature of the optical system.

[0162] (Appendix 4) According to a fourth aspect, which is a preferred example of the third aspect, the projection method includes: updating the second internal parameter when the optical system is adjusted; and updating the external parameter, based on the first internal parameter, the first correspondence relationship, and the updated second internal parameter. According to the above aspect, the external parameter can be updated in accordance with the change in the state of the optical system of the projector.

[0163] (Appendix 5) According to a fifth aspect, which is a preferred example of one of the second to fourth aspects, the projection method includes: specifying a plurality of fifth coordinates which are coordinates of a plurality of reference points of the projection image on the display panel of the projector; transforming the plurality of fifth coordinates into three-dimensional coordinates, based on a correspondence relationship in which the plurality of second coordinates and the plurality of third coordinates are associated with each other; acquiring three-dimensional coordinates of a marker at a first timing, based on the third correspondence relationship; acquiring three-dimensional coordinates of the marker at a second timing later than the first timing, based on the third correspondence relationship; and adjusting the projection image, based on the three-dimensional coordinates of the marker at the first timing, the three-dimensional coordinates of the marker at the second timing, the coordinates obtained by transforming the plurality of fifth coordinates into three-dimensional coordinates, the first internal parameter, the second internal parameter, and the external parameter. According to the above aspect, even when the projection image at the second timing is displaced in relation to the projection image at the first timing on the projection surface, the projection image can be returned to the state of the projection image at the first timing.

[0164] (Appendix 6) According to a sixth aspect, which is a preferred example of the system according to the present disclosure, a system includes a projector and a camera having a first internal parameter, and the projector executes: projecting a projection image onto a projection surface from the projector; picking up the projection image with the camera and thus acquiring a picked-up image; generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the projection image on a display panel of the projector are associated with each other; acquiring state information indicating a state of an optical system of the projector; estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

[0165] According to the above aspect, the external parameter is estimated, using the second internal parameter estimated based on the second correspondence relationship and the state information, and therefore a calibration plate for estimating the external parameter need not be prepared. Therefore, a projection method that can save time and effort of the user can be provided.

[0166] (Appendix 7) According to a seventh aspect, which is a preferred example of the program according to the present disclosure, a non-transitory computer-readable storage medium storing a program is provided, the program causing a computer to execute: projecting a projection image onto a projection surface from a projector; picking up the projection image with a camera having a first internal parameter and thus acquiring a picked-up image; generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the projection image on a display panel of the projector are associated with each other; acquiring state information indicating a state of an optical system of the projector; estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

[0167] According to the above aspect, the external parameter is estimated, using the second internal parameter estimated based on the second correspondence relationship and the state information, and therefore a calibration plate for estimating the external parameter need not be prepared. Therefore, a projection method that can save time and effort of the user can be provided.

What is claimed is:

1. A projection method comprising:

projecting a drawn image drawn on a display panel of a projector onto a projection surface from the projector as a projection image;

acquiring a picked-up image by picking up the projection image with a camera having a first internal parameter;

generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the drawn image are associated with each other;

acquiring state information indicating a state of an optical system of the projector;

estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and

estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

2. The projection method according to claim **1**, further comprising:

calculating a plurality of third coordinates which are three-dimensional coordinates of the projection image on the projection surface, based on the first internal parameter, the second internal parameter, the first correspondence relationship, and the external parameter; and

generating a third correspondence relationship in which the plurality of first coordinates and the plurality of third coordinates are associated with each other.

3. The projection method according to claim **1**, further comprising:

adjusting the external parameter in accordance with a temperature of the optical system.

4. The projection method according to claim **3**, further comprising:

updating the second internal parameter when the optical system is adjusted; and

updating the external parameter, based on the first internal parameter, the first correspondence relationship, and the updated second internal parameter.

5. The projection method according to claim **2**, further comprising:

specifying a plurality of fifth coordinates which are coordinates of a plurality of reference points of the projection image on the display panel;

transforming the plurality of fifth coordinates into three-dimensional coordinates, based on a correspondence relationship in which the plurality of second coordinates and the plurality of third coordinates are associated with each other;

acquiring three-dimensional coordinates of a marker at a first timing, based on the third correspondence relationship;

acquiring three-dimensional coordinates of the marker at a second timing later than the first timing, based on the third correspondence relationship; and

adjusting the projection image, based on the three-dimensional coordinates of the marker at the first timing, the three-dimensional coordinates of the marker at the second timing, the coordinates obtained by transforming the plurality of fifth coordinates into three-dimensional coordinates, the first internal parameter, the second internal parameter, and the external parameter.

6. A system comprising:

a projector; and

a camera having a first internal parameter,

the projector executing:

projecting a projection image onto a projection surface from the projector;

acquiring a picked-up image by picking up the projection image with the camera;

generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the projection image on a display panel of the projector are associated with each other;

acquiring state information indicating a state of an optical system of the projector;

estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and

estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

7. A non-transitory computer-readable storage medium storing a program, the program causing a computer to execute:

projecting a projection image onto a projection surface from a projector;

acquiring a picked-up image by picking up the projection image with a camera having a first internal parameter;

generating a first correspondence relationship in which a plurality of first coordinates which are coordinates of a plurality of first pixels forming the projection image in the picked-up image and a plurality of second coordinates which are coordinates of a plurality of second pixels forming the projection image on a display panel of the projector are associated with each other;

acquiring state information indicating a state of an optical system of the projector;

estimating a second internal parameter which is an internal parameter of the optical system, based on a second correspondence relationship in which the second internal parameter and the state of the optical system are associated with each other, and the state information; and

estimating an external parameter indicating one or both of a position and an attitude of the projector in relation to the camera, based on the first internal parameter, the first correspondence relationship, and the second internal parameter.

* * * * *