US 20250265881A1

(19) **United States**

(12) **Patent Application Publication**

Turiello

(10) **Pub. No.: US 2025/0265881 A1**

(43) **Pub. Date: Aug. 21, 2025**

(54) **METHOD AND SYSTEM OF SENSOR-BASED SMART UNLOCKING OF A FIREFIGHTER AIR REPLENISHMENT SYSTEM**

(71) Applicant: **Rescue Air Systems, Inc.**, San Carlos, CA (US)

(72) Inventor: **Anthony J. Turiello**, Redwood City, CA (US)

(73) Assignee: **Rescue Air Systems, Inc.**, San Carlos, CA (US)

(21) Appl. No.: **19/187,572**

(22) Filed: **Apr. 23, 2025**

Related U.S. Application Data

(63) Continuation of application No. 18/103,498, filed on Jan. 31, 2023, now Pat. No. 12,315,317.

(60) Provisional application No. 63/356,996, filed on Jun. 29, 2022, provisional application No. 63/357,145, filed on Jun. 30, 2022.

Publication Classification

(51) **Int. Cl.**

G07C 9/00	(2020.01)
A62B 7/02	(2006.01)
A62B 9/00	(2006.01)

(52) **U.S. Cl.**

CPC ***G07C 9/00896*** (2013.01); ***A62B 7/02*** (2013.01); ***A62B 9/006*** (2013.01)

(57) **ABSTRACT**

Disclosed are methods and a system of sensor-based smart unlocking of a firefighter air replenishment system. A safety system of an occupiable structure includes a breathable-air supply system to facilitate delivery of breathable air from a source of compressed air, and a fill station in a fire-rated evacuation area of the occupiable structure to supply the breathable air to an emergency personnel. The safety system also includes a smart lock associated with the breathable-air supply system to automatically unlock one or more location (s) of the breathable-air supply system usable by the emergency personnel to access the breathable air during an emergency state of the occupiable structure, and a sensor associated with the breathable-air supply system to detect the emergency state of the occupiable structure.

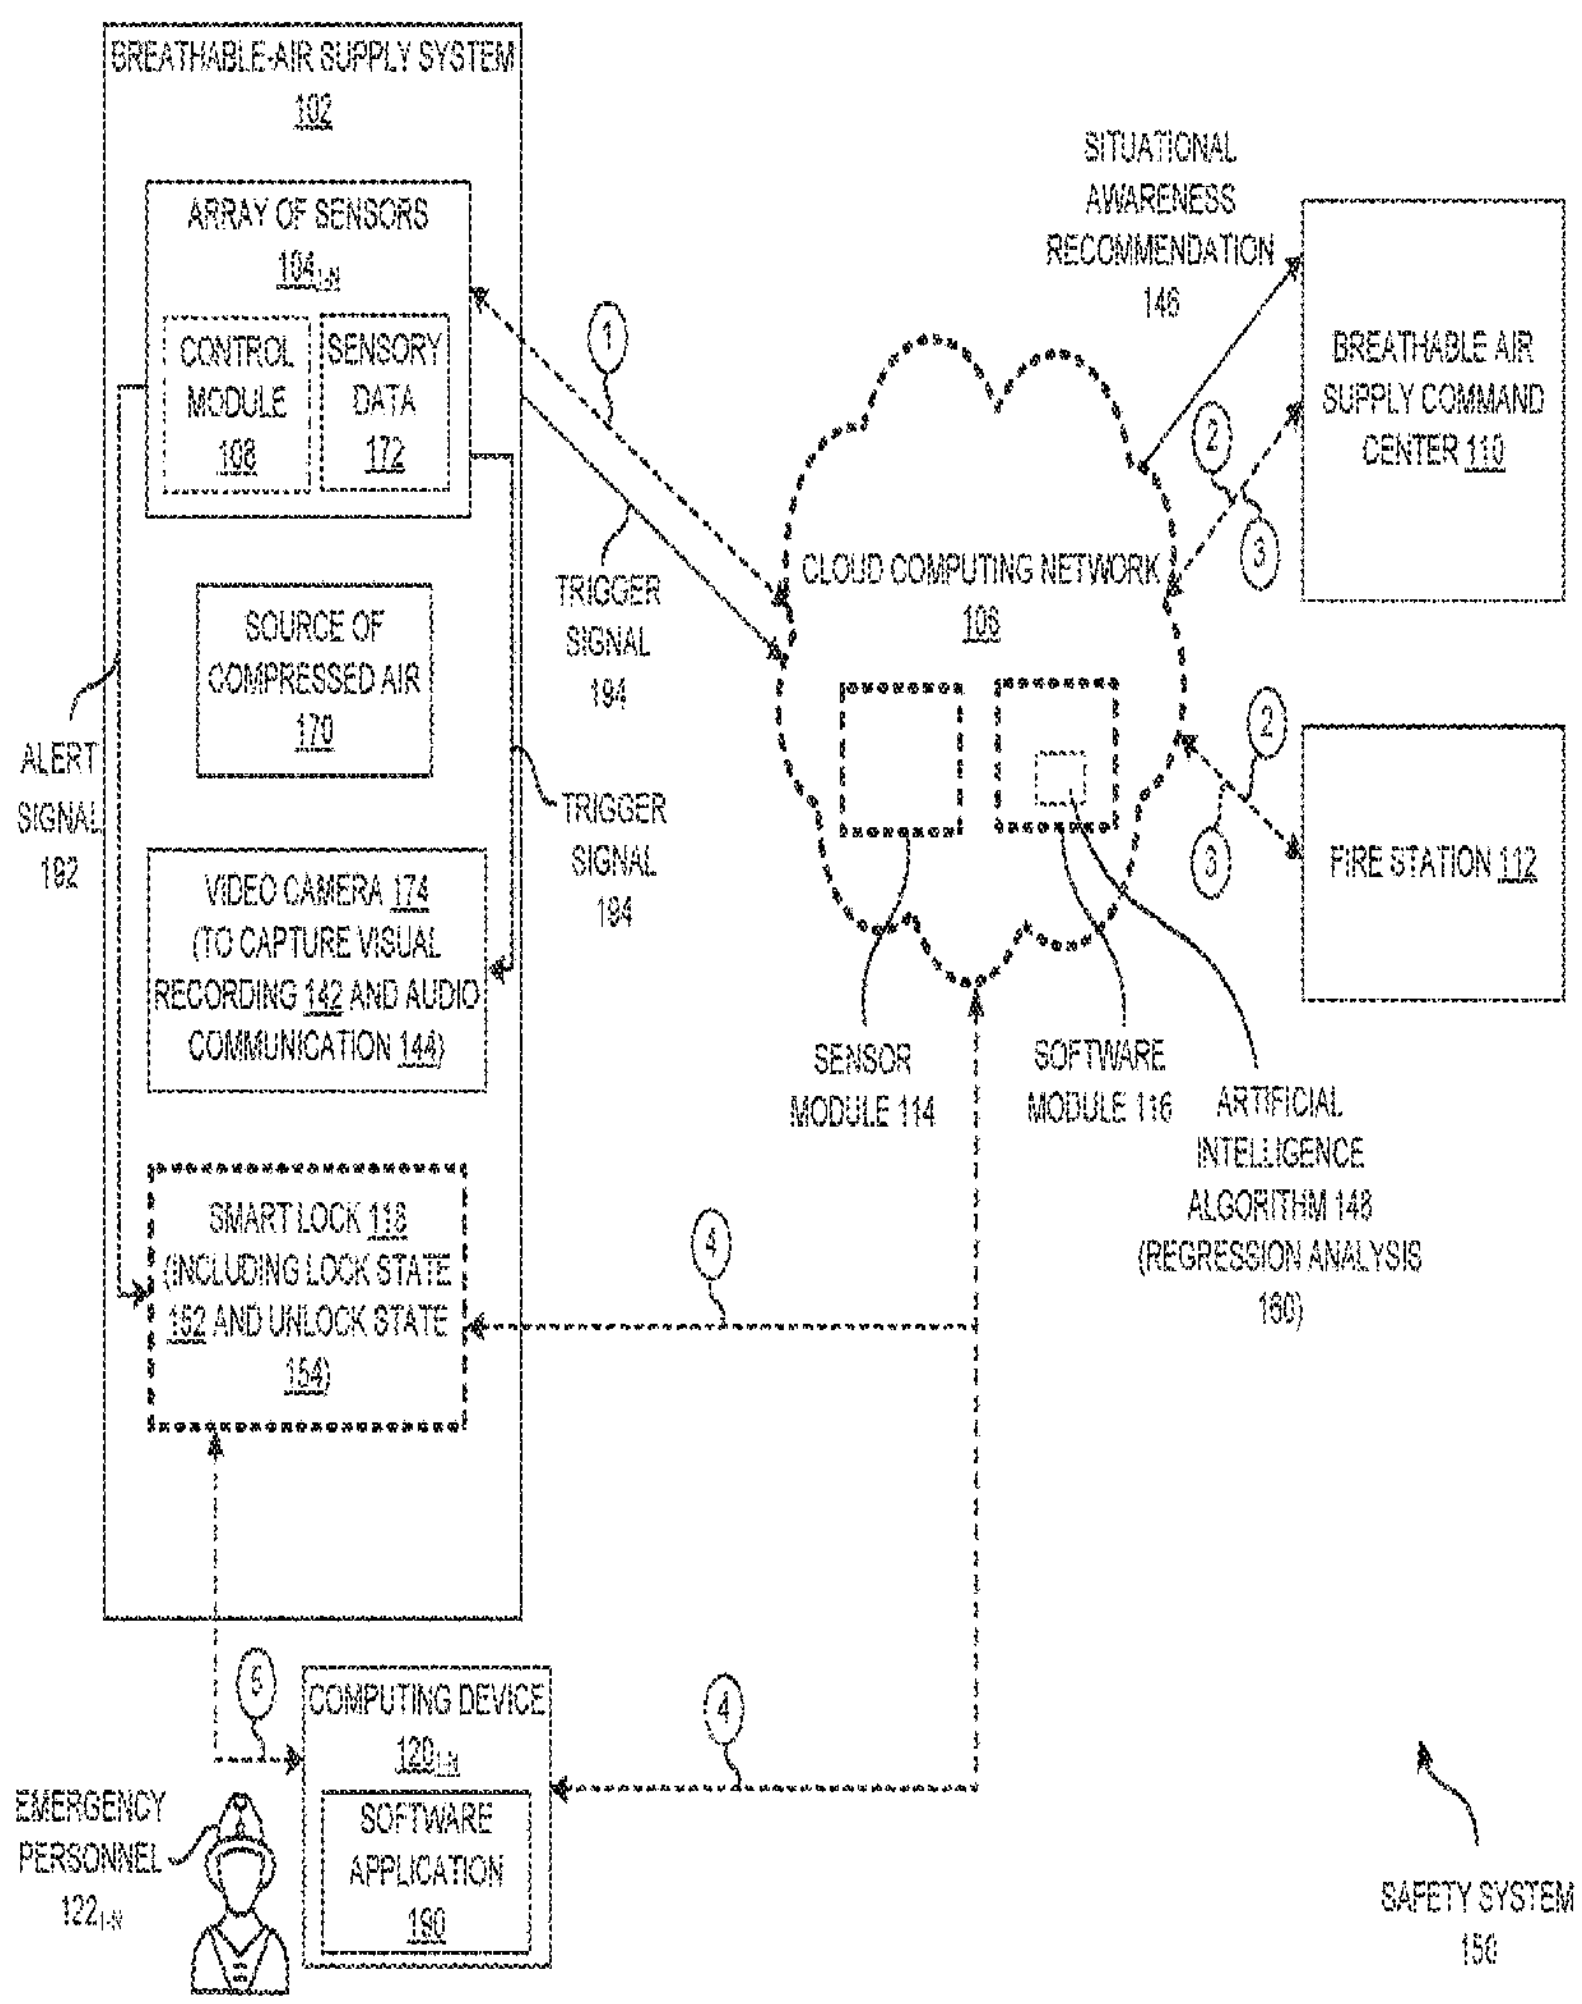

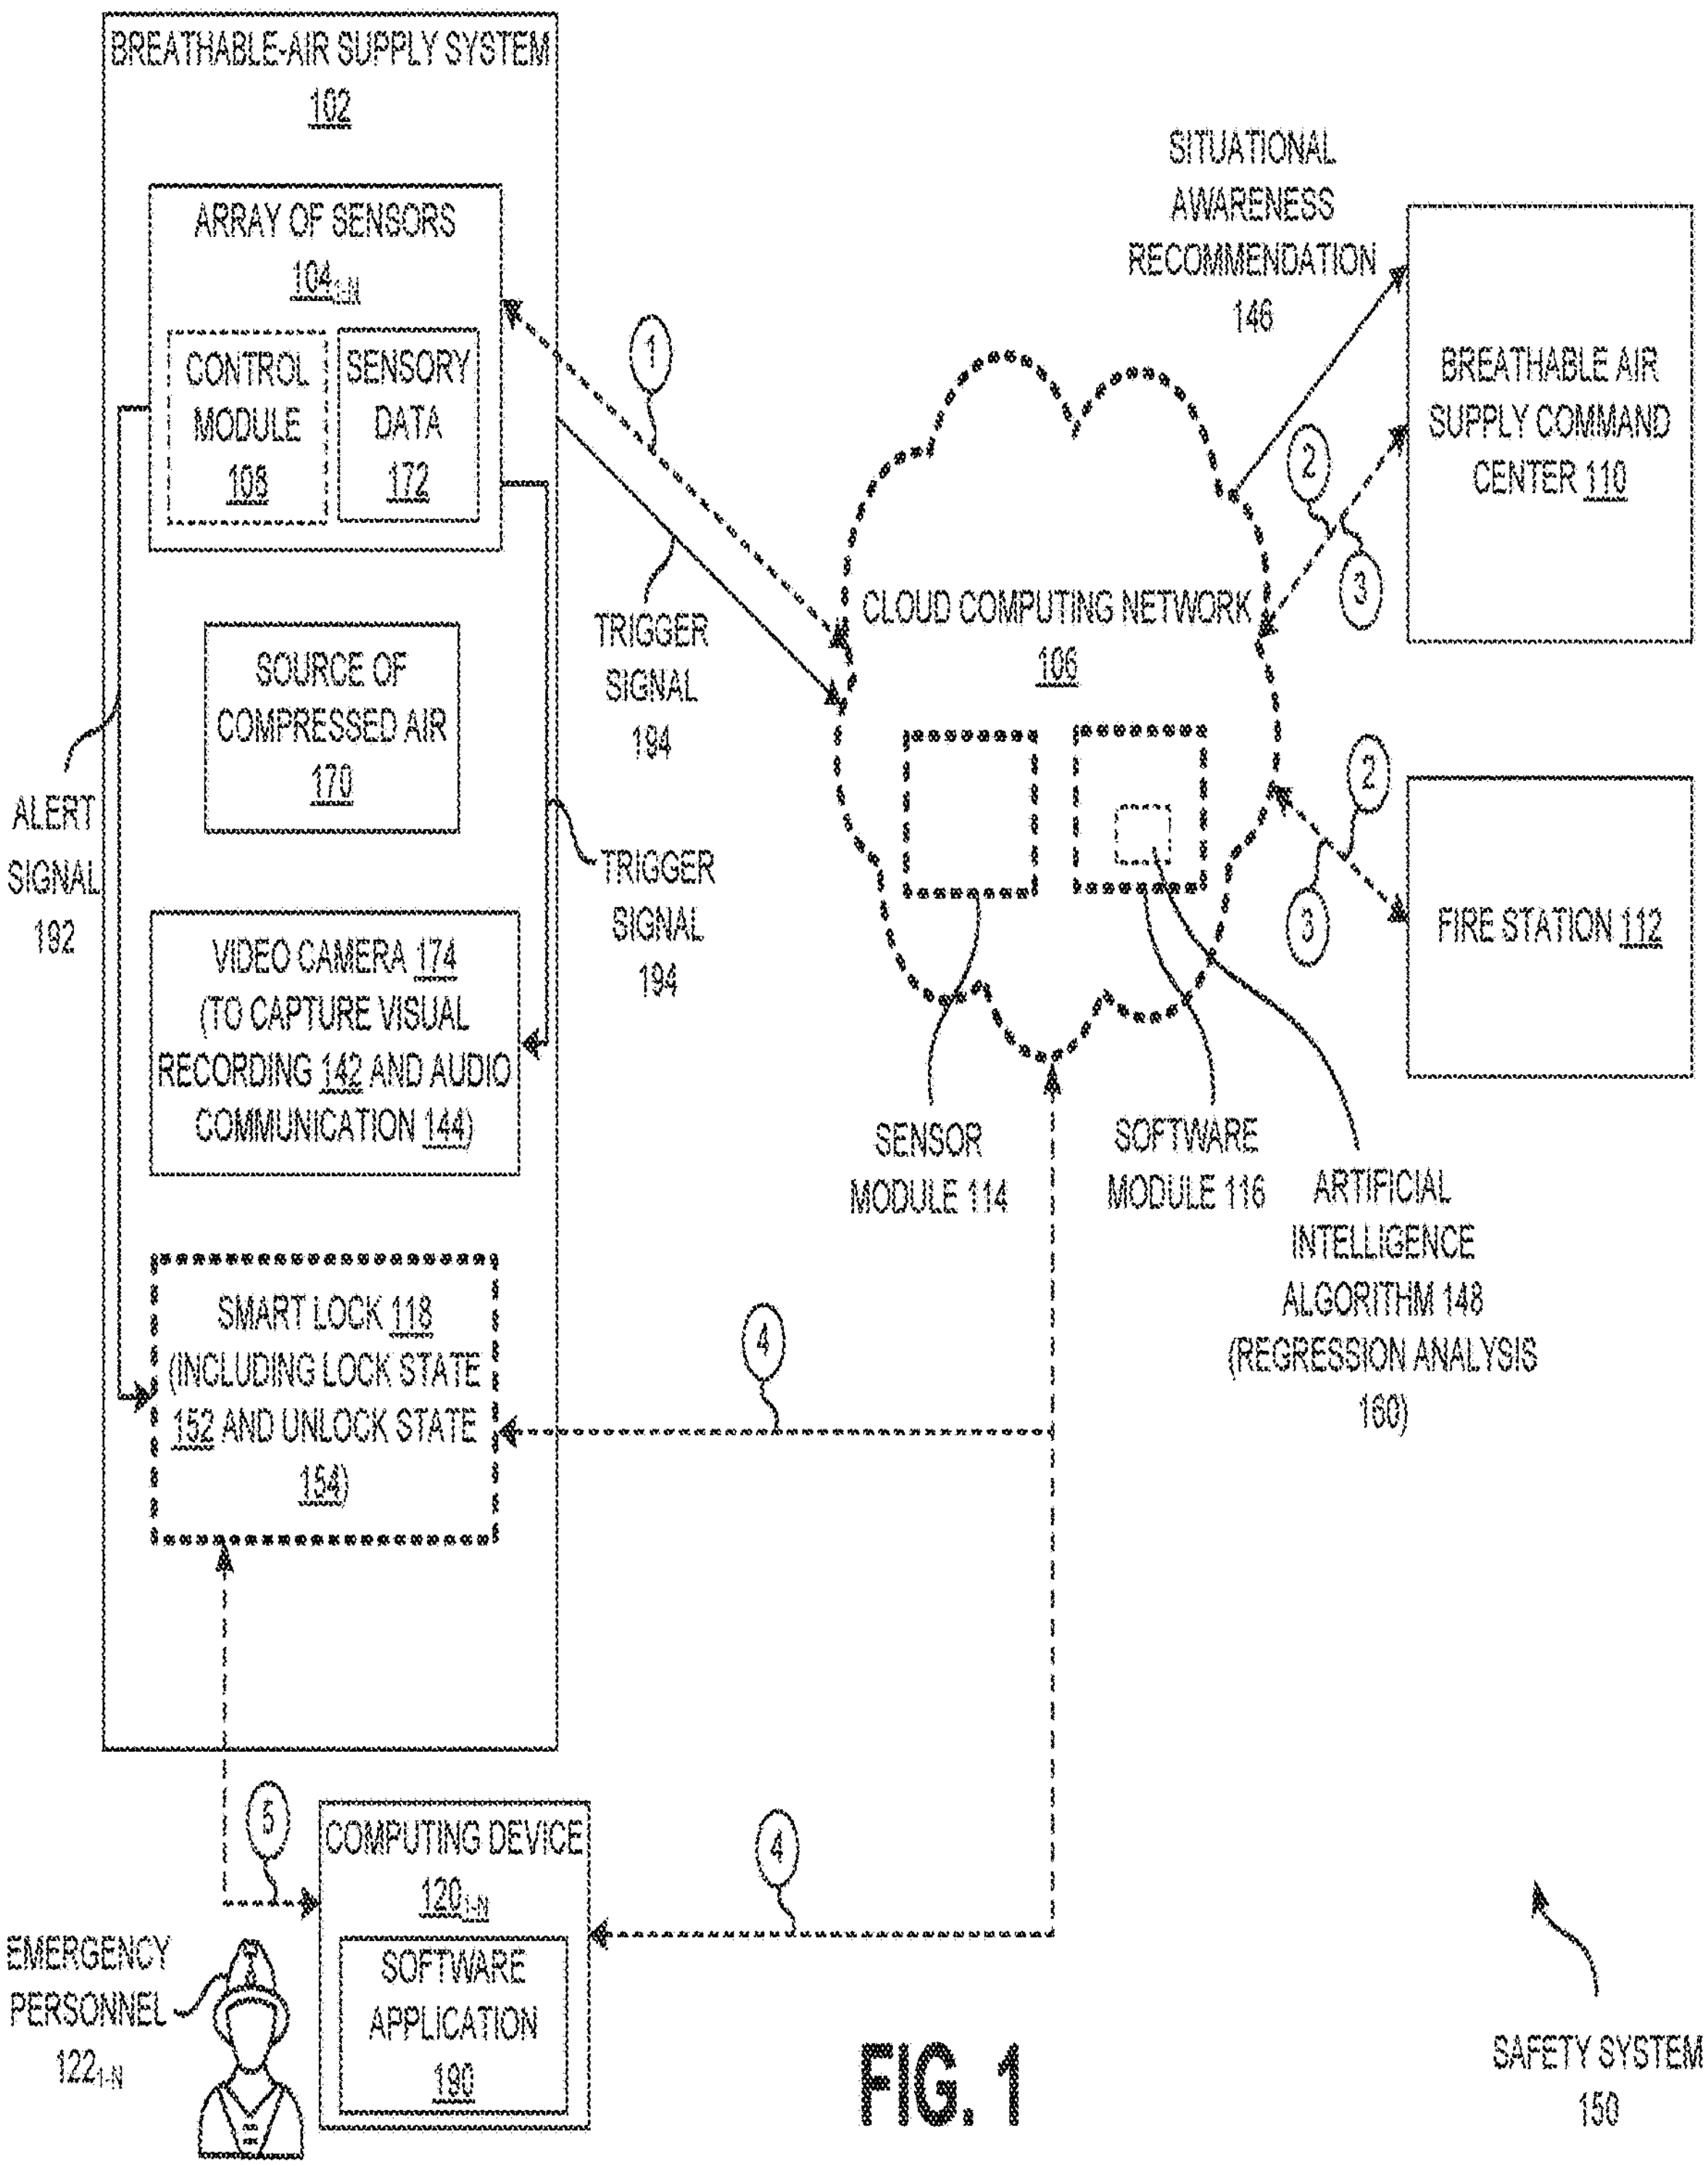

BREATHABLE-AIR SUPPLY SYSTEM 102
ARRAY OF SENSORS 104$_{1-N}$
CONTROL MODULE 108
SENSORY DATA 172
SOURCE OF COMPRESSED AIR 170
VIDEO CAMERA 174 (TO CAPTURE VISUAL RECORDING 142 AND AUDIO COMMUNICATION 144)
SMART LOCK 118 (INCLUDING LOCK STATE 152 AND UNLOCK STATE 154)
ALERT SIGNAL 192
TRIGGER SIGNAL 194
TRIGGER SIGNAL 194
SITUATIONAL AWARENESS RECOMMENDATION 146
CLOUD COMPUTING NETWORK 106
BREATHABLE AIR SUPPLY COMMAND CENTER 110
FIRE STATION 112
SENSOR MODULE 114
SOFTWARE MODULE 116
ARTIFICIAL INTELLIGENCE ALGORITHM 148 (REGRESSION ANALYSIS 160)
1
2
3
2
3
4
4
5
COMPUTING DEVICE 120$_{1-N}$
SOFTWARE APPLICATION 190
EMERGENCY PERSONNEL 122$_{1-N}$
SAFETY SYSTEM 150

FIG. 1

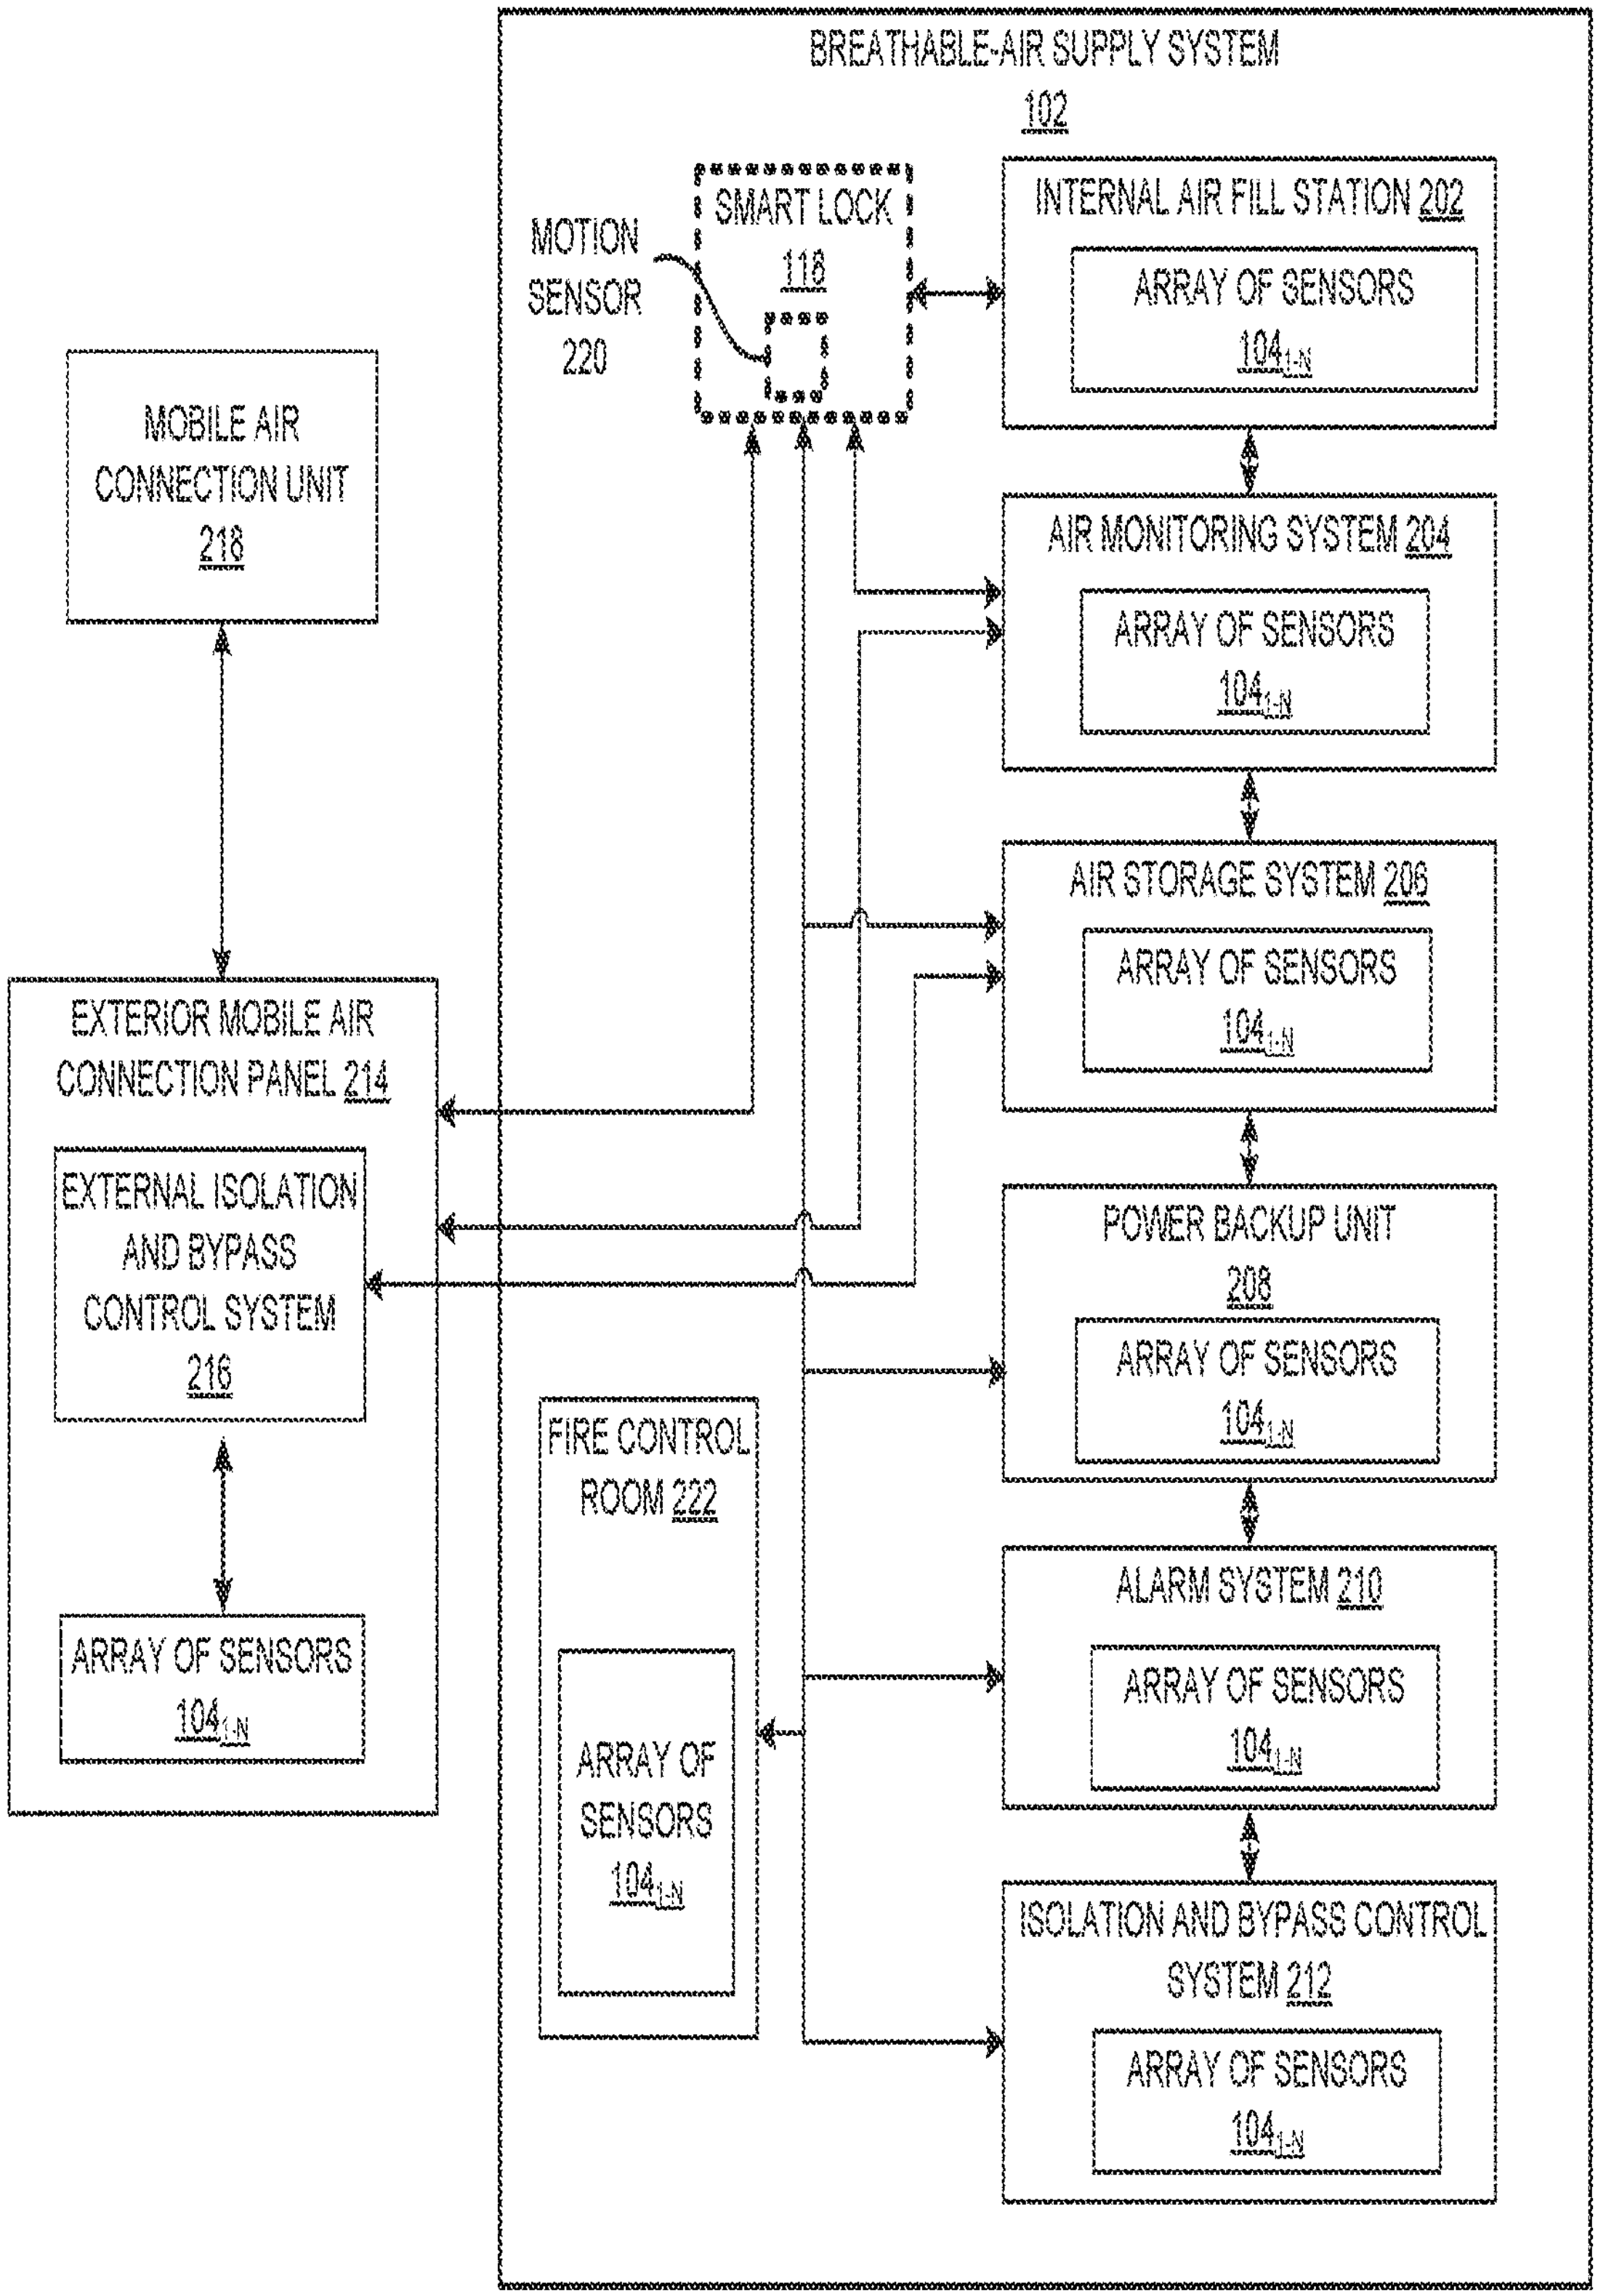
BREATHABLE-AIR SUPPLY SYSTEM
102
MOTION SENSOR 220
SMART LOCK 118
INTERNAL AIR FILL STATION 202
ARRAY OF SENSORS 104_{1-N}
MOBILE AIR CONNECTION UNIT 218
AIR MONITORING SYSTEM 204
ARRAY OF SENSORS 104_{1-N}
AIR STORAGE SYSTEM 206
ARRAY OF SENSORS 104_{1-N}
EXTERIOR MOBILE AIR CONNECTION PANEL 214
EXTERNAL ISOLATION AND BYPASS CONTROL SYSTEM 216
POWER BACKUP UNIT 208
ARRAY OF SENSORS 104_{1-N}
FIRE CONTROL ROOM 222
ARRAY OF SENSORS 104_{1-N}
ALARM SYSTEM 210
ARRAY OF SENSORS 104_{1-N}
ARRAY OF SENSORS 104_{1-N}
ISOLATION AND BYPASS CONTROL SYSTEM 212
ARRAY OF SENSORS 104_{1-N}

FIG. 2

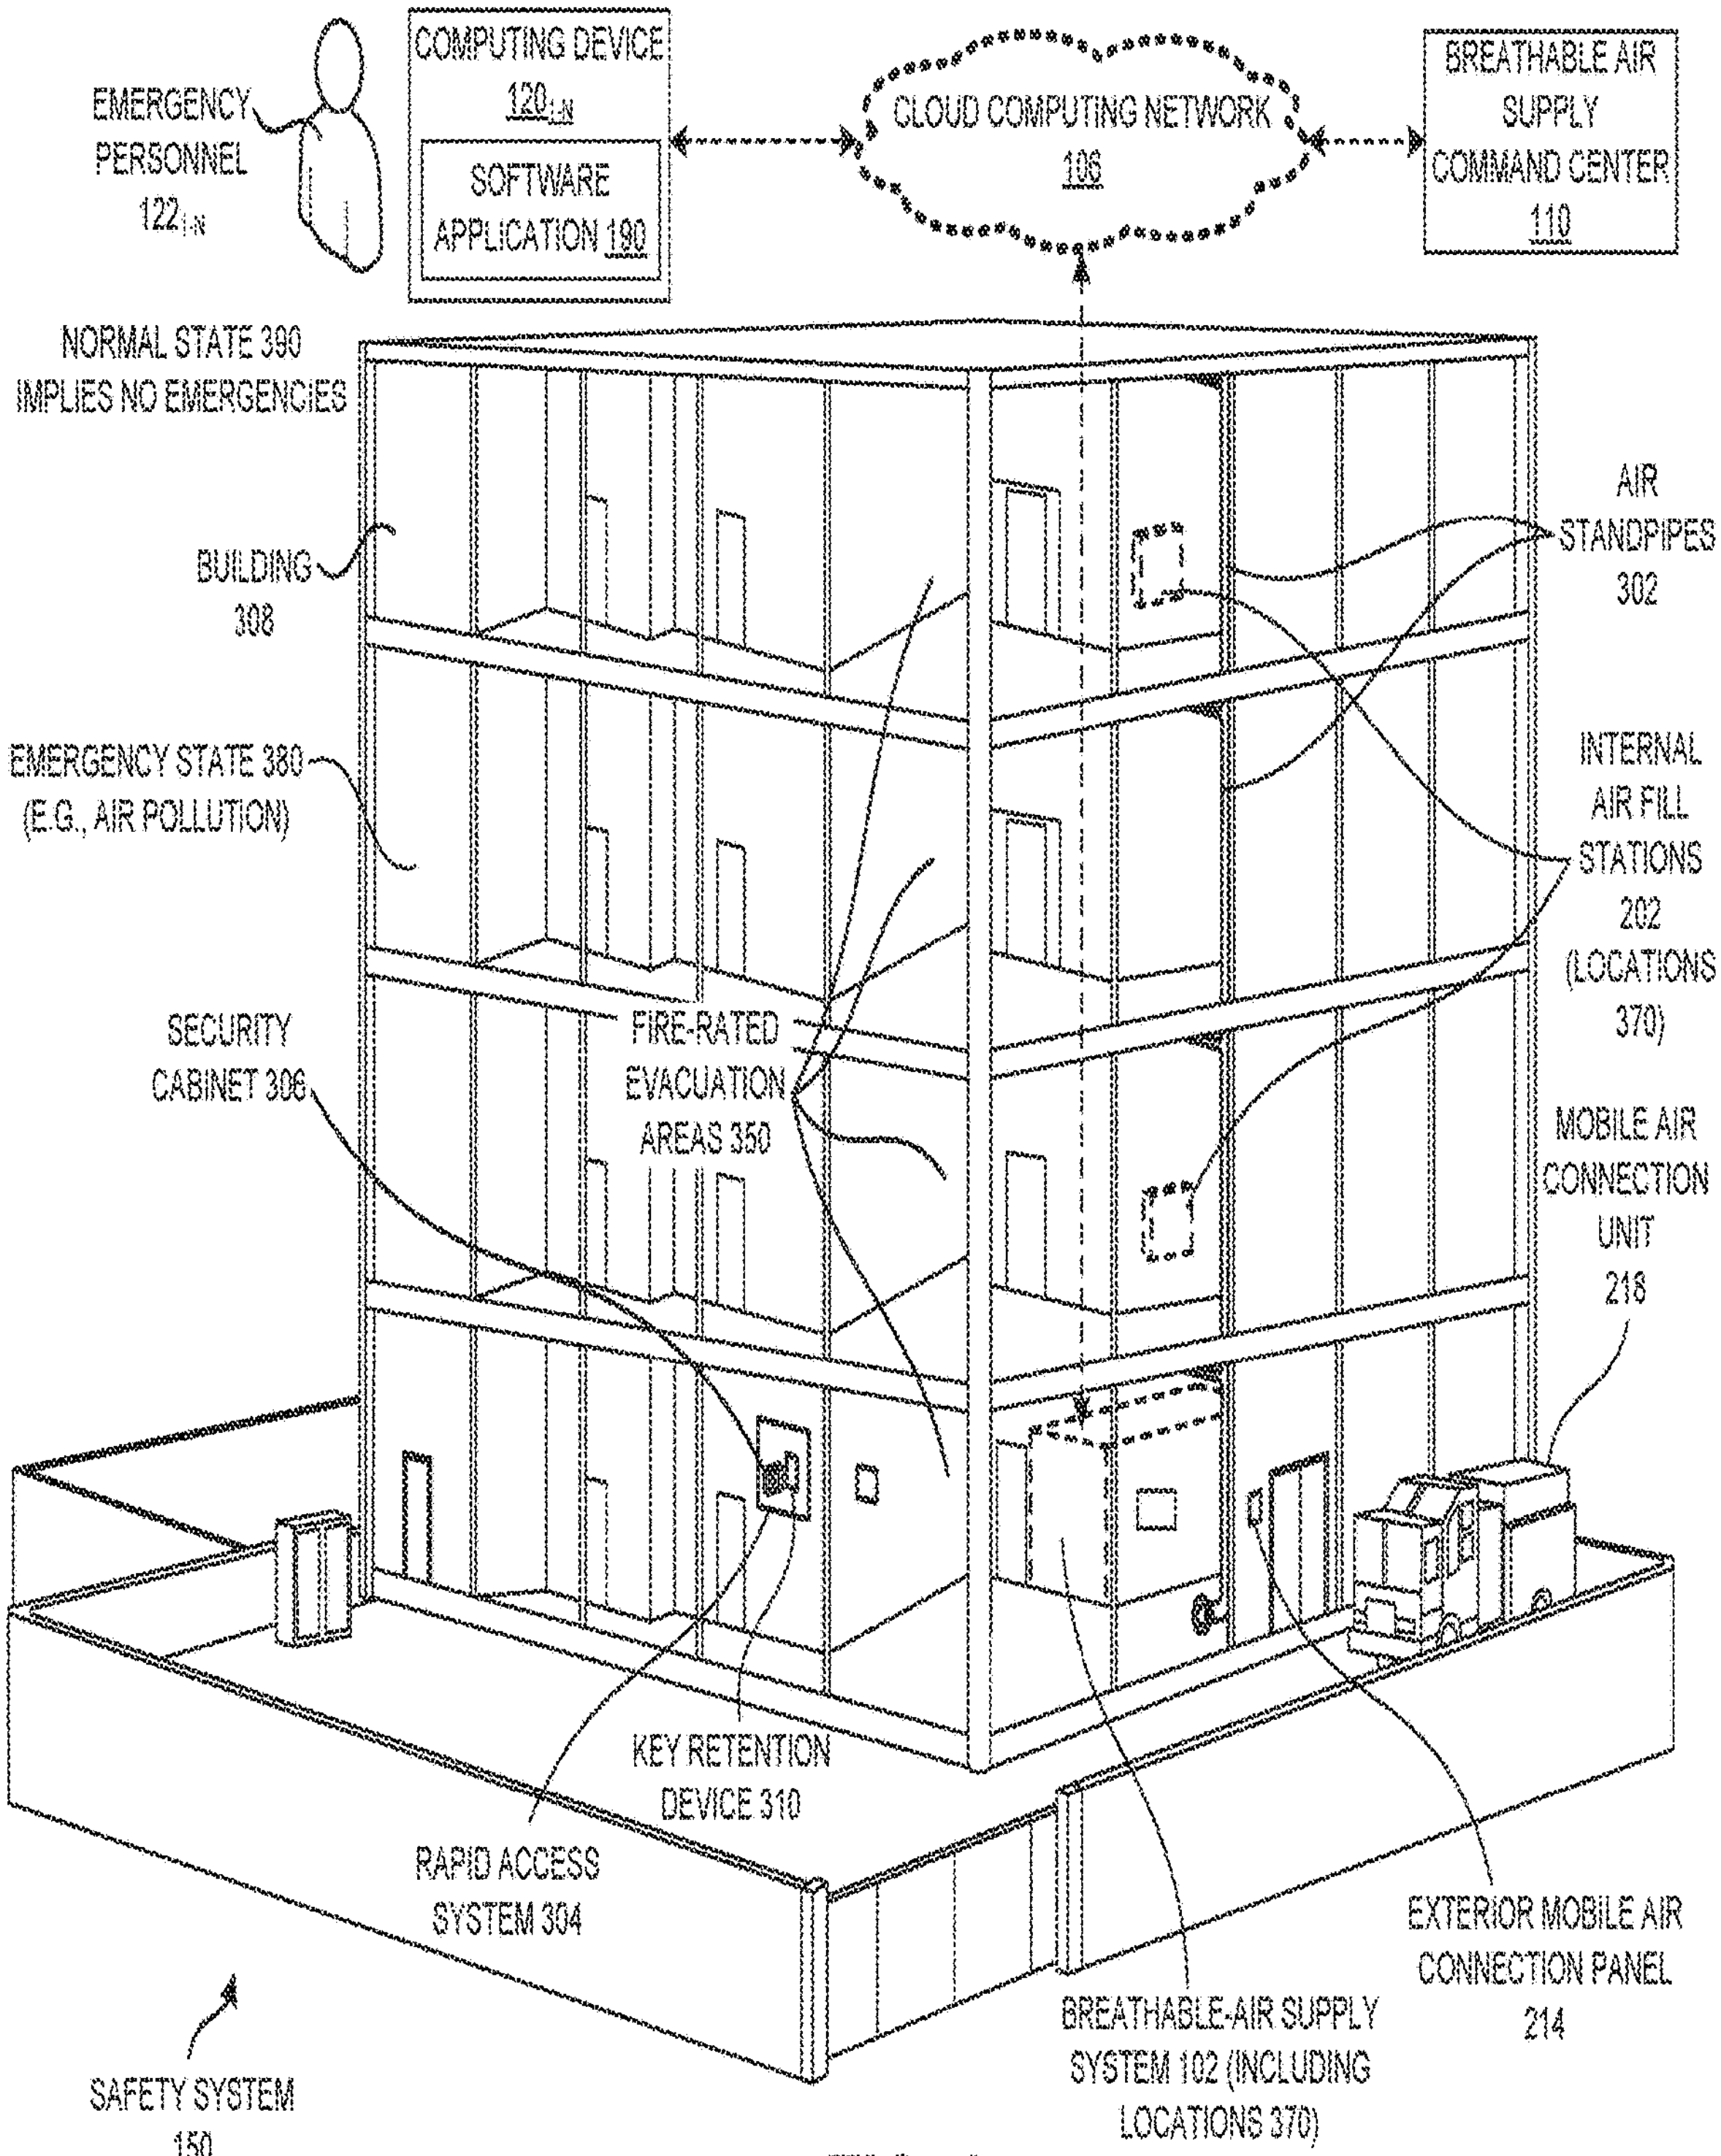
EMERGENCY PERSONNEL $122_{1\text{-}N}$
COMPUTING DEVICE $120_{1\text{-}N}$
SOFTWARE APPLICATION 190
CLOUD COMPUTING NETWORK 106
BREATHABLE AIR SUPPLY COMMAND CENTER 110
NORMAL STATE 390 IMPLIES NO EMERGENCIES
BUILDING 308
EMERGENCY STATE 380 (E.G., AIR POLLUTION)
SECURITY CABINET 306
FIRE-RATED EVACUATION AREAS 350
AIR STANDPIPES 302
INTERNAL AIR FILL STATIONS 202 (LOCATIONS 370)
MOBILE AIR CONNECTION UNIT 218
KEY RETENTION DEVICE 310
RAPID ACCESS SYSTEM 304
EXTERIOR MOBILE AIR CONNECTION PANEL 214
BREATHABLE-AIR SUPPLY SYSTEM 102 (INCLUDING LOCATIONS 370)
SAFETY SYSTEM 150

FIG. 3

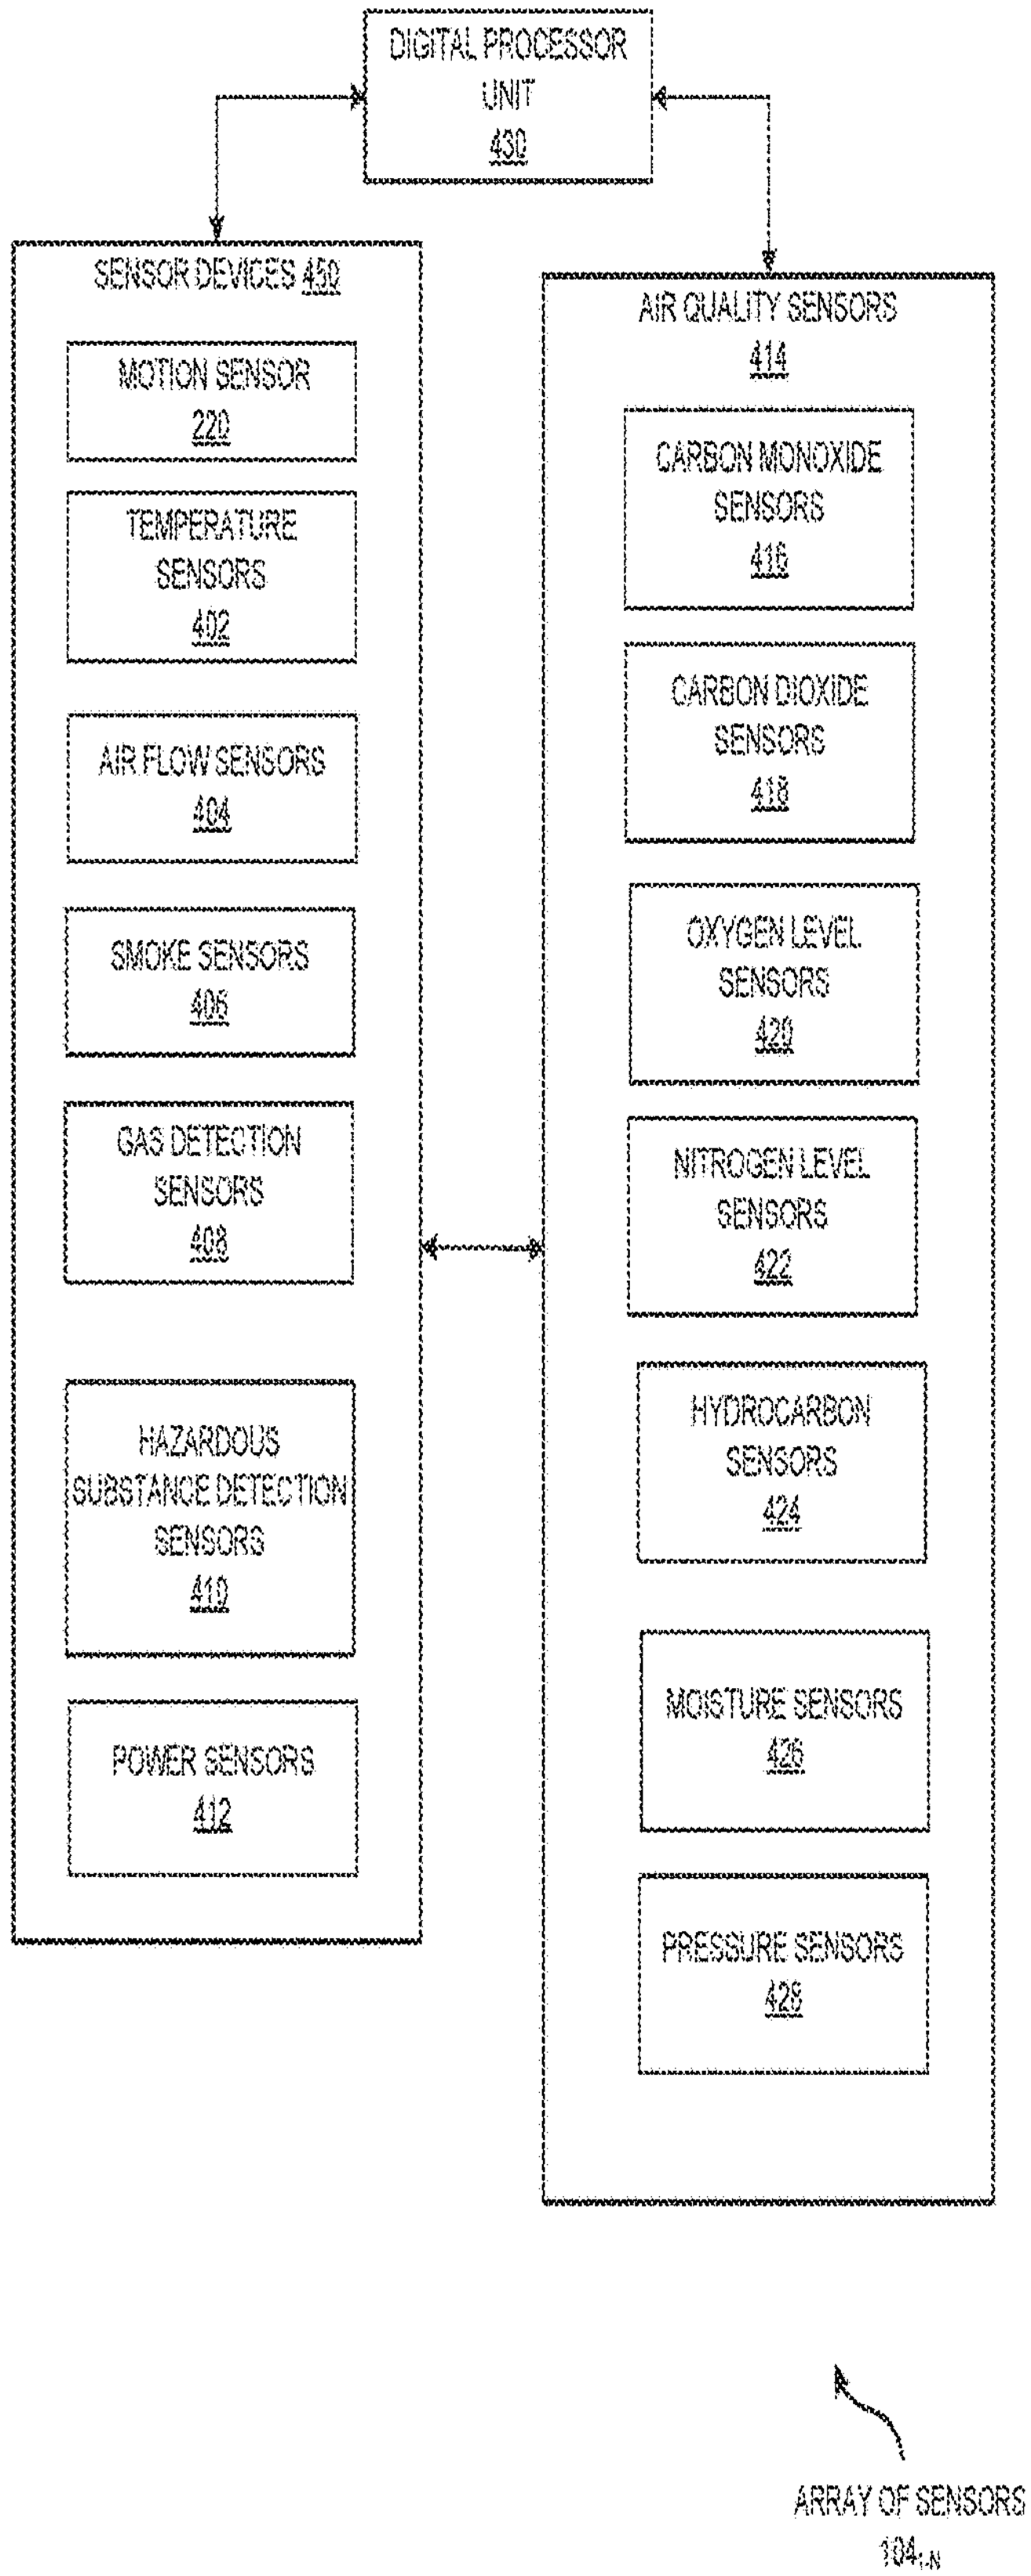
DIGITAL PROCESSOR UNIT 430
SENSOR DEVICES 450
MOTION SENSOR 220
TEMPERATURE SENSORS 402
AIR FLOW SENSORS 404
SMOKE SENSORS 406
GAS DETECTION SENSORS 408
HAZARDOUS SUBSTANCE DETECTION SENSORS 410
POWER SENSORS 412
AIR QUALITY SENSORS 414
CARBON MONOXIDE SENSORS 416
CARBON DIOXIDE SENSORS 418
OXYGEN LEVEL SENSORS 420
NITROGEN LEVEL SENSORS 422
HYDROCARBON SENSORS 424
MOISTURE SENSORS 426
PRESSURE SENSORS 428
ARRAY OF SENSORS 104_{1-N}

FIG. 4

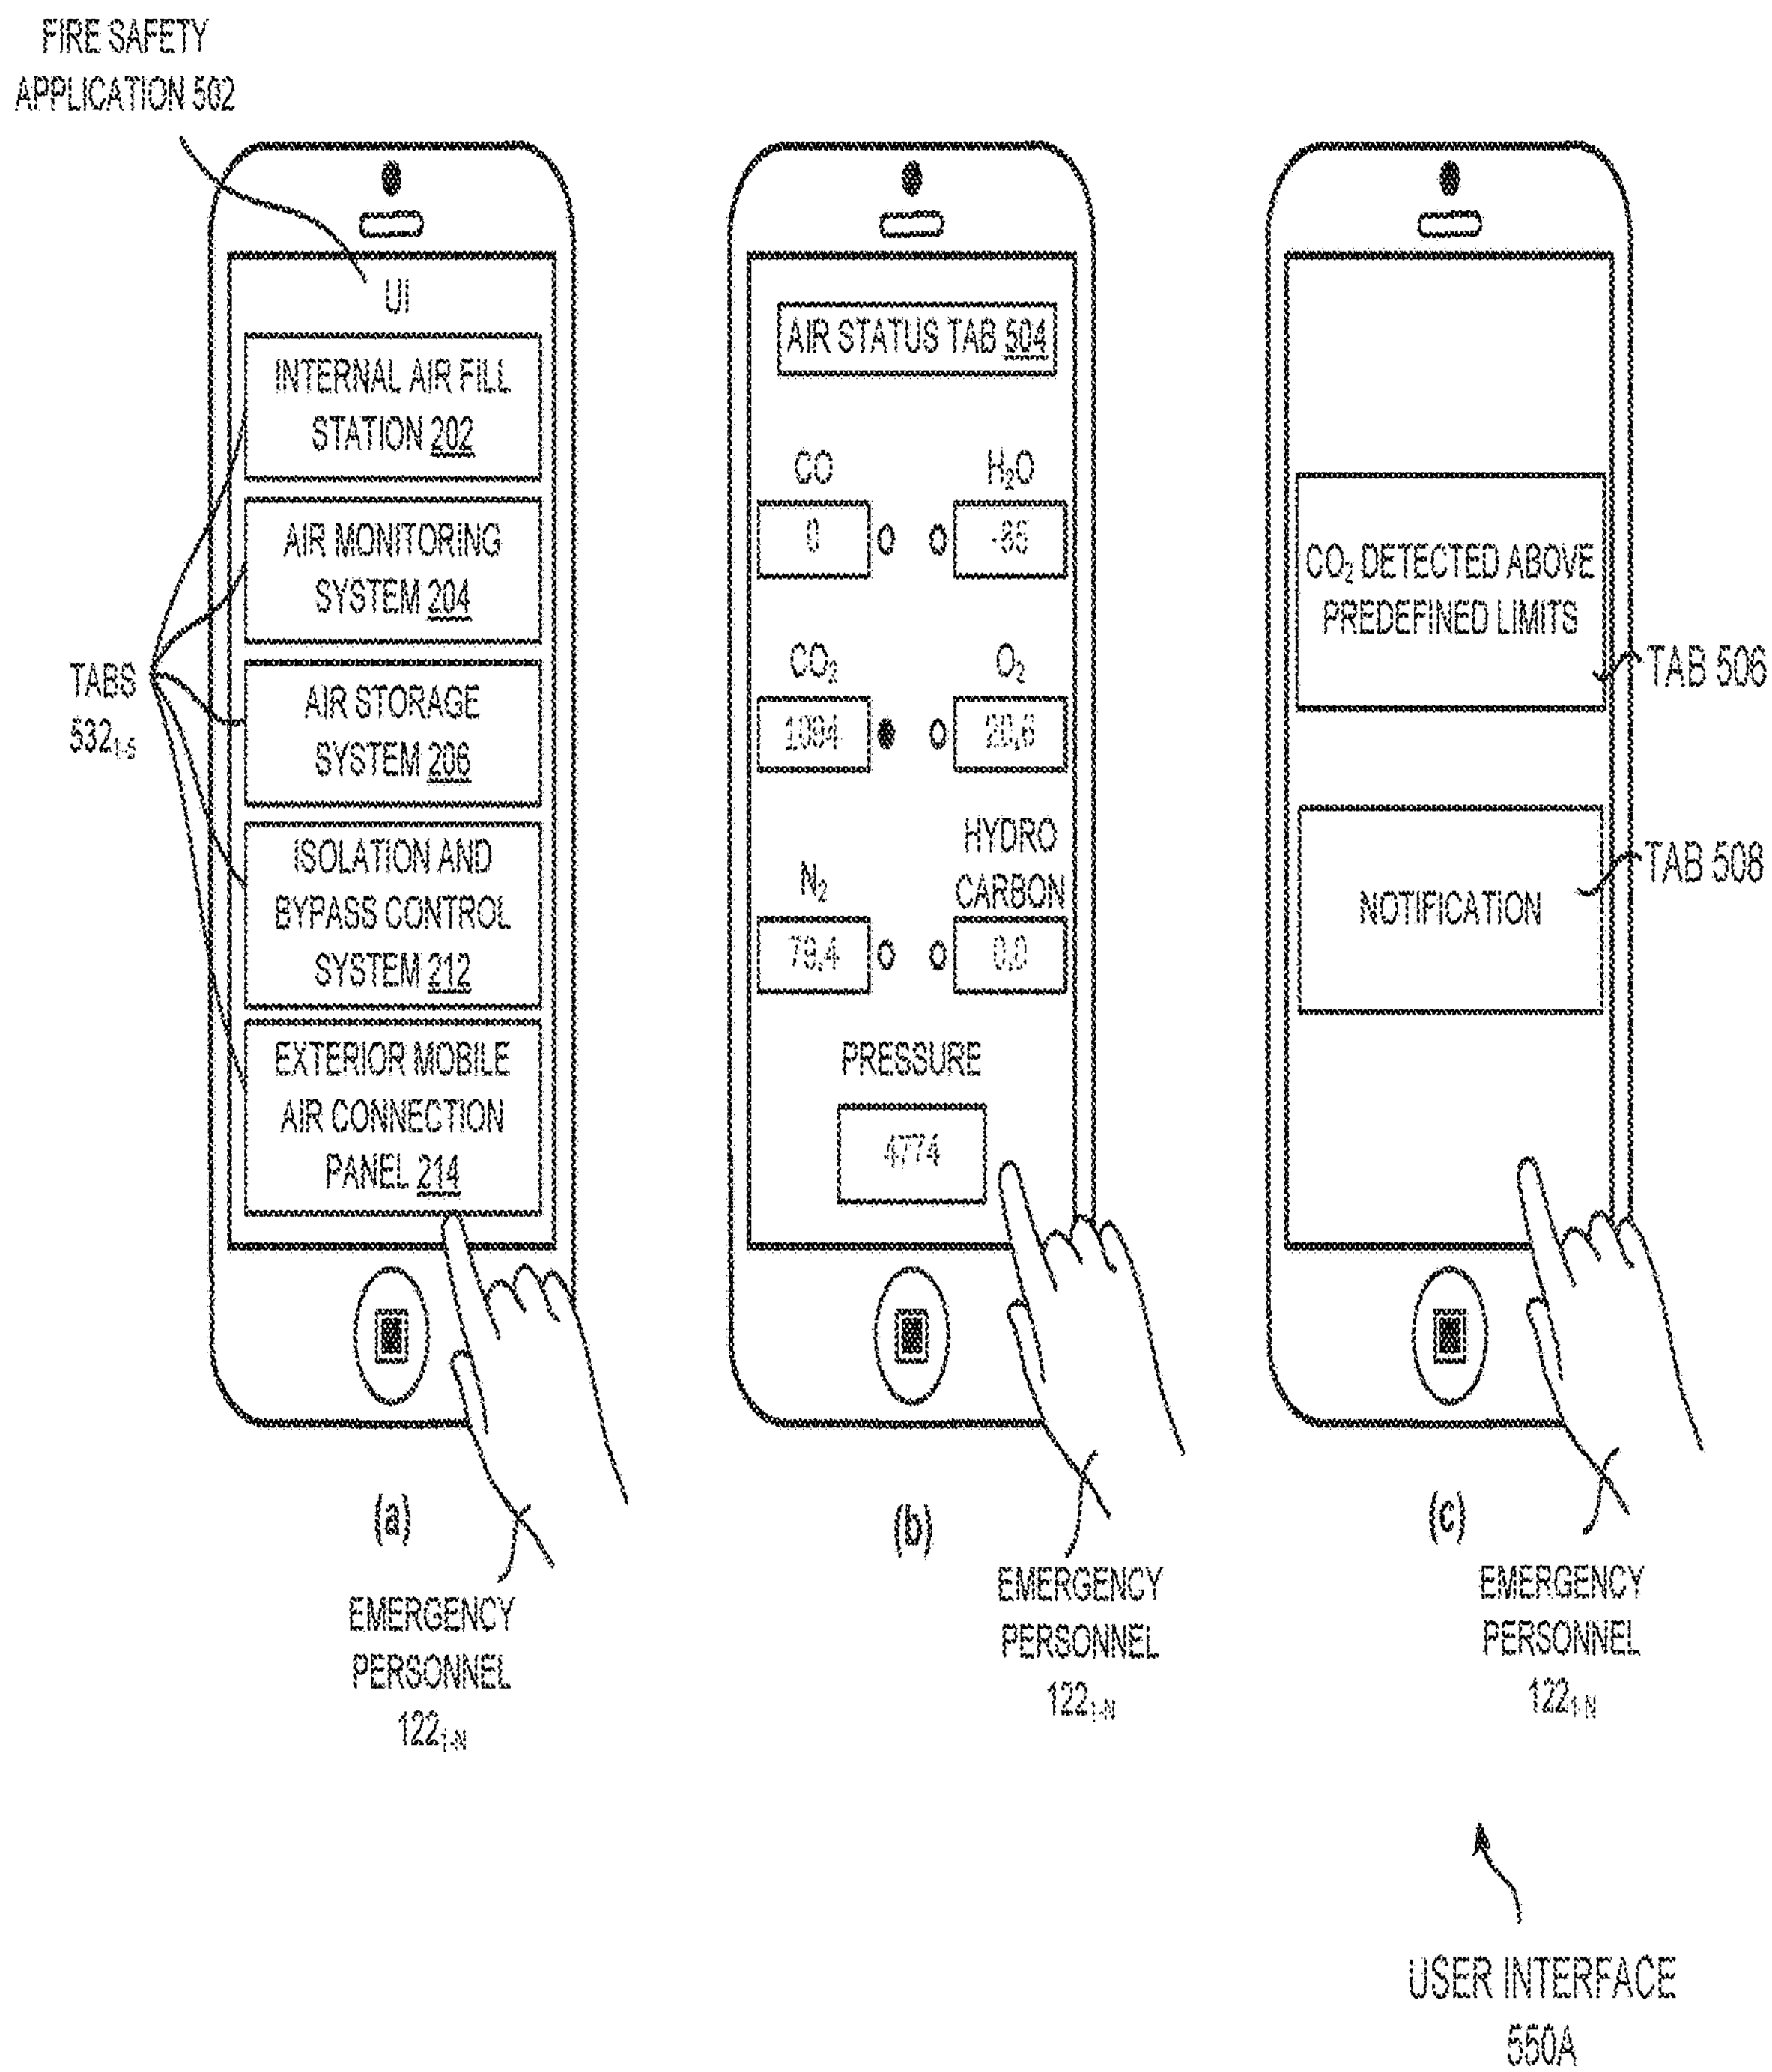
FIRE SAFETY
APPLICATION 502
UI
INTERNAL AIR FILL STATION 202
AIR MONITORING SYSTEM 204
AIR STORAGE SYSTEM 206
ISOLATION AND BYPASS CONTROL SYSTEM 212
EXTERIOR MOBILE AIR CONNECTION PANEL 214
TABS 532_{1-5}
(a)
EMERGENCY PERSONNEL 122_{1-N}
AIR STATUS TAB 504
CO
0
H_2O
-85
CO_2
1984
O_2
20.6
N_2
78.4
HYDRO CARBON
0.0
PRESSURE
4774
(b)
EMERGENCY PERSONNEL 122_{1-N}
CO_2 DETECTED ABOVE PREDEFINED LIMITS
TAB 506
NOTIFICATION
TAB 508
(c)
EMERGENCY PERSONNEL 122_{1-N}
USER INTERFACE 550A

FIG. 5A

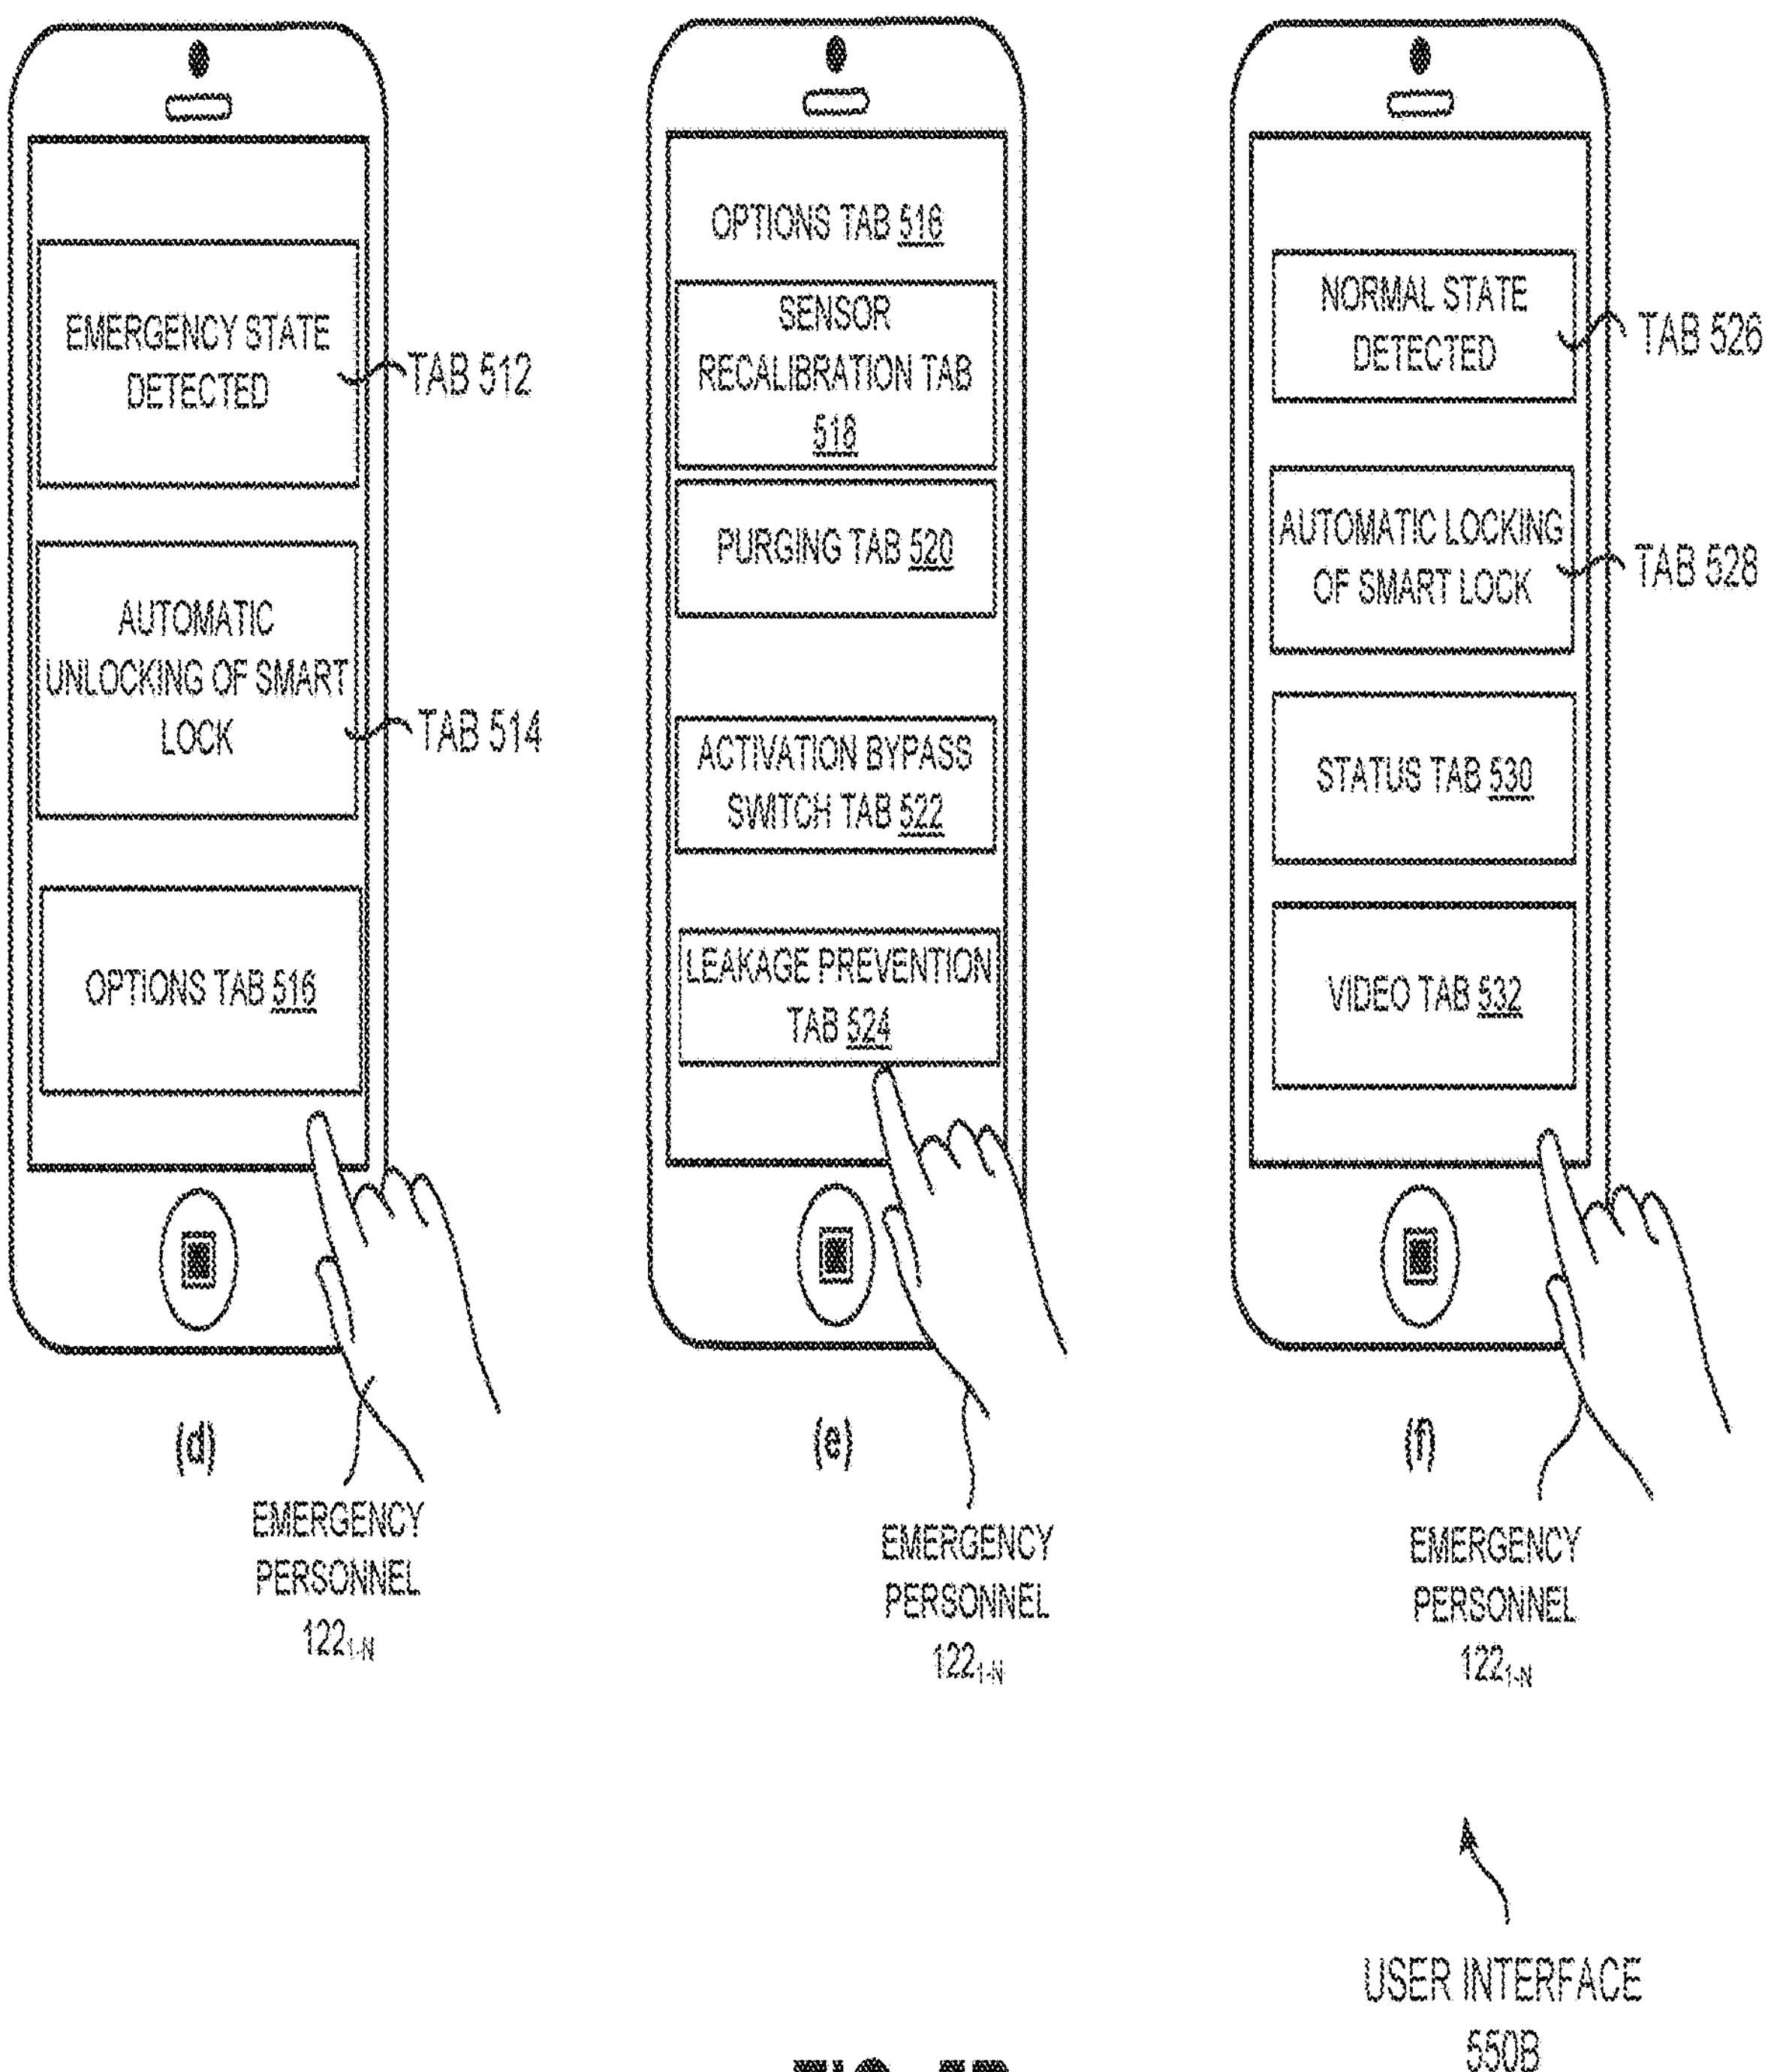
EMERGENCY STATE DETECTED
TAB 512
AUTOMATIC UNLOCKING OF SMART LOCK
TAB 514
OPTIONS TAB 516
(d)
EMERGENCY PERSONNEL 122_{1-N}
OPTIONS TAB 516
SENSOR RECALIBRATION TAB 518
PURGING TAB 520
ACTIVATION BYPASS SWITCH TAB 522
LEAKAGE PREVENTION TAB 524
(e)
EMERGENCY PERSONNEL 122_{1-N}
NORMAL STATE DETECTED
TAB 526
AUTOMATIC LOCKING OF SMART LOCK
TAB 528
STATUS TAB 530
VIDEO TAB 532
(f)
EMERGENCY PERSONNEL 122_{1-N}
USER INTERFACE 550B

FIG. 5B

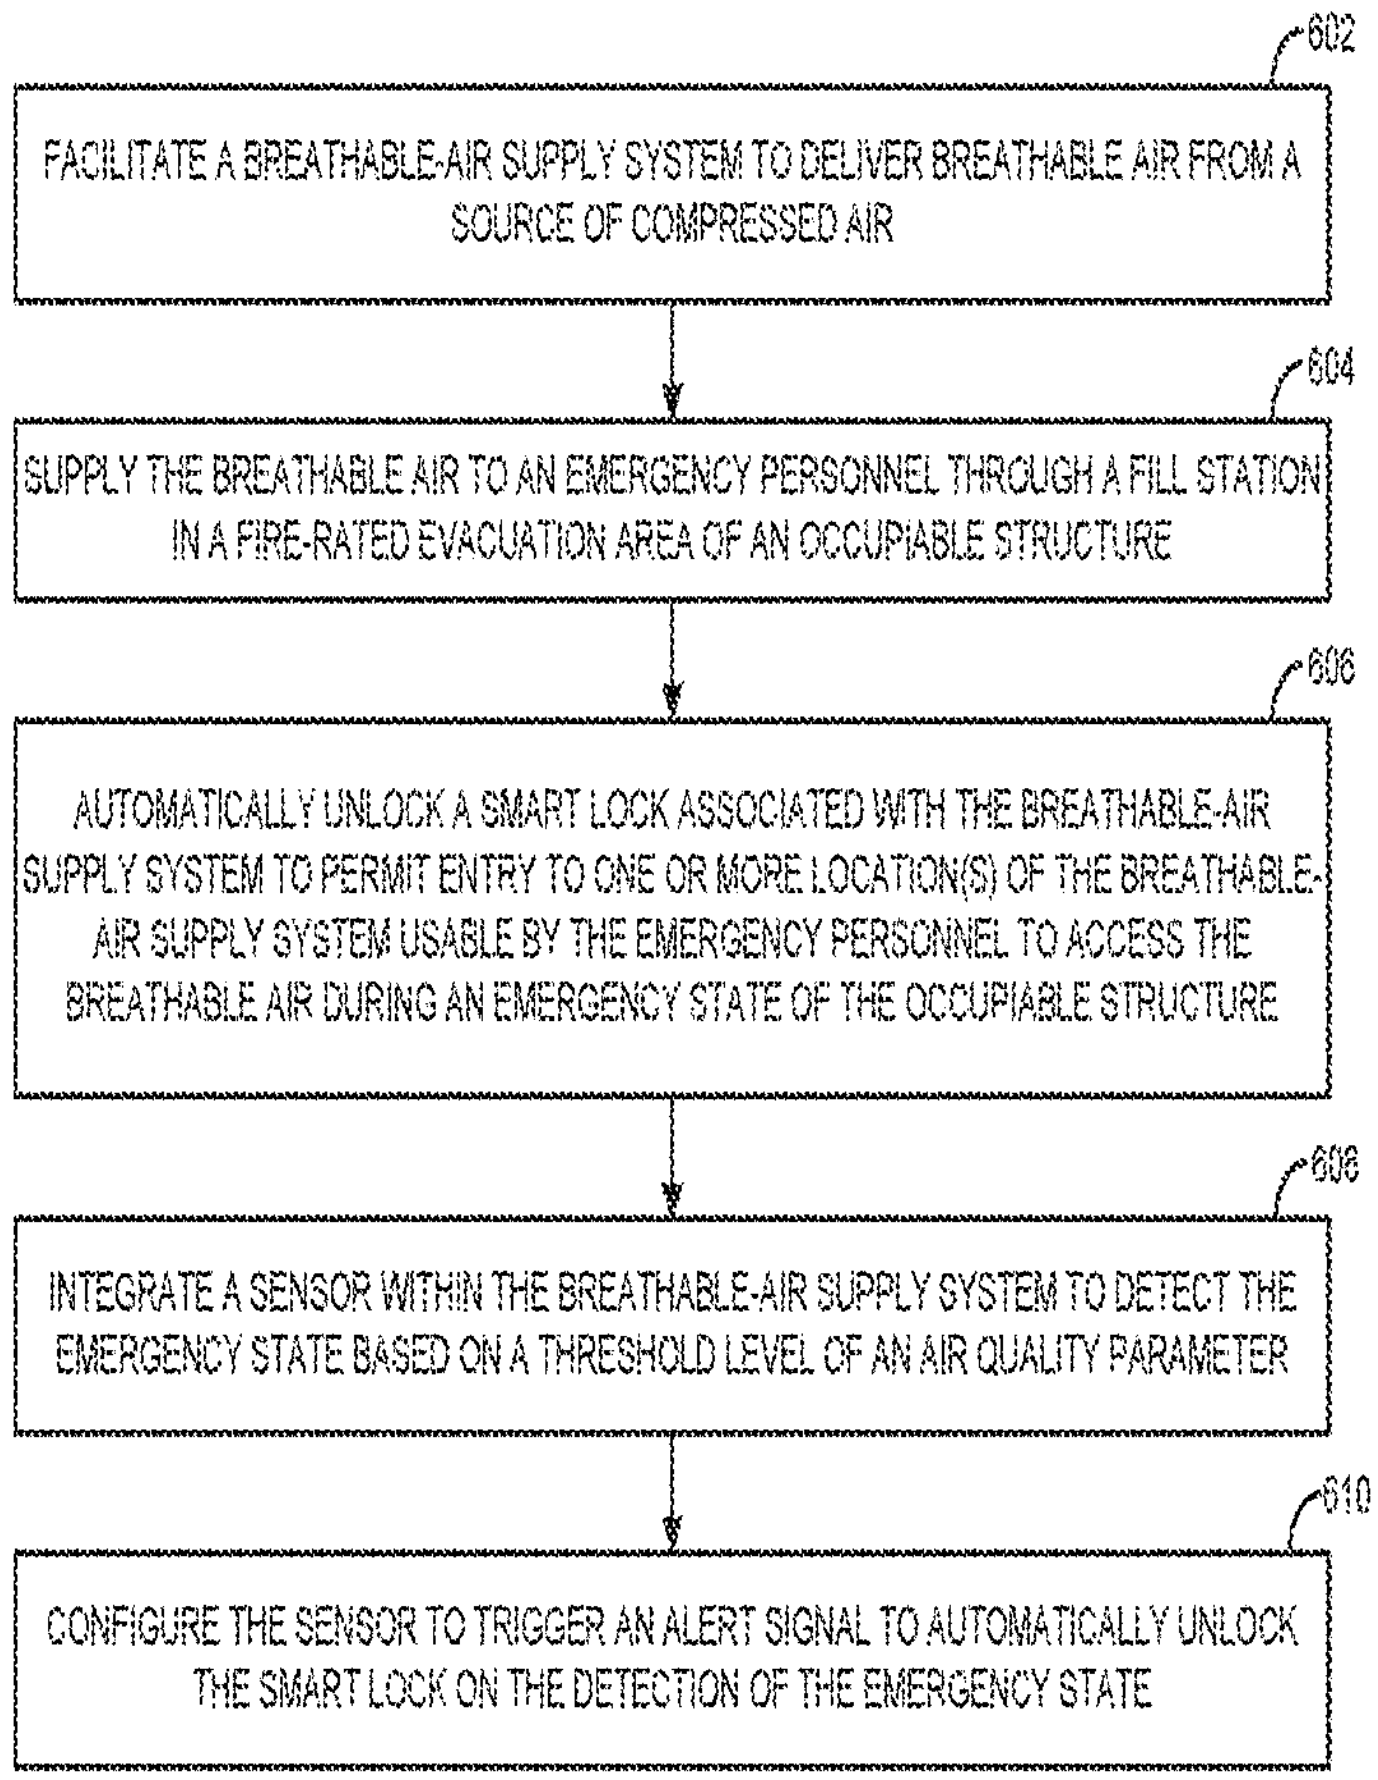
602
FACILITATE A BREATHABLE-AIR SUPPLY SYSTEM TO DELIVER BREATHABLE AIR FROM A SOURCE OF COMPRESSED AIR
604
SUPPLY THE BREATHABLE AIR TO AN EMERGENCY PERSONNEL THROUGH A FILL STATION IN A FIRE-RATED EVACUATION AREA OF AN OCCUPIABLE STRUCTURE
606
AUTOMATICALLY UNLOCK A SMART LOCK ASSOCIATED WITH THE BREATHABLE-AIR SUPPLY SYSTEM TO PERMIT ENTRY TO ONE OR MORE LOCATION(S) OF THE BREATHABLE-AIR SUPPLY SYSTEM USABLE BY THE EMERGENCY PERSONNEL TO ACCESS THE BREATHABLE AIR DURING AN EMERGENCY STATE OF THE OCCUPIABLE STRUCTURE
608
INTEGRATE A SENSOR WITHIN THE BREATHABLE-AIR SUPPLY SYSTEM TO DETECT THE EMERGENCY STATE BASED ON A THRESHOLD LEVEL OF AN AIR QUALITY PARAMETER
610
CONFIGURE THE SENSOR TO TRIGGER AN ALERT SIGNAL TO AUTOMATICALLY UNLOCK THE SMART LOCK ON THE DETECTION OF THE EMERGENCY STATE

FIG. 6

METHOD AND SYSTEM OF SENSOR-BASED SMART UNLOCKING OF A FIREFIGHTER AIR REPLENISHMENT SYSTEM

CLAIM OF PRIORITY

[0001] This application claims the benefit of priority under 35 U.S.C. § 120 as a continuation of U.S. patent application Ser. No. 18/103,498, filed Jan. 31, 2023, titled METHOD AND SYSTEM OF SENSOR-BASED UNLOCKING OF A FIREFIGHTER AIR REPLENISHMENT SYSTEM, which is a conversion application of, and claims priority to, U.S. Provisional Patent Application No. 63/356,996 titled CLOUD-BASED FIREFIGHTING AIR REPLENISHMENT MONITORING SYSTEM, SENSORS AND METHODS filed on Jun. 29, 2022, and U.S. Provisional Patent Application No. 63/357,145 titled METHOD AND SYSTEM OF SENSOR-BASED SMART UNLOCKING OF A FIREFIGHTER AIR REPLENISHMENT SYSTEM filed on Jun. 30, 2022. The contents of each of the aforementioned applications are incorporated herein by reference in entirety thereof.

FIELD OF TECHNOLOGY

[0002] This disclosure relates generally to firefighting systems and, more particularly, to a method and system of sensor-based smart unlocking of a firefighter air replenishment system.

BACKGROUND

[0003] An emergency response team may be deployed to alleviate an emergency situation and/or rescue people in an occupiable structure (e.g., a building such as a mid and/or high-rise building, a large horizontal structure such as a big box retail store, a warehouse and/or a manufacturing plant, a tunnel, a wind turbine and/or a large marine vessel) that is affected by an accident. The emergency situation and/or the accident may include but is not limited to an event such as a fire, an explosion, a chemical attack, a terror attack, a subway accident, a mine collapse, a catastrophic event and a biological agent attack. During the emergency situation, the air quality in the occupiable structure may be compromised by smoke and/or inflammatory and/or toxic air, making it difficult for an emergency responder to breathe. The emergency response team may rely on a Firefighter Air Replenishment System (FARS) installed within the occupiable structure to access reliable and safe supply of breathable air.

[0004] The emergency response team may have difficulty accessing the safe, breathable air in the FARS installed within the occupiable structure as emergency fill panels thereof may be located inside a locked closet and/or a room for protection against unauthorized access and/or tampering. In the absence of instantaneous access provisions, the emergency response team may need to forcibly open the locked closet and/or the room located inside the occupiable structure to access the breathable air from the emergency fill panels, causing delays that may endanger lives.

SUMMARY

[0005] Disclosed are a method and a system of sensor-based smart unlocking of a firefighter air replenishment system.

[0006] In one aspect, a safety system of an occupiable structure includes a breathable-air supply system to facilitate delivery of breathable air from a source of compressed air, and a fill station in a fire-rated evacuation area of the occupiable structure to supply the breathable air to an emergency personnel. The safety system also includes a smart lock associated with the breathable-air supply system to automatically unlock at one or more location(s) of the breathable-air supply system usable by the emergency personnel to access the breathable air during an emergency state of the occupiable structure, and a sensor associated with the breathable-air supply system to detect the emergency state of the occupiable structure.

[0007] The smart lock associated with the breathable-air supply system may automatically lock the one or more location(s) of the breathable-air supply system required by the emergency personnel to access the breathable air when the emergency state ends and a normal state of the occupiable structure is detected. The breathable-air supply system may be housed in an air storage sub-system appurtenant to the occupiable structure. A lock state and an unlock state of the smart lock is determined based on a sensory data of the sensor associated with the breathable-air supply system.

[0008] The one or more location(s) of the breathable-air supply system required by the emergency personnel to access the breathable air during the emergency state of the occupiable structure may include a video camera that captures a visual recording when the one or more location(s) is being accessed by anyone in the unlock state. The video camera may also record an audio communication ambient to the one or more location(s). The visual recording and/or the audio recording may be communicated to a remote fire command center, an onsite fire command center and/or a fire command room.

[0009] The breathable-air supply system may automatically transcribe the audio communication and/or the visual recording of the one or more location(s). The breathable-air supply system may automatically provide a situational awareness recommendation to the remote fire command center, the onsite fire command center and/or the fire command room using an artificial intelligence algorithm based on a regression analysis of the sensory data.

[0010] The sensor may include a carbon monoxide sensor, a carbon dioxide sensor, an oxygen level sensor, a nitrogen level sensor, a hydrocarbon sensor, a moisture sensor, and/or a pressure sensor. The carbon monoxide sensor may trigger the emergency state when a level of ambient carbon monoxide exceeds a first predetermined threshold value (e.g., 5 parts per million (ppm), 10 ppm). The carbon dioxide sensor may trigger the emergency state when a level of ambient carbon dioxide exceeds a second predetermined threshold value (e.g., 1000 ppm, 1200 ppm). The oxygen level sensor may trigger the emergency state when the ambient oxygen level falls outside a predetermined threshold range (e.g., between 19.5% and 23.5%) of values.

[0011] The nitrogen level sensor may trigger the emergency state when a level of nitrogen falls below a third predetermined threshold value (e.g., 75%) and/or rises above a fourth predetermined threshold value (e.g., 81%). The hydrocarbon sensor may trigger the emergency state when a condensed hydrocarbon content exceeds a fifth predetermined threshold value (e.g., 5 milligrams per cubic meter of air). The moisture sensor may trigger the emergency state when moisture concentration exceeds a sixth predetermined threshold value (e.g., 24 ppm by volume). The pressure sensor may trigger the emergency state when pressure falls below a seventh predetermined threshold value (e.g., 90 percent of the maintenance pressure specified in a fire code).

[0012] The one or more location(s) of the breathable-air supply system may include an exterior mobile air connection panel, an air monitoring closet, an air monitoring room, an air storage closet, an air storage room, a fire command center, a fire command room, a fire alarm panel, a computing device executing a software application thereon, a fill station of the occupiable structure and/or a temporarily established fill station connected to a compressed air source during the emergency state. The smart lock associated with the breathable-air supply system automatically unlocks each location of the breathable-air supply system usable during the emergency state of the occupiable structure. The fire-rated evacuation area of the occupiable structure may be a stairwell. The sensor associated with the breathable-air supply system may include an array of sensors.

[0013] In another aspect, a method of a safety system of an occupiable structure includes facilitating a breathable-air supply system to deliver breathable air from a source of compressed air, and supplying the breathable air to an emergency personnel through a fill station in a fire-rated evacuation area of the occupiable structure. The method also includes automatically unlocking a smart lock associated with the breathable-air supply system to permit entry to one or more location(s) of the breathable-air supply system usable by the emergency personnel to access the breathable air during an emergency state of the occupiable structure. Further, the method includes integrating a sensor within the breathable-air supply system to detect the emergency state based on a threshold level of an air quality parameter, and configuring the sensor to trigger an alert signal to automatically unlock the smart lock on the detection of the emergency state.

[0014] The method may also include automatically locking the one or more location(s) of the breathable-air supply system required by the emergency personnel to access the breathable air when the emergency state ends and a normal state of the occupiable structure is detected by the sensor, and recording, through a video camera, an audiovisual incident to communicate to a remote fire command center, an onsite fire command center and/or a fire command room through a cloud computing network, when the one or more location(s) is accessed by an unauthorized person and/or the emergency personnel in an unlock state of the smart lock.

[0015] The method may also include automatically providing, through the breathable-air supply system, a situational awareness recommendation to the remote fire command center, the onsite fire command center and/or the fire command room using an artificial intelligence algorithm based on a regression analysis of a sensory data of the sensor, and providing the sensor with a carbon monoxide sensor, a carbon dioxide sensor, an oxygen level sensor, a nitrogen level sensor, a hydrocarbon sensor, a moisture sensor and/or a pressure sensor.

[0016] The method may further include generating a trigger signal to alert the emergency personnel, the remote fire command center, the onsite fire command center and/or the fire command room based on detecting tampering of the smart lock associated with the breathable-air supply system. The one or more location(s) may include an exterior mobile air connection panel, an air monitoring closet, an air monitoring room, an air storage closet, an air storage room, a fire command center, a fire command room, a fire alarm panel, a computing device executing a software application thereon, a fill station of the occupiable structure and/or a temporarily established fill station connected to a compressed air source during the emergency state.

[0017] The smart lock associated with the breathable-air supply system may automatically unlock each location of the breathable-air supply system usable during the emergency state of the occupiable structure. The fire-rated evacuation area of the occupiable structure may be a stairwell. The sensor within the breathable-air supply system may include an array of sensors. Additionally, the method may include accessing the smart lock using a Radio Frequency Identification (RFID) system, a smart card, a key fob access, a Non-Fungible Token (NFT), a physical key, a biometric system and/or a web-based identification system.

[0018] Also, the method may include automatically triggering the emergency state using the carbon monoxide sensor when a level of ambient carbon monoxide exceeds a first predetermined threshold value (e.g., 5 parts per million (ppm), 10 ppm), automatically triggering the emergency state using the carbon dioxide sensor when a level of ambient carbon dioxide exceeds a second predetermined threshold value (e.g., 1000 ppm, 1200 ppm), and automatically triggering the emergency state using the oxygen level sensor when a level of ambient oxygen falls outside a predetermined range of values (e.g., between 19.5% and 23.5%). Additionally, the method may include automatically triggering the emergency state using the nitrogen level sensor when a level of nitrogen falls below a third predetermined threshold value (e.g., 75%) and when the level of nitrogen rises above a fourth predetermined threshold value (e.g., 81%), and automatically triggering the emergency state using the hydrocarbon sensor when a condensed hydrocarbon content exceeds a fifth predetermined threshold value (e.g., 5 milligrams per cubic meter of air).

[0019] Still further, the method may include automatically triggering the emergency state using the moisture sensor when a moisture concentration exceeds a sixth predetermined threshold value (e.g., 24 ppm by volume), and, automatically triggering the emergency state using the pressure sensor when a pressure falls below a seventh predetermined threshold value (e.g., 90 percent of the maintenance pressure specified in a fire code).

[0020] In yet another aspect, a method of a safety system of an occupiable structure includes facilitating a breathable-air supply system to deliver breathable air from a source of compressed air, and supplying the breathable air to an emergency personnel through a fill station in a fire-rated evacuation area of the occupiable structure. The method also includes automatically unlocking a smart lock associated with the breathable-air supply system to permit entry to each location of the breathable-air supply system usable by the emergency personnel to access the breathable air during an emergency state of the occupiable structure, and integrating a sensor within the breathable-air supply system to detect the emergency state based on a threshold level of an air quality parameter.

[0021] Further, the method also includes configuring the sensor to trigger an alert signal to automatically unlock the smart lock on the detection of the emergency state.

[0022] Other features will be apparent from the accompanying drawings and from the detailed description that follows.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] The embodiments of this invention are illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements and in which:

[0024] FIG. **1***is* a schematic view of a safety system interpretable as a smart locking system of a breathable-air supply system, according to one embodiment.

[0025] FIG. **2** is a schematic view of the safety system of FIG. **1** in more detail, according to one embodiment.

[0026] FIG. **3** is a schematic and perspective view of the safety system of FIGS. **1-2** according to one embodiment.

[0027] FIG. **4** is a schematic view of an array of sensors of the breathable-air supply system of FIGS. **1-3**, according to one embodiment.

[0028] FIG. **5**A is a user interface view of a fire safety application executing on a computing device of the safety system of FIGS. **1** and **3**, according to one embodiment.

[0029] FIG. **5**B is another user interface view of the fire safety application of FIG. **5**A, according to one embodiment.

[0030] FIG. **6** is a process flow diagram detailing the operations in a sensor-based smart unlocking of a firefighter air replenishment system, according to one embodiment.

[0031] Other features of the present embodiments will be apparent from the accompanying drawings and from the detailed description that follows.

DETAILED DESCRIPTION

[0032] Example embodiments, as described below, may be used to provide methods and/or a system of a sensor-based smart unlocking of a firefighter air replenishment system. Although the present embodiments have been described with reference to specific example embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader spirit and scope of the various embodiments.

[0033] In one embodiment, a safety system **150** of a building **308** (an example occupiable structure) includes a breathable-air supply system **102**, a fill station (e.g., internal air fill station **202**), a smart lock **118**, and an array of sensors $\mathbf{104}_{1\text{-}N}$. The breathable-air supply system **102** facilitates the delivery of breathable air from a source of compressed air **170**. The fill station (e.g., internal air fill station **202**) in a fire-rated evacuation area **350** (e.g., a fire-rated stairwell) of building **308** supplies breathable air to an emergency personnel $\mathbf{122}_{1\text{-}N}$. The smart lock **118** associated with the breathable-air supply system **102** automatically unlocks one or more location(s) (e.g., locations **370** such as fire-rated evacuation area **350** and others to be discussed below) of the breathable-air supply system **102** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ to access the breathable air during an emergency state **380** of the building **308** The array of sensors $\mathbf{104}_{1\text{-}N}$ associated with the breathable-air supply system **102** is configured to detect the emergency state **380** of the building **308**.

[0034] The smart lock **118** may automatically lock the one or more location(s) **370** of the breathable-air supply system **102** when the emergency state **380** ends and a normal state **390** of the building **308** is detected. The breathable-air supply system **102** may be housed in an air storage subsystem (e.g., air storage system **206**) appurtenant to the building **308**. The smart lock **118** associated with the breathable-air supply system **102** may include a lock state **152** and an unlock state **154**. The lock state **152** and the unlock state **154** of the smart lock **118** may be determined based on a sensory data **172** (e.g., shown as part of array of sensors $\mathbf{104}_{1\text{-}N}$) of the array of sensors $\mathbf{104}_{1\text{-}N}$ within the breathable-air supply system **102**.

[0035] The breathable-air supply system **102** may include a video camera **174** in the one or more location(s) **370** required by the emergency personnel $\mathbf{122}_{1\text{-}N}$ to access the breathable air during the emergency state **380** of the building **308**. The video camera **174** may capture a visual recording **142** when the one or more location(s) **370** is accessed by anyone in the unlock state **154** The video camera **174** may further record audio communication **144** ambient to the one or more location(s) **370**. The visual recording **142** and/or the audio communication **144** may be communicated to a breathable air supply command center **110** (e.g., a remote fire command center, an onsite fire command center) and/or a fire command room (e.g., a fire control room **222**). In addition, the breathable-air supply system **102** may automatically transcribe the audio communication **144** and/or the visual recording **142** of the one or more location(s) **370**.

[0036] The breathable-air supply system **102** may automatically provide a situational awareness recommendation **146** to the a breathable air supply command center **110** and/or the fire command room. The situational awareness recommendation **146** may be provided by using an artificial intelligence algorithm **148** (e.g., executing as part of software module **116** of a cloud computing network **106**) based on a regression analysis **160** of the sensory data **172**

[0037] The array of sensors $\mathbf{104}_{1\text{-}N}$ may include a carbon monoxide sensor **416**, a carbon dioxide sensor **418**, an oxygen level sensor **420**, a nitrogen level sensor **422** a hydrocarbon sensor **424**, a moisture sensor **426** and/or a pressure sensor **428** The carbon monoxide sensor **416** may trigger the emergency state **380** when a level of ambient carbon monoxide exceeds a first predetermined threshold value (e.g., 5 parts per million (ppm), 10 ppm). The carbon dioxide sensor **418** may trigger the emergency state **380** when a level of ambient carbon dioxide exceeds a second predetermined threshold value (e.g., 1000 ppm, 1200 ppm). The oxygen level sensor **420** may trigger the emergency state **380** when an ambient oxygen level falls outside a predetermined range of values (e.g., between 19.5% and 23.5%). The nitrogen level sensor **422** may trigger the emergency state **380** when a level of nitrogen falls below a third predetermined threshold value (e.g., 75%) and above a fourth predetermined threshold value (e.g., 81%). The hydrocarbon sensor **424** may trigger the emergency state **380** when a condensed hydrocarbon content exceeds a fifth predetermined threshold value (e.g., 5 milligrams per cubic meter of air). The moisture sensor **426** may trigger the emergency state **380** when moisture concentration exceeds a sixth predetermined threshold value (e.g., 24 ppm by volume). The pressure sensor **428** may trigger the emergency state **380** when pressure falls below a seventh predetermined threshold value (e.g., 90 percent of the maintenance pressure specified in a fire code).

[0038] The one or more location(s) **370** may include an exterior mobile air connection panel **214**, an air monitoring closet (e.g., air monitoring system **204**), an air monitoring room, an air storage closet (e.g., air storage system **206**), an air storage room, the fire command center, the fire command room, a fire alarm panel, a software application **190** (e.g., fire safety application **502**) of a computing device $\mathbf{120}_{1\text{-}N}$, a fill station (e.g., internal air fill station **202**) of the building **308** and/or a temporarily established fill station connected to a compressed air source (e.g., source of compressed air **170**) during the emergency state.

[0039] The smart lock **118** associated with the breathable-air supply system **102** may automatically unlock each location **370** of the breathable-air supply system **102** usable during the emergency state **380** of the building **308**. The fire-rated evacuation area **350** of the building **308** may be a stairwell. The array of sensors $\mathbf{104}_{1\text{-}N}$ may, in some embodiments, be understood as a standalone sensor with one or more capabilities discussed herein.

[0040] In another embodiment, a method of a safety system **150** of a building **308** includes facilitating the breathable-air supply system **102** to deliver breathable air from a source of compressed air **170**, and supplying breathable air to an emergency personnel $\mathbf{122}_{1\text{-}N}$ through a fill station (e.g., internal air fill station **202**) in a fire-rated evacuation area **350** (e.g., a stairwell) of the building **308**. The method also includes automatically unlocking smart lock **118** associated with the breathable-air supply system **102** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ during an emergency state **380** of the building **308**. The automatic unlocking of the smart lock **118** permits entry to one or more location(s) **370** of the breathable-air supply system **102** to access the breathable air during the emergency state **380** of the building **308**. In addition, the method includes integrating an array of sensors $\mathbf{104}_{1\text{-}N}$ within the breathable-air supply system **102** to detect the emergency state **380** based on a threshold level (e.g., a first predetermined threshold value, a second predetermined threshold value and so on) of an air quality parameter (e.g., the parameters discussed herein with threshold levels), and configuring the array of sensors $\mathbf{104}_{1\text{-}N}$ to trigger an alert signal **192** to automatically unlock the smart lock **118** on detection of the emergency state **380**.

[0041] The method of the safety system **150** of the building **308** may automatically record an audiovisual incident (e.g., visual recording **142** and/or audio communication **144**) using a video camera **174** when the one or more location(s) **370** of the breathable-air supply system **102** is accessed by the emergency personnel $\mathbf{122}_{1\text{-}N}$ in an unlock state **154** of the smart lock **118**. The method may involve communicating the audiovisual incident to breathable air supply command center **110** (e.g., a remote fire command center, an onsite fire command center) and/or a fire command room through a cloud computing network **106**.

[0042] The smart lock **118** associated with the breathable-air supply system **102** may be accessed using a Radio Frequency Identification (RFID) system, a smart card, a key fob access, a Non-Fungible Token (NFT), a physical key and/or a web-based identification system. The method may involve generate a trigger signal **194** (e.g., based on array of sensors $\mathbf{104}_{1\text{-}N}$) to alert the emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** and/or the fire command room based on a detection (e.g., using array of sensors $\mathbf{104}_{1\text{-}N}$) of tampering of the smart lock **118** associated with the breathable-air supply system **102**.

[0043] FIG. **1** shows a safety system **150** interpretable as a smart locking system of a breathable-air supply system **102** involving remote operation of a smart lock **118** through a cloud computing network **106** (e.g., of a breathable-air supply command center **110**), according to one or more embodiments. The breathable-air supply system **102** may be an interconnected network of components designed to provide for a continuous, unobstructed and reliable source of breathing air to an emergency responder (e.g., a firefighter, emergency personnel $\mathbf{122}_{1\text{-}N}$). The breathable-air supply system **102** may be located in a central part of building **308** (an example occupiable structure) hosting various components thereof. The breathable-air supply system **102** may include a network of air standpipes **302** embedded in a fire-rated channel to supply breathable air.

[0044] Different components of the breathable-air supply system **102** may be communicatively coupled to the breathable-air supply command center **110** and the fire station **112** through the cloud-computing network **106** to enable real-time monitoring thereof. The breathable-air supply system **102** may include an array of sensors $\mathbf{104}_{1\text{-}N}$ to collect real-time sensory data **172** for continuous monitoring of components thereof. The breathable-air supply system **102** may be installed in a fire-rated room (e.g., chamber) of the building **308**. The air standpipes **302** installed within building **308** may be connected to the breathable-air supply system **102** to deliver a safe, instant and constant supply of air replenishment to the emergency responders (e.g., emergency personnel $\mathbf{122}_{1\text{-}N}$, firefighters). The breathable-air supply system **102** may function as a primary command center (e.g., fire control room **222** in an emergency situation) for the specific building **308** in which the particular breathable-air supply system **102** unit is installed, according to one embodiment.

[0045] The array of sensors $\mathbf{104}_{1\text{-}N}$ may be a collection of sensors (e.g., device, module, machine, and/or subsystem) deployed in a specific geometric pattern for collecting and/or processing electrical, electromagnetic and/or acoustic signals within the breathable-air supply system **102** Other forms of signals are within the scope of the exemplary embodiments discussed herein. The array of sensors $\mathbf{104}_{1\text{-}N}$ may also be interpreted as a standalone sensor having one or more capabilities discussed herein in some embodiments. The array of sensors $\mathbf{104}_{1\text{-}N}$ may detect events and/or changes in an environment thereof and send the information to various components of the breathable-air supply system **102** through cloud computing network **106**. The array of sensors $\mathbf{104}_{1\text{-}N}$ may be configured to automatically measure one or more physical inputs from the environment thereof and convert said data into sensory data **172** that can be interpreted by the cloud computing network **106**.

[0046] The cloud computing network **106** may be a computer network that provides network interconnectivity between cloud-based and/or cloud-enabled applications, services, and/or solutions within the network to monitor and manage the maintenance of air replenishment and/or air quality parameters in the breathable-air supply system **102**. The cloud-computing network **106** may store the digital and/or sensory data **172** from the array of sensors $\mathbf{104}_{1\text{-}N}$ to analyze the functionalities of the components in the breathable-air supply system **102**, according to one embodiment. The control module **108** may be a series of standardized units configured to regulate the array of sensors $\mathbf{104}_{1\text{-}N}$ and/or various components in the breathable-air supply system **102** based on sensory data **172** collected by the array of sensors $\mathbf{104}_{1\text{-}N}$, according to one embodiment.

[0047] The breathable-air supply command center **110** (e.g., onsite fire command center, remote fire command center, fire control room **222** (example fire command room)) may be a focal point for generation, dispatch and management of monitoring and maintenance of air replenishment in the breathable-air supply system **102** The breathable-air supply command center **110** may optimally manage the resources in the cloud-computing network **106** to detect and/or rectify anomalies (e.g., air contamination, particulates, pollutants, etc.) found in the breathable-air supply system **102** by the array of sensors $\mathbf{104}_{1\text{-}N}$, according to one embodiment.

[0048] The fire station **112** may be the designated housing for emergency responders (and emergency personnel $\mathbf{122}_{1\text{-}N}$) and firefighting apparatuses thereof to enable the fastest response possible to breathable-air supply system **102** customers (e.g., fire safety personnel including emergency personnel $\mathbf{122}_{1\text{-}N}$, rescuers, etc.) and emergency personnel $\mathbf{122}_{1\text{-}N}$. The computing device $\mathbf{120}_{1\text{-}N}$ may be a digital electronic machine (e.g., a data processing device) communicatively coupled to the cloud computing network **106** that can be programmed to carry out an automatic sequence of arithmetic and/or logical operations (e.g., computation) to enable the emergency personnel $\mathbf{122}_{1\text{-}N}$ to monitor and/or recalibrate the components of the breathable-air supply system **102**, according to one embodiment. As shown in FIG. **1**, computing device $\mathbf{120}_{1\text{-}N}$ may execute software application **190** (e.g., fire safety application **502**) thereon that may enable access to the one or more location(s) **370**.

[0049] The sensor module **114** may be a series of standardized units in the cloud computing network **106** that are configured to regulate the array of sensors $\mathbf{104}_{1\text{-}N}$ and/or various components in the breathable-air supply system **102** based on sensory data **172** collected by the array of sensors $\mathbf{104}_{1\text{-}N}$. The breathable-air supply command center **110**, the breathable-air supply system **102**, and/or the emergency personnel **122** may reconfigure the sensor module **114** to regulate the array of sensors $\mathbf{104}_{1\text{-}N}$ based on sensory data **172** during the emergency situation (e.g., emergency state **380**), according to one embodiment.

[0050] The software module **116** may be a series of instructions and/or a set of rules to be followed in problem-solving operations to automatically detect an error and/or a fault (e.g., increased temperature, variation in pressure, leakage, anomalies in the air quality parameters, etc.) in any of the components (e.g., internal air fill station **202**, air monitoring system **204**, air storage system **206**, etc.) and/or air standpipe **302** of the breathable-air supply system **102** and generate a recommendation to rectify the error and/or fault using artificial intelligence, machine learning methods, and/or other predefined algorithms to optimally modify, maintain, and/or manage the resources of the breathable air-supply system **102** FIG. **2** shows array of sensors $\mathbf{104}_{1\text{-}N}$ as part of internal air fill station **202** air monitoring system **204**, air storage system **206**, a power backup unit **208** (to be discussed below), an alarm system **210** (to be discussed below), isolation and bypass control system **212**, and fire control room **222** for example purposes.

[0051] The smart lock **118** of the breathable air supply system **102** may be a programmable electromechanical device to automatically secure the various units of the breathable-air supply system **102** from unauthorized access and/or tampering. The smart lock **118** may be integrated with each unit of the breathable-air supply system **102** (e.g., air monitoring system **204**, internal air fill station **202** air storage system **206**, isolation and bypass control system **212** power backup unit **208**, alarm system **210**, and an exterior mobile air connection panel **214** (to be discussed below)) to secure the units from unauthorized access, intrusion and/or tampering, according to one embodiment. In one or more embodiments the smart lock **118** may include a securing mechanism configured to automatically lock and/or unlock various units of the breathable-air supply system **102** once an instruction (e.g., triggering instructions from the array of sensors $\mathbf{104}_{1\text{-}N}$) is received thereby from the breathable-air supply command center **110** and/or an authorized user device (e.g., computing device $\mathbf{120}_{1\text{-}N}$).

[0052] In another embodiment, the smart lock **118** may be integrated with the array of sensors $\mathbf{104}_{1\text{-}N}$ to detect the emergency state **380** (e.g., one or more drops in air quality parameters) of building **308**. The smart lock **118** associated with the breathable-air supply system **102** may be programmed to automatically unlock the one or more locations **370** (e.g., each location **370**) of the breathable-air supply system **102** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ to access the breathable air once the emergency state **380** of the building **308** is detected by the array of sensors $\mathbf{104}_{1\text{-}N}$.

[0053] In a further embodiment, the authorized device (e.g., computing device $\mathbf{120}_{1\text{-}N}$) may include an RFID system, a wireless protocol, a smart card, key fob access, an NFT, a physical key, biometric access, a web-based identification system, etc. The smart lock **118** may be associated with the one or more locations **370** of the breathable-air supply system **102** (e.g., internal air fill station **202**, air monitoring system **204**, air storage system **206**, power backup unit **208**, alarm system **210**, isolation and bypass control system **212**, exterior mobile air connection panel **214**, fire control room **222**, etc.) to secure the system from any intrusion therein.

[0054] The smart lock **118** may include a tamper switch (not shown; e.g., associated with the array of sensors $\mathbf{104}_{1\text{-}N}$) to automatically trigger an alert signal (e.g., alert signal **192**) when the intrusion within the breathable-air supply system **102** occurs. The alert signal **192** may serve as an alarm to the emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** (e.g., a remote fire command center, an onsite fire command center) and/or the fire command room (e.g., fire control room **222**) indicating that tampering of the smart lock **118** has been detected using the computing device $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) and/or array of sensors $\mathbf{104}_{1\text{-}N}$ through the software application (e.g., software application **190**) implementation.

[0055] In another embodiment, the smart lock **118** may be made of metallic material (e.g. 18 gauge carbon steel) to protect the breathable-air supply system **102** from intrusion and/or physical damage. The smart lock **118** may further be made of a weather-resistant and/or ultraviolet solar radiation-resistant and/or infrared solar radiation-resistant material that prevents the smart lock **118** from corrosion and/or deterioration of material due to prolonged exposure to harsh environmental and/or weather conditions. In addition, the smart lock **118** may include video camera **174** to capture a visual recording **142** and/or an audio communication **144** when the breathable-air supply system **102** is accessed by anyone in the unlock state **154**, according to one embodiment.

[0056] The array of sensors **104**$_{1-N}$ may continuously monitor parameters of the breathable-air supply system **102** such as temperature, pressure, air components, air replenishment, availability of air, air leakage, fire detection, airflow, power supply, and/or other breathable air parameters (e.g. oil mist and particulates, odor). The array of sensors **104**$_{1-N}$ may be configured to detect the emergency state **380** of building **308** whenever a specific parameter of the breathable-air supply system **102** is above and/or below predefined threshold values (e.g., as discussed above) and/or outside predetermined range(s) of values. During the emergency state **380** of building **308**, the array of sensors **104**$_{1-N}$ may generate an electrical signal to automatically unlock the smart lock **118** of the one or more location(s) **370** of the breathable-air supply system **102** usable by the emergency personnel **122**$_{1-N}$. The automatic unlocking of the smart lock **118** may permit entry to the one or more location(s) **370** of the breathable-air supply system **102** to access the breathable air during the emergency state **380** of building **308**, according to one embodiment. The computing device **120**$_{1-N}$ may enable emergency personnel **122**$_{1-N}$ to monitor and/or recalibrate components of the breathable-air supply system **102** based on sensory data **172** of the array of sensors **104**$_{1-N}$, according to one embodiment.

[0057] The emergency personnel **122**$_{1-N}$ may be an entity/entities and/or person(s) authenticated by the breathable-air supply command center **110** to access and/or manage the resources in the breathable-air supply system **102** through the cloud computing network **106**. Each emergency personnel **122**$_{1-N}$ of the breathable-air supply system **102** may be given a dedicated web interface where a user thereof can monitor breathable-air supply system **102** view historical data, use mobile controls, initiate air tests, and/or obtain printed reports, etc. associated with different units of the breathable-air supply system **102**

[0058] FIG. **1** illustrates the remote operation of the smart lock **118** through cloud computing network **106** of breathable-air supply command center **110**, according to one embodiment. In circle '**1**', the real-time sensory data **172** of array of sensors **104**$_{1-N}$ from each units of the breathable-air supply system **102** (e.g., internal air fill station **202** air monitoring system **204**, air storage system **206**, power backup unit **208**, alarm system **210**, isolation and bypass control system **212**, exterior mobile air connection panel **214**, fire control room **222**, etc.) may be communicated to the breathable air supply command center **110** and/or emergency personnel **122**$_{1-N}$ through the cloud computing network **106**.

[0059] In circle '**2**', the cloud computing network **106** may automatically detect an error and/or fault (e.g., increased temperature, variation in pressure, leakage, anomalies in the air quality parameters, etc.) in any of the components (e.g., internal air fill station **202**, air monitoring system **204**, air storage system **206**, etc.) and/or air standpipes **302** of the breathable-air supply system **102** using the software module **116**. In circle '**3**', the breathable air supply command center **110** and/or the fire station **112** may regulate the array of sensors **104**$_{1-N}$ of the breathable-air supply system **102** using the sensor module **114** of the cloud computing network **106**. In circle '**4**', the cloud computing network **106** may automatically generate and send a recommendation to rectify errors/faults using software module **116**. In circle '**5**', the emergency personnel **122**$_{1-N}$ may automatically send signals via computing device **120**$_{1-N}$ to unlock a particular component or a number of components of the breathable-air supply system **102**

[0060] FIG. **2** shows breathable-air supply system **102** of FIG. **1** in more detail. The array of sensors **104**$_{1-N}$ associated with the smart lock **118** may include a motion sensor **220** in the one or more location(s) **370** (e.g., the air monitoring system **204**, internal air fill station **202** air storage system **206**, isolation and bypass control system **212** power backup unit **208**, the alarm system **210**, exterior mobile air connection panel **214**) of the breathable-air supply system **102** The motion sensor **220** may be an electronic device that detects a movement and/or presence of nearby emergency personnel **122**$_{1-N}$, people, and/or objects in the one or more location(s) **370** of the breathable-air supply system **102**. The motion sensor **220** may generate a trigger signal (e.g., trigger signal **194**) to activate the video camera **174** when the breathable-air supply system **102** is being accessed by anyone (e.g., emergency personnel **122**$_{1-N}$, unauthorized persons, etc.) in the unlock state **154**.

[0061] The motion sensor **220** may further generate a trigger signal (e.g., trigger signal **194**) to activate the video camera **174** when tampering with the smart lock **118** is detected. In addition, the motion sensor **220** may activate the video camera **174** when anomalies in the environment associated with the one or more location(s) **370** are detected by the array of sensors **104**$_{1-N}$. The video camera **174** may capture the visual recording **142** and/or audio communication **144** ambient to the one or more location(s) **370**. The video camera **174** may further communicate the audiovisual incident (e.g., based on visual recording **142** and/or audio communication **144**) to the emergency personnel **122**$_{1-N}$, breathable air supply command center **110** (e.g., an onsite fire command center, a remote fire command center) and/or a fire control room **222** (example fire command room) via computing devices **120**$_{1-N}$ (e.g., smart phone, tablet, etc.) through the cloud computing network **106**. Further, the breathable-air supply system **102** may automatically transcribe the audio communication **144** and/or the visual recording **142** ambient to the one or more locations **370**, according to one embodiment.

[0062] The array of sensors **104**$_{1-N}$ may detect a normal state **390** of building **308**. Normal state **390**, as discussed herein, may refer to a state where no compromise of components of breathable-air supply system **102** is detected. The array of sensors **104**$_{1-N}$ may generate an electrical signal to automatically lock the smart lock **118** of the breathable-air supply system **102** whenever the emergency state **380** ends and normal state **390** of the building **308** is detected. Lock state **152** and unlock state **154** of the smart lock **118** may be determined based on sensory data **172** of the array of sensors **104**$_{1-N}$ within the breathable-air supply system **102**. Further, the smart lock **118** may be remotely accessed (e.g., unlocked and/or locked) by the emergency personnel **122**$_{1-N}$, breathable air supply command center **110** (e.g., an onsite fire command center, a remote fire command center) and/or a fire control room **222** via computing devices **120**$_{1-N}$ (e.g., smart phone, tablet, etc.) through the implementation of software application **190**. Software application **190** may activate the array of sensors **104**$_{1-N}$ to generate the electrical signal to lock and/or unlock the smart lock **118** through cloud computing network **106**, according to one embodiment.

[0063] In another embodiment, the smart lock **118** may include a dual authentication system to unlock the smart lock **118** during the normal state **390** of building **308**. One example authentication system may include biometric authentication (e.g., audiovisual identification, fingerprint identification, etc.). Other example authentication systems may include but are not limited to a rapid access system **304** an RFID system, a wireless protocol, a smart card, key fob access, an NFT, a physical key, and/or a web-based identification system.

[0064] The smart lock **118** associated with the internal air fill station **202** may secure breathable-air supply system **102** from intrusion and/or tampering. The smart lock **118** may be programmed to automatically unlock the one or more location(s) **370** of internal air fill station **202** usable by emergency personnel $\mathbf{122}_{1\text{-}N}$ during the emergency state **380** of building **308**. Further, the smart lock **118** may be programmed to automatically lock the one or more location(s) **370** of the internal air fill station **202** accessed by the emergency personnel $\mathbf{122}_{1\text{-}N}$ when the emergency state **380** of building **308** ends and the normal state **390** of the building **308** is detected, according to one embodiment. In addition, the internal air fill station **202** may include an air fill charge rate controller, an emergency status indicator, an actuator control valve, a Self-Contained Breathing Apparatus (SCBA) connector unit, a radio repeater, the array of sensors $\mathbf{104}_{1\text{-}N}$, and smart lock **118**, according to one embodiment.

[0065] The air monitoring system **204** may be a collection of elements and/or components that are organized for checking and/or recording the air quality within breathable-air supply system **102**. The air monitoring system **204** may include an air quality display unit, an air quality analysis unit, a compressor, array of sensor units $\mathbf{104}_{1\text{-}N}$, and smart lock **118** according to one embodiment. The smart lock **118** may be associated with the air monitoring system **204** to secure breathable-air supply system **102** from intrusion and/or tampering. The smart lock **118** may be programmed to automatically unlock the one or more location(s) **370** of the air monitoring system **204** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ during emergency state **380** of the building **308**. In addition, the smart lock **118** may be programmed to automatically lock the one or more location(s) **370** of the air monitoring system **204** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ on detection of normal state **390** of the building **308**, according to one embodiment.

[0066] The air quality display unit (not shown) may exhibit the air parameters captured and analyzed by the air quality analysis unit (not shown) of the air monitoring system **204** in real-time. The air quality display unit may be a smart device (e.g., an Android™ based computing device, an iOS® based computing device such as an electronic tablet, electronic notebook, etc.) having a mini touchscreen for visual presentation of the quality of air parameters analyzed by the air analysis unit based on sensory data **172** of the array of sensors $\mathbf{104}_{1\text{-}N}$, according to one embodiment.

[0067] In another embodiment, the air quality display unit may be an electromechanical device installed at the key locations **370** of building **308** and may be made of a material having fire-rated capabilities. The air quality display unit may communicate through wired and/or wireless means to external devices including computing systems (e.g., computing device $\mathbf{120}_{1\text{-}N}$). The array of sensors $\mathbf{104}_{1\text{-}N}$ may be configured to automatically trigger recording of the visual incidents discussed above using a camera (e.g., video camera **174**) installed on the air quality display unit communicatively coupled to the computing device $\mathbf{120}_{1\text{-}N}$ (e.g., smart device, iPad®, tablet, etc.) to provide visual incidents at the fire ground. The air quality display unit may help to monitor the air quality status in the breathable-air supply system **102** remotely in real-time via mobile devices and/or a breathable air supply command center **110** and/or other key locations **370** of the breathable-air supply system **102** and/or building **308**.

[0068] The air quality analysis unit may be a sensor-based device to automatically detect air quality, moisture and/or pressure in the breathable-air supply system **102**. The air quality analysis unit may include air quality sensors **414** (e.g., part of array of sensors $\mathbf{104}_{1\text{-}N}$) for continuous monitoring (e.g., 365 days/year) of the breathable-air components. The breathable-air components may include carbon monoxide, carbon dioxide, nitrogen, oxygen, moisture, pressure, hydrocarbon levels, and other breathable air parameters (e.g., oil mist and particulates, odor, etc.). The air quality sensors **414** may include a carbon monoxide sensor **416**, a carbon dioxide sensor **418**, a nitrogen level sensor **422** an oxygen level sensor **420**, a moisture sensor **426**, a pressure sensor **428**, a hydrocarbon sensor **424**, and/or other sensors (e.g. oil mist and particulates sensor, odor sensor, etc.). The air quality display unit may display air quality analysis unit data (e.g., the breathable-air components, parameters, etc.), according to one embodiment.

[0069] The air quality analysis unit may use a digital processor unit **430** to check deviation in the air quality parameters in the breathable-air supply system **102**. The air quality analysis unit may generate an alert signal (e.g., alert signal **192**) if the air-quality parameters are above and/or below predefined threshold levels discussed above. The alert signal **192** may notify emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** (e.g., an onsite fire command center, a remote fire command center) and/or a fire control room **222** via computing devices $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) through the cloud computing network **106** that the emergency state **380** is detected within the building **308**. During emergency state **380**, the array of sensors $\mathbf{104}_{1\text{-}N}$ may generate electrical signals to automatically unlock the smart lock **118** at the one or more location (s) **370** of the breathable-air supply system **102** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$.

[0070] In an additional embodiment, the air quality analysis unit of the air monitoring system **204** discussed above may be integrated with cloud computing network **106**. The breathable-air supply command center **110** of safety system **150** may be communicatively coupled to the breathable-air supply system **102** and the computing device $\mathbf{120}_{1\text{-}N}$/emergency personnel $\mathbf{122}_{1\text{-}N}$ through the cloud-computing network **106** The air quality analysis unit may continuously send sensory data **172** of the array of sensors $\mathbf{104}_{1\text{-}N}$ of the breathable-air supply system **102** to the breathable-air supply command center **110**, fire station **112** and/or emergency personnel $\mathbf{122}_{1\text{-}N}$ through a cloud computing network **106**. The cloud computing network **106** may enable the breathable-air supply command center **110** and emergency personnel $\mathbf{122}_{1\text{-}N}$ to remotely manage and/or continuously monitor (e.g., full vigilance 365 days/year) the air-quality parameters in the breathable-air supply system **102** in real-time via computing device $\mathbf{120}_{1\text{-}N}$ through implementation via software application **190**, according to one embodiment.

[0071] As discussed above, the cloud computing network **106** may use sensor module **114** and software module **116** to check deviations in the air-quality parameters in the breathable-air supply system **102** The cloud computing network **106** may generate an alert signal **192** if the air-quality parameters are above and/or below predefined threshold values discussed above. The alert signal **192** may notify the emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air-supply command center **110** (e.g., an onsite fire command center, a remote fire command center) and/or a fire control room **222** (example fire command room) via computing device $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) that the emergency state **380** is detected. During emergency state **380**, the array of sensors $\mathbf{104}_{1\text{-}N}$ may be configured to generate electrical signals to automatically unlock the smart lock **118** of the one or more location(s) **370** of the breathable-air supply system **102** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$, according to one embodiment.

[0072] In one implementation, air monitoring system **204** may include a compressor (not shown); said compressor may be a mechanical device that increases the pressure of a gas in the breathable-air supply system **102**. The compressor may be integrated into the air quality analysis unit of the air monitoring system **204** discussed above. The compressor may increase the air pressure in the breathable-air supply system **102** when a deviation in air-quality parameters is detected by the air quality sensors **414** to enable automated purging of air in the breathable-air supply system **102** according to one embodiment.

[0073] An air quality sensor **414** may activate a control valve to automatically purge the breathable-air supply system **102** upon detection of a deviation in the air-quality parameters above and/or below predefined threshold values (and/or ranges). The automatic purging may be done to purge a certain amount of air out of breathable-air supply system **102**, while the air quality analysis unit may continue monitoring the air-quality parameters. After purging, if the air-quality parameters are less/more than the predefined threshold values (and/or ranges), then the array of sensors $\mathbf{104}_{1\text{-}N}$ may generate an alert signal **192** that the emergency state **380** is detected. The array of sensors $\mathbf{104}_{1\text{-}N}$ may notify the emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** (e.g., a remote fire command center, an onsite fire command center) and/or a fire command room (e.g., fire control room **222**) via computing devices $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) through the cloud computing network **106** that a fault has occurred in the particular unit of the breathable-air supply system **102** that needs immediate attention/correction, according to one embodiment.

[0074] An air fill charge rate controller (not shown) may be a hardware device that regulates the flow of breathable air in internal air fill station **202** based on sensory data **172** of the array of sensors $\mathbf{104}_{1\text{-}N}$. The air fill charge rate controller may automatically regulate the maximum allowable pressure in SCBA cylinders while replenishing air through internal air fill station **202** and control the charge rate of the air filling to avoid hot fills in the SCBA cylinders. The array of sensors $\mathbf{104}_{1\text{-}N}$ may include an air flow sensor **404** to automatically measure and/or regulate the flow rate of air within the internal air fill station **202**. The airflow sensor **404** may utilize mechanical and/or electrical means to measure changes in the physical attributes of the air within safety system **150** and calculate flow thereof. The air flow sensor **404** may continuously monitor the air flow rate within the internal air fill station **202**. The airflow sensor **404** may generate the alert signal **192** during a catastrophic event (e.g. malfunctioning of equipment, other anomalies in the air parameters, an event associated with emergency state **380** etc.) and/or if the charge rate of the air flow is not within a predefined threshold limit (e.g., high air flow beyond the pre-described quantity of an SCBA maximum flow). The alert signal **192** may notify emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** (e.g., an onsite fire command center, a remote fire command center) and/or a fire control room **222** (example fire command room) via computing devices $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) that the emergency state **380** is detected through cloud computing network **106**, according to one embodiment.

[0075] In one embodiment, the array of sensors $\mathbf{104}_{1\text{-}N}$ may automatically unlock the smart lock **118** of internal air fill station **202** in which the emergency state **380** is detected. In another embodiment, the air flow sensor **404** may generate an electrical signal to automatically activate actuator valves (not shown) to shut down and/or isolate internal air fill station **202** when the emergency state **380** is detected.

[0076] According to one embodiment, internal air fill station **202** may include an emergency status indicator (not shown). The array of sensors $\mathbf{104}_{1\text{-}N}$ (e.g., smoke sensor **406**, etc.) associated with internal fill station **202** may be configured to detect a low and/or a poor visibility state (example emergency state **380**) within building **308**. In other words, the array of sensors $\mathbf{104}_{1\text{-}N}$ may detect an emergency state **380** of building **308** during low and/or poor visibility conditions. During the emergency state **380**, the array of sensors $\mathbf{104}_{1\text{-}N}$ may generate an electrical signal to automatically unlock the smart lock **118** of the one or more location(s) **370** of the breathable-air supply system **102** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$. The array of sensors $\mathbf{104}_{1\text{-}N}$ may further generate the electrical signal to activate the emergency status indicator when the emergency state **380** of building **308** is detected. The emergency status indicator may be a signal unit that helps the emergency personnel $\mathbf{122}_{1\text{-}N}$ identify internal air fill station **202** in critical situations (e.g., low or poor visibility during fire and/or smoke, etc.).

[0077] According to one embodiment, the emergency status indicator may include indication systems associated with internal air fill station **202** serving as status indicators. These indication systems may facilitate the emergency responders, emergency personnel $\mathbf{122}_{1\text{-}N}$ and/or firefighters in locating internal air fill station **202** under low visibility conditions via blue light, strobe light, and/or white light, etc.

[0078] In another embodiment, the emergency status indicator associated with internal air fill station **202** may include a thermal imaging marker (TIC) (not shown) and/or glow locators (not shown). The TIC and/or the glow locators may be integrated with internal air fill station **202** and may include thermal imaging cameras for quick decision-making on the part of the firefighters, emergency personnel $\mathbf{122}_{1\text{-}N}$ and/or emergency responders and serving as indicators of the directions to move along in limited visibility conditions.

[0079] The actuator control valve(s) associated with internal air fill station **202** may be a hardware and/or software control mechanism that automatically open and close to control the flow of air in internal air fill station **202** and/or other components of breathable-air supply system **102** remotely during the emergency state **380** of the building **308**, according to one embodiment. The actuator control valve(s) may be remotely controlled by isolation and bypass control system **212**. In addition, the actuator control valve(s) may be controlled by breathable-air supply command center **110** (e.g., an onsite fire command center, a remote fire command center) and/or a fire control room **222** (example fire command room) and/or emergency personnel $\mathbf{122}_{1\text{-}N}$ via computing device $\mathbf{120}_{1\text{-}N}$ through the cloud computing network **106**. Based on sensory data **172** of the array of sensors $\mathbf{104}_{1\text{-}N}$, the actuator control valve(s) may be able to automatically isolate and/or bypass internal air fill station **202** in which a fault has occurred, according to one embodiment.

[0080] An SCBA connector unit (not shown) may be a device and/or means for securing an SCBA cylinder hose to internal air fill station **202** to allow breathable air to flow from internal air fill station **202** to an SCBA cylinder for replenishment thereof and to allow easy disconnection after the replenishment, according to one embodiment.

[0081] According to one embodiment, internal air fill station **202** may include a radio repeater. The radio repeater may be integrated with and/or be within internal air fill station **202** to increase an area of coverage and robustness of communication between firefighters, emergency personnel $\mathbf{122}_{1\text{-}N}$ and/or emergency responders and breathable air supply command center **110**. The radio repeater may repeat a radio signal received at a first frequency during transmission thereof at a second frequency. The radio repeater may be located at a place where a virtual Line-of-Sight (LoS) to all radios in safety system **150** is possible, according to one embodiment.

[0082] The breathable-air supply system **102** may further include air storage system **206**. Air storage system **206** may be an assembly of equipment organized for stocking and/or managing the breathable air in the breathable-air supply system **102** for replenishing the SCBA cylinders. Air storage system **206** may further include storage tanks (not shown), a calibration system (not shown), a primary storage tank (not shown), a booster pump (not shown), an array of sensors $\mathbf{104}_{1\text{-}N}$, and smart lock **118**. The smart lock **118** associated with air storage system **206** may secure breathable-air supply system **102** from intrusion and/or unauthorized access. The smart lock **118** may be programmed to automatically unlock one or more locations **370** of air storage system **206** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ during emergency state **380** of building **308**, according to one embodiment.

[0083] A storage tank may be a breathable air repository where the breathable air is stocked for replenishing the SCBA cylinders. The air stored in the storage tank may be supplied to internal air fill station **202** through a primary storage tank to refill the SCBA cylinders. The primary storage tank may be a set of breathable air storage tanks that is used to supply breathable air to internal air fill station **202** of the breathable-air supply system **102** to enable refilling one or more SCBA cylinders. The booster pump may be configured between the storage tanks and the primary storage tank from which air is drawn to internal air fill station **202**. The booster pump may help transfer air from the storage tanks to the primary storage tank when required. The booster pump may also help refill the SCBA cylinders within and/or less than 2 minutes once connected to internal air fill station **202**. The booster pump may be calibrated by using the calibration system to maintain an optimum level of pressure in the primary storage tank to supply breathable air to internal air fill station **202** The calibration system may have an actuator valve to bypass air storage system **206** once a mobile air connection unit **218** is connected to breathable-air supply unit **102**, according to one embodiment.

[0084] The array of sensors $\mathbf{104}_{1\text{-}N}$ (e.g., pressure sensors) associated with air storage system **206** may continuously monitor the air pressure in the primary storage tank. If the air pressure in the primary storage tank is less and/or more than the optimal level of pressure (e.g., 6000 pounds per square inch (PSI)), the array of sensors $\mathbf{104}_{1\text{-}N}$ may automatically activate the booster pump. The booster pump may be configured to maintain the air pressure in the primary storage tank at an optimal level of pressure (e.g., 6000 PSI) to enable airflow to internal air fill station **202**. If the air pressure of the primary storage tank goes beyond and/or below predefined limits, the booster pump may transfer air between the storage tanks and the primary storage tank to maintain the air pressure of the primary storage tank within the predefined limits, according to one embodiment. Low-pressure air may drive pistons within the booster pump to enable maximization of air within the storage tanks, according to one embodiment. In another embodiment, the array of sensors $\mathbf{104}_{1\text{-}N}$ may automatically activate the actuator valve within the calibration system to bypass air storage system **206** once mobile air connection unit **218** is connected to the breathable-air supply unit **102**

[0085] In another embodiment, if the booster pump fails to maintain the air pressure of the primary storage tank at the optimal level of pressure (e.g. 6000 PSI), the array of sensors $\mathbf{104}_{1\text{-}N}$ may generate an alert signal **192** to notify the emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** (e.g., a remote fire command center, an onsite fire command center) and/or a fire control room **222** (example fire command room) via computing devices $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) that the emergency state **380** is detected within breathable-air supply unit **102** During the emergency state **380**, the array of sensors $\mathbf{104}_{1\text{-}N}$ may generate electrical signals to automatically unlock the smart lock **118** associated with air storage system **206** (e.g., the calibration system, booster pump, etc.) usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$.

[0086] In yet another embodiment, the calibration system may use an array of sensors $\mathbf{104}_{1\text{-}N}$ to recalibrate the booster pump to maintain the optimum level of pressure in the primary storage tank during the emergency state **380**. Further, the actuator valve within the calibration system may be remotely operated by emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** (e.g., a remote fire command center, an onsite fire command center) and/or a fire control room **222** (example fire command room) via computing devices $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) by using the array of sensors $\mathbf{104}_{1\text{-}N}$ within breathable-air supply system **102** through cloud computing network **106**.

[0087] In yet another embodiment, isolation and bypass control system **212** may be a set of components working together to automatically switch ON/OFF and/or bypass internal air fill station **202** when a fault and/or error is detected within and/or adjacent to a particular internal air fill station **202**. Isolation and bypass control system **212** may include an addressable motherboard and circuitry associated therewith, smart lock **118**, and array of sensors $\mathbf{104}_{1\text{-}N}$. Isolation and bypass control system **212** may be associated with smart lock **118** to secure breathable-air supply system **102** from intrusion and/or tampering. Smart lock **118** may be programmed to automatically unlock one or more location

(s) **370** of isolation and bypass control system **212** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ during emergency state **380** of the building **308**.

[0088] The array of sensors $\mathbf{104}_{1\text{-}N}$ associated with isolation and bypass control system **212** may continuously monitor air-quality parameters in breathable-air supply system **102**. The array of sensors $\mathbf{104}_{1\text{-}N}$ associated with isolation and bypass control system **212** may be programmed to activate the actuator control valves to automatically bypass and/or isolate a particular air fill panel (e.g., internal air fill station **202**) on the detection of deviation of air-quality parameters from the predefined threshold values (and ranges) discussed above based on sensory data **172** of the array of sensors $\mathbf{104}_{1\text{-}N}$. Actuator control valves provided with each fill panel (e.g., internal air fill station **202**) in a floor of building **308** may be turned ON/OFF such that a combination of the fill panels may be isolated as per requirements, according to one embodiment.

[0089] In another embodiment, power backup unit **208** may be a device and/or a system to provide instantaneous, uninterruptible power to components of breathable-air supply system **102** during the emergency state **380** of building **308**. Power backup unit **208** may be associated with a smart lock **118** to secure breathable-air supply system **102** from intrusion. Smart lock **118** may be programmed to automatically unlock one or more location(s) **370** (e.g., each location **370**) of power backup unit **208** usable by emergency personnel $\mathbf{122}_{1\text{-}N}$ during an emergency state **380** of building **308**. The array of sensors $\mathbf{104}_{1\text{-}N}$ (e.g., power sensor **412**, etc.) associated with power backup unit **208** may continuously monitor the power supply within the breathable-air supply system **102** The array of sensors $\mathbf{104}_{1\text{-}N}$ may activate power backup unit **208** if any anomalies in the power supply are detected (e.g., deviation in current, voltage, power and/or power quality parameters of breathable-air supply system **102** etc.).

[0090] In another embodiment, an alarm system **210** may be a device to transmit and/or broadcast an alert signal **192** when emergency state **380** of building **308** is detected. Alarm system **210** may be associated with a smart lock **118** to secure breathable-air supply system **102** (or, alarm system **210**) from intrusion and/or tampering. Smart lock **118** may be programmed to automatically unlock one or more location(s) **370** (e.g., each location **370**) of alarm system **210** usable by emergency personnel $\mathbf{122}_{1\text{-}N}$ during emergency state **380** of building **308**. The array of sensors $\mathbf{104}_{1\text{-}N}$ associated with breathable-air supply system **102** may generate an alert signal **192** if anomalies (e.g., increased temperature, variation in pressure, leakage, anomalies in the air-quality parameters, availability of air, etc.) in any of the components of the breathable-air supply system **102** are detected thereby. Alert signal **192** may activate alarm system **210** to enable alarm system **210** to notify emergency personnel $\mathbf{122}_{1\text{-}N}$, breathable air supply command center **110** (e.g., a remote fire command center, an onsite fire command center) and/or a fire control room **222** (example fire command room) via computing devices $\mathbf{120}_{1\text{-}N}$ (e.g., smart phone, tablet, etc.) through cloud computing network **106** that emergency state **380** of building **308** is detected, according to one embodiment.

[0091] In yet another embodiment, mobile air connection unit **218** may be a vehicle (e.g., a fire truck) equipped with a breathable air replenishment system to readily supply the breathable air to the breathable-air supply system **102** in case of an emergency. Exterior mobile air connection panel **214** may be a console provided at a periphery of building **308** to readily access and supply the breathable air to components of breathable-air supply system **102** Exterior mobile air connection panel **214** may include an external isolation and bypass control system **216**, an array of sensors $\mathbf{104}_{1\text{-}N}$, and a smart lock **118**. Exterior mobile air connection panel **214** may be associated with smart lock **118** to secure breathable-air supply system **102** (or, exterior mobile air connection panel **214**) from intrusion and/or tampering. Smart lock **118** may be programmed to automatically unlock exterior mobile air connection panel **214** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$ during emergency state **380** of building **308**. External isolation and bypass control system **216** may be a set of components working together to isolate and/or bypass air storage system **206** to enable air supply from mobile air connection unit **218** through exterior mobile air connection panel **214**.

[0092] In another embodiment, external isolation and bypass control system **216** may isolate and/or bypass air storage system **206** when the array of sensors $\mathbf{104}_{1\text{-}N}$ detects emergency state **380**. External isolation and bypass control system **216** may use the array of sensors $\mathbf{104}_{1\text{-}N}$ to isolate and/or bypass air storage system **206**.

[0093] In another embodiment, fire control room **222** (example fire command room) may enable emergency personnel $\mathbf{122}_{1\text{-}N}$ to manage and/or continuously monitor components of breathable-air supply system **102** in real-time. Fire control room **222** may be associated with a smart lock **118** to secure breathable-air supply system **102** (or, fire control room **222**) from intrusion. Smart lock **118** may be programmed to automatically unlock fire control room **222** usable by emergency personnel $\mathbf{122}_{1\text{-}N}$ during emergency state **380** of building **308** Sensory data **172** from the array of sensors $\mathbf{104}_{1\text{-}N}$ may be collected in fire control room **222** Fire control room **222** may function as a primary command center for building **308** in which a particular breathable-air supply system **102** is installed, according to one embodiment. Further, fire control room **222** may authenticate emergency personnel $\mathbf{122}_{1\text{-}N}$ to access various components of the breathable-air supply system

[0094] FIG. **3** is a schematic and perspective view of safety system **150** associated with building **308**, according to one or more embodiments. Air standpipes **302** may include a fire-rated tubing and/or hose provided at building **308** to supply breathable air to internal air fill station(s) **202** located on different floors of building **308**. For example, internal air fill station **202** may be located in a fire-rated evacuation area **350** (e.g., a fire-rated stairwell) of building **308** (e.g., a high-rise building, a medium-rise building, a low-rise building, a multistory building, a skyscraper, a warehouse, a shopping mall, a hypermart, an industrial structure, etc.), according to one embodiment.

[0095] Building **308** may be extended to an occupiable structure such as a mid and/or a high-rise building, a large horizontal structure such as a big box retail store, a warehouse and/or a manufacturing plant, a tunnel, a wind turbine, a large marine vessel and a mine shaft. Other variations therein are within the scope of the exemplary embodiments discussed herein.

[0096] Breathable-air supply system **102** may be integrated with a rapid access system **304**. Rapid access system **304** may be an electronic lock and/or a mechanical lock that provides a quick and simple way to lock and/or unlock smart lock **118** through RFID access, smart cards, key fob access, NFTs, keys, biometric access and/or web-based identification systems.

[0097] Breathable-air supply command center **110** may remotely generate an authorized key for emergency personnel $\mathbf{122}_{1\text{-}N}$ through cloud computing network **106** to access and automatically adjust components of the breathable-air supply system **102**. The authorized key may be activated for a particular duration of time. The authorized key may be sent to computing devices $\mathbf{120}_{1\text{-}N}$ (e.g., a smart device, a mobile device, an iPad®, a laptop, a computer) along with the triggering notifications (e.g., security notifications via key fobs, RFID, smart cards), according to one embodiment.

[0098] In addition, along with the mobile, wireless and key fob access control, breathable-air supply system **102** may include rapid access system **304** discussed above. Rapid access system **304** may include a key retention device **310**, a security cabinet **306** and a master key (not shown). Key retention device **310** may be integrated with cloud computing network **106** Key retention device **310** may also be communicatively coupled with breathable-air supply command center **110** Rapid access system **304** may include an automatic sensor that may send a trigger signal **194** to breathable-air supply command center **110** whenever someone tries to access key retention device **310**, according to one embodiment.

[0099] Breathable-air supply command center **110** may generate an access personal identification number (PIN) and send the access PIN to computing device $\mathbf{120}_{1\text{-}N}$ of emergency personnel $\mathbf{122}_{1\text{-}N}$. Key retention device **310** may retain the master key and only release the master key to emergency personnel $\mathbf{122}_{1\text{-}N}$ with authorized PIN codes sent to computing devices $\mathbf{120}_{1\text{-}N}$ thereof. Cloud computing network **106** may have a retrievable audit trail unit (not shown) that may record the date and time when the master key is taken and when the master key is returned by emergency personnel $\mathbf{122}_{1\text{-}N}$. The retrievable audit trail unit may also record the identification of emergency personnel $\mathbf{122}_{1\text{-}N}$ associated with the taking and the return of the master key. The retrievable audit trail unit may further generate comprehensive audit trail reports for future assessments. Security cabinet **306** of rapid access system **304** may house both the master key and other mechanical keys and may provide temporary access to emergency responders, emergency personnel $\mathbf{122}_{1\text{-}N}$ and/or firefighters through the master key, according to one embodiment.

[0100] FIG. **4** shows array of sensors $\mathbf{104}_{1\text{-}N}$ of breathable-air supply system **102**, according to one embodiment. The array of sensors $\mathbf{104}_{1\text{-}N}$ may include air quality sensors **414**, sensor devices **450**, and a digital processor unit **430**. The array of sensors $\mathbf{104}_{1\text{-}N}$ may be configured to detect emergency state **380** of building **308** whenever a certain parameter (e.g., air-quality parameter) of breathable-air supply system **102** is above and/or below the predefined threshold values (and/or ranges) discussed above. During emergency state **380** of building **308**, the array of sensors $\mathbf{104}_{1\text{-}N}$ may generate an electrical signal to automatically unlock smart lock **118** of one or more location(s) **370** (e.g., each location **370**) of the breathable-air supply system **102** usable by the emergency personnel $\mathbf{122}_{1\text{-}N}$, according to one embodiment.

[0101] Air quality sensors **414** may include a collection of sensors including but not limited to carbon monoxide sensors **416**, carbon dioxide sensors **418**, oxygen level sensors **420**, nitrogen level sensors **422**, hydrocarbon sensors **424**, moisture sensors **426**, pressure sensors **428** and other air-quality parameter measuring sensors (e.g., oil mist and particulates sensor, odor sensor, etc.). Carbon monoxide sensor **416** may trigger emergency state **380** of building **308** when a level of ambient carbon monoxide exceeds a first threshold predetermined value (e.g., 5 ppm, 10 ppm). Carbon dioxide sensor **418** may trigger emergency state **380** of the building when a level of ambient carbon dioxide exceeds a second predetermined threshold value (e.g., 1000 ppm, 1200 ppm). Oxygen level sensor **420** may trigger emergency state **380** of building **308** when a level of ambient oxygen falls outside a predetermined range of values (e.g., between 19.5% and 23.5%). Nitrogen level sensor **422** may trigger emergency state **380** of building **308** when a level of nitrogen falls below a third predetermined threshold value (e.g., 75%). Further, nitrogen level sensor **422** may also trigger emergency state **380** of building **308** when a level of nitrogen rises above a fourth predetermined threshold value (e.g., 81%), according to one embodiment.

[0102] In another embodiment, hydrocarbon sensor **424** may trigger emergency state **380** of building **308** when a condensed hydrocarbon content exceeds a fifth predetermined threshold value (e.g., 5 milligrams per cubic meter of air). Moisture sensor **426** may trigger emergency state **380** of building **308** when a moisture concentration exceeds a sixth predetermined threshold value (e.g., 24 ppm by volume). Pressure sensor **428** may trigger emergency state **380** of building **308** when pressure falls below a seventh predetermined threshold value (e.g., 90 percent of the maintenance pressure specified in a fire code). In another embodiment, pressure sensor **428** may further be used to detect the pressure in the primary storage tank discussed above. Here, pressure sensor **428** may trigger emergency state **380** of building **308** when the booster pump discussed above fails to maintain the optimal level of pressure (e.g., 6000 PSI) in the primary storage tank.

[0103] The sensor device **450** may include a collection of sensors such as a motion sensor **220**, temperature sensors **402**, air flow sensors **404**, smoke sensors **406**, gas detection sensors **408**, hazardous substance detection sensors **410**, power sensors **412** and/or other anomaly measuring sensors (e.g. environmental condition measuring sensors, malfunctioning of equipment detection sensors, etc.). Motion sensor **220**, as discussed above, may be an electronic device that detects the movement and/or presence of nearby emergency personnel $\mathbf{122}_{1\text{-}N}$ and/or people and/or objects in the one or more location(s) **370** (e.g., access locations) of breathable-air supply system **102** Motion sensor **220** may further detect unlock state **154** of smart lock **118** Motion sensor **220** may generate a trigger signal **194** to activate video camera **174** when breathable-air supply system **102** is accessed by anyone (e.g., emergency personnel $\mathbf{122}_{1\text{-}N}$, unauthorized persons, etc.) in unlock state **154**. Motion sensor **220** may also generate emergency state **380** of building **308** when tampering with smart lock **118** is detected. In addition, motion sensor **220** may activate video camera **174** when anomalies in environmental conditions associated with the one or more location(s) **370** are detected, according to one embodiment.

[0104] Temperature sensor **402** is a device that may be used to measure the temperatures of different components (e.g. air, liquid, and/or solid matter, etc.) within breathable-air supply system **102** Temperature sensor **402** may further measure the temperatures of different equipment within the breathable-air supply system **102**. Also, temperature sensor **402** may continuously monitor the temperatures of breathable-air supply system **102**. Temperature sensor **402** may trigger emergency state **380** of building **308** when a temperature within breathable-air supply system **102** is above and/or below predefined thresholds. In addition, temperature sensor **402** may be used to measure an environmental temperature within breathable-air supply system **102** Temperature sensor **402** may trigger emergency state **380** of building **308** when the environment temperature of building **308** is above and/or below predefined thresholds, according to one embodiment.

[0105] Air flow sensors **404** may automatically measure and/or regulate the flow rate of air within breathable-air supply system **102**. Air flow sensor **404** may utilize both mechanical and electrical means to measure changes in physical attributes of the air within breathable-air supply system **102** and calculate flow thereof. Air flow sensor **404** may continuously monitor the air flow rate within the breathable-air supply system **102**. Air flow sensor **404** may trigger emergency state **380** of building **308** during a catastrophic event (e.g. malfunctioning of equipment, other anomalies in the air-quality parameters, etc.) and/or if a charge rate of the air flow is not within predefined threshold limits (e.g., high air flow beyond a pre-described quantity of an SCBA maximum flow).

[0106] Smoke sensor **406** maybe a device that detects fires and/or smoke by sensing small particles in the air. Smoke sensor **406** may trigger emergency state **380** of building **308** when the fires and/or smoke particles are above certain threshold values. In addition, smoke sensor **406** may activate the emergency status indicator discussed above that helps emergency personnel **122**$_{1\text{-}N}$ identify internal air fill station **202** in critical situations (e.g., low or poor visibility during the fire and/or smoke, etc.). Gas detection sensor **408** may be a device that detects air leakage within breathable-air supply system **102**. Gas detection sensor **408** may detect emergency state **380** of building **308** when air leakage within breathable-air supply system **102** is detected. Hazardous substance detection sensor **410** may detect and/or measure the presence of specific toxic gases within breathable-air supply system **102**. Hazardous substance detection sensor **410** may trigger emergency state **380** of building **308** when specific toxic gases within breathable-air supply system **102** are detected, according to one embodiment.

[0107] Power sensor **412** may be used to measure the electrical power parameters (e.g., voltage, current, power and other power quality parameters, etc.) of breathable-air supply system **102** Power sensor **412** may trigger emergency state **380** of building **308** when a deviation in the electrical power parameters is above and/or below predefined threshold limits (e.g., as per IEEE standards), according to one embodiment.

[0108] Digital processor unit **430** may take real-time sensory data **172** of the array of sensors **104**$_{1\text{-}N}$ and use statistical analysis and/or artificial intelligence algorithm(s) to check deviation in the breathable-air/air-quality parameters (e.g., temperature, pressure, air components, air replenishment, availability of air, air leakage, fire detection, air flow, power supply, oil mist and particulates, odor, etc.) in breathable-air supply system **102** In one or more embodiments, digital processor unit **430** may be associated with a processor (e.g., a microprocessor, a microcontroller) to perform all functionalities and execute operations thereof associated with the array of sensors **104**$_{1\text{-}N}$.

[0109] FIG. **5**A shows a user interface **550**A of a fire safety application **502** (an example software application **190** executing on computing device **120**$_{1\text{-}N}$), according to one embodiment. Particularly, FIG. **5**A illustrates fire safety application **502** of cloud computing network **106** execution on computing device **120**$_{1\text{-}N}$ that displays parameters detected by the array of sensors **104**$_{1\text{-}N}$ of breathable-air supply system **102**, according to one embodiment. As shown in '(a)', user interface **550**A of breathable-air supply system **102** may help emergency personnel **122**$_{1\text{-}N}$ to view and monitor the different working parameters of units of breathable-air supply system **102** (e.g., internal air fill station **202**, air monitoring system **204**, air storage system **206**, isolation and bypass control system **212** exterior mobile air connection panel **214**). Emergency personnel **122**$_{1\text{-}N}$ may click on multiple tabs (e.g., tabs **532**$_{1\text{-}5}$) to view different air/air-quality parameters of breathable-air supply system **102** As shown in '(b)', an air status tab **504** may display various air/air-quality parameters of breathable-air supply system **102**, according to one embodiment.

[0110] For example, emergency personnel **122**$_{1\text{-}N}$ may view the different air-quality parameters (e.g., carbon monoxide (CO), water vapor/moisture (H_2O), carbon dioxide (CO_2), oxygen (O_2), nitrogen (N_2), hydrocarbon, pressure) of air monitoring system **204** by navigating air status tab **504**. The array of sensors **104**$_{1\text{-}N}$ of breathable-air supply system **102** may notify emergency personnel **122**$_{1\text{-}N}$ through cloud computing network **106** that some fault and/or anomalies (e.g., air contamination, particulates, pollutants, etc.) are detected in one or more unit(s) of breathable-air supply system **102** User interface **550**A may help emergency personnel **122**$_{1\text{-}N}$ view and navigate the air/air-quality parameters of breathable-air supply system **102**. Emergency personnel **122**$_{1\text{-}N}$ may further click on a particular tab showing the detected fault in a particular air parameter (e.g., CO_2) to enable remedial actions to be taken, according to one embodiment.

[0111] As shown in '(c)', emergency personnel **122**$_{1\text{-}N}$ may receive a notification in tab **506** that the parameter is above and/or below predefined threshold values (e.g., CO_2 detected above a predefined threshold value). Emergency personnel **122**$_{1\text{-}N}$ may also receive a notification in tab **508** to take corrective measures to rectify the fault. Emergency personnel **122**$_{1\text{-}N}$ may thus be able to take corrective measures and/or actions that are remotely permissible by computing device **120**$_{1\text{-}N}$ to rectify the fault in breathable-air supply system **102** unit through cloud computing network **106**. The corrective measures may include sensor recalibrations, activation and/or deactivation of the actuator control valve, leakage prevention, temperature and pressure management, etc., according to one embodiment. Other corrective measures are within the scope of the exemplary embodiments discussed herein.

[0112] FIG. **5**B shows another user interface **550**B adding interactions (d) to (f) that is arrivable from user interface **550**A, according to one embodiment. As shown in '(d)', user interface **550**B may show a tab **512** relevant to detection of emergency status **380** and a tab **514** relevant to automatic unlocking of smart lock **118**, and an options tab **516**. Tab **512** may notify emergency personnel **122**$_{1\text{-}N}$ that emergency state **380** in a particular breathable-air supply system **102** (e.g., including internal air fill station **202**, air storage system

206, etc.) is detected by the array of sensors 104_{1-N}. Tab 514 may notify emergency personnel 122_{1-N} that smart lock 118 associated with breathable-air supply system 102 may unlock one or more location(s) 370 (e.g., each location 370) of breathable-air supply system 102 needed to be accessed by emergency personnel 122_{1-N} during emergency state 380 of building 308.

[0113] Emergency personnel 122_{1-N} may select options tab 516 to navigate various options to take corrective measures to rectify the fault, as discussed above. User interface 550B shown in '(e)' displays a sensor recalibration tab 518, a purging tab 520, an activation bypass switch tab 522 and a leakage prevention tab 524 to enable emergency personnel 122_{1-N} take corrective measures remotely.

[0114] User interface 550B shown in '(f)' displays a tab 526 relevant to detection of normal state 390, a tab 528 relevant to automatic locking of smart lock 118, a status tab 530, and a video tab 532 Tab 526 may notify emergency personnel 122_{1-N} that emergency state 380 has ended and normal state 390 of building 308 has been detected. Tab 528 may notify emergency personnel 122_{1-N} that smart lock 118 associated with breathable-air supply system 102 has been automatically locked for one or more location(s) 370 (e.g., each location 370) of breathable-air supply system 102 accessed by the emergency personnel 122_{1-N}. Status tab 530 may show whether the fault in breathable-air supply system 102 is rectified or not.

[0115] Video tab 532 may enable emergency personnel 122_{1-N} to remotely view visual recording 142 of the one or more location(s) 370 (e.g., each location 370)/components of breathable-air supply system 102 for monitoring thereof, according to one embodiment. All reasonable variations are within the scope of the exemplary embodiments discussed herein.

[0116] FIG. 6 shows a process flow diagram detailing the operations in a sensor-based smart unlocking of a firefighter air replenishment system (e.g., safety system 150), according to one embodiment. In one or more embodiments, operation 602 may involve facilitating a breathable-air supply system (e.g., breathable-air supply system 102) to deliver breathable air from a source of compressed air (e.g., source of compressed air 170). In one or more embodiments, operation 604 may involve supplying the breathable air to an emergency personnel (e.g., emergency personnel 122_{1-N}) through a fill station (e.g., internal air fill station 202) in a fire-rated evacuation area (e.g., fire-rated evacuation area 350) of an occupiable structure (e.g., building 308).

[0117] In one or more embodiments, operation 606 may involve automatically unlocking a smart lock (e.g., smart lock 118) associated with the breathable-air supply system to permit entry to one or more location(s) (e.g., one or more location(s) 370) of the breathable-air supply system usable by the emergency personnel to access the breathable air during an emergency state (e.g., emergency state 380) of the occupiable structure. In one or more embodiments, operation 608 may involve integrating a sensor (e.g., array of sensors 104_{1-N}) within the breathable-air supply system to detect the emergency state based on a threshold level (e.g., first predetermined threshold value, second predetermined threshold value) of an air quality parameter. In one or more embodiments, operation 610 may then involve configuring the sensor to trigger an alert signal (e.g., alert signal 192) to automatically unlock the smart lock on the detection of the emergency state.

[0118] The methods and systems disclosed herein may be implemented in any means for achieving various aspects, and may be executed in a form of a non-transitory machine-readable medium embodying a set of instructions that, when executed by a machine, causes the machine to perform any of the operations disclosed herein.

[0119] Although the present embodiments have been described with reference to specific example embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader spirit and scope of the various embodiments. For example, the various devices and modules described herein may be enabled and operated using hardware circuitry (e.g., CMOS-based logic circuitry), firmware, software or any combination of hardware, firmware, and software (e.g., embodied in a non-transitory machine-readable medium). For example, the various electrical structures and methods may be embodied using transistors, logic gates, and electrical circuits (e.g., application-specific integrated (A SIC) circuitry and/or Digital Signal Processor (DSP) circuitry).

[0120] In addition, it will be appreciated that the various operations, processes and methods disclosed herein may be embodied in a non-transitory machine-readable medium and/or a machine-accessible medium compatible with a data processing system (e.g., computing device 120_{1-N}, cloud computing network 106, the array of sensors 104_{1-N}). Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense.

1-32. (canceled)

33. A safety system of an occupiable structure, comprising:
- a sensor associated with a breathable-air supply system;
- the sensor to detect an emergency state of the occupiable structure and generate a signal to cause a smart lock to unlock at least one location of a fill station in a fire-rated evacuation area of the occupiable structure to supply breathable air from a source of compressed air to an emergency personnel responsive to detection of the emergency state of the occupiable structure;
- wherein the emergency state of the occupiable structure corresponds at least one of a level of ambient carbon dioxide, a level of ambient oxygen, a level of nitrogen, a level of ambient carbon monoxide, condensed hydrocarbon, a moisture concentration, a temperature, power parameters, air leakage, or a presence of smoke.

34. The safety system of claim 33, comprising:
- the breathable-air supply system to facilitate delivery of the breathable air from the source of compressed air.

35. The safety system of claim 33, comprising:
- the fill station.

36. The safety system of claim 33, comprising:
- the smart lock associated with the breathable-air supply system to unlock at least one location of the breathable-air supply system.

37. The safety system of claim 33, wherein:
- the smart lock associated with the breathable-air supply system locks at least one location of the breathable-air supply system required by the emergency personnel to access the breathable air when the emergency state ends and a normal state of the occupiable structure is detected.

38. The safety system of claim 33, wherein the breathable-air supply system is housed in an air storage sub-system appurtenant to the occupiable structure.

39. The safety system of claim **33**, wherein a lock state and an unlock state of the smart lock is determined based on sensor data of the sensor associated with the breathable-air supply system.

40. The safety system of claim **33**, comprising:

a video camera to capture at least one of a visual recording or an audio recording of the at least one location of the fill station with the smart lock in an unlocked state.

41. The safety system of claim **33**, comprising:

the sensor including a carbon monoxide sensor to trigger the emergency state with the level of ambient carbon monoxide exceeding a first predetermined threshold value.

42. The safety system of claim **33**, comprising:

the sensor including an oxygen level sensor that triggers the emergency state with the level of ambient oxygen outside a predetermined range of values.

43. The safety system of claim **33**, comprising:

the sensor including a nitrogen level sensor that triggers the emergency state with the level of nitrogen below a first predetermined threshold value or with the level of nitrogen above a second predetermined threshold value.

44. The safety system of claim **33**, comprising:

the sensor including a hydrocarbon sensor that triggers the emergency state with the condensed hydrocarbon content exceeding a predetermined threshold value.

45. The safety system of claim **33**, comprising at least one of:

the sensor including at least one of a moisture sensor or a pressure sensor.

46. The safety system of claim **33**, wherein at least one of:

at least one location of the breathable-air supply system comprises at least one of: an exterior mobile air connection panel, an air monitoring closet, an air monitoring room, an air storage closet, an air storage room, a fire command center, a fire command room, a fire alarm panel, a computing device executing a software application thereon, the fill station of the occupiable structure, and a temporarily established fill station connected to the source of compressed air during the emergency state;

the smart lock associated with the breathable-air supply system unlocks each location of the breathable-air supply system usable during the emergency state of the occupiable structure;

the fire-rated evacuation area of the occupiable structure includes a stairwell; or the sensor comprises an array of sensors.

47. A method, comprising:

integrating a sensor within a breathable-air supply system to detect an emergency state based on a threshold level of an air quality parameter, the breathable air-supply system to deliver breathable air from a source of compressed air; and

configuring the sensor to trigger an alert signal to unlock a smart lock responsive to the detection of the emergency state and generate the alert signal causing the smart lock to unlock at least one location of a fill station in a fire-rated evacuation area of an occupiable structure to supply the breathable air to an emergency personnel through the fill station in the fire-rated evacuation area of the occupiable structure, responsive to detection of the emergency state of the occupiable structure, wherein the emergency state of the occupiable structure corresponds at least one of a level of ambient carbon dioxide, a level of ambient oxygen, a level of nitrogen, a level of ambient carbon monoxide, condensed hydrocarbon, a moisture concentration, a temperature, power parameters, air leakage, or a presence of smoke.

48. The method of claim **47**, comprising:

supplying the breathable air to the emergency personnel through the fill station in the fire-rated evacuation area of the occupiable structure; and

unlocking a smart lock associated with the breathable-air supply system to permit entry to at least one location of the breathable-air supply system usable by the emergency personnel to access the breathable air during the emergency state of the occupiable structure.

49. The method of claim **47**, comprising:

detecting, by the sensor, a normal state of the occupiable structure; and

locking, responsive to detecting the normal state, at least one location of the breathable air-supply system.

50. The method of claim **47**, comprising:

recording, through a video camera, an audiovisual incident to communicate to at least one of: a remote fire command center, an onsite fire command center and a fire command room through a cloud computing network, the audiovisual incident indicating the at least one location of the fill station or at least one location of the breathable-air supply system is accessed by at least one of: an unauthorized person or the emergency personnel in an unlock state of the smart lock.

51. The method of claim **47**, comprising:

providing, through the breathable-air supply system, a situational awareness recommendation to at least one of: a remote fire command center, an onsite fire command center and a fire command room using an artificial intelligence algorithm based on a regression analysis of a sensory data of the sensor.

52. A method, comprising:

unlocking a smart lock associated with a breathable-air supply system to permit entry to each location of the breathable-air supply system usable by emergency personnel to access breathable air during an emergency state of an occupiable structure;

integrating a sensor within the breathable-air supply system to detect the emergency state based on a threshold level of an air quality parameter; and

configuring the sensor to trigger an alert signal to unlock the smart lock on the detection of the emergency state and generate the alert signal causing the smart lock to unlock the at least one location of a fill station, responsive to detection of the emergency state of the occupiable structure, wherein the emergency state of the occupiable structure corresponds at least one of a level of ambient carbon dioxide, a level of ambient oxygen, a level of nitrogen, a level of ambient carbon monoxide, condensed hydrocarbon, a moisture concentration, a temperature, power parameters, air leakage, or a presence of smoke.

* * * * *