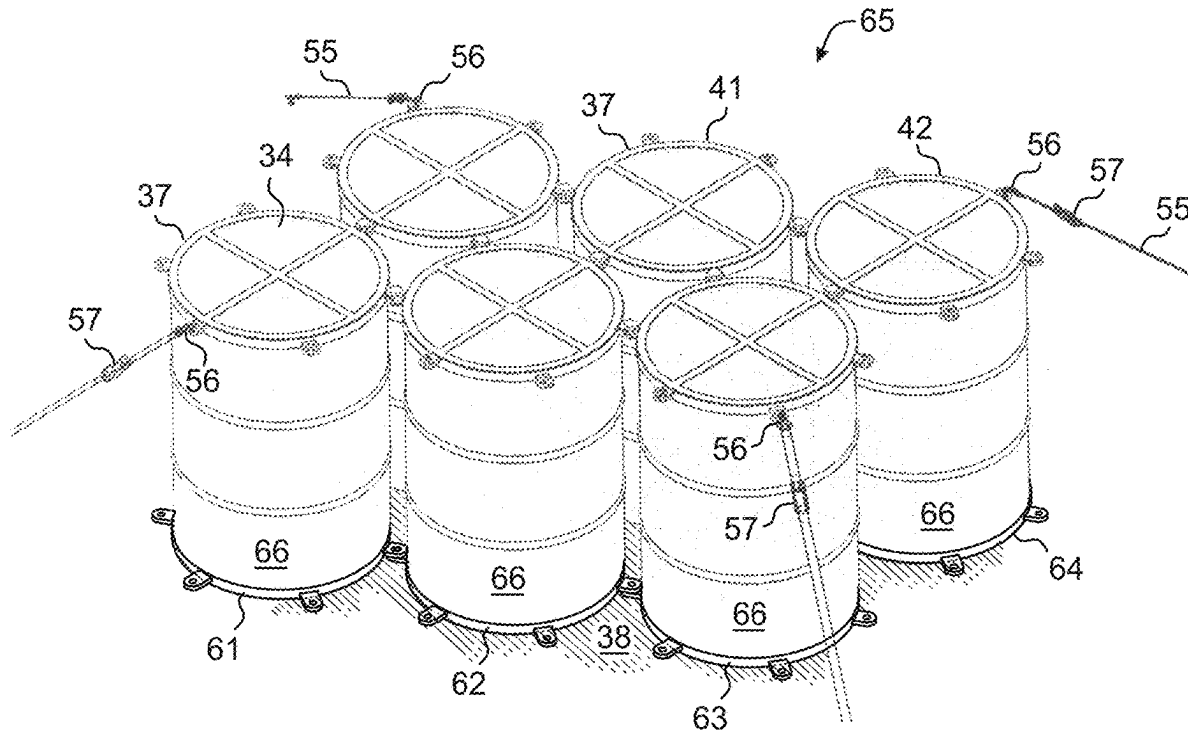
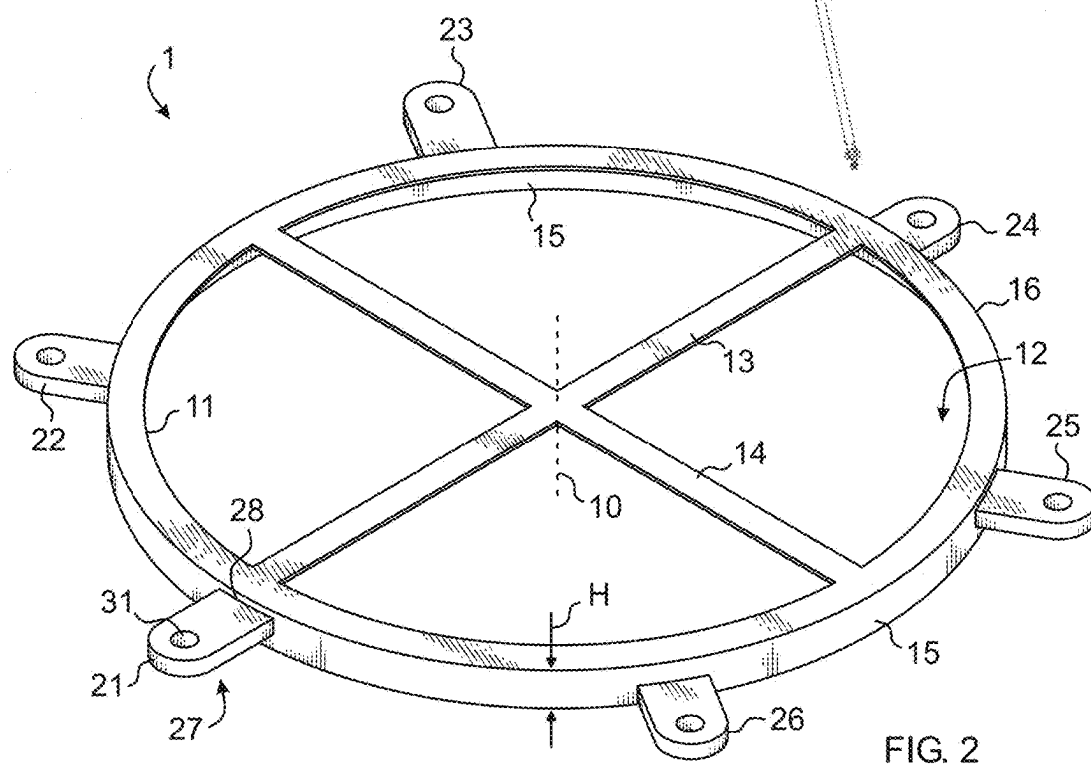
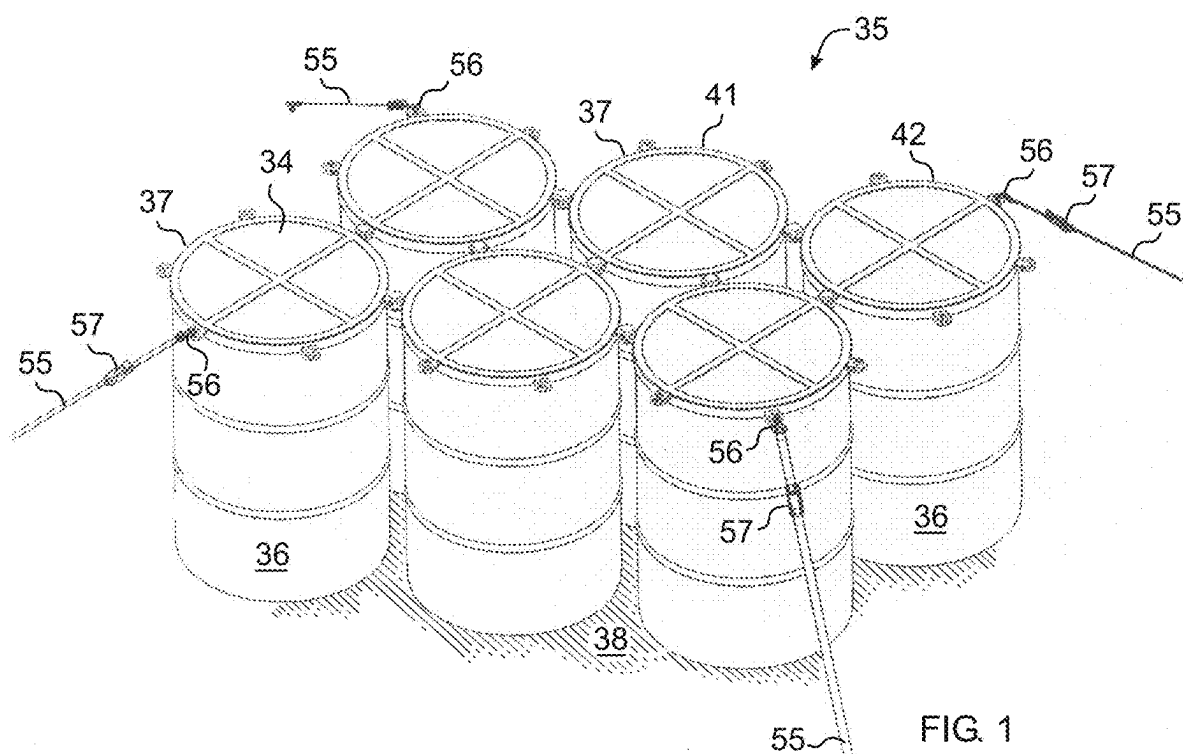


(43) **Pub. Date:** **Aug. 21, 2025**





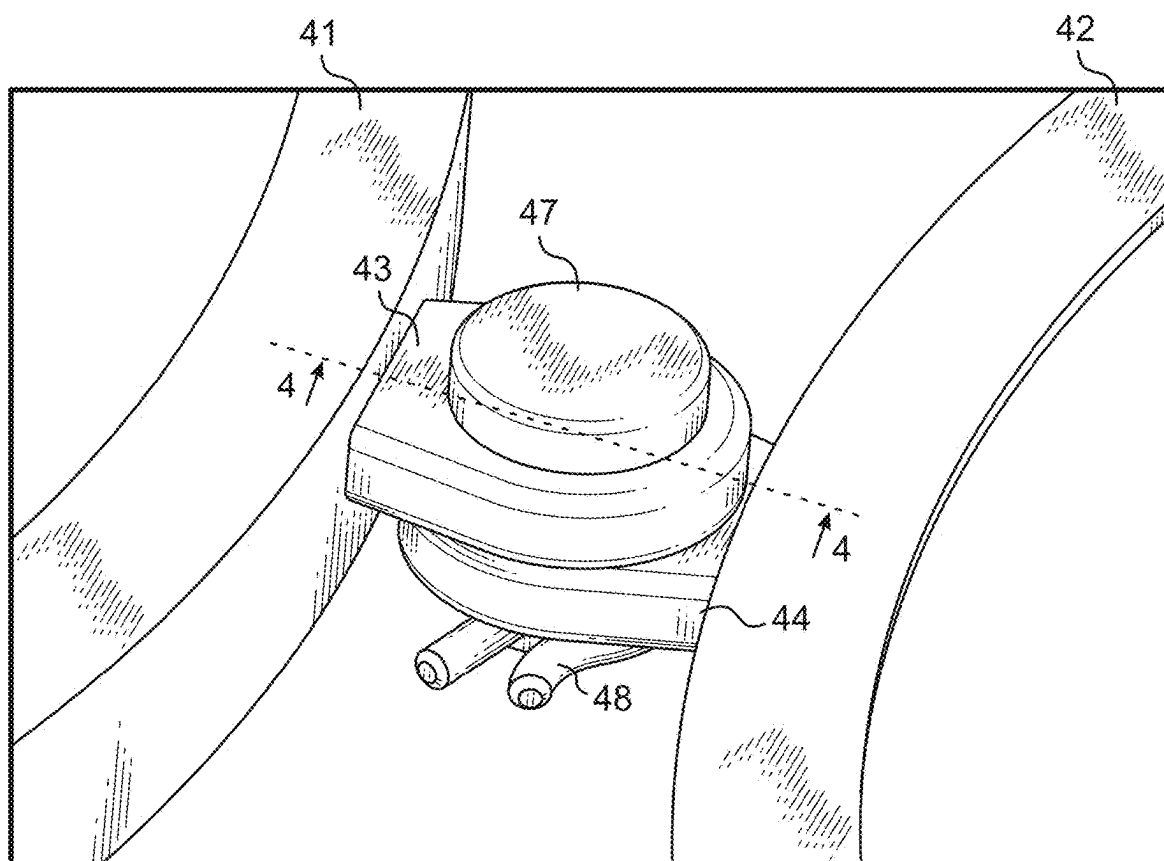


FIG. 3

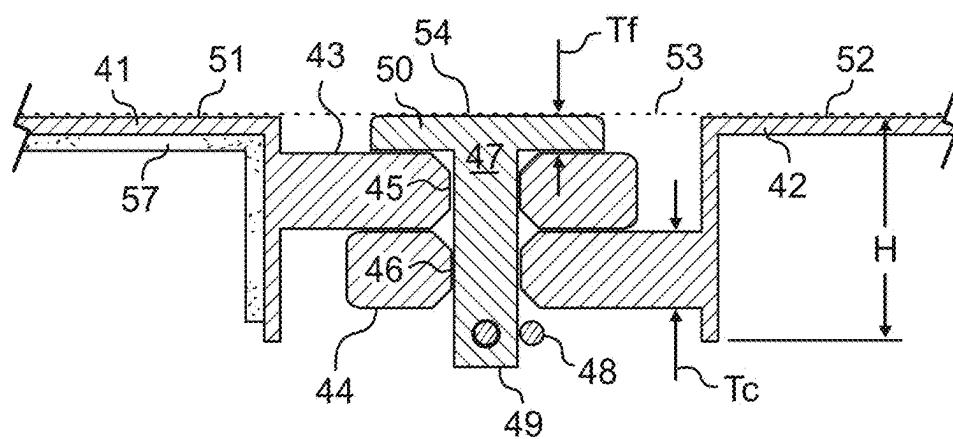


FIG. 4

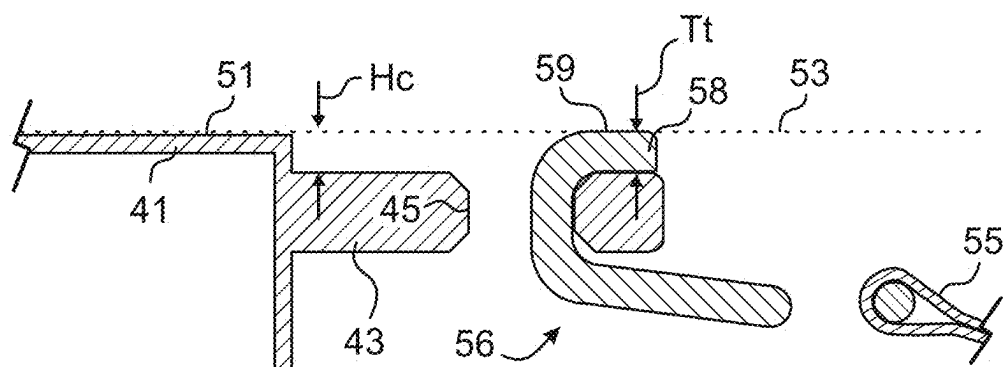


FIG. 5

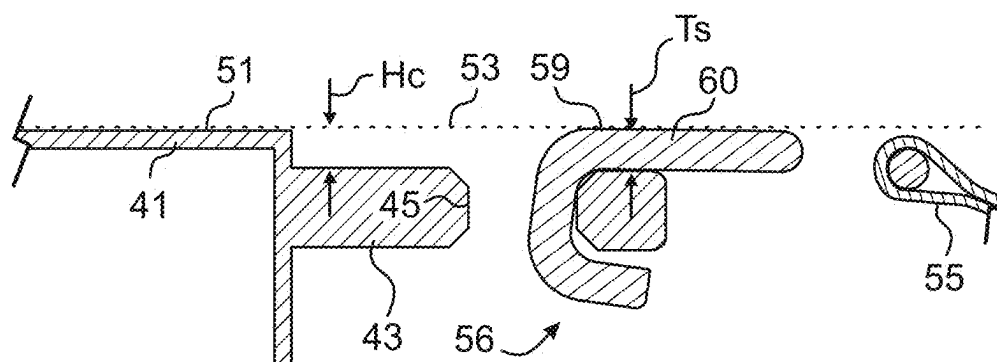


FIG. 6

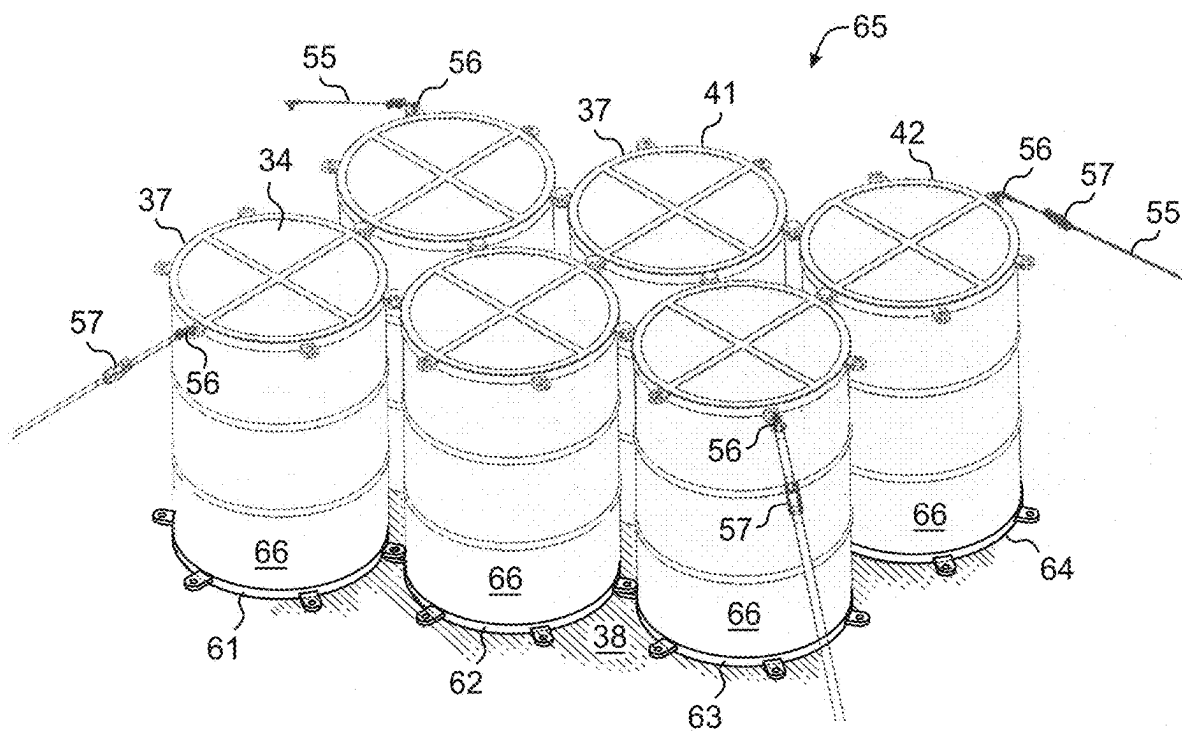


FIG. 7

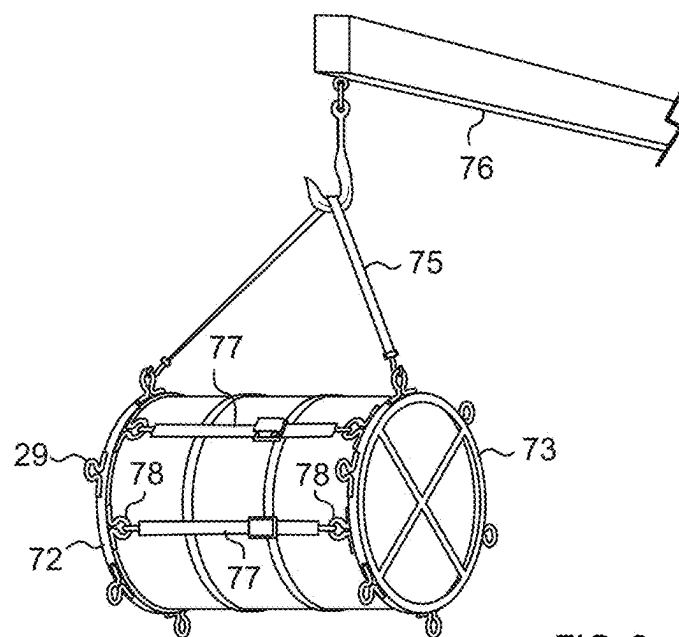


FIG. 8

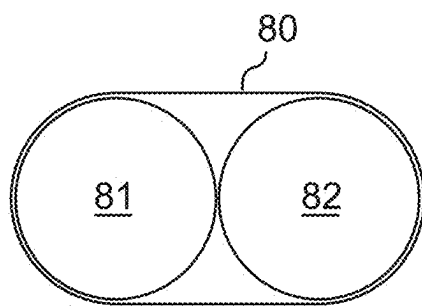


FIG. 9

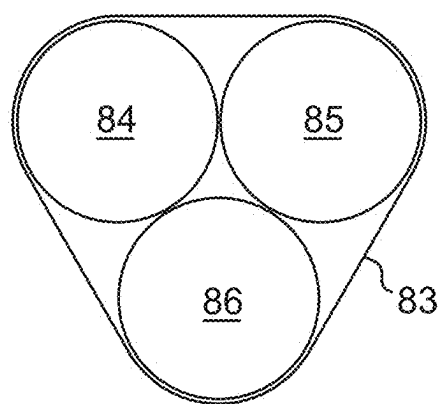


FIG. 10

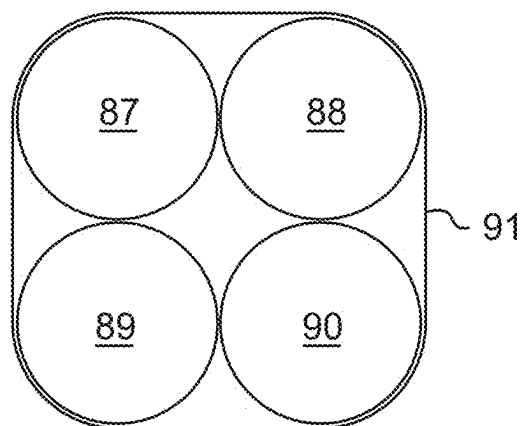
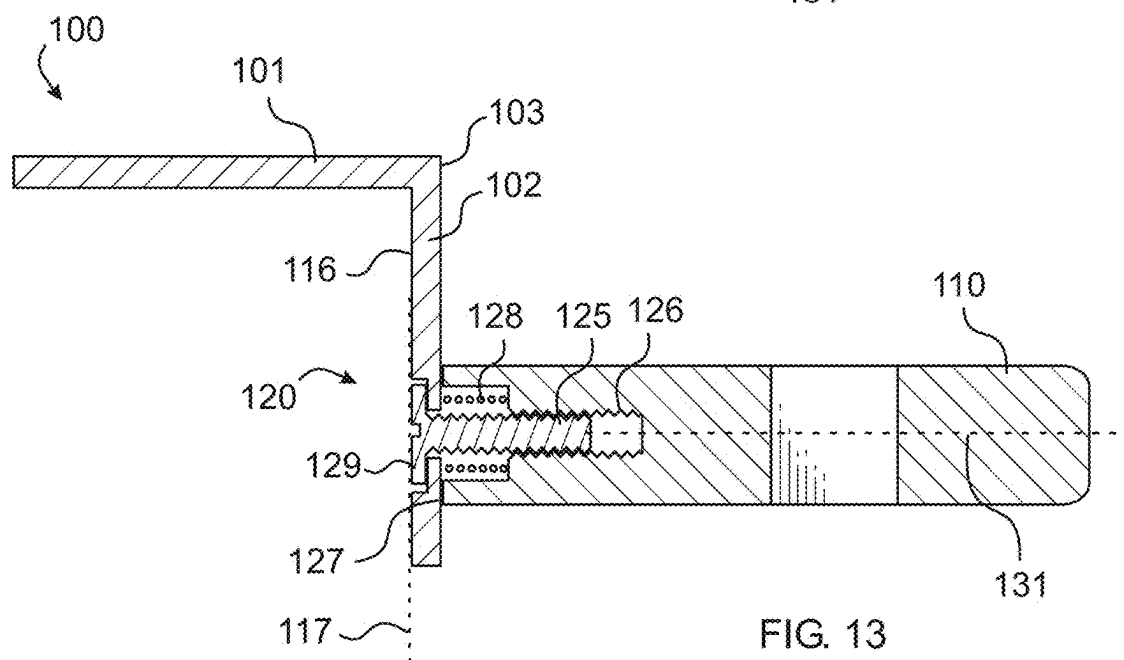
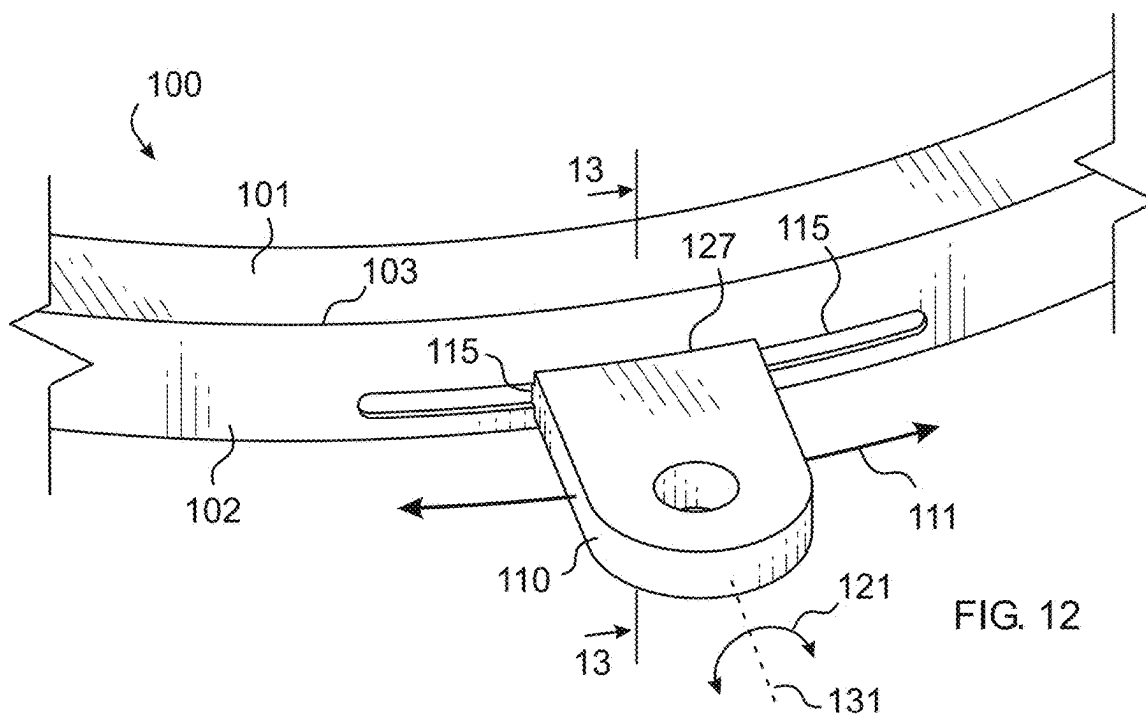
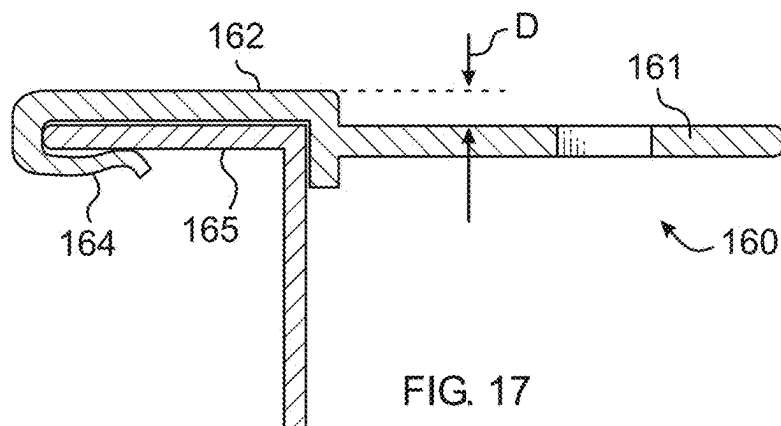
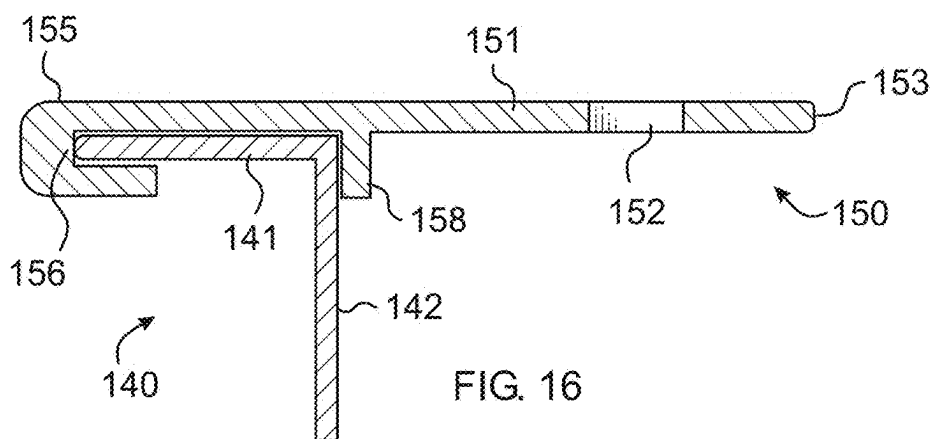
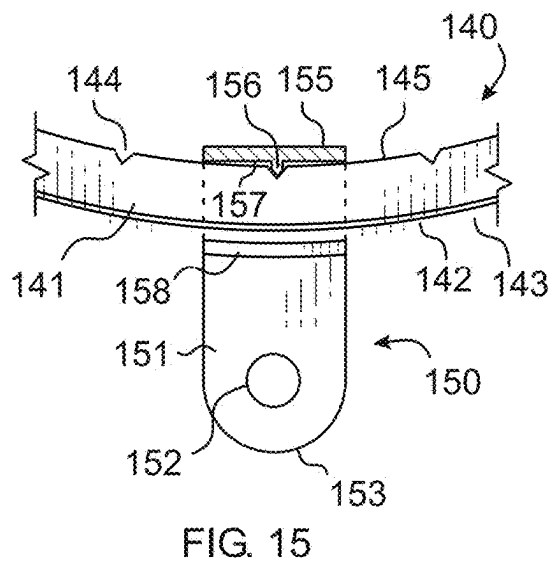
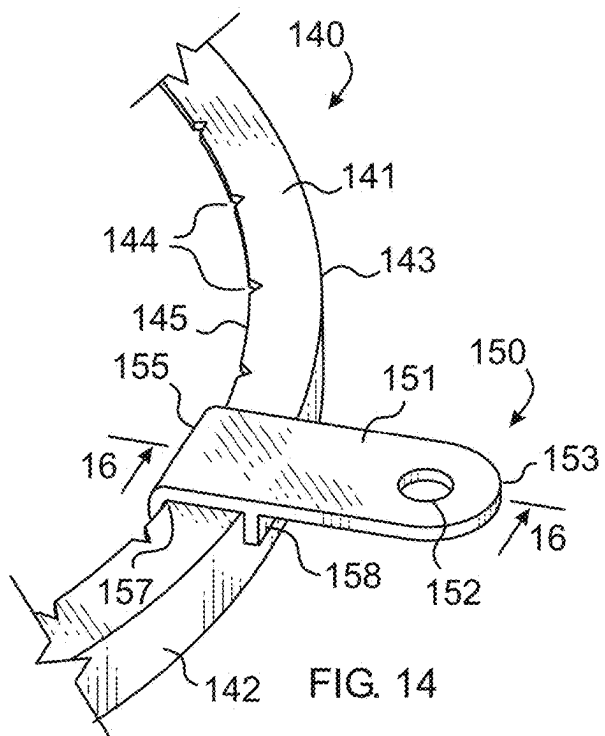


FIG. 11







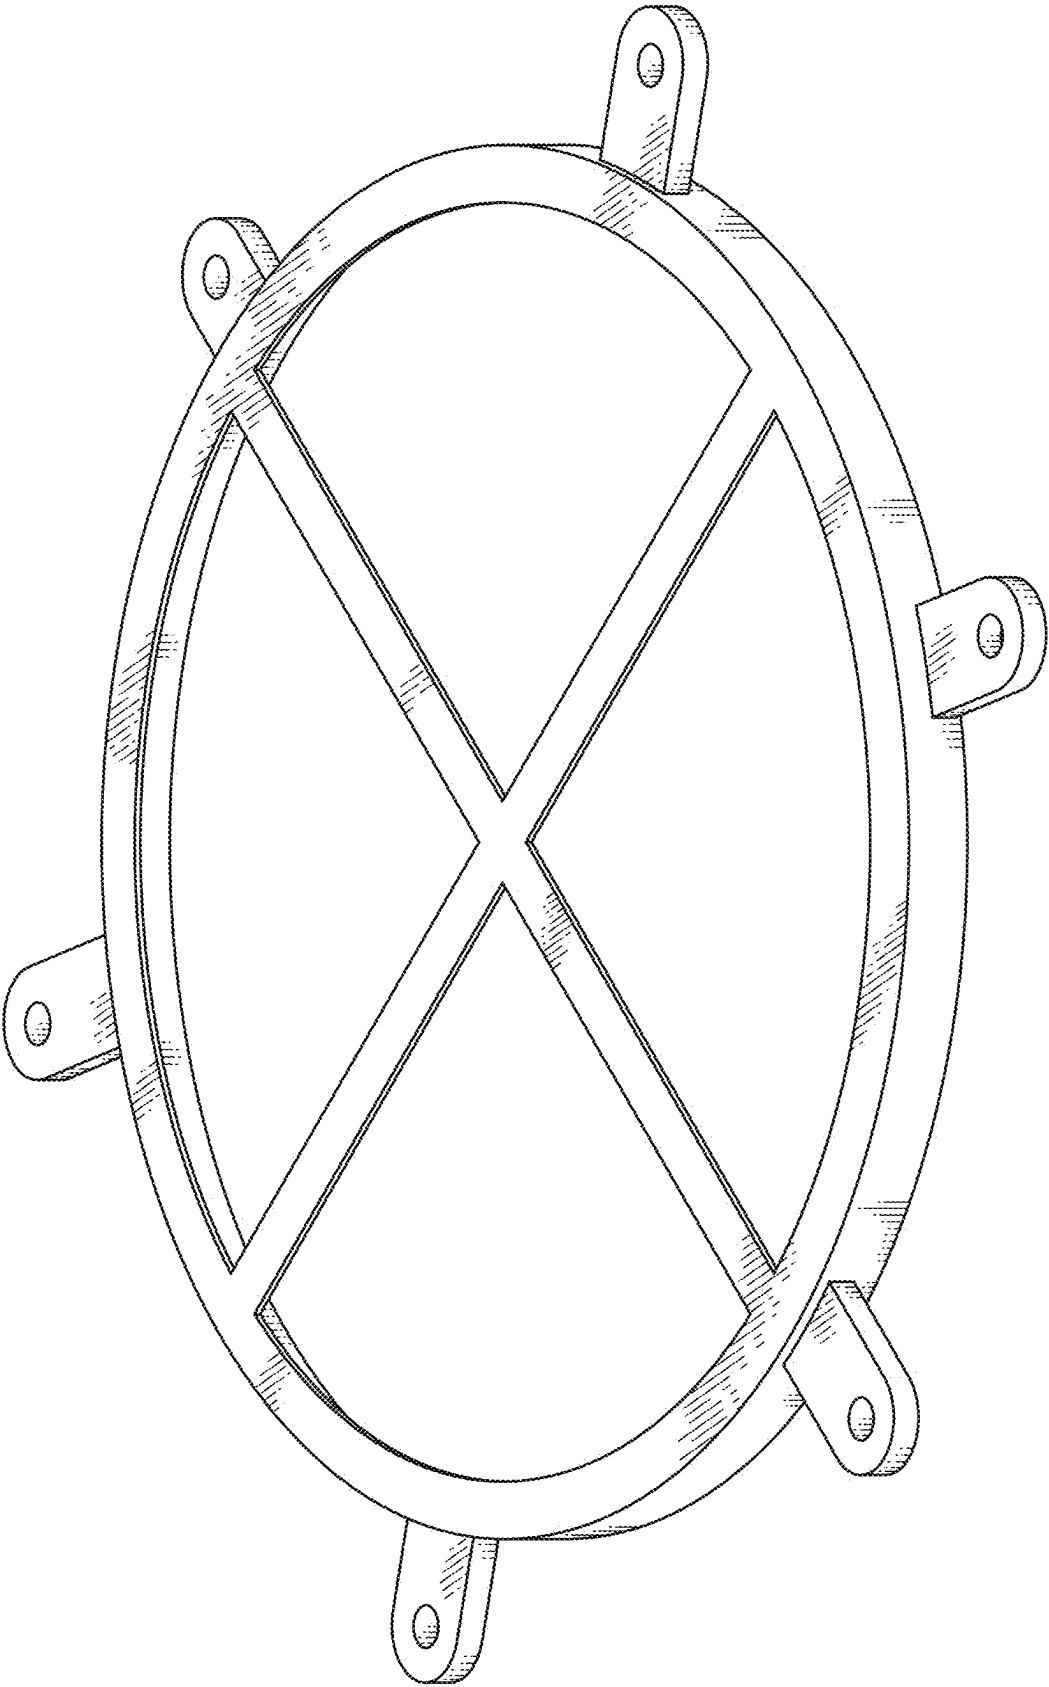


FIG. 18

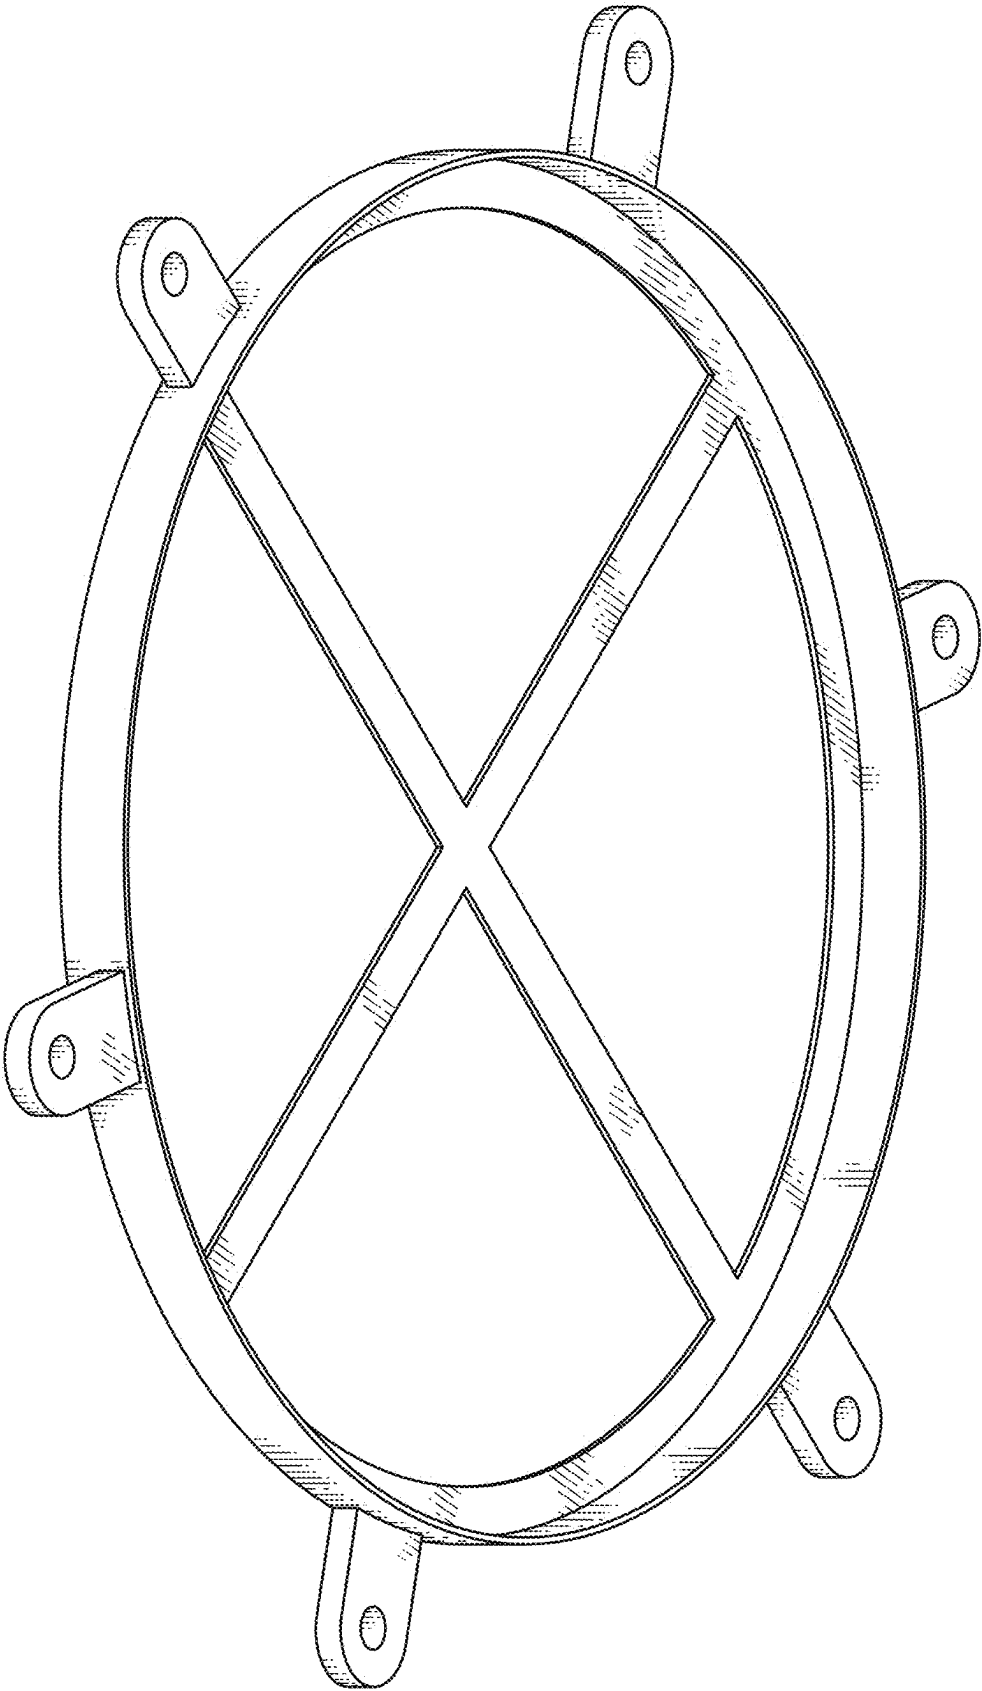


FIG. 19

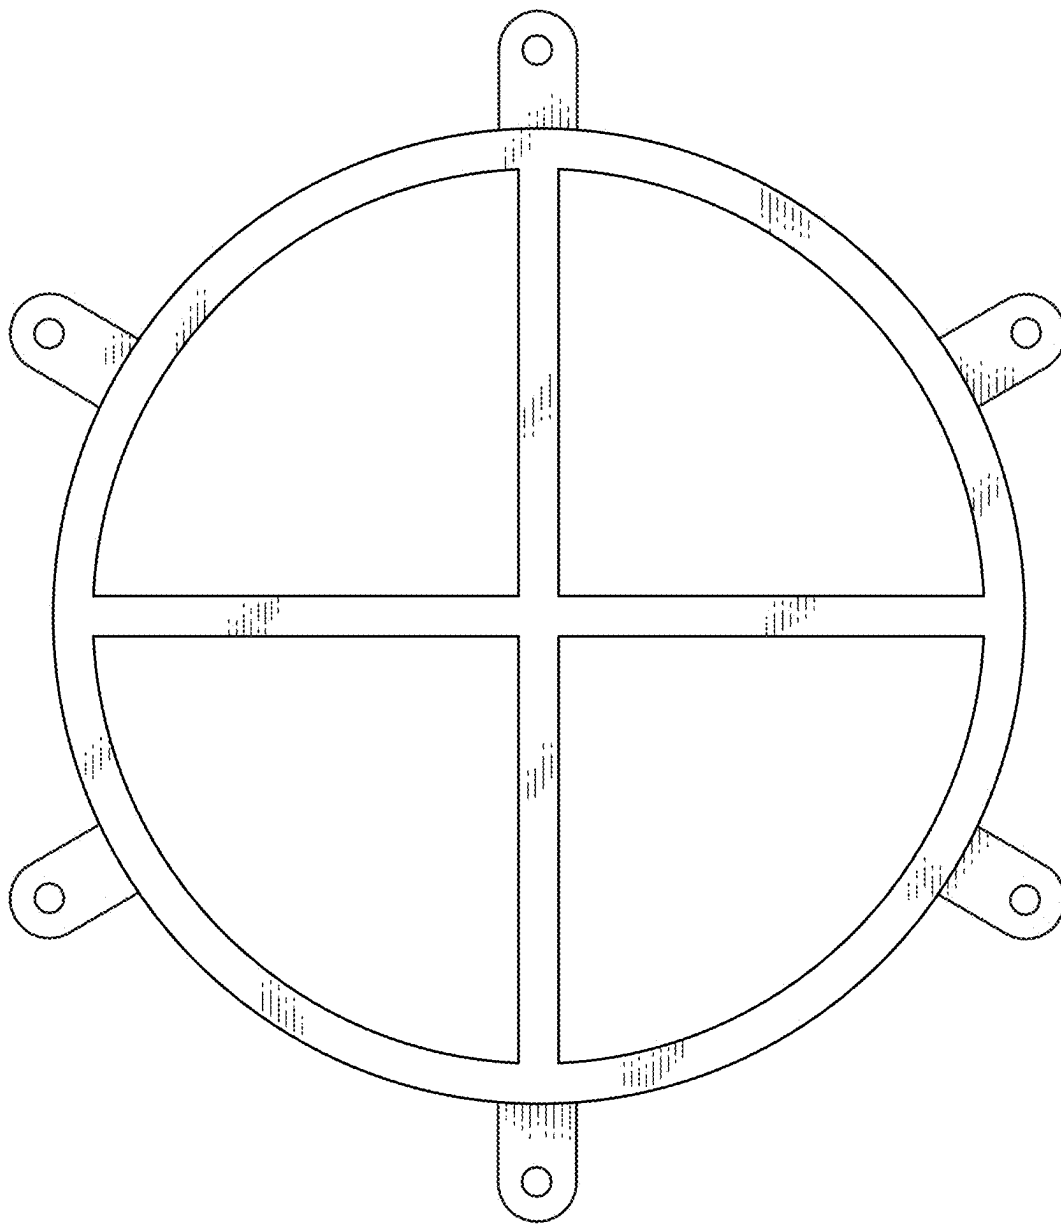


FIG. 20

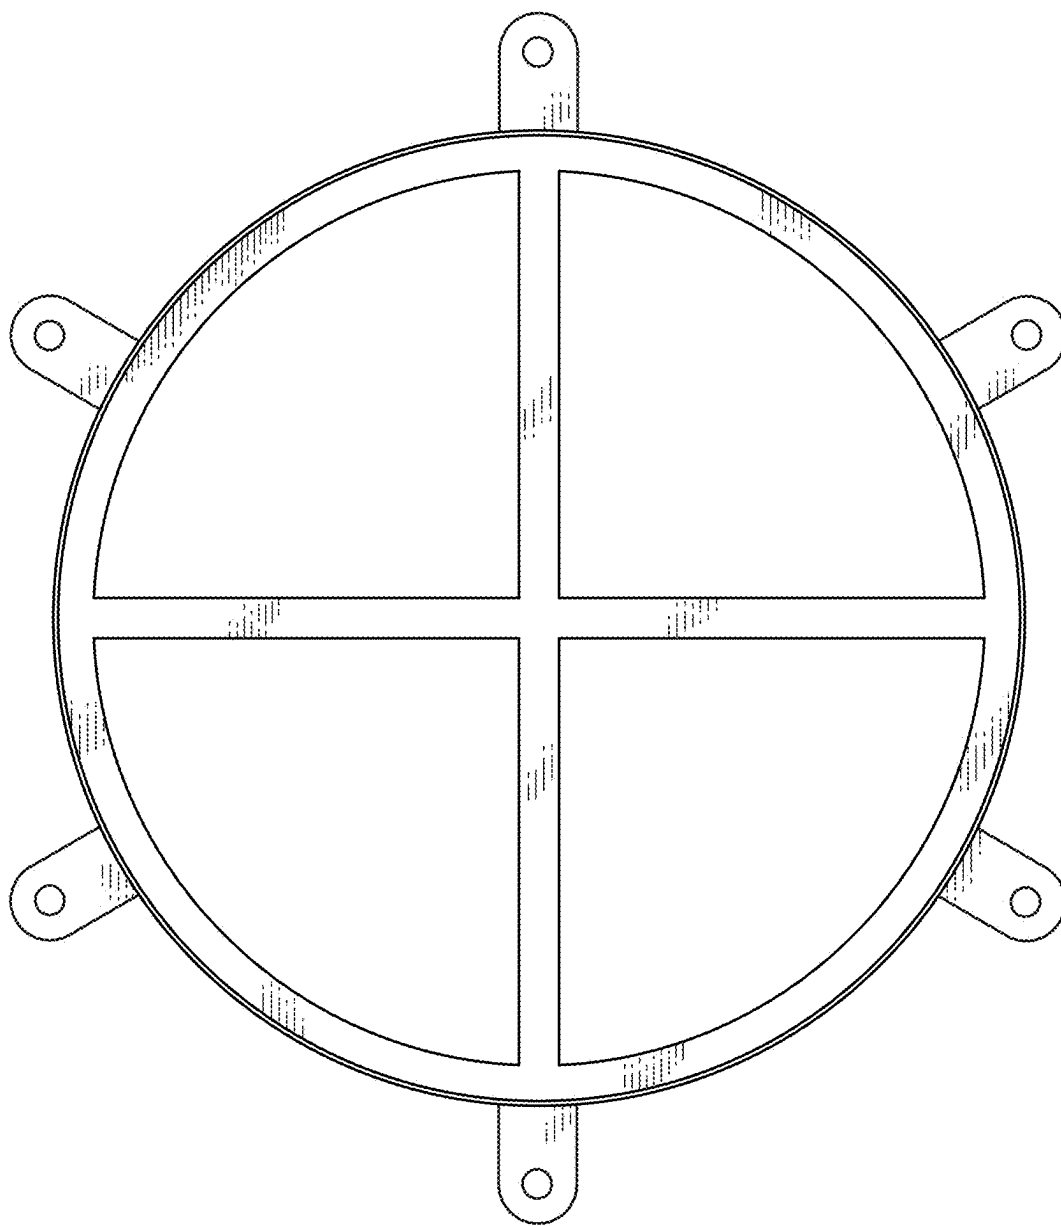


FIG. 21



FIG. 22




FIG. 23

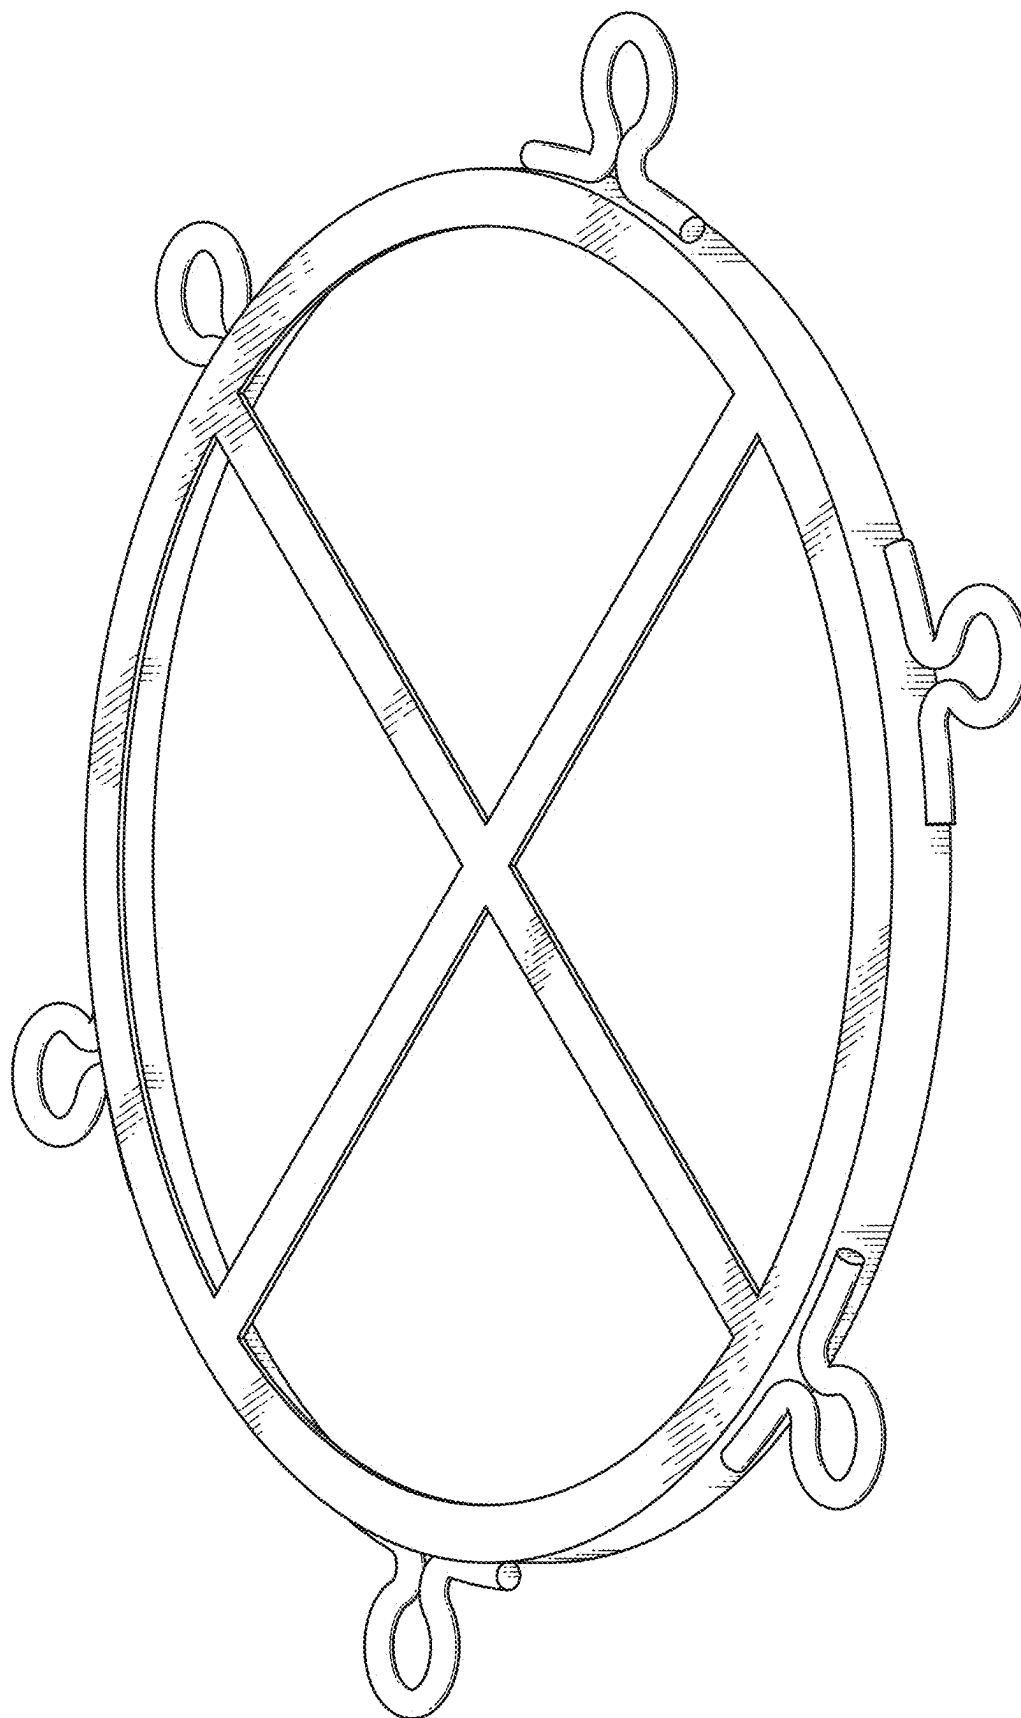


FIG. 24

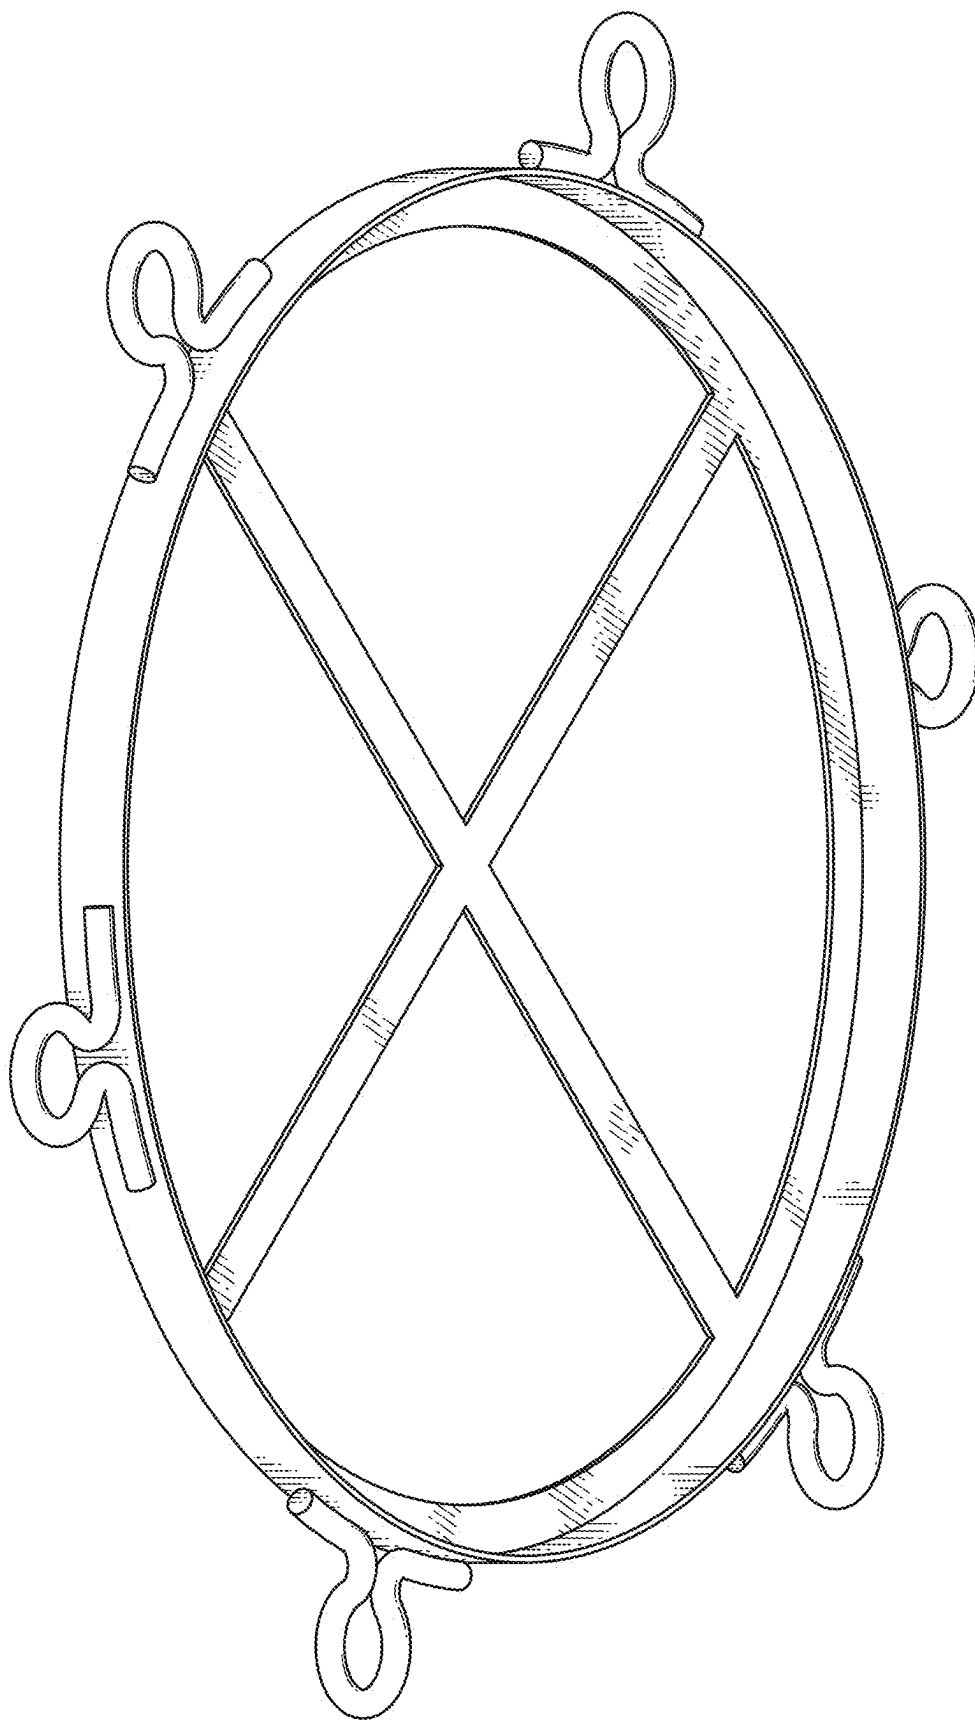


FIG. 25

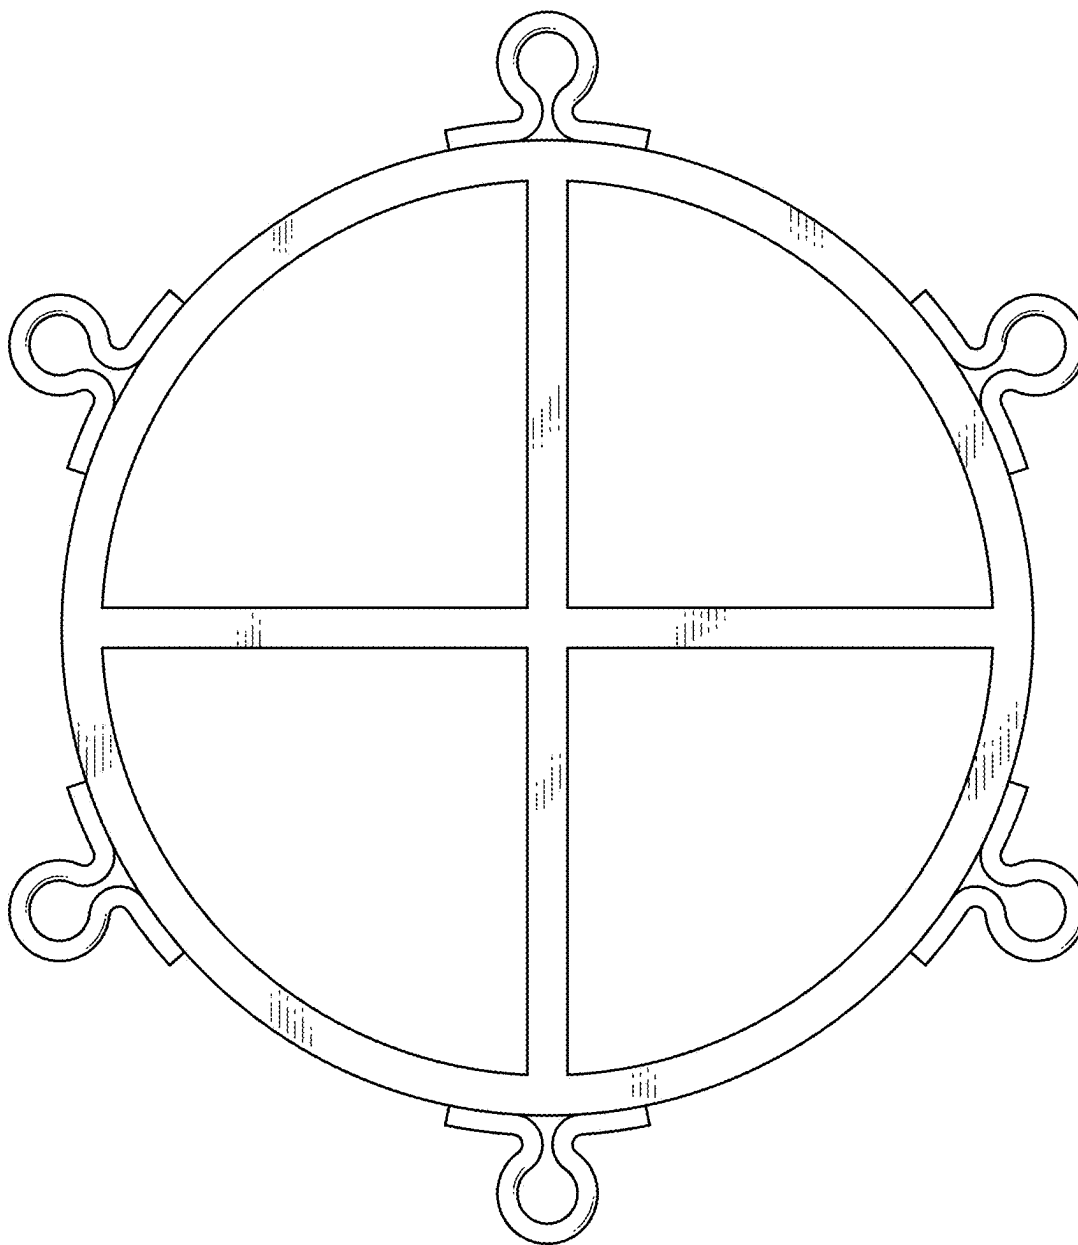


FIG. 26



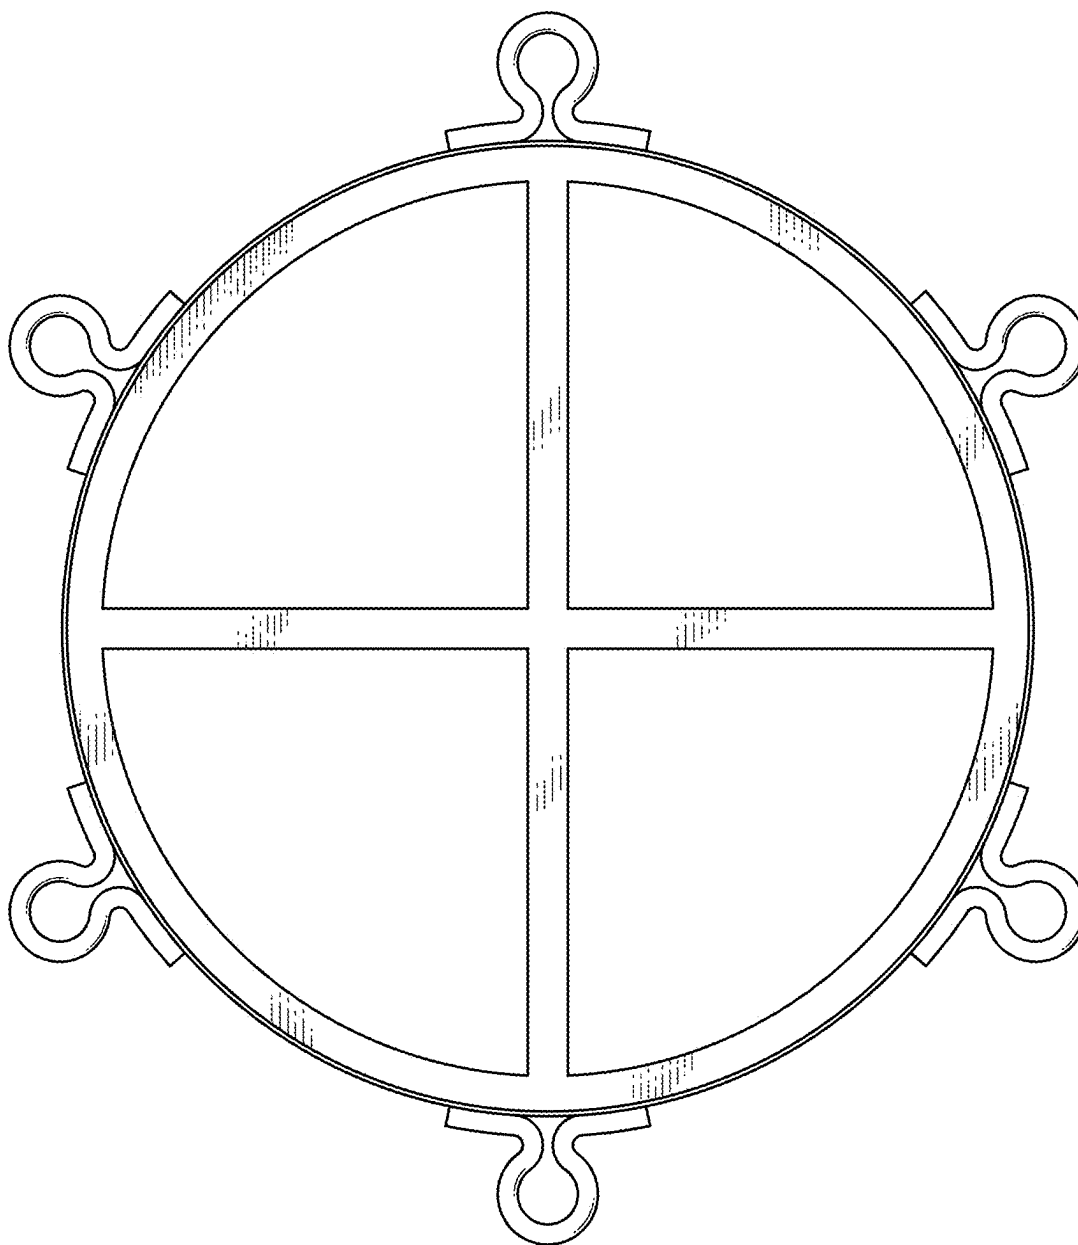


FIG. 27




FIG. 28




FIG. 29

**BARREL TIE-DOWN BRACKET****PRIOR APPLICATION**

[0001] This application is a continuation of U.S. patent application Ser. No. 17/115,704, filed 2020 Dec. 8, resulting in U.S. Pat. No. 12,291,139, issued 2025 May 6, which is a continuation-in-part of U.S. patent application Ser. No. 16/104,640, filed 2018 Aug. 17, resulting in U.S. Pat. No. 10,857,931, issued 2020 Dec. 8, which is a continuation-in-part of U.S. patent application Ser. No. 29/589,385, filed 2016 Dec. 30, all of which are incorporated herein by reference.

**FIELD OF THE INVENTION**

[0002] The instant invention relates to cargo mounting structures and more particularly to secure mounting of uniform containers such as oil drums.

**BACKGROUND OF THE INVENTION**

[0003] Transport of liquid commodities such as lubricating oil, and chemicals involves the use of standardized containers such as cylindrical barrels or drums. These containers must often be carried on the flat bed of vehicles such as trucks, trailers, locomotives, or water vessels during transport. Such transportation can often involve unexpected jostling which can dislodge the containers leading to costly and potentially environmentally damaging spills. Securing individual containers to the vehicles can be costly, time-consuming and involve special expertise.

[0004] Many containers are manufactured in an often imprecise inaccurate manner resulting in disuniformities in container shapes and sizes. In addition, the use of slightly damaged or otherwise misshapen containers is often required. Inaccuracies in the compact loading of plural containers can result in the often difficult task of securing those containers for transport.

[0005] Therefore, there is a need for an inexpensive way to secure arrays of similarly shaped containers for transport which addresses some or all of the above identified inadequacies.

**SUMMARY**

[0006] The principal and secondary objects of the invention are to provide improved transport of containers. These and other objects are achieved by providing a dedicated bracket for each container to releasably secure it to its neighboring containers and to the vehicle transporting the containers.

[0007] In some embodiments the shape of the bracket can be described as generally ring-shaped having a circular planar body having a diameter sized to substantially match the outer diameter of the circular end of a cylindrical barrel such as a standard 60 gallon oil drum which is about 57.2 centimeters (22.5 inches). In some embodiments the bracket can include a cylindrical sidewall which extends downwardly from the outer circular peripheral edge of the body to both stiffen and strengthen the body, and to discourage radial migration off of the barrel end.

[0008] In some embodiments six couplings extend radially outwardly from the sidewall at angularly evenly spaced apart locations. In some embodiments the axial positions of the couplings are reciprocatingly staggered so that a first set of three couplings angularly spaced apart 120 degrees are

located at a first upper axial position while a second set of three couplings spaced apart 120 degrees, and angularly offset 60 degrees from the first set of coupling, are located at a second lower axial position. In some embodiments the couplings extending from adjacent brackets can overlap one another, bringing their respective loop apertures in alignment so they can be engaged by a retaining pin, while the top surface of the adjacent brackets remain substantially coplanar.

[0009] In some embodiments there is provided a device for securing a pair of containers having a uniform geometry to one another, said device comprises: first and second brackets; wherein each of said brackets comprises: a body portion shaped and dimensioned to intimately and releasably nest over a section of said uniform geometry; a plural number of couplings located at spaced apart locations on the periphery of said bracket; wherein one of a first set of said couplings on said first bracket is shaped and dimensioned to interconnect with a co-oriented one of a second set of said couplings on said second bracket.

[0010] In some embodiments said section of said uniform geometry is co-planar when said pair of containers is arranged in a co-planarly adjacent manner.

[0011] In some embodiments said section of said uniform geometry is a circular top end of said container.

[0012] In some embodiments said plural number is six.

[0013] In some embodiments said body portion has a substantially L-shaped cross-sectional geometry.

[0014] In some embodiments said one of a first set of said couplings on said first bracket is an upper coupling axially spaced apart from said one of a second set of said couplings on said second bracket wherein said one of a second set of said couplings is a lower coupling.

[0015] In some embodiments said upper coupling is axially located to overlap said lower coupling when said first and second brackets are coplanarly adjacent.

[0016] In some embodiments said upper coupling is shaped to have an axial upper aperture, and said lower coupling is shaped to have an axial lower aperture; and wherein said upper aperture and said lower aperture can be engaged by a fastener restricting radial movement between said first and second brackets when said first and second brackets are coplanarly adjacent.

[0017] In some embodiments said fastener is selected from the group consisting of: threaded bolts, clamps, clips, corkscrew pins, padlocks and rivets.

[0018] In some embodiments a first uppermost surface of said first bracket is coplanar with a second uppermost surface of said second bracket.

[0019] In some embodiments there is provided that in a system for securing a plurality of containers having a uniform geometry to the flat bed of a vehicle using a plurality of brackets, wherein each of said brackets secures to a section of at least one of said containers and a plurality of cables anchor said brackets to said vehicle, an improvement which comprises each of said brackets comprising: a body portion shaped and dimensioned to intimately engage a portion of said uniform geometry; and, a plural number of couplings shaped and dimensioned to interconnectedly conjoin a substantially co-planarly adjacent pair of said brackets.

[0020] In some embodiments there is provided a device for securing an array of containers to one another, each of said containers having a uniform geometry, said device

comprises: first and second brackets; wherein each of said brackets comprises: a body portion shaped and dimensioned to intimately and releasably nest over a section of said uniform geometry of a finite number of said containers arranged in a co-planar adjacent arrangement; a plural number of couplings located at spaced apart locations on the periphery of said bracket; wherein one of a first set of said couplings on said first bracket is shaped and dimensioned to interconnect with a co-oriented one of a second set of said couplings on said second bracket.

**[0021]** In some embodiments there is provided that in a system for securing a plurality of containers to the flatbed of a vehicle using a plurality of brackets, wherein each of said containers has a section having a co-planar similar geometry, and wherein each of said brackets secures to the top geometry of a finite number of said containers arranged in a co-adjacent, co-planar arrangement and a plurality of cables anchor said brackets to said vehicle, an improvement which comprises each of said brackets comprising: a body portion shaped and dimensioned to intimately engage said top geometry; a plural number of couplings shaped and dimensioned to interconnectably conjoin a substantially coplanar adjacent pair of said brackets.

**[0022]** In some embodiments there is provided a device for securing a pair of containers having a substantially uniform geometry to one another, said device comprises: first and second brackets; wherein each of said brackets comprises: a body portion shaped and dimensioned to intimately and releasably nest over a section of said uniform geometry; a plural number of couplings located at spaced apart locations on the periphery of said bracket; wherein one of a first set of said couplings on said first bracket is shaped and dimensioned to interconnect with a co-oriented one of a second set of said couplings on said second bracket.

**[0023]** In some embodiments said plural number of couplings are movably secured to said body portion.

**[0024]** In some embodiments said plural number of couplings detachable from said body portion.

**[0025]** In some embodiments at least one of said plural number of couplings comprises: a plate having a distal aperture; a hook connected to said plate; wherein said is shaped and dimensioned to releasably engage said body portion.

**[0026]** In some embodiments said body portion comprises a plurality of angularly spaced apart seats, wherein each of said seats forms a discrete mounting location for one of said plural number of couplings.

**[0027]** In some embodiments each of said seats comprises a notch formed on an edge of said body portion, and where said one of said plural number of couplings comprises a nib oriented to engage said notch when said coupling is secured to said body portion.

**[0028]** In some embodiments said body portion comprises a track extending angularly along said body portion; wherein a first one of said plural number of couplings comprises: a base adjustably mounted to said track.

**[0029]** In some embodiments said track extends angularly along an arcuate sidewall of said body portion.

**[0030]** In some embodiments said section of said uniform geometry is co-planar when said pair of containers is arranged in a co-planar adjacent manner.

**[0031]** In some embodiments said section of said uniform geometry is a circular top end of said container.

**[0032]** In some embodiments said plural number is six.

**[0033]** In some embodiments said one of a first set of said couplings on said first bracket is an upper coupling axially spaced apart from said one of a second set of said couplings on said second bracket wherein said one of a second set of said couplings is a lower coupling.

**[0034]** In some embodiments said upper coupling is axially located to overlap said lower coupling when said first and second brackets are coplanar adjacent.

**[0035]** In some embodiments said upper coupling is shaped to have an axial upper aperture, and said lower coupling is shaped to have an axial lower aperture; and wherein said upper aperture and said lower aperture can be engaged by a fastener restricting radial movement between said first and second brackets when said first and second brackets are coplanar adjacent.

**[0036]** In some embodiments there is provided that in a system for securing a plurality of containers having a substantially uniform geometry to the flat bed of a vehicle using a plurality of brackets, wherein each of said brackets secures to a section of at least one of said containers and a plurality of cables anchor said brackets to said vehicle, an improvement which comprises each of said brackets comprising: a body portion shaped and dimensioned to intimately engage a portion of said uniform geometry; a plural number of couplings shaped and dimensioned to interconnectably conjoin a substantially co-planar adjacent pair of said brackets, and, wherein at least one of said couplings is movable with respect to said body portion.

**[0037]** In some embodiments there is provided a device for securing an array of containers to one another, each of said containers having a uniform geometry, said device comprises: first and second brackets; wherein each of said brackets comprises: a body portion shaped and dimensioned to intimately and releasably nest over a section of said uniform geometry of a finite number of said containers arranged in a co-planar adjacent arrangement; a plural number of couplings located at spaced apart locations on the periphery of said bracket; wherein one of a first set of said couplings on said first bracket is shaped and dimensioned to interconnect with a co-oriented one of a second set of said couplings on said second bracket; and, wherein said one of a first set of said couplings on said first bracket is moveable with respect to said first bracket.

**[0038]** The original text of the original claims is incorporated herein by reference as describing features in some embodiments.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0039]** FIG. 1 is a diagrammatic perspective view of a group of conjoined barrel tie-down brackets securing the same number of barrels to the bed of a flat bed truck.

**[0040]** FIG. 2 is a diagrammatic perspective view of a barrel tie-down bracket according to an exemplary embodiment of the invention.

**[0041]** FIG. 3 is a diagrammatic partial perspective view of a pair of adjacent barrel tie-down brackets conjoined by a fastening pin engaging the holes of overlapping peripheral couplings.

**[0042]** FIG. 4 is a diagrammatic partial cross-sectional side view of an interconnected

**[0043]** pair of bracket couplings of FIG. 3 taken along line 4-4.

[0044] FIG. 5 is a diagrammatic partial cross-sectional side view of a bracket coupling being engaged from below by the hook of a securing cable.

[0045] FIG. 6 is a diagrammatic partial cross-sectional side view of a bracket coupling being engaged from above by the hook of a securing cable.

[0046] FIG. 7 is a diagrammatic perspective view of an array of co-planarly adjacent barrels arranged in a triangular packing manner on a flatbed truck engaged on their bottom ends by a second group of conjoined barrel tie-down brackets.

[0047] FIG. 8 is a diagrammatic perspective view of a barrel engaged by a pair of

[0048] brackets at both ends being lifted by a hoist.

[0049] FIG. 9 is a diagrammatic top plan view of a pair of co-planarly adjacent barrels

[0050] engaged by a single oval-shaped bracket.

[0051] FIG. 10 is a diagrammatic top plan view of three co-planarly adjacent barrels arranged in a triangular packing manner and engaged by a single rounded equilateral triangle-shaped bracket.

[0052] FIG. 11 is a diagrammatic top plan view of four co-planarly adjacent barrels arranged in a square-type packing manner and engaged by a single rounded-corner square-shaped bracket.

[0053] FIG. 12 is a diagrammatic partial perspective view of an alternate embodiment of a bracket having a moveable coupling.

[0054] FIG. 13 is a diagrammatic partial cross-sectional side view of a bracket coupling of FIG. 12 taken along line 13-13.

[0055] FIG. 14 is a diagrammatic partial perspective view of an alternate embodiment of a bracket having a removable coupling.

[0056] FIG. 15 is a diagrammatic partial cross-sectional, partial bottom view of the bracket FIG. 14.

[0057] FIG. 16 is a diagrammatic cross-sectional side view of the bracket FIG. 14 taken along line 16-16.

[0058] FIG. 17 is a diagrammatic cross-sectional side view of an alternate embodiment of removable coupling having a friction clip hook structure.

[0059] FIG. 18 is a top, front, left side perspective view of a barrel tie-down bracket of FIG. 1.

[0060] FIG. 19 is a bottom, back, right side perspective view thereof.

[0061] FIG. 20 is a top plan view thereof.

[0062] FIG. 21 is a bottom plan view thereof.

[0063] FIG. 22 is a right side plan view thereof, the left side plan view being a mirror image thereof.

[0064] FIG. 23 is a front plan view thereof, the back plan view being a mirror image thereof.

[0065] FIG. 24 is a top, front, left side perspective view of a barrel tie-down bracket according to an alternate embodiment having alternately shaped couplings.

[0066] FIG. 25 is a bottom, back, right side perspective view thereof.

[0067] FIG. 26 is a top plan view thereof.

[0068] FIG. 27 is a bottom plan view thereof.

[0069] FIG. 28 is a right side plan view thereof, the left side plan view being a mirror image thereof.

[0070] FIG. 29 is a front plan view thereof, the back plan view being a mirror image thereof.

#### DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0071] In this specification, the references to top, bottom, upward, downward, upper, lower, vertical, horizontal, sideways, lateral, back, front, proximal, distal, near, far, etc. can be used to provide a clear frame of reference for the various structures with respect to other structures while the bracket is in its horizontal orientation as shown in FIG. 1, and not treated as absolutes when the frame of reference is changed, such as when the device is oriented sideways, or at an angle.

[0072] The term “substantially” can be used in this specification because manufacturing imprecision and inaccuracies, and damage can lead to non-symmetry and other inexactitudes in the physical characteristics, shape, dimensioning and orientation of various structures. Further, use of “substantially” in connection with certain geometrical shapes, such as “quadrangular”, “cylindrical”, “conical”, and “circular”, physical characteristics, such as “transparent”, and orientations, such as “axial”, “parallel” and “perpendicular”, can be given as a guide to generally describe the function of various structures, and to allow for slight departures from exact mathematical geometrical shapes, physical characteristics, and orientations, while providing adequately similar function. Those skilled in the art will readily appreciate the degree to which a departure can be made from the mathematically exact geometrical references or descriptions. Those skilled in the art will readily appreciate which features of individual embodiments can be applicable and incorporated into the features of other embodiments.

[0073] Referring now to the drawing, there is shown in FIGS. 1-2, an embodiment of a bracket 1 which includes a substantially flat, circular, ring-shaped body 11 having a central axis 10 and a pair of mutually orthogonal diametric cross-pieces 13,14 spanning the center hole 12 of the body to stiffen and strengthen the body. The bracket has a cylindrical sidewall 15 having a substantially uniform height H which extends downwardly from the outer circular peripheral edge 16 of the body. The body 11 and inner diameter of the sidewall 15 can have a diameter sized to allow the bracket to intimately nest over the outer diameter of the circular end 34 of a cylindrical barrel 36 such as a standard 60 gallon oil drum which is about 57.2 centimeters (22.5 inches). A purpose of the sidewall is to both stiffen and strengthen the body, and to discourage radial migration of the bracket off of the barrel. The bracket can be from a durable, rigid, strong material such as steel or plastic.

[0074] Six couplings 21-26 extend radially outwardly from the sidewall 15 at angularly evenly spaced apart locations. Thus, the angular spacing can be about 60 degrees between adjacent couplings. Each coupling can be formed by a D-shaped tab 27 having a medial cylindrical aperture 31 and having a flattened side base 28 connected to the sidewall. Alternately, as shown in FIG. 8, each coupling can be formed by a loop 29 of oblong bar material and shaped to have a substantially Greek letter omega shape where the open feet are connected to the sidewall.

[0075] The axial positions of the couplings 21-26 are reciprocatingly staggered so that a first set of three couplings 21,23,25 mutually uniformly angularly spaced apart by about 120 degrees are located at a first upper axial position while a second set of three couplings 22,24,26 mutually uniformly angularly spaced apart by about 120 degrees, and angularly offset from the first set by about 60 degrees, are

located at a second lower axial position. In this way, a pair of brackets can be secured upon a pair of co-planar adjacent barrels by engaging similar sections of their uniform geometry, namely their circular ends. The couplings extending from coplanar adjacent brackets can overlap one another, bringing their respective apertures **31** in alignment so they can be engaged by a retaining pin, while the top surface of the adjacent brackets remain substantially coplanar.

**[0076]** As shown in FIG. 1, by locating the six couplings at 60 degree intervals around the outer circumference of the sidewall, an array **35** of barrels **36** each having its own dedicated bracket **37** can be loaded for transport on the supporting bed surface **38** of a vehicle in the most compact triangular or hexagonal packing manner. By tying the array together, it is far less likely that any barrel will be dislodged. However, the bracketed barrels can also be further secured upon the support surface **38** by attaching one or more tie-down cables **55** to the vehicle. Each adjustable tie-down cable includes a ratcheting adjustment device **57** and a hook **56** dimensioned to releasably engage the aperture of a free coupling.

**[0077]** Referring now to FIGS. 3 and 4, a pair of coplanar adjacent brackets **41,42** are angularly oriented to allow one of their respecting couplings **43,44** to overlap so that the couplings can be interconnected and the two brackets can be conjoined. Overlapping couplings having co-aligned apertures **45,46** can be secured to one another by a fastener such as a headed retaining pin **47** including an axial post **49** sized to intimately engage both apertures. The pin restricts radial movement between conjoined brackets. The pin can be held axially in place by a clip such as a cotter pin **48** engaging the end of the post opposite the head **50**. Alternately, other fasteners, both releaseable and non-releaseable, such as threaded bolts, clamps, clips, corkscrew pins, padlocks, rivets or the like can be used. Although the preferred exemplary embodiment describes a bracket system which is intended to be reusable, the disclosed bracket system can be made from disposable or recycleable plastic, conjoined with permanent fasteners, and removed from the array of barrels or other containers while conjoined or by cutting some or all of the interconnected couplings. This view also shows that each bracket **41,42** can have a substantially L-shaped cross-sectional geometry.

**[0078]** The axially staggered couplings **43,44** allow the adjacent brackets **41,42** to have upper surfaces **51,52** which are coplanar, falling substantially within the same plane **53**. The dimensioning of the head **50** of the pin **47** can be selected to allow the upper surface of the head to be coplanar as well. By keeping these surfaces coplanar, the chances of the brackets inadvertently snagging on something are minimized.

**[0079]** FIG. 4 also shows that the bracket can be adapted to carry one or more layers **57** of resilient material such as neoprene to more firmly secure the bracket to the barrel and accommodate minor variations in diameter due to dents or manufacturing inconsistencies. The resilient material layer also helps cushion barrels from vibration.

**[0080]** Further, as shown in FIGS. 5-6 the hooks **56** of the tie-down cables **55** can be dimensioned so that no portion of the hook extends beyond the common plane **53** of the upper surfaces of joined adjacent brackets and their connecting pins regardless of whether the hook engages an axially upper or axially lower aperture of a coupling.

**[0081]** In FIG. 5 where the coupling **43** being engaged is one of the set of couplings in the upper axial position, the hook **56** can engage from below so that its tip portion **58** forms an upper surface **59** at or below the plane **53** formed by the upper surface **51** of the bracket **41**. The hook **56** can be made to have a tip portion which has a maximum vertical dimension  $T_t$  which is less than or equal to the height  $H_c$  of the gap formed between the upper surface of the coupling and the upper surface of the bracket. This prevents any portion of the hook being located above the plane when engaged where it may interfere with structures above that plane.

**[0082]** Similarly, as shown in FIG. 6, where the coupling **43** is engaged by the hook **56** from above, the shank portion **60** can be dimensioned so that the maximum vertical dimension  $T_s$  is less than or equal to the height  $H_c$  of the gap between the upper surfaces of the coupling and the bracket **41**. This prevents any portion of the hook being located above the common plane **53** of the adjacent bracket upper surfaces when engaged. This also allows non-interfering engagement with any of the set of axially lower couplings.

**[0083]** In this way the upper surface of the array presents a coplanar surface so that snags are reduced and the top of the array can support a flat platform such as a layer of plywood which in turn can support a second array stacked thereon. In this way the brackets are useful in securing many barrels in a warehouse environment.

**[0084]** It shall be understood that the couplings are further shaped and dimensioned to have rounded outer surfaces which help avoid their inadvertently damaging or snagging items of clothing, cables or other materials that may contact the bracket.

**[0085]** For an even more rugged arrangement, a second array of interconnected brackets **61,62,63,64** can be formed on the circular opposite ends of the array **65** of barrels as shown in FIG. 7.

**[0086]** As shown in FIG. 8 each barrel **71** can be equipped with brackets **72,73** at both ends and thereby moved individually using the attached brackets as convenient grasping points, or by using for example a cable **75** and hoist **76**. The brackets can be secured to the ends of the barrel by a plurality of axial straps **77** engaging the couplings of both brackets, or other spaced apart anchorments **78** formed onto the brackets.

**[0087]** As shown in FIGS. 9-11, the bracket can be designed to be engaged by a plural number of adjacent barrels. In FIG. 9, a bracket **80** having a generally oval shape can engage the co-planar adjacent ends of a pair of barrels **81,82**. In FIG. 10, a bracket **83** having a generally rounded equilateral triangular shape engages three co-planar adjacent barrels **84,85,86** arranged in a triangular packing manner. In FIG. 11, four co-planar adjacent barrels **87,88,89,90** arranged in a square-type packing formation can be engaged by a bracket **91** having a generally rounded corner square shape. Even though the arrangement of barrels in the square shape takes up more space, in many operations it is preferable so that the four barrels can be carried on easily moved familiar square wooden pallets and present the same footprint regardless of orientation.

**[0088]** FIGS. 12-13 show and alternate embodiment of a bracket **100** similar to the bracket of FIG. 2 including a substantially flat, circular, ring-shaped body **101** and a cylindrical sidewall **102** extending downwardly from the distal circular peripheral edge **103** of the body from which

can extend six angularly spaced apart couplings which allow the bracket to be secured to one or more adjacent brackets. In this embodiment however, at least one of the six couplings **110** is movable **111** with respect to the sidewall. Specifically, in this embodiment, the coupling **110** can be secured to the sidewall by an adjustable fastener **120** engaging a track **115** located on the periphery of the body, allowing the coupling to be repositioned angularly to better accommodate misalignment of neighboring brackets due to misshapen containers and/or loading imprecision or inaccuracy.

**[0089]** The track **115** can include an arcuate slot extending angularly through a medial portion of the sidewall **102** and substantially parallel to the peripheral edge **103**. The fastener **120** can include an adjustable screw **125** engaging a threaded bore **126** set into the arcuate proximal face **127** at the base of the coupling. A spring **128**, coaxial with the threaded shaft of the screw, can provide adjustable frictional contact between the fastener and the track and can optionally lock the coupling in position with respect to the track. It shall be noted that the fastener can be shaped and dimensioned so that the head **129** of the screw does not extend proximally beyond the inner surface **116** of the sidewall. In this way the bracket **100** can be readily fitted over the cylindrical top **117** of a barrel. It shall be noted that adjacent tracks on a bracket can be staggered axially with respect to the central axis of the cylindrical bracket so that couplings from adjacent brackets can overlap. Those skilled in the art will readily appreciate other mechanical fasteners which allow movement of the coupling.

**[0090]** Optionally, a tongue **121** can be formed on the arcuate proximal face **127** of the coupling **110**. The tongue can prevent roll movement **130** of the coupling about an axis **131** normal to the sidewall. Alternately, by eliminating the tongue the minor roll movement of the coupling can facilitate alignment of the coupling with a coupling on a neighboring bracket.

**[0091]** Referring now to FIGS. **14-16** there is shown an alternate embodiment of the bracket **140** similar to the bracket of FIG. **2** including a substantially flat, circular, ring-shaped body **141** and a cylindrical sidewall **142** extending downwardly from the distal circular peripheral edge **143** of the body. A number of couplings **150** can be installed on the bracket in order to allow the bracket to be secured to one or more adjacent brackets.

**[0092]** Each coupling **150** can include a substantially rigid plate portion **151** having a distal end **153** including an aperture **152** extending axially with respect to the central axis of the substantially cylindrical bracket **140**. The proximal end of the plate connects to a hook structure **155** adapted to wrap around and movably secure to the ring-shaped body **141** of the bracket. Indeed, the coupling can completely detach from the remainder of the bracket. The coupling can also include an arcuate stabilizing ridge **158** extending axially downwardly from the bottom of the plate. The ridge is oriented to have a concave surface nest against the convex surface of the sidewall **142** when the coupling is placed under various loads to help keep the coupling firmly secured to the body of the bracket.

**[0093]** Each coupling can be angularly positioned at one of a plurality of discrete angular locations determined by a series of angularly spaced-apart seats **144** formed on the bracket. This embodiment shows that the seats can be notches set into the proximal edge **145** of the ring-shaped

body **141** of the bracket **140**. Each coupling can include a distally projecting nib **156** formed in the crook **157** of the hook structure **155**. The nib can be shaped and dimensioned to nest within the notch and thereby prevent angular movement of the coupling when so engaged. The number of discrete locations can be determined by the number of notches. In an alternate embodiment, similar notches can be formed angularly abutting one another continuously around the inner periphery of the ring-shaped body to provide a maximum of discrete angular locations.

**[0094]** FIG. **17** shows that a coupling **160** can have a plate portion **161** that is spaced a distance **D** below the upper surface of the hook structure **162** with respect to the embodiment of FIG. **16** so that the FIG. **17** coupling is axially located to overlap a neighboring FIG. **16** coupling when a pair of brackets are coplanarly adjacent.

**[0095]** FIG. **17** further shows an alternate embodiment of the hook structure **162** which can be formed to include a friction clip **164** that bears against the undersurface **165** of the ring-shaped body of the bracket. In this way the coupling can secure to the ring-shaped body by friction alone. Further, the angular position of the coupling is not discrete but rather can be adjusted in an infinite number of angular locations.

**[0096]** FIGS. **18-23** show barrel tie-down bracket of FIG. **2** in various other views.

**[0097]** FIGS. **24-29** show the various views of an alternate embodiment of a barrel tie-down bracket having each coupling formed by a loop of oblong bar material and shaped to have a substantially Greek letter omega shape where the open feet are connected to the sidewall.

**[0098]** It shall be understood that the barrel tie-down bracket can be used for many types of substantially similarly shaped containers having predictable geometry ends, and which can be arranged so that those ends are co-planarly adjacent. Indeed, it shall be understood that only a section of the geometry needs to be uniform so long as that section is the one engaged by the bracket and that those sections are co-planarly adjacent so that the couplings can be co-oriented for interconnection so that the containers can be securely conjoined. For arrays of containers that are uniformly shaped, brackets can be manufactured in a more uniform manner. An advantage of the disclosed bracket system for substantially cylindrical containers such as barrels, including standard oil drums, having axially staggered couplings is that each bracket can be manufactured identically thus avoiding costly changes in molding.

**[0099]** Although the above utilitarian aspects have been described in connection with the operation of an array of oil drums, it shall be understood that the above system can be adapted to many other containers having similar geometries to one another.

**[0100]** While the preferred embodiments of the invention have been described, modifications can be made and other embodiments may be devised without departing from the spirit of the invention and the scope of the appended claims.

1. A device for securing a pair of containers having a substantially uniform geometry to one another, said device comprises:

first and second substantially co-planarly adjacent brackets;

wherein each of said brackets comprises:

a body portion shaped and dimensioned to intimately and releasably nest over a section of said uniform geometry;

- said body portion having a periphery;  
 a plural number of couplings located at spaced apart locations on the periphery;  
 wherein a first one of said couplings is spaced an acute angle apart from a second neighboring one of said couplings;  
 wherein one of a first set of said couplings on said first bracket is shaped and dimensioned to interconnect with a co-oriented one of a second set of said couplings on said second bracket.
2. The device of claim 1, wherein said plural number of couplings are movably secured to said body portion.
3. The device of claim 2, wherein said plural number of couplings are detachable from said body portion.
4. The device of claim 3, wherein at least one of said plural number of couplings comprises:  
 a plate having a distal aperture;  
 a hook connected to said plate;  
 wherein said hook is shaped and dimensioned to releasably engage said body portion.
5. The device of claim 4, wherein said body portion comprises a plurality of acutely angularly spaced apart seats, wherein each of said seats forms a discrete mounting location for one of said plural number of couplings.
6. The device of claim 5, wherein each of said seats comprises a notch formed on an edge of said body portion, and where said one of said plural number of couplings comprises a nib oriented to engage said notch when said coupling is secured to said body portion.
7. The device of claim 1, wherein said body portion comprises a track extending angularly along said body portion;  
 wherein a first one of said plural number of couplings comprises:  
 a base adjustably mounted to said track.
8. The device of claim 7, wherein said track extends angularly along an arcuate sidewall of said body portion.
9. The device of claim 1, wherein said section of said uniform geometry is co-planar when said pair of containers is arranged in a co-planar adjacent manner.
10. The device of claim 9, wherein said section of said uniform geometry is a circular top end of said container.
11. The device of claim 1, wherein said plural number is six.
12. The device of claim 1, wherein said one of a first set of said couplings on said first bracket is an upper coupling axially spaced apart from said one of a second set of said couplings on said second bracket wherein said one of a second set of said couplings is a lower coupling.

13. The device of claim 12, wherein said upper coupling is axially located to overlap said lower coupling when said first and second brackets are coplanarly adjacent.

14. The device of claim 12, wherein said upper coupling is shaped to have an axial upper aperture, and said lower coupling is shaped to have an axial lower aperture; and wherein said upper aperture and said lower aperture can be engaged by a fastener restricting radial movement between said first and second brackets when said first and second brackets are coplanarly adjacent.

15. In a system for securing a plurality of containers having a substantially uniform geometry to the flat bed of a vehicle using a plurality of brackets, wherein each of said brackets secures to a section of at least one of said containers and a plurality of cables anchor said brackets to said vehicle, an improvement which comprises each of said brackets comprising:

- a body portion shaped and dimensioned to intimately engage a portion of said uniform geometry;
- a plural number of couplings extending from a periphery of said body;

wherein said plural number of couplings are acutely angularly spaced apart from one another;

wherein each of said plural number of couplings is shaped and dimensioned to interconnectedly conjoin with a corresponding coupling on a substantially co-planarly adjacent one of said brackets, and,

wherein at least one of said plural number of couplings is movable with respect to said body portion.

16. A device for securing an array of containers to one another, each of said containers having a uniform geometry, said device comprises:

first and second brackets;

wherein each of said brackets comprises:

- a body portion shaped and dimensioned to intimately and releasably nest over a section of said uniform geometry of a finite number of said containers arranged in a co-planarly adjacent arrangement;
- a plural number of couplings located at acutely angularly spaced apart locations on the periphery of said bracket;

wherein one of a first set of said couplings on said first bracket is shaped and dimensioned to interconnect with a co-oriented one of a second set of said couplings on said second bracket; and,

wherein said one of a first set of said couplings on said first bracket is moveable with respect to said first bracket.

\* \* \* \* \*