



US 20250262767A1

(19) **United States**(12) **Patent Application Publication**
GILCHRIST(10) **Pub. No.: US 2025/0262767 A1**(43) **Pub. Date: Aug. 21, 2025**(54) **ROBOTIC TRANSPORT SYSTEM AND METHOD THEREFOR**(71) Applicant: **HIGHRES BIOSOLUTIONS, INC.**,
Beverly, MA (US)(72) Inventor: **Ulysses GILCHRIST**, Reading, MA
(US)(21) Appl. No.: **19/001,007**(22) Filed: **Dec. 24, 2024****Related U.S. Application Data**

(63) Continuation of application No. 18/474,893, filed on Sep. 26, 2023, now Pat. No. 12,172,326, which is a continuation of application No. 17/476,249, filed on Sep. 15, 2021, now Pat. No. 11,766,781, which is a continuation of application No. 17/032,011, filed on Sep. 25, 2020, now Pat. No. 11,123,870.


(60) Provisional application No. 62/907,297, filed on Sep. 27, 2019.


Publication Classification(51) **Int. Cl.****B25J 9/16** (2006.01)**B25J 13/00** (2006.01)**B25J 13/08** (2006.01)(52) **U.S. Cl.**CPC **B25J 9/1676** (2013.01); **B25J 9/161**
(2013.01); **B25J 9/1666** (2013.01); **B25J**
9/1694 (2013.01); **B25J 13/006** (2013.01);
B25J 13/088 (2013.01)


(57)


ABSTRACT

A robotic transport system including, carriage-borne articulated arm having frame, drive section connected to frame, articulated arm portions operably coupled to drive section providing carriage-borne articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm portions in a collaborative space, corresponding to selectably variable carriage location of carriage-borne articulated arm, from a first location, to another different location of at least the portion of the articulated arm portions in the collaborative space and an electromagnetic affection envelope, generated by electromagnetic emitters, borne by carriage-borne articulated arm so that the electromagnetic affection envelope is defined by carriage-borne articulated arm and is close coupled and substantially conformal to at least a dynamic contour portion of each different arm shape of carriage-borne articulated arm with at least the portion of the articulated arm portions moving from first location to other different location.

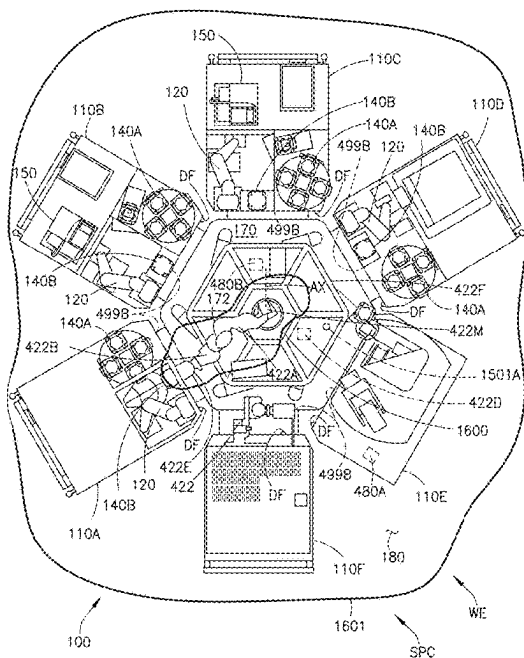

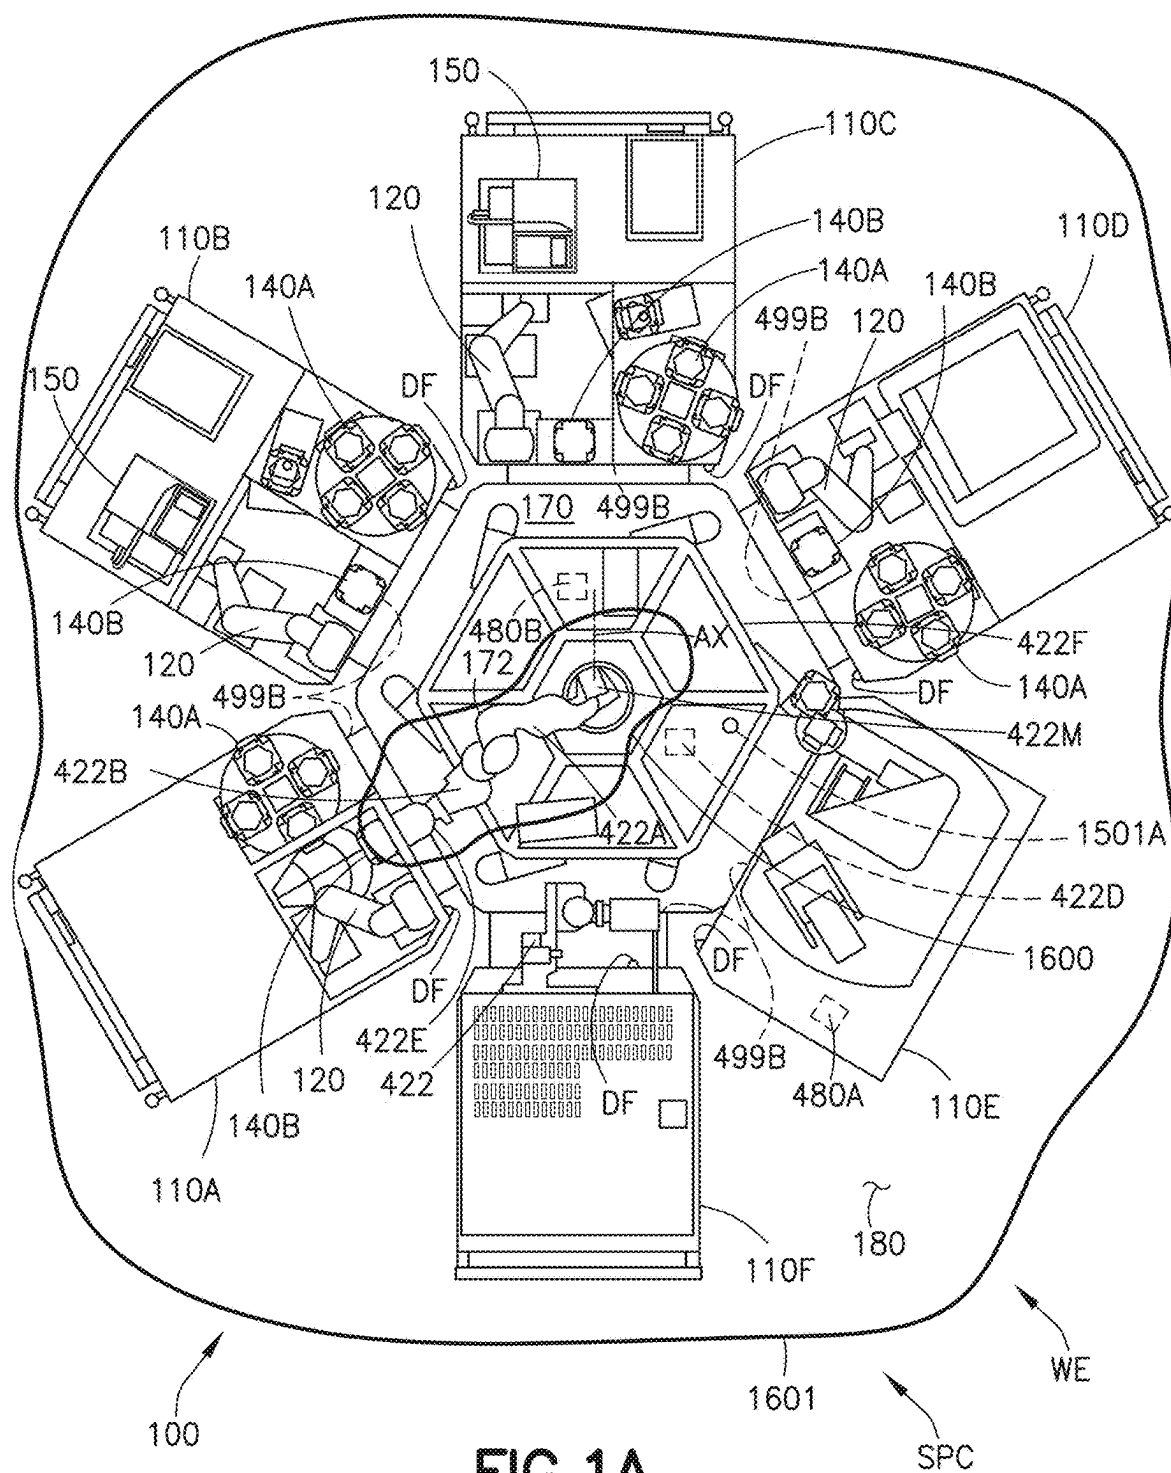

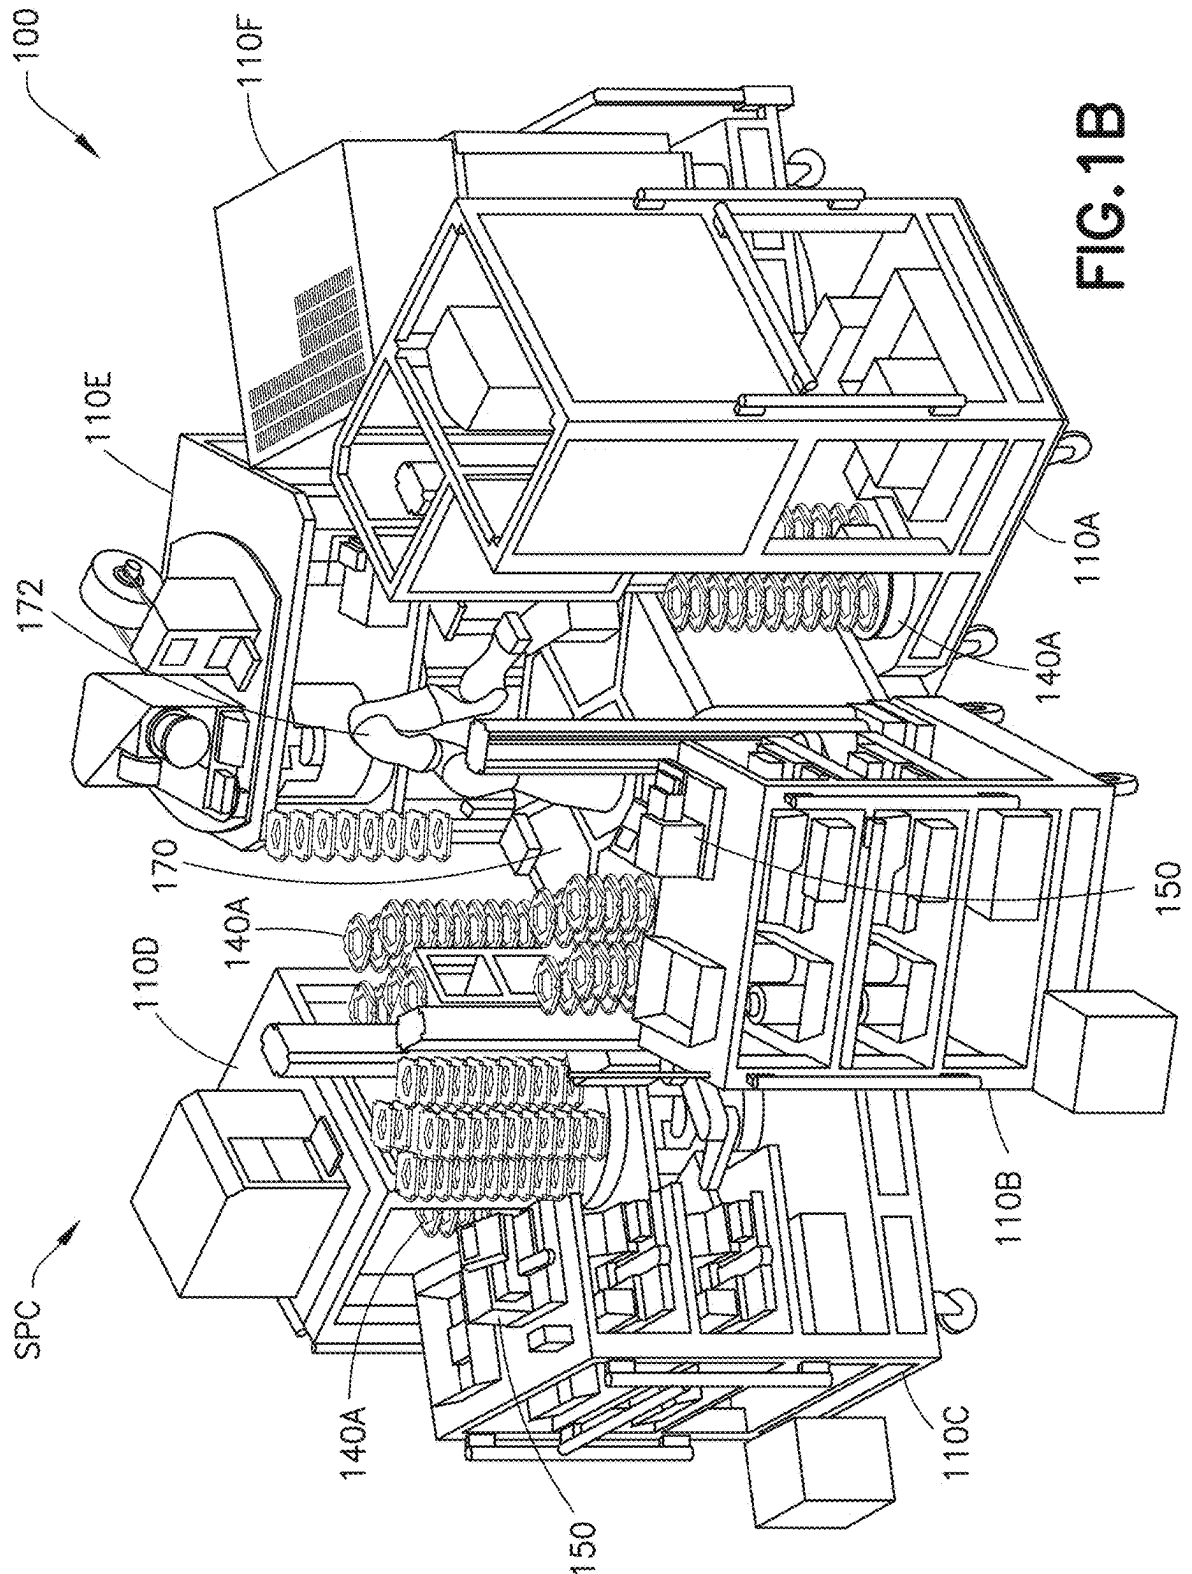

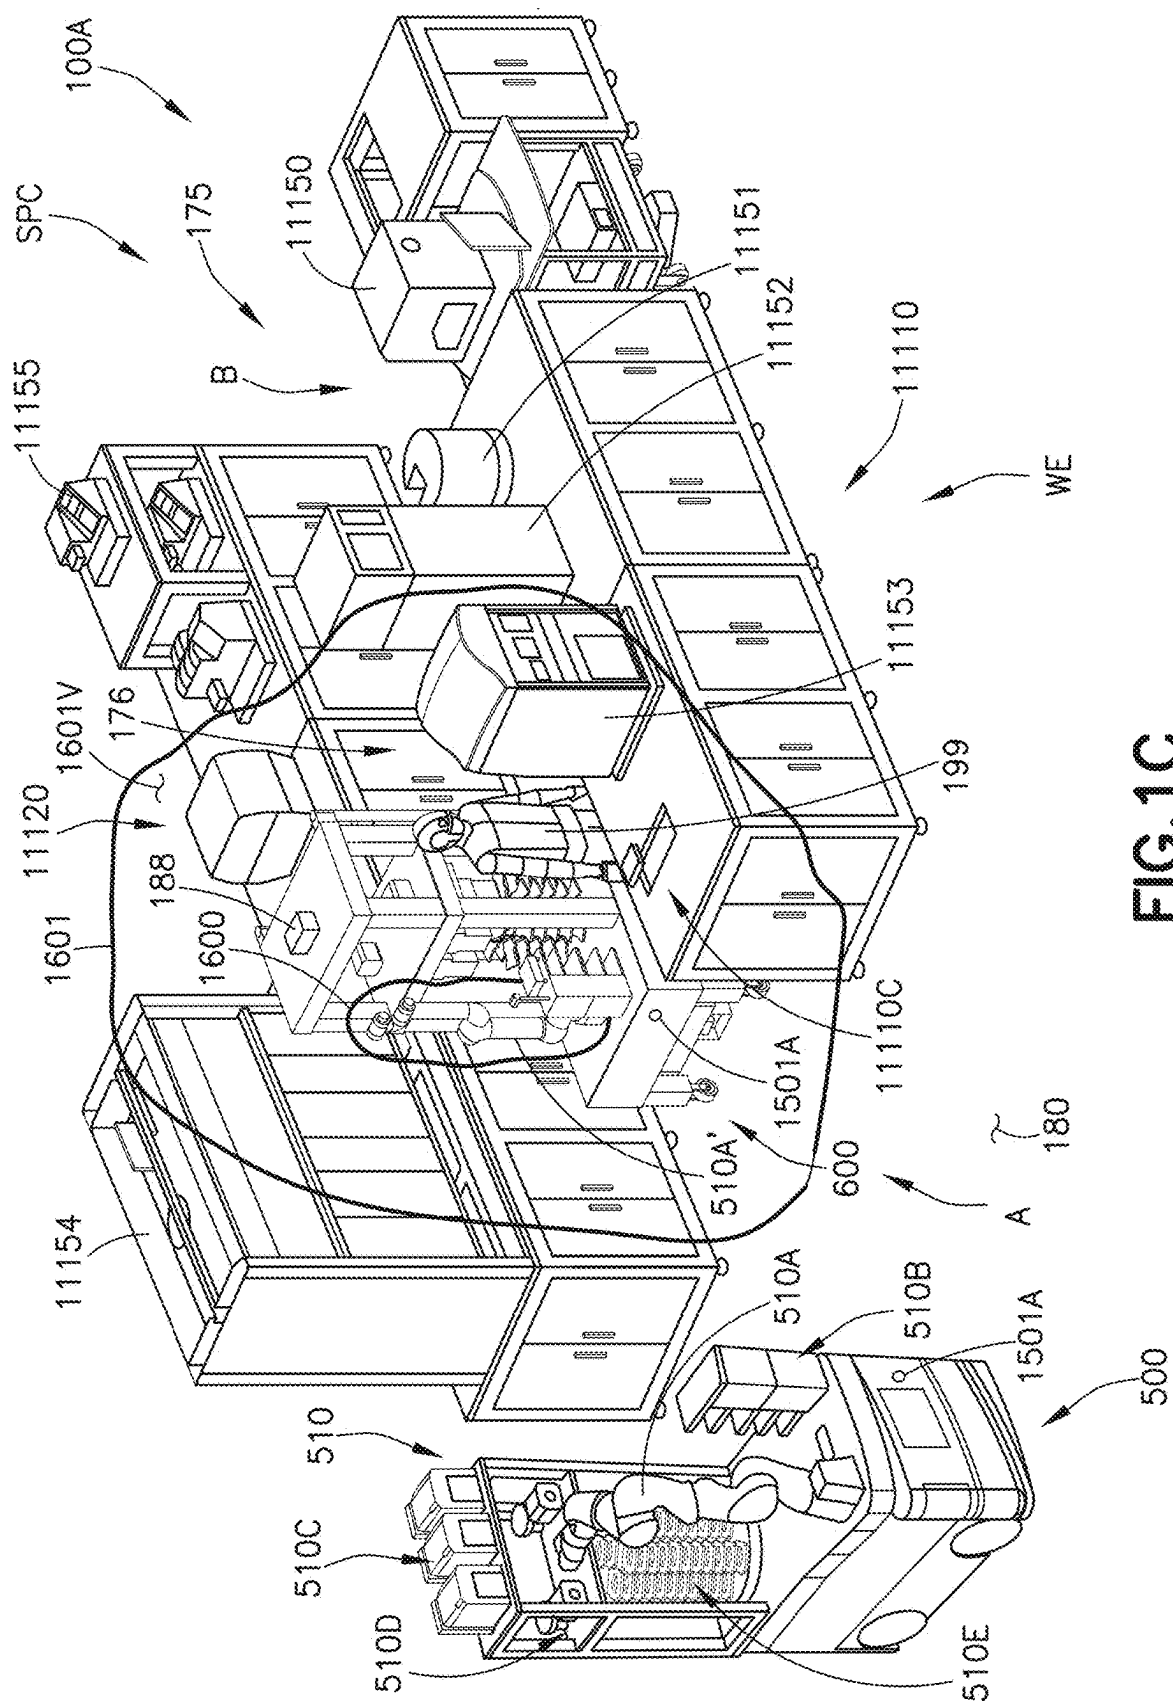

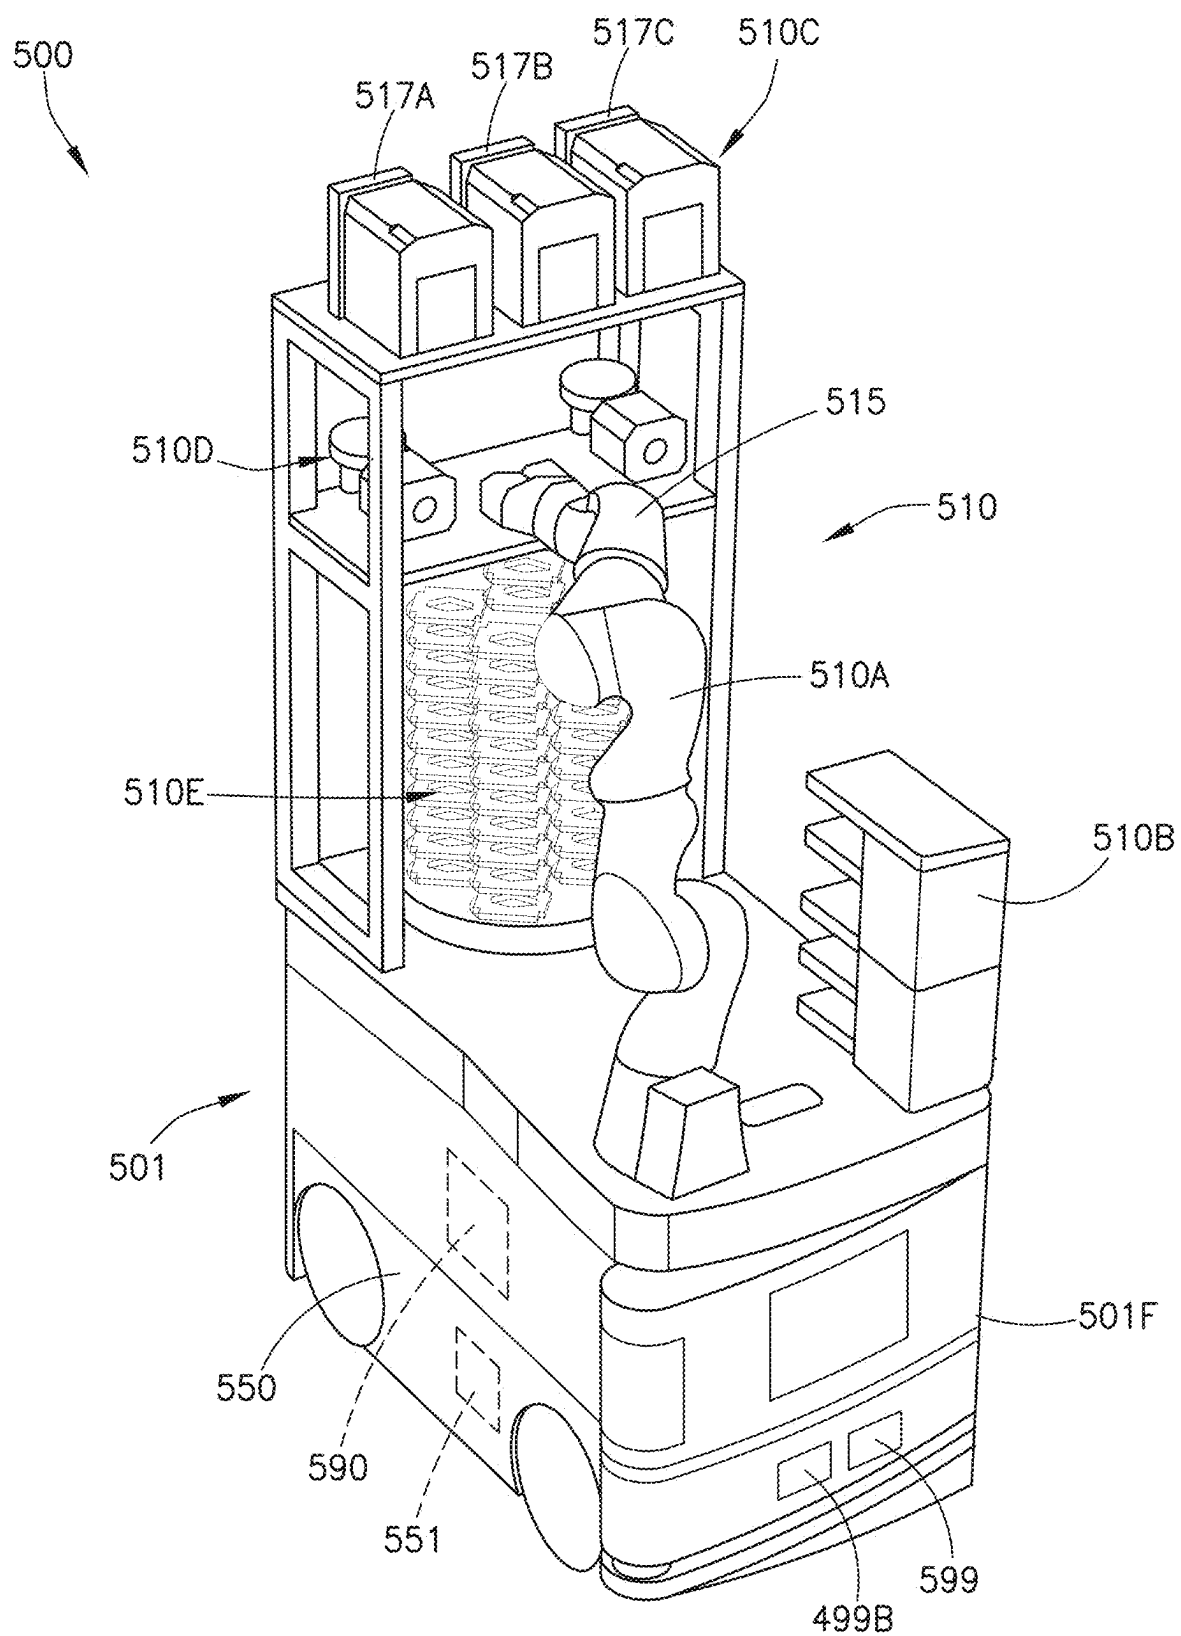


FIG.2

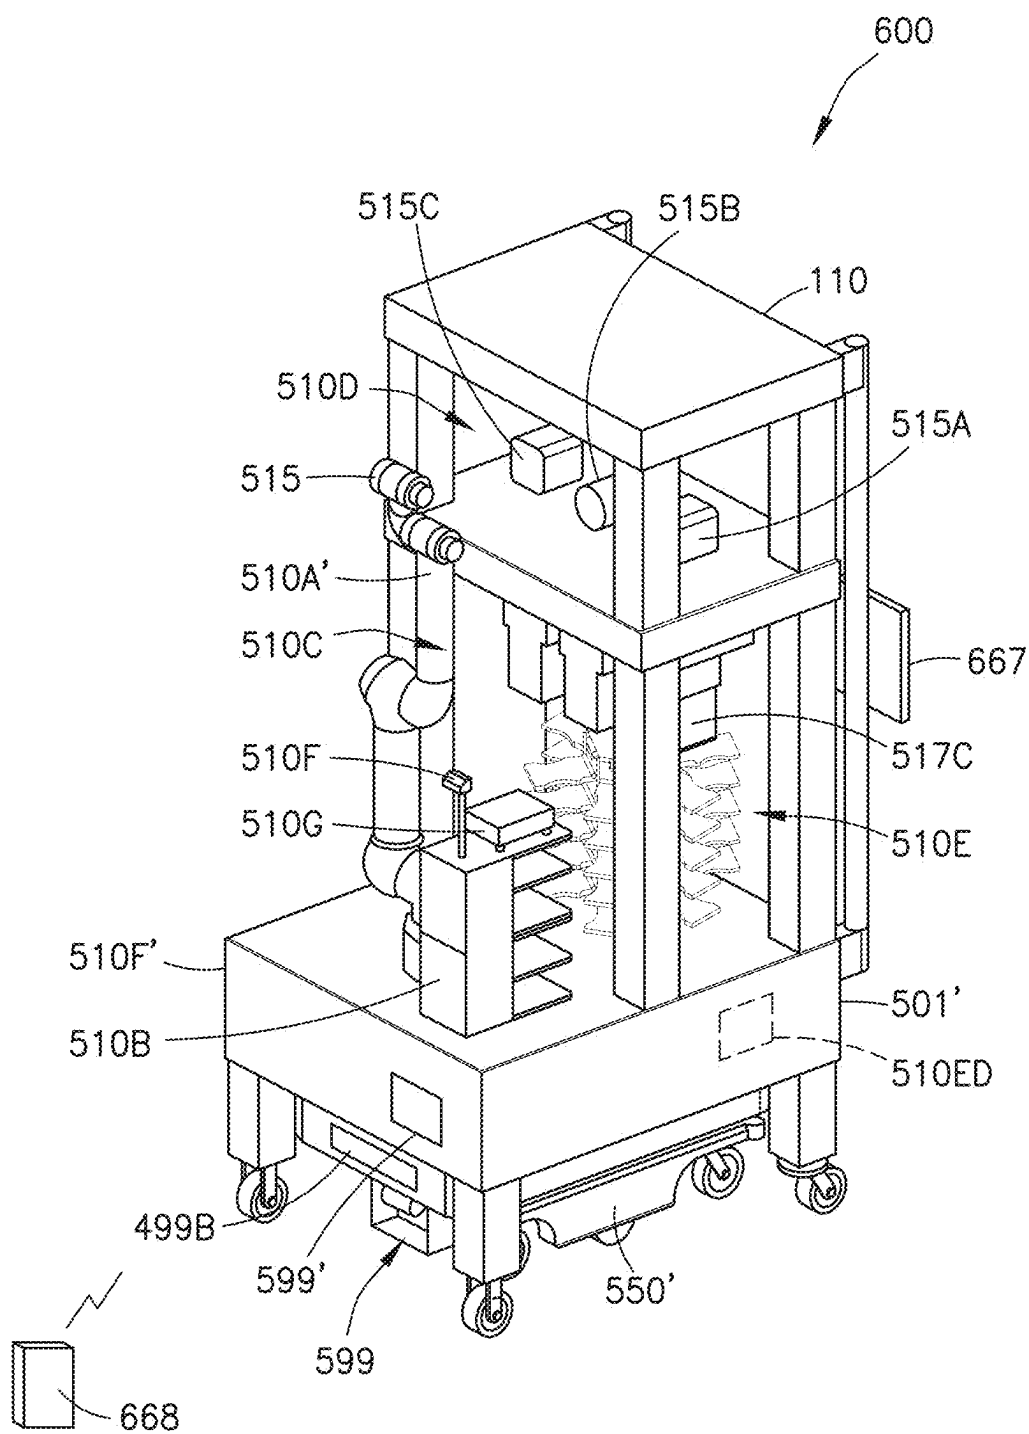


FIG.3A

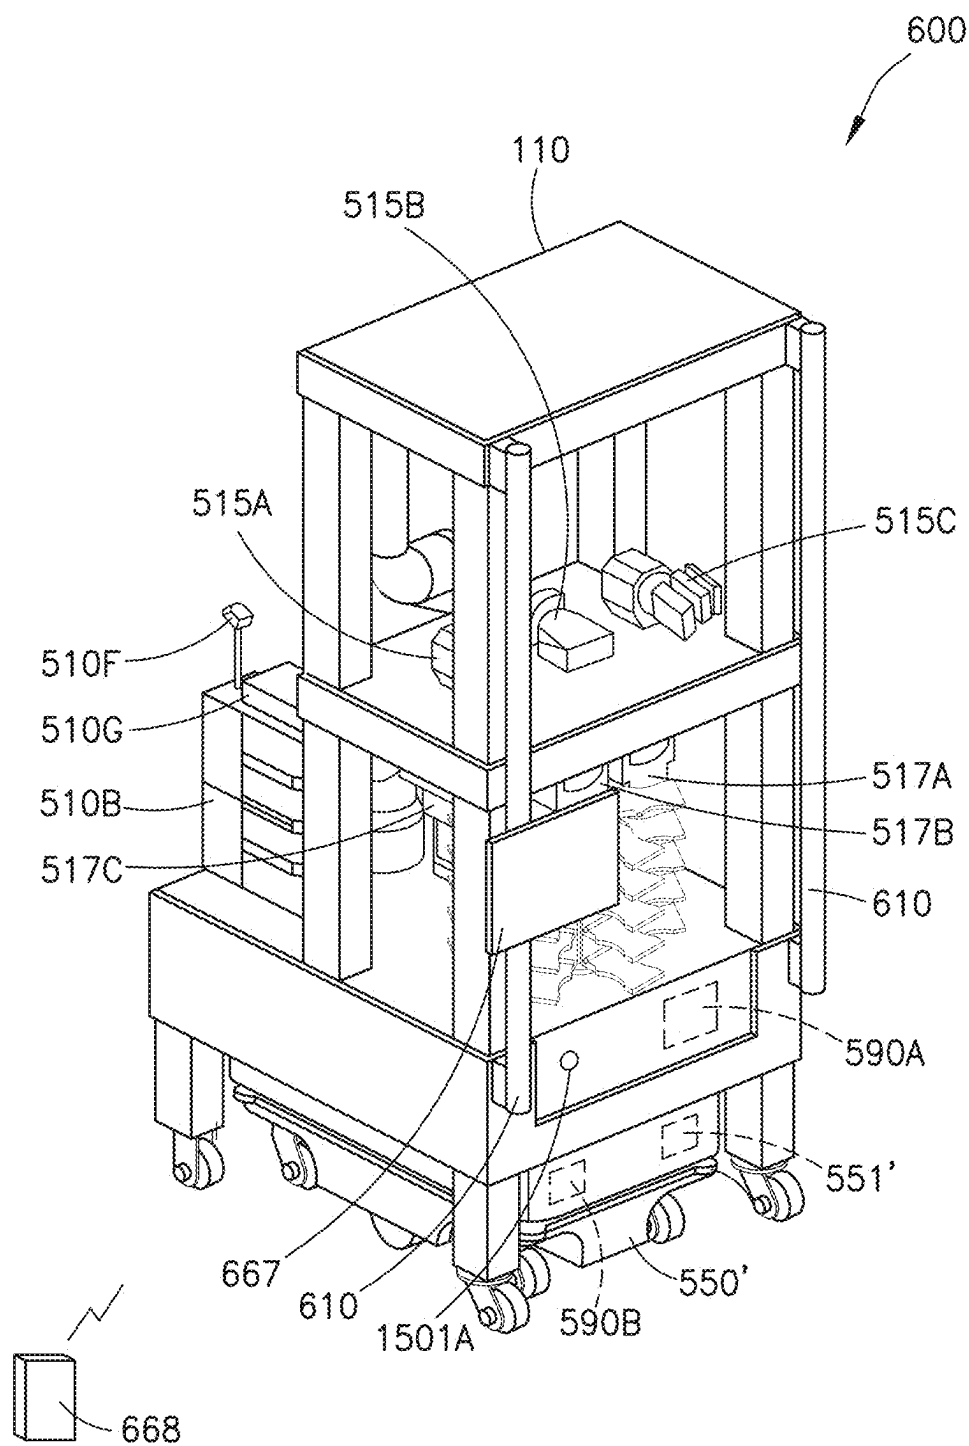


FIG.3B

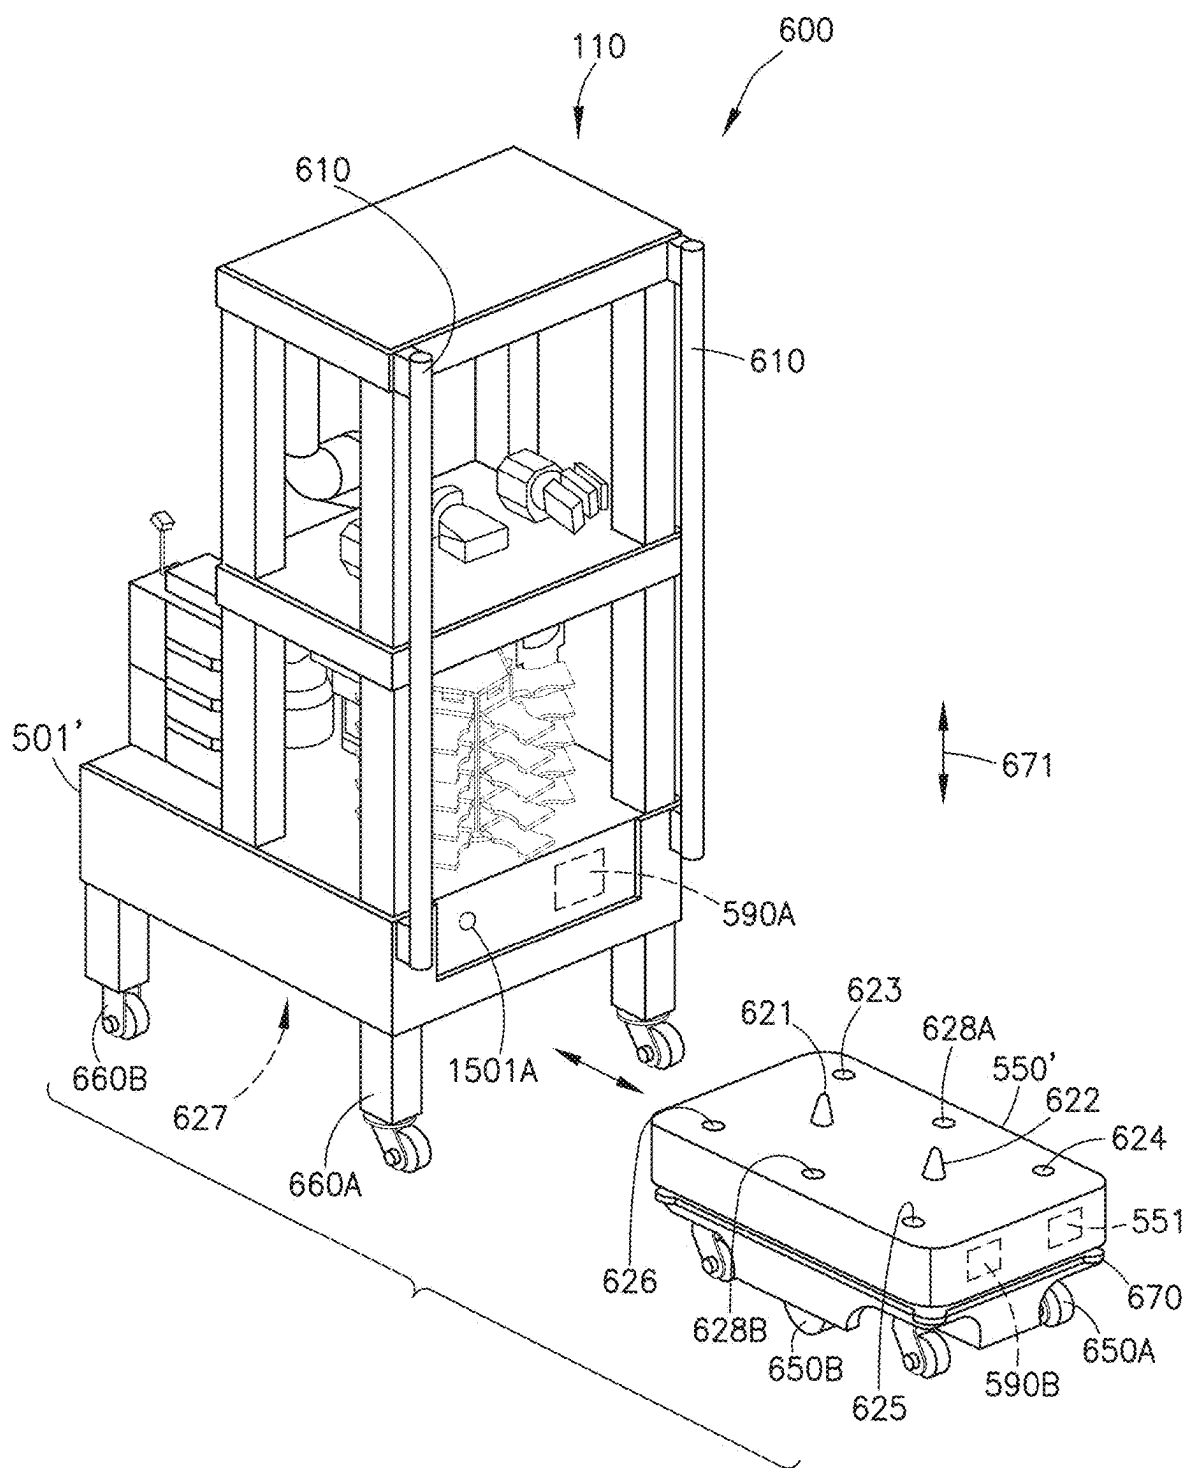
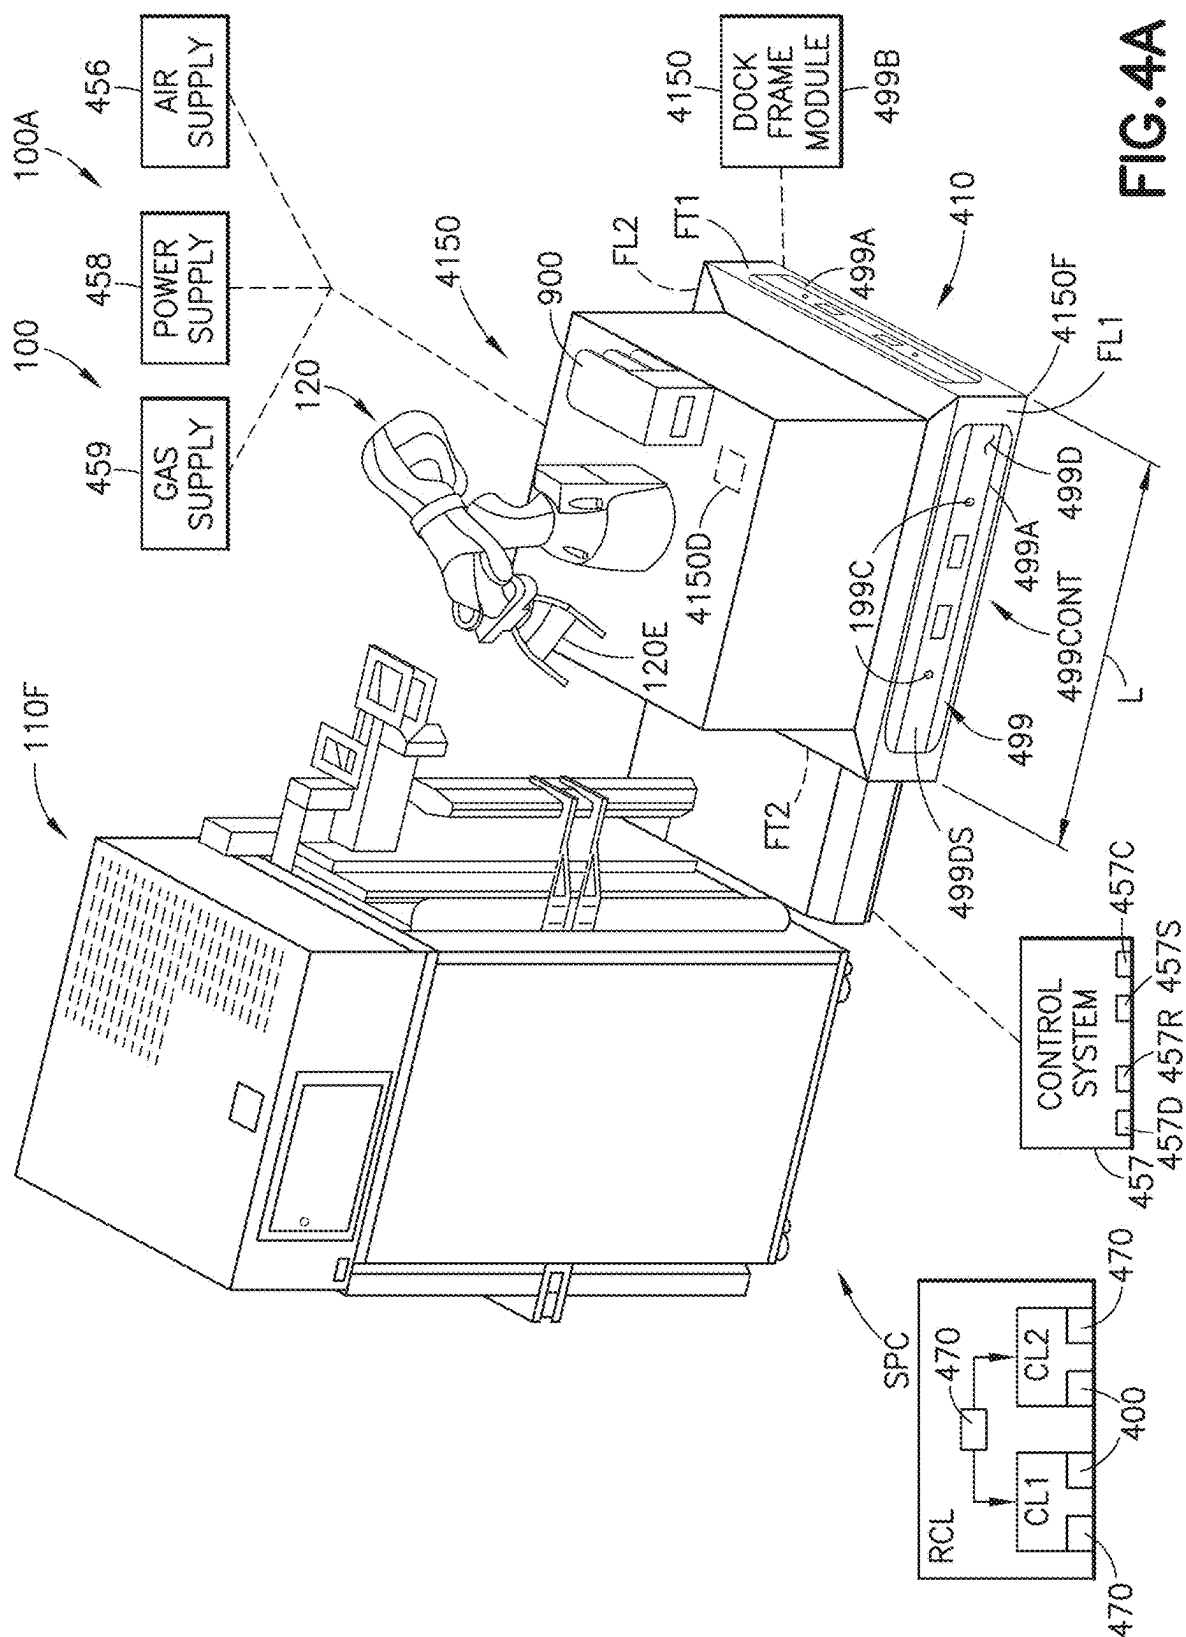
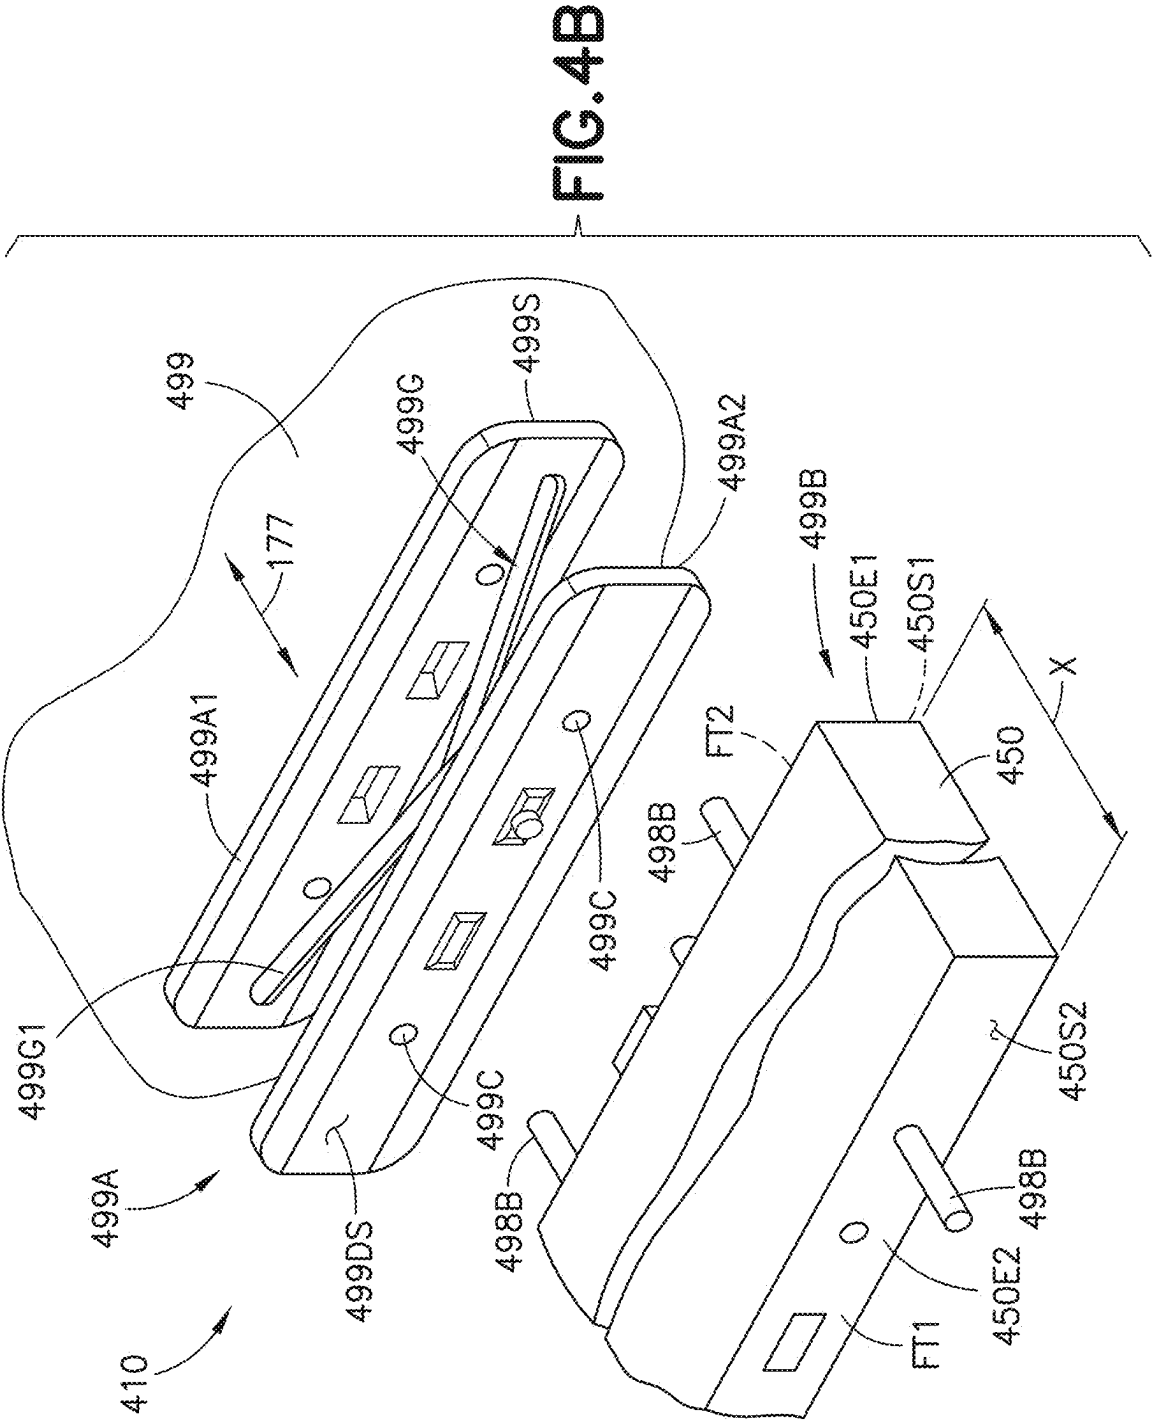
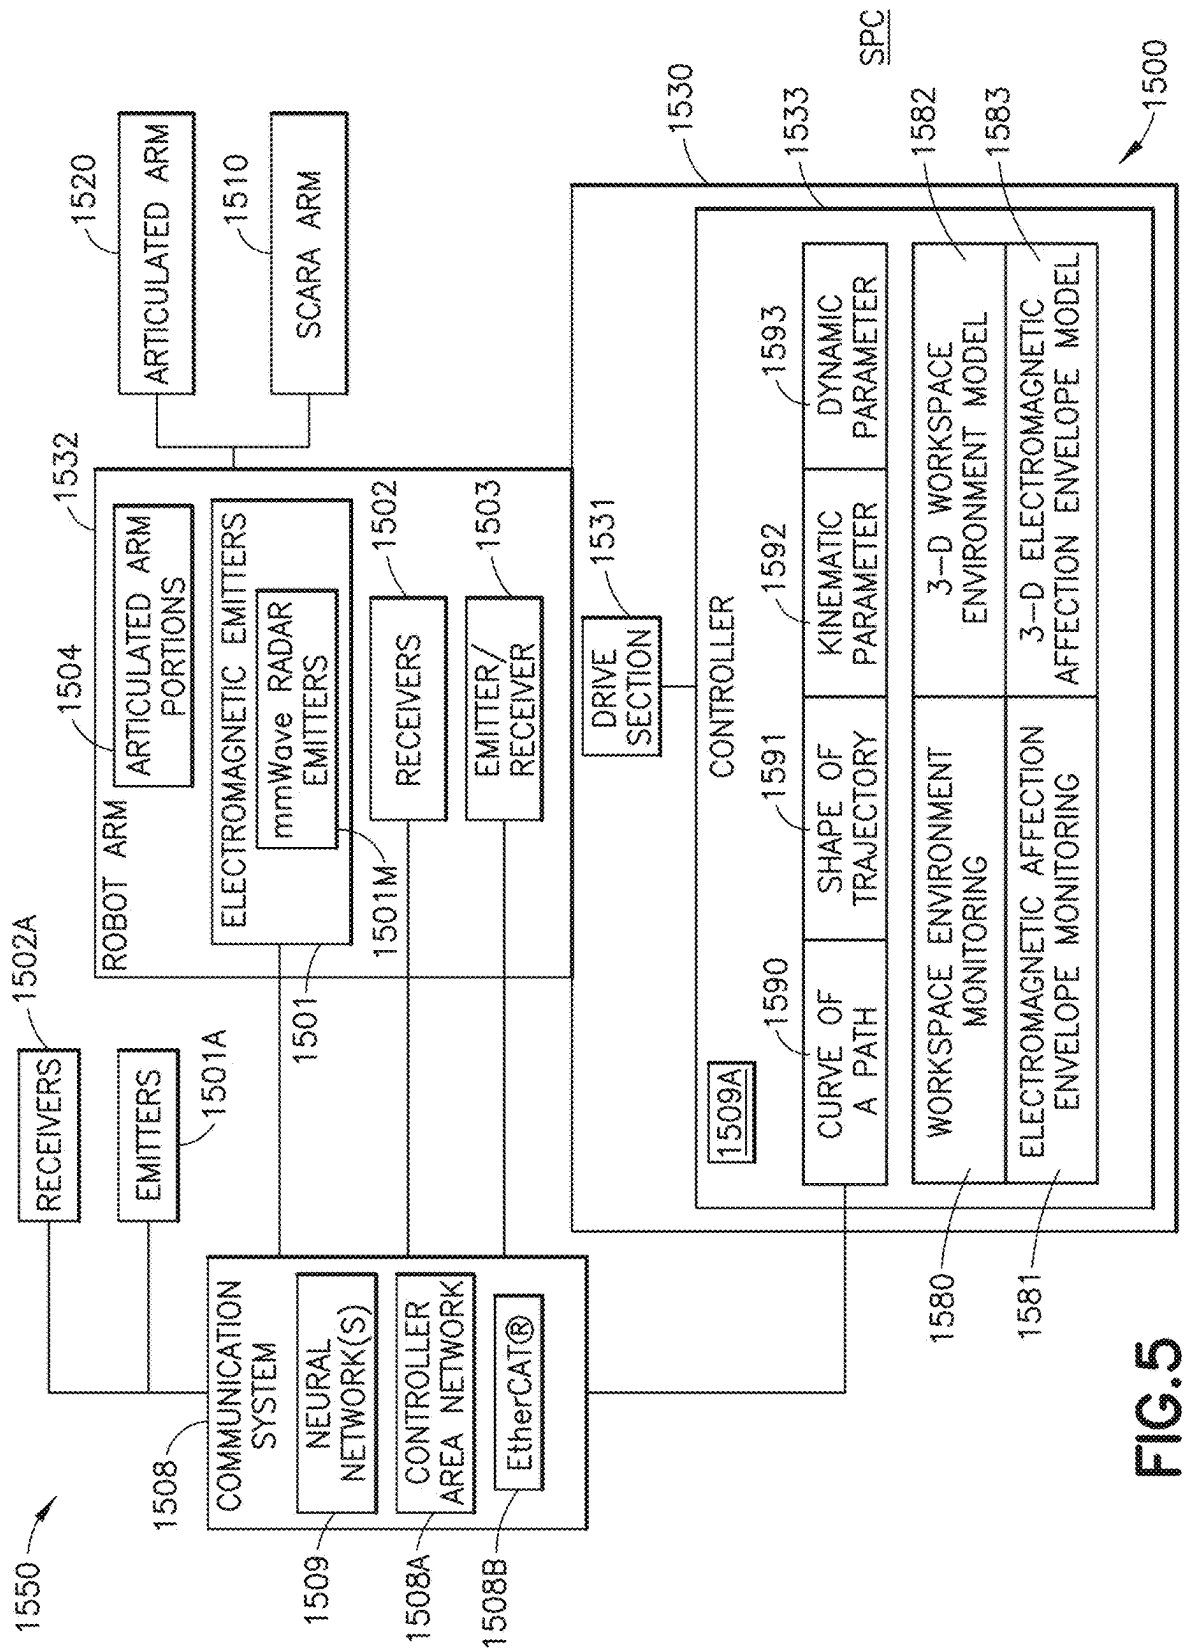
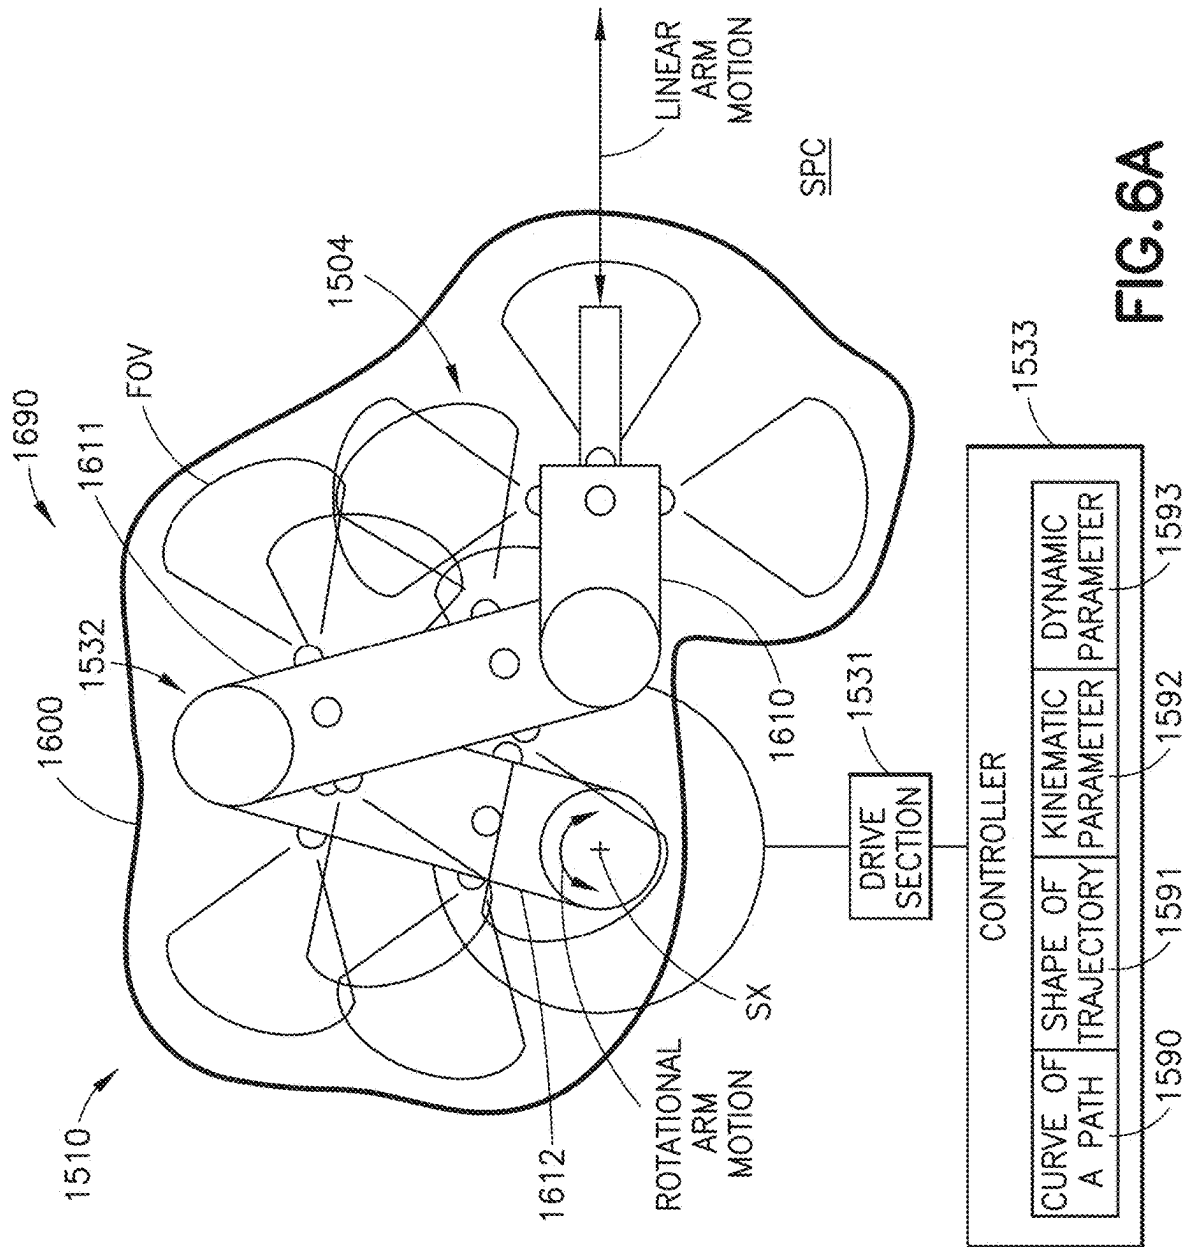


FIG.3C









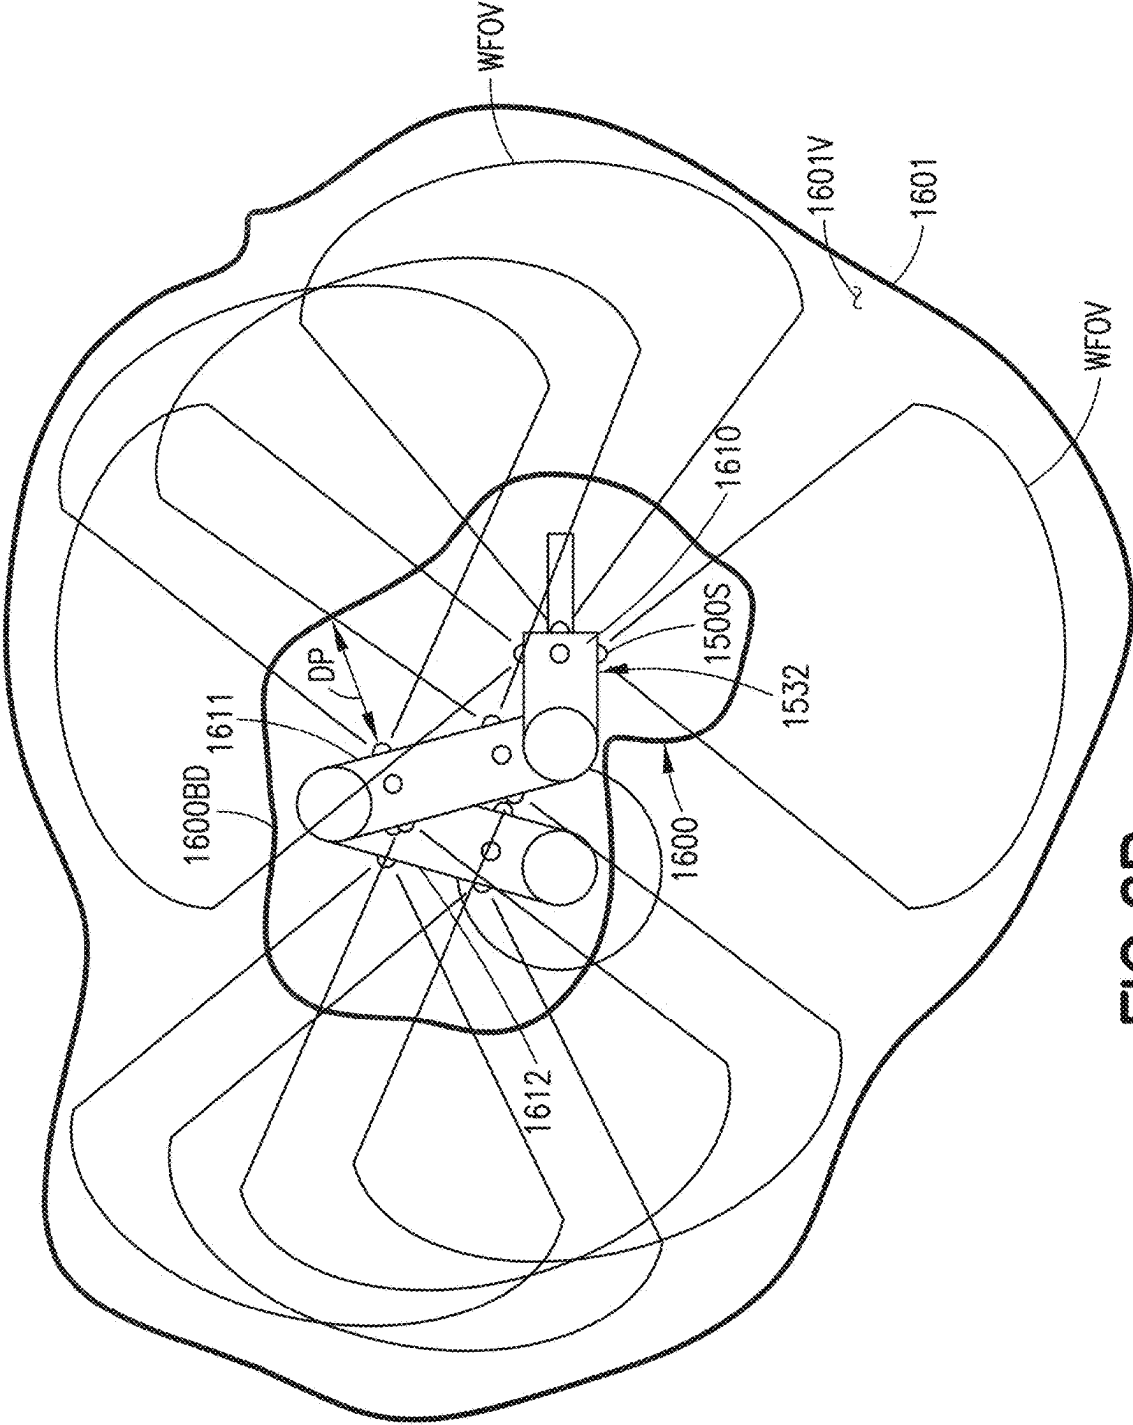
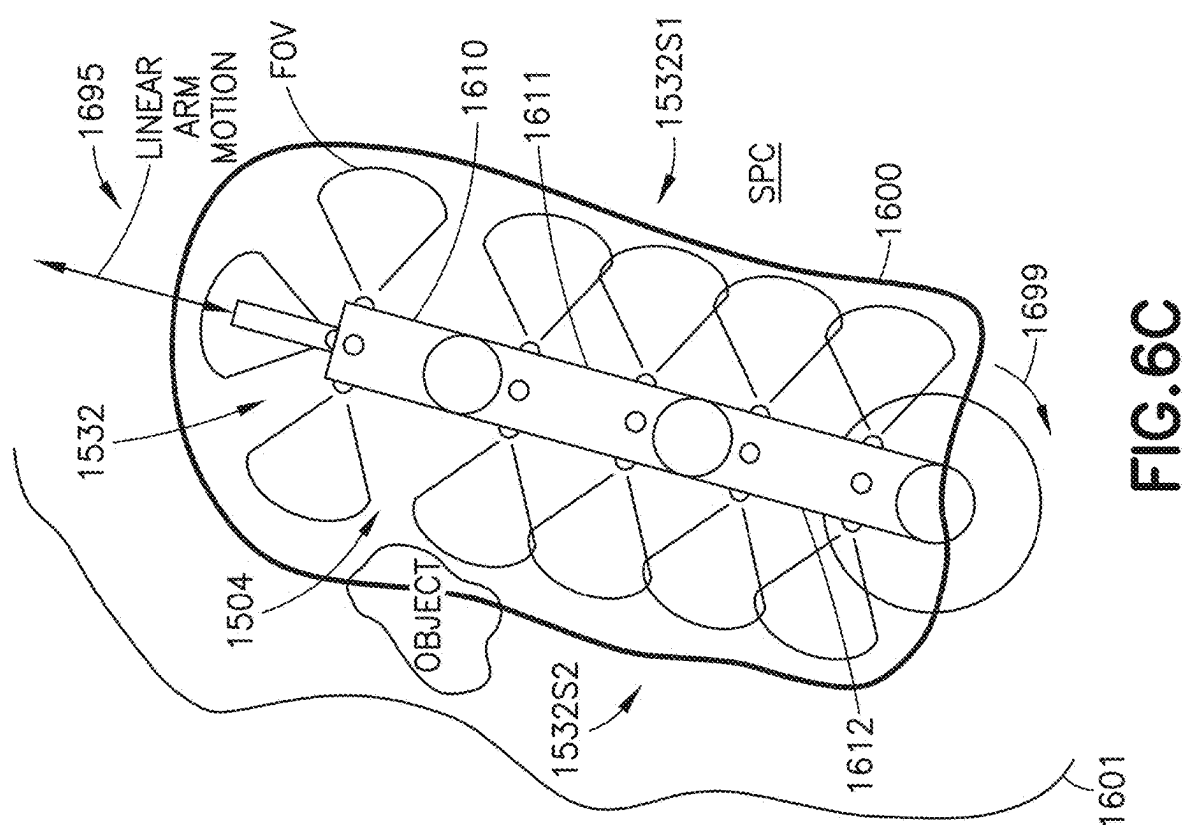


FIG. 6B



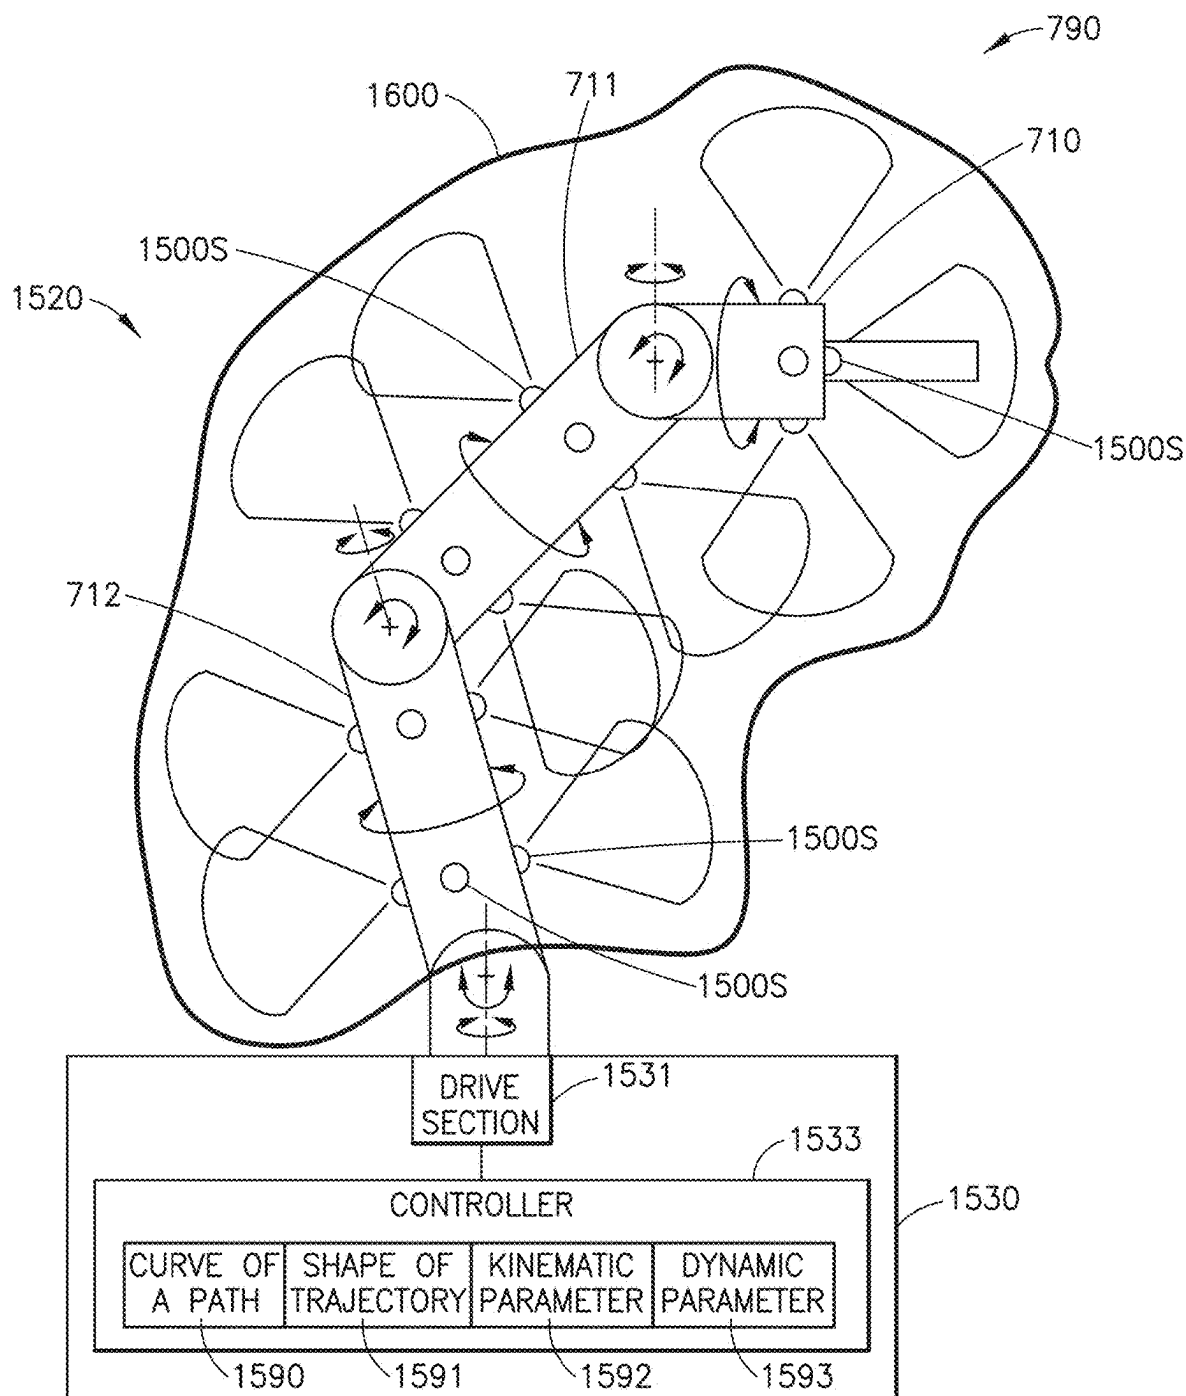


FIG. 7A

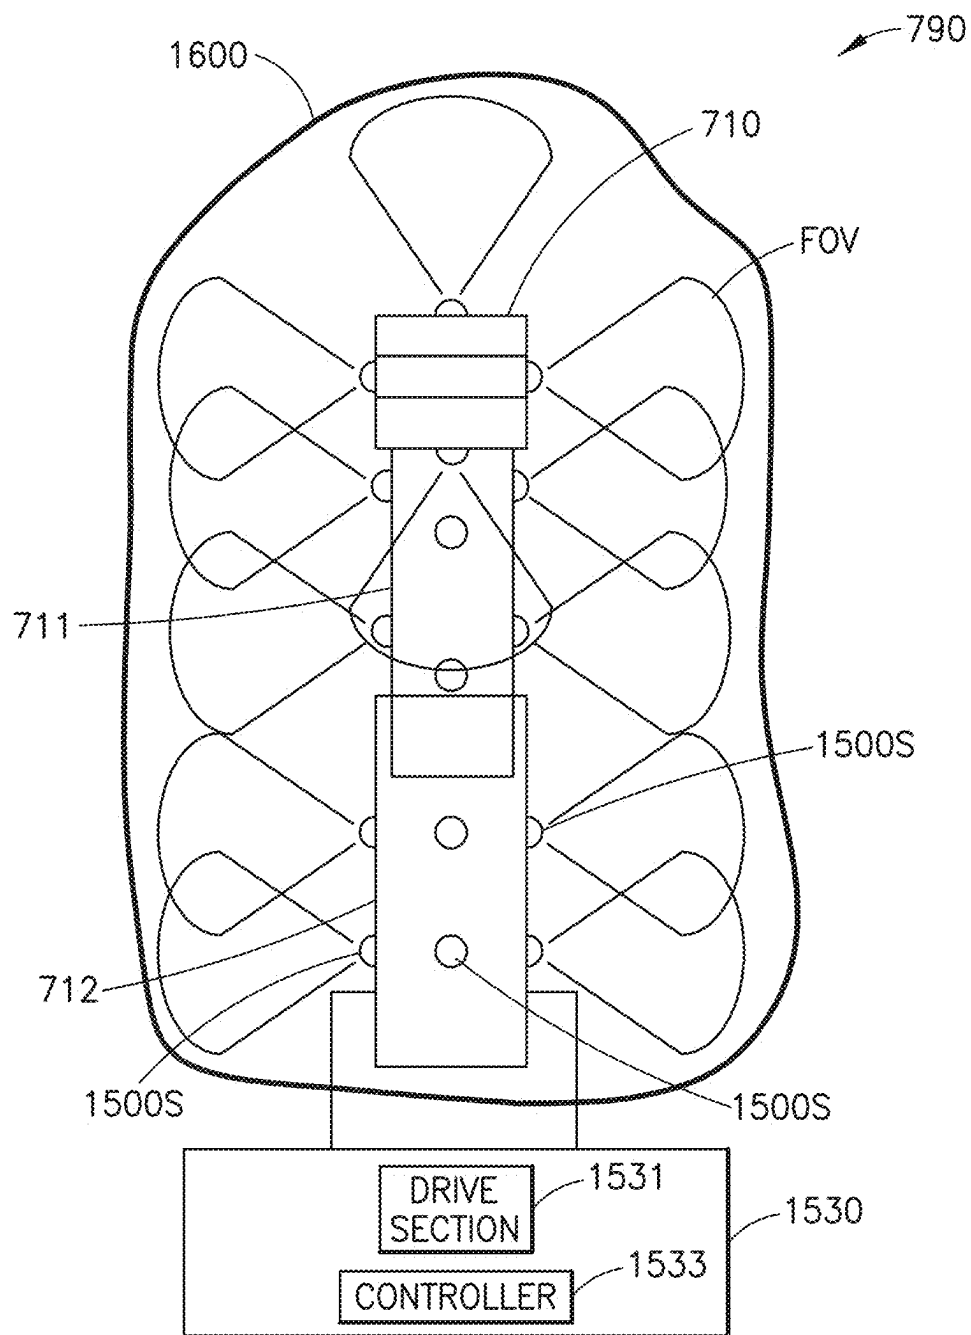
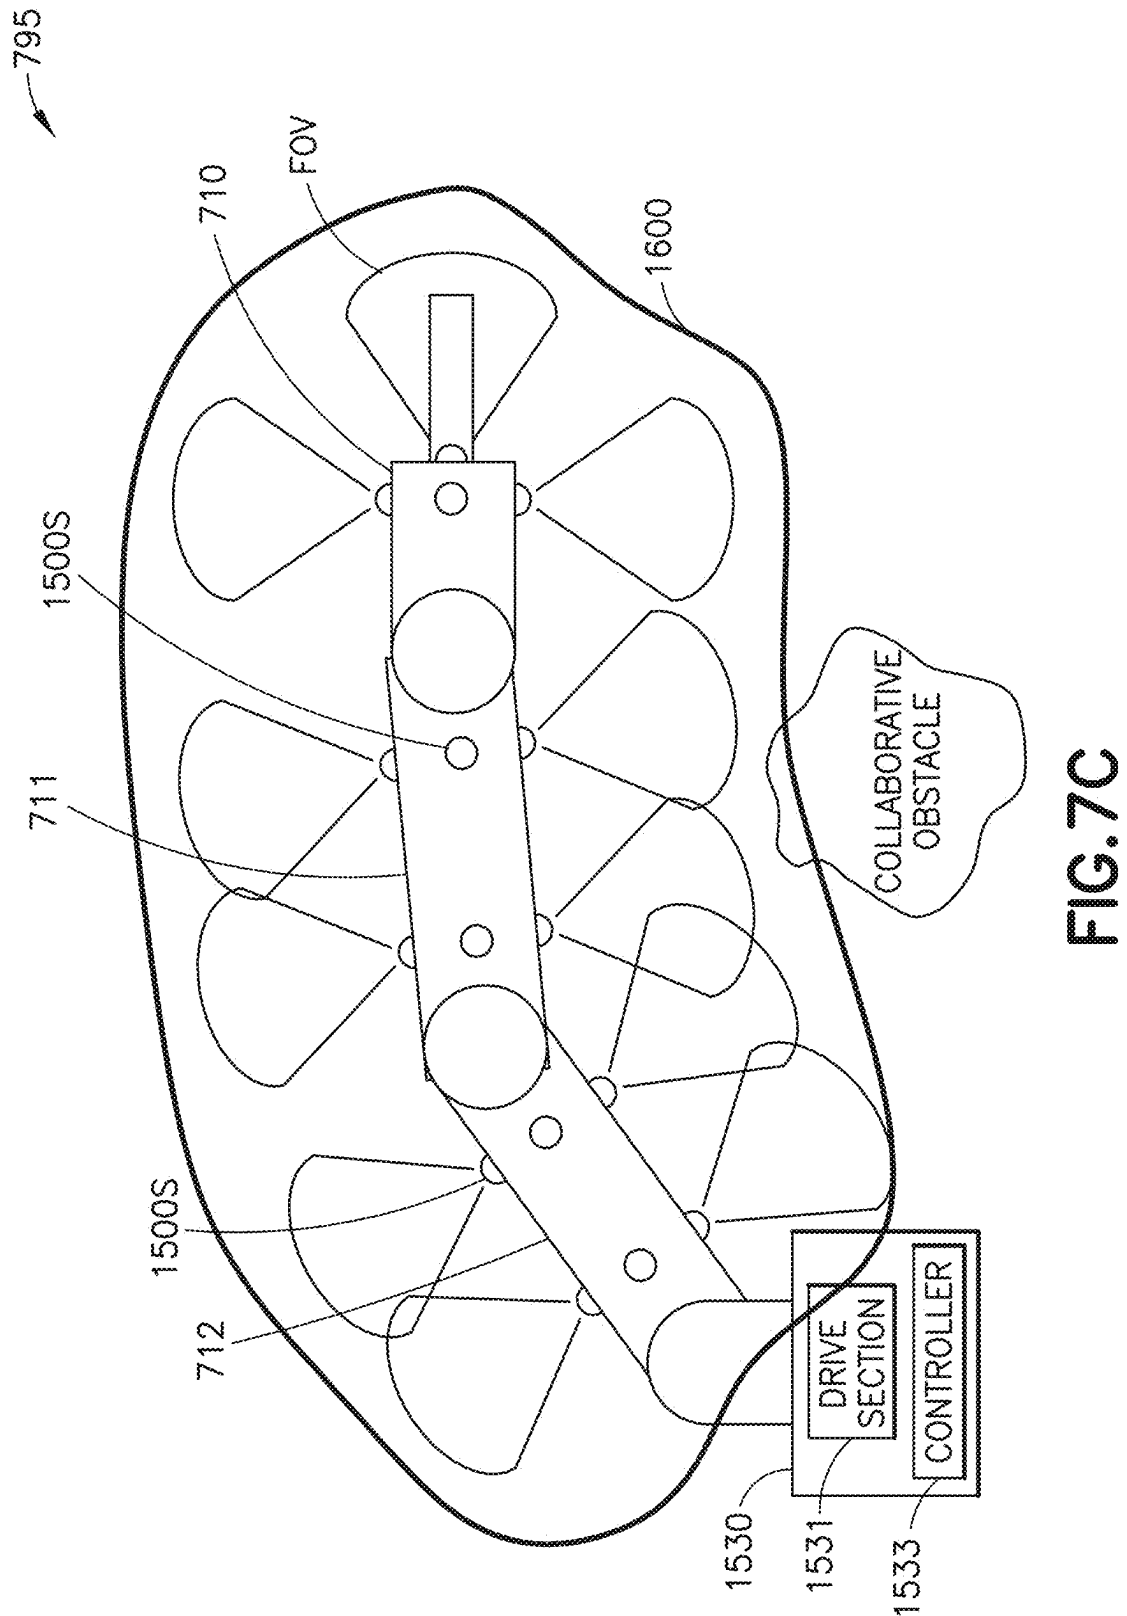


FIG.7B



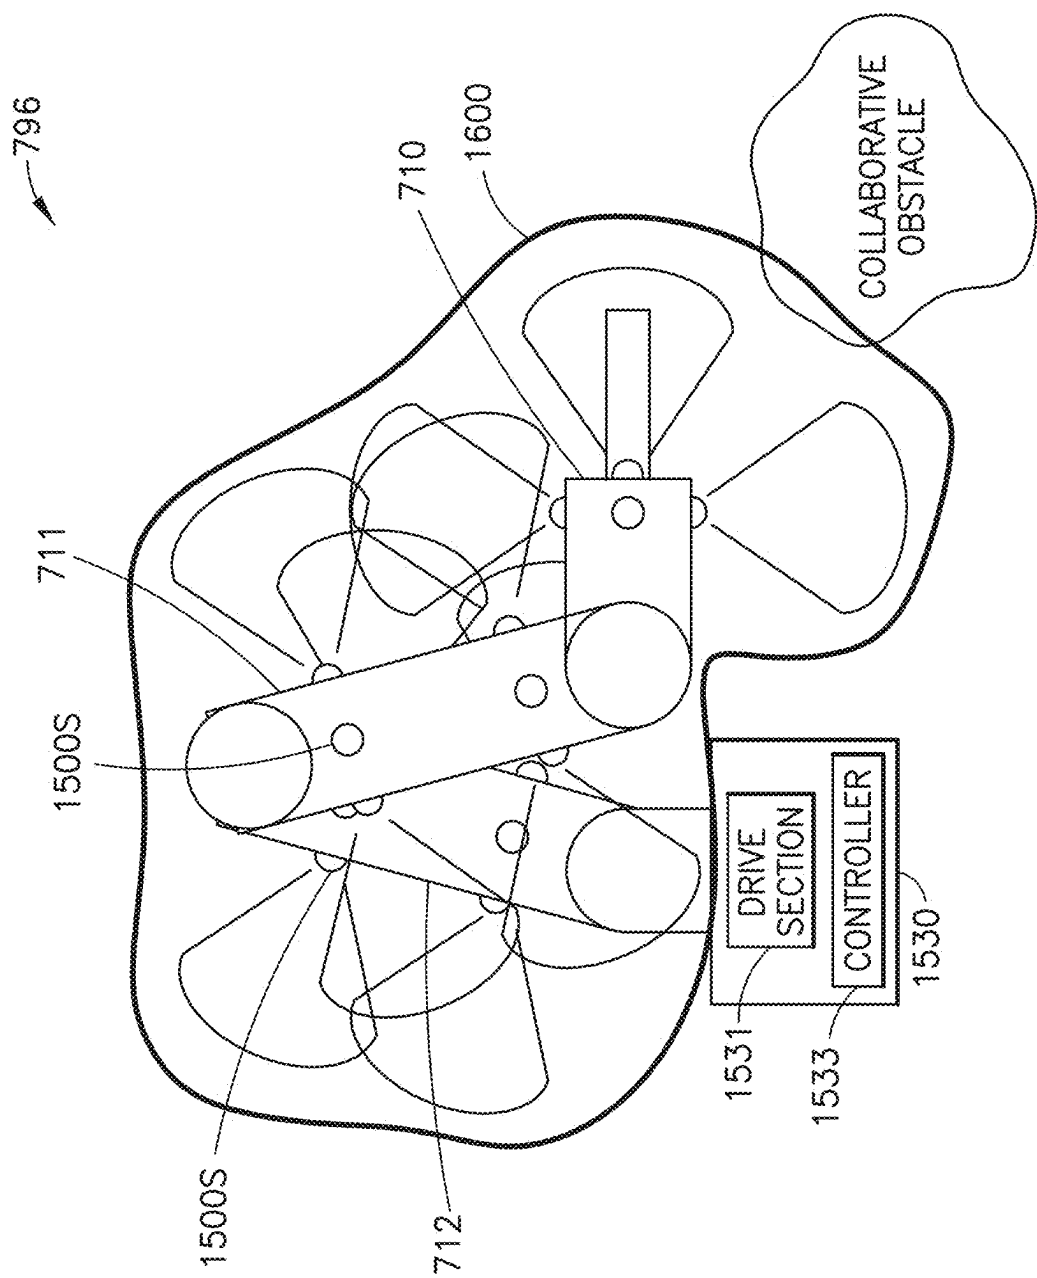


FIG. 7D

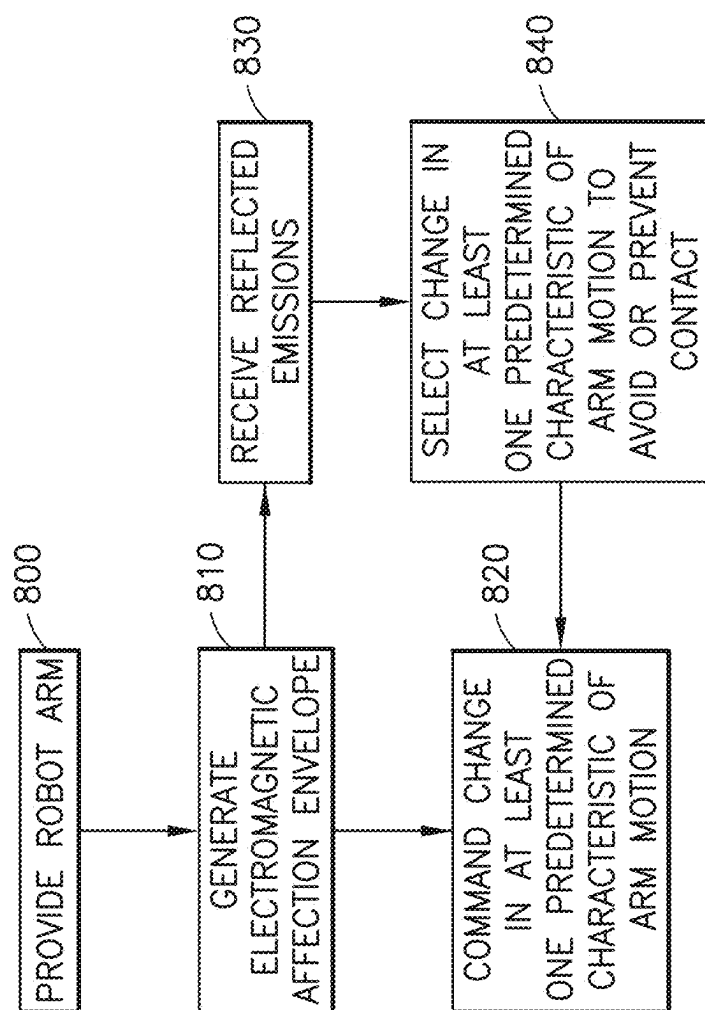


FIG. 8

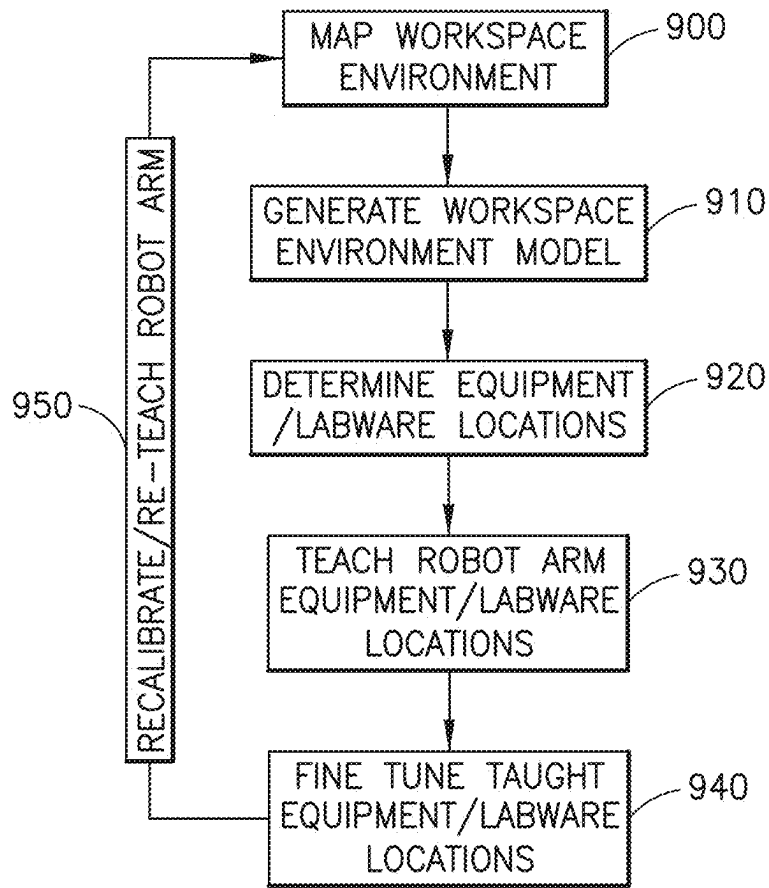


FIG.9

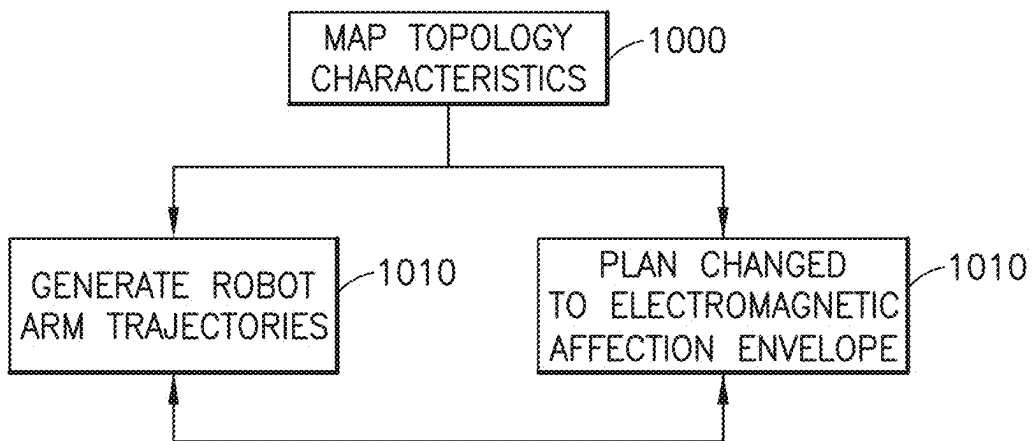


FIG.10

ROBOTIC TRANSPORT SYSTEM AND METHOD THEREFOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. Non-Provisional patent application Ser. No. 18/474,893, filed on Sep. 26, 2023, (now U.S. Pat. No. 12,172,326), which is a continuation of Ser. No. 17/476,249, filed Sep. 15, 2021, (now U.S. Pat. No. 11,766,781), continuation of U.S. Non-Provisional patent application Ser. No. 17/032,011, filed Sep. 25, 2020, (now U.S. Pat. No. 11,123,870), which is a non-provisional of and claims the benefit of U.S. Provisional Patent Application No. 62/907,297, filed Sep. 27, 2019, the disclosures of which are incorporated herein by reference in their entirety.

BACKGROUND

1. Field

[0002] The present disclosure generally relates to life sciences equipment, and more particularly, to automated handling and processing of life sciences processing equipment.

2. Brief Description of Related Developments

[0003] In one example, conventional operation of automated equipment employed in a collaborative environment includes the use of physical and/or electronic barriers disposed around the automated equipment so as to prevent interference with the operation of other automated equipment or humans within the collaborative environment. The physical barriers may include fencing, railings, or other blockades that may restrict human access to an operating zone or area of the automated equipment. These physical barriers may include switches or sensors that are coupled to the automated equipment and which shut down the automated equipment upon a breach of the physical barriers. In other aspects, electronic barriers may be employed which include light curtains that may be coupled to the automated equipment so as to shut down the automated equipment upon a breach of the light curtain.

[0004] These physical and/or electronic barriers are typically installed around at least a portion of the automated equipment where it may take a significant amount of time to set up, calibrate, and certify the physical and/or electronic barriers for use prior to operation of the automated equipment. Each time the automated equipment is moved to a different location, the physical and/or electronic barriers are taken down and reinstalled at the different location. Moreover, as the physical and/or electronic barriers are fixed in place around at least part of the automated equipment, there may be ways to defeat the effectiveness of the barriers (e.g., such as climbing over a fence or rail, etc. passing through an area where there may be inadequate light curtain coverage, etc.).

[0005] In another example, conventional collaborative laboratory spaces rely on range sensing system arrays that are either fixed, or commutable (such as resident on an automated guided vehicle or robot arm) and employ broad space illumination such as infrared illumination. In the case of infrared illumination, whether in a fixed or commutable array, all sensors (emitters) are “lit” up or otherwise acti-

vated to illuminate a whole region of coverage of the array to detect all objects in the region of coverage. Here all objects in the region of coverage are detected whether the objects present a probable or potential engagement object in vehicle/robot arm transit or an improbable potential engagement object in view of vehicle or robot arm motion.

[0006] The validation of a collaborative workspace such as with “fixed validation areas” as noted above (whether fixed in the sense of physical/electronic barriers or a sensing array that detects/senses the presence of any and all objects in the validation area) is unsatisfactory with respect to available motions of the vehicle/robot arm in that sensing any and all objects defeats the collaboration between, for example, humans and the vehicles/robot arms.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The foregoing aspects and other features of the present disclosure are explained in the following description, taken in connection with the accompanying drawings, wherein:

[0008] FIGS. 1A and 1B are schematic illustrations of a robotic processing system in accordance with one or more aspects of the present disclosure;

[0009] FIG. 1C is a schematic illustration of a laboratory facility in accordance with aspects of the present disclosure;

[0010] FIG. 2 is a schematic illustration of an auto-navigating robotic processing vehicle in accordance with aspects of the present disclosure;

[0011] FIG. 3A-3C is a schematic illustration of an auto-navigating robotic processing vehicle in accordance with aspects of the present disclosure;

[0012] FIGS. 4A-4B are isometric views of a portion of a docking station of the robotic processing system in accordance with aspects of the present disclosure;

[0013] FIG. 5 is a schematic block diagram of a collaborative robot guarding system in accordance with aspects of the present disclosure;

[0014] FIGS. 6A-6C are schematic illustrations of a movement sequence of a robot arm incorporating collaborative robot guarding system in accordance with aspects of the present disclosure;

[0015] FIGS. 7A-7D are schematic illustrations of a movement sequence of a robot arm incorporating collaborative robot guarding system in accordance with aspects of the present disclosure;

[0016] FIG. 8 is a flow diagram of a method in accordance with aspects of the present disclosure;

[0017] FIG. 9 is a flow diagram of a method in accordance with aspects of the present disclosure; and

[0018] FIG. 10 is a flow diagram of a method in accordance with aspects of the present disclosure.

DETAILED DESCRIPTION

[0019] FIGS. 1A-1C illustrate exemplary collaborative operating environments or spaces SPC in accordance with aspects of the present disclosure. Although the aspects of the present disclosure will be described with reference to the drawings, it should be understood that the aspects of the present disclosure can be embodied in many forms. In addition, any suitable size, shape or type of elements or materials could be used.

[0020] The aspects of the present disclosure provide for a collaborative robot guarding system that utilizes radar sen-

sors borne by the collaborative robot for the detection of obstacles and humans within, for example, the collaborative operating space SPC (the collaborative operating environment SPC forming at least a portion of a workspace environment WE). For example, the collaborative robot may include an articulated arm (such as one or more of articulated arms **120**, **172**, **422**, **510A**, **510A'** described herein) to which the radar sensors are mounted. The articulated arm, in some aspects, is mounted to and borne by a relocatable cart, such as those described herein, that form interchangeable stations with “plug and play” interfaces at different selectable workstations; and in other aspects the articulated arm may form a portion of a variably configurable system with selectably variable emergent stations as described herein. The articulated arm may act as a waveguide for the radar sensors so as to define a dynamic guarding zone or electromagnetic affection envelope (e.g., that encloses the articulated arm) that is close coupled (i.e., dynamic to robot arm motion and shape) with the arm such that the scan of each radar sensor (whether a continuous wave scan or repetitive pulse scan) can be singularly repeated based on arm motion characteristics so as to effect agile environment scanning or a scan of the environment that is tuned to motion characteristics of the articulated arm. Here the electromagnetic affection envelope moves and/or changes direction as the portion or portions of the articulated arm, to which the radar sensors are mounted, moves. As such, in one aspect, each movable portion of the articulated arm may bear a multitude of radar sensors for generating a respective electromagnetic affection envelope.

[0021] Detection information from the respective radar sensors may be used individually, in groups, or in their totality as inputs by any suitable controller of the articulated arm to determine whether the articulated arm may move from a current location to a target location. The controller may be configured to use the detection information from the radar sensors to determine alterations in a predetermined articulated arm trajectory due to, for example, obstructions or humans within the path of the predetermined articulated arm trajectory.

[0022] In one aspect, the radar sensors may be millimeter wave (mmWave) radar sensors, however in other aspects any suitable sensors may be employed. As will be described herein, the controller may use the inputs from the millimeter wave radar sensors to effect articulated arm obstacle avoidance and trajectory planning, adjusting in process articulated arm trajectories, and/or predicting movement of and detecting collaborative occupants (e.g., humans or other automation) based on inputs from the millimeter wave radar.

[0023] In accordance with the aspects of the present disclosure, the agile/tuned scanning of the electromagnetic affection envelope provides for selectably positioning the articulated arm (which may be disposed on a movable cart, e.g., cart-borne) at pre-existing or emergent stations within a collaborative space that has different and variable topology characteristics (e.g., the aspects of the present disclosure enable changes with respect to adding/removing workstations, and/or adding/removing/replacing carts articulated arms thereon).

[0024] Referring to FIGS. **1A** and **1B**, in one aspect, a collaborative operating space SPC are provided in robotic processing system **100**. One or more mobile carts **110A-110F** of the robotic processing system **100** are located within the collaborative operating space SPC. The robotic process-

ing system **100** may also include an automated system **170**, disposed in the collaborative operating space SPC, to which the one or more mobile carts **110A-110F** are operably interfaced. Each of the mobile carts **110A-110F** may include one or more of a robotic transport arm **120**, **422**, one or more workpiece holding stations **140A**, **140B**, an operator interface **150**, and any other suitable instrumentation, processing and/or storage equipment suitable for interfacing with the workpiece(s) handled by the robotic processing system **100**. As may be realized, a user or operator may access one or more regions of the collaborative operating space SPC (e.g. interface **150**, one or more holding stations **140A**, **140B**, or other location on the mobile carts **110**) directly, and at times such access may be coincident or coexistent with robotic transport arm **120**, **172**, **422** operation within the collaborative operating space SPC (see also FIG. **1C** described below). For example, an operator may place or pick a workpiece on or from a holding station **140A**, **140B** in anticipation of a robotic pick of that workpiece as an aspect of a collaborative action with the robotic transport arm **120**, **422**, **172**. Accordingly, in some aspects, the robotic transport arm **120**, **422**, **172** and operator collaborate in the collaborative operating space SPC. In one aspect, each of the mobile carts **110A-110F** includes one or more datum surfaces or features DF that are in a known spatial relationship with a sensor (or other detectable feature) of a respective mobile cart **110A-110F**. In one aspect, the features (such as robotic transport arms **120**, workpiece holding stations **140A**, **140B**, and any other instrumentation/equipment) of each mobile cart **110A-110F** are in a known relationship with the one or more datum surfaces or features DF where the robotic processing system **100** may include a device or tool for sending a signal indicating the position of the mobile cart features to the automated system **170** as described in, for example, United States Patent Publication No. 2011/0270445 A1 published on Nov. 3, 2011 and entitled “Instrument Turntable and method for Use”, the disclosure of which is incorporated herein in its entirety. In one aspect, the one or more datum surfaces or features DF are detected by the collaborative robot guarding system **1550** (FIG. **5**) for automated calibration/setup of system components for operation with the robotic transport system **1500** (FIG. **5** or any of the robot arms/transporters described herein, one or more of which include collaborative robot guarding systems such as described herein with respect to at least FIG. **5**).

[0025] In one aspect, the automated system **170** includes any suitable robotic transport arm **172** for accessing one or more features of the one or more mobile carts **110A-110F**. In one aspect, the robotic transport arm may be a selective compliant articulated robot arm (SCARA arm) or any other arm suitable articulated for transporting workpieces in the collaborative space SPC. For example, the robotic transport arm **172** may be configured to access the workpiece holding stations **140A**, **140B**, interface with the robotic transport arms **120**, **422**, or interface/access any other suitable instrumentation/processing equipment of the one or more mobile carts **110A-110F** as described in United States Patent Publication No. 2011/0270445 A1 published on Nov. 3, 2011 and entitled “Instrument Turntable and Method for Use”, the disclosure of which is incorporated herein in its entirety. In one aspect, the automated system **170** is configured as a cluster tool and has a hexagonal configuration where six mobile carts are operably interfaced with six facets of the automated system **170**. In other aspects, the automated

system **170** may have any number of facets (e.g. pentagonal, octagonal, rectangular, etc.) so that any suitable number of mobile carts **110A-110F** may be interfaced with the automated system **170**. In other aspects, two or more robotic processing systems may be operably coupled to each other in any suitable manner such as described in U.S. patent application Ser. No. 15/689,986 filed Aug. 29, 2017 (and published on Mar. 1, 2018 as United States pre-grant publication number 2018/0056528), U.S. Pat. Nos. 7,560,071; 8,734,720; 8,795,593, the disclosures of which are incorporated herein by reference in their entireties.

[0026] Referring to FIG. 1C, another collaborative operating space SPC is illustrated in a laboratory facility **100A** that may include at least one auto-navigating robotic processing vehicle **500, 600** and at least one processing station **1110, 11120**. In one aspect, the laboratory facility **100A** may be substantially similar to that described in U.S. patent application Ser. No. 16/265,258 filed on Feb. 1, 2019 and entitled “Auto-navigating Robotic Processing Vehicle”, the disclosure of which is incorporated herein by reference in its entirety. The at least one processing station **1110, 11120** may be a human operated processing station and/or an automated processing station. As described herein, the auto-navigating robotic processing vehicles **500, 600** include a processing section **510** that has a number of different processing modules **510A-510G**. Each of the different processing modules **510A-510G** has a different predetermined laboratory processing function with a different predetermined function characteristic corresponding to the processing module **510A-510G**. The different processing modules **510A-510G** and their respective functions are automatically selectable to effect, independent of or in combination with vehicle travel, a preprocess or a preprocess condition of laboratory samples and/or sample holders with respect to a process at the at least one processing station **1110, 11120**. For example, preprocessing conditions that may be performed by the at least one auto-navigating robotic processing vehicle **500, 600** include, but are not limited to, storage of sample trays, sample tray lids, transport and direct or indirect handoff of laboratory equipment (e.g., vacuum heads, brushes, Bunsen burners, microscopes, brooms, processing tools and/or fixtures, sample trays, etc.) to a human **199** (at a processing station **1110, 11120**) and/or automated processing equipment at a processing station **1110, 11120**, cleaning of an animal cage, laboratory table, etc., Examples of processes that may be performed by the at least one auto-navigating robotic processing vehicle **500, 600** include, but are not limited to, removing a sealing film from a sample and/or sample tray, reading an identification of a sample and/or sample tray, etc., pipetting fluids, capping and decapping tubes.

[0027] In one aspect, the at least one auto-navigating robotic processing vehicle **500, 600** services individual processing stations **1110, 11120**, where the processing stations **1110, 11120** have either automatic item (e.g., tools, samples, trays, etc.) input/output or have manual processes which are carried out/effected, monitored, and/or controlled (e.g., through a user interface) by a human **199**. In one aspect, the at least one auto-navigating robotic processing vehicle **500, 600** is configured to provide all comporting (e.g., suitable) equipment (e.g., “process payloads” which may include process modules, peripherals, and/or consumables for station engagement, or “workpiece payloads” which may include samples and sample trays for station

engagement) on the auto-navigating robotic processing vehicle **500, 600** to perform the tasks at a given processing station **1110, 11120**. As an example, an auto-navigating robotic processing vehicle **500, 600** may be configured and loaded for an individual task such that all the comporting equipment is carried by a single auto-navigating robotic processing vehicle **500, 600** to complete the individual task (which may be, e.g., a process station function) in full with a single auto-navigating robotic processing vehicle **500, 600** and the items carried thereon.

[0028] The at least one auto-navigating robotic processing vehicle **500, 600** may also provide or otherwise generate, at each different human affectable process station **1110, 11120** (e.g., that has a common type of station process function, that includes one or more manual steps such as human affectable processes that include sterilization, exact timing control, climate control, temperature control, unattended use, remote control or monitoring) repeatable or “near identical” process steps (e.g., the process steps are performed with automatic machine repetition controlled by the at least one auto-navigating robotic processing vehicle’s **500, 600** programmable controller **590**—see FIG. 2)).

[0029] Still referring to FIG. 1C, the processing stations **1110, 11120** may be linearly arranged with one or more process tools **11150-11155** which may include, but are not limited to, electronic pipettes, microplate dispensers, media preparation modules (e.g., sterilization and dispensing of sample medium), environmental control modules (e.g., refrigeration, freezers, incubators, clean environments, hoods, etc.), storage modules, and centrifuges. It is noted that FIG. 1C illustrates human processing stations **1110, 11120** which may or not include automated processes however, the aspects of the present disclosure are not limited to the human processing stations **1110, 11120**. For example, the at least one auto-navigating robotic processing vehicle **500, 600** may also be configured to effect one or more predetermined laboratory processing function at a processing station of an automated configurable processing tool such as that described above with respect to FIGS. 1A and 1B in a manner substantially similar to that described in U.S. patent application Ser. No. 16/265,258 filed on Feb. 1, 2019 and entitled “Auto-navigating Robotic Processing Vehicle”, the disclosure of which was previously incorporated by reference herein in its entirety.

[0030] Referring to FIG. 2, an auto-navigating robotic processing vehicle **500** is illustrated in accordance with aspects of the present disclosure. The auto-navigating robotic processing vehicle **500** includes a carriage **501** having a frame **501F**, an autonomous drive section **550**, a processing section **510**, and a controller **590**.

[0031] The autonomous drive section **550** is connected to the frame **501F** and is configured to traverse (e.g., move) the carriage **501** effecting vehicle travel on and across a facility floor **180** (see, e.g., FIGS. 1A and 1C), on which the at least one processing station **1110, 11120** (FIG. 1C) and/or automated system(s) **170** (FIGS. 1A and 1B) are disposed for processing laboratory samples and/or sample holders. An autonomous navigation section **551** of the auto-navigating robotic processing vehicle **500** is communicably connected to the autonomous drive section **550** so as to effect autonomous navigation vehicle travel with the autonomous drive section **550** on the facility floor **180**. The autonomous navigation section **551** may include any suitable sensors (e.g., line following, inertial navigation, GPS, stereoscopic

vision sensors, etc.) and/or programming so that the auto-navigating robotic processing vehicle **500** moves along the facility floor **180** and interfaces with a human **199** (FIG. 1C) and/or a processing module **11151-11155** of a processing station **11110**, **11120** (FIG. 1C), or a tool formed by automated system **170** (FIGS. 1A and 1B).

[0032] In one aspect, the autonomous navigation section **551** is configured so that the auto-navigating robotic processing vehicle **500** travels to the at least one processing station **11110**, **11120** (FIG. 1C) and/or automated system **170** (FIGS. 1A and 1B) through a human access zone **175** (FIG. 1C) on the facility floor **180**, with a human **199** present in the human access zone **175**. As an example, the auto-navigating robotic processing vehicle **500** is a collaborative vehicle such that the autonomous navigation section **551**, and at least portions of the processing section **510**, include suitable speed controls, and any suitable sensors for detecting torque/force applied by the auto-navigating robotic processing vehicle **500** automation (e.g., the processing section **510** and/or the autonomous drive section **550**) and sensing obstacles within a path of the auto-navigating robotic processing vehicle **500**. In one or more aspects, the obstacle detection system of the auto-navigating robotic processing vehicle may be substantially similar to the collaborative robot guarding system **1550** (FIG. 5) described herein such that millimeter wave radar sensors map the collaborative space SPC and increase/decrease a detection range depending on a presence of objects in the collaborative space SPC. In other aspects, the collaborative robot guarding system **1550** may form part of the obstacle detection system of the auto-navigating processing vehicle **500** and at least in part effects navigation of the auto-navigating processing vehicle **500** through the collaborative space SPC.

[0033] One example of collaboration between the auto-navigating robotic processing vehicle **500** and a human **199** is where the auto-navigating robotic processing vehicle **500** is configured to travel in a processing zone **176** on the facility floor **180** with the at least one processing station located **11110**, **11120** in the processing zone **176**, and a human access zone **175** is disposed in at least part of the processing zone **176** providing human access to a common portion **11110C** of the at least one processing station **11110**, **11120** engaged by a robot arm **510A** of the auto-navigating robotic processing vehicle **500**. In one aspect, the auto-navigating robotic processing vehicle **500**, via robot arm function, and the human **199** effect a collaborative function to the common portion **11110C** of the at least one processing station **11110**, **11120** where the human **199** and auto-navigating robotic processing vehicle **500** work together to complete a task, such as for example, changing a pipetting head at the common portion **11110C** of the at least one processing station **11110**, **11120** where the robot arm **510A** hands off the pipetting head to the human **199**. In another aspect, the auto-navigating robotic processing vehicle **500**, via robot arm function, and the human **199** effect a common function to the common portion **11110C** of the at least one processing station **11110**, **11120**, such as for example, the robot arm function automatically changes the pipetting head at the common portion **11110C** of the at least one processing station **11110**, **11120** while the human **199** operates the pipetting tool (with the pipetting head installed by the auto-navigating robotic processing vehicle **500**) to transfer samples to/from, e.g., sample trays.

[0034] In another aspect, the autonomous navigation section **551** is configured so that the auto-navigating robotic processing vehicle **500** travels to the at least one processing station **11110**, **11120** (FIG. 1C) and/or automated system(s) **170** (FIGS. 1A and 1B) through the human access zone **175** on the facility floor **180**, wherein the human access zone **175** is secured so as to block human access to the human access zone **175**. In this aspect, the auto-navigating robotic processing vehicle **500** may or may not include collaborative automation, such as described herein. The human access zone **175** may be secured so as to block human access in any suitable manner such as with physical barriers, light curtains (e.g., which when broken shut down the at least one auto-navigating robotic processing vehicle within the human access zone **175**), etc. and include any suitable interlocks that may shut down the at least one auto-navigating robotic processing vehicle within the human access zone **175** when the interlock is not engaged.

[0035] The processing section **510** includes a number of different processing modules **510A-510G** connected to and carried by the carriage frame **501F**. Each of the different processing modules **510A-510G** have a different predetermined laboratory processing function with a different predetermined function characteristic corresponding to the processing module **510A-510G**. For example, the processing modules **510A-510G** may include one or more robot arms **510A**, a sample tray lid remover **510B**, a pipetting head module **510C** (suitable examples of pipetting heads can be found in U.S. Pat. No. 9,623,405 issued on Apr. 18, 2017 the disclosure of which is incorporated herein by reference in its entirety), an end effector processing module **510D**, a sample tray carousel **510E**, a bar code scanner **510F** (FIG. 3A), a sample plate orientation module **510G** (FIG. 3A), and/or any other suitable sample processing equipment and/or tools. The sample tray carousel **510E** may be substantially similar to that described in U.S. Patent Application No. 62/625,809 filed on Feb. 2, 2018, entitled “Robotic Processing System” and U.S. patent application Ser. No. 16/265,273 filed on Feb. 1, 2019, entitled “Robotic Processing System”, the disclosures of which are incorporated herein by reference in its entirety. Each of the different processing modules **510A-510G** and their corresponding predetermined function are automatically selectable (such as in a manner substantially similar to that described in U.S. patent application Ser. No. 16/265,258 filed on Feb. 1, 2019 and entitled “Auto-navigating Robotic Processing Vehicle”, the disclosure of which was previously incorporated by reference herein in its entirety) to effect automatically with the corresponding predetermined function, independent of or in combination with vehicle travel, a preprocess or preprocess condition (such as those described above) of one or more of the laboratory samples and sample holders with respect to a process at the at least one processing station **11110**, **11120** and/or a processing station of the automated system **170**.

[0036] Referring to FIGS. 1C and 2, the controller **590** is communicably connected to each different processing module **510A-510G**, so as to automatically select at least one processing module **510A-510G**, from the different processing modules **510A-510G**, and the corresponding predetermined function of the selected at least one processing module effecting automatically the preprocess or preprocess condition based on an identification of a travel location (such as a location of a processing station on the facility floor **180**) for the auto-navigating robotic processing vehicle

500 and the process of the at the at least one processing station **1110**, **1120**. In one aspect, the controller **590** is configured so as to effect the autonomous navigation vehicle travel to the identified travel location (e.g., such as the location of the processing station **1110**, **1120** on the facility floor **180**), from an initial location (such as a charging location or any other suitable location) on the facility floor **180** different from the identified location. The controller **590** may also be configured to engage and effect with a first robot arm predetermined processing function an operation defining the preprocess or preprocess condition, and with the second robot arm predetermined processing function effect a processing station operation related to the preprocess or preprocess condition. For example, the controller **590** may effect picking up a manual tool such as an ultraviolet light from the initial location or the other suitable location and transport the ultraviolet light to the processing station **1110**, **1120** where the controller effects, with the ultraviolet light held by the robot arm **510A** sanitizing of the processing station **1110**, **1120**. The controller may also be communicably connected to radar sensors borne on the robot arm **510A** so as to form, at least in part, the collaborative robot guarding system as described in further detail herein.

[0037] In one aspect, the controller **590** is configured (e.g., with any suitable non-transitory computer program code) to receive a command (from any suitable laboratory facility controller (e.g., such as a personal computer, a mobile device and/or a tablet computer—generally referred to as remote device **668**, see FIG. 3A) identifying the travel location for the auto-navigating robotic processing vehicle **500**, where, as noted above, the travel location corresponds to the at least one processing station **1110**, **1120** and/or automated system **170**. The controller **590** may also be configured to effect the automatic change of the robot arm predetermined processing function. For example, the controller **590** may cause the robot arm end **515** to select the anthropomorphic end effector **515C** so that the robot arm **510A** is able to open a door at the processing station **1110**, **1120** and then select the tube gripping end effector **515A** for transferring a sample tube through the open door at the processing station **1110**, **1120**.

[0038] In one aspect, the at least one processing station **1110**, **1120** and/or automated system **170** may have different applications (which may correspond to, e.g., a preprocess and/or a preprocess condition) such as for example, general research laboratory operator/technician applications including, but not limited to, assay development, laboratory services, animal cage cleaning, mouse colony management, etc. In other aspects, the different applications may also include sample replication, sample retrieval, DNA (deoxy-ribonucleic acid) extraction and sequencing, cell culture operator, operator for work in BSL (biological safety level) **3** and **4** laboratories, clinical laboratory operator (including, e.g., sample accessioning and/or chemistry synthesis operator), and/or any other suitable laboratory applications. A separate auto-navigating robotic processing vehicle **500** may be provided for each of these different applications where each of the auto-navigating robotic processing vehicles **500** may have different robot arms, end effectors, shelving configurations, environmental housings, etc. than other auto-navigating robotic processing vehicles **500**. For example, the auto-navigating robotic processing vehicle **500** may be configured to perform laboratory services and is equipped, as noted above, with pipetting heads **517A-517C**, end effec-

tors **515A-515C**, a sample tray carousel **510E**, and a sample tray lid remover **510B** to perform a preprocess (e.g., removing sealing film from a tray/sample, reading a tray/sample identification, etc. as noted above) and/or a preprocess condition (tray lid removal and storage, sanitization, etc. as noted above), at the at least one processing station **1110**, **1120**.

[0039] Referring now to FIGS. 3A-3C, an auto-navigating robotic processing vehicle **600** is illustrated. The auto-navigating robotic processing vehicle **600** may be substantially similar to auto-navigating robotic processing vehicle **500** described above but may be configured for a different processing and/or preprocessing condition application than the auto-navigating robotic processing vehicle **500**. In this aspect, the auto-navigating robotic processing vehicle **600** includes carriage **501'** and an autonomous drive section **550'** that is separable from the carriage **501**. In this aspect, the carriage **501** may be a collaborative carriage that may be moved across at least a portion of the facility floor **180** (FIGS. 1A and 1C) by a human **199** (FIG. 1C) using any suitable handles **610** coupled to the carriage frame **501F'** and/or by the autonomous drive section **550'**. In this aspect, the robot arm **510A'** may be a different type of arm than the robot arm **510A** of the auto-navigating robotic processing vehicle **500** such that the arms may provide a different number of degrees of freedom and/or a different type of articulated arm movement to effect the processes or preprocess conditions at the at least one processing station **1110**, **1120**. In other aspects, the robot arm of the auto-navigating robotic processing vehicle **600** may be the same arm as the arm **510A**.

[0040] As best illustrated in FIG. 3C, the autonomous drive section includes one or more carriage engagement features **621-626** configured to couple with corresponding engagement features **627** on the underside of the carriage frame **501F'**. The one or more carriage engagement features **621-626** may include kinematic couplings, electrical couplings, fluid couplings and/or any other suitable couplings that when coupled provide for one or more of movement of the autonomous drive section **550'** and the carriage **501'** as a unit, powering one or more of the processing modules **510A-510G**, providing communication between the controller **590** and one or more of the processing modules **510A-510G** and otherwise effecting a preprocess or a preprocess condition performed by one or more of the processing modules **510A-510G**. In one aspect, electrical power, a fluid flow source, and control commands may be provided to the carriage **501'** by the autonomous drive section **550'**. In another aspect, the carriage **501'** may include one or more of the power source and the fluid flow source. In one aspect, each of the carriage **501'** and the autonomous drive section **550'** may include a controller **590A**, **590B** that may communicate with each other or operate independent of each other for traversing the carriage **501'** along the facility floor **180** and for operating one or more of the processing modules **510A-510G**.

[0041] The autonomous drive section **550'** includes any combination of at least a pair of drive wheels **650B** and any suitable number of caster wheels **650A**. The carriage **501'** includes a pair of fixed (e.g., non-pivotable about a vertical axis) wheels **660B** and a pair of caster (e.g., pivotable about a vertical axis) wheels **660A** (or any suitable combination of fixed wheels and caster wheels, or all caster wheels, or all fixed wheels). The autonomous drive section **550'** may be

configured such that coupling engagement between the autonomous drive section 550' and the carriage 501' does not lift the wheels 660A, 660B of the carriage 501' off of the facility floor 180. Here the weight of the carriage 501' may be supported at least in part by the wheels 660A, 660B of the carriage 501' when the autonomous drive section 550' is coupled to the carriage 501'. The wheels 660A, 660B of the carriage 501' and the wheels 650A, 650B of the autonomous drive section 550' may be configured to allow the autonomous drive section 550' to traverse the carriage 501' along the facility floor 180 in straight line movement, around corners or along any other suitable path of movement. In one aspect the wheels may be configured to allow the autonomous drive section to pivot the carriage 501' substantially without linear traverse of the carriage 501'.

[0042] In one aspect, the autonomous drive section 550' may include a coupling feature drive 670 that moves the carriage engagement features 621-626 in direction 671 towards and away from the carriage 501' for coupling and decoupling with the corresponding coupling features 627 of the carriage 501'. In other aspects, coupling between the carriage engagement features 621-626 and the corresponding coupling features 627 may be performed in any suitable manner (e.g., such as with actuated clamps, pins, etc.). In one aspect, the autonomous drive section 550' includes any suitable sensors 628A, 628B for detecting any suitable features of the carriage 501' for aligning the carriage engagement features 621-626 and the corresponding coupling features 627 (e.g., through movement of the autonomous drive section 550').

[0043] Referring to FIG. 4A, in one aspect, the robotic processing system 100, 100A may be disposed in any suitable collaborative operating space SPC. In one aspect, the collaborative operating space SPC is a space in which at least a portion of the robotic processing system 100A collaborates with human operators 199 (see FIG. 1C) for carrying out testing and experiments. In other aspects the space in which the robotic processing system 100 operates may be substantially free of human operators (see FIGS. 1A and 1B). Where the operating space SPC is collaborative, a human operator may access one or more regions of the collaborative operating space SPC (e.g. a location on mobile carts, any suitable workpiece holding location, etc.) directly, and at times such access may be coincident or coexistent with a robotic transport arm 120 (also referred to herein as a robot or robot arm) operation within the collaborative operating space SPC. For example, an operator may place or pick a workpiece on or from a workpiece holding station in anticipation of a robotic pick of that workpiece as an aspect of a collaborative action with the robotic transport arm 120. Accordingly the robotic transport arm 120 and operator collaborate in the collaborative operating space SPC in some aspects.

[0044] In one aspect, the robotic processing system 100, 100A includes a dock frame 499 and at least one dock frame module 4150. The dock frame 499 includes at least one docking interface 499A configured to couple to and interface with at least one automated, at least in part, laboratory instrumentation and a storage cabinet (e.g., such as mobile carts 110A-110F, auto-navigating robotic processing vehicle 500, 600, or any other suitable interchangeable carts, tables, racks, and the instrumentation provided thereon as described in, for example, U.S. patent application Ser. No. 16/265,273 filed on Feb. 1, 2019 and entitled "Robotic Processing

System", the disclosure of which is incorporated herein by reference in its entirety), so as to operably couple the at least one of the laboratory instrumentation and the storage cabinet to the dock frame 499 via the docking interface 499A.

[0045] Referring to FIGS. 4A and 4B, each of the at least one dock frame module 4150 is interchangeable with at least another dock frame module 4150, and has control features 499CONT (FIG. 4A) with a predetermined relationship to a reference datum 4150D of the dock frame module 4150 and with a reference datum 499D of the dock frame 499. In one aspect, the reference datum 499D of the dock frame 499 may be a location established by a seating surface 499S of the dock frame 499 (e.g., on which the docking interface is seated) and the control features 499CONT (such as such as pins or apertures 499C and/or surface 499DS) of the docking interface 499S. The reference datum 4150D of the dock frame module 4150 may be located at any suitable location on the dock frame module 4150 from which operations of the dock frame module 4150 are referenced. For example, the reference datum 4150D of the dock frame module 4150 may be a mounting location of the robot 120, a mounting location of a nest 900 (e.g., for holding samples or other labware) or other position on the dock frame module 4150 from which a location of the robot 120 and/or nest 900 is determined (e.g., the robot 120 and/or nest 900 have a known spatial relationship with the reference datum 4150D).

[0046] To couple one dock frame module 4150 to another dock frame module 4150 to form or otherwise define a spine structure 410 with a variably elongated configuration, a coupling unit 450 (FIG. 4B) may be provided. The coupling unit 450 includes a first end 450E1 and a second end 450E2 each forming a docking interface 499B that reciprocally mates with docking interface 499A. For example, the docking interface 499B on each end 450E1, 450E2 has control features 499B that form a reference datum of the coupling unit 450. The control features may be disposed in a common plane so that the mating of the docking interface 499B on the first end 450E1 of the coupling unit 450 with the docking interface 499A of a first dock frame module 4150 and the mating of the docking interface 499B on the second end 450E2 of the coupling unit 450 with the docking interface 499A of a second dock frame module 4150 aligns the first and second dock frame modules 4150 with each other to select the variably elongated configuration and longitudinal length L of the spine structure 410 formed by the dock frame(s) 499 as described in U.S. patent application Ser. No. 16/265,273 filed on Feb. 1, 2019 and entitled "Robotic Processing System", the disclosure of which was previously incorporated herein by reference in its entirety.

[0047] The coupling unit 450 may also have a predetermined distance between seating surfaces 450S1, 450S2 of the docking interfaces 499B on the first and second ends 450E1, 450E2 so that the reference datums 450D of the first and second dock frame modules 4150 are in predetermined known spatial relationship with one another. In other aspects the docking interfaces 499A of the dock frame modules 4150 may be configured to provide for substantially direct coupling between dock frame modules 4150 in any suitable manner that effects a predetermined known spatial relationship between the reference datums 450D of the first and second dock frame modules 4150. The known spatial relationship between the different dock frame modules 4150 effects controlled placement of, for example, robotic slides (e.g., along which a robot 120 may traverse) or other

processing equipment, on the different dock frame modules **4150** so the robotic slides or other processing equipment spans across two or more of the different dock frame modules **4150** in a predetermined known relationship with respect to the reference datums **450D** of the different dock frame modules **4150**.

[0048] As described herein, the spine structure **410** formed by the dock frame(s) **499** has a selectably variable longitudinal length **L**. The selectably variable length **L** is selected by adding or removing dock frame modules **4150** to or from other dock frame modules **4150**. Here the dock frame **499**, and docking interface(s) **499A** included therewith, of each dock frame module **4150** are arranged to provide true interchangeability between the dock frame modules **4150**. For example, the dock frame **499** may be provided with position and inclination control surfaces and features **FL1**, **FL2**, **FT1**, **FT2** (represented in FIG. 4A). In one aspect, the position and inclination control surfaces and features **FL1**, **FL2**, **FT1**, **FT2** may be disposed on or formed by the docking interface **499A** but in other aspects the position and inclination control surfaces and features **FL1**, **FL2**, **FT1**, **FT2** may be formed by any suitable portion of the dock frame **499**. The position and inclination control surfaces and features **FL1**, **FL2**, **FT1**, **FT2** may be of any suitable kind, such as kinematic coupling features (e.g., such as control features **499CONT** in the form of pins or apertures **499C** and/or surface **499DS**) or any other suitable relaxed coupling features that effect alignment between two components.

[0049] The position and inclination control surfaces and features **FL1**, **FL2**, **FT1**, **FT2** are configured to repeatably position one dock frame **499** (and corresponding dock frame module **4150**) relative to another dock frame **499** (and corresponding dock frame module **4150**). The position and inclination control surfaces and features **FL1**, **FL2**, **FT1**, **FT2** are also configured to repeatably position the mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks to a dock frame **499** (and corresponding dock frame module **4150**). As noted above, coupling unit **450** (FIG. 4B) may be employed for coupling two dock frames **499** to each other and includes a docking interface **499B** that reciprocally mates with docking interface **499A** of the dock frame **499**. The mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks may also include docking interfaces **499B** (see, e.g., FIGS. 1, 2, 3A). The docking interfaces **499B** of the mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, racks each include position and inclination control surfaces and features similar to those described above. The docking interfaces **499B** of the coupling unit **450** may also include position and inclination control surfaces and features **FT1**, **FT2** substantially similar to those described above.

[0050] As an example, the position and inclination control surfaces and features **499CONT** of the docking interface **499A** on the dock frame **499** defines a positioning reference basis/datum **499D** of the dock frame **499** and the mating interface **499B** of the coupling unit **450**, or mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed)

interchangeable carts, tables, and/or racks with the docking interface **499A** to locate the coupling unit **450**, or mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and racks and provide the coupling unit **450**, or mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, racks with a kinematic (or relaxed) pose to repeatably position the coupling unit **450**, or mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, racks relative to the dock frame **499**.

[0051] In one aspect, each of the mobile carts **110A-110F**, each of the auto-navigating robotic processing vehicle **500**, **600**, and/or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and racks includes one or more datum surfaces or features (such as similar to those of the docking interface **499B** described above) that are in a known spatial relationship with a sensor (or other detectable feature) of a respective mobile cart **110A-110F**. In one aspect, the features (such as robotic transport arms, workpiece holding stations and any other instrumentation/equipment) of each mobile cart **110A-110F** are in a known relationship with the one or more datum surfaces or features where the robotic processing system **100**, **100A** may include a device or tool for sending a signal indicating the position of the mobile cart features to the dock frame module **4150** as described in, for example, United States patent publication number 2011/0270445 A1 published on Nov. 3, 2011 and entitled "Instrument Turntable and Method for Use", the disclosure of which was previously incorporated herein by reference in its entirety. Here the docking interface **499B** of the mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, and/or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and racks substantially automatically sets a position of the mobile carts **110A-110F** relative to the device or tool (such as the dock frame **499** and corresponding dock frame module **4150**). The auto-navigating robotic processing vehicle **500**, **600**, and/or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks may be similarly configured where the table support surfaces or supports of the racks are in a predetermined known spatial relationship with the docking interface **499B** so that the docking interface **499B** of the auto-navigating robotic processing vehicle **500**, **600**, and/or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks substantially automatically sets a position of the auto-navigating robotic processing vehicle **500**, **600**, and/or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks relative to the device or tool (such as the dock frame **499** and corresponding dock frame module **4150**).

[0052] The predetermined known spatial relationships between the processing components disposed on the dock frame modules **4150**, the coupling unit **450**, mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks with respect to their respective docking interfaces **499A**, **499B** effects true interchangeability between these components and substantially automatically sets a position of one component relative to another upon coupling of the docking interfaces **499A**,

499B. In one aspect, the docking interfaces **499A**, **499B** include provisions for substantially automatically connecting air, gases, communication and power between the dock frame **499** and other dock frames **499**, coupling units **450**, mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks. In one aspect, the signal indicating the position of the mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks, or coupling unit **450** features described above may be communicated to the dock frame **499** through the coupling of the docking interface **499A**, **499B** so that a presence of the respective component (and any processing equipment thereon) is communicated to the processing equipment of the dock frame module **4150** (e.g., automatic registration of the cart, etc. and the processing equipment thereon with the dock frame module and the processing component located thereon).

[0053] In one aspect, referring to FIG. 4A, the robotic processing system **100**, **100A** includes any suitable control system **457** for operating the processing equipment within the robotic processing system **100**, **100A**. In one aspect, the control system **457** is formed by one or more of the dock frame controllers **457D**, robot controllers **457R**, storage carousel controllers **457S**, cart controllers **457C**, and any other suitable controller of any suitable processing equipment that forms a part of the robotic processing system **100**, **100A**. The different controllers of the control system **457** may be ganged controllers having control modules that are communicably coupled to each other through, for example, a controller area network (CAN) bus architecture, which may be suitable for both hard and soft real-time computing requirements in automation equipment and where the connectivity between controllers (at least for the different dock frame modules **4150**, mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks, and coupling unit **450**) is provided by the coupling of the docking interfaces **499A**, **499B** of the respective components. In one aspect, the coupling unit **450** may be a pass through module without a controller where air, gases, communication and power is passed through the coupling unit **450** without being affected by the coupling unit **450**.

[0054] The robotic processing system **100** may also be provided with a common power supply **458**, a common air supply **456**, and/or a common gas supply **459**. For example, one or more of the common power supply **458**, common air supply **456**, and common gas supply **459** may be coupled to a dock frame module **4150** of the robotic processing system **100**, **100A**, such as through a docking interface **499A** or other suitable couplings. The power, air, and/or gas may be supplied throughout the spine structure **410** formed by the dock frames **499** (e.g., from docking module **4150** to docking module **4150**) through the couplings formed by the docking interfaces **499A**. The power, air, and/or gas may also be supplied to the mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks coupled to the spine structure **410** through couplings formed between the docking interfaces **499A** of the dock frame modules **4150** and the respective docking interfaces **499B** of the mobile carts **110A-110F**,

auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks.

[0055] Referring to FIGS. 4A and 4B, the docking interfaces **499A**, **499B** provide for zero footprint docking (e.g., one component may be abutted substantially directly against another component when docked). In other aspects, the docking interfaces **199A'** may be substantially similar to that described in U.S. Pat. No. 8,734,720 titled "AUTOMATED TESTING SYSTEM ARRANGEMENTS USING DOCKING STATION," issued on May 27, 2014, the disclosure of which is incorporated by reference in its entirety. In one aspect, one or more of the docking interfaces **499A**, **499B** may be extendable (docking interfaces **499A** is shown as being extendable in FIG. 4B for exemplary purposes). For example, the docking interface **499A** may include a seating surface interface member **499A1** and a component interface member **199A2** that are movable relative to each other in direction **177** (see FIG. 4B) so that the seating surface interface member **499A1** and component interface member **499A2** move towards and away from each other. Any suitable guiding members **499G** may be provided so that the movement between the seating surface interface member **499A1** and the component interface member **499A2** is a controlled guided movement so as to maintain a known predetermined spatial relationship between the control features **499CONT** disposed on the component interface member **499A2** and the datum surface **499S** of the dock frame **499** (and the datum established thereby) so that the repeatable positioning of the robotic processing system **100**, **100A** components is maintained in the manner described above. In one aspect, the guiding members **499G** may be a scissors type guiding member (see FIG. 4B), linear slides, pistons, etc. In one aspect, relative movement between the seating surface interface member **499A1** and the component interface member **499A2** may be biased so that the seating surface interface member **499A1** and the component interface member **499A2** are biased together or biased apart. In other aspects the relative movement between the seating surface interface member **499A1** and the component interface member **499A2** may be manual so as to manually adjust the distance between the seating surface interface member **499A1** and the component interface member **499A2**. Providing an extendable docking interface **499A**, **499B** provides for spacing of one or more of the mobile carts **110A-110F**, auto-navigating robotic processing vehicle **500**, **600**, or any other suitable (moving, stationary or fixed) interchangeable carts, tables, and/or racks at optimal distances to suit a predetermined laboratory process (see, e.g., FIG. 1A where for exemplary purposes only, the mobile cart **110D** is configured as a storage cart having laboratory equipment holders and a robot extending therefrom and a position of the laboratory equipment holders and robot is set using the extendable docking interface **499A**).

[0056] Referring now to FIG. 5, the transport arms **120**, **172**, **422**, **510A**, **510A'** described herein are generally represented by robotic transport system **1500**. As described herein the robotic transport system **1500** may be disposed on fixed (e.g., non-moving) platforms (e.g., such as automated system **170**) and/or mobile carts (the mobile carts including automated/motorized carts such as the auto-navigating robotic processing vehicle **500**, **600** (FIGS. 2 and 3) and non-motorized mobile carts **110** such as those that are pushed by humans or other automation (FIGS. 3A-3C)).

Here the robotic transport system **1500** may have any suitable robot arm **1532** including, but not limited to, selective compliant articulated robot arms **1510** (SCARA arms an example of which is illustrated in FIGS. 6A and 6B, which has at least a rotational arm motion about shoulder axis SX and a linear arm motion) and articulated arms **1520** (an example of which is illustrated in FIGS. 7A-7D, where each arm link **710-712** has, for example, at least three degrees of freedom indicated by the arrows illustrated in FIG. 7A). The different types of robot arms are generally illustrated in FIG. 5 as robot arm **1532**. Generally, the robotic transport system **1500** includes a frame **1530** (which may be a mobile cart frame, a frame of an automated system or any other suitable frame such as those described above), a drive section **1531**, and a robot arm **1532**. The drive section **1531** is connected to the frame **1530**.

[0057] The robot arm **1532** is operably coupled to the drive section **1531** so that the drive section **1531** drives motion of the robot arm **1532** to provide the robot arm **1532** with an arm motion in at least one axis of motion (e.g., a linear axis (or axes) of motion and/or a rotational axis (or axes) of motion) moving at least a portion of the robot arm **1532** in the collaborative space SPC, corresponding to the frame **1530**. For example, the robot arm **1532** includes articulated arm portions **1504** (e.g., arm links, end effectors, etc.) operably coupled to the drive section providing the articulated arm with the arm motion noted above. In one aspect, such as where the articulated arm **1532** is cart borne, the at least one axis of motion moves at least a portion of the articulated arm portions in the collaborative space (e.g., that corresponds to a selectably variable cart location of the cart-borne articulated arm). In the aspects, of the present disclosure, the motion of the robot arm **1532** is from a first location, in which the robot arm has a first shape (see, e.g., the different shapes **1690**, **1695**, **790**, **795**, **796** of the robot arms in FIGS. 6A-7D), to another different location of at least the portion of the robot arm **1532** in the collaborative space SPC, in which the robot arm has another different shape (again see, e.g., the different shapes **1690**, **1695**, **790**, **795**, **796** of the robot arms in FIGS. 6A-7D). The shape of at least the portion of the robot arm **1532** at the first location is different than the another different shape of the robot arm **1532** at the other different location.

[0058] As noted above, a collaborative robot guarding system **1550** is provided for the detection of obstacles and humans within, for example, the collaborative operating space SPC. In one aspect, the cart to which the robot arm **1532** is mounted defines an integrated electromagnetic sensor system (e.g., collaborative guarding system **1550**) that defines multiple selectable and adaptive sensing zones, i.e., an electromagnetic sounding zone **1601** and an electromagnetic affection envelope/zone **1600**. As such, the collaborative robot guarding system **1550** provides both a “broad” electromagnetic “sounding” zone/volume (also referred to as a region) **1601** and a bot arm “affection” envelope **1600** that is close coupled to a contour of the robot arm **1532** in motion from a first location to another different location. The electromagnetic sounding zone/volume **1601** is different than the electromagnetic affection envelope **1600** and covers the collaborative space SPC substantially in its entirety. The electromagnetic sounding zone/volume **1601** is separate and distinct from the electromagnetic affection envelope **1600** and encompasses the electromagnetic affection envelope **1600** substantially in its entirety for each different robot arm

1532 shape (whether the robot arm is cart-borne or at a fixed station) and each location of the robot arm **1532** in the collaborative space SPC. The electromagnetic sounding zone/volume **1601** comprehensively includes at least part of, and in some aspects all of, the collaborative space SPC so as to cover a maximum range of available robot arm **1532** motions (which robot arm motions may be a function of a number of degrees of freedom of the robot arm and/or a configuration of the stations which the robot arm interfaces). In one aspect, the electromagnetic sounding zone/volume **1601** is dynamically located (e.g., moves with) and initialized from a selectably variable cart (e.g., such as those carts described herein on which the robot arm **1532** is mounted). As described herein, the electromagnetic sounding zone/volume **1601** maps to a topology of the collaborative space SPC associated with the location of the robot arm **1532** and/or the available motions of the robot arm **1532**. Mapping the topology (e.g., equipment/object locations, types of equipment, equipment/object features/surfaces, etc.) of the collaborative space may be performed with the cart to which the robot arm **1532** is mounted moves (either automatically or manually) through the collaborative space SPC.

[0059] In one aspect, the electromagnetic sounding zone/volume **1601** is defined by at least one of the electromagnetic emitters **1501** borne by the cart-borne robot arm **1532**. In one aspect, the electromagnetic sounding zone/volume **1601** is defined by at least another electromagnetic emitter **1501A** different than the electromagnetic emitters **1501** borne by the cart-borne robot arm **1532**. In one aspect, the different electromagnetic emitter **1501A** is mounted on a cart **110** (FIGS. 3B, 3C-see also vehicles **500**, **600**) bearing the cart-borne robot arm **1532**. As may be realized, the different electromagnetic emitter **1501A** may be mounted on the fixed station (see automated station **170**) that bears the robot arm **1532**. As may also be realized, the receivers **1502A** may be disposed on the cart that bears the robot arm, the fixed station, or at any other suitable location of the collaborative space SPC for receiving reflected emissions from the emitters.

[0060] The electromagnetic sounding effects mapping a topology of the variably configurable collaborative space SPC that is dynamically based, at least in part, on a variably selectable cart location. The electromagnetic sounding forms a zone/volume (e.g., electromagnetic sounding zone/volume **1601**) that is explored with electromagnetic waves that are reflected from objects (humans, laboratory equipment, carts, etc.) within the collaborative space SPC (see, e.g., FIGS. 1A, 1C, and 6B) so as to detect the topology/surface of objects in the electromagnetic sounding zone/volume **1601**. The electromagnetic sounding zone/volume **1601** is generated by the electromagnetic emitters **1501** (or emitter of emitter/receiver **1503**) that are borne by the cart-borne robot arm **1532** and configured to cover a predetermined volume of the collaborative space SPC so that a collaborative object in the predetermined volume is detected with an electromagnetic sensor (e.g., receivers **1502**, **1502A** or receiver in emitter/receiver **1503**) cooperative with the electromagnetic emitters **1501** (or emitter in emitter/receiver **1503**). For example, the electromagnetic emitters **1501** are a multitude of millimeter wave radar sensors/emitters **1501M** distributed on at least the portion of the robot arm **1532** (e.g., mounted to articulated sections of the robot arm) and oriented so as to radar sound the collaborative space SPC in each direction, away from the robot arm **1532**, substantially

aligned with each direction component of motion of each of at least the portion of the robot arm 1532 moving from the first location to the other different location.

[0061] The bot arm affection envelope effects arm motion characteristics (as described herein) of the cart-borne robot arm 1532 with respect to interaction with objects within the affection envelope 1600. The electromagnetic affection envelope 1600 is generated by the electromagnetic emitters 1501 (or emitters of emitter/receive 1503) so that the electromagnetic affection envelope 1600 is defined by robot arm 1532 and is close coupled and substantially conformal to at least a dynamic contour part of each different arm shape of the robot arm 1532 with one or more of at least the portion of the robot arm 1532 moving from the first location to the other different location, and the robot arm 1532 changing shape from the first shape to the other different shape. In one or more aspects, the electromagnetic affection envelope 1600 is generated by a network of electromagnetic sounding waves (see, e.g., FIGS. 6A-7D) from the electromagnetic emitters 1501 (or emitters of emitter/receive 1503) so that contours, of the electromagnetic affection envelope 1600, set at a predetermined range limit from the robot arm 1532 are defined dynamically by the robot arm 1532 and substantially correspond to each different arm shape of the robot arm 1532 with one or more of at least the portion of the robot arm 1532 moving from the first location to the other different location, and the robot arm 1532 changing shape from the first shape to the other different shape.

[0062] In another aspect, such as where the robot arm 1532 is mounted to a fixed station (such as in FIGS. 1A and 1B), the fixed station defines an integrated electromagnetic sensor system (e.g., collaborative guarding system 1550) that provides both “broad” electromagnetic “sounding” and a bot arm “affection” envelope that is close coupled to a contour of the robot arm 1532 in motion from a first location to another different location in a manner similar to that described above; however, electromagnetic sounding effects mapping a topology of the variably configurable collaborative space that is dynamically based on a variably selectable number of carts that may be coupled to the fixed station. Here, the cart and/or fixed station defines the integrated electromagnetic sensor system via the robot arm 1532 that is interchangeably selected for coupling with the cart so as to configure the cart with different degrees of freedom of motion for different robot arm motions, trajectories, and/or functions.

[0063] As noted above, the collaborative guarding system 1550 includes electromagnetic emitters 1501, receivers 1502, 1502A, and/or integrated sensors 1503 (e.g., having both emitters/receivers) that are configured to generate at least the electromagnetic affection envelope 1600 (FIGS. 6A-6C and 7A-7D), where the electromagnetic affection envelope 1600 may be a subset of a workspace environment WE in which the robot arm 1532 operates. In one aspect, at least the electromagnetic emitters 1501 are borne by (e.g., mounted to and carried by) the robot arm 1532. In one aspect, the receivers 1502A are disposed within the collaborative space SPC at predetermined locations off-board the robot arm 1532 (e.g., such as on collaborative objects including but not limited to as humans, other robot arms, carts, etc. for receiving radiation from the electromagnetic emitters and effecting detection of the collaborative objects; or at fixed locations such as walls or cabinets of the collaborative space where intervention of collaborative

objects between the electromagnetic emitters and the receivers effects detection of the collaborative objects); while in other aspects, both the electromagnetic emitters 1501 and the receivers 1502 (and/or integrated sensors 1503) are borne by the robot arm 1532. At least the electromagnetic emitters 1501 being borne by the robot arm 1532 effect an electromagnetic affection envelope 1600 that is defined by the robot arm 1532 and that is close coupled (e.g., moves with and changes shape with the robot arm 1532) and is substantially conformal to at least part of a dynamic contour of each different arm shape of the robot arm 1532 with one or more of at least the portion of the robot arm 1532 (or articulated arm portions 1504 of the robot arm 1532) moving from the first location to the other different location, and the articulated arm changing shape from the first shape to the other different shape. In one or more aspects, the receivers 1502, 1502A are disposed in the collaborative space so as to receive reflected emissions and sense therefrom the collaborative object in the electromagnetic affection envelope.

[0064] Referring to FIG. 5 and briefly to FIGS. 6A-6C and 7A-7D, the electromagnetic emitters 1501, receivers 1502, 1502A, and/or integrated sensors 1503 may be configured as millimeter wave radar components (e.g., emitters, receivers, and/or sensors) mounted to articulated sections of the robot arm 1532. The electromagnetic affection envelope 1600 is defined by a network of millimeter wave radar beams (which are represented by the fields of view FOV shown in FIGS. 6A-6C and 7A-7D) generated by the electromagnetic emitters 1501 (and/or emitter/receiver 1503 as well as emitters 1501A and receivers 1502A) that are disposed on more than one articulated sections 1610-1612 (FIG. 6A), 710-712 (FIG. 7A) of the robot arm 1532 (it is noted that the emitters 1501, sensors 1503, etc. are generally denoted as sensor 1500S in FIGS. 6A-7D for illustrative purposes). In one aspect, each articulated section 1610-1612, 710-712 of the robot arm 1532 with different kinematic motion has more than one millimeter wave radar emitter/sensor forming at least part of a multitude of sensors forming the network of millimeter wave radar beams.

[0065] At least two adjacent electromagnetic emitters 1501 (and in some aspects the receivers 1502 and in other aspects the integrated sensors 1503) have overlapping emitter/receiver/sensor fields of view FOV; while in other aspects each field of view FOV of each emitter/receiver/sensor overlaps a field of view FOV of an adjacent emitter/receiver/sensor. The overlapping fields of view FOV provide for substantially complete sensor coverage of substantially an entire workspace environment WE (FIGS. 1A and 1C) of the collaborative space SPC; however, in some aspects there may be areas of the workspace environment WE that do not need to be monitored by the collaborative robot guarding system 1550 such that emitters/receivers/sensors may not be provided on certain portions of the robot arm 1532 (e.g., such as where the robot arm 1532 operates adjacent a wall, adjacent zones where human access is restricted, or adjacent portions of the workspace environment 1532 that have fixed configurations without human presence. The multitude of (i.e., a grouping or arrangement of regularly spaced) emitters/receivers/sensors may be placed on the robot arm 1532 with overlapping field of view FOV coverage to obtain desired sensor coverage while omitting coverage in undesired areas of the workspace environment 1532.

[0066] Referring again to FIG. 5, the collaborative guarding system 1550 also includes any suitable communication

system **1508** that couples the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** to, for example, a controller **1533** of the robotic transport system **1500** or any other suitable controller that is in communication with the controller **1533** to effect movement of the robot arm **1532**. The communication system **1508** may be a controller area network **1508A**, an EtherCAT® network or any other suitable communications network for transmitting data between the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** and the controller **1533**. It is noted that the EtherCAT® network requirements have been standardized in International Electrotechnical Commission (IEC) standards **61158** and **61784** as well as Semiconductor Equipment and Materials International (SEMI™) standard E54.20 and may be suitable for both hard and soft real-time computing requirements in automation equipment. The communication system **1508** may also include any suitable number of neural networks **1509** coupled to the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503**. While the neural network(s) **1509** is illustrated and described as being part of the communication system **1508**, in other aspects the neural network(s) **1509** may be resident within the controller **1533** (where reference to the controller **1533** herein refers to any suitable processor(s) and memory for processing and storing any suitable data generated by the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** and for operating the robot arm **1532**) so that output data from the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** is processed by the controller implementing the neural network **1509**.

[0067] In one aspect, each of the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** has a respective neural network. Each respective neural network is trained in any suitable manner to detect the different types of obstacles (e.g., humans, mobile carts **110**, auto-navigating robotic processing vehicles **500**, **600**, other robot arms, etc.), that may be encountered within the workspace environment **WE** and the collaborative operating space **SPC** that forms at least a portion of the workspace environment **WE**. The data received by the controller **1533** from the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** (which in one aspect has been processed by the respective neural networks) may be employed by the controller **1533** for the operation of the robot arm **1532**. In one aspect, output data from the receivers **1502**, **1502A** is processed by the controller **1533** implementing a suitable neural network **1509A** (see FIG. 5) which may be employed in conjunction with or in lieu of neural network **1509**.

[0068] The controller **1533** is communicably connected to the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** (e.g., each one of which may be referred to as a millimeter wave radar sensor) so as to selectably activate the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** and select a radar emission direction (e.g., one or more directions corresponding to the left, the right, the top, and/or the bottom of a link of the robot arm **1532**) from a number of independently selectable radar emission directions defined (via a position/location on the robot arm **1532**) by the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503** based on at least one direction

component of motion of at least the portion of the robot arm **1532** moving. The controller **1533** is configured so that in response to detection, from radar emission by selected ones of the electromagnetic emitters **1501**, receivers **1502**, **1502A**, and/or integrated sensors **1503**, of approach of an object, in the collaborative space relative to at least the portion of the robot arm **1532** moving, command the drive section **1531** affecting a predetermined kinematic or dynamic characteristic of motion of at least the portion of the robot arm **1532** moving. In one aspect, the selected radar emission direction sounds a dynamically selected limited region of the collaborative space (see the various fields of view **FOV** in FIGS. 6A-7D and electromagnetic affection envelope **1600**) limited so as to be defined by directions substantially aligned with each of the at least one direction component of motion of the robot arm **1532** or a portion thereof (e.g., such as arm links and end effectors). The selected limited region of the collaborative space **SPC** (e.g., defined by one or more fields of view of selected sensors) corresponds substantially in entirety to each of the at least one direction component of motion, so that each of the portions of the robot arm **1532** moving, through each arm position, from the first location to the other different location (see FIGS. 6A-7D) traverses through the selected limited region of the collaborative space **SPC** substantially in entirety.

[0069] Referring to FIGS. 5, 1A, 1C, 6A and 6B, in one aspect, the controller **1533** is communicably connected to the receivers **1502**, **1502A** and/or emitter/receiver **1503** (e.g., sensors) to detect presence of the collaborative object (e.g., such as human **199**, vehicle **500**, etc.—see FIG. 1C) in the predetermined volume defined **1601V** (i.e., of the electromagnetic sounding zone/volume **1601**). The controller **1533** is communicably connected with the electromagnetic emitters **1501** and/or emitter/receiver **1503** and configured so as to dynamically form the electromagnetic affection envelope **1600** based on detection of the collaborative object presence in the predetermined volume **1601V**. The controller **1533** is configured to dynamically form bounds (e.g., see boundary **1600BD** in FIG. 6B) of the electromagnetic affection envelope **1600** based on detection of the collaborative object presence within the predetermined volume **1601V**. In one aspect, the controller **1533** dynamically changes the form (e.g., shape, size, etc.) of the bounds **1600BD** of the electromagnetic affection envelope **1600** based on detection of the collaborative object presence. As an example, A depth **DP** of the electromagnetic affection envelope **1600** may be increased upon detection of an object (either by detection with the electromagnetic affection envelope **1600** or by detection with the electromagnetic sounding zone/volume **1601**) so as to provide a suitably sized object detection zone for anticipating and tracking movements of the object. In addition, referring to FIG. 6C as an example, the robot arm **1532** may be rotating in direction **1699** where the millimeter wave radar sensors located on side **1532S1** of the robot arm **1532** are activated (e.g., the millimeter wave radar sensors located on side **1532S2** of the robot arm **1532** may be deactivated and the electromagnetic affection envelope **1600** extends only from side **1532S1**) for detecting objects in the direction of motion **1699**. The controller **1533** may determine an object has entered the electromagnetic sounding zone/volume **1601** behind the robot arm (e.g., relative to the direction of movement **1699**) and activate the millimeter wave radar sensors located on side **1532S2** to track move-

ment of the object relative to the robot arm 1532 so that the electromagnetic affection envelope 1600 extends from both sides 1532S1, 1532S2 of the robot arm 1532.

[0070] In one aspect, the controller 1533 is communicably connected to the sensor(s) (e.g., emitters and/or receivers) that is/are operative with the electromagnetic sounding zone 1601 and the controller 1533 is configured to register a change in the presence of the collaborative object in the predetermined volume 1601V of the electromagnetic sounding zone/volume 1601, and in response to the registered change dynamically alter the form of the electromagnetic affection envelope 1600. For example, a registered change in the presence of a collaborative object in the electromagnetic sounding zone, such as when a new collaborative object is detected or a collaborative object moves closer to the robot arm 1532, may result in an increase in size of the electromagnetic affection envelope 1600; whereas, the electromagnetic affection envelope 1600 may decrease in size when the collaborative object is registered as moving away from the robot arm 1532 or leaving the electromagnetic sounding zone/volume 1601. In other aspect, the form of the electromagnetic affection envelope may change in any suitable manner upon the controller 1533 registering a change in the presence of a collaborative object. For example, the direction in which electromagnetic affection envelope 1600 extends may change (e.g., relative to the top, bottom and sides of the arm links and end effector) depending on detection of an object in the electromagnetic sounding zone/volume 1601 in a manner similar to that described above.

[0071] In one aspect, the controller 1533 is configured to change the form of the electromagnetic affection envelope 1600 based on a direction defined by the registered change in presence of the collaborative object within the predetermined volume 1601V as related to a direction of motion or planned direction of motion of the at least the portion of the articulated arm portions moving. For example, if the moving portions of the robot arm 1532 are moving towards the collaborative object (whose presence within the predetermined volume 1601V has changed) the electromagnetic affection envelope 1600 may increase in size/depth in the direction of arm movement towards the collaborative object to, for example, provide for detection of collaborative object entry within the electromagnetic affection envelope 1600 with sufficient time for the controller 1533 to change an arm movement characteristic in response to the detection of entry of the collaborative object within the electromagnetic affection envelope 1600. As another example, where the collaborative object is registered as moving from a front side of the robot arm 1532 to a back side of the robot arm 1532, the electromagnetic affection envelope on the back side of the robot arm 1532 may be increased in size so as to detect the collaborative object for effecting trajectory planning of the robot arm 1532 in view of the registered change in presence of the collaborative object. In other aspects, the controller may increase the number of times the controller switches (i.e., frequency of switching increases) between workspace environment monitoring 1580 and electromagnetic affection envelope monitoring 1581 so as to track the changes in movement of the collaborative object based on the registered change in presence of the collaborative object and adjust the form of the electromagnetic affection envelope 1600 accordingly.

[0072] In one aspect, the emitters 1501, 1501A and receivers 1502, 1502A (and/or emitter/receiver 1503) are common to and operative with both the electromagnetic sounding zone/volume 1601 and the electromagnetic affection envelope 1600 and the controller 1533 is configured to selectably switch between generation of the electromagnetic sounding zone/volume 1601 and generation of the electromagnetic affection envelope 1600 so as to effect the changes in form of the electromagnetic affection envelope 1600. In other aspects, sensors associated with the electromagnetic sounding zone/volume 1601 may be different from the sensors associated with the electromagnetic affection envelope 1600. For example, the sensors associated with the electromagnetic sounding zone/volume 1601 may be infrared sensors, optical sensors or other suitable sensors that are different from the radar sensors of the electromagnetic affection envelope 1600, where the sensors of the electromagnetic sounding zone/volume 1601 may be located on the robot arm 1532 or the cart/station on which the robot arm 1532 is mounted.

[0073] As an example of changing the form of the electromagnetic affection envelope 1600 and switching between the electromagnetic affection envelope 1600 and the electromagnetic sounding zone/volume 1601, the controller 1533 is configured to control an output strength of the radar beams of the electromagnetic emitters 1501 and/or integrated sensors 1503 for increasing and/or decreasing the field of view FOV of one or more of the electromagnetic emitters 1501 and/or integrated sensors 1503. For example, the electromagnetic emitters 1501 and/or integrated sensors 1503 may include any suitable components (e.g., gain amplifiers, etc.) that are adjustable so as to increase or decrease the field of view FOV of the respective electromagnetic emitters 1501 and/or integrated sensors 1503. Increasing or decreasing the fields of view FOV provides for one or more of both workspace environment monitoring 1580 and electromagnetic affection envelope monitoring 1581. Workspace environment monitoring 1580 may provide the controller 1533 with an overall calibration of the workspace environment while the electromagnetic affection envelope monitoring 1581 may provide for adjusting one or more predetermined characteristics of at least a portion of the robot arm 1532 as described herein.

[0074] For example, the controller 1533 may be configured to control the output strength of the radar beams so as to increase the field of view of the one or more of the electromagnetic emitters 1501 and/or integrated sensors 1503 from a localized field of view FOV (FIG. 6A), that effects electromagnetic affection envelope monitoring 1581, to a workspace field of view WFOV (FIG. 6B), that may extend to boundaries (e.g., so as to encompass processing equipment within the workspace environment WE that the robot arm 1532 may encounter) of the workspace environment and effect workspace environment monitoring 1580 (e.g., via electromagnetic “sounding” zone/volume 1601). In aspects of the present disclosure where the robot arm 1532 is mounted to a mobile cart (either driven by automation such as with auto-navigating robotic processing vehicles 500, 600 or pushed by a human) the mobile cart may be moved around the workspace environment WE so that the workspace field of view WFOV travels through substantially the entire (or any desired portions thereof) of the workspace environment WE (e.g., the workspace field of view dynamically changes).

[0075] In one aspect, referring to also to FIG. 6B, the controller 1533 is programmed so that a depth DP of the electromagnetic affection envelope 1600 between a set outermost detection boundary 1600BD of the electromagnetic affection envelope 1600 and the robot arm 1532 is selectively variable dependent on a predetermined characteristic of at least the portion (e.g., link, end effector, etc.) of the robot arm 1532 in motion. In another aspect, the controller 1533 is programmed so that the depth DP of the electromagnetic affection envelope 1600 between the set outermost detection boundary 1600BD of the electromagnetic affection envelope 1600 and the robot arm 1532 is dynamically variable dependent on the predetermined characteristic of at least the portion of the robot arm 1532 in motion. The at least one predetermined characteristic of the arm motion is, in one aspect, at least one of a curve of a path 1590, a shape of a trajectory 1592, a kinematic parameter 1593, and a dynamic parameter 1594 of at least the portion of the articulated arm in motion from the first location to the other different location (see FIG. 5). As a non-limiting example, the depth DP of the electromagnetic affection envelope 1600 may be increased as a speed of movement of the arm increases and the depth DP may be made smaller as the speed of movement of the arm decreases (or vice versa). As another non-limiting example, the depth DP of the electromagnetic affection envelope 1600 may be increased as a curve of a path increases in radius and the depth DP decreased as the curve of the path decreases (or vice versa).

[0076] The controller 1533 is communicably connected to the drive section 1531 and is configured so that in response to detection of entry of a collaborative object the controller 1533 commands a change in at least one of the predetermined characteristics of the arm motion. The detection of entry of the collaborative object is due at least in part to motion of at least the portion of the robot arm 1532, where such motion causes the collaborative object to pass into the electromagnetic affection envelope 1600 the contour of which depends on the robot arm 1532 movement. In one aspect, the change in the at least one predetermined characteristic of the arm motion is selected to avoid or prevent contact between the articulated arm and the collaborative object. For example, the controller 1533 may slow or stop movement of the robot arm 1532 in response to the detection of the collaborative object. The controller 1533 may change trajectory of the robot arm 1532 in response to the detection of the collaborative object to a direction that is away from the detected collaborative object. The controller 1533 may change a torque of the drive section 1531 in response to the detection of the collaborative object. In other aspects, any suitable characteristic of arm motion may be changed by the controller 1533 in response to the detection of the collaborative object.

[0077] The controller 1533, employing workspace environment monitoring 1580 through the electromagnetic sounding zone/volume 1601, is configured to map/calibrate the workspace environment WE and to globally calibrate the robot arm 1532 based on workspace environment data obtained by the electromagnetic emitters 1501 and/or integrated sensors 1503, e.g., operating with the workspace field of view WFOV. For example, the global calibration may extend beyond bounds of the electromagnetic affection envelope 1600 so that as the robot arm 1532 is moved from one location (see, e.g., location A in FIG. 1C) within the workspace environment WE to another different location

(see, e.g., location B in FIG. 1C) within the workspace environment WE the controller 1533 may automatically recalibrate the robot arm 1532 with respect to the different location within the workspace environment WE. The automatic recalibration of the robot arm 1532 based on the global calibration of the workspace environment WE may provide for the controller 1533 automatically changing the manner in which the robot arm operates so as to interface with different collaborative equipment, automatically changing operating ranges in which the robot arm 1532 moves, etc. so that the robot arm 1532 integrates (e.g., once global calibration of the workspace environment is performed) into any desired location of the workspace environment WE without further teaching/setup of the robot arm 1532. As an example, the controller 1533 is configured map the workspace environment and generated a three-dimensional workspace model (FIG. 9, Block 900). In one aspect, the controller 1533 maps the workspace environment WE via the electromagnetic sounding zone/volume 1601 as the vehicle 500, 600 travels (such as where the robot arm 1532 is cart-borne) through the workspace environment WE. In other aspect, the controller maps the workspace environment WE via the electromagnetic sounding zone/volume 1601 as carts 110A-110F are coupled to the automated system 170 (such as where the robot arm 1532 is fixed and is not cart-borne). Mapping the workspace environment WE provides for the identification of each piece of lab equipment and the sample/labware holding locations (or any other suitable pick/place location and items disposed thereat). In one aspect, the controller 1533 is configured to generate a three dimensional workspace environmental model 1582 (FIG. 9, Block 910) using the data obtained from mapping the workspace environment WE. The three dimensional workspace environmental model 1582 may be parsed by the controller 1533 so that each piece of equipment in the three dimensional workspace environmental model 1582 may be compared with, for example, predetermined computer aided drawing (CAD) models of the respective equipment to identify datum reference locations (e.g., such as datums DF) of the lab equipment so that the controller may determine, based on the datum reference locations and predetermined dimensions of the lab equipment provided by the CAD model, locations for each piece of lab equipment and the sample/labware holding locations (or any other suitable pick/place location and items disposed thereat) (FIG. 9, Block 920). The controller 1533 is configured to use the locations of the lab equipment, etc. in conjunction with predetermined kinematic/dimensional characteristics of the robot arm 1532 to automatically teach the robot arm 1532 where the sample/labware holding locations are (Block 930). The pick/place locations of the sample/labware at the holding locations may be fine-tuned (e.g., adjusted) based on electromagnetic affection envelope monitoring 1581 (FIG. 9, Block 940).

[0078] Workspace environment monitoring 1580, via the electromagnetic sounding zone/volume 1601, by the controller 1533 also provides for automatic recalibration/teaching of the robot arm 1532 (FIG. 9, Block 950) such as where the robot arm is mounted to (e.g., a stationary) automated system 170 (FIG. 1A) and different carts are attached to the automated system 170. In one aspect, the workspace environment monitoring 1581 effects the creation, by the controller 1533, of a three-dimensional (3-D) workspace environment model 1582 and/or a three-dimensional electromagnetic affection envelope model 1583. The work-

space environment model **1582** and/or electromagnetic affection envelope model **1583** may be employed by the controller **1533** along with known characteristics of the laboratory environment (e.g., known positional relationships between items/equipment locations on carts **110**, known spatial relationships different docked carts or laboratory stations, etc.) to effect the automatic calibration/teaching as described above with respect to one or more of the cart-borne robot arms and fixed station-borne robot arms.

[0079] In one aspect, the controller **1533** is configured to selectably generate the electromagnetic sounding zone **1601** so as to map topology characteristics (as described herein) (FIG. **10**, Block **1000**) of the predetermined volume **1601V** associated with planning a move of the robot arm **1532** moving at least the portion of the articulated arm portions to or from at least one of the first location and the other different location (e.g., see the arm move sequence illustrated in FIGS. **6A-6C**, the arm move sequence illustrated in FIGS. **7A** and **7B**, and the arm move sequence illustrated in FIGS. **7C** and **7D**). Based on the mapped topology characteristics of the predetermined volume **1601V**, the controller **1533** generates trajectories of the robot arm **1532** (FIG. **10**, Block **1010**) from the first location and the other different location within the predetermined volume **1601V**. Mapping data of the topology characteristics of the predetermined volume **1601V** obtained by the controller defines a basis for trajectory planning of at least the portion of the robot arm portions (e.g., links, end effectors, etc.) moving. As may be realized, the workspace environment model **1582** and/or electromagnetic affection envelope model **1583** reflect/embody the topology characteristics of the predetermined volume **1601V** and may be employed by the controller **1533** in any suitable manner to effect trajectory planning of at least the portion of the robot arm portion moving in the collaborative workspace SPC. For example, the robot arm **1532** movements may be calibrated to the electromagnetic sounding zone/volume **1601** and the mapped topology of the electromagnetic sounding zone/volume **1601** (e.g., the features of the working environment are taught to the robot arm **1532** as described herein). The controller **1533** is configured to plan robot arm **1532** trajectories (FIG. **10**, Block **1010**) and to plan changes in form (as described herein) of the electromagnetic affection envelope **1600** (e.g., affection envelope planning) (FIG. **10**, Block **1020**) based on movement constraints and object locations (e.g., collaborative objects, labware, etc. of the working environment) as determined from the mapped topology data. Examples of trajectory planning effected by object/collaborative the object entry into electromagnetic sounding zone/volume **1601** and/or electromagnetic affection envelope **1600** include, but are not limited to changes in robot arm **1532** motion characteristics (e.g., slowing/stopping of arm velocity and/or acceleration, moving the arm in an alternate trajectory away from the detected object, changing/decreasing the motor torque, etc.).

[0080] As described herein, the electromagnetic affection envelope **1600** is close coupled to the robot arm **1532** and is adaptive to motion of the robot arm **1532**. The electromagnetic affection envelope **1600** also is interactive with the electromagnetic sounding zone/volume **1601** so as to be dynamic with respect to changes in collaborative object pose as registered by/in the electromagnetic sounding zone/volume **1601**. As also described herein the controller **1533** is configured to selectably switch from the electromagnetic

sounding zone/volume **1601** to the electromagnetic affection envelope **1600** and modify characteristics of the electromagnetic affection envelope **1600** based on data obtained from the electromagnetic sounding zone/volume **1601**.

[0081] Referring to FIGS. **5-8**, an exemplary method for a robotic transport system will be described in accordance with aspects of the present disclosure. The robot arm **1532** is provided (FIG. **7**, Block **800**) and is operably coupled to the drive section **1531** so as to provide the robot arm **1532** with arm motion in at least one axis of motion moving at least a portion (e.g., articulated arm portion(s) **1504**) of the robot arm **1532** in the collaborative space SPC from the first location, in which the robot arm **1532** has a first shape, to another different location of at least the portion **1504** of the robot arm **1532** in the collaborative space SPC in which the robot arm **1532** has another different shape. An electromagnetic affection envelope **1600** is generated (FIG. **8**, Block **810**), with electromagnetic emitters **1501** borne by the robot arm **1532**, so that the electromagnetic affection envelope **1600** is defined by the robot arm **1532** and is close coupled and substantially conformal to at least part of a dynamic contour of each different arm shape of the articulated arm with one or more of at least the portion **1504** of the robot arm **1532** moving from the first location to the other different location, and the robot arm **1532** changing shape from the first shape to the other different shape. In response to detection of entry of a collaborative object, due at least in part to motion of at least the portion **1504** of the robot arm **1532**, into the electromagnetic affection envelope **1600**, commanding, with the controller **1533** coupled to the drive section **1531**, a change in at least one predetermined characteristic of the arm motion (FIG. **8**, Block **820**). In one aspect, reflected emissions are received (FIG. **8**, Block **830**), with receivers **1501**, **1502A** (or receiver of emitter receiver **1503**) disposed in the collaborative space SPC, and sensing therefrom the collaborative object in the electromagnetic affection envelope. The controller **1533** selects the change in the at least one predetermined characteristic of the arm motion to avoid or prevent contact between the robot arm and the collaborative object (FIG. **8**, Block **840**).

[0082] In accordance with one or more aspects of the present disclosure a robotic transport system comprises:

[0083] a frame;

[0084] a drive section connected to the frame;

[0085] an articulated arm operably coupled to the drive section providing the articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm in a collaborative space, corresponding to the frame, from a first location, in which the articulated arm has a first shape, to another different location of at least the portion of the articulated arm in the collaborative space in which the articulated arm has another different shape;

[0086] an electromagnetic affection envelope, generated by electromagnetic emitters, borne by the articulated arm so that the electromagnetic affection envelope is defined by the articulated arm and is close coupled and substantially conformal to at least part of a dynamic contour of each different arm shape of the articulated arm with one or more of at least the portion of the articulated arm moving from the first location to the other different location, and the articulated arm changing shape from the first shape to the other different shape; and

[0087] a controller communicably connected to the drive section and configured so that in response to detection of entry of a collaborative object, due at least in part to motion of at least the portion of the articulated arm, into the electromagnetic affection envelope, the controller commands a change in at least one predetermined characteristic of the arm motion.

[0088] In accordance with one or more aspects of the present disclosure the at least one predetermined characteristic of the arm motion is at least one of a curve of a path, a shape of a trajectory,

[0089] a kinematic parameter, and a dynamic parameter of at least the portion of the articulated arm in motion from the first location to the other different location.

[0090] In accordance with one or more aspects of the present disclosure the change in the at least one predetermined characteristic of the arm motion is selected to avoid or prevent contact between the articulated arm and the collaborative object.

[0091] In accordance with one or more aspects of the present disclosure the electromagnetic emitters are millimeter wave radar emitters mounted to articulated sections of the articulated arm.

[0092] In accordance with one or more aspects of the present disclosure the electromagnetic affection envelope is defined by a network of millimeter wave radar beams generated by the electromagnetic emitters that are disposed on more than one articulated sections of the articulated arm.

[0093] In accordance with one or more aspects of the present disclosure each articulated section of the articulated arm with different kinematic motion has more than one millimeter wave radar sensor forming at least part of a multitude of sensors forming the network of millimeter wave radar beams.

[0094] In accordance with one or more aspects of the present disclosure the controller is programmed so that a depth of the electromagnetic affection envelope between set outermost detection boundary of the electromagnetic affection envelope and the articulated arm is selectably variable dependent on a predetermined characteristic of at least the portion of the articulated arm in motion.

[0095] In accordance with one or more aspects of the present disclosure the controller is programmed so that a depth of the electromagnetic affection envelope between a set outermost detection boundary of the electromagnetic affection envelope and the articulated arm is dynamically variable dependent on a predetermined characteristic of at least the portion of the articulated arm in motion.

[0096] In accordance with one or more aspects of the present disclosure the robot transport system further comprises receivers disposed in the collaborative space so as to receive reflected emissions and sense therefrom the collaborative object in the electromagnetic affection envelope.

[0097] In accordance with one or more aspects of the present disclosure output data from the receivers is processed by the controller implementing a neural network.

[0098] In accordance with one or more aspects of the present disclosure a robotic transport system comprises:

[0099] a frame;

[0100] a drive section connected to the frame;

[0101] an articulated arm operably coupled to the drive section providing the articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm in a collaborative space, corre-

sponding to the frame, from a first location, in which the articulated arm has a first shape, to another different location of at least the portion of the articulated arm in the collaborative space in which the articulated arm has another different shape;

[0102] an electromagnetic affection envelope, generated by a network of electromagnetic sounding waves from electromagnetic emitters, on the articulated arm so that contours, of the electromagnetic affection envelope, set at a predetermined range limit from the articulated arm are defined dynamically by the articulated arm and substantially correspond to each different arm shape of the articulated arm with one or more of at least the portion of the articulated arm moving from the first location to the other different location, and the articulated arm changing shape from the first shape to the other different shape; and

[0103] a controller communicably connected to the drive section and configured so that in response to detection of entry of a collaborative object, due at least in part to motion of at least the portion of the articulated arm, through the contours into the electromagnetic affection envelope, the controller commands a change in at least one predetermined characteristic of the arm motion.

[0104] In accordance with one or more aspects of the present disclosure the at least one predetermined characteristic of the arm motion is at least one of a curve of a path, a shape of a trajectory, a kinematic parameter, and a dynamic parameter of at least the portion of the articulated arm in motion from the first location to the other different location.

[0105] In accordance with one or more aspects of the present disclosure the change in the at least one predetermined characteristic of the arm motion is selected to avoid or prevent contact between the articulated arm and the collaborative object.

[0106] In accordance with one or more aspects of the present disclosure the electromagnetic emitters are millimeter wave radar emitters mounted to articulated sections of the articulated arm.

[0107] In accordance with one or more aspects of the present disclosure the electromagnetic affection envelope is defined by a network of millimeter wave radar beams generated by the electromagnetic emitters that are disposed on more than one articulated sections of the articulated arm.

[0108] In accordance with one or more aspects of the present disclosure each articulated section of the articulated arm with different kinematic motion has more than one millimeter wave radar sensor forming at least part of a multitude of sensors forming the network of millimeter wave radar beams.

[0109] In accordance with one or more aspects of the present disclosure the controller is programmed so that a depth of the electromagnetic affection envelope between a set outermost detection boundary of the electromagnetic affection envelope and the articulated arm is selectably variable dependent on a predetermined characteristic of at least the portion of the articulated arm in motion.

[0110] In accordance with one or more aspects of the present disclosure the controller is programmed so that a depth of the electromagnetic affection envelope between a set outermost detection boundary of the electromagnetic affection envelope and the articulated arm is dynamically

variable dependent on a predetermined characteristic of at least the portion of the articulated arm in motion.

[0111] In accordance with one or more aspects of the present disclosure the robot transport system further comprises receivers disposed in the collaborative space so as to receive reflected emissions and sense therefrom the collaborative object in the electromagnetic affection envelope.

[0112] In accordance with one or more aspects of the present disclosure output data from the receivers is processed by the controller implementing a neural network.

[0113] In accordance with one or more aspects of the present disclosure the robotic transport system comprises:

[0114] a frame;

[0115] a drive section connected to the frame;

[0116] an articulated arm operably coupled to the drive section providing the articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm in a collaborative space, corresponding to the frame, from a first location, to another different location of at least the portion of the articulated arm in the collaborative space;

[0117] a multitude of millimeter wave radar sensors distributed on at least the portion of the articulated arm and oriented so as to radar sound the collaborative space in each direction, away from the articulated arm, substantially aligned with each direction component of motion of each of at least the portion of the articulated arm moving from the first location to the other different location; and

[0118] a controller communicably connected to the millimeter wave radar sensors so as to selectably activate the millimeter wave radar sensors and select a radar emission direction from a number of independently selectable radar emission directions defined by the millimeter wave radar sensors based on at least one direction component of motion of at least the portion of the articulated arm moving, and configured so that in response to detection, from radar emission by selected ones of the millimeter wave radar sensors, of approach of an object, in the collaborative space relative to at least the portion of the articulated arm moving, command the drive section affecting a predetermined kinematic or dynamic characteristic of motion of at least the portion of the articulated arm moving.

[0119] In accordance with one or more aspects of the present disclosure the selected radar emission direction sounds a dynamically selected limited region of the collaborative space limited so as to be defined by directions substantially aligned with each of the at least one direction component of motion.

[0120] In accordance with one or more aspects of the present disclosure the selected limited region of the collaborative space corresponds substantially in entirety to each of the at least one direction component of motion, so that each of the at least the portion of the articulated arm moving, through each arm position, from the first location to the other different location traverses through the selected limited region of the collaborative space substantially in entirety.

[0121] In accordance with one or more aspects of the present disclosure the millimeter wave radar sensors are linked to the controller via a controller area network or an EtherCAT® network.

[0122] In accordance with one or more aspects of the present disclosure the articulated arm has a first shape with at least the portion of the articulated arm at the first location.

[0123] In accordance with one or more aspects of the present disclosure with at least the portion of the articulated arm at the other different location, the articulated arm has another different shape that is different from the first shape.

[0124] In accordance with one or more aspects of the present disclosure the multitude of millimeter wave radar sensors are dependent from at least the portion of the articulated arm.

[0125] In accordance with one or more aspects of the present disclosure a method for a robotic transport system, the method comprises:

[0126] providing an articulated arm operably coupled to a drive section so as to provide the articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm in a collaborative space from a first location, in which the articulated arm has a first shape, to another different location of at least the portion of the articulated arm in the collaborative space in which the articulated arm has another different shape;

[0127] generating, with electromagnetic emitters borne by the articulated arm, an electromagnetic affection envelope so that the electromagnetic affection envelope is defined by the articulated arm and is close coupled and substantially conformal to at least part of a dynamic contour of each different arm shape of the articulated arm with one or more of at least the portion of the articulated arm moving from the first location to the other different location, and the articulated arm changing shape from the first shape to the other different shape; and

[0128] in response to detection of entry of a collaborative object, due at least in part to motion of at least the portion of the articulated arm, into the electromagnetic affection envelope, commanding, with a controller coupled to the drive section, a change in at least one predetermined characteristic of the arm motion.

[0129] In accordance with one or more aspects of the present disclosure the at least one predetermined characteristic of the arm motion is at least one of a curve of a path, a shape of a trajectory, a kinematic parameter, and a dynamic parameter of at least the portion of the articulated arm in motion from the first location to the other different location.

[0130] In accordance with one or more aspects of the present disclosure the method further comprises, selecting, with the controller, the change in the at least one predetermined characteristic of the arm motion to avoid or prevent contact between the articulated arm and the collaborative object.

[0131] In accordance with one or more aspects of the present disclosure the electromagnetic emitters are millimeter wave radar emitters mounted to articulated sections of the articulated arm.

[0132] In accordance with one or more aspects of the present disclosure the electromagnetic affection envelope is defined by a network of millimeter wave radar beams generated by the electromagnetic emitters that are disposed on more than one articulated sections of the articulated arm.

[0133] In accordance with one or more aspects of the present disclosure each articulated section of the articulated arm with different kinematic motion has more than one

millimeter wave radar sensor forming at least part of a multitude of sensors forming the net of millimeter wave radar beams.

[0134] In accordance with one or more aspects of the present disclosure the controller is programmed so that a depth of the electromagnetic affection envelope between a set outermost detection boundary of the electromagnetic affection envelope and the articulated arm is selectably variable dependent on a predetermined characteristic of at least the portion of the articulated arm in motion.

[0135] In accordance with one or more aspects of the present disclosure the controller is programmed so that a depth of the electromagnetic affection envelope between a set outermost detection boundary of the electromagnetic affection envelope and the articulated arm is dynamically variable dependent on a predetermined characteristic of at least the portion of the articulated arm in motion.

[0136] In accordance with one or more aspects of the present disclosure the method further comprises receiving, with receivers disposed in the collaborative space, reflected emissions and sensing therefrom the collaborative object in the electromagnetic affection envelope.

[0137] In accordance with one or more aspects of the present disclosure the receivers are connected to the controller by a neural network.

[0138] In accordance with one or more aspects of the present disclosure a robotic transport system comprises:

[0139] a cart-borne articulated arm having;

[0140] a frame;

[0141] a drive section connected to the frame;

[0142] articulated arm portions operably coupled to the drive section providing the cart-borne articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm portions in a collaborative space, corresponding to a selectably variable cart location of the cart-borne articulated arm, from a first location, in which the cart-borne articulated arm has a first shape, to another different location of at least the portion of the articulated arm portions in the collaborative space in which the cart-borne articulated arm has another different shape;

[0143] an electromagnetic affection envelope, generated by electromagnetic emitters, borne by the cart-borne articulated arm so that the electromagnetic affection envelope is defined by the cart-borne articulated arm and is close coupled and substantially conformal to at least a dynamic contour portion of each different arm shape of the cart-borne articulated arm with one or more of at least the portion of the articulated arm portions moving from the first location to the other different location, and the cart-borne articulated arm changing shape from the first shape to the other different shape; and

[0144] a controller communicably connected to electromagnetic sensors operative with the electromagnetic affection envelope to detect entry of a collaborative object into the electromagnetic affection envelope, and communicably connected to sensors operative with an electromagnetic sounding region, different than the electromagnetic affection envelope, and covering the collaborative space substantially in entirety.

[0145] In accordance with one or more aspects of the present disclosure the electromagnetic sounding region is separate and distinct from the electromagnetic affection

envelope and encompasses the electromagnetic affection envelope substantially in entirety for each different cart-borne articulated arm shape and each location of the cart-borne articulated arm in the collaborative space.

[0146] In accordance with one or more aspects of the present disclosure the electromagnetic sounding region is defined by at least one of the electromagnetic emitters borne by the cart-borne articulated arm.

[0147] In accordance with one or more aspects of the present disclosure the electromagnetic sounding region is defined by at least another electromagnetic emitter different than the electromagnetic emitters borne by the cart-borne articulated arm.

[0148] In accordance with one or more aspects of the present disclosure the different electromagnetic emitter is mounted on a cart bearing the cart-borne articulated arm.

[0149] In accordance with one or more aspects of the present disclosure the controller is communicably connected to the drive section and configured so that in response to detection of entry of a collaborative object, due at least in part to motion of at least the portion of the articulated arm portions, into the electromagnetic affection envelope, the controller commands a change in at least one predetermined characteristic of arm motion.

[0150] In accordance with one or more aspects of the present disclosure a robotic transport system comprises:

[0151] a cart-borne articulated arm having:

[0152] a frame;

[0153] a drive section connected to the frame;

[0154] articulated arm portions operably coupled to the drive section providing the cart-borne articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm portions in a collaborative space, corresponding to a selectably variable cart location of the cart-borne articulated arm, from a first location, in which the cart-borne articulated arm has a first shape, to another different location of at least the portion of the articulated arm portions in the collaborative space in which the cart-borne articulated arm has another different shape;

[0155] an electromagnetic zone, generated sounding by electromagnetic emitters, borne by the cart-borne articulated arm configured to cover a predetermined volume of the collaborative space so that a collaborative object in the predetermined volume is detected with a sensor cooperative with the electromagnetic emitters, and an electromagnetic affection envelope, generated by the electromagnetic emitters so that the electromagnetic affection envelope is defined by the cart-borne articulated arm and is close coupled and substantially conformal to at least a dynamic contour part of each different arm shape of the cart-borne articulated arm with one or more of at least the portion of the cart-borne articulated arm moving from the first location to the other different location, and the cart-borne articulated arm changing shape from the first shape to the other different shape; and

[0156] a controller communicably connected to the sensor to detect presence of the collaborative object in the predetermined volume, and communicably connected with the electromagnetic emitters and configured SO as to dynamically form the electromagnetic affection envelope based on detection of the collaborative object presence.

[0157] In accordance with one or more aspects of the present disclosure the controller is communicably connected to the sensor, that is operative with the electromagnetic affection envelope, to detect entry of the collaborative object into the electromagnetic affection envelope, and the controller is communicably connected to the drive section and configured so that in response to detection of entry of the collaborative object into the electromagnetic affection envelope, the controller commands a change in at least one predetermined characteristic of the arm motion.

[0158] In accordance with one or more aspects of the present disclosure the controller dynamically forms bounds of the electromagnetic affection envelope based on detection of the collaborative object presence.

[0159] In accordance with one or more aspects of the present disclosure the controller dynamically changes the form of the bounds of the electromagnetic affection envelope based on detection of the collaborative object presence.

[0160] In accordance with one or more aspects of the present disclosure the controller is communicably connected to the sensor that is operative with the electromagnetic sounding zone and the controller is configured to register a change in the presence of the collaborative object in the sounding zone, and in response to the registered change dynamically alter a form of the electromagnetic affection envelope.

[0161] In accordance with one or more aspects of the present disclosure the controller changes the form of the electromagnetic affection envelope based on a direction defined by the registered change in presence as related to a direction of motion or planned direction of motion of the at least the portion of the articulated arm portions moving.

[0162] In accordance with one or more aspects of the present disclosure the emitters and sensor are common to and operative with both the electromagnetic sounding zone and the electromagnetic affection envelope and the controller is configured to selectably switch between generation of the electromagnetic sounding zone and generation of the electromagnetic affection envelope.

[0163] In accordance with one or more aspects of the present disclosure the controller is configured to selectably generate the electromagnetic sounding So zone to map topology as characteristics of the predetermined volume associated with planning a move of the cart-borne articu-

lated arm moving at least the portion of the articulated arm portions to or from at least one of the first location and the other different location.

[0164] In accordance with one or more aspects of the present disclosure mapping data defines a basis for trajectory planning of at least the portion of the articulated arm portions moving.

[0165] It should be understood that the foregoing description is only illustrative of the aspects of the present disclosure. Various alternatives and modifications can be devised by those skilled in the art without departing from the aspects of the present disclosure. Accordingly, the aspects of the present disclosure are intended to embrace all such alternatives, modifications and variances that fall within the scope of any claims appended hereto. Further, the mere fact that different mutually different dependent or features are recited in independent claims does not indicate that a combination of these features cannot be advantageously used, such a combination remaining within the scope of the aspects of the present disclosure.

What is claimed is:

1. A robotic transport system comprising:
a carriage-borne articulated arm having;
a frame;

a drive section connected to the frame;

articulated arm portions operably coupled to the drive section providing the carriage-borne articulated arm with arm motion in at least one axis of motion moving at least a portion of the articulated arm portions in a collaborative space, corresponding to a selectably variable carriage location of the carriage-borne articulated arm, from a first location, to another different location of at least the portion of the articulated arm portions in the collaborative space; and

an electromagnetic affection envelope, generated by electromagnetic emitters, borne by the carriage-borne articulated arm so that the electromagnetic affection envelope is defined by the carriage-borne articulated arm and is close coupled and substantially conformal to at least a dynamic contour portion of each different arm shape of the carriage-borne articulated arm with at least the portion of the articulated arm portions moving from the first location to the other different location.

* * * * *