


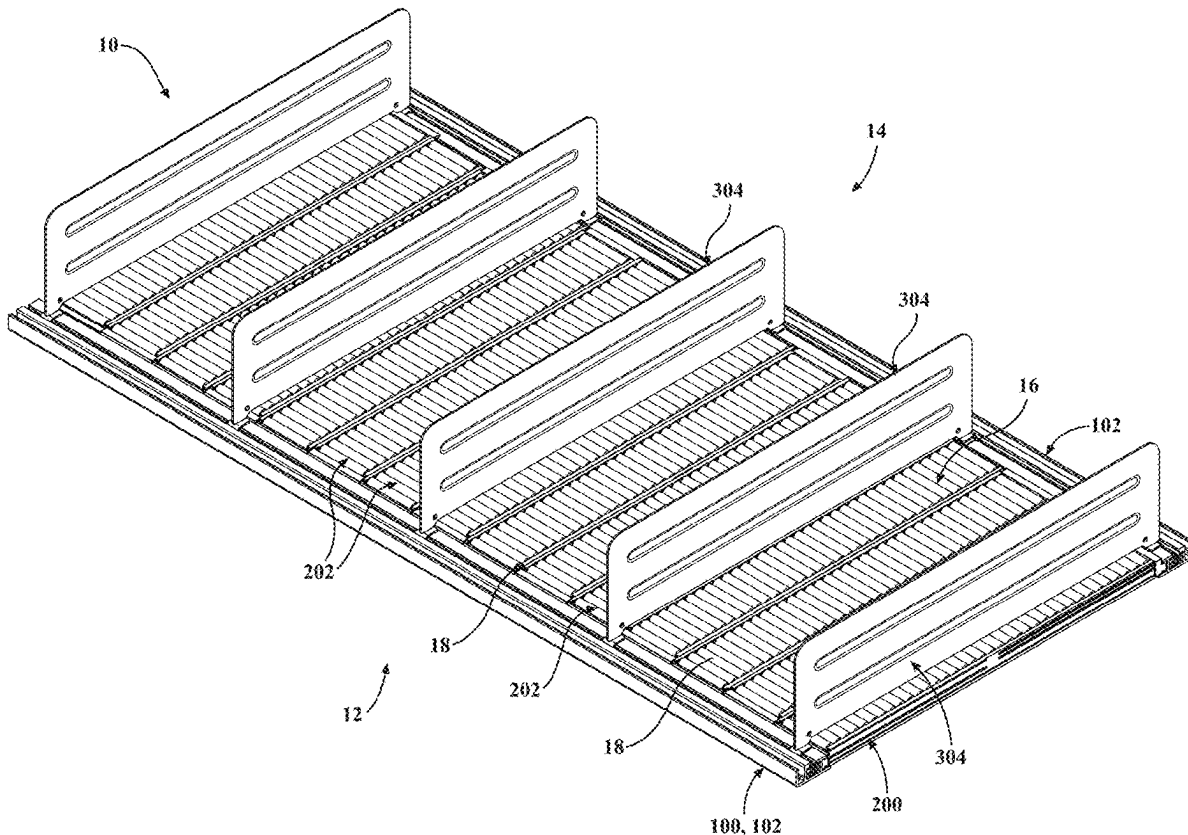

US 20250263243A1

(19) **United States**(12) **Patent Application Publication**
Mook et al.(10) **Pub. No.: US 2025/0263243 A1**(43) **Pub. Date: Aug. 21, 2025**(54) **SHELF WITH INTEGRATED ROLLER
SECUREMENT**(60) Provisional application No. 63/269,479, filed on Mar.
17, 2022.(71) Applicant: **Fasteners for Retail, Inc.**, Twinsburg,
OH (US)**Publication Classification**(72) Inventors: **Dean Mook**, Medina, OH (US);
William H. Walker, Fairlawn, OH
(US); **Keith C. Eden**, Rockford, IL
(US); **Ashok Kumara
Dyavarasegowda**, Bangalore (IN);
Shane Obitts, North Ridgeville, OH
(US)(51) **Int. Cl.**
B65G 21/20 (2006.01)
B65G 13/11 (2006.01)
B65G 39/12 (2006.01)
(52) **U.S. Cl.**
CPC **B65G 21/202** (2013.01); **B65G 13/11**
(2013.01); **B65G 39/12** (2013.01)(73) Assignee: **Fasteners for Retail, Inc.**, Twinsburg,
OH (US)(57) **ABSTRACT**(21) Appl. No.: **19/198,901**

A conveyor system includes one or more conveyor units each including a base extending from a first end to a second end and a first side attached to the base and having a (i) first side coupler including a first pair of ribs disposed adjacent to the first end of the base and spaced apart from each other by a first distance and (ii) a second side coupler including a second pair of ribs disposed adjacent to the second end of the base and spaced apart from each other by a second distance that is less than the first distance.

(22) Filed: **May 5, 2025****Related U.S. Application Data**(63) Continuation of application No. 18/184,844, filed on
Mar. 16, 2023, now Pat. No. 12,291,402.

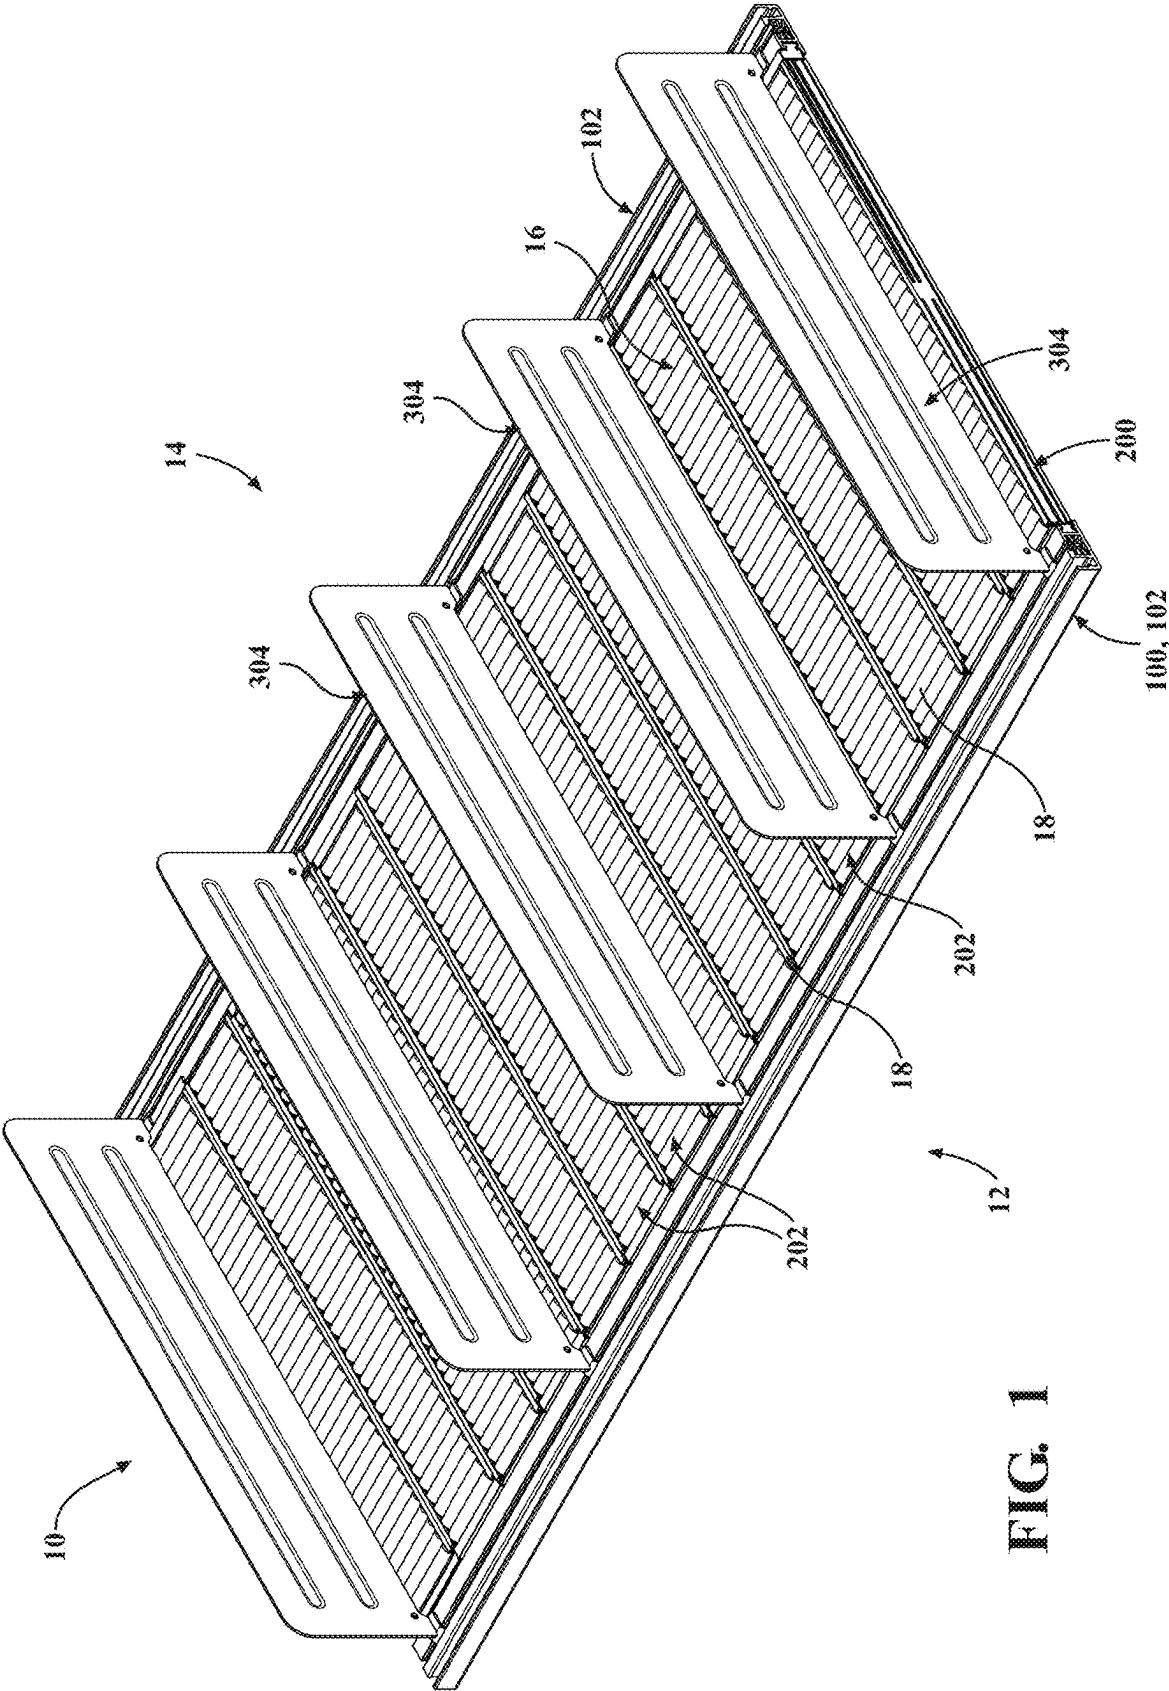


FIG. 1

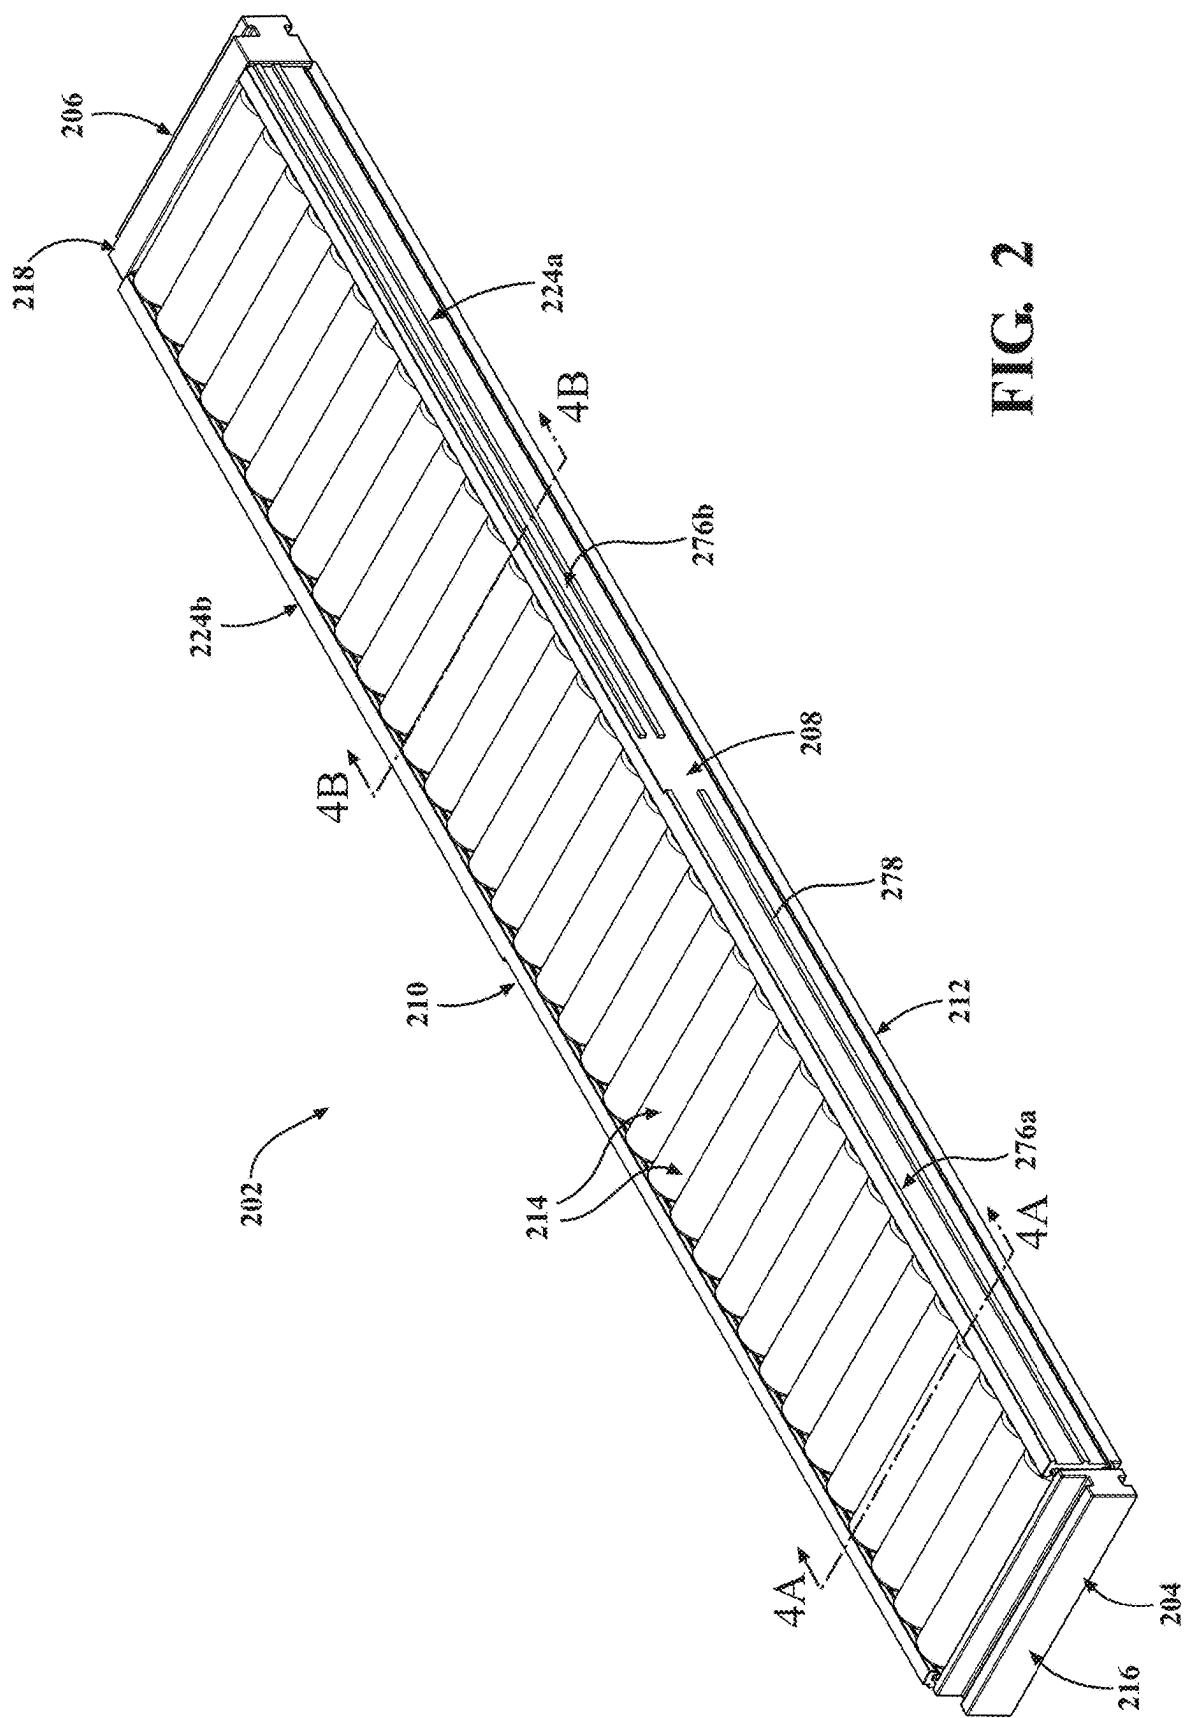
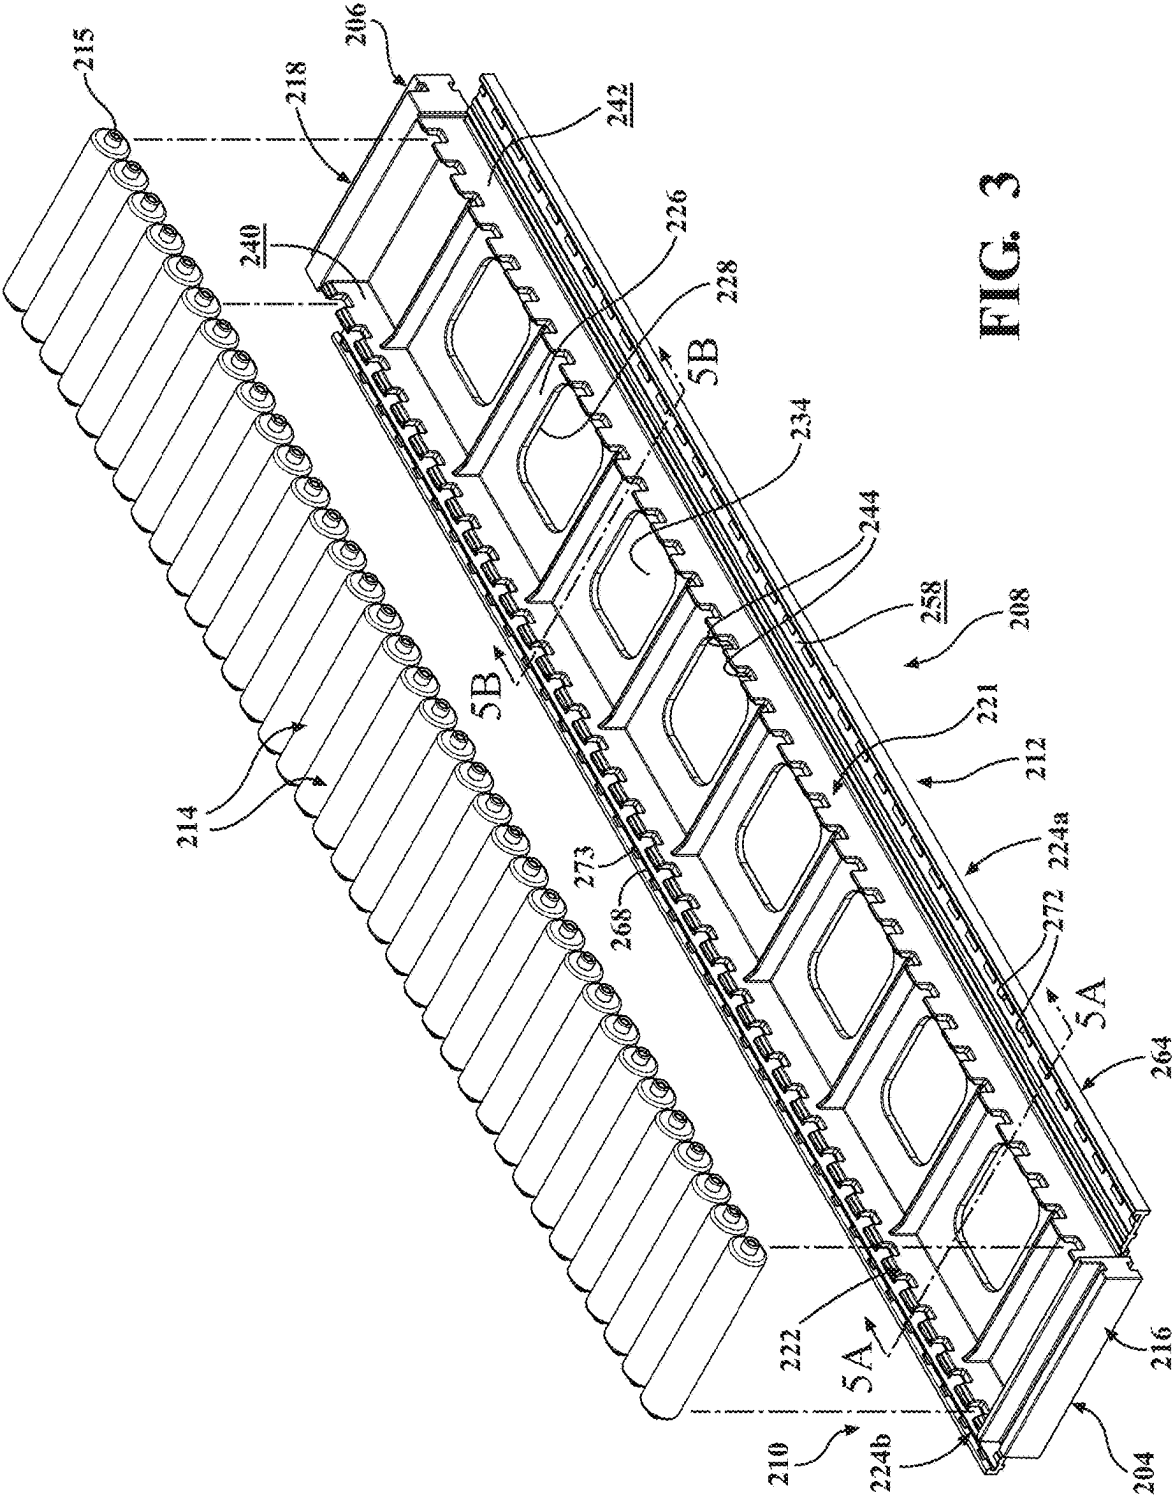
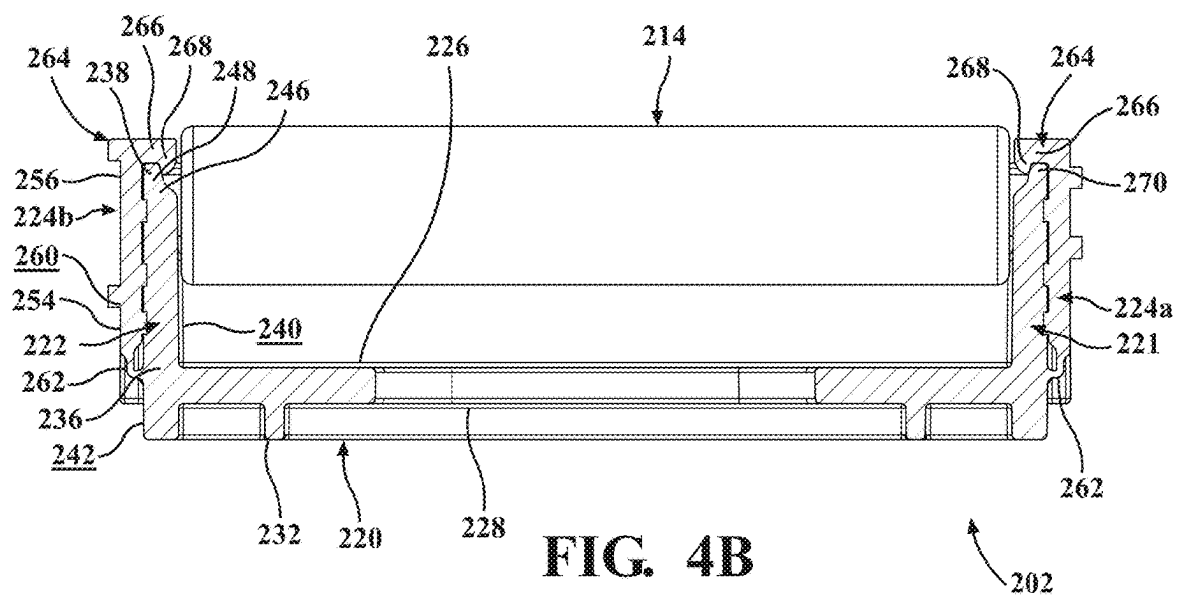
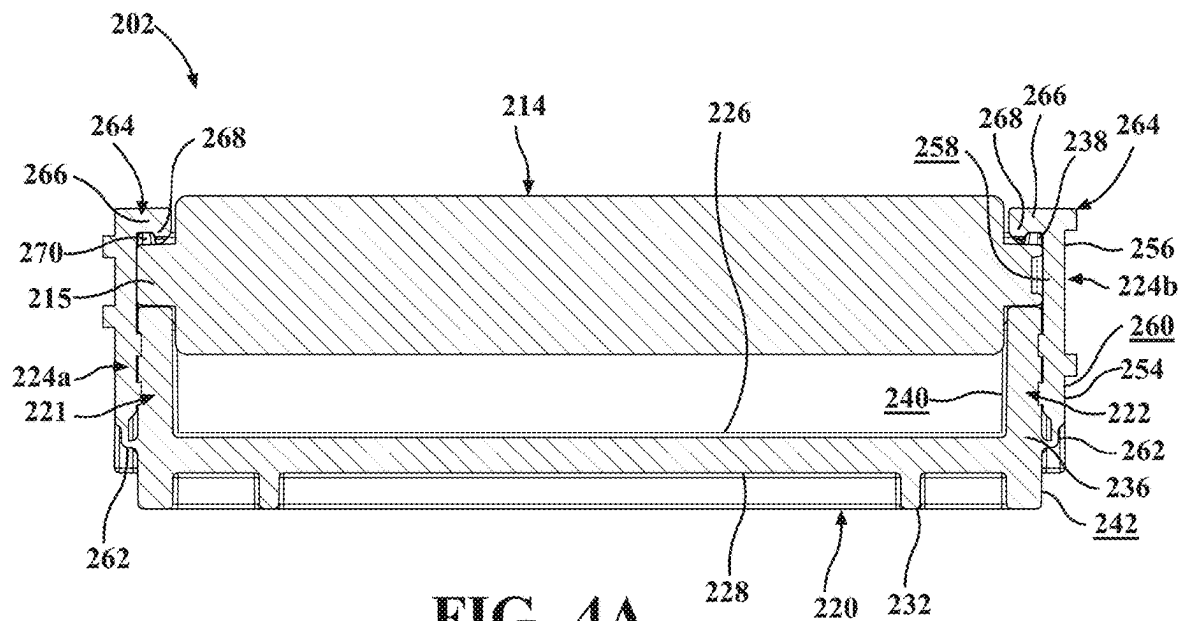


FIG. 2





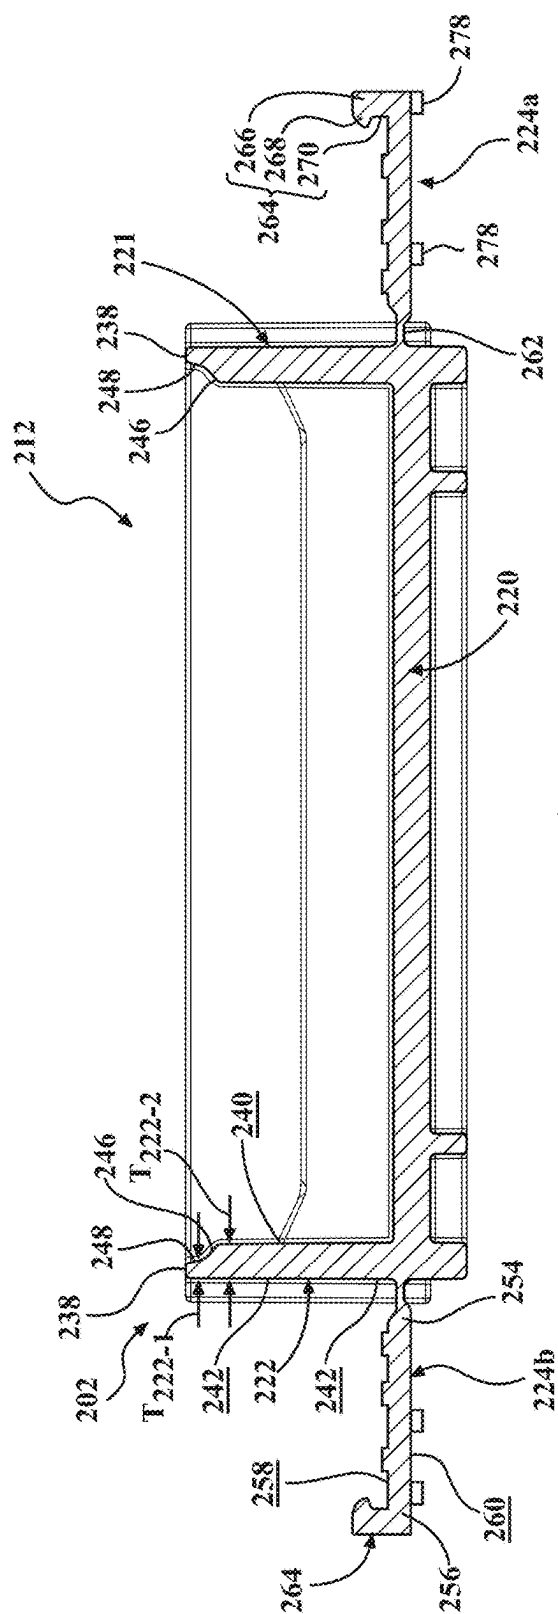


FIG. 5A

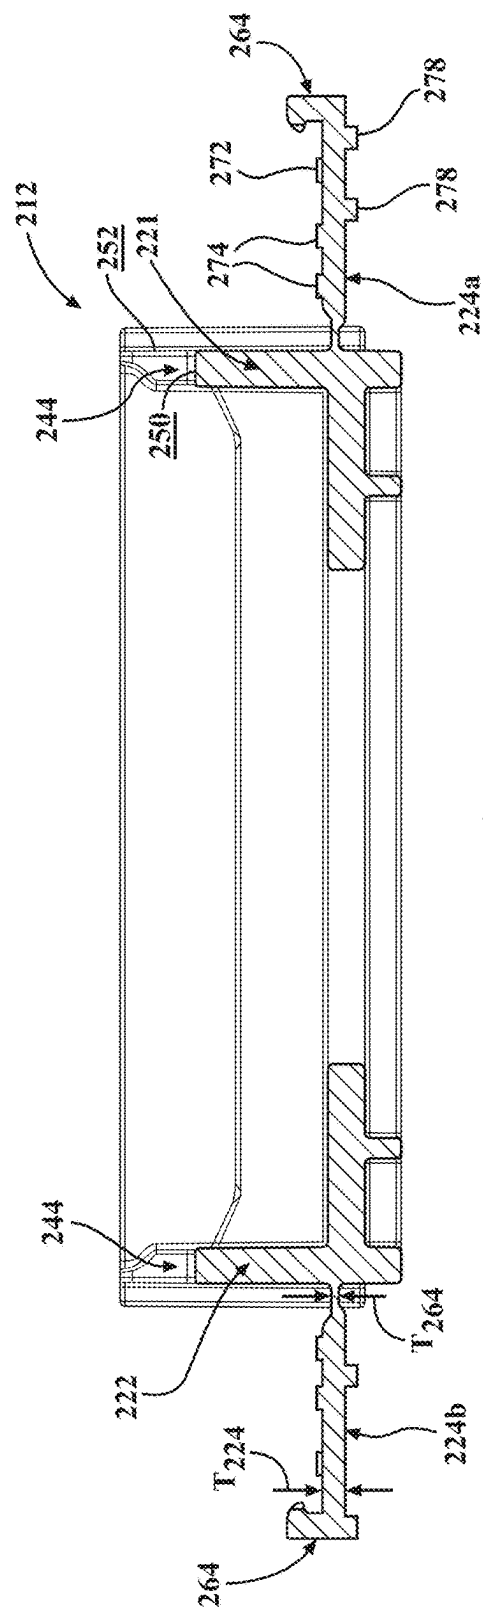
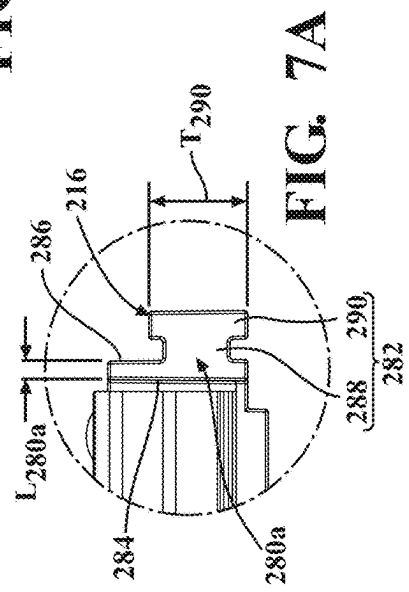
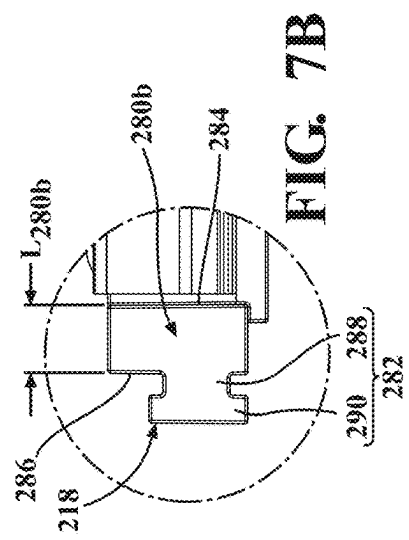
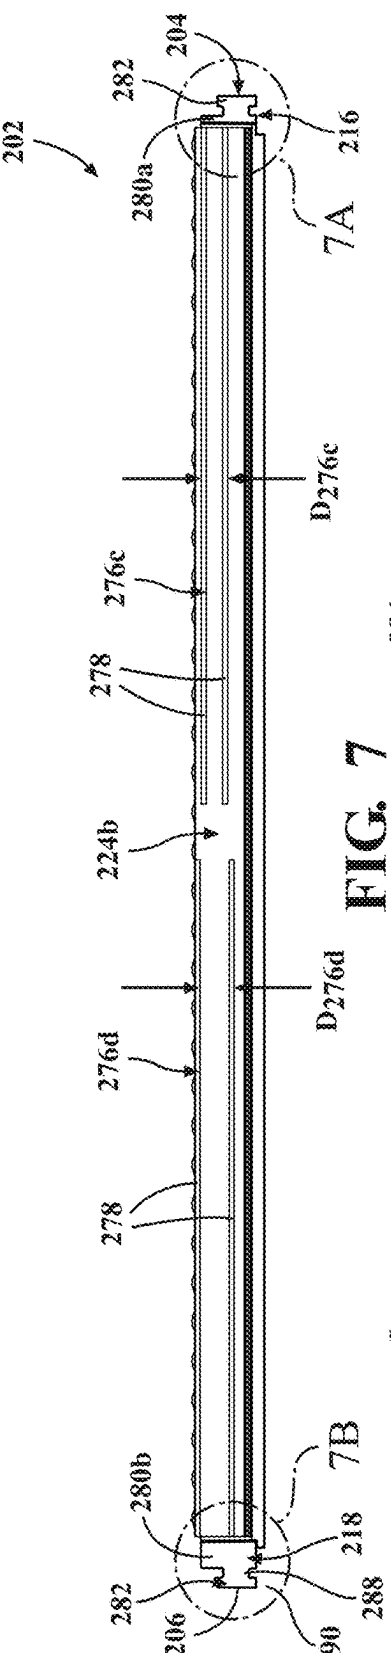
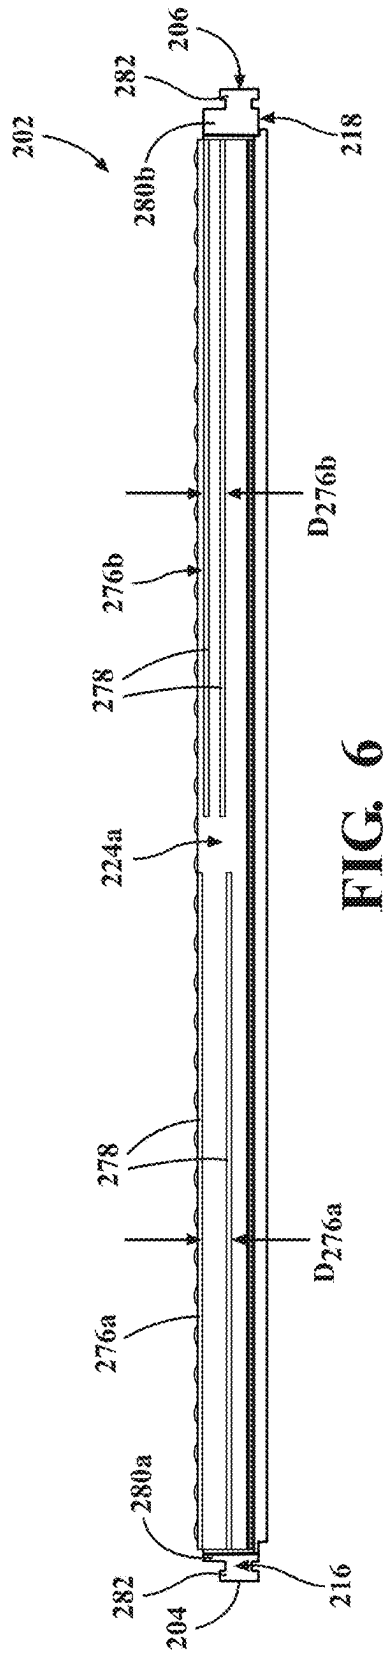


FIG. 5B



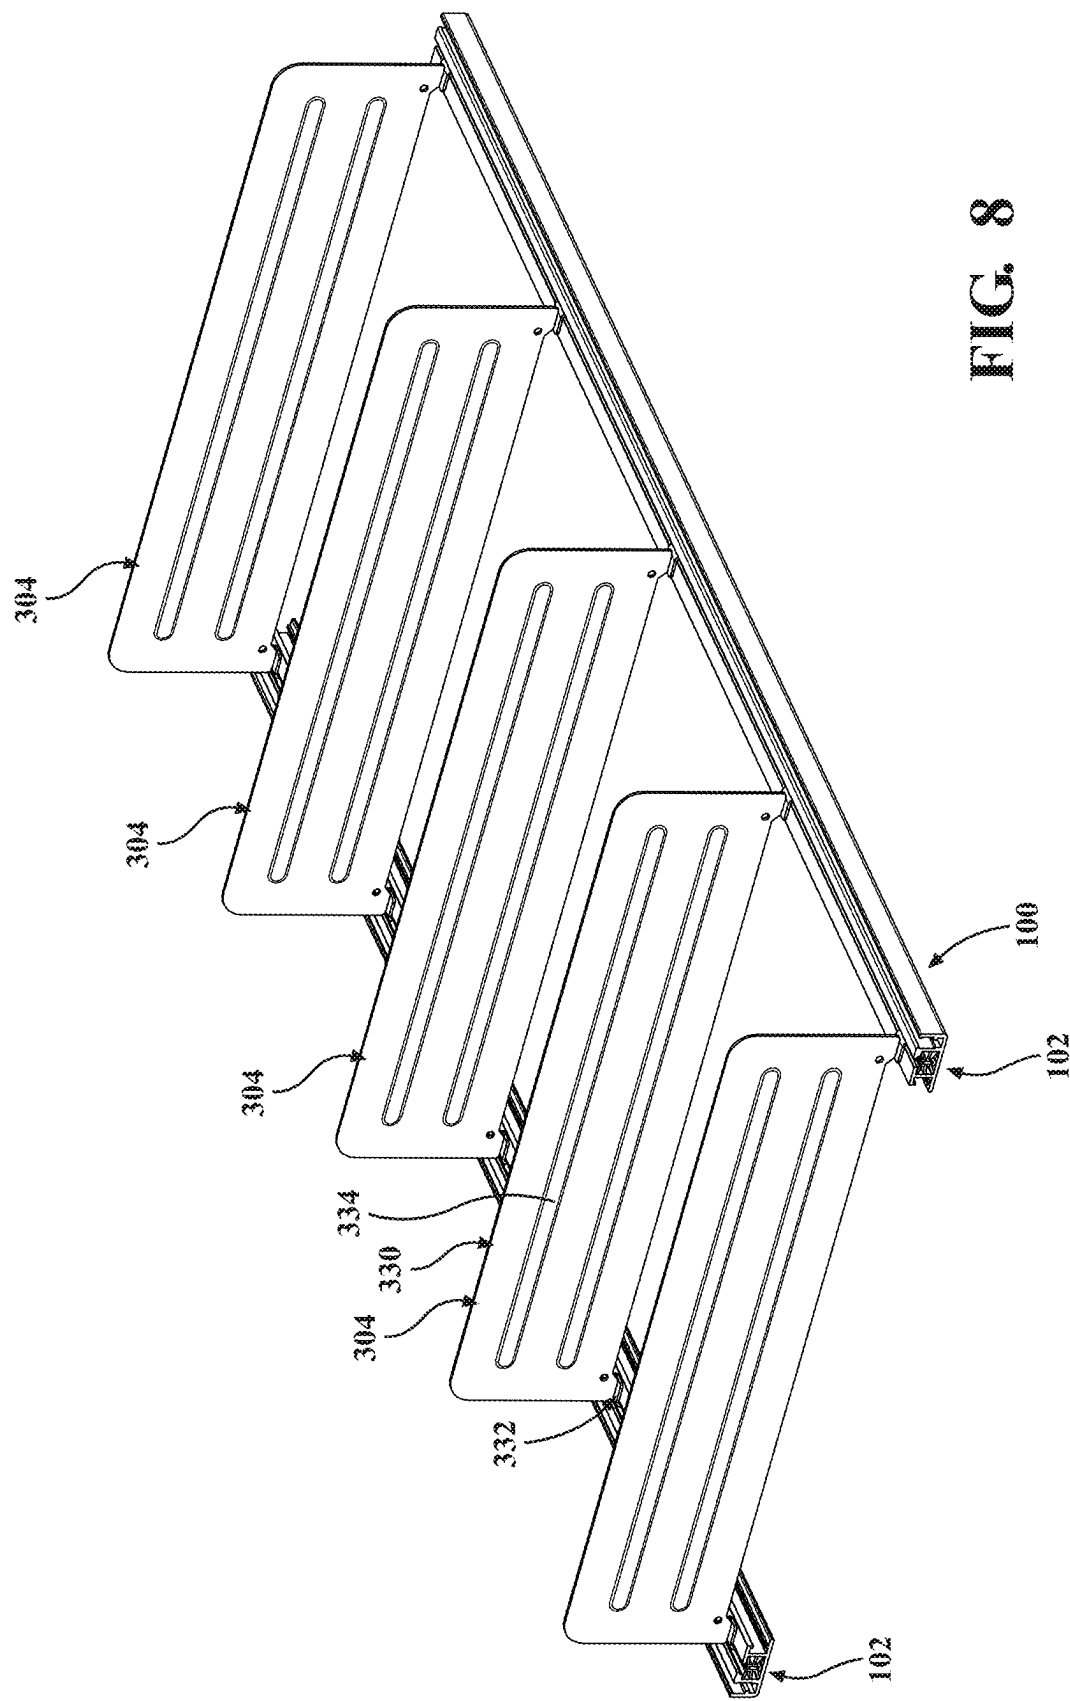


FIG. 8

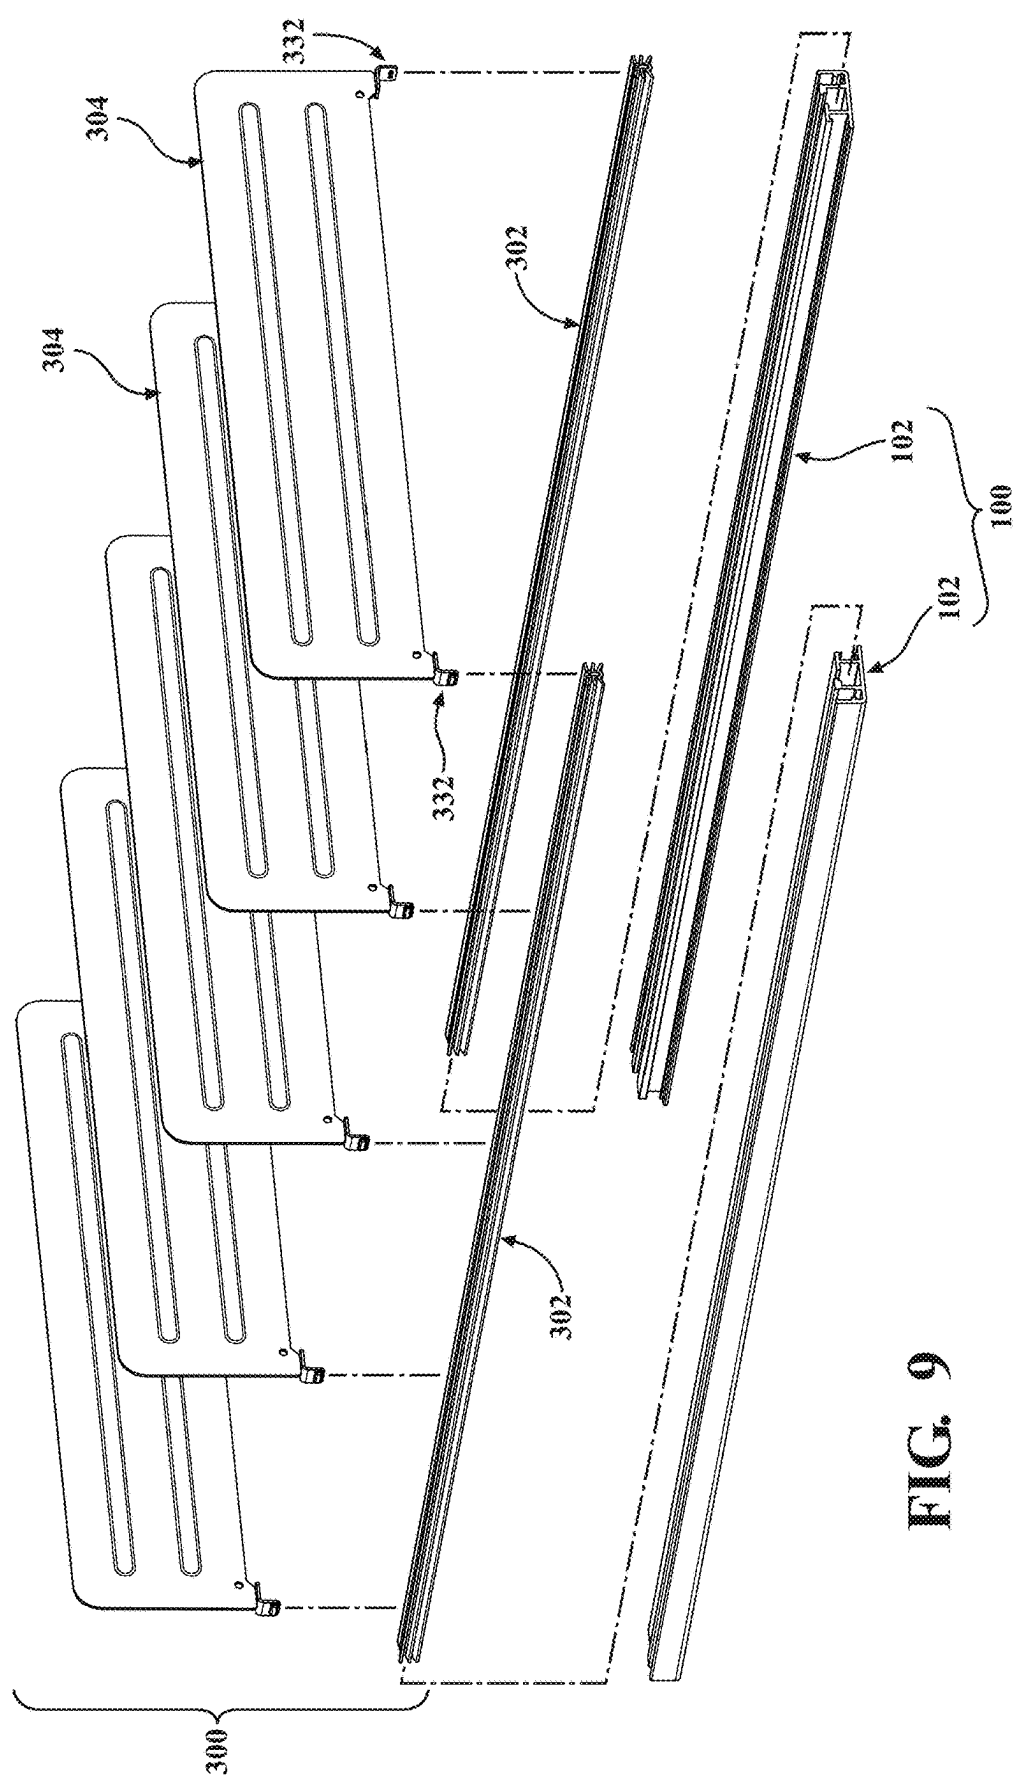
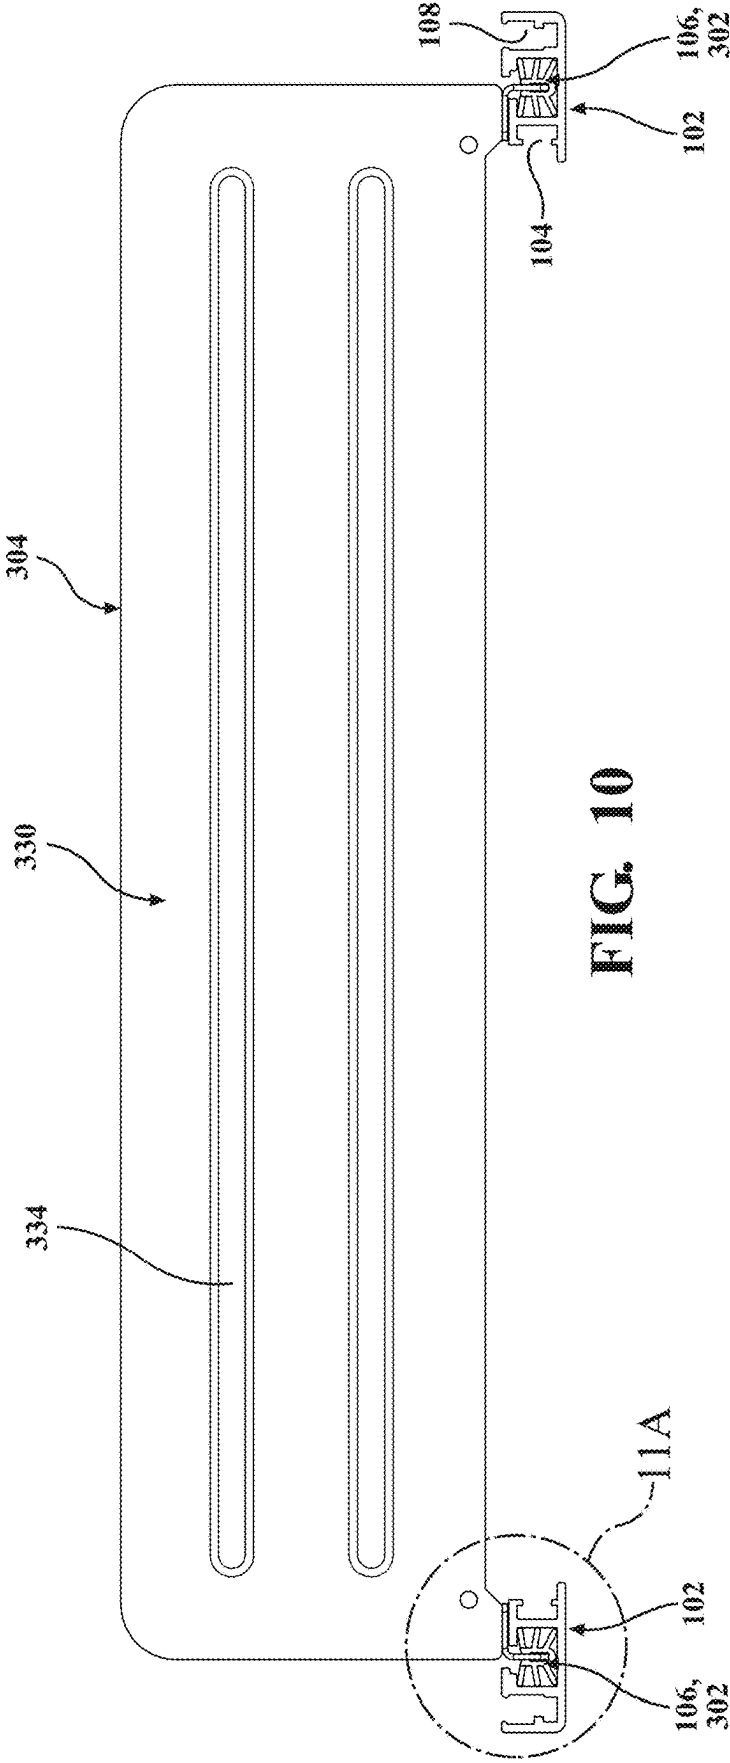
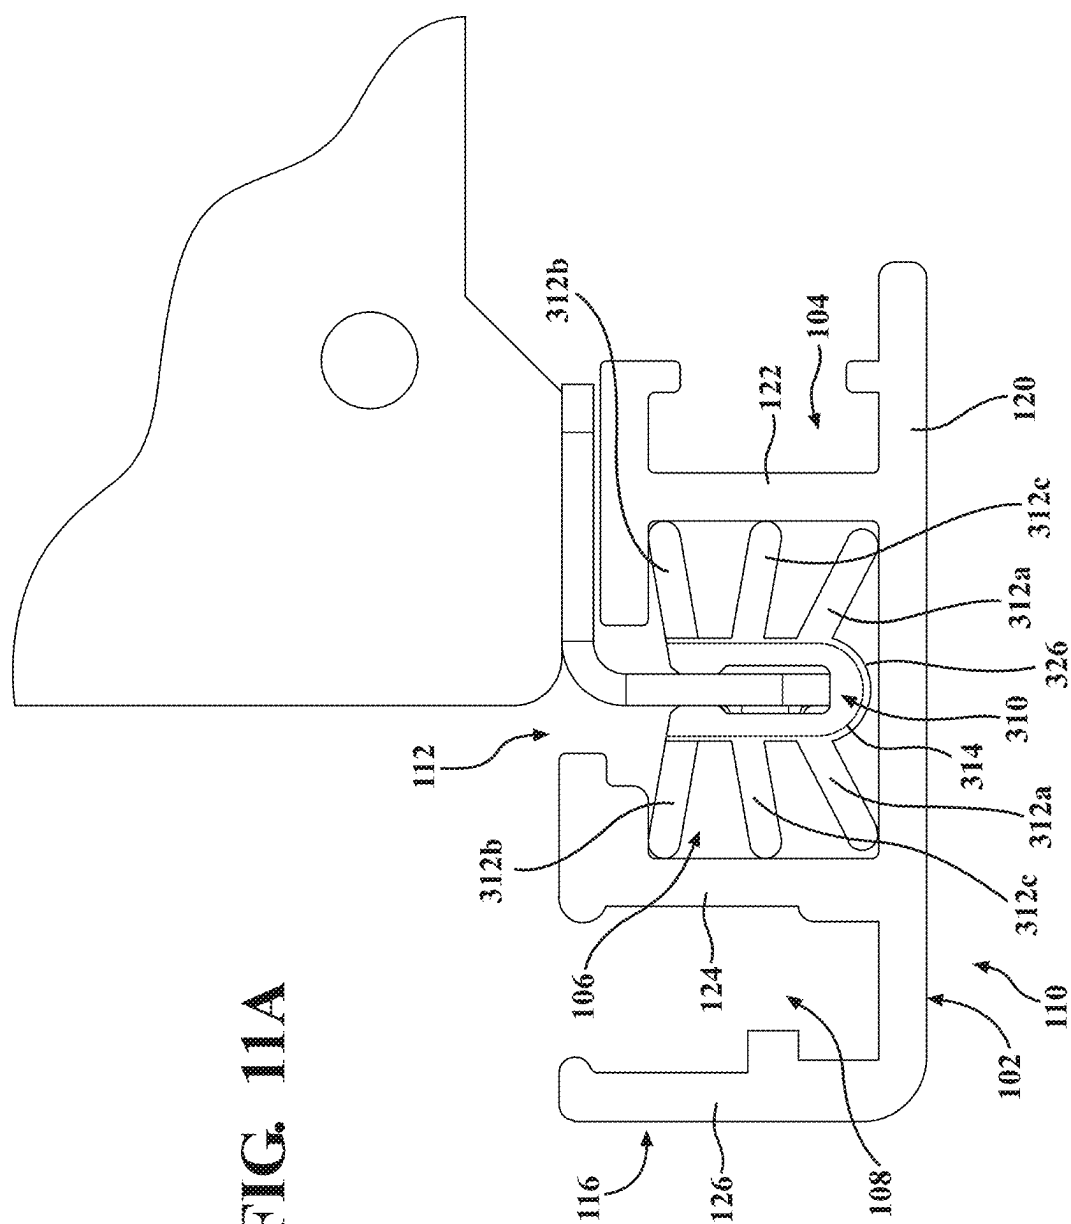
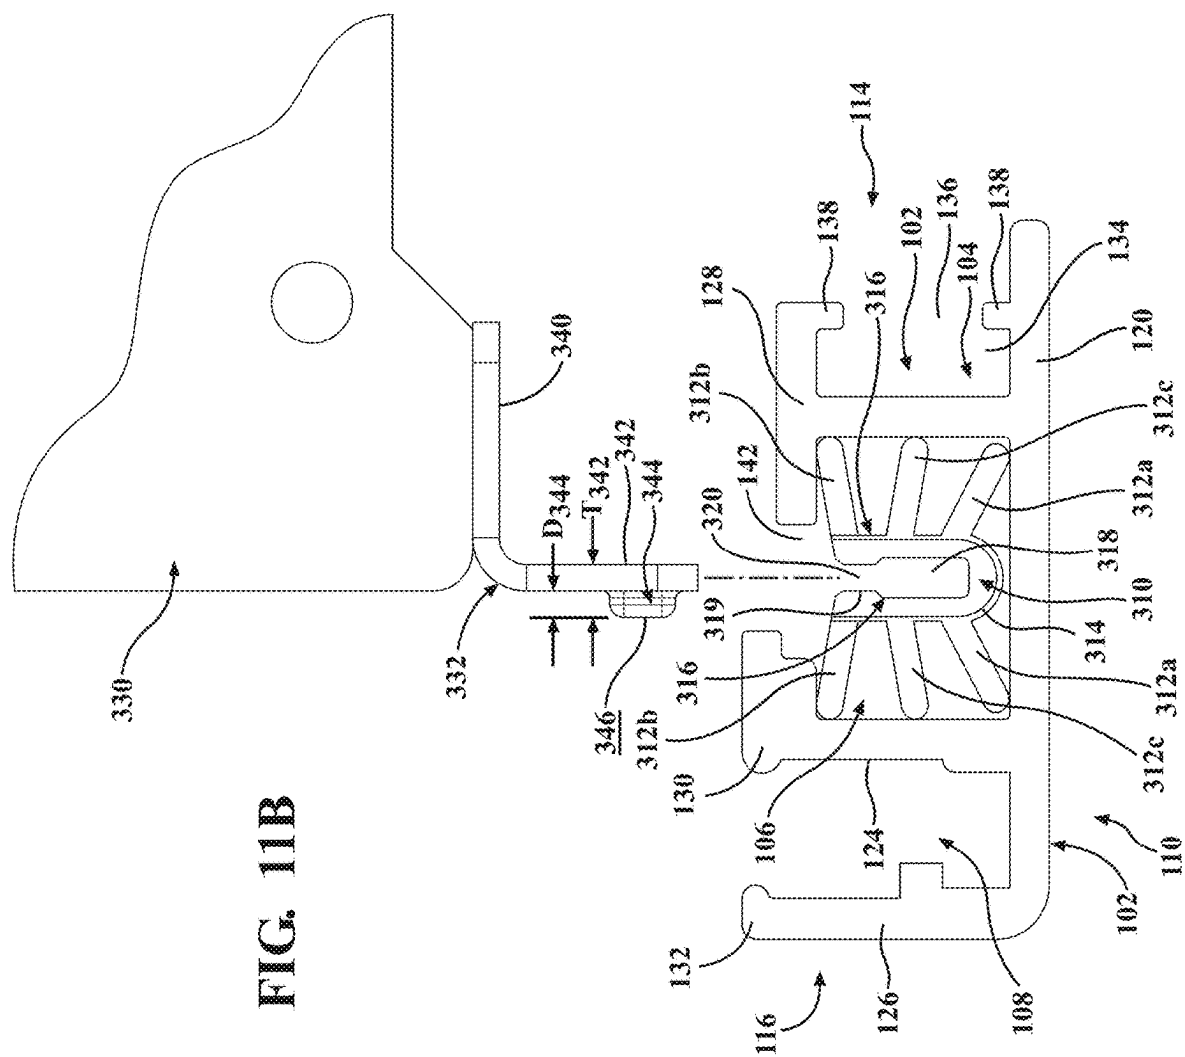


FIG. 9







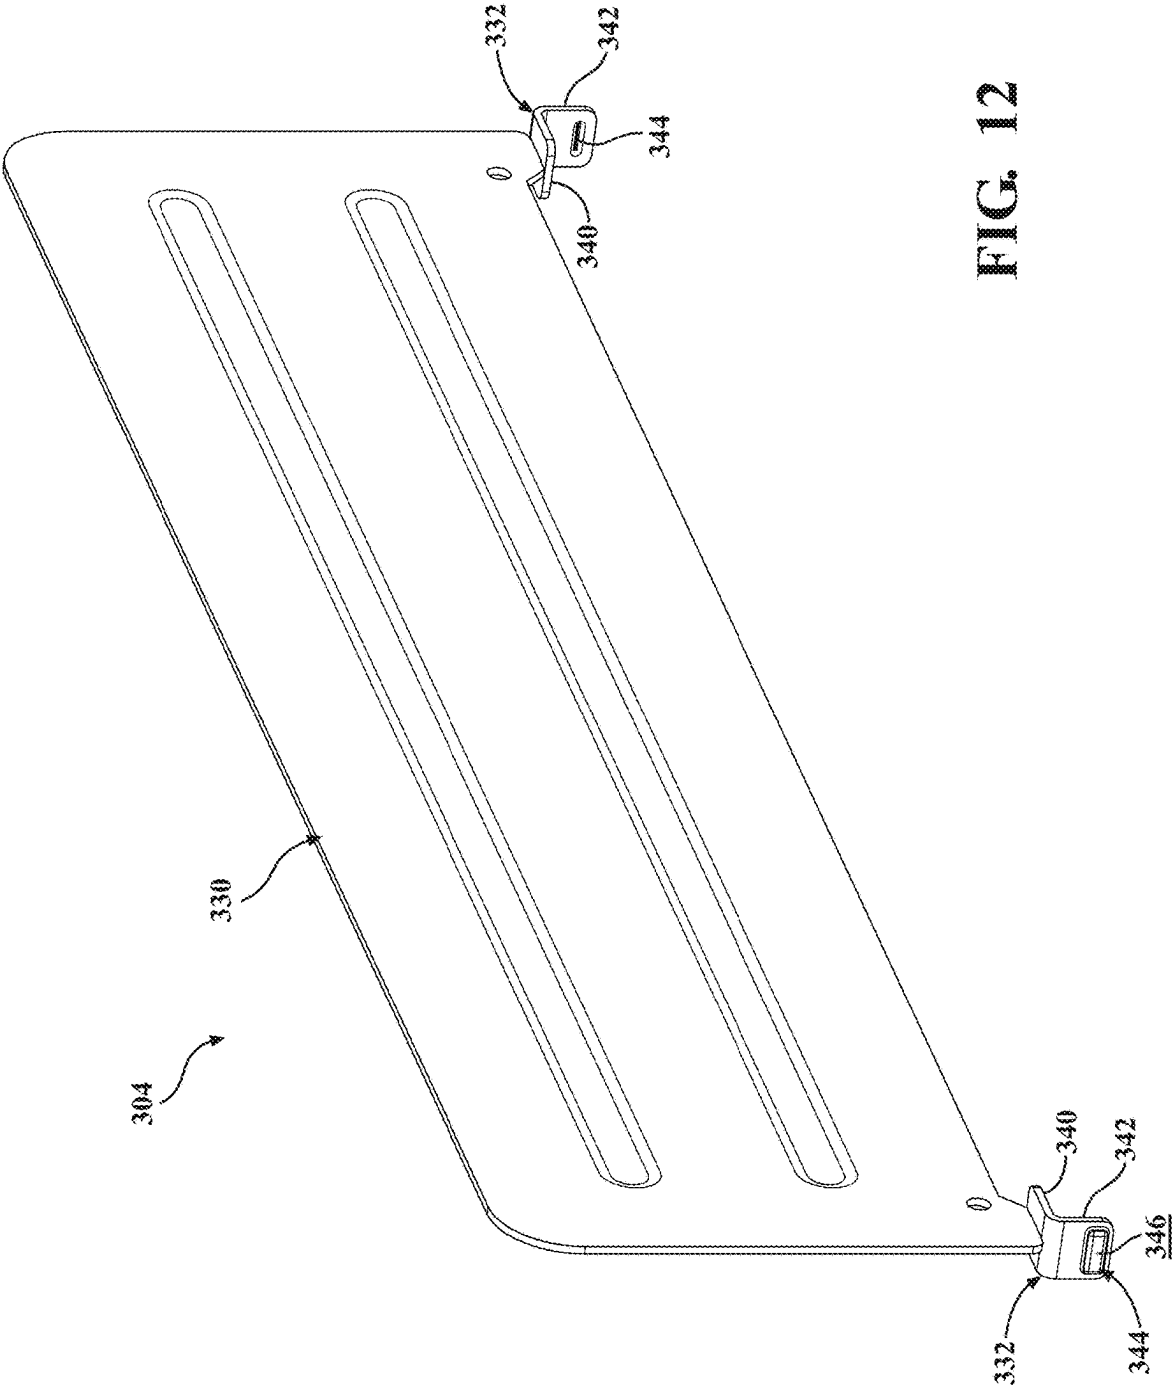
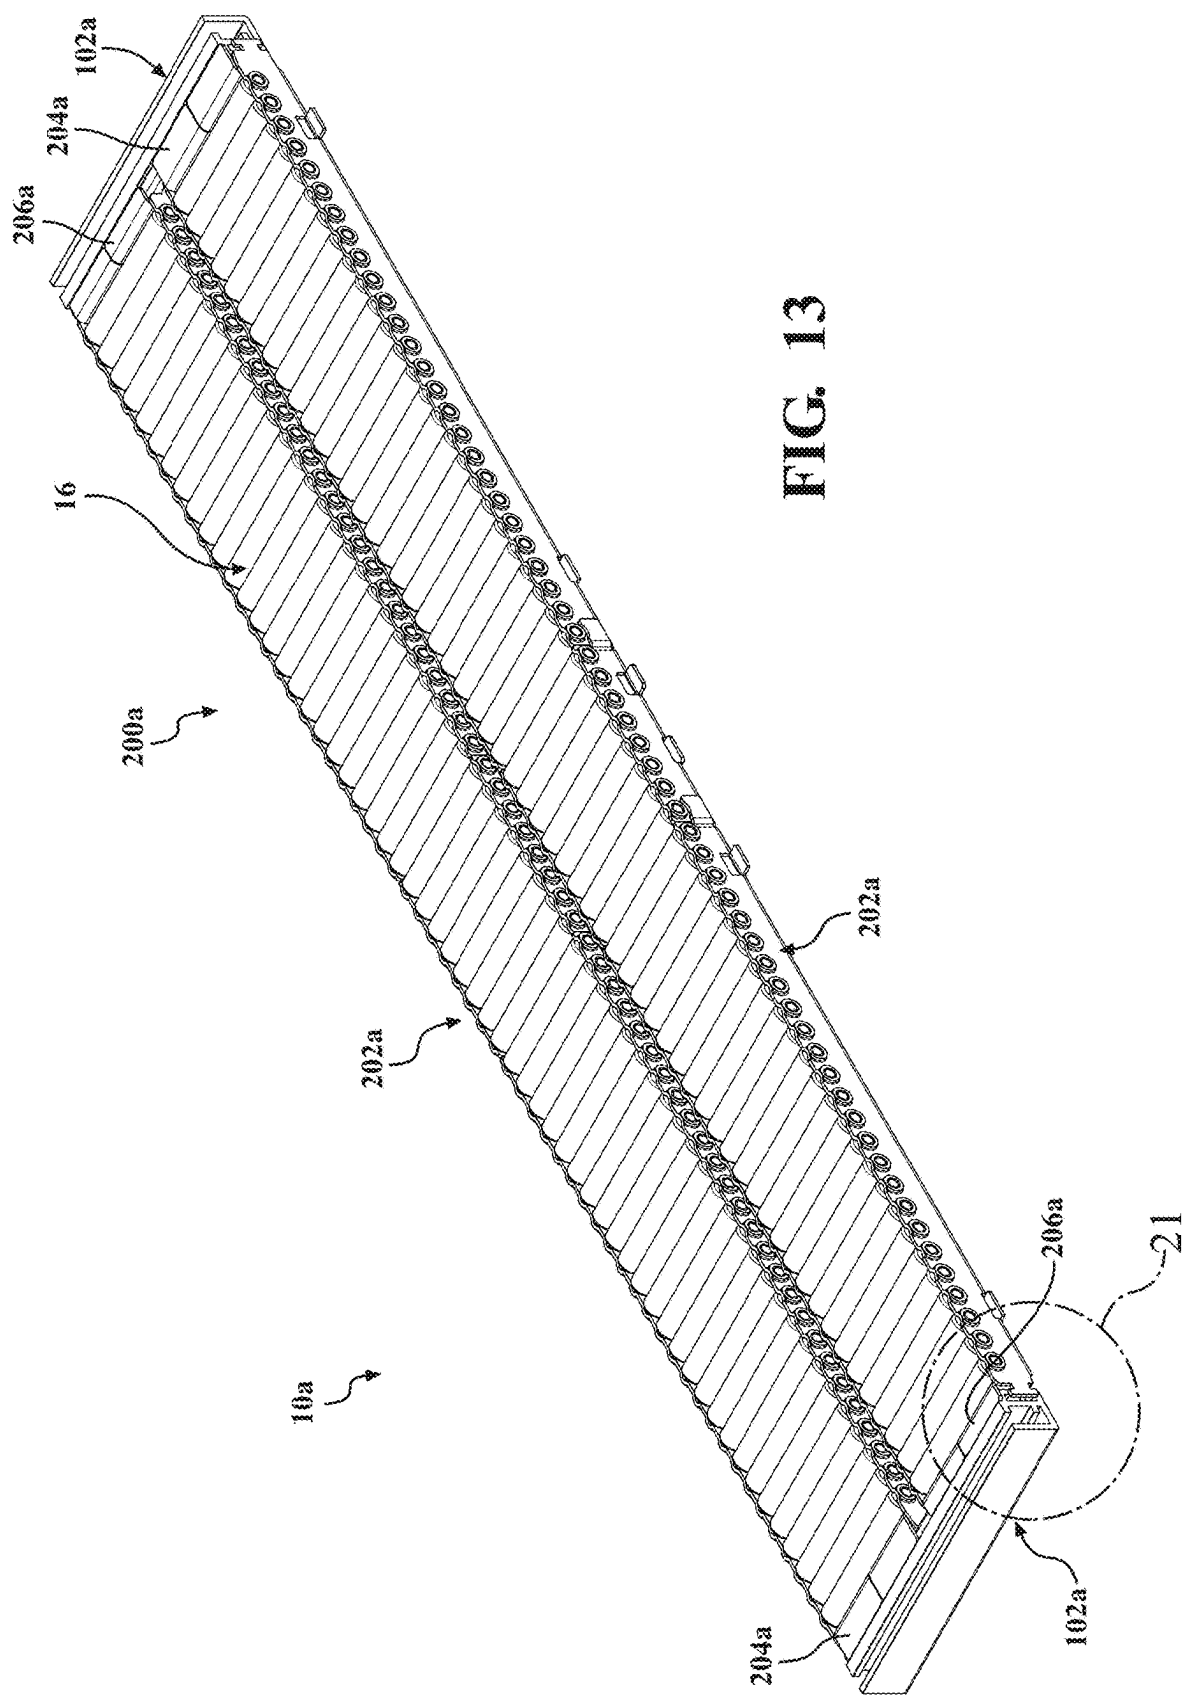
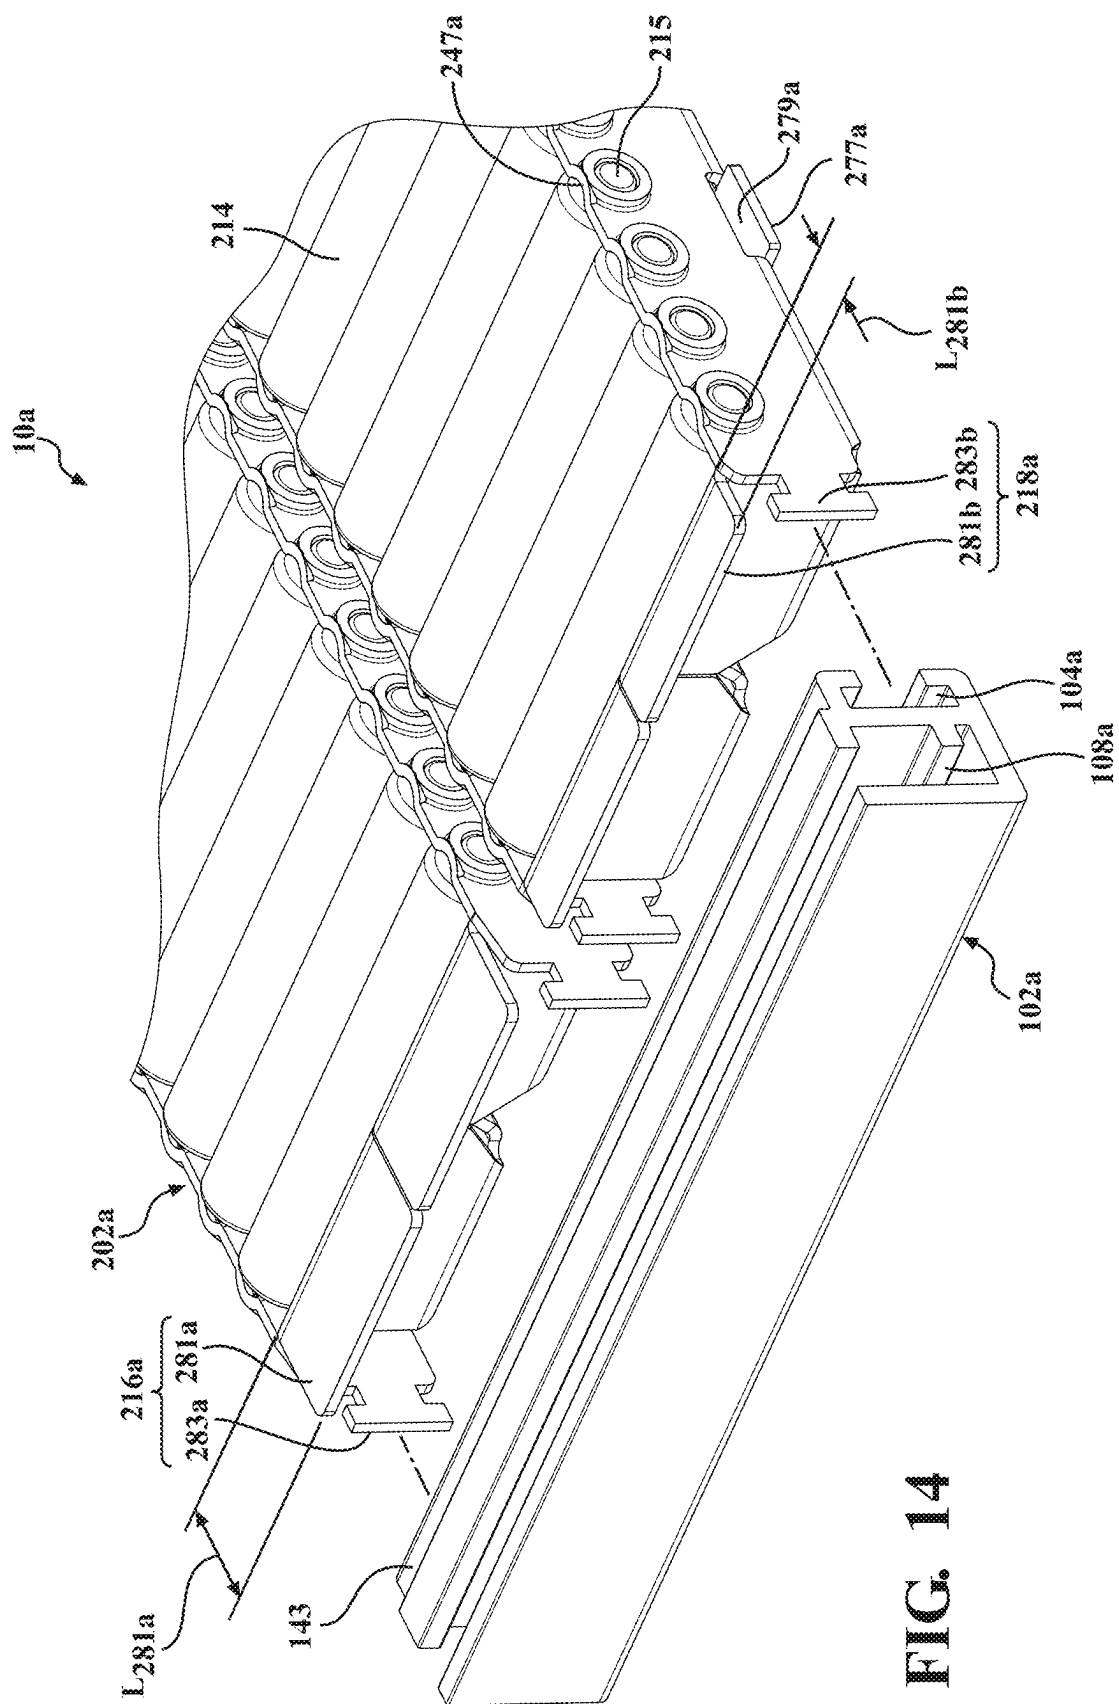
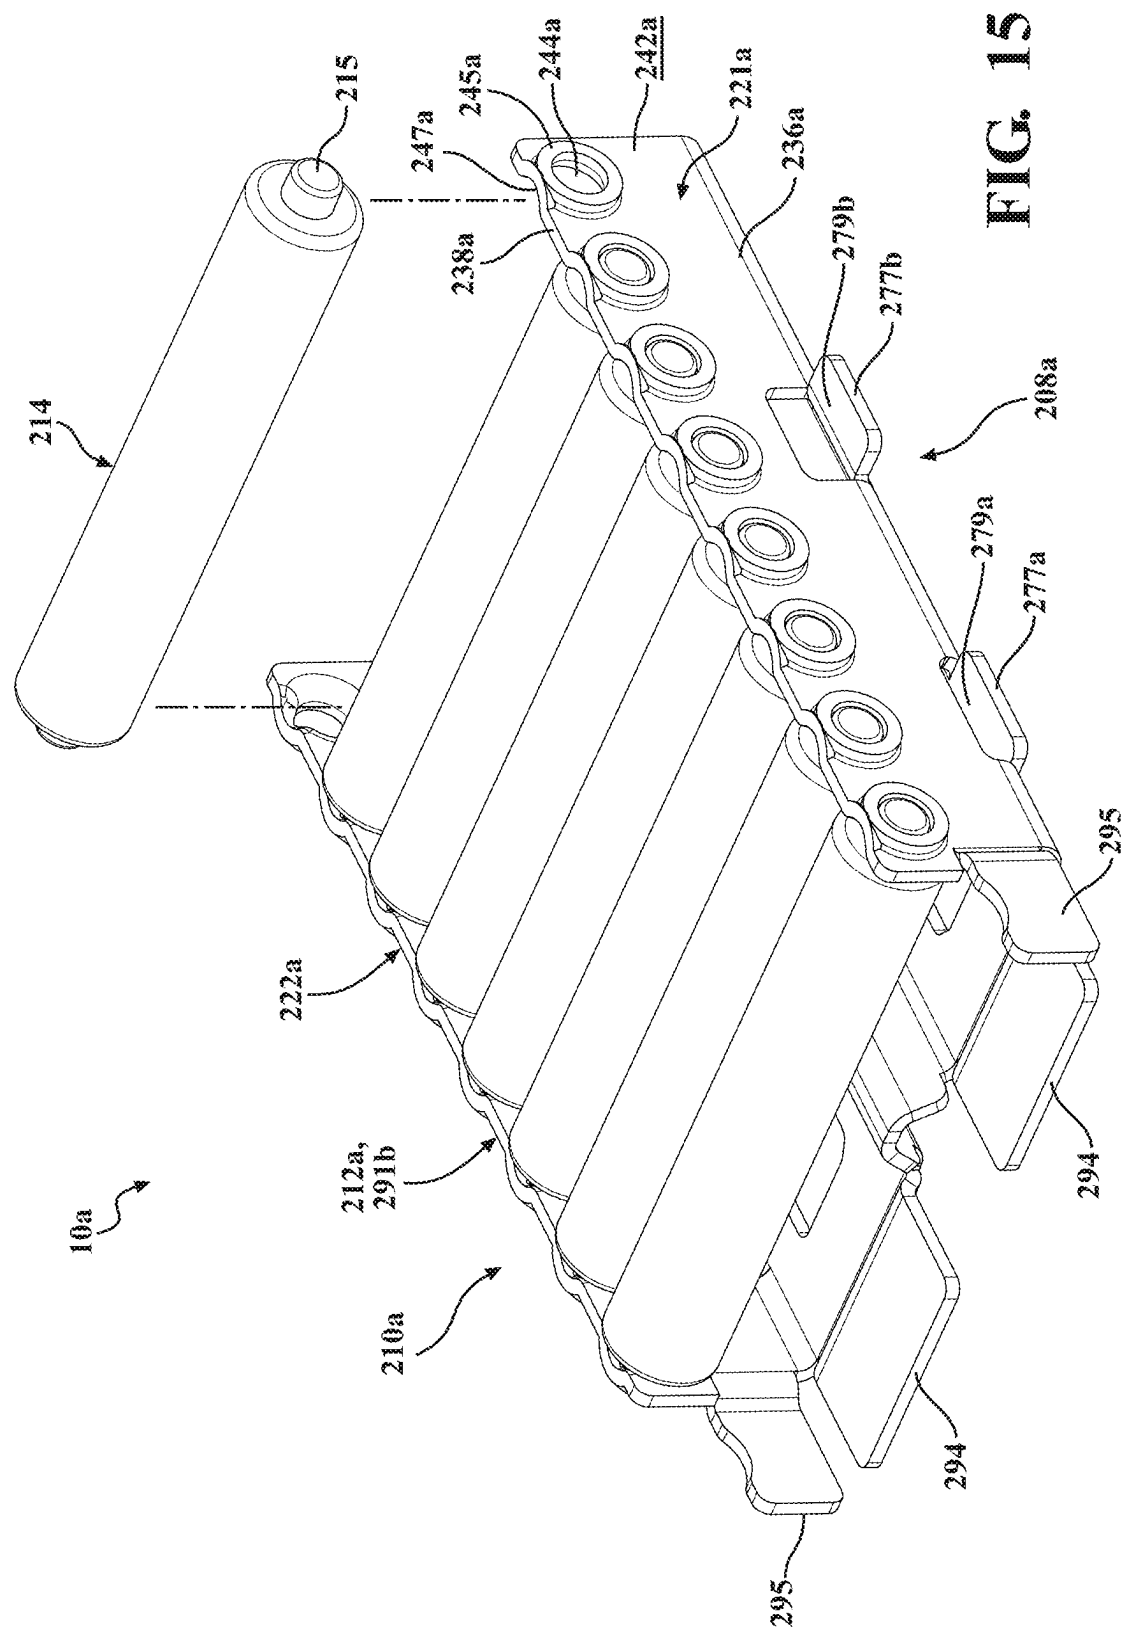


FIG. 12







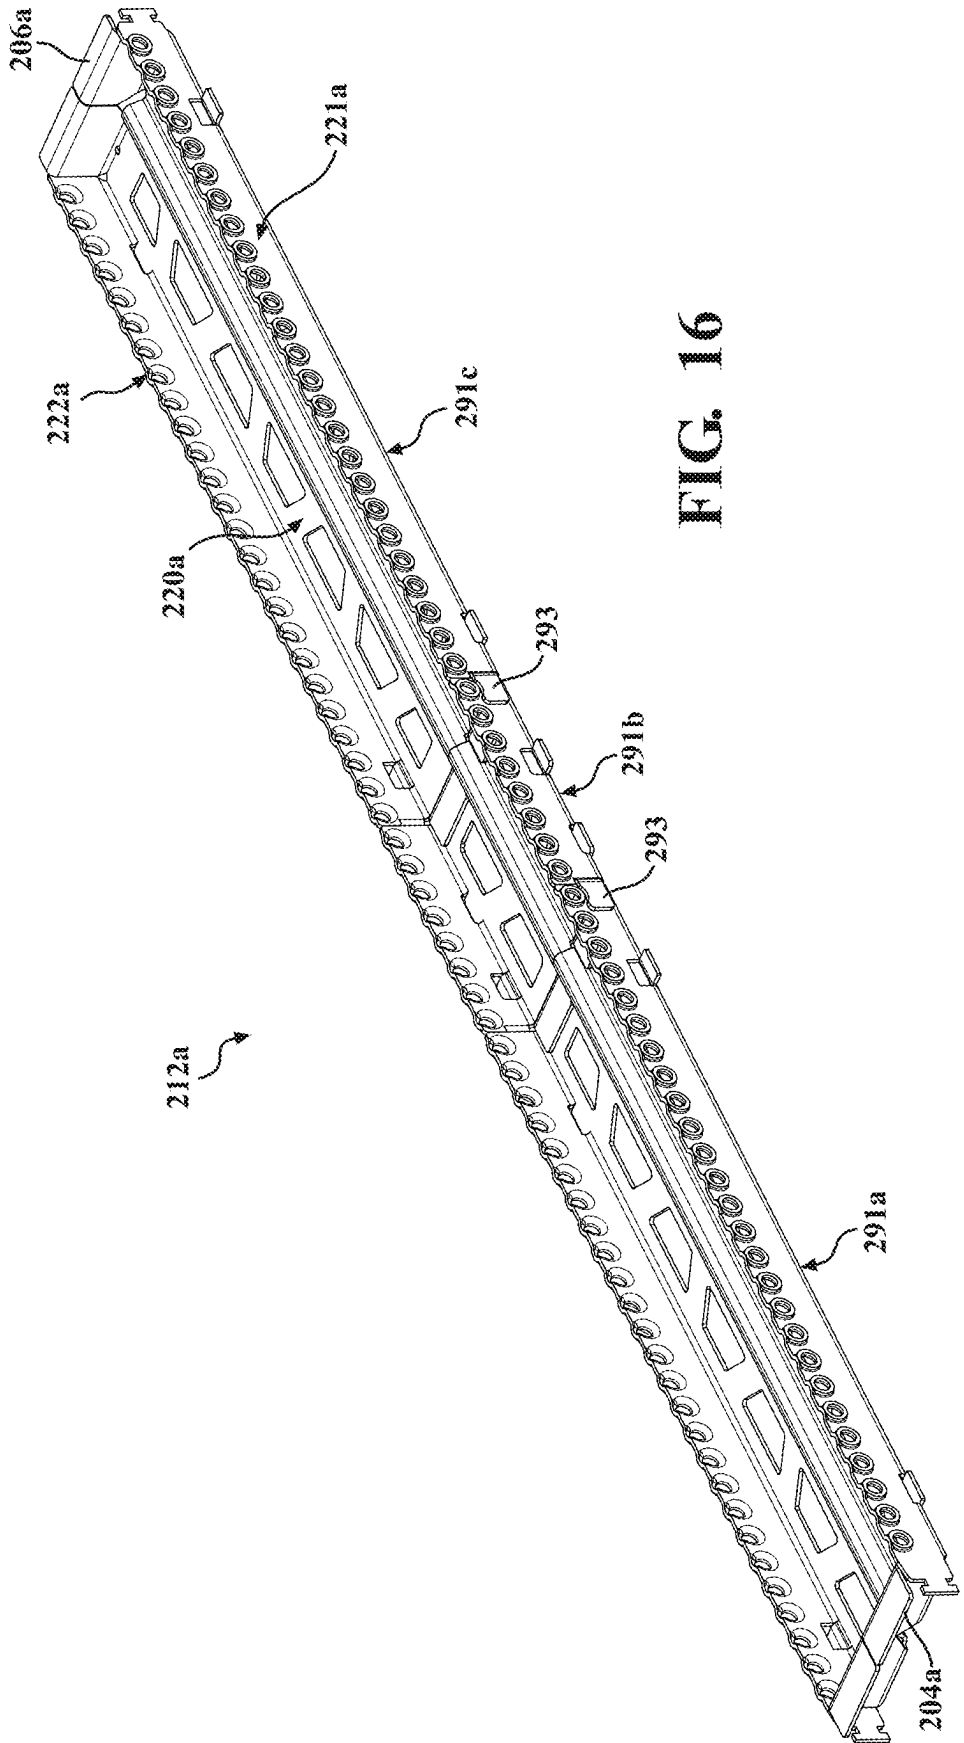


FIG. 16

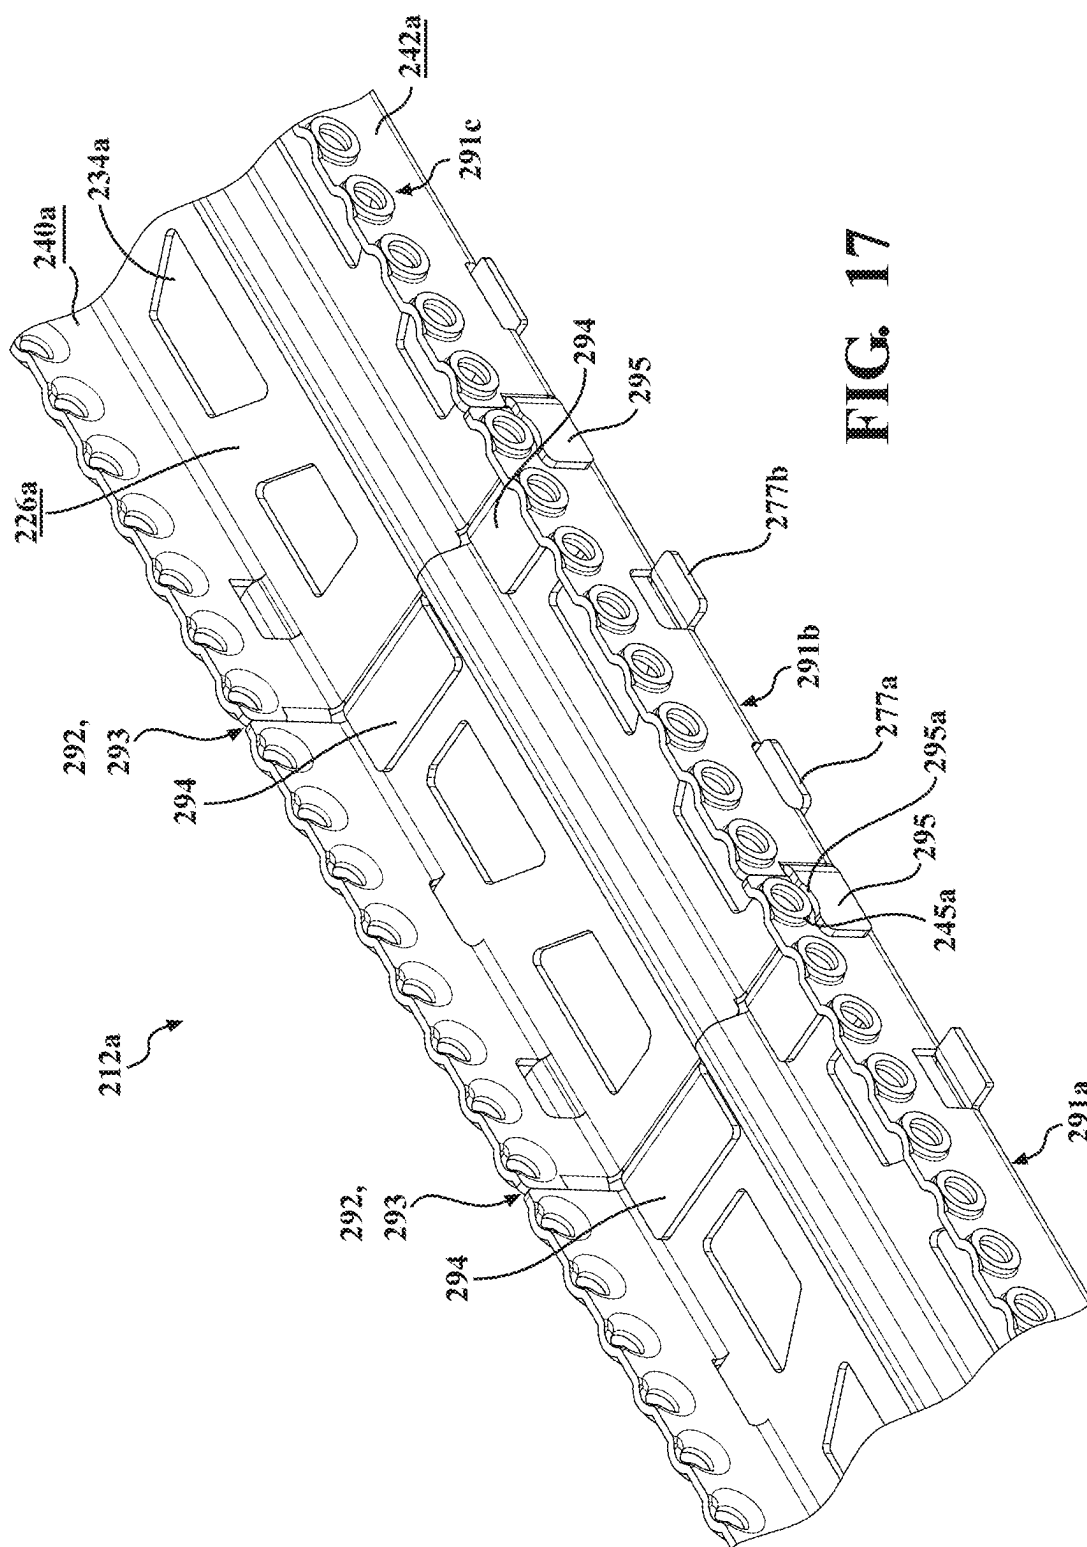
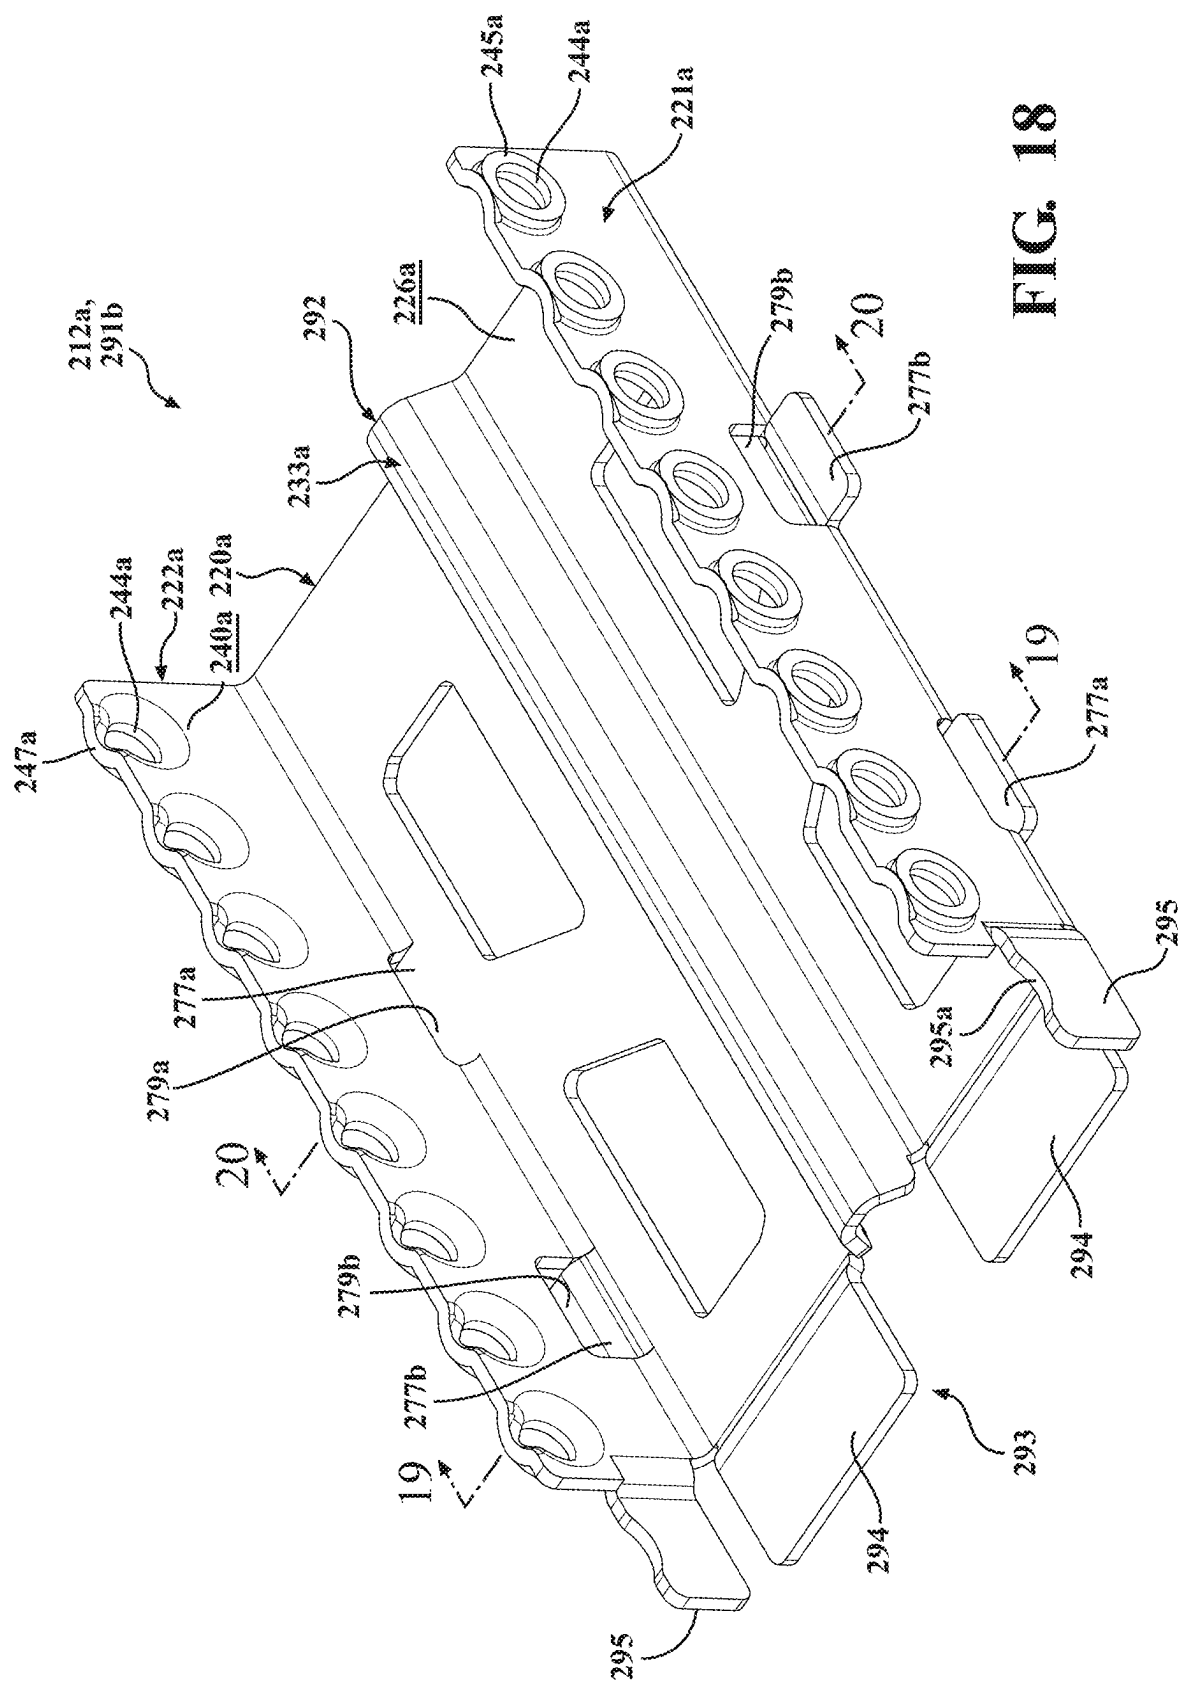
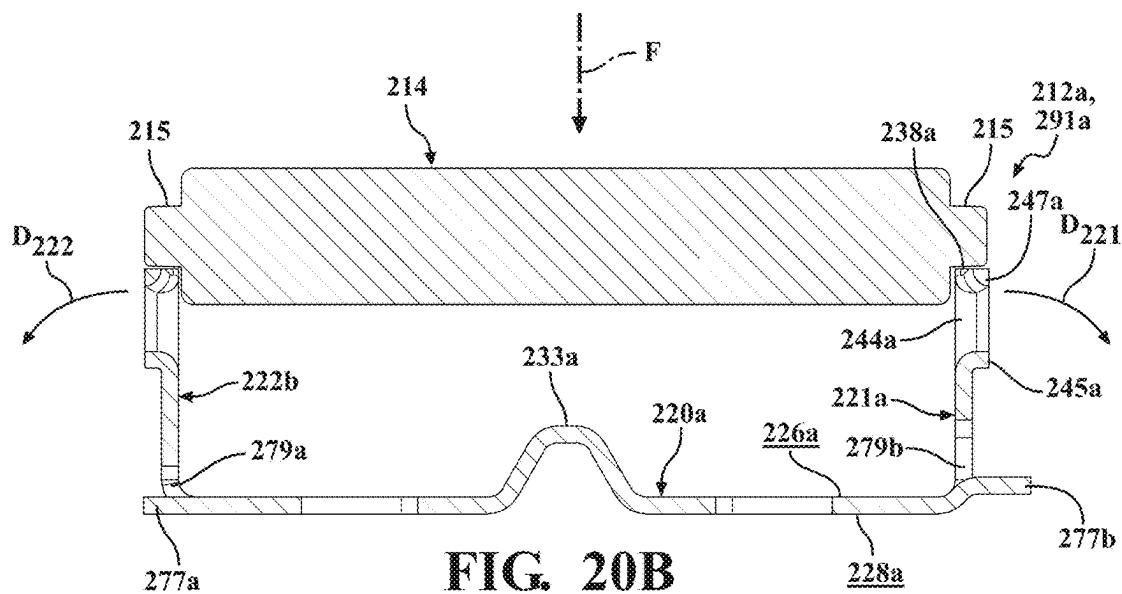
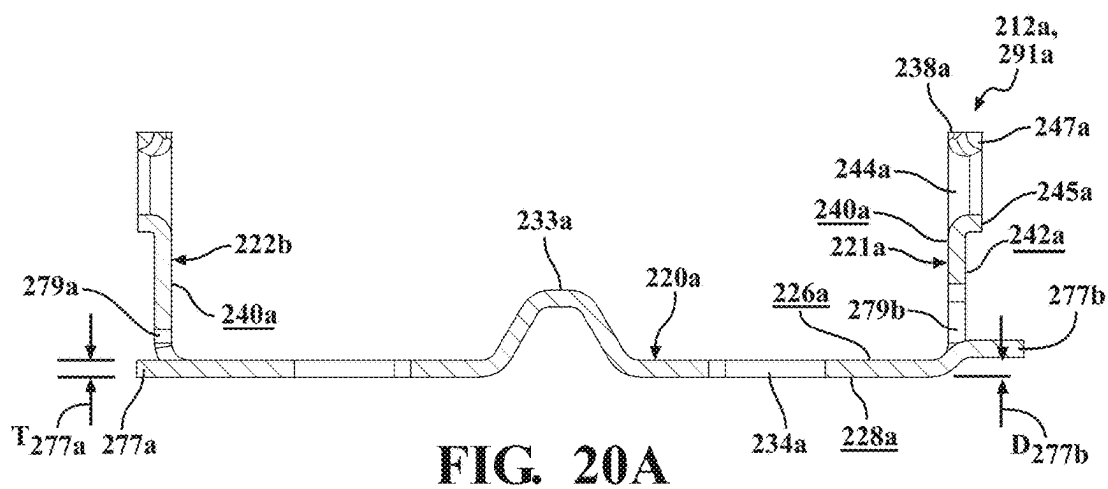
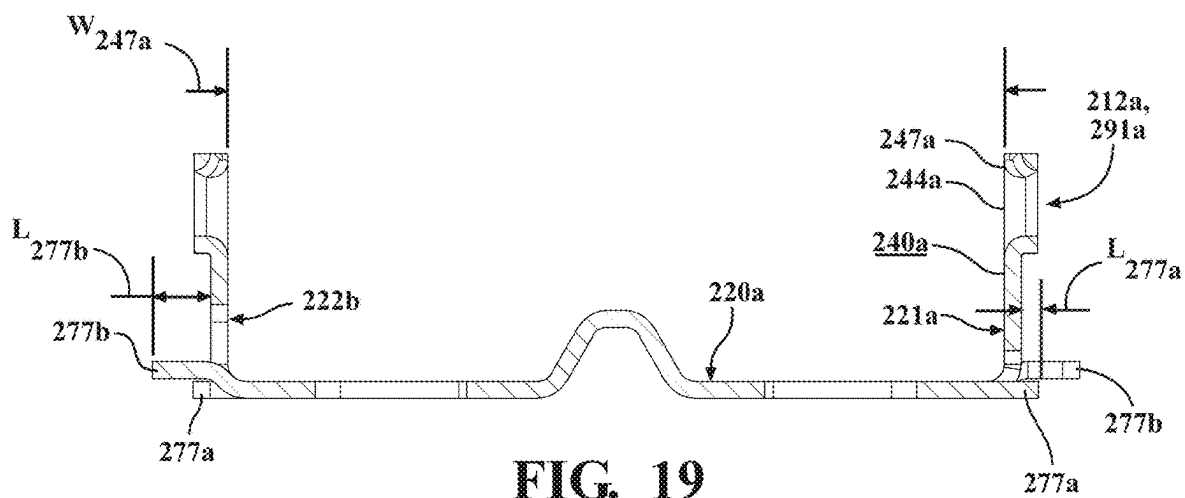
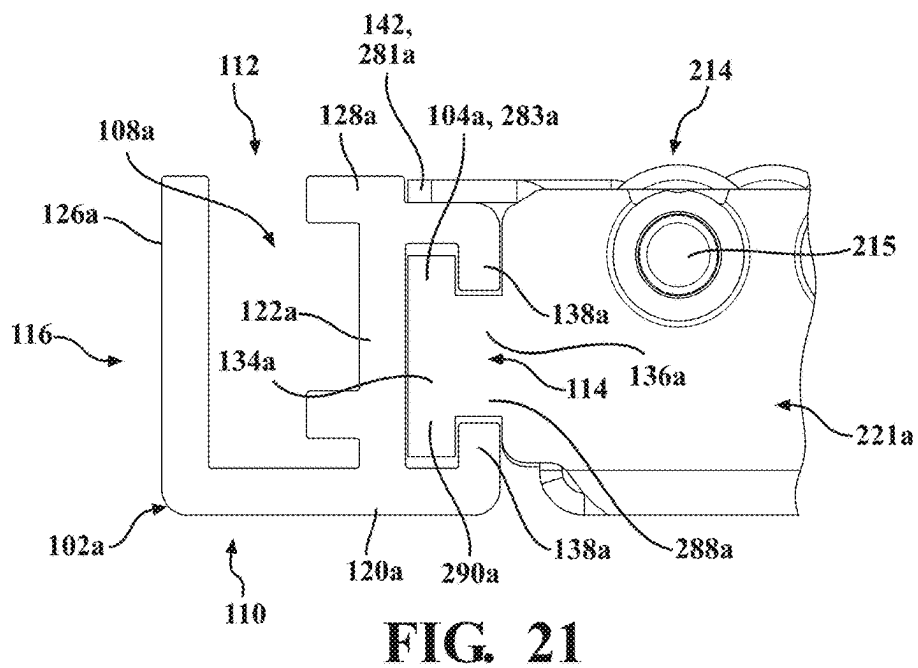
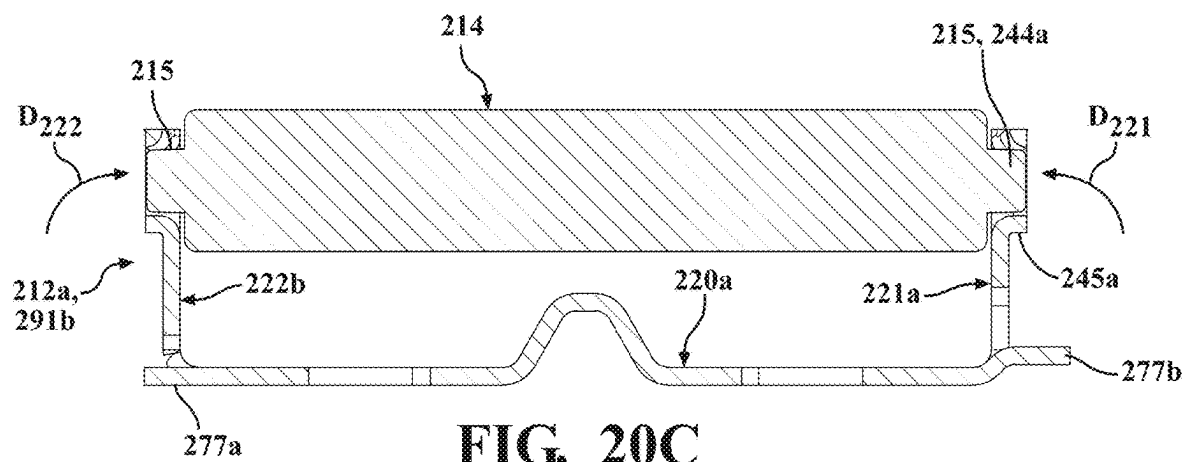


FIG. 17

18
FIG. 1





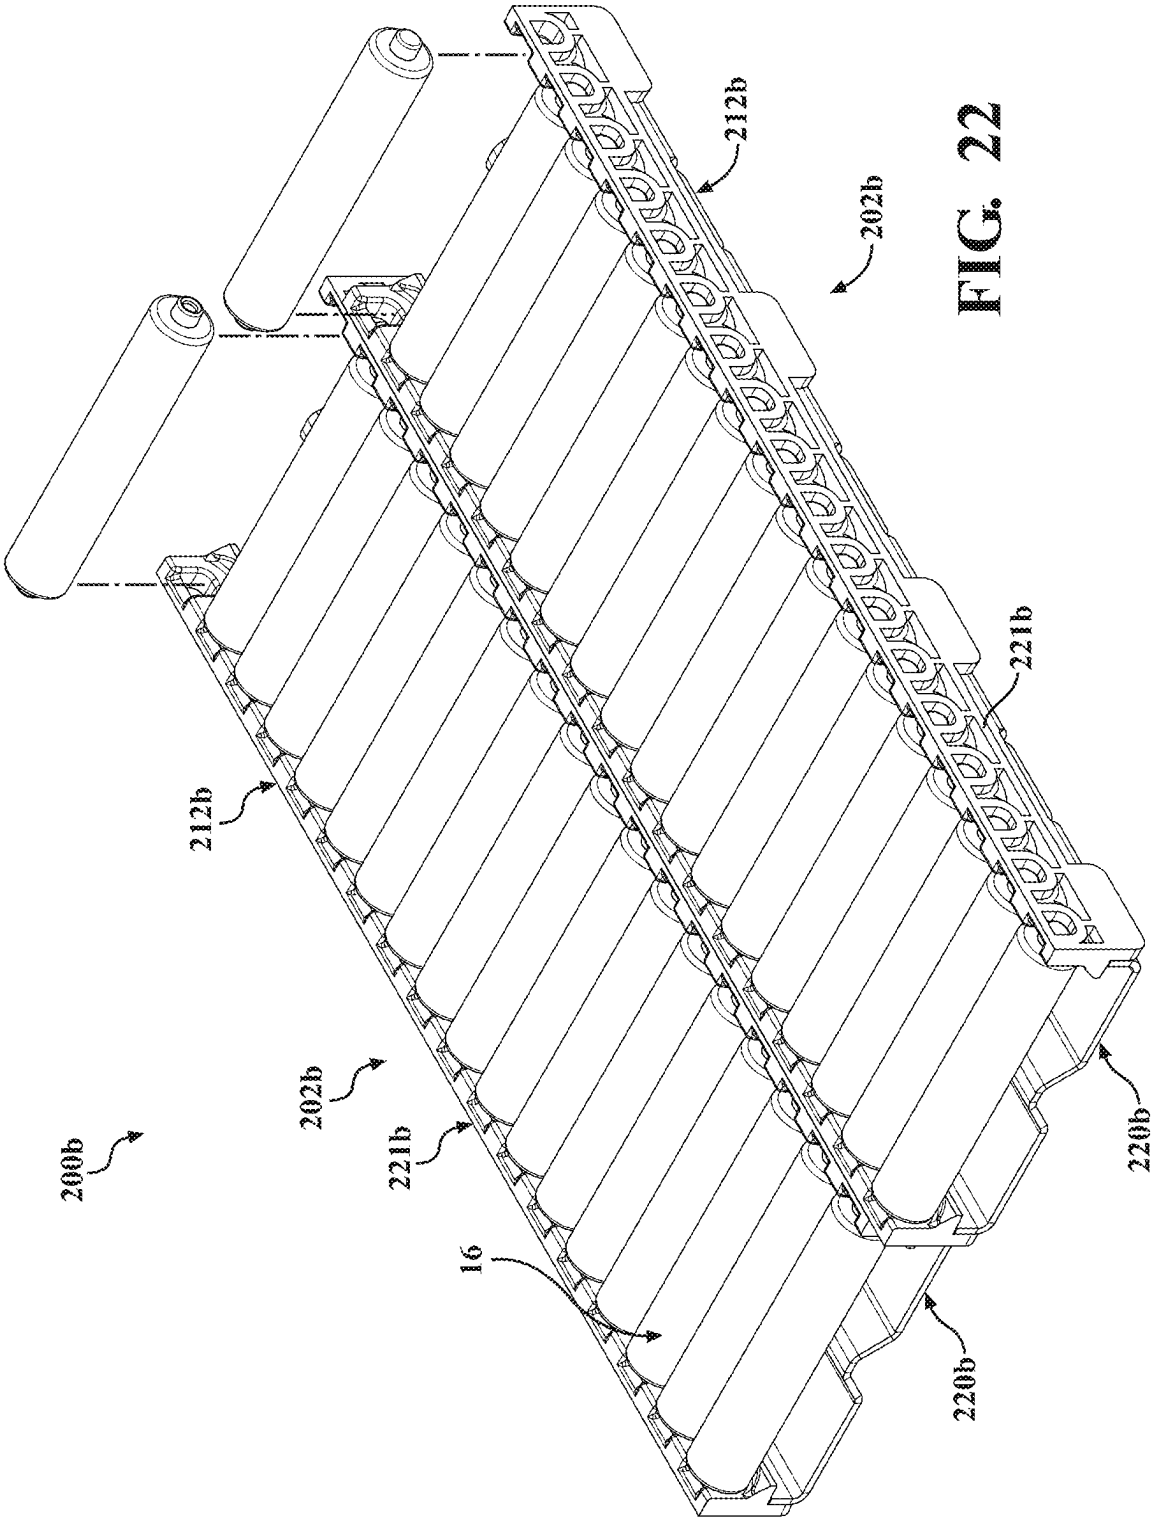


FIG. 22

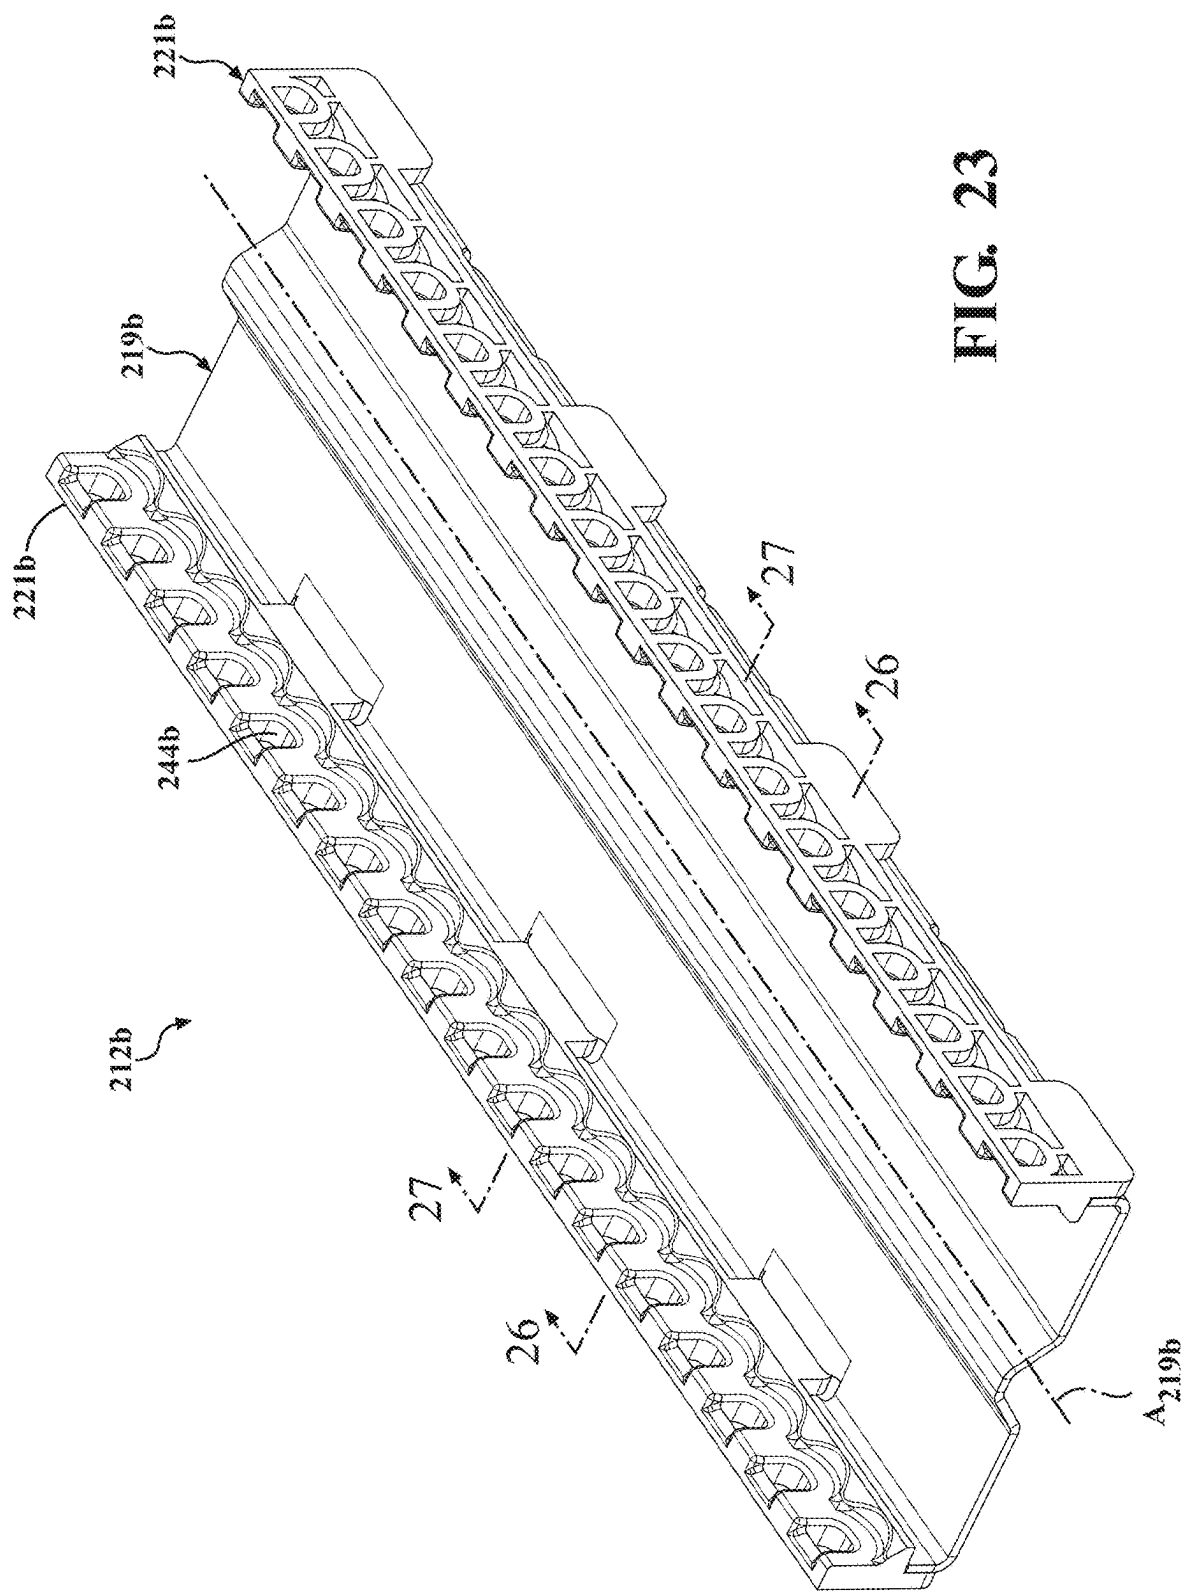
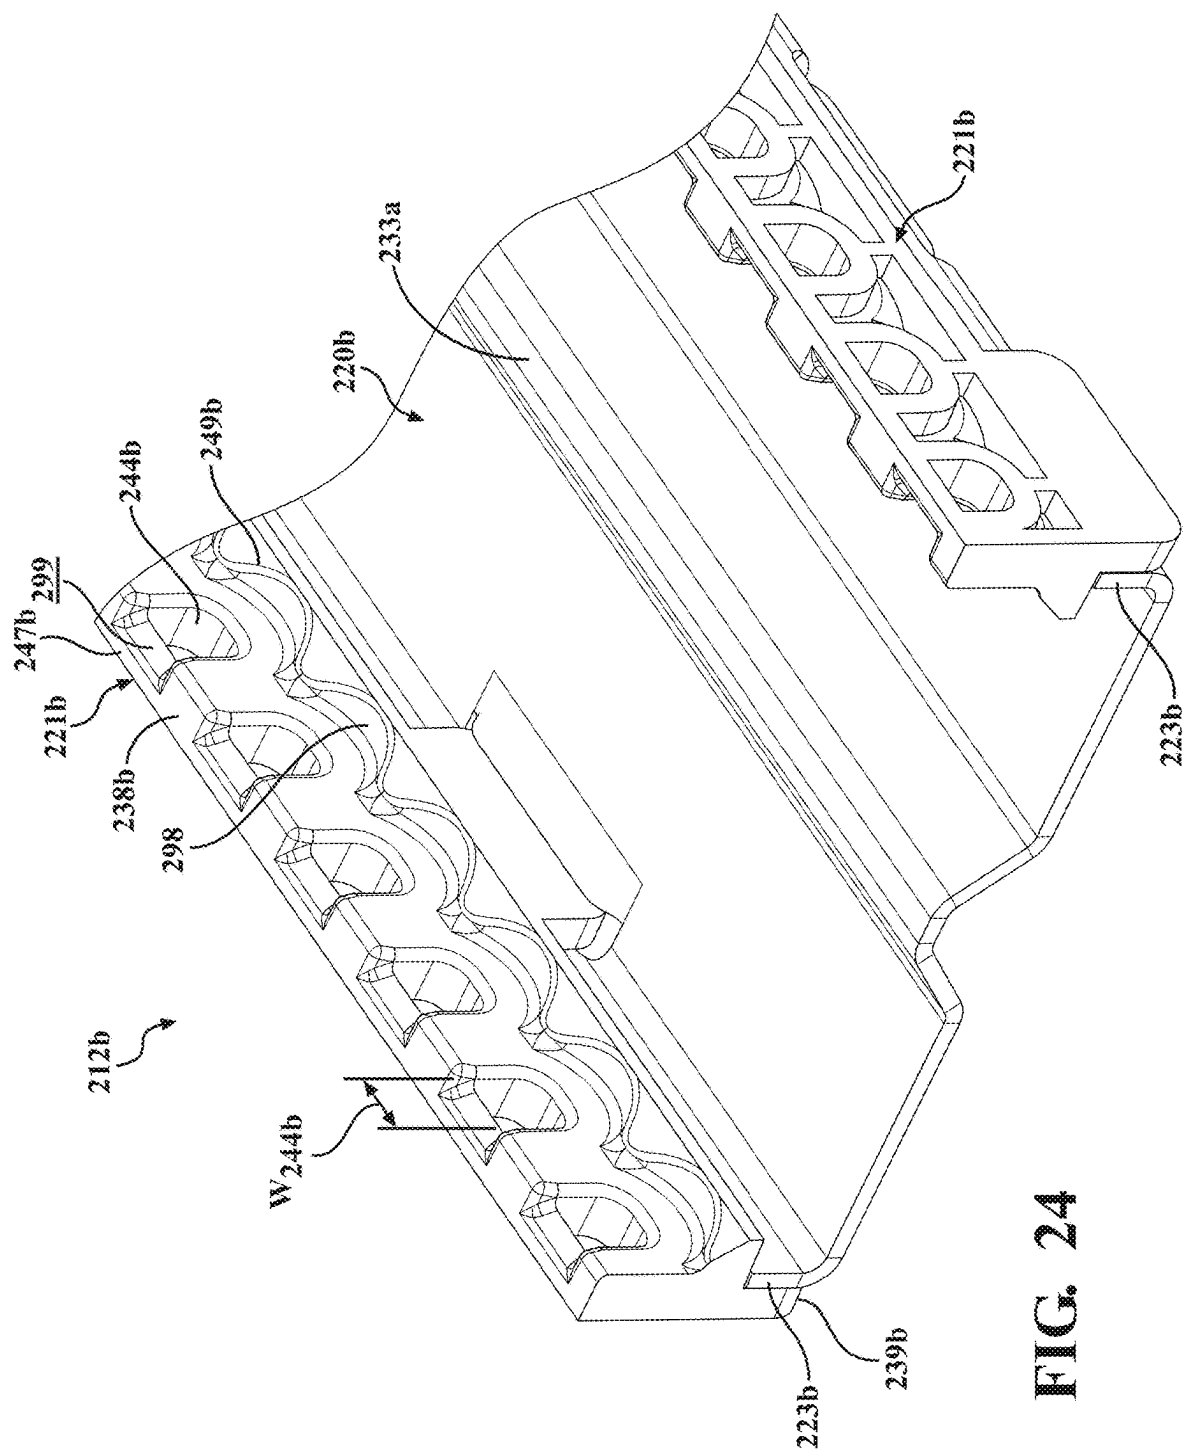


FIG. 23



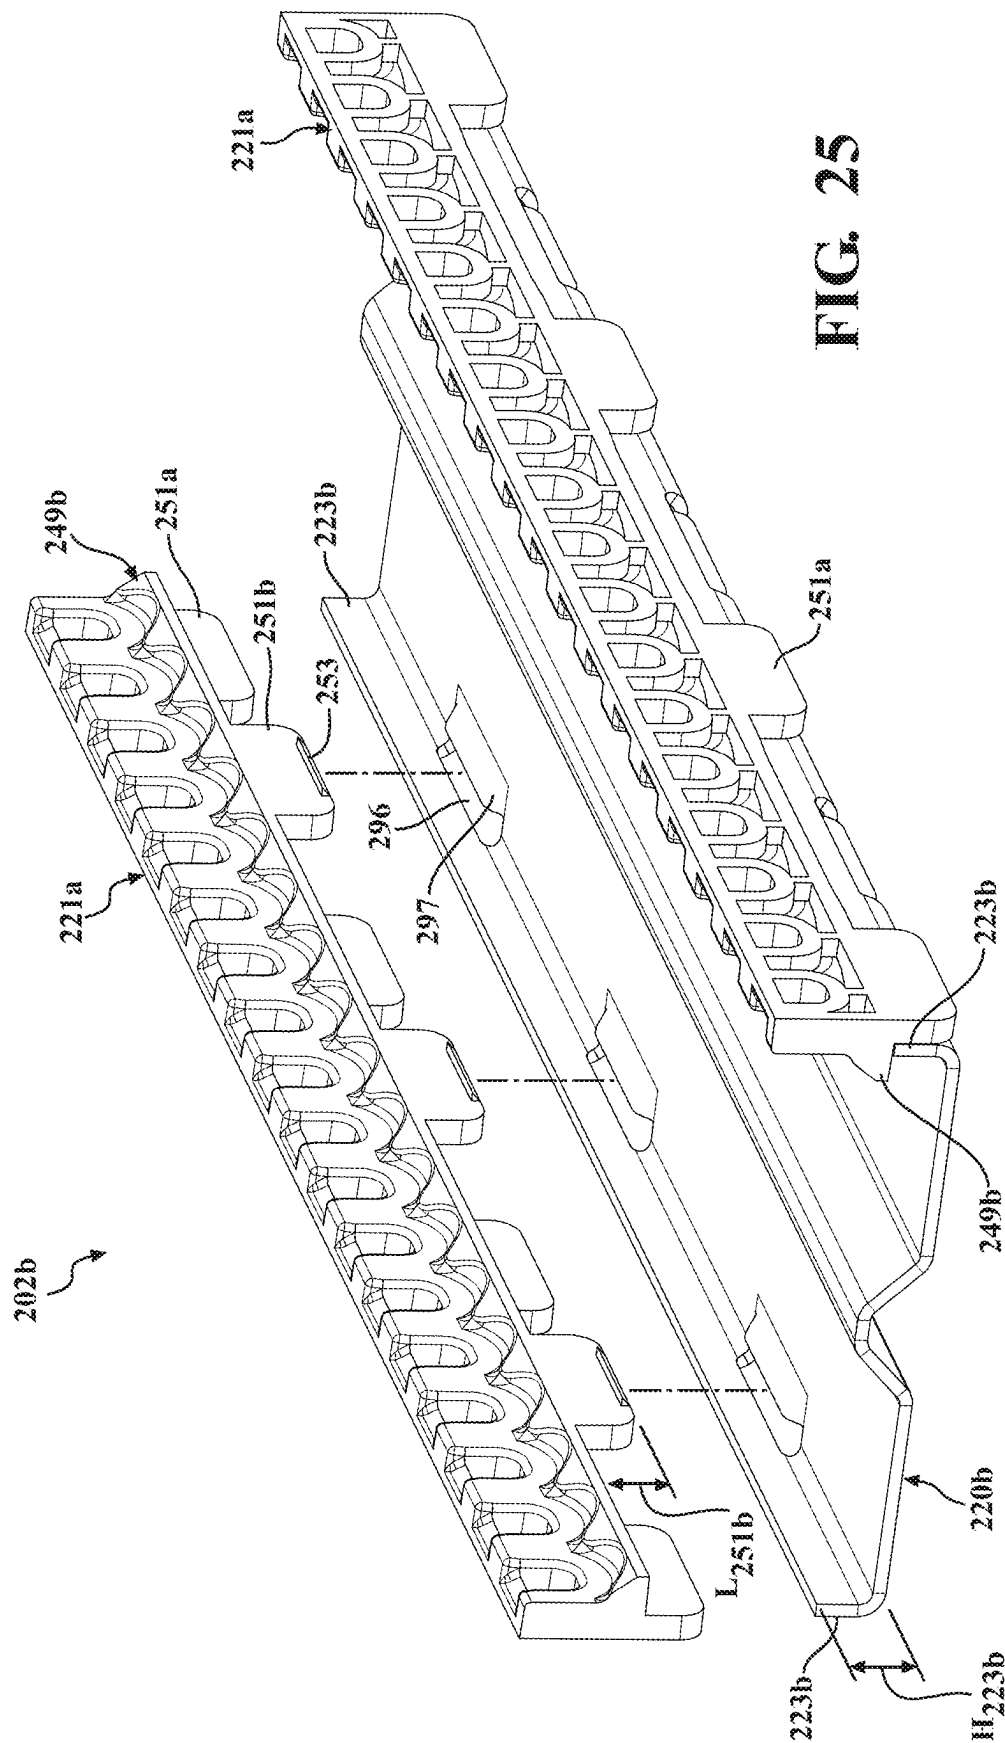


FIG. 25

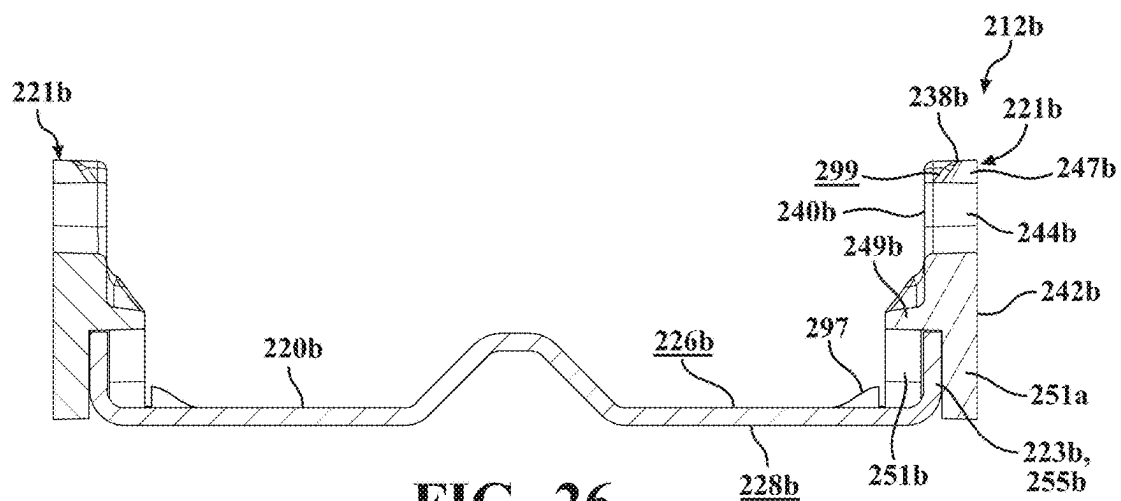


FIG. 26

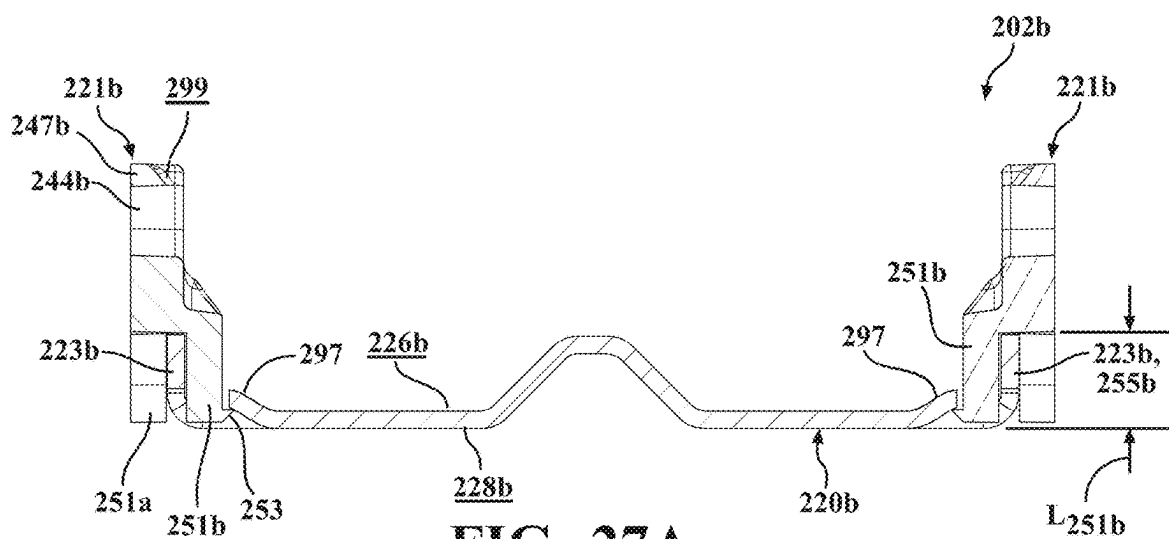
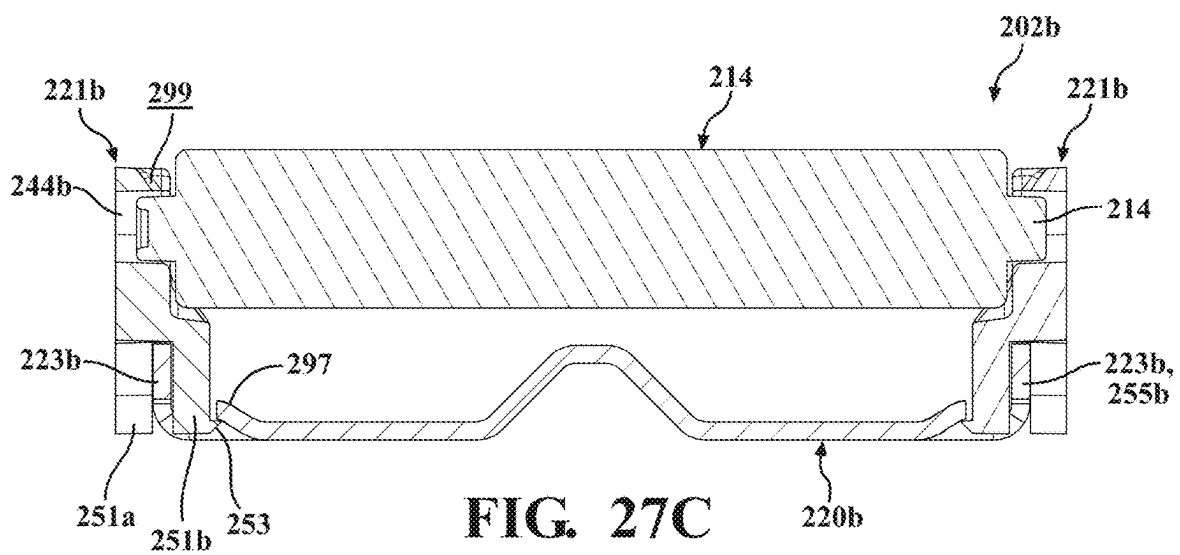
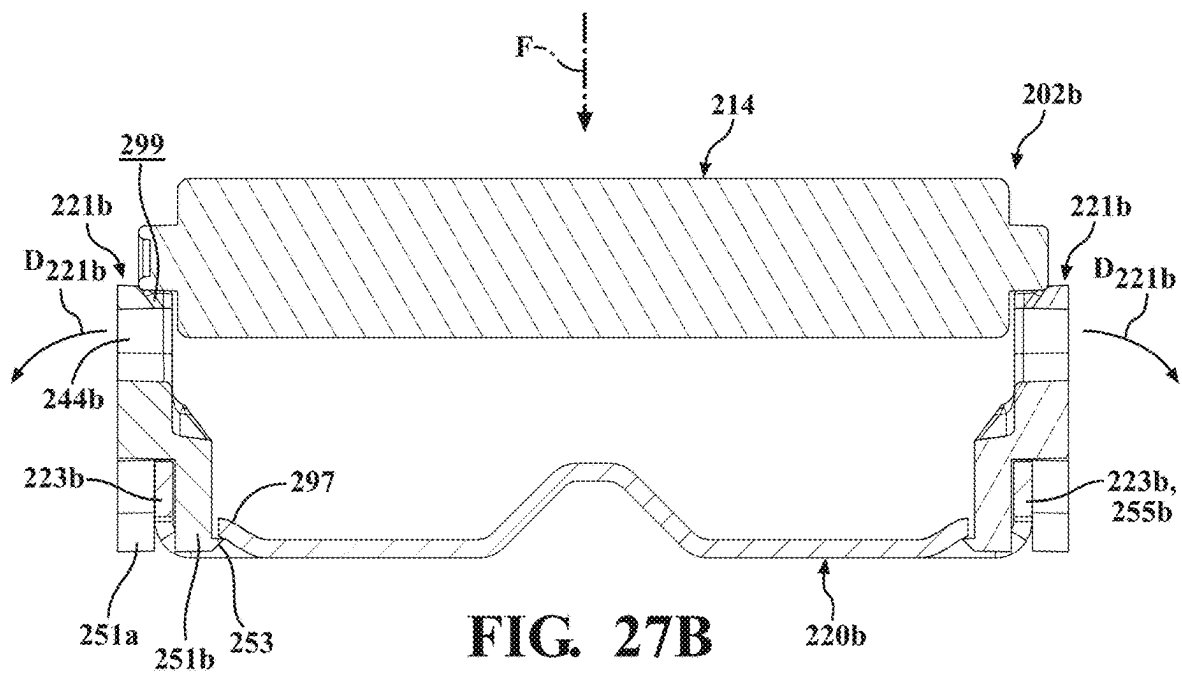


FIG. 27A



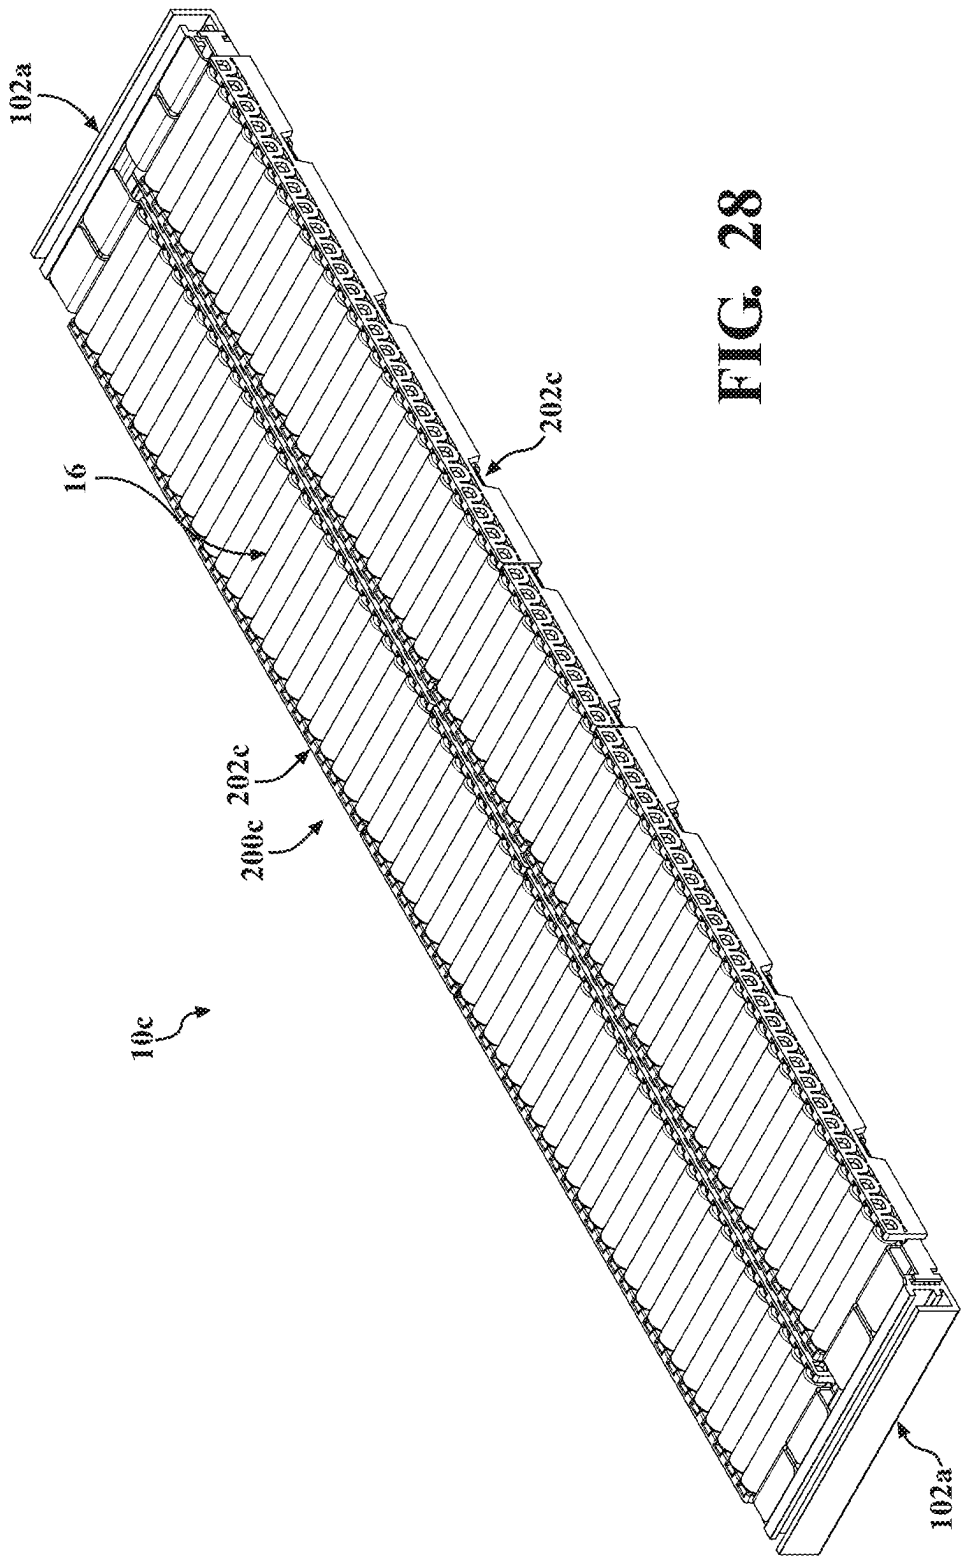
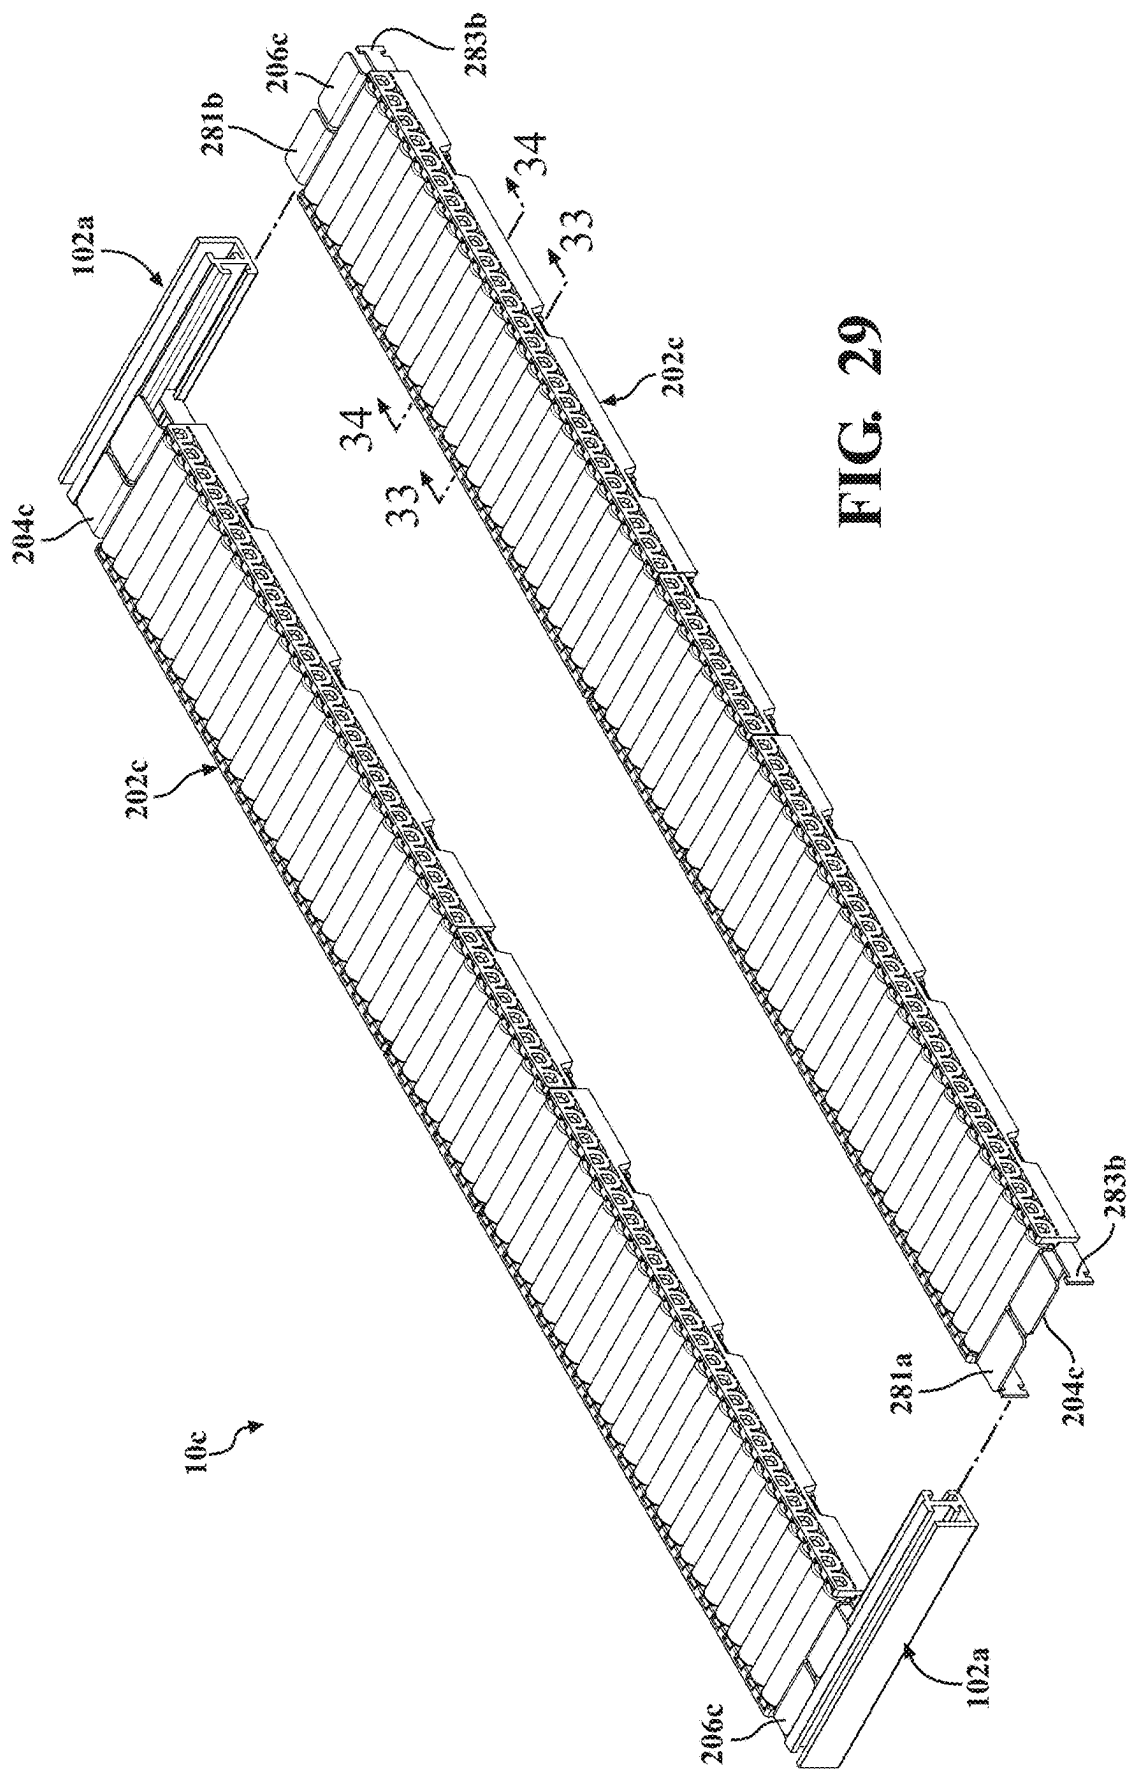


FIG. 28







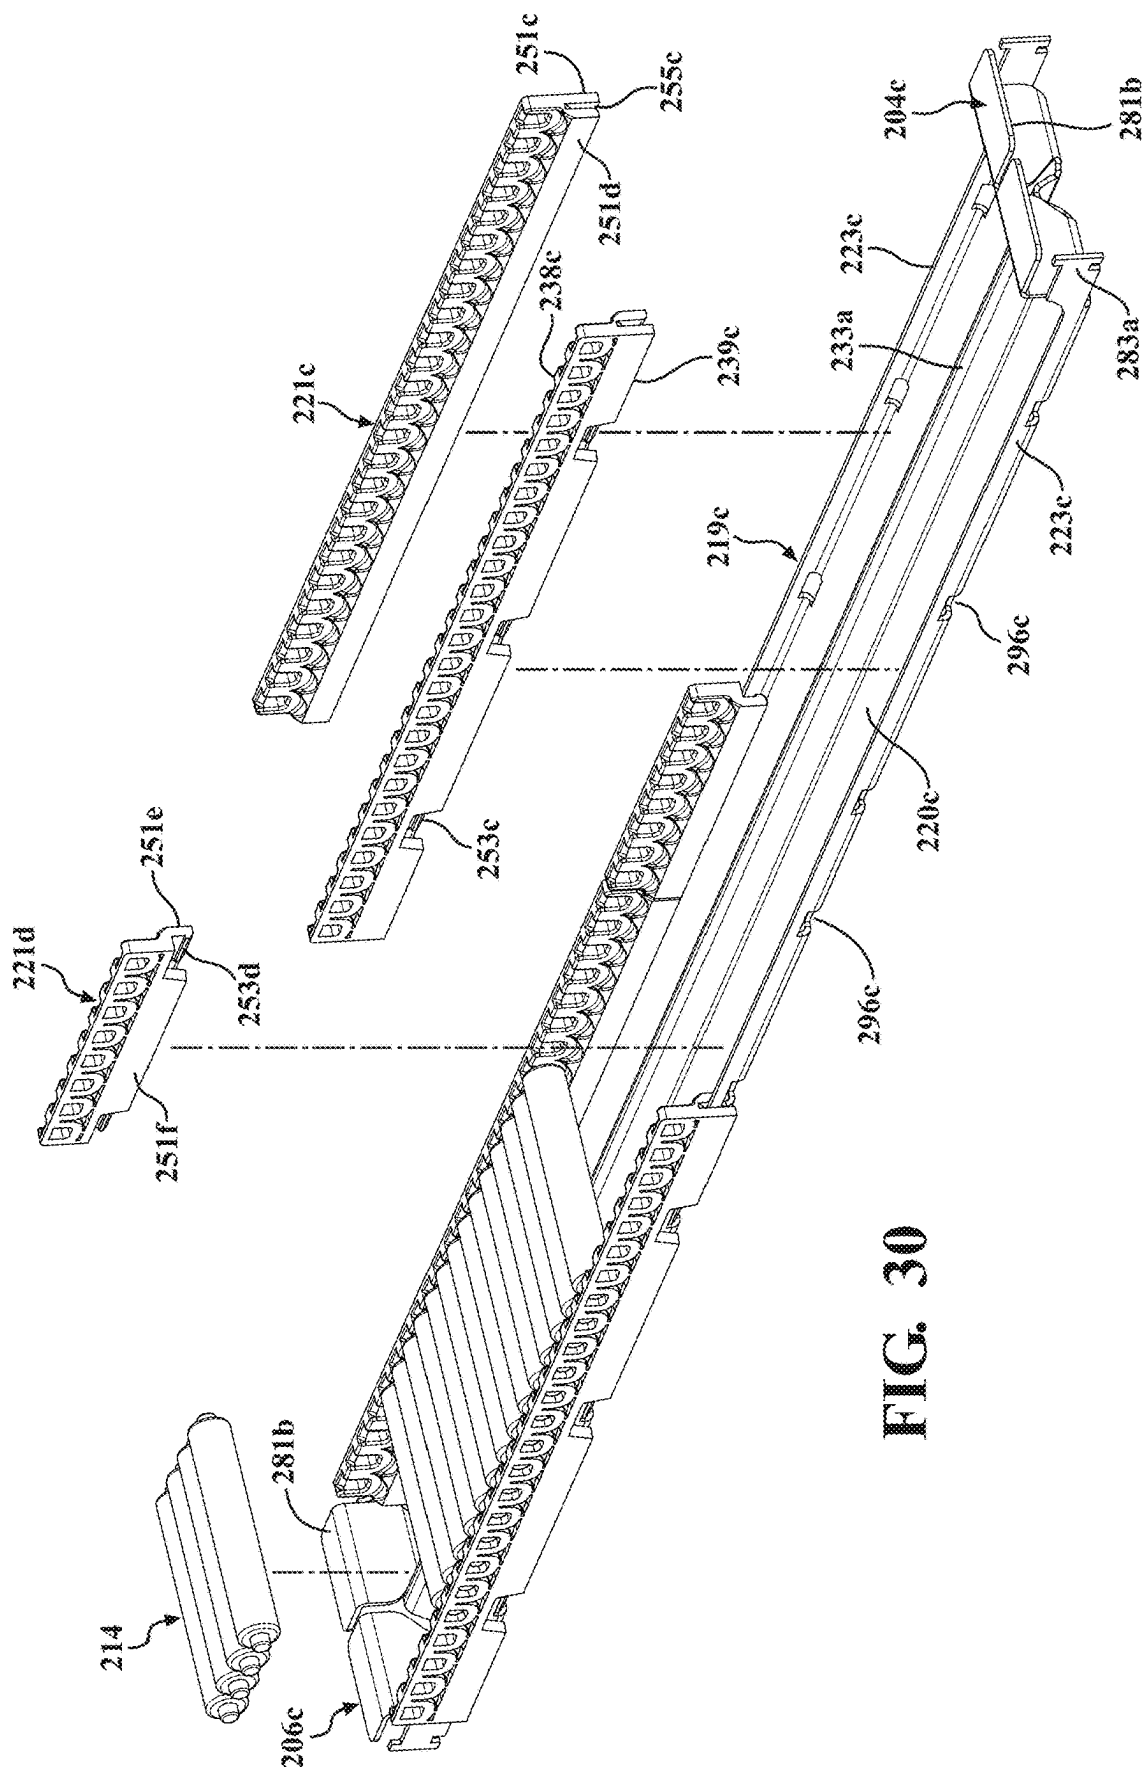


FIG. 30

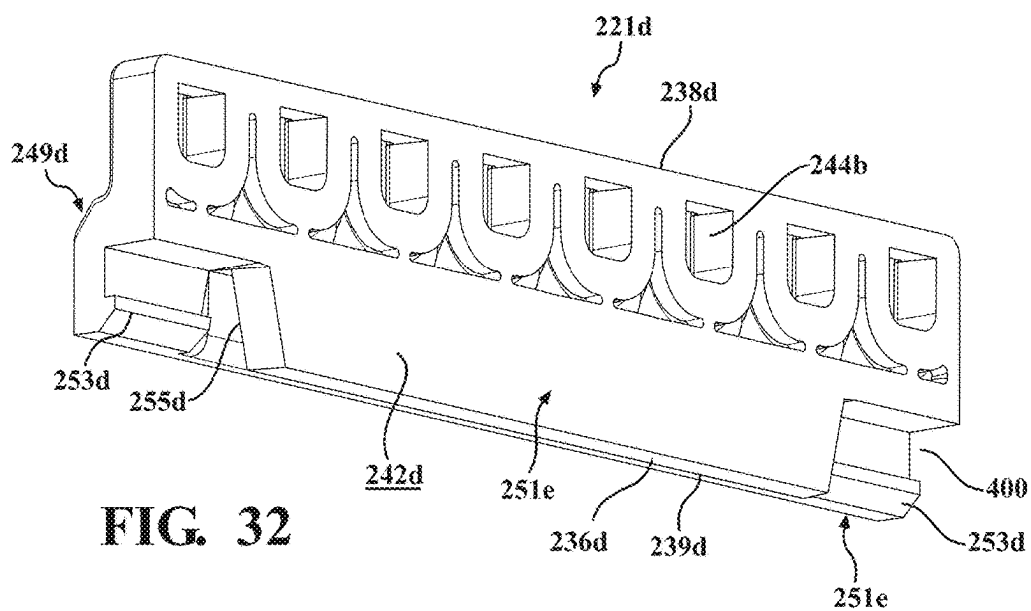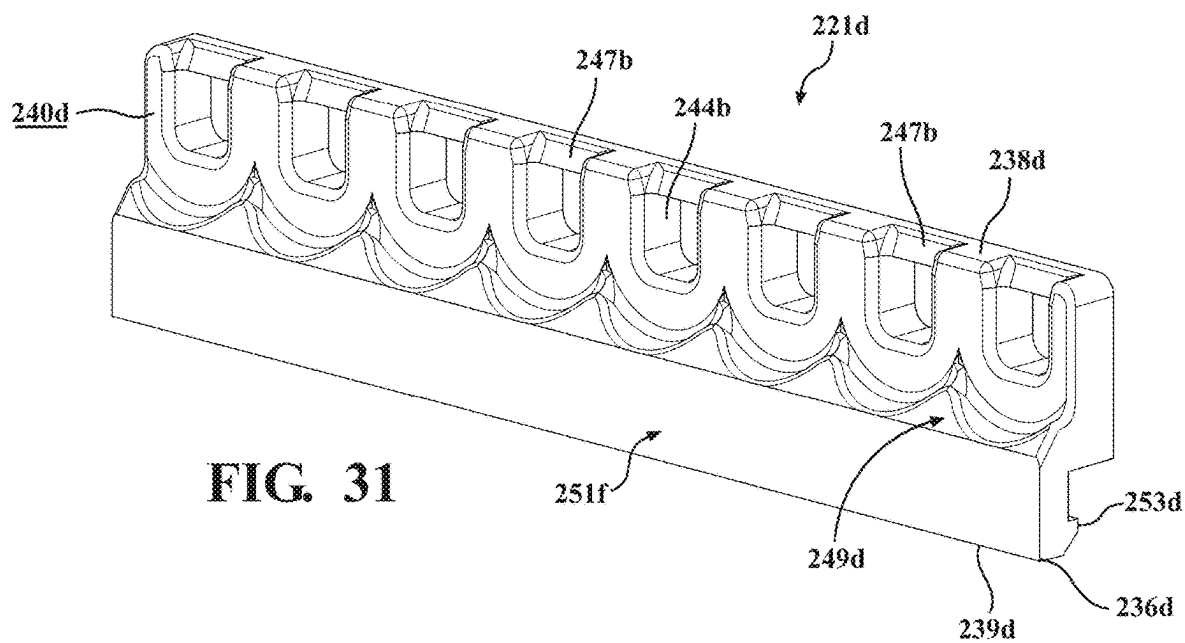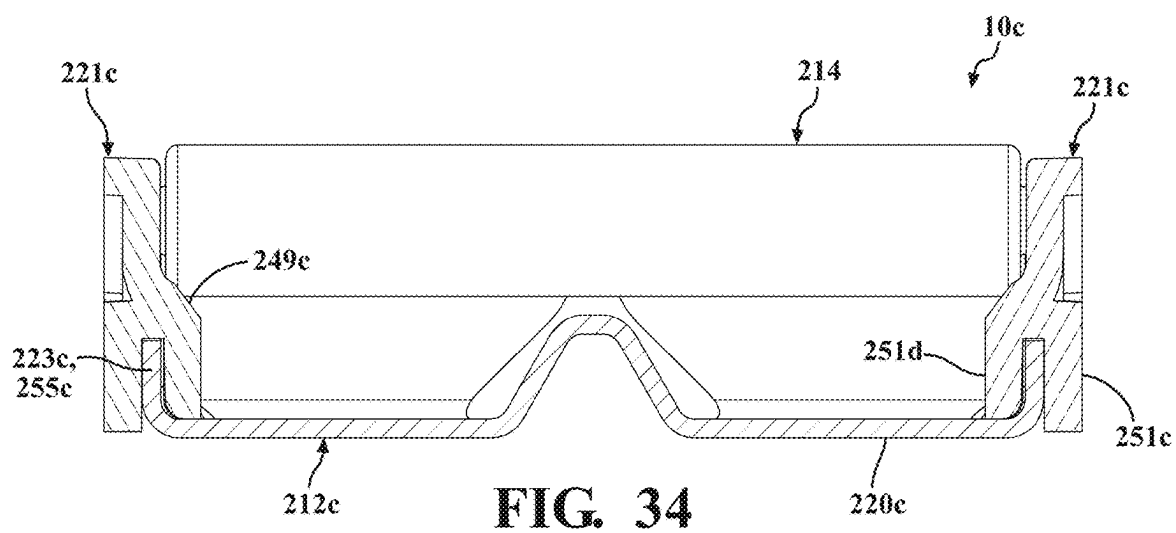

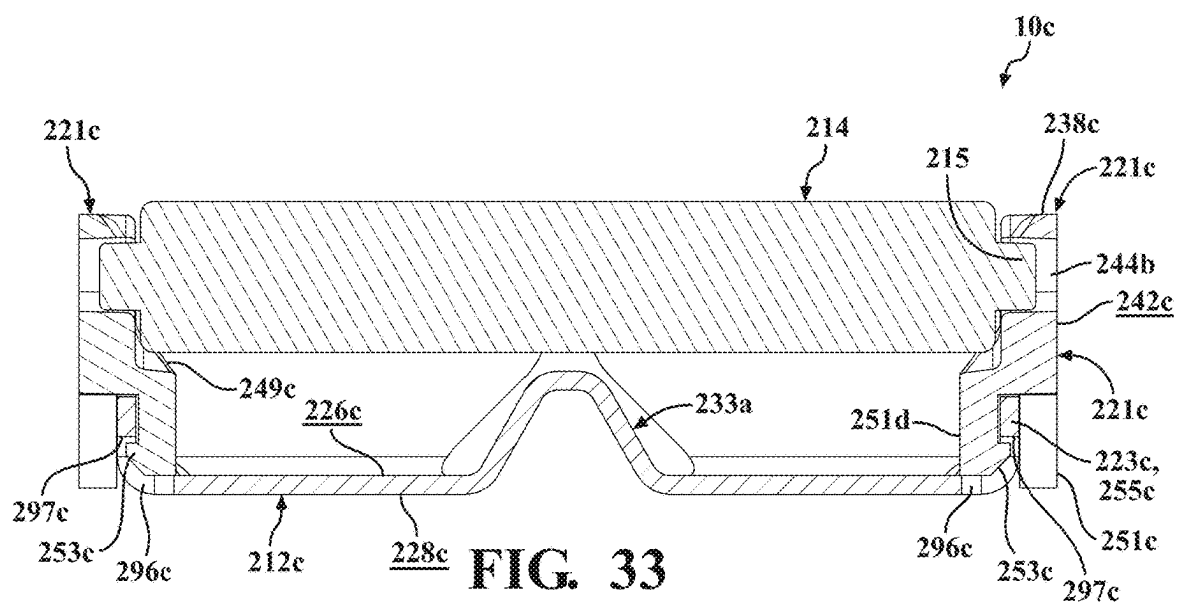

SHELF WITH INTEGRATED ROLLER SECUREMENT

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority under 35 U.S.C. § 120 from patent application Ser. No. 18/184,844, filed Mar. 16, 2023, which claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Application 63/269,479, filed on Mar. 17, 2022. The disclosures of the prior applications are considered part of the disclosure of this application and are hereby incorporated by reference in their entireties.

TECHNICAL FIELD

[0002] This disclosure relates to retail shelving with integrated roller securement.

BACKGROUND

[0003] Gravity-fed shelving systems are commonly used in retail environments as an efficient means of ensuring that products are continuously presented at the front-most area of a shelving system. For instance, when a retail customer or user removes a product from the front of the shelving system, a subsequent product that is stocked on the shelf automatically transitions to the front of the shelf under the influence of gravity. Such shelving ensures that product inventory is always presented for purchase.

[0004] Conventional gravity-fed shelving systems sometimes utilize a conveying system that allows the products to translate along the shelving under the influence of gravity. For instance, some shelving systems may include a support bed having a series of rollers arranged along a length of the support bed. Retail products are loaded into the shelving system such that the rollers facilitate natural translation of the retail products along the length of the support bed towards a lower end of the shelving system.

[0005] Over a period of use, rollers used in gravity-fed shelving systems may need to be removed for maintenance or replacement as the condition of the bearings and other components of each roller deteriorate. Accordingly, there exists a need in the art for a gravity-fed shelving system that allows for convenient replacement or maintenance of rollers while ensuring that the rollers remain securely installed within the shelving system during use.

SUMMARY

[0006] An aspect of the disclosure provides a conveyor system for a retail shelf. The conveyor system includes a conveyor frame having a frame base and a pair of parallel frame sidewalls. Each sidewall extend from a top side of the base to a distal end defining a plurality of sockets. The sockets include a socket bearing configured to support a corresponding roller shaft and a lip element extending across the opening at the distal end.

[0007] Implementations of the disclosure may include one or more of the following optional features. In some examples, the conveyor frame includes at least one end coupler attached at an end of the conveyor frame. In these examples, the end coupler includes at least one coupler ear integrally formed with one of the sidewalls and coupler base integrally formed with the frame base, with the coupler ear being independent from the coupler base. The conveyor system may additionally include a track system including a

track member slidably couples to the end coupler. In some configurations, the conveyor frame includes a plurality of frame segments each defining a portion of a length of the conveyor frame. The plurality of segments may include a first end segment extending from a first end including the end coupler to a second end defined by the frame base and the frame sidewall and a second end segment extending from a third end including a frame coupler configured to overlap the second end of the first end segment when the conveyor frame is in an assembled state.

[0008] In some implementations, the conveyor system includes the lip element that is recessed from an inner sidewall surface of each of the sidewalls. In these implementations, the lip element may be arcuate. In some examples, the conveyor frame includes a first end including a first track coupling member. In some configurations, the conveyor system includes a plurality of roller units that each include a first roller shaft at a first end and a second roller shaft at an opposite second end. The length from the first end to the second end is greater than a distance between a first lip element on a first one of the frame sidewalls and a second lip element on the other one of the frame sidewalls.

[0009] Another aspect of the disclosure provides a conveyor system for a retail shelf including a conveyor chassis with a base and a chassis sidewall extending a first height from the base. The conveyor system also includes a frame sidewall formed separately from the chassis and including a proximal end defining a sidewall channel configured to receive the chassis sidewall and an opposite distal end including a plurality of sockets.

[0010] Implementations of the disclosure may include one or more of the following optional features. In some examples, the conveyor chassis includes a plurality of receptacles formed in at least one of the base and the chassis sidewall. In these examples, the frame sidewall may have a plurality of tabs configured to be at least partially received within the receptacles when the channel of the frame sidewall receives the chassis sidewall. The tabs may have a sidewall retainer configured to engage the chassis at one of the receptacles. In some examples, the chassis includes a base retainer configured to interface with the sidewall retainer. In some implementations, the base retainer includes a flange extending from a top side of the base.

[0011] In some configurations, the conveyor system includes a base that is a metallic material and the frame sidewall includes a polymeric material. In some implementations, the frame includes at least one end coupler attached at an end of the conveyor frame. In these implementations, the end coupler includes at least one coupler ear integrally formed with one of the sidewalls and coupler base integrally formed with the frame base, with the coupler ear being independent from the coupler base. The conveyor system may also have a track system including a track member slidably coupled to the end coupler.

[0012] Another aspect of the disclosure provides a conveyor system for a retail shelf. The conveyor system includes a conveyor frame having a first sidewall. The first sidewall includes a distal end defining a plurality of sockets. The conveyor system further includes a first wing operable between an open configuration, wherein the sockets of the first sidewall are exposed, and a closed configuration, wherein the sockets of the first sidewall are covered by the first wing.

[0013] Implementations of the disclosure may include one or more of the following optional features. In some implementations, the first wing includes a lower end coupled to the first sidewall and an upper end operable to selectively cover the sockets of the first sidewall when the first wing is moved between the open configuration and the closed configuration. In some examples, the upper end of the first wing includes a flange configured to engage the distal end of the first sidewall in the closed configuration. In some configurations, the flange is configured to receive the distal end of the first sidewall. In some examples, the lower end of the first wing is hingedly coupled to the first sidewall. In some implementations, the lower end of the first wing is coupled to the first sidewall by a living hinge.

[0014] In some configurations the first sidewall and the first wing are integrally formed. In some implementations, the first wing includes an outer surface configured to face away from the first sidewall in the closed configuration, the outer surface including at least one rib extending parallel to the distal end of the first sidewall. In some examples, the conveyor frame includes a first end, including a first track coupling member. In some configurations, a plurality of roller units each including a first roller shaft received by one of the sockets of the first sidewall, wherein the first roller shaft is disposed between the first wing and the first sidewall when the first wing is in the closed configuration.

[0015] Another aspect of the disclosure provides a shelf divider system. The shelf divider system, including a divider track, including a first slot extending along a length of the divider track. The shelf divider system further includes a track insert received within the first slot and including an inner core defining a lower socket and a plurality of stabilizers extending outwardly from the inner core.

[0016] This aspect may include one or more of the following optional features. In some configurations, each of the stabilizers extends to a distal end contacting an inner surface of the first slot. In some examples, the inner core includes a first material and the stabilizers include a second material that is different than the first material. In some implementations, the second material has at least one of a greater coefficient of friction or a lower stiffness than the first material.

[0017] In some configurations, the first slot includes a first slot opening formed in a top side of the first divider track. In some examples, the lower socket includes a lower socket opening exposed through the first slot opening. In some implementations, the lower socket has a first width and the lower socket opening has a second width that is less than the first width. In some configurations, a divider including a divider wall and a divider coupling tab extending from a bottom side of the divider wall, the divider coupling tab configured to selectively engage with the lower socket of the track insert through the first slot. In some examples, the divider coupling tab includes a distal end having a third width that is greater than a width of the lower socket.

[0018] In some implementations, the track insert is configured to expand within the first slot when the divider coupling tab is engaged with the lower socket of the track insert.

[0019] The details of one or more implementations of the disclosure are set forth in the accompanying drawings and the description below. Other aspects, features, and advantages will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

[0020] FIG. 1 is perspective view of an example shelving system according to the principles of the present disclosure.

[0021] FIG. 2 is a perspective view of an example conveyor unit for use according to the principles of the present disclosure.

[0022] FIG. 3 is an exploded perspective view of the conveyor unit of FIG. 2.

[0023] FIG. 4A is a cross-sectional view of the conveyor unit shown in FIG. 2, taken along Line 4A-4A in FIG. 2.

[0024] FIG. 4B is a cross-sectional view of the conveyor unit shown in FIG. 2, taken along Line 4B-4B in FIG. 2.

[0025] FIG. 5A is a cross-sectional view of the conveyor unit shown in FIG. 2, taken along Line 5A-5A in FIG. 2.

[0026] FIG. 5B is a cross-sectional view of the conveyor unit shown in FIG. 2, taken along Line 5B-5B in FIG. 2.

[0027] FIG. 6 is a first side elevation view of the conveyor unit of FIG. 2.

[0028] FIG. 7 is a second side elevation view of the conveyor unit of FIG. 2.

[0029] FIG. 7A is an enlarged view of a first end of the conveyor unit of FIG. 2, taken at Area 7A of FIG. 7.

[0030] FIG. 7B is an enlarged view of the conveyor unit of FIG. 2, taken at Area 7B of FIG. 7.

[0031] FIG. 8 is a perspective view of a divider system and track system according to the principles of the present disclosure.

[0032] FIG. 9 is an exploded perspective view of the divider system and track system of FIG. 8.

[0033] FIG. 10 is a side elevation view of the divider system and track system of FIG. 8.

[0034] FIG. 11A is an enlarged fragmentary view of the divider system and track system of FIG. 8, taken at Area 11A.

[0035] FIG. 11B is an enlarged fragmentary view of the divider system and track system of FIG. 8, taken at Area 11B.

[0036] FIG. 12 is a perspective view of an example divider of the divider system of FIG. 8.

[0037] FIG. 13 is a perspective view of another example of a shelving system according to the principles of the present disclosure.

[0038] FIG. 14 is an enlarged, partial, exploded view of the shelving system of FIG. 13.

[0039] FIG. 15 is a fragmentary perspective view of a conveyor unit of the shelving system of FIG. 13, showing an intermediate frame segment of the conveyor unit.

[0040] FIG. 16 is a perspective view of a conveyor frame of the shelving system of FIG. 13. FIG. 17 is a partial perspective view of the conveyor frame of FIG. 16.

[0041] FIG. 18 is a perspective view of an intermediate frame segment of the conveyor frame of FIG. 16.

[0042] FIG. 19 is a cross-sectional view of the intermediate frame segment of FIG. 18, taken at Line 19-19 of FIG. 18.

[0043] FIG. 20A is cross-sectional view of the intermediate frame segment of FIG. 18, taken at Line 20-20 of FIG. 18.

[0044] FIGS. 20B and 20C are cross-sectional views taken along Line 20-20 of FIG. 18, showing steps for installing a roller into the intermediate frame segment of FIG. 18.

[0045] FIG. 21 is an enlarged view of a first end of the conveyor, taken at Area 21 of FIG. 13.

[0046] FIG. 22 is a perspective view of another example of a shelving system according to the principles of the present disclosure.

[0047] FIG. 23 is a perspective view of a conveyor frame of the shelving system of FIG. 22.

[0048] FIG. 24 is an enlarged, partial view of the conveyor frame of FIG. 23.

[0049] FIG. 25 is an exploded perspective view of the conveyor frame of FIG. 23.

[0050] FIG. 26 is a cross-sectional view of the intermediate frame segment of FIG. 23, taken at Line 26-26 of FIG. 23.

[0051] FIG. 27A is cross-sectional view of the intermediate frame segment of FIG. 23, taken at Line 27-27 of FIG. 23.

[0052] FIGS. 27B and 27C are cross-sectional views taken along Line 27-27 of FIG. 23, showing steps for installing a roller into the intermediate frame segment of FIG. 23.

[0053] FIG. 28 is a perspective view of another example of a shelving system according to the principles of the present disclosure.

[0054] FIG. 29 is an exploded perspective view of the shelving system of FIG. 28.

[0055] FIG. 30 is an exploded perspective view of a conveyor unit of the shelving system of FIG. 28.

[0056] FIG. 31 is an inner perspective view of a frame sidewall of the shelving system of FIG. 28.

[0057] FIG. 32 is an outer perspective view of the frame sidewall of FIG. 31.

[0058] FIG. 33 is a cross-sectional view of the conveyor unit of FIG. 30, taken at Line 33-33 of FIG. 29.

[0059] FIG. 34 is a cross-sectional view of the conveyor unit of FIG. 30, taken at Line 34-34 of FIG. 29.

[0060] Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0061] Referring to FIG. 1, a shelving system 10 is shown including a track system 100, a conveyor system 200, and a divider system 300 according to an example of the present disclosure. As described throughout the application, the shelving system 10 and components thereof may be described with reference to a front side 12 corresponding to a product dispensing location that may face a store aisle and a rear side 14 formed on the opposite side of the shelving system 10 from the front side 12. Furthermore, the shelving system 10 and components thereof may be described relative to a longitudinal direction or axis extending from the front side 12 to the rear side 14 or a lateral direction or axis extending perpendicular to the longitudinal direction.

[0062] The shelving system 10 may be provided as a standalone unit for use in a retail environment, or may be provided in combination with a plurality of the shelving systems 10. Furthermore, the shelving system 10 may be configured for direct attachment to one or more shelving support members (not shown), such as uprights or walls, or alternatively, may be installed on existing shelves. Optionally, the shelving system 10 may be provided as a gravity-fed shelving system 10, whereby the shelving system 10 is oriented at an oblique angle relative to level such that a support bed 16 of the shelving system forms a decline from the rear side 14 of the shelving system 10 to the front side 12 of the shelving system 10.

[0063] Generally, the track system 100 includes a pair of track members 102 each defining one or more of a conveyor track 104, a divider track 106, and/or an accessory track 108 (FIG. 11A). The conveyor system 200 of the shelving system 10 includes one or more conveyor units 202 collectively defining the support bed 16 of the shelving system 10. In the illustrated example, the conveyor system 200 includes a plurality of the conveyor units 202 attached to the track system 100 such that the conveyor units 202 cooperate to define the support bed 16 of the shelving system 10. The divider system 300 includes at least one divider unit 304 selectively coupled to the divider track 106 of each of the track members 102. As described in greater detail below, the divider system 300 includes an attachment interface between each divider track 106 and a respective one of the divider units 304 to allow each of the divider units 304 to be selectively attached to and adjusted along each divider track 106. Thus, divider units 304 can be added, removed, or repositioned along the divider tracks 106 to define a plurality of independent product bays 18 for arranging and separating products.

[0064] With reference to FIG. 1, the shelving system 10 includes the track system 100 generally configured to facilitate attachment and lateral translation of the various components of the conveyor system 200 and the divider system 300. Here, the track system 100 includes a pair of the track members 102, with a first track member 102 extending along the front side 12 and a second track member 102 extending along the rear side 14. While the track members 102 of the present disclosure are shown as being identical, in some examples one of the track members 102 may be different. For example, one of the track members 102 may be provided without the accessory track 108.

[0065] Referring to FIGS. 10-11B, each track member 102 includes the conveyor track 104, the divider track 106, and the accessory track 108. For the sake of description, each track member 102 and elements thereof may be described relative to a bottom side 110, a top side 112, an inner side 114 configured to face inward (i.e., towards the opposite track member 102) and an outer side 116 configured to face outward (i.e., away from the opposite track member 102). While the track members 102 illustrated in the figures are provided as integral units including all of the tracks 104, 106, 108 formed of a single piece, one or more of the tracks 104, 106, 108 may be provided as a detachable element. Furthermore, the track member 102 may be formed with any one of or any combination of the tracks 104, 106, 108. For example, the track member 102 may be provided with just the conveyor track 104 or just the divider track 106.

[0066] The track member 102 includes a base member 120 disposed along the bottom side 110 and a plurality of track walls 122, 124, 126 extending from the top side of the base member 120. The track walls 122, 124, 126 cooperate with each other to define the respective conveyor track 104, divider track 106, and accessory track 108. For example, the track walls 122, 124, 126 include an inner track wall 122 extending from the base member 120 adjacent to the inner side 114 of the track member 102 and partly defining the conveyor track 104, an intermediate track wall 124 spaced apart from and cooperating with the inner track wall 122 to define the divider track 106, and an outer track wall 126 extending from the base member 120 at the outer side 116 and cooperating with the intermediate track wall 124 to define the accessory track 108. Each of track walls 122, 124,

126 may include a respective end cap or retainer **128**, **130**, **132** formed at the distal end of the track wall **122**, **124**, **126** and configured to partially define the geometry of one of the respective tracks **104**, **106**, **108**.

[0067] The conveyor track **104** of the track member **102** is formed as a T-slot configured to receive a corresponding T-shaped coupler rail **282** of the conveyor system **200** along the inner side **114** of the track member **102**. Here, the T-slot includes a head portion **134** having a first height and a narrowed neck portion **136** having a second height that is less than the first height of the head portion **134**. The neck portion **136** defines an opening of the T-slot and faces toward the inner side **114** of the track member **102**. Here, the neck portion **136** is defined between an opposing pair of ribs **138** including a first rib **138** extending upwardly from the top side of the base member **120** and a second rib **138** extending downwardly from a distal end of an inner track wall retainer **128** formed at the distal end of the inner track wall **122**.

[0068] The divider track **106** is disposed in an intermediate portion of the track member **102** and is defined by the base member **120**, the inner track wall **122**, the intermediate track wall **124**, and the respective retainers **128**, **130** of the inner track wall **122** and the outer track wall **124**. Here, the divider track **106** is also formed as a T-slot along the top side **112** of the track member **102**. The divider track **106** includes a head portion **140** having a first width formed between the inner track wall **122** and the intermediate track wall **124** and a neck portion **142** having a second width defined between opposing ends of the retainers **128**, **130** that is less than the first width. As discussed in greater detail below, the divider track **106** is configured to receive and retain a divider coupling tab **332** in the head portion **140** while allowing the divider coupling tab **332** to be selectively inserted through an opening defined by the neck portion **142**.

[0069] The accessory track **108** is formed adjacent to the outer side **116** of the track member **102** and is defined by the base member **120**, the intermediate track wall **124**, the outer track wall **126**, and the retainers **130**, **132** formed on the respective track walls **124**, **126**. The accessory track **108** is optional and may be configured to accept various shelving accessories, such as label holders, security devices, product displays, or the like. In the illustrated example, the accessory track **108** includes an opening formed along the top side **112** of the track member **102**. The accessory track **108** may include one or more ribs or other features configured to interface with corresponding features of an accessory (e.g., a label holder) and to allow the accessory to translate along the lateral direction within the accessory track **108**.

[0070] Referring now to FIG. 2, an example of one of the conveyor units **202** of the conveyor system **200** is provided. Each conveyor unit **202** may be described as having a longitudinal axis extending from a first end **204** to a second end **206**. Thus, a length of each conveyor unit **202** is defined by a distance from the first end **204** to the second end **206**. Additionally, each conveyor unit **202** includes a first side **208** extending between the first end **204** and the second end **206** and a second side **210** formed on an opposite side from the first side **208** and extending between the first end **204** and the second end **206**. A width of each conveyor unit **202** is defined by the distance from the first side to the second side.

[0071] The conveyor unit **202** includes a conveyor frame **212** extending along the lengthwise direction of the conveyor unit **202** and a plurality of rollers **214** attached to the conveyor frame **212**. Generally, the plurality of rollers **214**

are arranged in series between the first end **204** and the second end **206** of the conveyor unit **202** such that rotational axes of the rollers **214** are parallel to each other and extend between the first side **208** and the second side **210**, thereby defining a continuous support bed **16**. The conveyor unit **202** further includes a first end coupler **216** attached to the conveyor frame **212** at the first end **204** and a second end coupler **218** attached to the conveyor frame **212** at the second end **206**. As discussed in greater detail below, the first end coupler **216** and the second end coupler **218** extend different lengths from the ends **204**, **206** of the conveyor system **200** such that the conveyor frame **212** is offset (i.e., not centered) towards the first end **204** of the conveyor unit **202**.

[0072] Referring to FIGS. 3-5B, the conveyor frame **212** includes a base **220**, a first sidewall **221** extending from a first side of the base **220**, and a second sidewall **222** extending from a second side of the base **220** on an opposite side of the conveyor frame **212** than the first sidewall **221**. The base **220** and each of the sidewalls **221**, **222** extend continuously along a length of the conveyor unit **202** from the first end **204** to the second end **206**. The conveyor frame **212** further includes a first wing **224a** attached to the conveyor frame **212** on the first side **208** and a second wing **224b** attached to the conveyor frame **212** on the second side **210**. As described below, each of the wings **224a**, **224b** are operable between a first position (FIG. 2) and a second configuration (FIG. 3) to selectively secure the rollers **214** within the conveyor frame **212**.

[0073] Referring to FIG. 4A, the base **220** includes a top side **226** and a bottom side **228** formed on an opposite side of the base **220** from the top side **226**. Optionally, the bottom side **228** of the base **220** may include a network of lower support ribs **232** extending from the bottom side **228**. The lower ribs **232** serve as both a bottom support structure for the conveyor unit **202** and a stiffening structure for the conveyor unit **202**. In some examples, the ribs **232** may be arranged as a grid pattern including longitudinal ribs **232** extending from the first end **204** to the second end **206** and lateral ribs **232** extending between the first side **208** and the second side **210** and connecting the longitudinal ribs **232**. The base **220** may further include a plurality of openings **234** formed through a thickness of the base **220** from the top side **226** to the bottom side **228**. When included, the openings **234** may be arranged in series along the length of the conveyor frame **212**.

[0074] Each of the sidewalls **221**, **222** extends from a proximal or lower end **236** attached to the base **220** to an upper or distal end **238** extending away from the base **220**. In other words, each sidewall **221**, **222** has a height extending from the top side **226** of the base **220** to the distal end **238**. Generally, the distal end **238** of each sidewall **221**, **222** is configured to receive the rollers **214** and to engage or interface with a corresponding one of the wings **224a**, **224b** to secure the rollers **214** in the conveyor frame **212**. Each sidewall **221**, **222** may be further described as having a width or thickness extending from an inner sidewall surface **240** (i.e., facing the other sidewall **221**, **222**) and an outer sidewall surface **242** formed on an opposite side from the inner sidewall surface **240**.

[0075] Referring still to FIG. 3, the distal end **238** of each sidewall **221**, **222** includes a plurality of lower sockets **244** arranged in series from the first end **204** to the second end **206** of the conveyor unit **202**. Each of the lower sockets **244**

is generally configured to receive a shaft **215** or axle of one of the rollers **214** when the rollers **214** are installed in the conveyor frame **212** (FIG. 4A). In the illustrated example, each of the lower sockets **244** defines a rectangular notch in the distal end **238** of the sidewall **221**, **222**. More specifically, each lower socket **244** includes a bottom surface **250** parallel to the top side **226** of the base **220** and an opposing pair of side surfaces **252** extending from the bottom surface **250** to the distal end **238**. The rectangular configuration of the lower sockets **244** provides a universal fit capable of accommodating rollers **214** having different axle shapes (e.g., round, polygonal). In the illustrated example, the lower sockets **244** are evenly spaced along the length of each sidewall **221**, **222** and the spacing is selected to provide a desired spacing between adjacent ones of the rollers **214**.

[0076] As best shown in FIGS. 4A-5B, the distal end **238** of each sidewall **221**, **222** has a generally tapered profile between adjacent ones of the lower sockets **244**. Here, the distal end **238** is configured to interface with a corresponding profile of one of the wings **224a**, **224b** when the wing **224a**, **224b** is in the closed configuration (FIGS. 4A and 4B). As shown in FIG. 4A, the sidewall **221**, **222** has a substantially constant first thickness T_{221-1} between the lower end **236** and the distal end **238** and a second thickness T_{221-2} at the distal end **238**. In the illustrated example, the distal end **238** includes a taper from the first thickness T_{221-1} of the sidewall **221**, **222** to the second thickness T_{221-2} . Optionally, the taper may include a compound taper defining an inner shoulder **246** having a first taper rate extending from the first thickness T_{221-1} and a neck **248** extending from the inner shoulder **246** and having a second taper rate between the inner shoulder **246** and the second thickness T_{221-1} . The tapered profile, and more specifically the compound taper advantageously provides a gradual transition from the first thickness T_{221-1} to the second thickness T_{221-2} and minimizes localized stresses. However, in some examples, the distal end **238** could be formed with a stepped profile (i.e., no taper) from the first thickness T_{221-1} to the second thickness T_{122} .

[0077] With continued reference to FIG. 3, the first wing **224a** is attached to the outer sidewall surface **242** of the first sidewall **221** and the second wing **224b** is attached to the outer sidewall surface **242** of the second sidewall **222**. Each of the wings **224a**, **224b** is operable between a closed configuration (FIGS. 4A-4B) wherein the wing **224a**, **224b** captures or secures the rollers **214** within the lower sockets **244** and an open configuration (FIGS. 5A-5B) wherein the lower sockets **244** are exposed for installation and removal of the rollers **214**.

[0078] Each wing **224a**, **224b** includes a lower end **254** attached to the conveyor frame **212** and an upper end **256** operable to move between a first position in the closed configuration and a second position in the open configuration. For example, the lower end **254** may be hingedly coupled to the outer sidewall surface **242** of one of the sidewalls **221**, **222** such that the wing **224a**, **224b** pivots about the lower end **254** to allow the upper end **256** to move between the first position and the second position. Each wing **224a**, **224b** further includes an inner wing surface **258** that faces the outer sidewall surface **242** when the wing **224a**, **224b** is in the closed configuration and an outer wing surface **260** formed on an opposite side of the wing **224a**, **224b** from the inner wing surface **258**. Each of the inner wing surface **258** and the outer wing surface **260** generally

extend from the lower end **254** to the upper end **256** such that a distance between the inner wing surface **258** and the outer wing surface **260** defines a thickness T_{224} of the wings **224a**, **224b**.

[0079] The conveyor frame **212** may include a hinge **262** connecting the lower end **254** of each wing **224a**, **224b** to the outer sidewall surface **242**. As best shown in FIGS. 4A-5B, the hinge **262** is provided as a living hinge **262** integrally formed with the sidewall **221**, **222** and the corresponding wing **224a**, **224b**. Here, the hinge **262** includes a reduced thickness T_{262} relative to the thickness T_{224} of the wings **224a**, **224b**. Accordingly, the hinge **262** facilitates movement of the wing **224a**, **224b** between the open configuration and the closed configuration by flexing or bending along the longitudinal direction of the conveyor frame **212**.

[0080] With continued reference to FIGS. 4A-5B, the upper end **256** of each wing **224a**, **224b** includes a closure **264** configured to interface with or engage the distal end **238** of the corresponding sidewall **221**, **222** when the wing **224a**, **224b** is in the closed configuration. Additionally, when the wing **224a**, **224b** is in the closed configuration, the closure **264** is configured to cover each of the lower sockets **244** formed in the distal end **238** of the sidewall **221**, **222** such that the closure **264** captures a portion of one of the rollers **214** within the respective lower socket **244**.

[0081] The closure **264** includes an arm **266** extending inwardly from the inner wing surface **258** to a distal end including a rib or tooth **268** that extends away from the arm **266** towards the lower end **254** of the wing **224a**, **224b**. Accordingly, the inner wing surface **258**, the arm **266**, and the tooth **268** cooperate to define a recess **270** having an opening facing the lower end **254** of the wing **224a**, **224b**. In the illustrated example, the closure **264** includes a plurality of the teeth **268** arranged in series along a length of the wing **224a**, **224b**. The longitudinal spacing of the teeth **268** corresponds to the spacing of the lower sockets **244** formed in the distal end **238** of the sidewall **221**, **222** such that each tooth **268** is positioned between an adjacent pair of the lower sockets **244** and is configured to engage the neck **248** formed at the distal end **238**. Accordingly, adjacent or subsequent ones of the teeth **268** may be separated from each other by an upper socket **273** configured to cooperate with the lower socket **244** when the wing is in the closed configuration to capture the shaft **215** of the roller **214** within the conveyor frame **212**.

[0082] Each wing **224a**, **224b** may further include a plurality of spacers **272** and one or more longitudinal ribs **274** formed on the inner wing surface **258**. The plurality of spacers **272** are arranged in series along the inner wing surface **258** between the first end **204** and the second end **206**. Here, the longitudinal spacing of the spacers **272** is configured such that each spacer **272** contacts the outer sidewall surface **242** between adjacent ones of the lower sockets **244** when the wing **224a**, **224b**. The longitudinal ribs **274** include a pair of parallel longitudinal ribs **274** each extending along the direction from the first end **204** to the second end **206**. A first one of the longitudinal ribs **274** is disposed adjacent to the lower end **254** of the wing **224a**, **224b** and a second one of the ribs **274** is positioned between the first longitudinal rib **274** and the upper end **256** of the wing **224a**, **224b**. The longitudinal ribs **274** and the spacers **272** may cooperate to maintain a desired alignment between the wings **224a**, **224b** and the corresponding sidewalls **221**,

222 and to prevent overextension of the hinge 262 when the wings 224a, 224b are moved to the closed configuration.

[0083] As best shown in FIGS. 6 and 7, the outer wing surfaces 260 of the wings 224a, 224b include a plurality of side couplers 276a-276d generally configured for coupling adjacent ones of the conveyor units 202 together when assembled as part of the conveyor system 200. In FIG. 6, the outer wing surface 260 of the first wing 224a includes a first side coupler 276a adjacent to the first end 204 and a second side coupler 276b adjacent to the second end 206. In FIG. 7, the outer wing surface 260 of the second wing 224b includes a third side coupler 276c adjacent to the first end 204 and a fourth side coupler 276d adjacent to the second end 206.

[0084] In the illustrated example, each of the side couplers 276a-276d includes a pair of longitudinal ribs 278 that are spaced apart from each other by a distance $D_{276a}-D_{276d}$. The longitudinal ribs 278 of each side coupler 276a-276d are spaced apart in a manner that allows the first side coupler 276a of a first conveyor unit 202 to interface or mate with the second side coupler 276b of a second conveyor unit 202 when the conveyor units 202 are assembled side-by-side with alternating orientations (i.e., the first side 208 of the first conveyor unit 202 faces the first side 208 of the second conveyor unit 202 or vice versa). Likewise, the longitudinal ribs 278 of the third side coupler 276c are configured to mate or interface with the longitudinal ribs 278 of the fourth side coupler 276d when the conveyor units 202 are assembled.

[0085] Additionally, the side couplers 276a-276d are configured to prevent improper assembly (i.e., not alternating) of the conveyor units 202. For example, the distances $D_{276a}-D_{276d}$ between the longitudinal ribs 278 of the side couplers 276a-276d are configured such that the longitudinal ribs 278 of the first side coupler 276a and the second side coupler 276b will abut or interfere with the longitudinal ribs 278 of the third side coupler 276c and the fourth side coupler 276d if the conveyor units 202 are assembled in a non-alternating manner (i.e., first side 208 of first conveyor unit 202 facing the second side 210 of second conveyor unit 202). This unique spacing between the longitudinal ribs 278 of the various side couplers 276a-276d acts as a poka-yoke to ensure proper assembly (i.e., alternating) of the conveyor units 202.

[0086] With continued reference to FIGS. 2, 6, and 7, each conveyor unit 202 includes the first end coupler 216 disposed at the first end 204 and the second end coupler 218 disposed at the second end 206. Here, each end coupler 216, 218 is attached to a respective end of the conveyor frame 212. In some examples, the end couplers 216, 218 may be integrally formed with the conveyor frame 212. Each of the end couplers 216, 218 includes a coupler base 280a, 280b attached to the end of the conveyor frame 212 and a coupler rail 282 extending from the coupler base 280a, 280b in a direction away from the conveyor frame 212. As discussed below, the coupler rails 282 are generally configured to interface with the track members 102 when the shelving system 10 is assembled.

[0087] Referring to FIGS. 6 and 7, the coupler bases 280a, 280b each have a generally rectangular cross section extending from a proximal first side 284 attached to base 220 and the sidewalls 221, 222 of the conveyor frame 212, and a distal second side 286 formed on an opposite side from the first side 284. A distance between the first side 284 of the

coupler base 280a, 280b and the second side 286 of the coupler base defines a length L_{280a} , L_{280b} of the coupler base.

[0088] Each of the coupler rails 282 forms a first coupling element of a coupling system for securing the end 204, 206 of the conveyor unit 202 to the track member 102. Here, the coupler rail 282 includes a neck portion 288 having a proximal end attached to the second side 286 of the coupler base 280a, 280b and a head portion 290 attached to a distal end of the neck portion 288 and having a greater thickness T_{290} than the neck portion 288. In the illustrated example, the coupling system is configured as a T-slot whereby each of the coupler rails 282 defines the male portion of the T-slot interface while the conveyor track 104 defines the corresponding female portion (i.e., the T-slot). However, the coupling system may be inverted such that the male portion of the interface is provided on the conveyor track 104 and the female portion of the interface is provided on the coupler rail 282.

[0089] Optionally, the coupler bases 280a, 280b may have different lengths L_{280a} , L_{280b} such that the first end coupler 216 extends from the first end 204 of the conveyor frame 212 a different distance than the second end coupler 218. For example, the first coupler base 280a of the first end coupler 216 may have a shorter length L_{280a} than the length L_{280b} of the second coupler base 280b of the second end coupler 218. By providing the coupler bases 280a, 280b with different lengths L_{280a} , L_{280b} , the conveyor units 202 are offset along the longitudinal direction of the conveyor system 10 towards the first end 204. When the conveyor units 202 are installed in an alternating manner, this offset towards the first end 204 provides a corresponding offset in the alignments of the rollers 214 of adjacent ones of the conveyor units 202. Thus, the rollers 214 of a first one of the conveyor units 202 are offset towards the front side 12 while the rollers 214 of an adjacent second one of the conveyor units 202 are offset towards the rear side 14. Offsetting the rollers 214 of adjacent conveyor units 202 increases the overall support provided by the support bed 16 by increasing the number contact points along the length of the conveyor system 200. In other words, offsetting the rollers 214 provides twice as many contact points for supporting merchandise compared to having the rollers 214 of adjacent conveyor units 202 aligned with each other.

[0090] Referring now to FIGS. 8-12, the divider system 300 includes a pair of divider track inserts 302 and one or more of the divider units 304. The track inserts 302 are each configured to be disposed in the divider track 106 of one of the track members 102. Generally, the divider system 300 is configured such that the divider units 304 can be selectively attached to each of the divider track inserts 302 by snapping the divider unit 304 into the divider track insert 302 from the top side 112 of the track member 102. As shown in FIG. 9, each of the divider track inserts 302 is configured to be inserted into the divider track 106 from an open end of one of the track members 102. As best shown in FIGS. 11A and 11B, the divider track insert 302 includes a receiver 310 configured to interface with one of the divider units 304 and a plurality of stabilizers 312a-312c extending outwardly from an outer surface of the receiver 310.

[0091] The receiver 310 of the divider track insert 302 is configured as a U-shaped body including an arcuate lower portion 314 and a pair of legs 316 extending from opposite sides of the lower portion 314. The legs 316 and the lower

portion 314 cooperate to define a lower socket 318 having an opening 320 aligned with the opening defined by the neck portion 142 of the divider track 106. One or both of the legs 316 may include one or more protuberances 319 formed adjacent to a distal end of the leg 316 such that the opening 320 has a lesser width than a width of the lower socket 318.

[0092] In the illustrated example, each of the stabilizers 312a-312c extends outwardly from a proximal end 322 attached to an outer surface of the receiver 310 to a distal end 324 configured to interface with an inner surface of the divider track 106. Particularly, the stabilizers 312a-312c include a pair of lower stabilizers 312a extending from an intersection between the lower portion 314 and one of the legs 316 to a distal end 324 received in a corner formed by an intersection between the base member 120 and a respective one of the inner track wall 122 and the intermediate track wall 124. The stabilizers 312a-312c further include a pair of upper stabilizers 312b extending from the distal ends of the legs 316 to distal ends 324 received in corners formed between each of the track walls 122, 124 and the retainer 128, 130 of the respective track wall 122, 124. Thus, the lower stabilizers 312a and the upper stabilizers 312b are vertically and longitudinally captured at each corner of the head portion 140 of the divider track 106. Optionally, the stabilizers 312a-312c may include any number of intermediate stabilizers 312c extending outwardly from the receiver 310 between the lower stabilizers 312a and the upper stabilizers 312b such that the distal ends 324 contact one of the inner track wall 122 and the intermediate track wall 124 to further secure a position of the divider track insert 302 within the divider track 106.

[0093] In some configurations, the divider track insert 302 may be formed as a composite structure, whereby the receiver 310 includes a first material having a first stiffness and/or coefficient of friction and the stabilizers 312a-312c include a second material having a second stiffness and/or coefficient of friction that is different than the first material. For example, the receiver 310 may form a relatively rigid core having a first stiffness that is greater than a second stiffness of the stabilizers 312a-312c. In other words, the stabilizers 312a-312c may be more resilient than the core defined by the receiver 310 to allow the stabilizers 312a-312c to flex within the divider track 106. Additionally or alternatively, the second material of the stabilizers 312a-312c may have a greater coefficient of friction than the first material of the receiver 310 to provide a gripping interface between the divider track insert 302 and the interior surfaces of the divider track 106.

[0094] Optionally, the stabilizers 312a-312c may be integrally formed with an outer shell 326 that attaches to the outer surface of the receiver 310. The outer shell 326 and the stabilizers 312a-312c are integrally formed with each other and may be co-extruded or co-molded with the receiver 310.

[0095] Referring to FIG. 12, each of the dividers 302 includes a divider wall 330 and a pair of divider coupling tabs 332 disposed at opposite ends of the divider wall 330. Each of the divider walls 330 has a length and a height configured to provide separation between adjacent bays 18 of the shelving system 10. Optionally, the divider wall 330 may include one or more reinforcing ribs 334 extending along a length of the divider wall 330. In the illustrated example, the reinforcing ribs 334 are formed as distended portions of the divider wall 330 having an arcuate cross section extending along the length of the divider wall 330.

The divider wall 330 may further include a clearance notch 336 formed along the bottom side of the divider wall 330 and configured to provide a relief through which the rollers 214 can pass beneath the divider wall 330 as the divider wall is translated along the shelving system 10.

[0096] The divider coupling tabs 332 are attached to a bottom side of the divider wall 330 at opposite ends. Particularly, the divider coupling tabs 332 include a first leg 340 attached to the bottom side of the divider wall 330 and a second leg 342 extending from the first leg 340 in a direction away from the bottom side of the divider wall 330. Here, the first leg 340 may be described as being a “horizontal” leg configured rest atop the inner track wall retainer 128, while the second leg 342 may be described as a “vertical” leg configured to extend downwardly and engage the receiver 310. Thus, each of the first leg 340 and the second leg 342 may be configured with respect lengths and widths to provide a stable interface between the divider unit 304 and the track system 100. The second leg 342 of the divider coupling tab 332 includes a projection 344 disposed adjacent to a lower, distal end of the second leg 342. In the illustrated example, the projection 344 includes a distended portion of the second leg 340 that provides a lower portion of the second leg 342 with a thickness T_{342} that is greater than the width of the opening 320 of the lower socket 318. Thus, to insert the divider coupling tab 332 into the receiver 310, the distal end of the second leg 340 must be “snapped” into the lower socket 318 by biasing the projection 344 between the protuberances 319 of the receiver 310.

[0097] A depth D_{344} of the projection 344 extends from a front surface the second leg 342 to a distal end surface 346 of the projection 344. Optionally, the depth D_{344} of the projection may be greater than a distance from the front surface of the second leg 342 to an opposing interior surface of the lower socket 318 when the lower leg 340 is fully seated within the receiver 310. Accordingly, as shown in FIG. 11A, a distal end surface 346 of the projection 344 may contact the interior surface of the lower socket 318 to provide a frictional interface between the second leg 342 and the receiver 310. This frictional interface is configured to define a threshold lateral force that must be applied to the divider unit 304 to facilitate lateral movement thereof. Thus, the projection 344 may be dimensionally tuned (i.e., greater height, width, depth) or provided with frictional properties (e.g., high-friction materials) to define the desired adjustment threshold. For example, a greater adjustment threshold may be provided by increasing the friction between the projection 344 and the lower socket 318 where it is desired to make it more difficult to translate the divider unit 304 along the divider track 106. Different adjustment thresholds may be utilized for different product types (e.g., heavy products use dividers with greater adjustment threshold).

[0098] By utilizing the continuous frictional interface provided by the receiver 310 and the divider coupling tabs 332, the divider units 304 can be easily installed onto the shelving system 10 by snapping each of the divider coupling tabs 332 into a respective one of the divider tracks 106. The continuous lower sockets 318 accommodate lateral misalignment of the divider coupling tabs 332 of the divider unit 304 by allowing the divider coupling tabs 332 at each end of the divider unit 304 to be snapped into the receiver 310 and then translated after installation to align the ends of the divider unit 304. In contrast, conventional dividers utilize a locking means to prevent lateral movement or misalignment, which

requires perfect lateral alignment to allow assembly of the system. This is particularly challenging in a store environment, where a user may not have clear access or visibility to the rear portion of the shelf.

[0099] With particular reference to FIGS. 13-21, another example of a shelving system 10a is provided. In view of the substantial similarity in structure and function of the components associated with the shelving system 10 with respect to the shelving system 10a, like reference numerals are used hereinafter and in the drawings to identify like components while like reference numerals containing letter extensions are used to identify those components that have been modified.

[0100] Referring to FIG. 13, a track system 100a and a conveyor system 200a according to another example of the disclosure are provided. As used previously, shelving system 10a and components thereof may be described with reference to a front side 12 corresponding to a product dispensing location that may face a store aisle and a rear side 14 formed on the opposite side of the shelving system 10a from the front side 12. Furthermore, the shelving system 10a and components thereof may be described relative to a longitudinal direction or axis extending from the front side 12 to the rear side 14 or a lateral direction or axis extending perpendicular to the longitudinal direction.

[0101] The shelving system 10a may be provided as a standalone unit for use in a retail environment, or may be provided in combination with a plurality of the shelving systems 10a. Furthermore, the shelving system 10a may be configured for direct attachment to one or more shelving support members (not shown), such as uprights or walls, or alternatively, may be installed on existing shelves. Optionally, the shelving system 10a may be provided as a gravity-fed shelving system 10a, whereby the shelving system 10a is oriented at an oblique angle relative to level such that a support bed 16 of the shelving system forms a decline from the rear side 14 of the shelving system 10a to the front side 12 of the shelving system 10a.

[0102] Generally, the track system 100a includes a pair of track members 102a each defining one or more of a conveyor track 104a and an accessory track 108a (FIG. 21). The conveyor system 200a of the shelving system 10a includes one or more conveyor units 202a collectively defining the support bed 16 of the shelving system 10. In the illustrated example, the conveyor system 200a includes a plurality of the conveyor units 202a attached to the track system 100a such that the conveyor units 202a cooperate to define the support bed 16 of the shelving system 10. With reference to FIG. 13, the shelving system 10a includes the track system 100a generally configured to facilitate attachment and lateral translation of the various components of the conveyor system 200a and various accessories. Here, the track system 100a includes a pair of the track members 102a, with a first track member 102a extending along the front side 12 and a second track member 102a extending along the rear side 14. While the track members 102a of the present disclosure are shown as being identical, in some examples one of the track members 102a may be different. For example, one of the track members 102a may be provided without the accessory track 108a. Alternatively, the shelving system 10a may utilize a track system including a divider track, similar to the track system 100 provided above.

[0103] Referring to FIG. 21, each track member 102a includes the conveyor track 104a and the accessory track

108a. For the sake of description, each track member 102a and elements thereof may be described relative to a bottom side 110, a top side 112, an inner side 114 configured to face inward (i.e., towards the opposite track member 102a) and an outer side 116 configured to face outward (i.e., away from the opposite track member 102a). While the track members 102a illustrated in the figures are provided as integral units including both of the tracks 104a, 108a formed of a single piece, one or more of the tracks 104a, 108a may be provided as a detachable element. Furthermore, the track member 102a may be formed with any one of or any combination of the tracks 104a, 108a. For example, the track member 102a may be provided with just the conveyor track 104a or just the accessory track 108.

[0104] The track member 102a includes a base member 120a disposed along the bottom side 110 and a plurality of track walls 122a, 126a extending from the top side of the base member 120. The track walls 122a, 126a cooperate with each other to define the respective conveyor track 104a and accessory track 108a. For example, the track walls 122a, 126a include an inner track wall 122a extending from the base member 120a adjacent to the inner side 114 of the track member 102a and partly defining the conveyor track 104a and an outer track wall 126a extending from the base member 120a at the outer side 116 and cooperating with the inner track wall 122a to define the accessory track 108a. One or both of the track walls 122a, 126a may include a respective end cap or retainer 128a formed at the distal end of the track wall 122a, 126a and configured to partially define the geometry of one of the respective tracks 104a, 108a.

[0105] The conveyor track 104a of the track member 102a is formed as a T-slot configured to receive a corresponding T-shaped coupler element 283a, 283b of the conveyor system 200a along the inner side 114 of the track member 102a. Here, the T-slot includes a head portion 134a having a first height and a narrowed neck portion 136a having a second height that is less than the first height of the head portion 134a. The neck portion 136a defines an opening of the T-slot and faces toward the inner side 114 of the track member 102a. Here, the neck portion 136a is defined between an opposing pair of ribs 138a including a first rib 138a extending upwardly from the top side of the base member 120a and a second rib 138a extending downwardly from a distal end of an inner track wall retainer 128a formed at the distal end of the inner track wall 122a.

[0106] The accessory track 108a is formed adjacent to the outer side 116 of the track member 102a and is defined by the base member 120a, the inner track wall 122a, the outer track wall 126a, and the retainer 128a formed on the inner track wall 122a. The accessory track 108a is optional and may be configured to accept various shelving accessories, such as label holders, security devices, product displays, or the like. In the illustrated example, the accessory track 108a includes an opening formed along the top side 112 of the track member 102a. The accessory track 108a may include one or more ribs or other features configured to interface with corresponding features of an accessory (e.g., a label holder) and to allow the accessory to translate along the lateral direction within the accessory track 108.

[0107] Referring again to FIG. 13, an example of the conveyor system 200a is provided. As shown, the conveyor system 200a includes a pair of conveyor units 202a attached to the track system 100a. However, any width of track

system **100a** may be utilized to include any number of conveyor units **202a**. Each conveyor unit **202a** may be described as having a longitudinal axis extending from a first end **204a** to a second end **206a**. Thus, a length of each conveyor unit **202a** is defined by a distance from the first end **204a** to the second end **206a**. Additionally, as indicated in FIG. 15, each conveyor unit **202a** includes a first side **208a** extending between the first end **204a** and the second end **206a** and a second side **210a** formed on an opposite side from the first side **208a** and extending between the first end **204a** and the second end **206a**. A width of each conveyor unit **202a** is defined by the distance across the conveyor unit **202a** from the first side **208a** to the second side **210a**.

[0108] The conveyor unit **202a** includes a conveyor frame **212a** extending along the lengthwise direction of the conveyor unit **202a** and a plurality of the rollers **214** attached to the conveyor frame **212a**. Generally, the plurality of rollers **214** are arranged in series between the first end **204a** and the second end **206a** of the conveyor unit **202a** such that rotational axes of the rollers **214** are parallel to each other and extend between the first side **208a** and the second side **210a**, thereby defining a continuous support bed **16**.

[0109] As shown in FIG. 14, the conveyor units **202a** further include a first end coupler **216a** disposed at the first end **204a** of the conveyor frame **212a** and a second end coupler **218a** disposed at the second end **206a** of the conveyor frame **212a**. As discussed in greater detail below and illustrated in FIG. 14, the first end coupler **216a** and the second end coupler **218a** extend different lengths from the ends **204a**, **206a** of the conveyor frame **212a** such that the conveyor frame **212a** is offset (i.e., not centered) towards the first end **204a** of the conveyor unit **202a**.

[0110] Referring to FIGS. 16-18 the conveyor frame **212a** includes a base **220a**, a first frame sidewall **221a** extending from a first side of the base **220**, and a second frame sidewall **222a** extending from a second side of the base **220a** on an opposite side of the conveyor frame **212a** than the first frame sidewall **221a**. The base **220a** and each of the frame sidewalls **221a**, **222a** extend continuously along a length of the conveyor unit **202a** from the first end **204a** to the second end **206a**.

[0111] Referring to FIGS. 18 and 19, the base **220a** includes a top side **226a** and a bottom side **228a** formed on an opposite side of the base **220a** from the top side **226a**. Optionally, the base includes a central rib **233a** that extends continuously from the first end **204a** to the second end **206a**. In some examples, the base **220a** including the central rib **233a** includes a constant thickness T_{220a} measured from the top side **226a** to the bottom side **228a**. Thus, the central rib **233a** is defined by a portion of the base **220a** that protrudes from the top side **226a** and defines an elongate channel along the bottom side **228a** from the first end **204a** to the second end **206a**. The base **220a** may further include a plurality of openings **234a** formed through a thickness of the base **220a** on either side of the central rib **233a**. When included, the openings **234a** may be arranged in series along the length of the conveyor frame **212**.

[0112] Each of the frame sidewalls **221a**, **222a** extends from a proximal or lower end **236a** attached to the base **220a** to an upper or distal end **238a** extending away from the base **220a**. In other words, each frame sidewall **221a**, **222a** has a height extending from the top side **226a** of the base **220a** to the distal end **238a**. Generally, the distal end **238a** of each frame sidewall **221a**, **222a** is configured to receive and

secure the rollers **214**. Each frame sidewall **221a**, **222a** may be further described as having a width or thickness extending from an inner sidewall surface **240a** (i.e., facing the other frame sidewall **221a**, **222a**) and an outer sidewall surface **242a** formed on an opposite side from the inner sidewall surface **240**.

[0113] Referring to FIG. 15, the distal end **238a** of each frame sidewall **221a**, **222a** includes a plurality of sockets **244a** arranged in series from the first end **204a** to the second end **206a** of the conveyor unit **202a**. Each of the sockets **244a** is generally configured to receive a shaft **215** or axle of one of the rollers **214** when the rollers **214** are installed in the conveyor frame **212a** (FIGS. 15 and 20C). In the illustrated example, each of the sockets **244a** defines a cylindrical aperture extending through the thickness of the frame sidewall **221a**, **222a** (i.e., from the inner sidewall surface **240a** to the outer sidewall surface **242a**) adjacent to the distal end **238a** of the frame sidewall **221a**, **222a**. In the illustrated example, each of the sockets **244a** are evenly spaced along the length of each frame sidewall **221a**, **222a** and the spacing is selected to provide a desired spacing between adjacent ones of the rollers **214**. Optionally, each of the sockets **244a** may include a socket bearing **245a** formed on the frame sidewall **221a**, **222a**. Generally, the socket bearing **245a** is configured to provide additional bearing surface for supporting a roller shaft **215**. The socket bearing **245a** is configured to support the roller shaft **215** for rotation within the socket **244a**. As shown, the socket bearings **245a** are defined by annular rims surrounding each socket **244a** on the outer sidewall surface **242a**. Thus, the socket bearings **245a** may correspond to a portion of the sidewall **221a**, **222b** that protrudes or has an increased thickness. As discussed below, the socket bearings **245a** may be integrally formed with the frame sidewalls **221a**, **222a** during a stamping process, whereby the socket bearings **245a** and the sidewalls **221a**, **222a** include the same materials.

[0114] As best shown in FIGS. 14, 15, and 19-20C, the distal end **238a** of each frame sidewall **221a**, **222a** includes a plurality of lip elements **247a** each enclosing an upper portion of a respective one of the sockets **244a**. The lip elements **247a** are generally configured to guide the rollers **214** into the sockets **244a**. As best shown in FIG. 18, each of the lip elements **247a** defines a recess along the inner sidewall surface **240a** at the distal end **238a**, which is configured to interface with an axle **215** of the roller **214** when each roller **214** is initially engaged with the sidewall **221a**, **222a**. While the illustrated example provides an arcuate lip element **247a** defining a concave recess relative to the inner sidewall surface **240a**, other geometries may be utilized to accommodate particular roller shaft **215** shapes. Thus, the lip element **247a** is configured to accommodate passage of the roller shaft **215** between the frame sidewalls **221a**, **222a** and into the corresponding sockets **244a** on each frame sidewall **221a**, **222b**. In some examples, a width W_{247a} (FIG. 19) between opposing lip elements **247a** (i.e., laterally aligned across the conveyor frame **212a**) may be less than an overall length of the roller shafts **215**, whereby the rollers **214** must be press fit between the lip elements **247a** and into the sockets **244a**.

[0115] As best shown in FIGS. 17-20B, the conveyor frame **212a** includes a plurality of side couplers **277a**, **277b** generally configured for coupling adjacent ones of the conveyor units **202a** together when assembled as part of the conveyor system **200a**. In FIG. 18, an intermediate segment

of the conveyor frame **212a** is illustrated and includes a first side coupler **277a** and a second side coupler **277b** spaced longitudinally from the first side coupler **277a** along each of the frame sidewalls **221a**, **222a**. Generally, the first side coupler **277a** of a first conveyor unit **202a** is configured to interface or mate with a second side coupler **277b** of an adjacent second conveyor unit **202a** when the conveyor system **200a** is assembled. This interfacing relationship between the side couplers **277a**, **277b** maintains longitudinal alignment between adjacent ones of the conveyor units **202a**.

[0116] With reference to FIGS. **18** and **19**, an opposing pair of the side couplers **277a**, **277b** is shown. Each of the side couplers **277a**, **277b** is formed adjacent to an intersection of the base **220a** and one of the frame sidewalls **221a**, **222b**. Particularly, the side couplers **277a**, **277b** may be formed during a stamping process, whereby material of each frame sidewall **221a**, **222b** is formed into each of the respective side couplers **277a**, **277b**. For example, each of the side couplers **277a**, **277b** may define a tab **277a**, **277b** that is cut from the material of the sidewall **221a**, **222b**, whereby when the frame sidewall **221a**, **222b** is folded upwardly relative to the base **220a**, the material defining each tab **277a**, **277b** remains substantially flat (i.e., parallel to the base **220a**) and a corresponding cut-out or aperture **279a**, **279b** is formed in the frame sidewall **221a**, **222a**.

[0117] With continued reference to FIG. **19**, the first side coupler **277a** extends a first length L_{277a} from the first frame sidewall **221a** and is substantially flush with top side **226a** of the base **220a** of the conveyor frame **212a**. Conversely, the second side coupler **277b** extends a second length L_{277b} from the second sidewall **222a** that is greater than the first length L_{277a} of the first side coupler **277a**. As shown, the second side coupler **277b** is vertically offset from the base **220a**, whereby a lower surface of the second side coupler **277b** is vertically offset from the bottom side **228a** of the base **220a** by a distance D_{227b} corresponding to a thickness T_{227a} of the first side coupler **277a**. Accordingly, when adjacent conveyor units **202a** are assembled, the second side coupler **277b** of one of the conveyor units **202a** overlaps the first side coupler **277a** of an adjacent conveyor unit **202a**, whereby a distal end of the second side coupler **277b** at least partially extends into the aperture **279a** associated with the first side coupler **277a**.

[0118] In addition to maintaining alignment, the side couplers **277a**, **277b** are configured to prevent improper assembly (i.e., not alternating) of the conveyor units **202a**. Adjacent ones of the conveyor units **202a** are configured to be assembled in an alternating arrangement, whereby a first end **204a** of the first conveyor unit **202a** is aligned with (i.e., couples to the same track member **102a**) as a second end **206a** of an adjacent conveyor unit **202a**. The side couplers **277a**, **277b** prevent improper assembly by creating an interference if adjacent ones of the conveyor units **202a** are oriented in the same direction. For example, if assembled improperly, a distal end of one of the second side couplers **277b** will abut an outer sidewall surface **240a** of an adjacent conveyor unit **202a** rather than being received within the corresponding aperture **279a**, thereby preventing the conveyor units **202a** from being fully assembled and resulting in a gap between adjacent conveyor units **202a**.

[0119] With continued reference to FIG. **14**, each conveyor unit **202a** includes the first end coupler **216a** disposed at the first end **204a** and the second end coupler **218a**

disposed at the second end **206a**. Here, each end coupler **216a**, **218a** is integrally formed with the conveyor frame **212a** at a respective end of the conveyor frame **212a**. Each of the end couplers **216a**, **218a** includes a coupler base **281a**, **281b** extending from the base **220a** of the frame **212a** and a pair of coupler ears **283a**, **283b** extending from one of the frame sidewalls **221a**, **222b**. As discussed below, the coupler bases **281a**, **281b** are formed integrally with the base **220a** of the frame **212a** and the coupler ears **283a**, **283b** are formed integrally with the respective sidewalls **221a**, **222b**, but the coupler ears **283a**, **283b** are independent of or disconnected from the coupler bases **281a**, **281b**. This configuration allows the couplers bases **281a**, **281b** to be formed using a stamping process, whereby the coupler elements **281a**, **281b**, **283a**, **283b** are cut or stamped from a common sheet of material and then formed into the conveyor frame **212a**.

[0120] As shown, each coupler base **281a**, **281b** includes a vertical neck portion extending from the base **220a** and a coupler lip extending horizontally (i.e., parallel to the base **220a**) from a distal end of the neck portion. The coupler lip defines a length L_{281a} , L_{281b} of the respective coupler bases **281a**, **281b** formed at each end **204a**, **206a**. For example, as shown in FIG. **14**, the length L_{281a} of the coupler base **281a** formed at the first end **204a** is greater than the length L_{281b} of the coupler base **281b** formed at the second end **206a**, whereby when adjacent conveyor units **202a** are assembled to the track member **102a**, the lips of the coupler base **281a**, **281b** interface with a corresponding coupler channels **143** formed in the track member **102a**.

[0121] Each of the coupler ears **283a**, **283b** forms a first coupling element of a coupling system for securing the end **204a**, **206a** of the conveyor unit **202a** to the track member **102a**. Here, each of coupler ears **283a**, **283b** includes a neck portion **288a** having a proximal end attached to one of the frame sidewalls **221a**, **222a** and a head portion **290a** attached to a distal end of the neck portion **288** and having a greater thickness T_{290} than the neck portion **288**. In the illustrated example, the coupling system is configured as a T-slot whereby each of the coupler ears **283a**, **283b** defines the male portion of the T-slot interface while the conveyor track **104a** defines the corresponding female portion (i.e., the T-slot). However, the coupling system may be inverted such that the male portion of the interface is provided on the conveyor track **104a** and the female portion of the interface is provided on end coupler **216a**, **218a**. Lengths that each of the coupler ears **283a**, **283b** extend from each end **204a**, **206a** of the conveyor frame **212a** correspond to the lengths L_{281a} , L_{281b} of the coupler bases **281a**, **281b**, whereby respective pairs of coupler bases **281a**, **281b**, and coupler ears **283a**, **283b** corresponding to each end **204a**, **206a** cooperate to provide adjacent ones of the conveyor units **202a** with offset longitudinal positions when assembled to the track members **102a**. Offsetting the rollers **214** of adjacent conveyor units **202a** increases the overall support provided by the support bed **16** by increasing the number contact points along the length of the conveyor system **200a**. In other words, offsetting the rollers **214** provides twice as many contact points for supporting merchandise compared to having the rollers **214** of adjacent conveyor units **202a** aligned with each other.

[0122] With reference to FIGS. **16-18**, the conveyor frame **212a** may be formed as a modular structure including a first end segment **291a**, one or more intermediate segments **291b**,

and a second end segment **291c**. As described in greater detail below with respect to FIG. 18, the segments **291a-291c** are coupled to each other at segment joints defined by a female segment end **292** on a first one of the frame segments **291a-291c** and a male segment end **293** on another one of the frame segments **291a-291c**. Particularly, the first end segment **291a** extends from the first end **204a** including the first end coupler **216a** to an opposite end defining a female segment end **292**. Conversely, the second end segment **291c** extends from the second end **206a** including the second end coupler **218a** to an opposite end defining a male segment end **293**. The intermediate segment **291b** extends from a first end defining a female segment end **292** to a second end defining a male segment end **293**. Thus, the female segment end **292** of the intermediate segment **291b** is configured to interface with the male segment end **293** of the second end segment **291c** and the male segment end **293** of the intermediate segment **291b** is configured to interface with the female segment end **292** of the first end segment **291a**. Additional intermediate segments **291b** may be added between the first end segment **291a** and the second end segment **291c** to modify an overall length of the conveyor frame **212a**.

[0123] Turning to FIG. 18, one of the intermediate segments **291b** is shown and includes a female segment end **292** and a male segment end **293**. The female segment end **292** is defined by terminal ends of the base **220a** and each of the frame sidewalls **221a**, **222a**. At the opposite end, the male segment end **293** includes one or more frame couplers **294**, **295** configured to overlap the female segment end **293** of an adjacent segment **291a**, **291b**, **291c** (FIG. 17). The frame couplers **294**, **295** include one or more segment lips **294** extending from the base **220a** and a pair of segment ears **295** extending from the frame sidewalls **221a**, **222a**. As shown in FIG. 17, the male segment end **293** includes a pair of the segment lips **294**, whereby one of the segment lips extends from the base **220a** along the longitudinal direction on each side of the central rib **233a**. The segment lips **294** extend horizontal to the base **220a**, but are offset in a vertical direction relative to the base **220a** so as to overlap the top side **226a** of a base **220a** of a corresponding female segment end **292** when assembled. Particularly, the segment lips **294** may be offset by the same distance D_{277b} as the second side couplers **277b** previously described.

[0124] In addition to the segment lips **294**, the male segment ends **293** include the segment ears **295** extending from each frame sidewall **221a**, **222a**. In the illustrated example, each of the segment ears **295** extends along the longitudinal direction from the respective frame sidewall **221a**, **222a** and is offset outwardly from the outer sidewall surface **242a** by a distance corresponding to the thickness of the frame sidewall **221a**, **222a**. Thus, the segment ears **295** are configured to overlap the outer sidewall surfaces **242a** of an adjacent segment **291a**, **291b** when the conveyor frame **212a** is assembled. An upper edge of each of the segment ears **295** includes a recess configured to engage one of the socket bearings **245a** of the mating segment **291a**, **291b** when the conveyor frame **212a** is assembled. For example, as shown in FIG. 17, when the conveyor frame **212a** is assembled, a socket bearing **245a** of the front end segment **291a** rests within the recess **295a** of the segment ear **295** of the intermediate segment **291b** to secure the two segments **291a**, **291b** in the assembled state.

[0125] Each of the frame segments **291a-291c** may be manufactured as a unitary body. For example, all of the features of the frame segments **291a**, **291c**, socket bearings **245a**, the side couplers **277a**, **277b**, the segment lips **294**, and the segment ears **295** may be formed in a one or more stamping processes from a single blank or sheet of material. Thus, in addition to providing improved functionality, the design of the frame segments **291a-291c** improves manufacturing efficiencies in comparison to systems requiring subsequent assembly steps.

[0126] With particular reference to FIGS. 22-27C, another example of a conveyor system **200b** is provided. In view of the substantial similarity in structure and function of the components associated with the conveyor systems **200**, **200a** with respect to the conveyor system **200b**, like reference numerals are used hereinafter and in the drawings to identify like components while like reference numerals containing letter extensions are used to identify those components that have been modified.

[0127] In the illustrated example, the conveyor system **200b** includes a pair of generic conveyor units **202b** for the sake of illustrating the unique features of the conveyor system **200b** relative to the other examples of conveyor systems described herein. Thus, each of the conveyor frames **212b** is provided without any form of end couplers for attaching to a track member. However, the conveyor system **200b** may be configured with end couplers according to any of the examples provided herein.

[0128] The conveyor frame **212b** is provided as a modular structure including a conveyor chassis **219b** and a pair of frame sidewalls **221b** detachably coupled (i.e., can be detached and reattached without permanent damage to the structure) to the conveyor chassis **219b** on opposite sides. As best shown in FIGS. 23-25, the chassis **219b** includes the base **220b** and a pair of chassis sidewalls **223b** extending along a length of the base **220a** on opposite sides. Particularly, a first one of the chassis sidewalls **223b** extends from the top side **226b** of the base **220b** along a left side and a second one of the sidewalls **223b** extends from the top side **226b** of the base along a right side. As shown, the chassis sidewalls **223b** are parallel to each other and each have a height H_{223b} extending to a distal end of the chassis sidewall **223b**.

[0129] The base **220b** includes a plurality of receptacles **296** configured to interface with a corresponding portion each frame sidewall **221b**. In the illustrated example, the receptacles include apertures formed through a thickness of the base **220b** adjacent to each chassis sidewall **223b**. For example, the base **220b** is shown with three receptacles **296** formed along the left chassis sidewall **223b** and three receptacles **296** formed along the right chassis sidewall **223b**. One or more of the receptacles **296** may include a base retainer **297** configured to interface with a corresponding sidewall retainer **253** of the frame sidewall **221b** to secure the frame sidewall **221b** to the base **220b**. In the illustrated example, the base retainer **297** includes a flange **297** formed adjacent to an inner side (i.e., closer to the longitudinal axis A_{219b}) of the receptacle **296**. As shown in FIG. 27A, the flange **297** is vertically offset from the bottom side **228b** of the base **220b** such that a bottom edge of the flange **297** is spaced apart from a shelf support surface when the base **220b** is installed a shelf support bed **16**. This space or gap between the bottom of the flange **297** and the shelf provides an area in which the sidewall retainer **253** is

received to engage the bottom of the flange 297. Optionally, the flange 297 may be unitarily formed with the base 220a (e.g., via stamping or molding).

[0130] With continued reference to FIGS. 24 and 25, each of the frame sidewalls 221b is configured to be selectively attached to the base 220b along one of the chassis sidewalls 223b. Generally, the frame sidewalls 221b may be described as having a height extending in a vertical direction from the distal end 238b at the top to a proximal end 239b. The distal end 238b is generally configured to receive the rollers 214 and the proximal end 239b is generally configured for attaching to the base 220b.

[0131] As shown in FIG. 25, the proximal end 239b includes a plurality of tabs 251a, 251b arranged along a length of the frame sidewall 221b. The tabs 251a, 251b are configured to interface with the chassis sidewalls 223b and the receptacles 296 to attach and secure the frame sidewalls 221b to the base 220b. The tabs 251a, 251b include a plurality of outer tabs 251a and a plurality of inner tabs 251b. As best shown in FIG. 26, the inner tabs 251b are spaced inwardly from the outer tabs 251a to define a sidewall channel 255b configured to mate with the chassis sidewall 223b. In the illustrated example, the outer tabs 251a are substantially flush with and define a portion of the outer sidewall surface 242b, while the inner tabs 251b are inwardly offset from the inner sidewall surface 241b to define the channel 255b.

[0132] When the frame sidewalls 221b are assembled to the base 220b, the outer tabs 251a and the inner tabs 251b are alternately arranged along opposite sides of each chassis sidewall 223b, whereby the tabs 251a, 251b straddle the chassis sidewall 223b. The inner tabs 251b have a length L_{251b} that corresponds to the height H_{223b} of the chassis sidewall 223b, whereby a distal end of each inner tab 251b extends into one of the receptacles 296 and below the flange 297. The inner tabs 251b may include the sidewall retainer 253 configured to engage the flange 297 adjacent to each receptacle 296. As shown, the sidewall retainer 253 includes a tooth 253 formed on an inner surface (i.e., facing the center of the base 220b) at the distal end of inner tab 251b, whereby the tooth 253 is configured to “catch” the bottom edge of the flange 297 when the frame sidewall 221b is fully engaged with the base 220b.

[0133] With continued reference to FIG. 25, the frame sidewalls 221b may define an inner shoulder 249b extending along a length of the frame sidewall 221b. The inner shoulder 249b is formed along the inner sidewall surface 240a and provides a structural interface between the inner sidewall surface 240a and the inner tabs 251b. Namely, the inner tabs 251b depend from a bottom side of the inner shoulder 249b while an upper surface of the inner shoulder 249b converges with the inner sidewall surface 240a. Optionally, the inner shoulder 249b may include a plurality of recesses 298 each configured to receive an end portion of an outer circumference of a roller 214.

[0134] Referring to FIG. 24, the frame sidewalls 221b include a plurality of sockets 244b arranged in series along the lengthwise direction. Each of the sockets 244b defines an opening at the distal end 238b of the frame sidewall 221b for receiving one of the shafts 215 of one of the rollers 214. In the illustrated example, each socket 244b includes an elongate lip element 247b extending across the opening of the socket 244b at the distal end 238b. The lip element 247b is offset towards and flush with the outer sidewall surface 242b

whereby an inner guide surface 299 of the lip element 247b is offset or recessed from the inner sidewall surface 240b. Furthermore, the inner guide surface 299 is formed at an oblique angle relative to the inner sidewall surface 240b and defines a ramp or biasing surface for guiding and retaining a roller shaft 215 into the socket 244. For example, as shown in FIGS. 27A-27C, when the frame sidewalls 221b are installed on the base 220b, a distance between the lip elements 247b of the opposite sidewalls 221b may be less than an overall length of the roller 214, whereby the shafts 215 of the roller cannot freely drop into the sockets 244b. Thus, a roller 214 may be installed by applying a downward force F to press the shafts 215 of the roller 214 between the lip elements 247b, whereby the ends of the roller shafts 215 bias against the angled inner guide surface 299 of the lip element 247b to bias or flex the distal ends 238 of the frame sidewalls 221b outwardly in the direction D_{221b} (FIG. 27B). Once the roller shafts 215 are seated within the sockets 244, the resiliency of the frame sidewalls 221b causes the distal ends 238 to return inwardly, whereby the shafts 215 of the rollers are captured within the sockets 244b by a bottom side of the lip elements 247b. In this example, the sockets 244b have a substantially constant width W_{244b} that is sized to provide a slip fit with the roller shafts 215.

[0135] With particular reference to FIGS. 28-34, another example of a shelving system 10c is provided. In view of the substantial similarity in structure and function of the components associated with the shelving systems 10, 10a, 10b with respect to the shelving system 10c, like reference numerals are used hereinafter and in the drawings to identify like components while like reference numerals containing letter extensions are used to identify those components that have been modified.

[0136] In the illustrated example, the shelving system 10c includes a conveyor system 200c including one or more conveyor units 202c assembled to a track system 100a in a similar manner as in the shelving system 10a described previously. Here, each conveyor unit extends from a first end 204c to a second end 206c. As shown, the conveyor system 200c includes a pair of conveyor units 202c for the sake of illustrating the unique features of the conveyor system 200c relative to the other examples of conveyor systems described herein. Thus, each of the conveyor frames 212c is provided within any form of end couplers for attaching to a track member. However, the conveyor system 200c may be configured with end couplers according to any of the examples provided here.

[0137] The conveyor frame 212c is provided as a modular structure including a base 220c and a pair of frame sidewalls 221c, 221d detachably coupled (i.e., can be detached without permanent damage to the structure) to the base 220c on opposite sides. As best shown in FIG. 30, the base 220c may be incorporated in a chassis 219c including a pair of chassis sidewalls 223c extending along a length of the base 220c on opposite sides. Particularly, a first one of the chassis sidewalls 223c extends from the top side 226c of the base 220c along a left side and a second one of the chassis sidewalls 223c extends from the top side 226c of the base along a right side. As shown, the chassis sidewalls 223c are parallel to each other and each have a height H_{223c} extending to a distal end of the chassis sidewall 223c.

[0138] The base 220c includes a plurality of receptacles 296c configured to interface with a corresponding portion each frame sidewall 221c, 221d. In the illustrated example,

the receptacles 296c include apertures formed through a thickness of the base 220c adjacent to each chassis sidewall 223c. Particularly, each of the receptacles 296c includes a first portion formed through the base 220c and a second portion formed through the chassis sidewall 223c, whereby an upper edge of the receptacle 296c formed in the chassis sidewall 223c defines a base retainer 297c (FIG. 33) configured to interface with a corresponding retainer 253c, 253d of one of the frame sidewalls 221c.

[0139] With continued reference to FIGS. 30-32, each of the frame sidewalls 221c, 221d is configured to be selectively attached to the base 220c along one of the chassis sidewalls 223c. In the illustrated example, the frame sidewalls 221c, 221d include primary frame sidewalls 221c and secondary frame sidewalls 221d having a different length than the primary frame sidewalls 221c. For example, the secondary frame sidewalls 221d may have a shorter length than the primary frame sidewalls 221c. While the lengths of the frame sidewalls 221c, 221d are different, the features and functions of the sidewalls 221c, 221d are substantially the same. Generally, a height of the frame sidewalls 221c, 221d may be described as extending in a vertical direction from the distal end 238c, 238d at the top to a proximal end 239c, 239d at the bottom. The distal end 238c, 238d is generally configured to receive the rollers 214 and the proximal end 239c, 239d is generally configured for attaching to the chassis 219c.

[0140] As shown in FIGS. 30-32, the proximal ends 239c, 239d of the frame sidewalls 221c, 221d include a plurality of tabs 251c-251e arranged along a length of the frame sidewall 221c, 221d. The tabs 251c-251e are configured to interface with the chassis sidewalls 223c and the receptacles 296c to attach the frame sidewalls 221c to the base 220c. Each frame sidewall 221c, 221d includes one or more outer tabs 251c, 251e and one or more inner tabs 251d, 251f. As best shown in FIG. 32 with respect to the secondary frame sidewall 221d, the inner tabs 251d, 251f are spaced inwardly from the outer tabs 251c, 251e to define a sidewall channel 255c, 255d configured to mate with the chassis sidewall 223c. In the illustrated example, the outer tabs 251c, 251e are substantially flush with and define a portion of the outer sidewall surface 242c, 242d, while the inner tabs 251d, 251f are inwardly offset from the inner sidewall surface 241b to define the channel 255c, 255d.

[0141] When the frame sidewalls 221c, 221d are assembled to the base 220c, the outer tabs 251c, 251e and the inner tabs 251e, 251f are alternately arranged along opposite sides of each chassis sidewall 223c, whereby the respective pairs of tabs 251c-251f of each frame sidewall 221c, 221d straddle the chassis sidewall 223c. The outer tabs 251c, 251e may include one or more sidewall retainers 253c, 253d configured to engage the base retainer 297c defined by the receptacle 296c. With reference to FIG. 32, an example of the outer tab 251e of the secondary frame sidewall 221d is provided for illustration. As shown, the sidewall retainers 253c, 253d include a plurality of teeth 253c, 253d formed on an outer surface (i.e., facing away from the center of the base 220c) at the distal end of inner tab 251e, whereby the tooth 253c, 253d is configured to “catch” the base retainer 297c (i.e., the bottom edge of the chassis sidewall 223c, 253d at the receptacle 296c) when the frame sidewall 221c, 221d is fully engaged with the base chassis 219c. As shown in FIG. 32, the outer tabs 251d, 251f include notches or reliefs 400 that are aligned with each of the teeth 253c, 253d. Thus,

when the frame sidewalls 221c, 221d are assembled to the base (FIG. 30) and the teeth 253c, 253d are engaged with the receptacles 296c, the teeth 253c, 253d remain exposed and accessible via the notches or reliefs 400 formed in the inner tabs 251d, 221f, whereby the teeth 253c, 253d can be disengaged from the receptacles 296c through the notches to detach the frame sidewalls 221c, 221d from the base 220c.

[0142] The frame sidewalls 221c, 221d may define an inner shoulder 249c, 249d extending along a length of the frame sidewall 221c, 221d. The inner shoulder 249c, 249d is formed along the inner sidewall surface 240c, 240d and provides an attachment interface between the inner sidewall surface 240c, 240d and the inner tabs 251d, 251e. Namely, the inner tabs 251d, 251e depend from a bottom side of the inner shoulder 249c, 249d while an upper surface of the inner shoulder 249c, 249d converges with the inner sidewall surface 240c, 240d. Optionally, the inner shoulder 249c, 249d may include a plurality of recesses 298 each configured to receive an end portion of an outer circumference of a roller 214.

[0143] Referring to FIGS. 30-34, the frame sidewalls 221c, 221d include a plurality of the sockets 244b as previously described with respect to the frame sidewalls 221b. Thus, a roller 214 may be installed by applying a downward force F to press the shafts 215 of the roller 214 between the lip elements 247b, whereby the ends of the roller shafts 215 bias against the angled inner guide surface 299 of the lip element 247b to bias or flex the distal ends 238 of the frame sidewalls 221c outwardly in the direction. Once the roller shafts 215 are seated within the sockets 244b, the resiliency of the frame sidewalls 221c causes the distal ends 238 to return inwardly, whereby the shafts 215 of the rollers are captured within the sockets 244b by a bottom side of the lip elements 247b. In this example, the sockets 244b have a substantially constant width W_{244b} that is sized to provide a slip fit with the roller shafts 215.

[0144] The conveyor units 202a are assembled by initially aligning the channels 255c, 255d formed in the proximal ends 239c, 239d of the frame sidewalls 221c, 221d with the distal ends of the chassis sidewalls 223c. Additionally, the sidewall retainers 253c, 253d are vertically aligned with the respective receptacles 296c. The sidewalls 221c, 221d are then lowered onto the chassis sidewalls 223c such that the chassis sidewalls 223c are received within the channels 255c, 255d and the sidewall retainers 253c, 253d “snap” into the receptacles 296c. Here, a top edge of the sidewall retainer 253c, 253c engages the lower edge defining the base retainer 297c to secure a vertical position of the frame sidewall 221c, 221d. The rollers 214 are then assembled to the conveyor unit in the manner described above.

[0145] The frame chassis 219c may include a first material, such as a metal, and the frame sidewalls 221c, 221d may include a second material, such as a polymeric material. Thus, the features of the frame chassis 219c may be formed using metal stamping processes and the features of the frame sidewalls 221c, 221d may be formed using polymer molding processes, such as injection molding. By providing a hybrid structure including metal and polymers, material properties and manufacturing processes are improved by providing the chassis 219c with increased strength and simplified manufacturing while still allowing the frame sidewalls 221c, 221d to be formed with more complex geometries permitted by polymer molding.

[0146] Example configurations are provided so that this disclosure will be thorough, and will fully convey the scope of the disclosure to those of ordinary skill in the art. Specific details are set forth such as examples of specific components, devices, and methods, to provide a thorough understanding of configurations of the present disclosure. It will be apparent to those of ordinary skill in the art that specific details need not be employed, that example configurations may be embodied in many different forms, and that the specific details and the example configurations should not be construed to limit the scope of the disclosure.

[0147] The terminology used herein is for the purpose of describing particular exemplary configurations only and is not intended to be limiting. As used herein, the singular articles “a,” “an,” and “the” may be intended to include the plural forms as well, unless the context clearly indicates otherwise. The terms “comprises,” “comprising,” “including,” and “having,” are inclusive and therefore specify the presence of features, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, steps, operations, elements, components, and/or groups thereof. The method steps, processes, and operations described herein are not to be construed as necessarily requiring their performance in the particular order discussed or illustrated, unless specifically identified as an order of performance. Additional or alternative steps may be employed.

[0148] When an element or feature is referred to as being “on,” “engaged to,” “connected to,” “attached to,” or “coupled to” another element or layer, it may be directly on, engaged, connected, attached, or coupled to the other element or layer, or intervening elements or layers may be present. In contrast, when an element is referred to as being “directly on,” “directly engaged to,” “directly connected to,” “directly attached to,” or “directly coupled to” another element or layer, there may be no intervening elements or layers present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., “between” versus “directly between,” “adjacent” versus “directly adjacent,” etc.). As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

[0149] The terms first, second, third, etc. may be used herein to describe various elements, components, regions, layers and/or sections. These elements, components, regions, layers and/or sections should not be limited by these terms. These terms may be only used to distinguish one element, component, region, layer or section from another region, layer or section. Terms such as “first,” “second,” and other numerical terms do not imply a sequence or order unless clearly indicated by the context. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the example configurations.

What is claimed is:

1. A conveyor system for a retail shelf, the conveyor system comprising:

one or more conveyor units each including:

a base extending from a first end to a second end; and
a first side attached to the base and having a (i) first side coupler including a first pair of ribs disposed adjacent to the first end of the base and spaced apart from each other by a first distance and (ii) a second side

coupler including a second pair of ribs disposed adjacent to the second end of the base and spaced apart from each other by a second distance that is less than the first distance.

2. The conveyor system of claim 1, wherein each of the one or more conveyor units includes a second side attached to an opposite side of the base from the first side and having (i) a third side coupler including a third pair of ribs disposed adjacent to the first end of the base and spaced apart from each other by a third distance and (ii) a fourth side coupler including a fourth pair of ribs disposed adjacent to the second end of the base and spaced apart from each other by a fourth distance that is greater than the first distance.

3. The conveyor system of claim 2, wherein the third distance is less than the first distance and greater than the second distance.

4. The conveyor system of claim 2, wherein the fourth distance is greater than the first distance.

5. The conveyor system of claim 1, wherein the first side coupler of a first one of the one or more conveyor units is configured to mate with the second side coupler of a second one of the one or more conveyor units.

6. The conveyor system of claim 5, wherein the first side coupler of the first one of the one or more conveyor units is configured to interfere with the third side coupler of the second one of the one or more conveyor units.

7. The conveyor system of claim 2, wherein the first side includes a first plurality of sockets arranged in series between the first end and the second end.

8. The conveyor system of claim 7, wherein the second side includes a second plurality of sockets arranged in series between the first end and the second end.

9. The conveyor system of claim 8, wherein at least one of the first plurality of sockets or the second plurality of sockets is enclosed.

10. The conveyor system of claim 1, further comprising a plurality of roller units each including a first roller shaft at a first end and a second roller shaft at an opposite second end.

11. A conveyor system for a retail shelf, the conveyor system comprising:

a conveyor chassis formed of a first material and including a base and a chassis sidewall extending a first height from the base; and

a frame sidewall formed separately from the conveyor chassis of a second material and including a proximal end defining a sidewall channel configured to receive the chassis sidewall and an opposite distal end including a plurality of sockets.

12. The conveyor system of claim 11, wherein the frame sidewall includes one or more tabs cooperating to define the sidewall channel at the proximal end of the frame sidewall.

13. The conveyor system of claim 12, wherein the one or more tabs includes one or more inner tabs extending from a first side of the frame sidewall and one or more outer tabs extending from an opposite second side of the frame sidewall and separated from the inner tabs by the sidewall channel.

14. The conveyor system of claim 11, wherein the conveyor chassis includes at least one end coupler attached at an end of the conveyor chassis.

15. The conveyor system of claim 14, wherein the end coupler includes at least one coupler ear integrally formed

with one of the sidewalls and coupler base integrally formed with the base, the coupler ear being independent from the coupler base.

16. A conveyor system for a retail shelf, the conveyor system comprising:

- a base, a first sidewall extending from the base to a first distal end including a first plurality of sockets defining an aperture extending through a thickness of the first sidewall; and
- a second sidewall extending from the base to a second distal end and including a second plurality of sockets each defining an aperture extending through a thickness of the second sidewall.

17. The conveyor system of claim **16**, wherein at least one of the first plurality of sockets or the second plurality of sockets includes enclosed sockets.

18. The conveyor system of claim **17**, wherein at least one of the first plurality of sockets or the second plurality of sockets includes a lip element disposed adjacent to or along the socket.

19. The conveyor system of claim **18**, further comprising a plurality of rollers each including a first shaft at a first end configured to engage one of the first plurality of sockets and a second shaft at a second end configured to engage a one of the second plurality of sockets.

20. The conveyor system of claim **19**, wherein the first plurality of the sockets include lip elements and a length of the roller from the first shaft to the second shaft is greater than a distance from the lip elements to the second sidewall.

* * * * *