



US 20250261405A1

(19) **United States**

(12) **Patent Application Publication**
Young et al.

(10) **Pub. No.: US 2025/0261405 A1**

(43) **Pub. Date: Aug. 14, 2025**

(54) **SEMICONDUCTOR DEVICE AND METHOD
OF FORMING THE SAME**

Publication Classification

(71) Applicant: **Taiwan Semiconductor
Manufacturing Company, Ltd.,**
Hsinchu (TW)

(72) Inventors: **Bo-Feng Young, Taipei (TW); Sai-Hooi
Yeong, Hsinchu County (TW); Chi-On
Chui, Hsinchu City (TW); Chien-Ning
Yao, Hsinchu (TW)**

(73) Assignee: **Taiwan Semiconductor
Manufacturing Company, Ltd.,**
Hsinchu (TW)

(21) Appl. No.: **19/192,381**

(22) Filed: **Apr. 29, 2025**

Related U.S. Application Data

(60) Division of application No. 17/873,175, filed on Jul. 26, 2022, now Pat. No. 12,310,056, which is a continuation of application No. 16/745,340, filed on Jan. 17, 2020, now Pat. No. 11,444,202.

(51) **Int. Cl.**

H10D 30/67 (2025.01)

H01L 21/02 (2006.01)

H10D 30/01 (2025.01)

H10D 62/10 (2025.01)

H10D 64/01 (2025.01)

(52) **U.S. Cl.**

CPC ... H10D 30/6713 (2025.01); **H01L 21/02532**

(2013.01); H01L 21/02603 (2013.01); **H10D**

30/031 (2025.01); **H10D 30/6735** (2025.01);


H10D 30/6757 (2025.01); **H10D 62/121**

(2025.01); H10D 64/017 (2025.01)

(57)

ABSTRACT

Provided are a semiconductor device and a method of forming the same. The semiconductor device includes a substrate, a plurality of semiconductor nanosheets, a source/drain (S/D) region, a gate stack, and a liner layer. The substrate includes at least one fin. The plurality of semiconductor nanosheets are stacked on the at least one fin. The S/D region abuts the plurality of semiconductor nanosheets. The gate stack wraps the plurality of semiconductor nanosheets. The liner layer lines a bottom surface and a sidewall of the S/D region and is sandwiched between the S/D region and the gate stack.

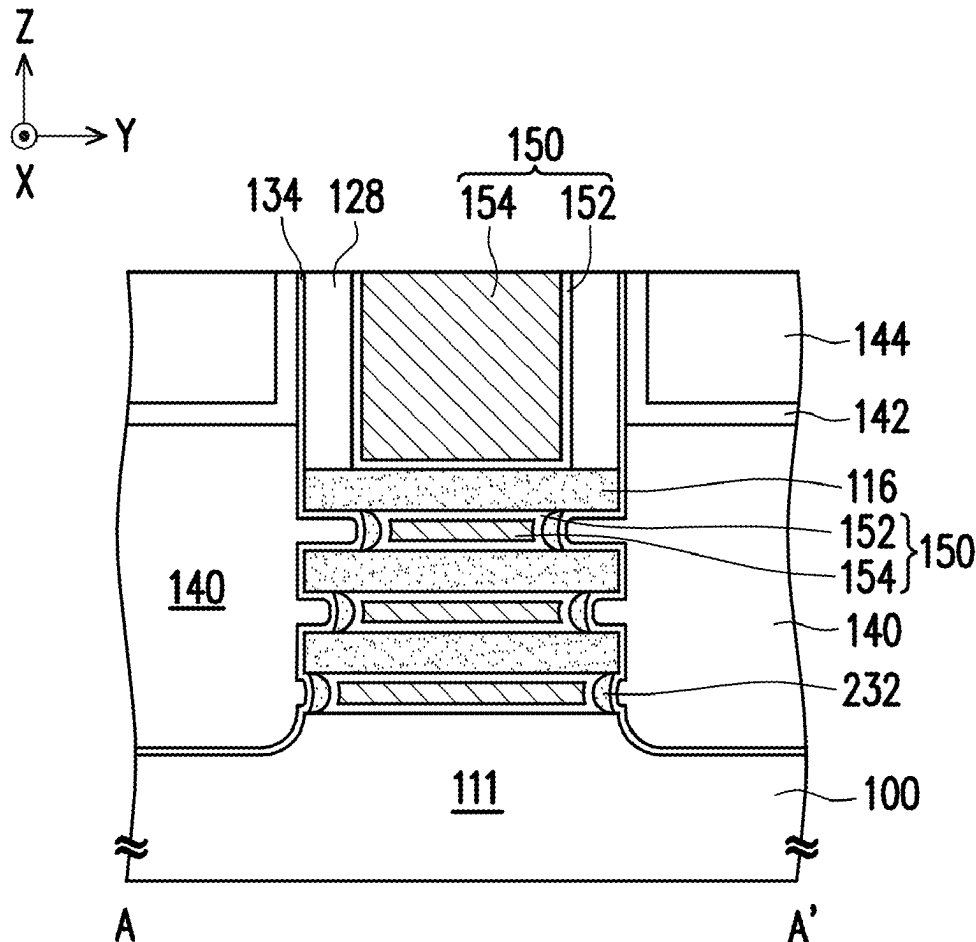

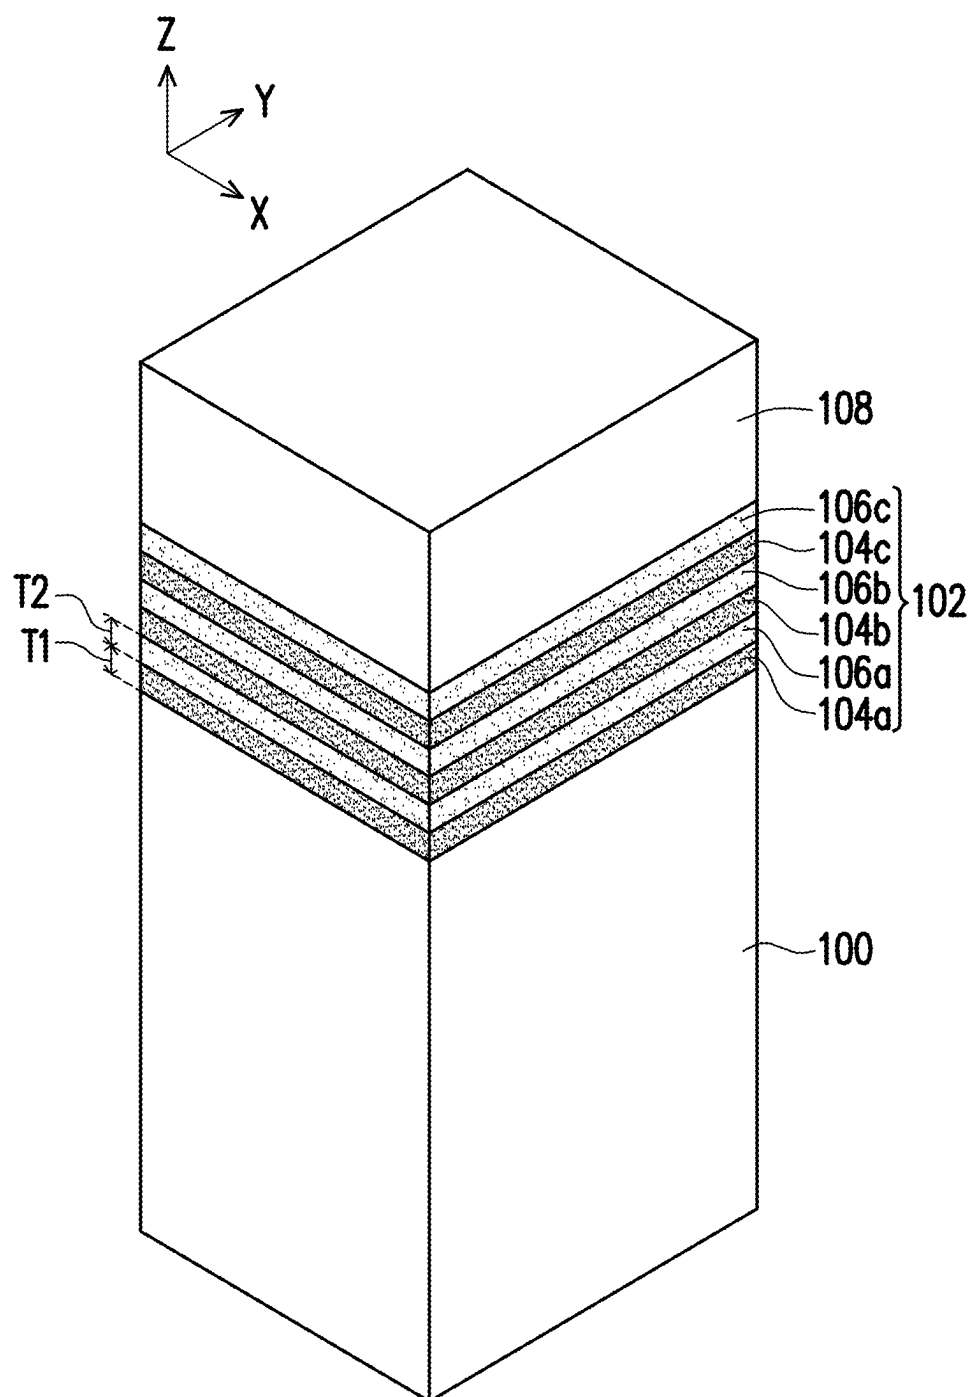


FIG. 1

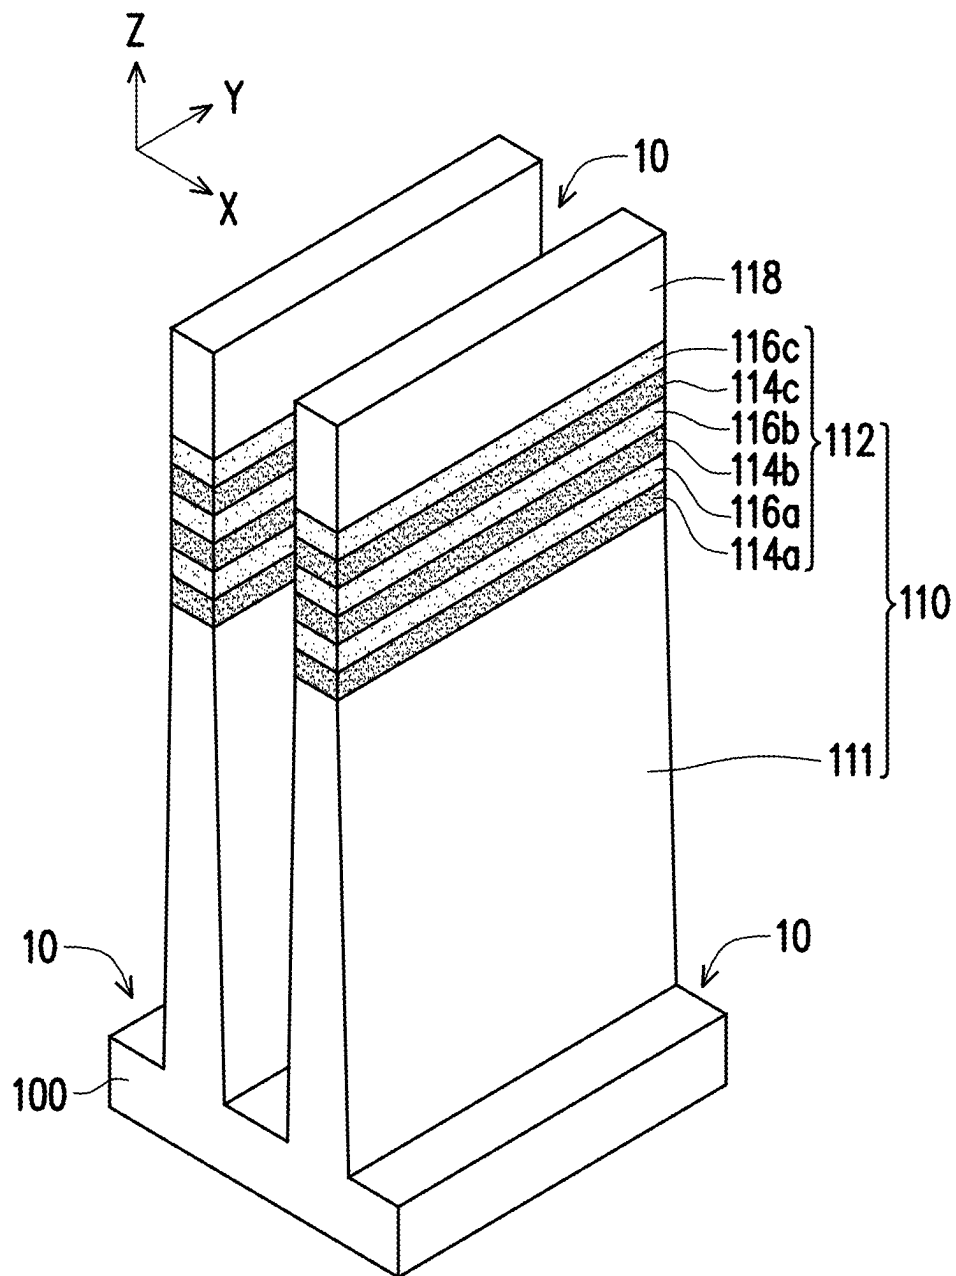


FIG. 2

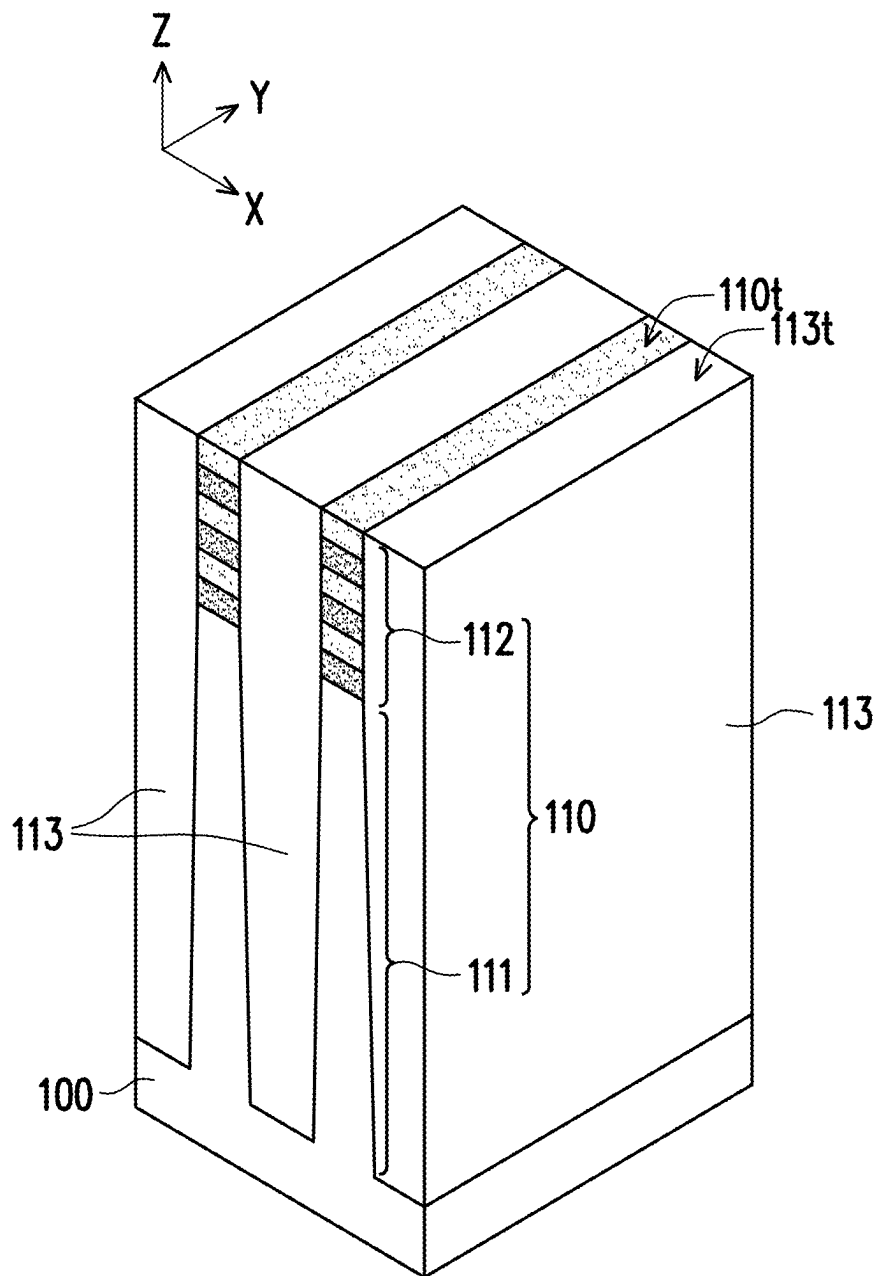


FIG. 3

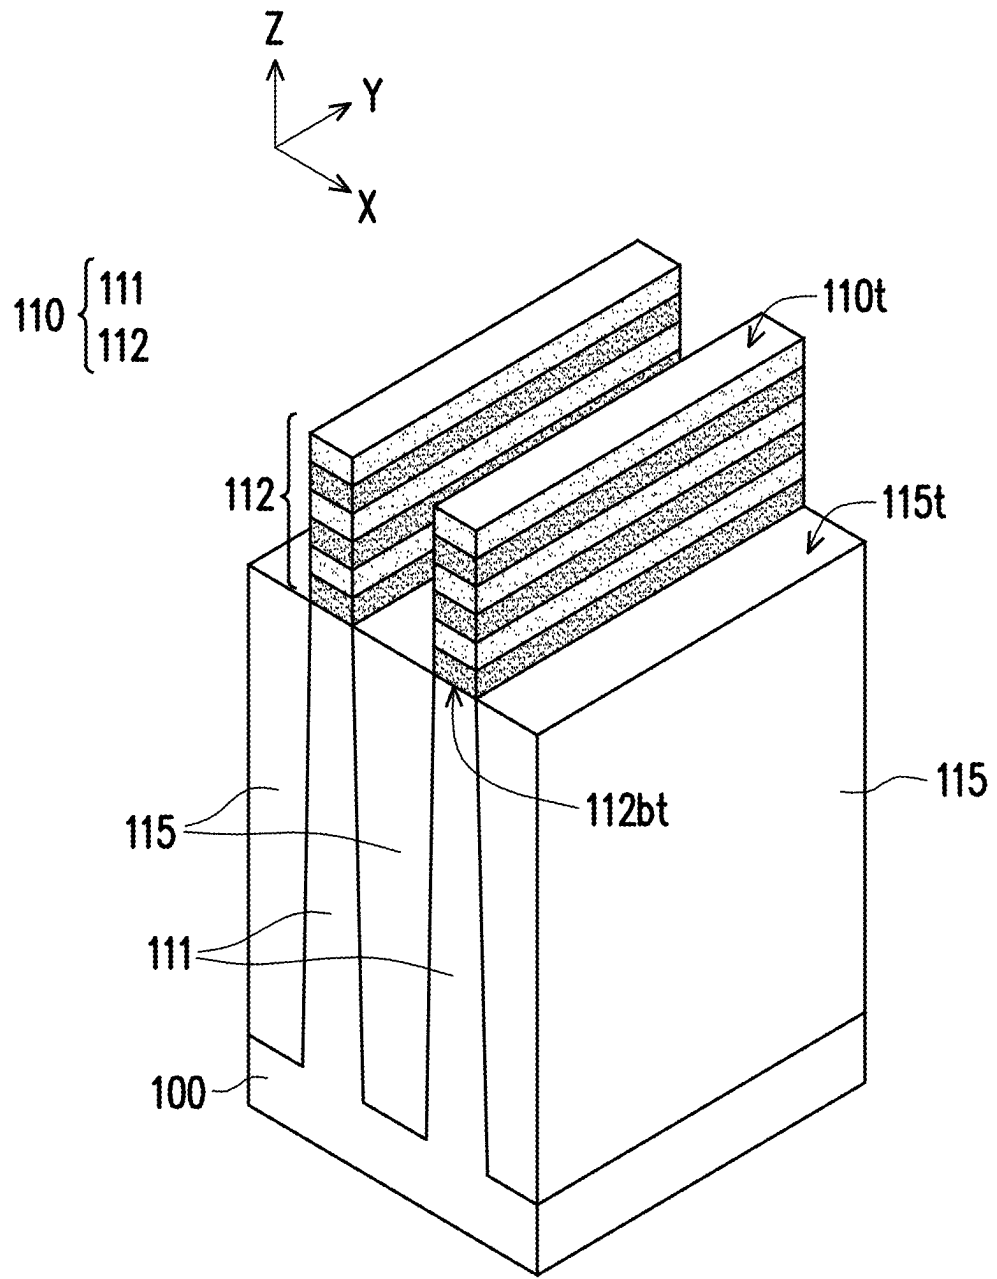


FIG. 4

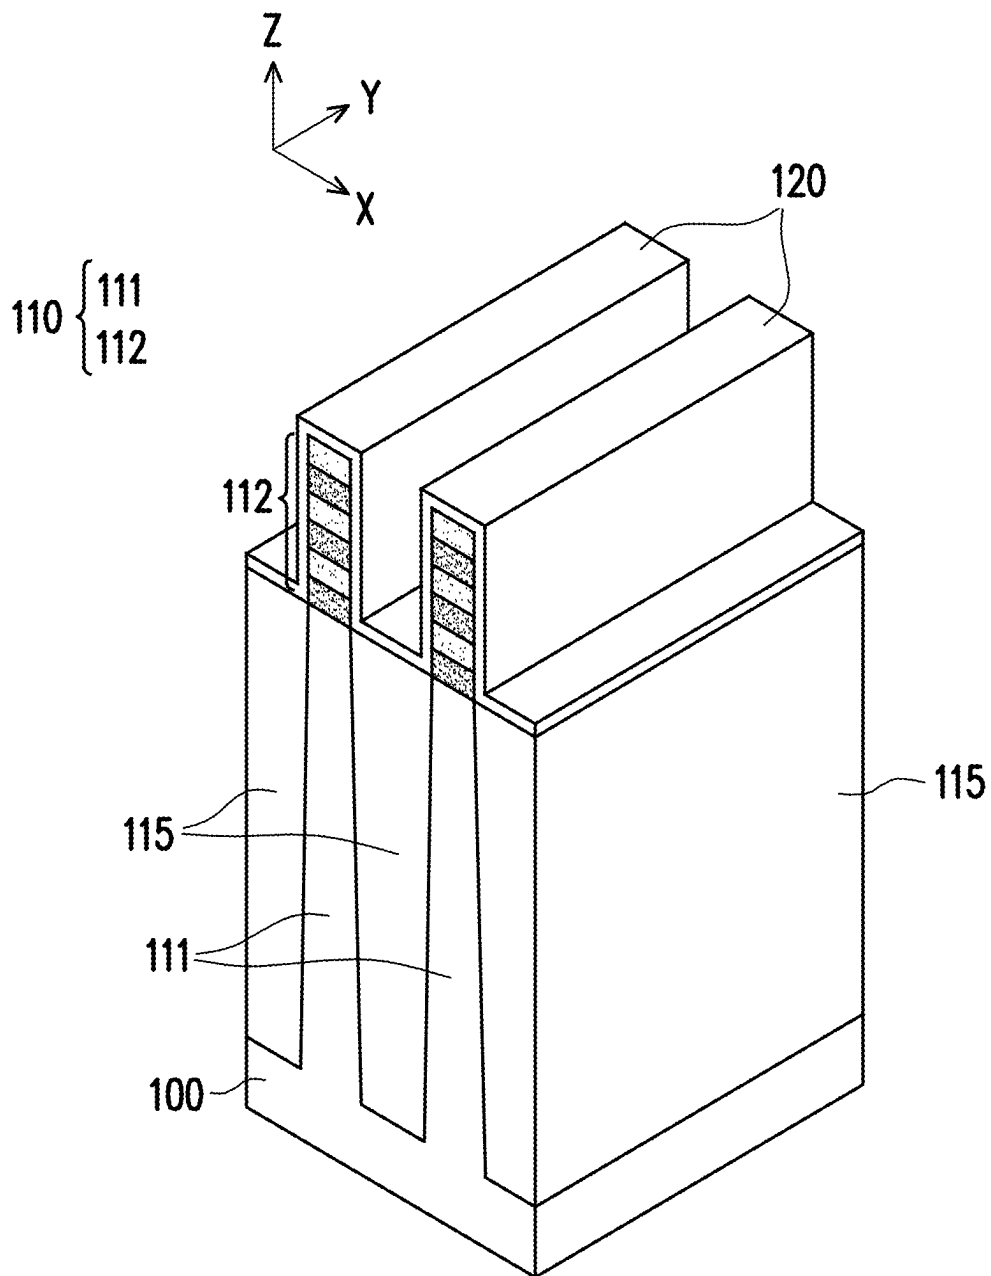


FIG. 5

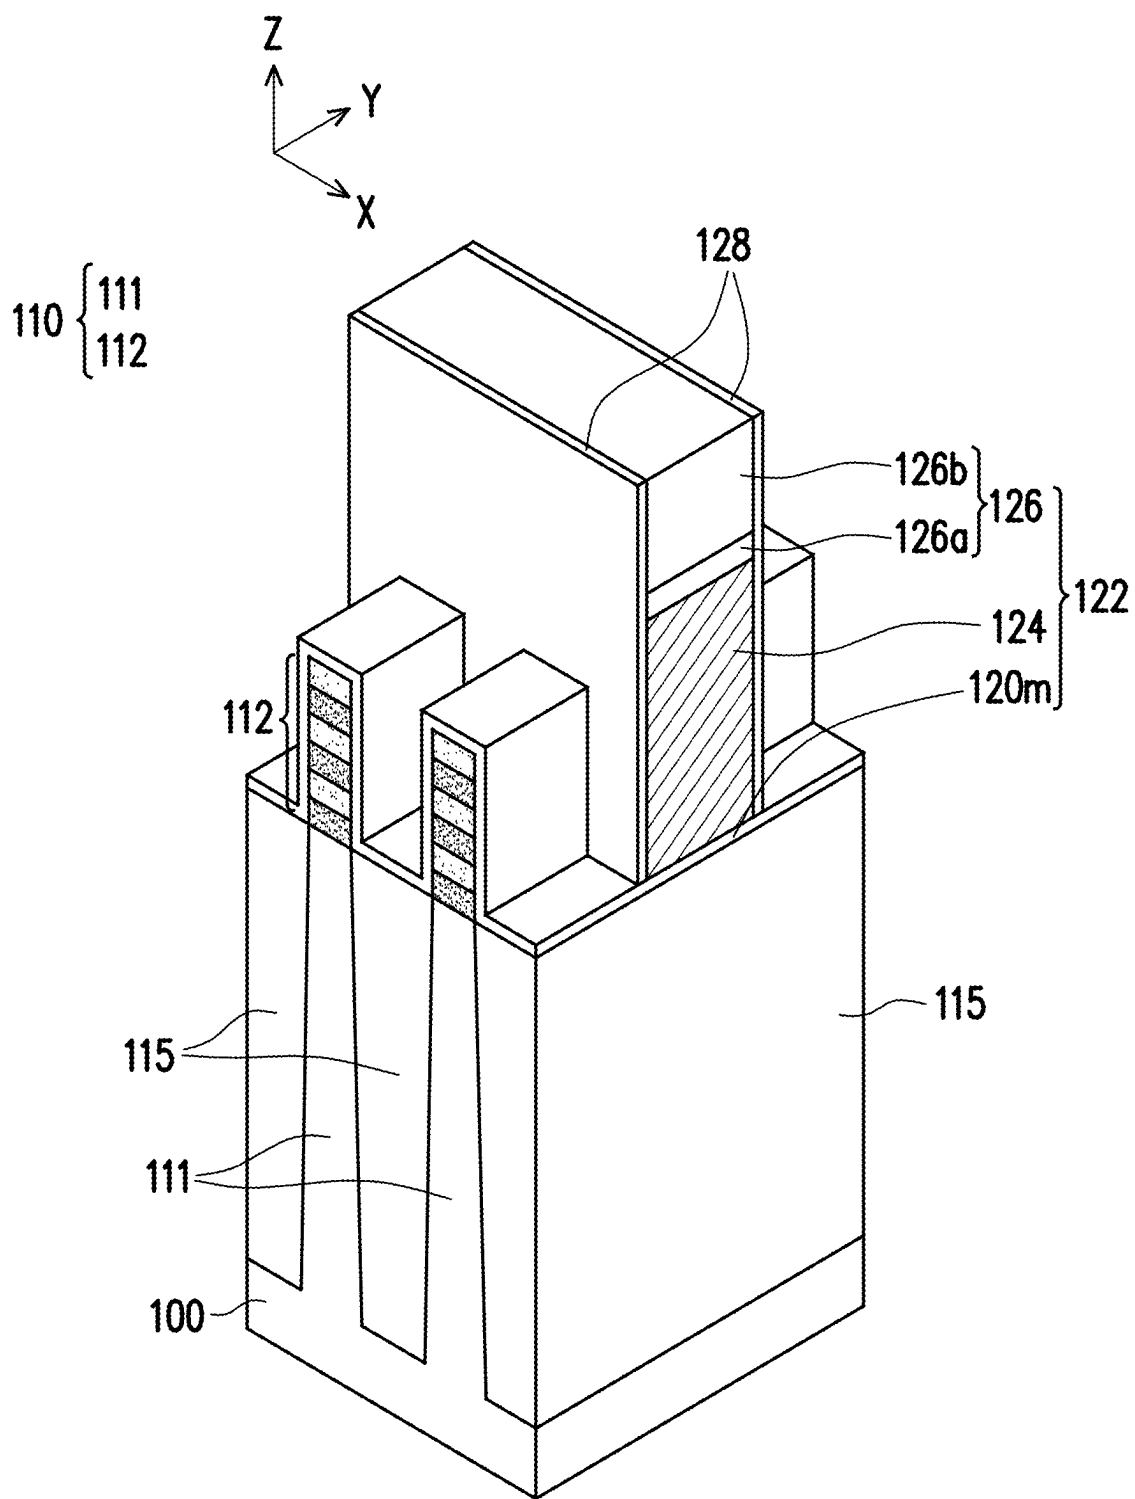


FIG. 6

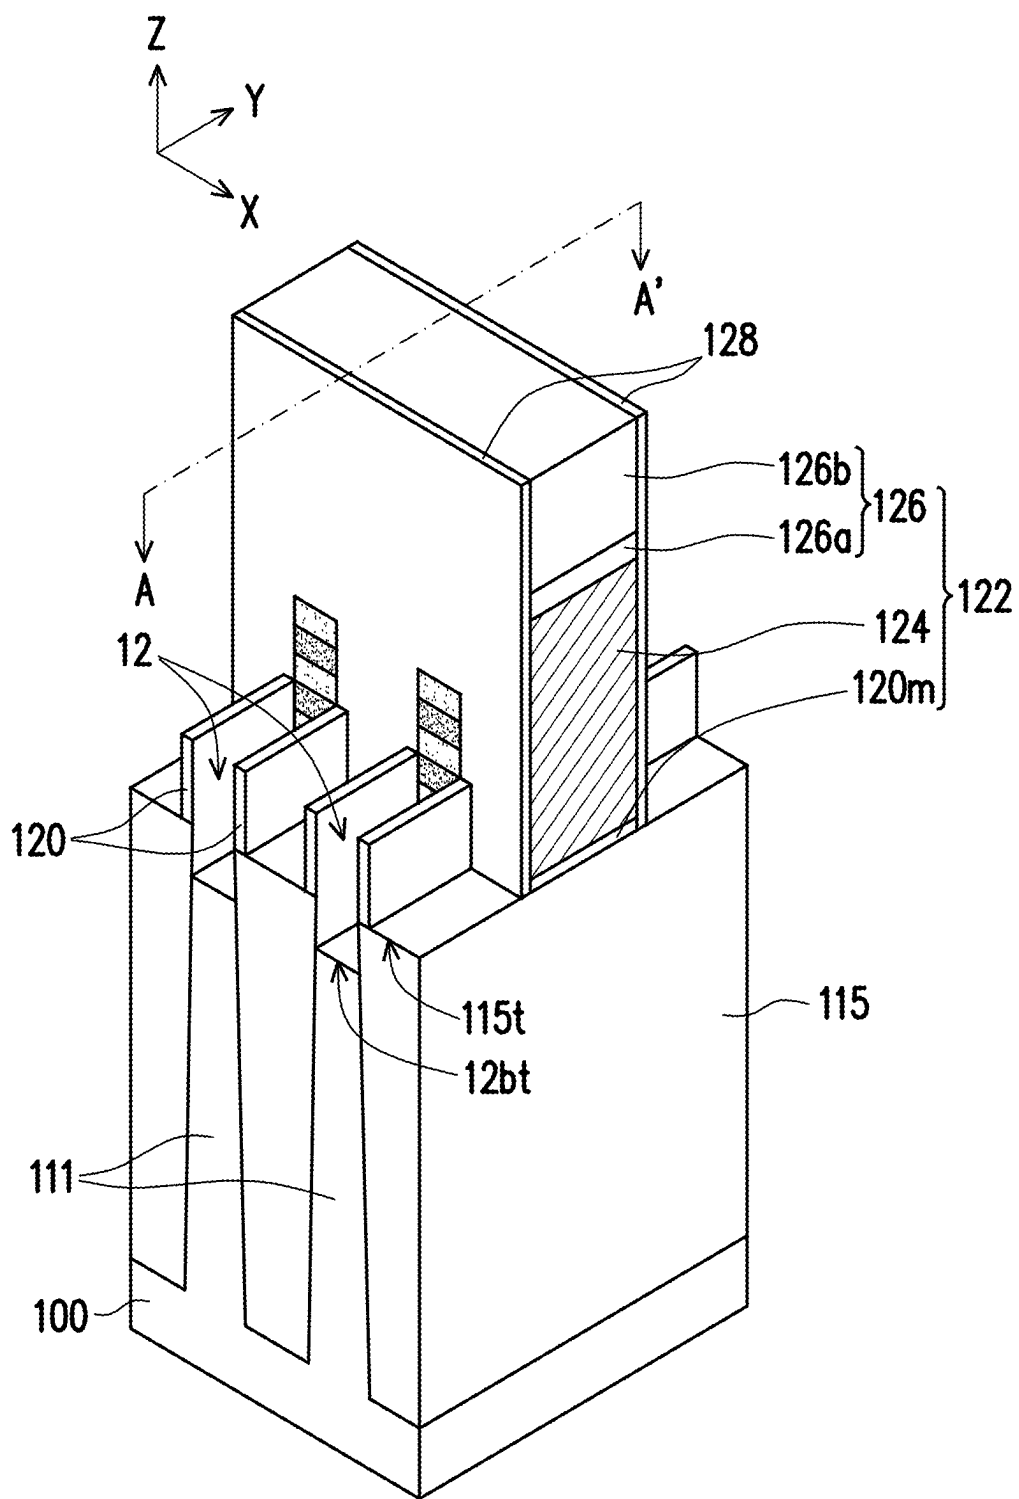


FIG. 7

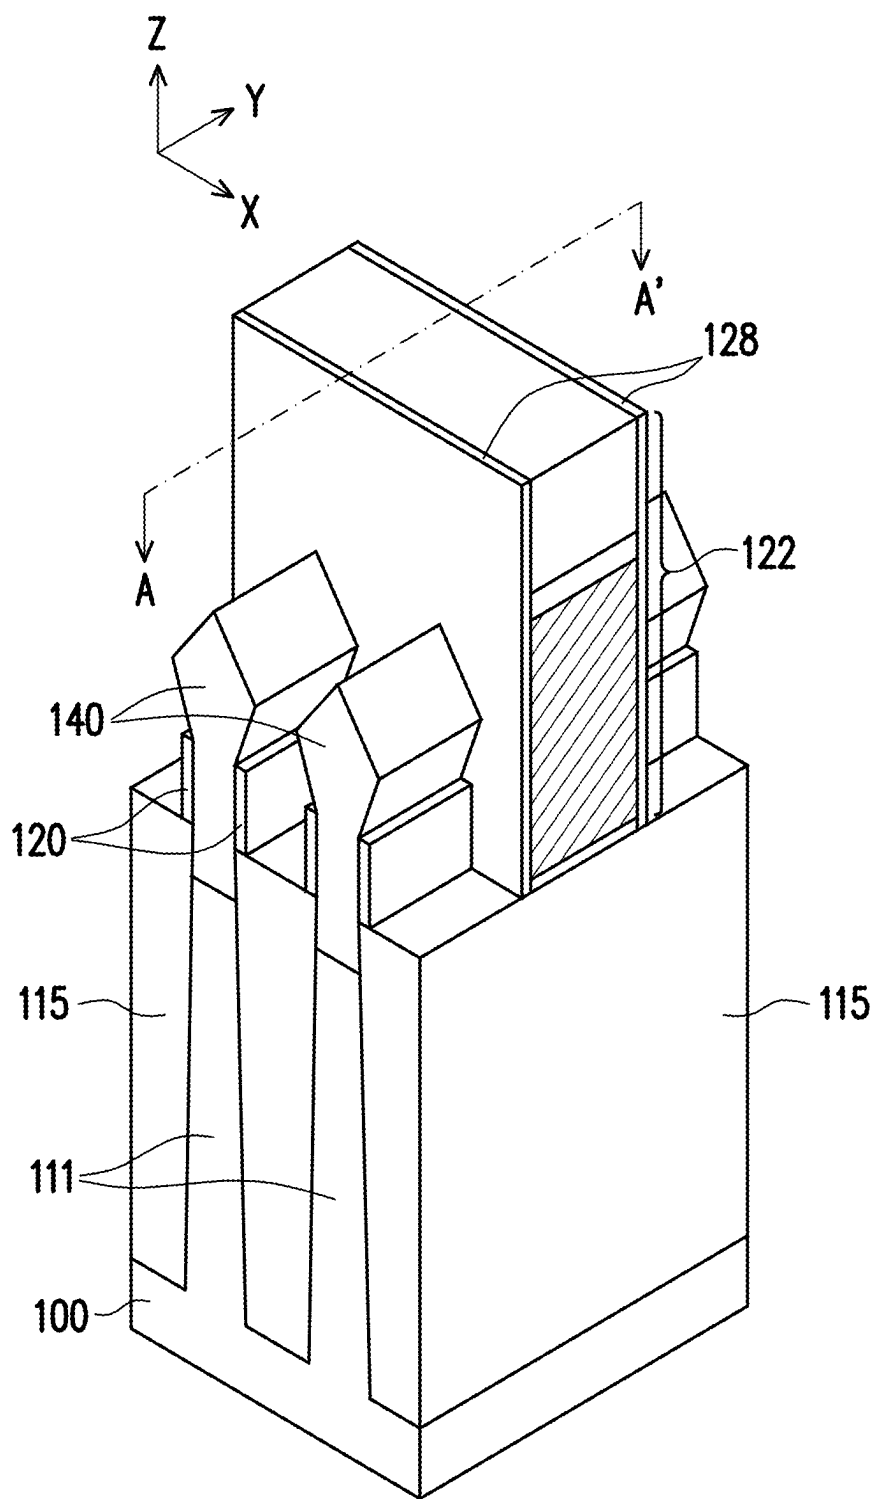


FIG. 8

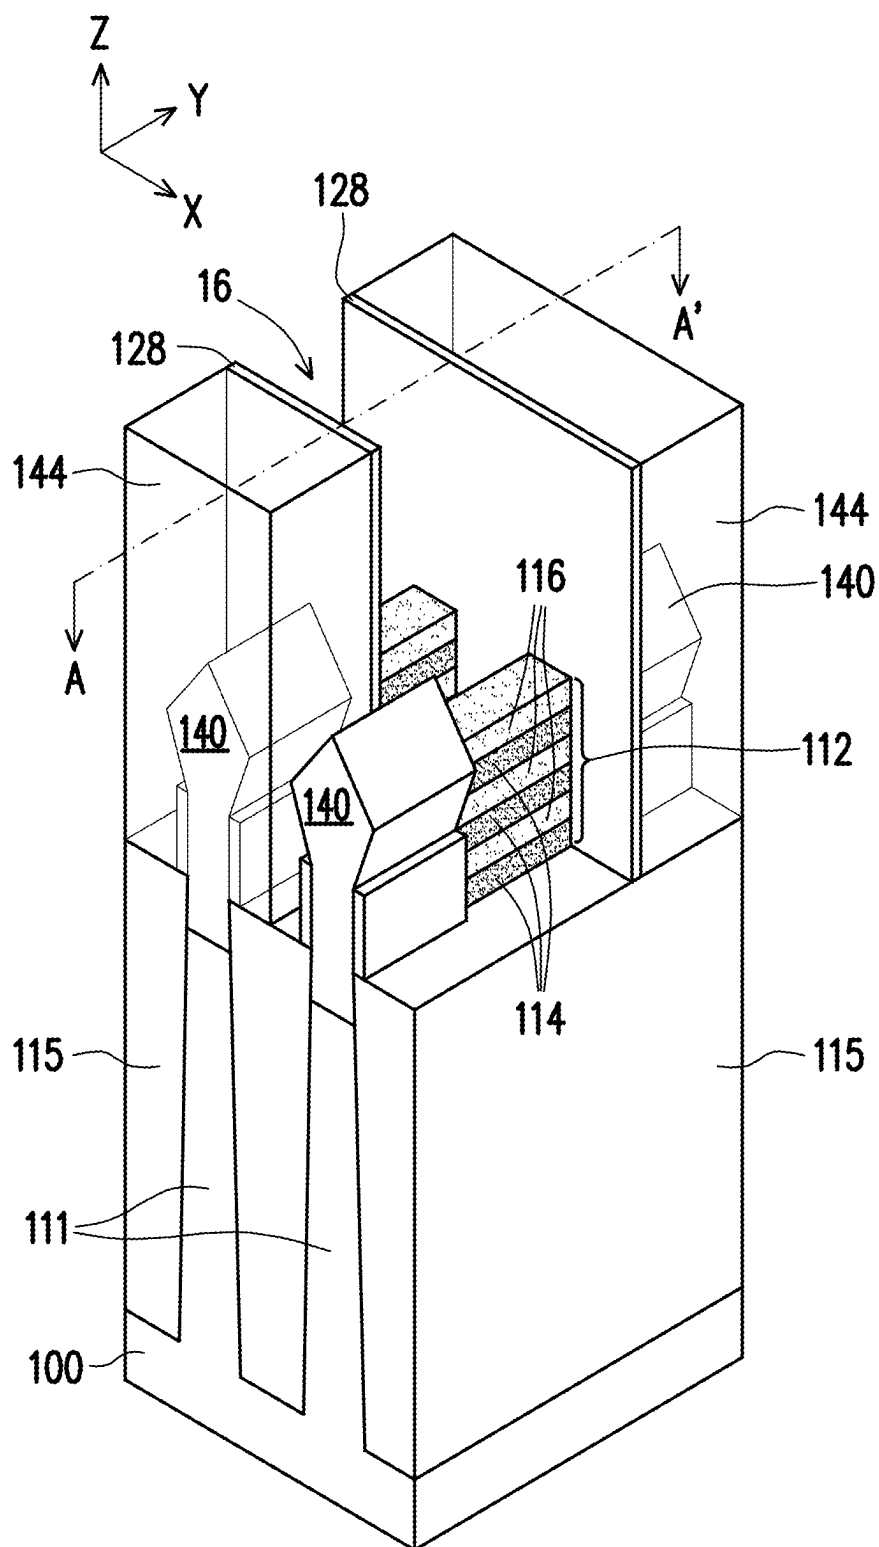


FIG. 9

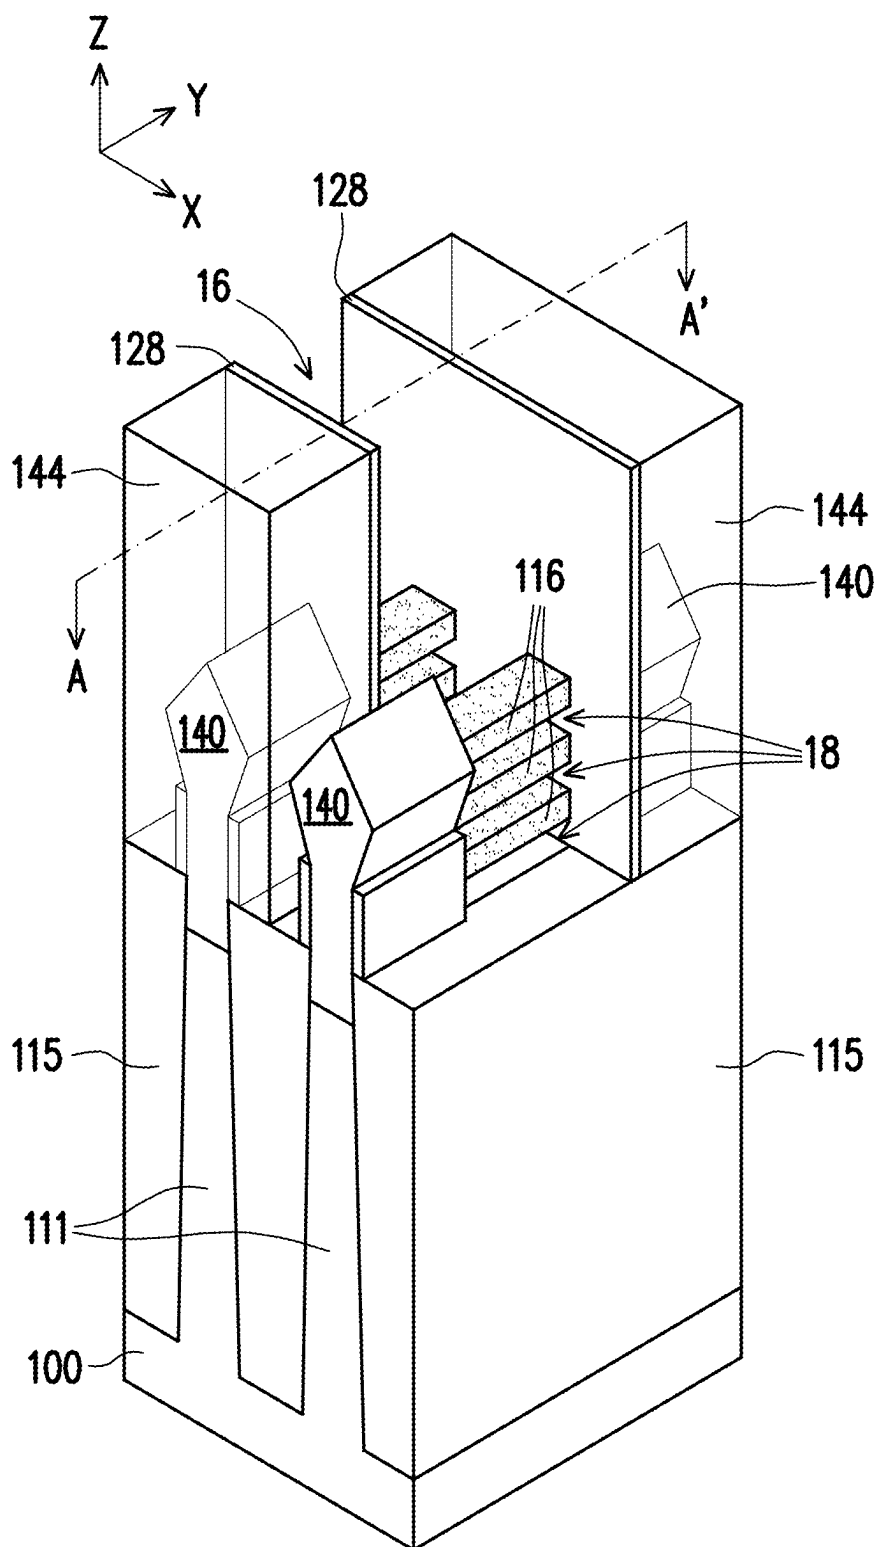


FIG. 10A

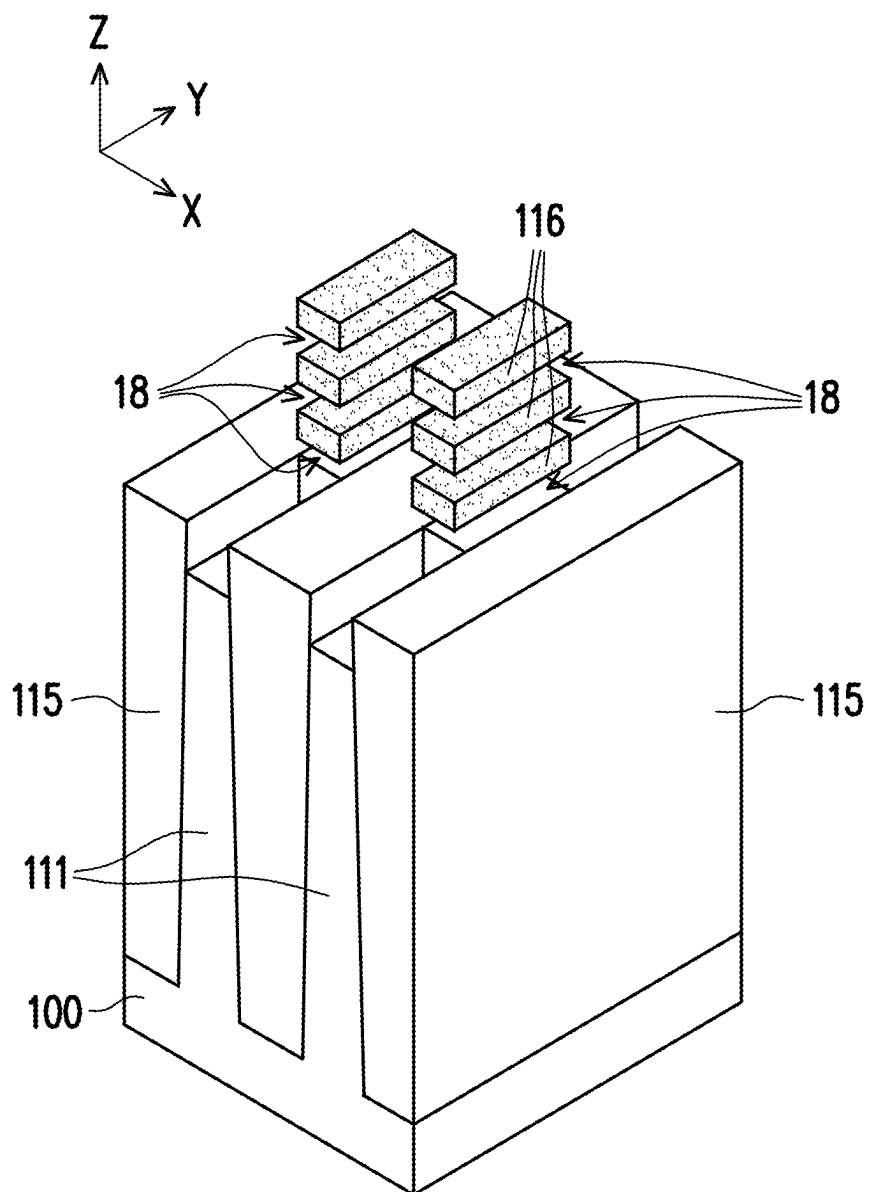


FIG. 10B

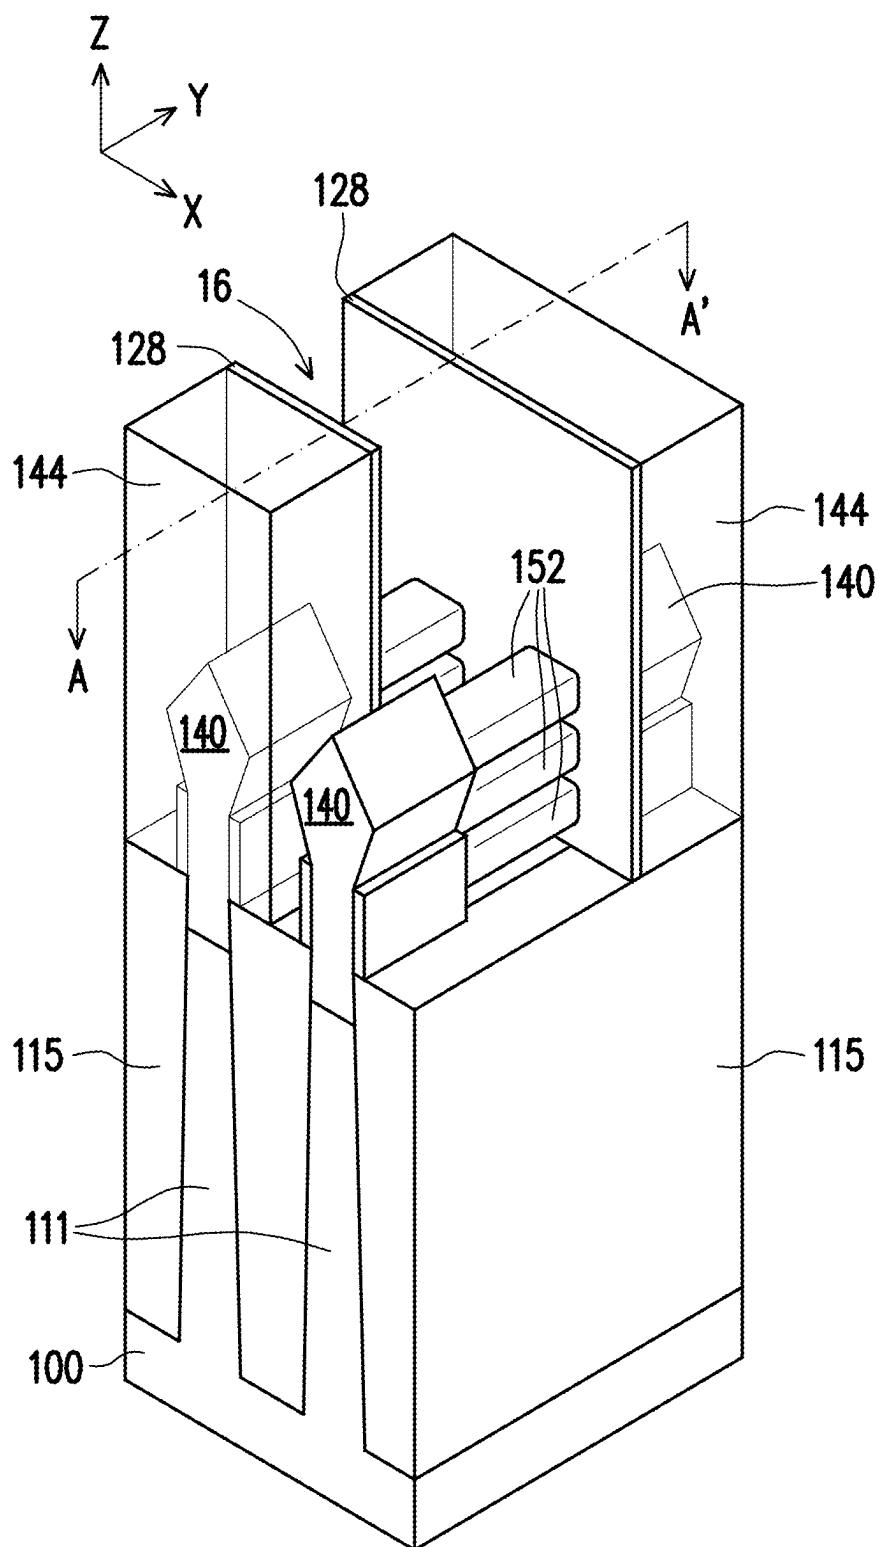


FIG. 11A

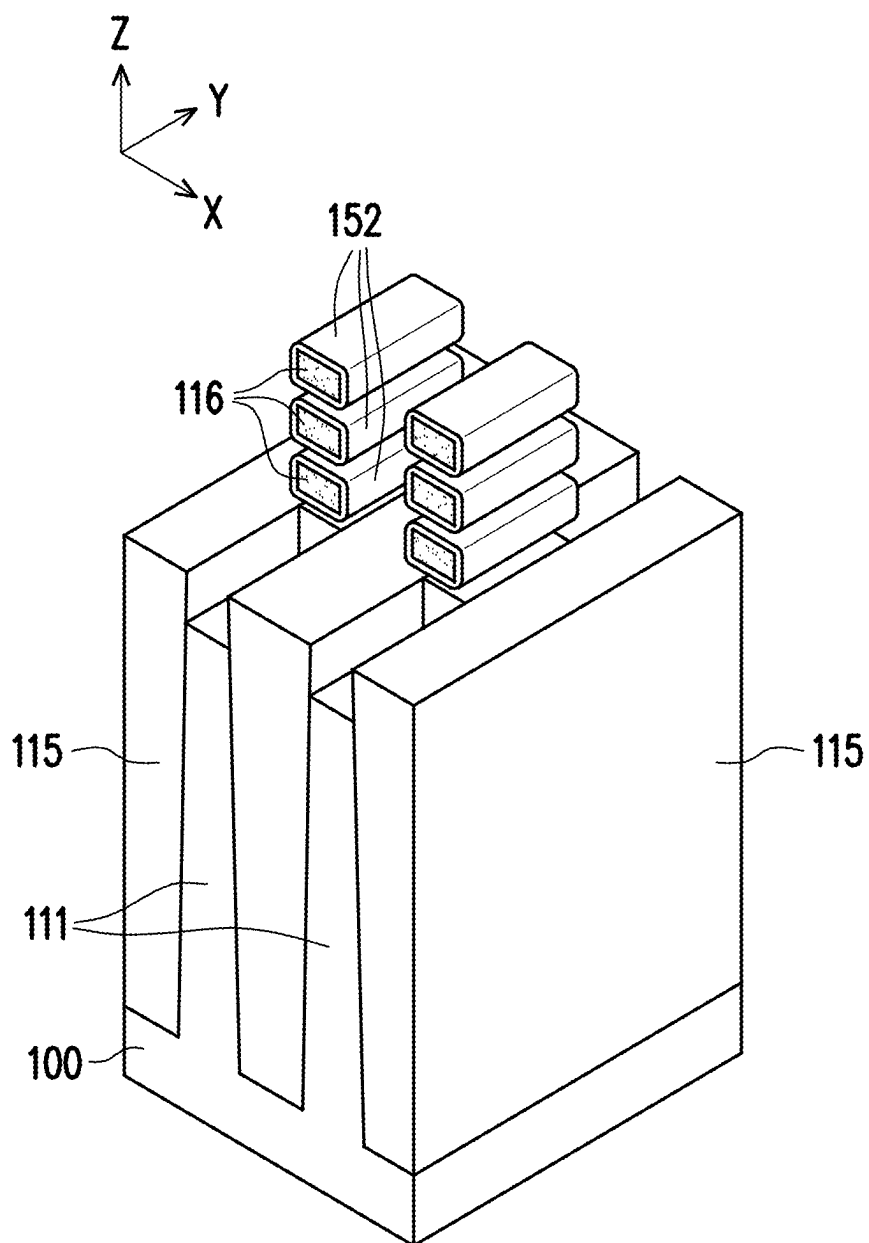


FIG. 11B

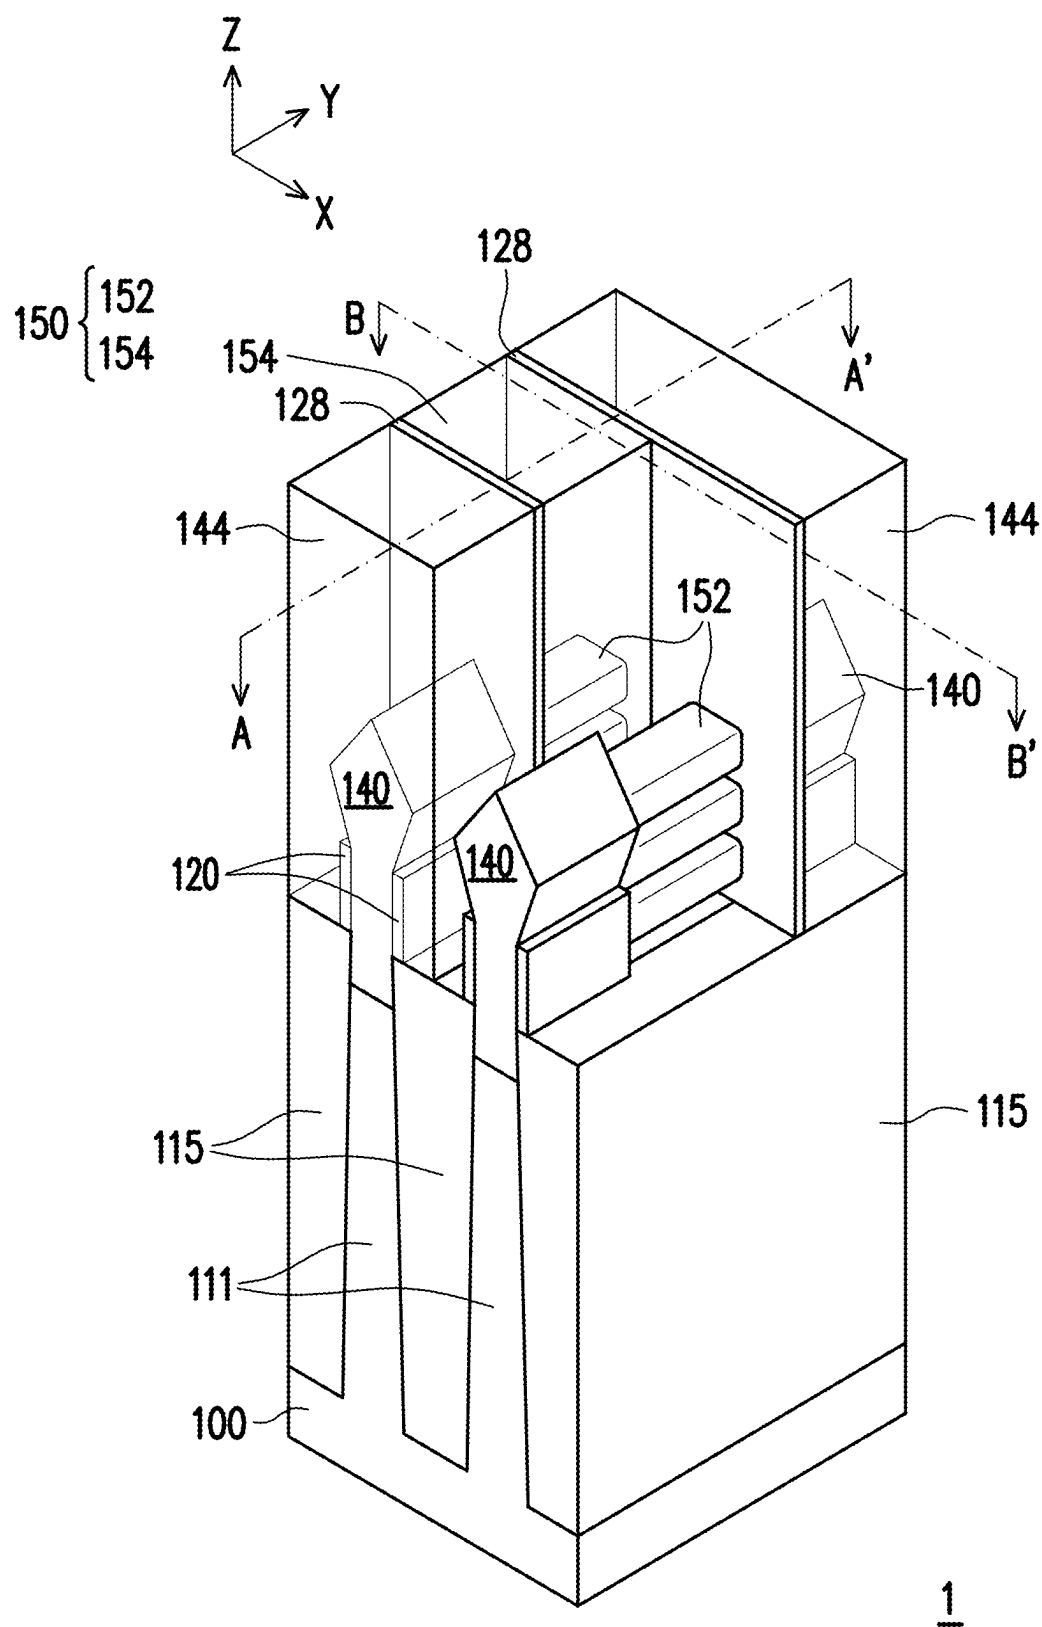


FIG. 12

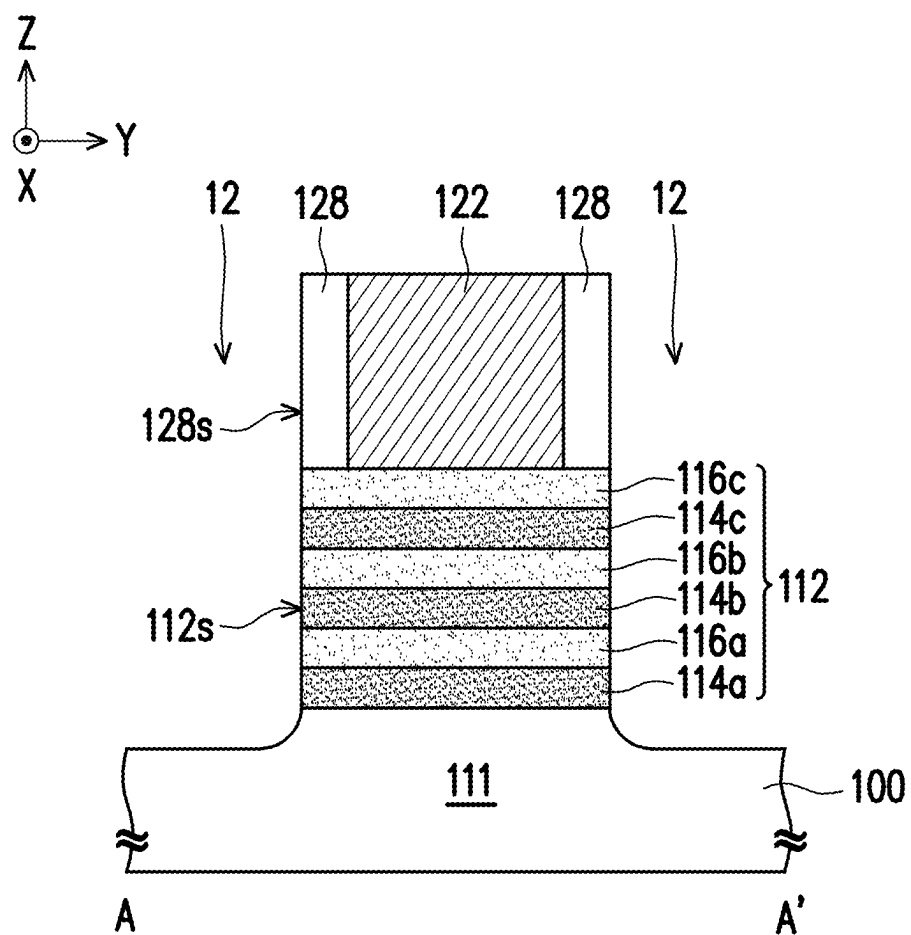


FIG. 13

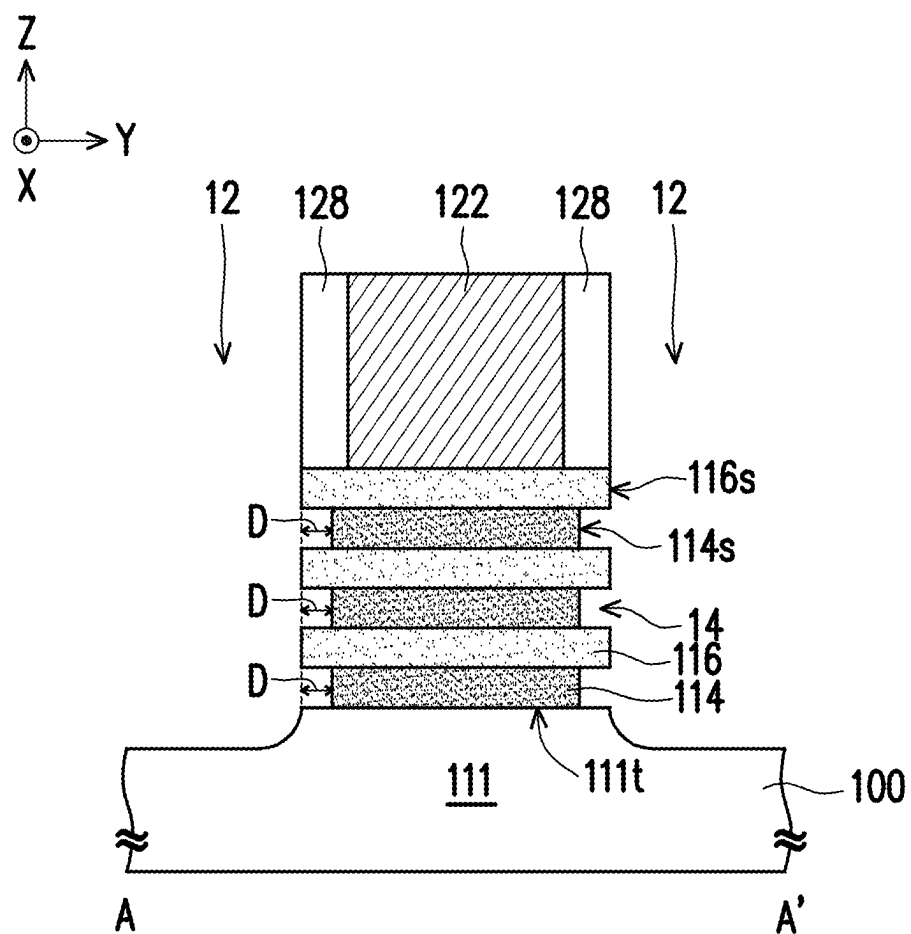


FIG. 14A

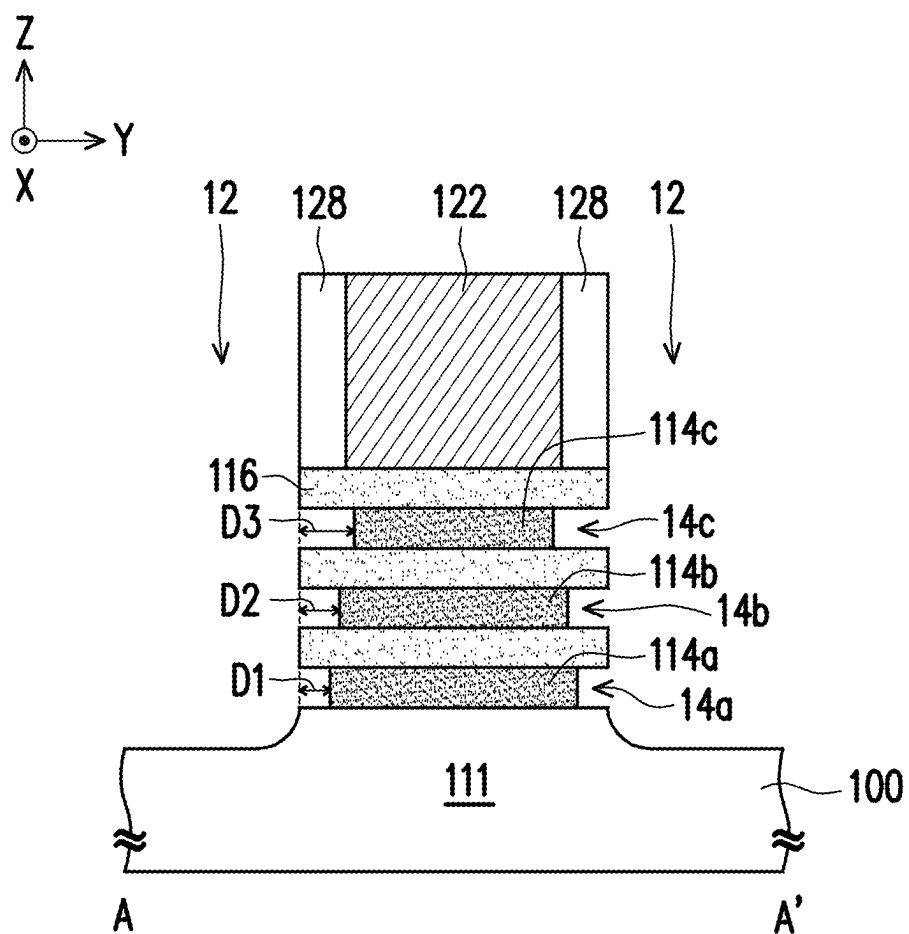


FIG. 14B

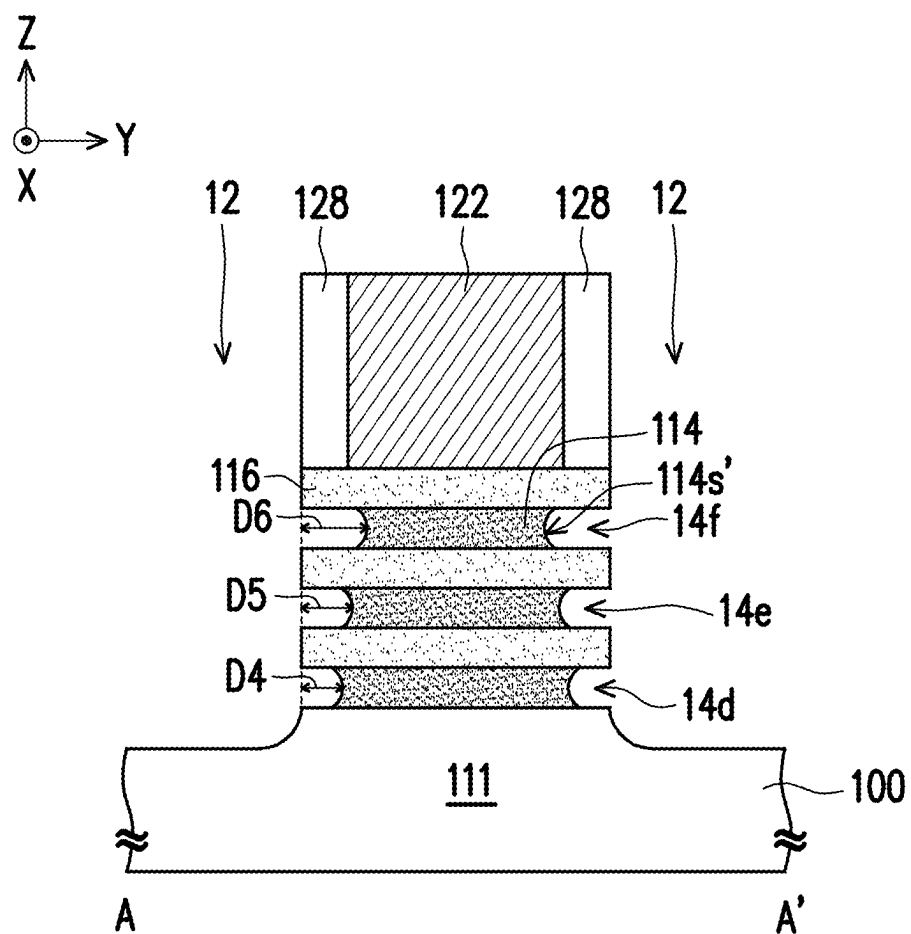


FIG. 14C

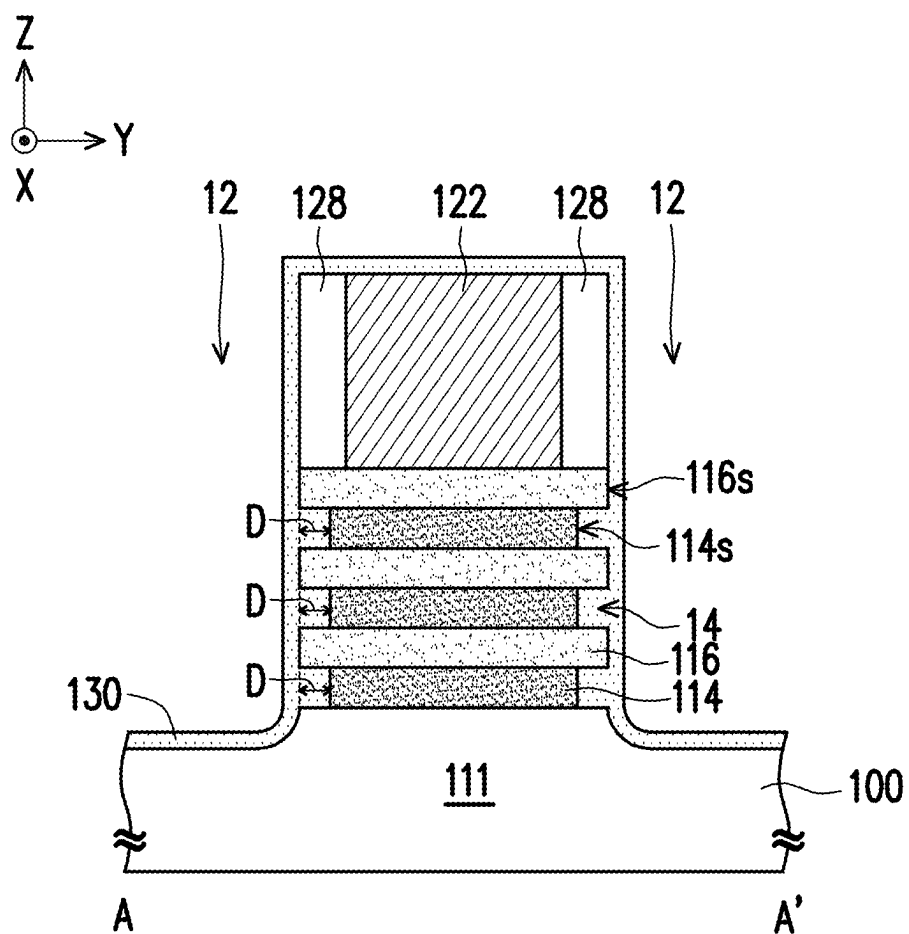


FIG. 15A

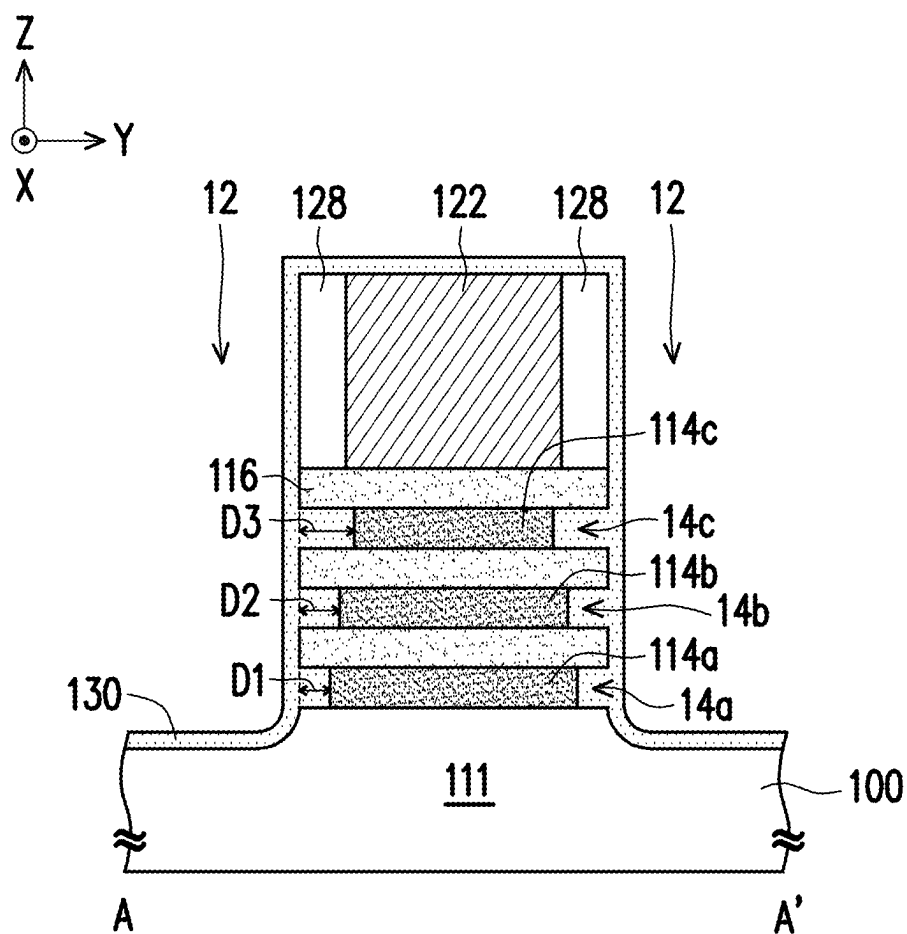


FIG. 15B

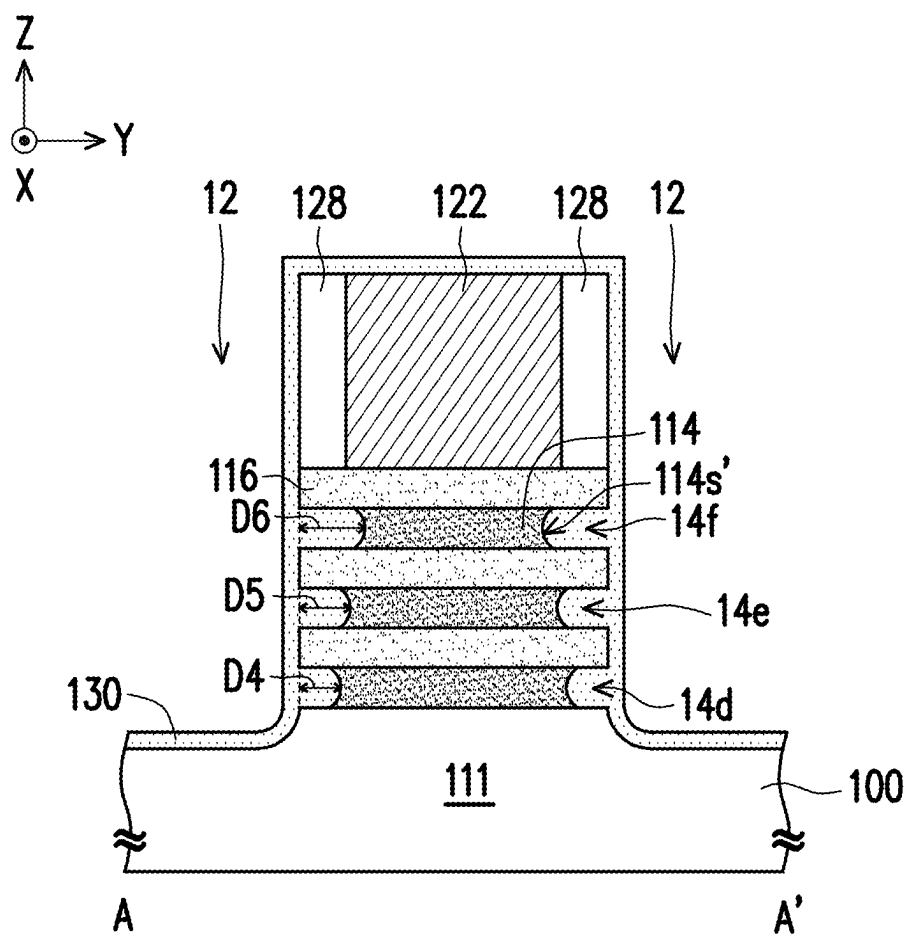


FIG. 15C

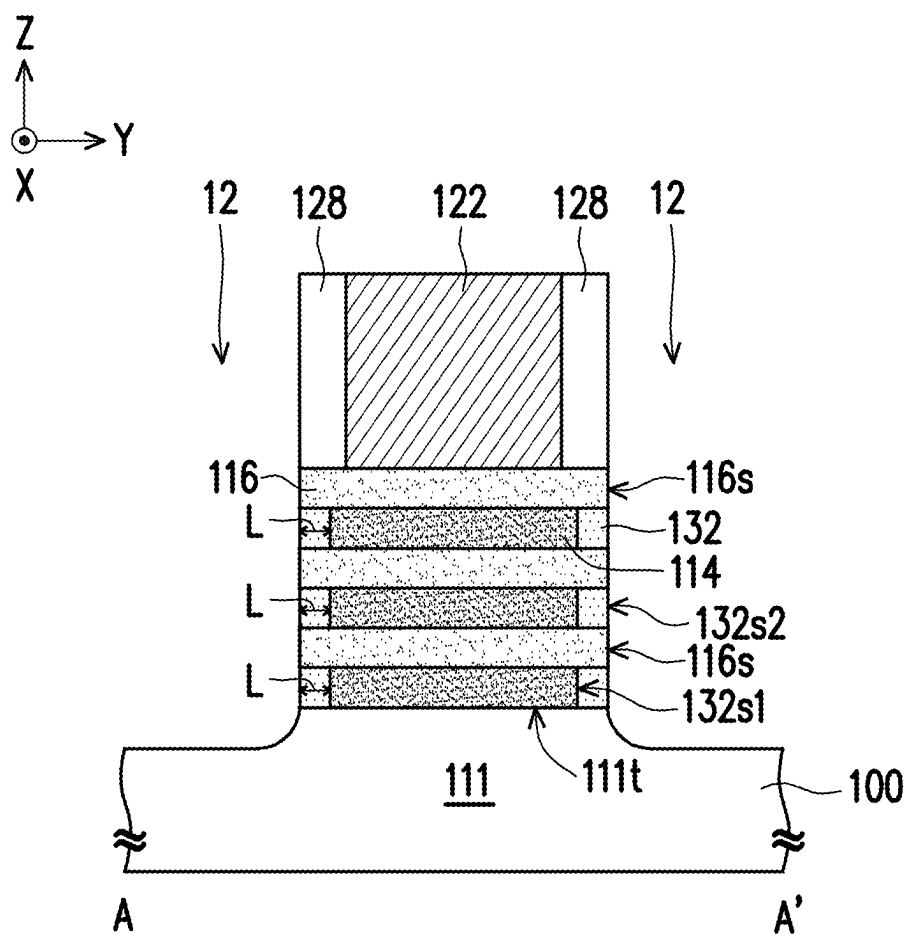


FIG. 16A

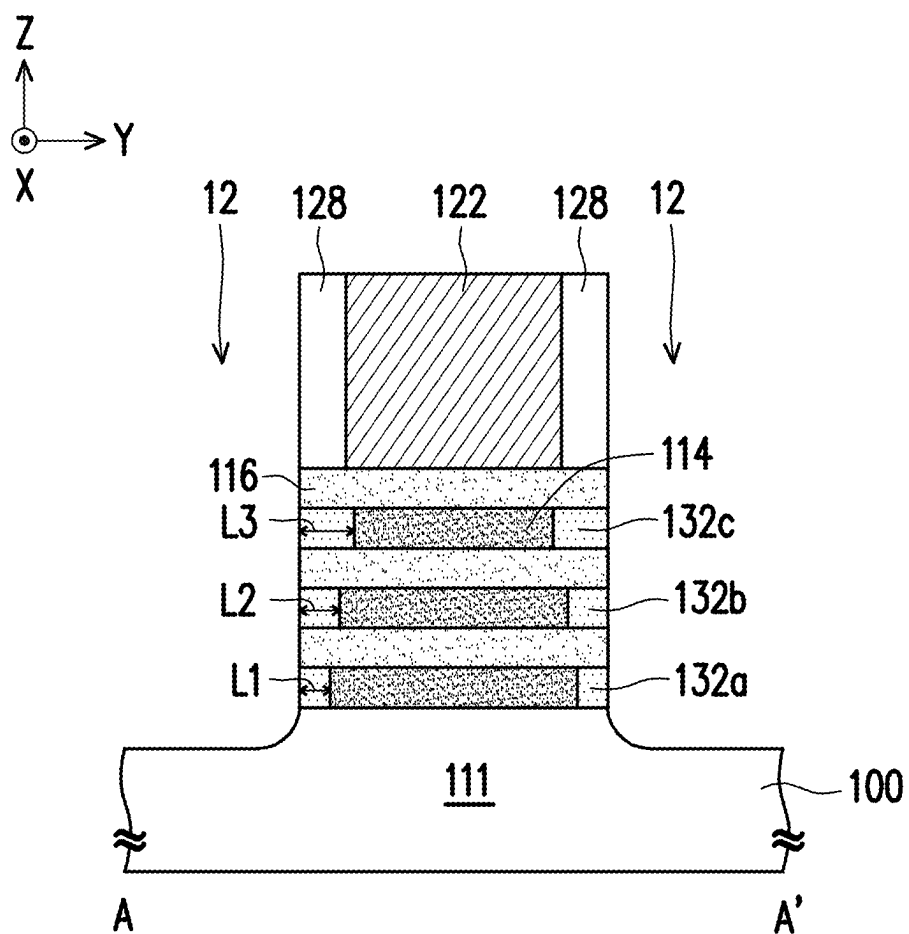


FIG. 16B

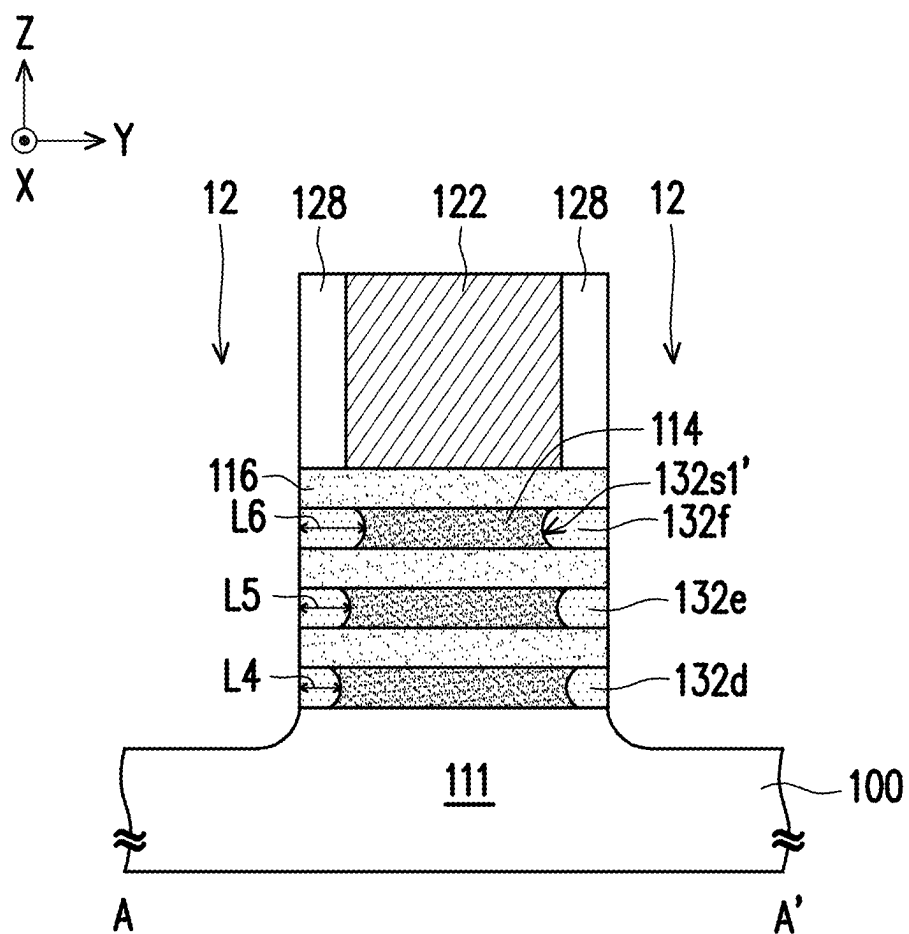


FIG. 16C

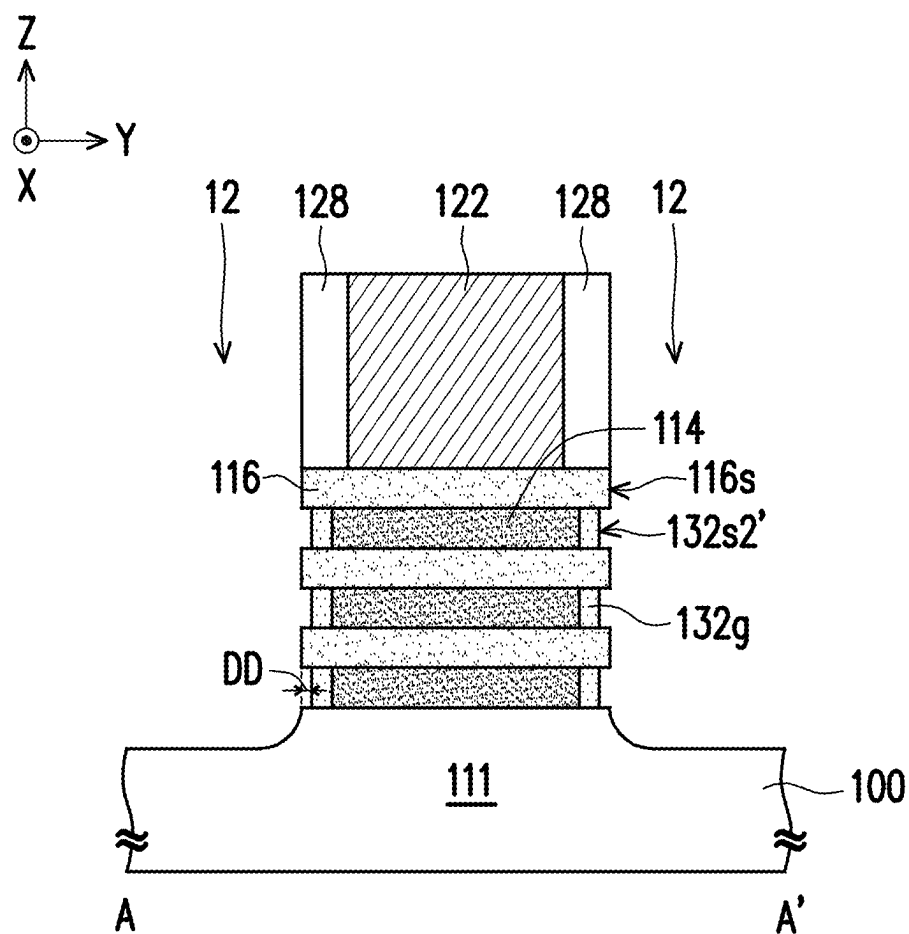


FIG. 16D

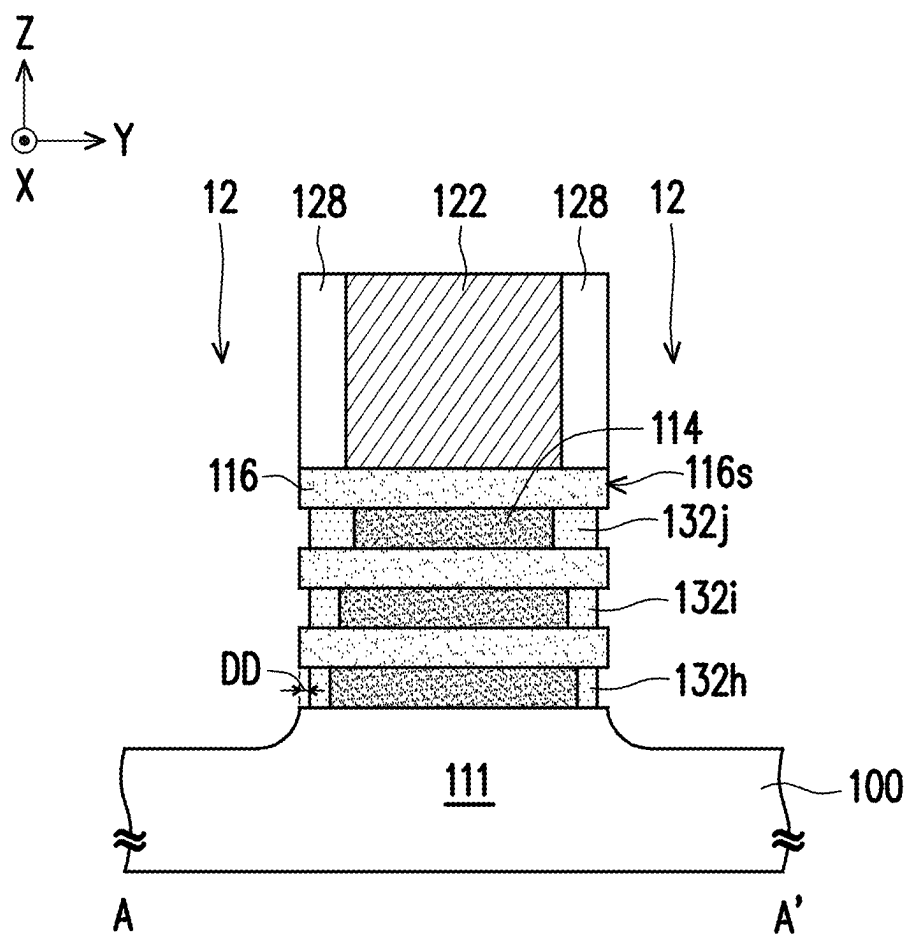


FIG. 16E

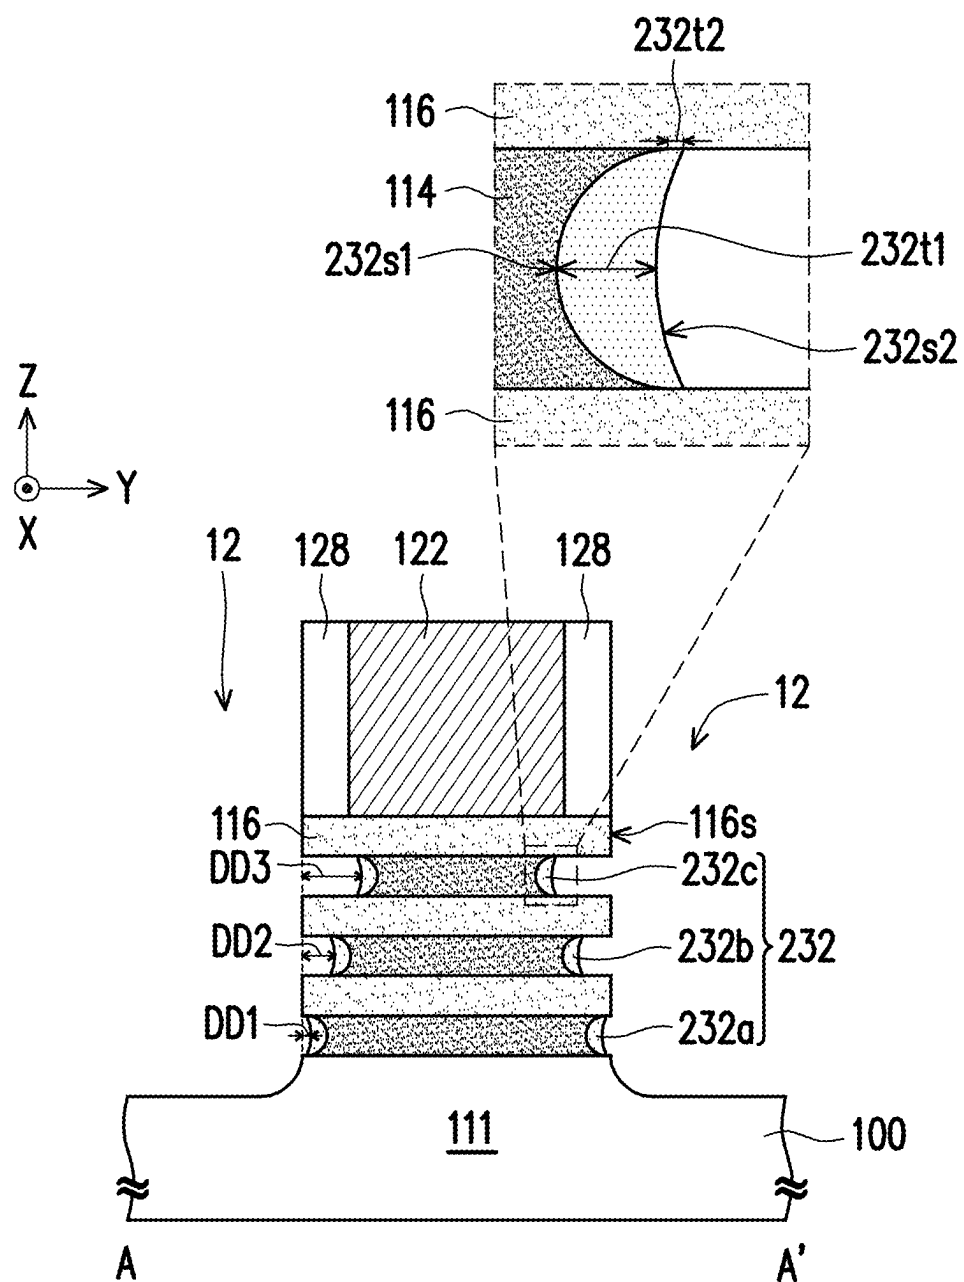


FIG. 16F

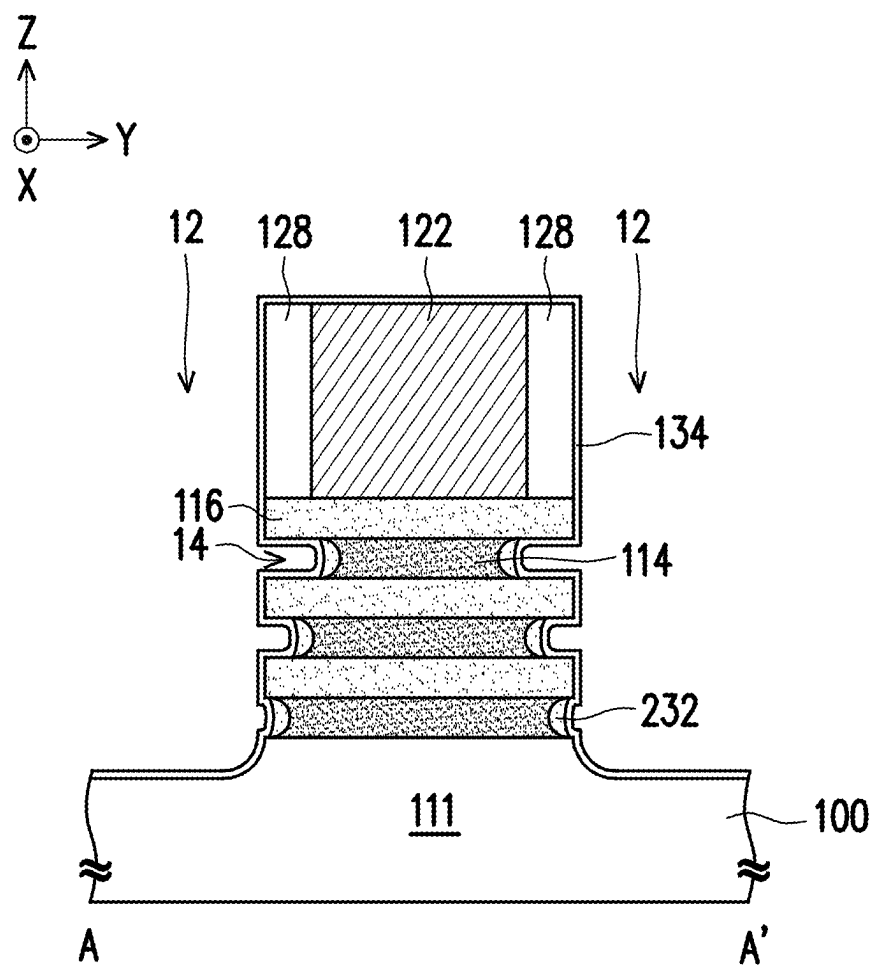


FIG. 17

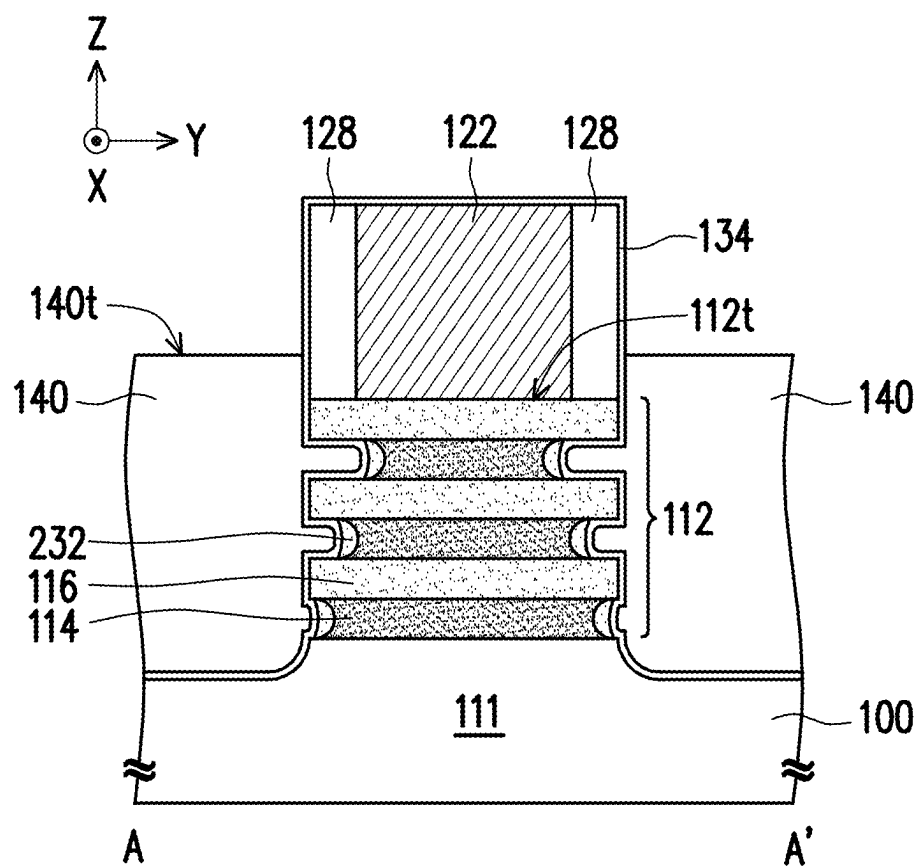


FIG. 18

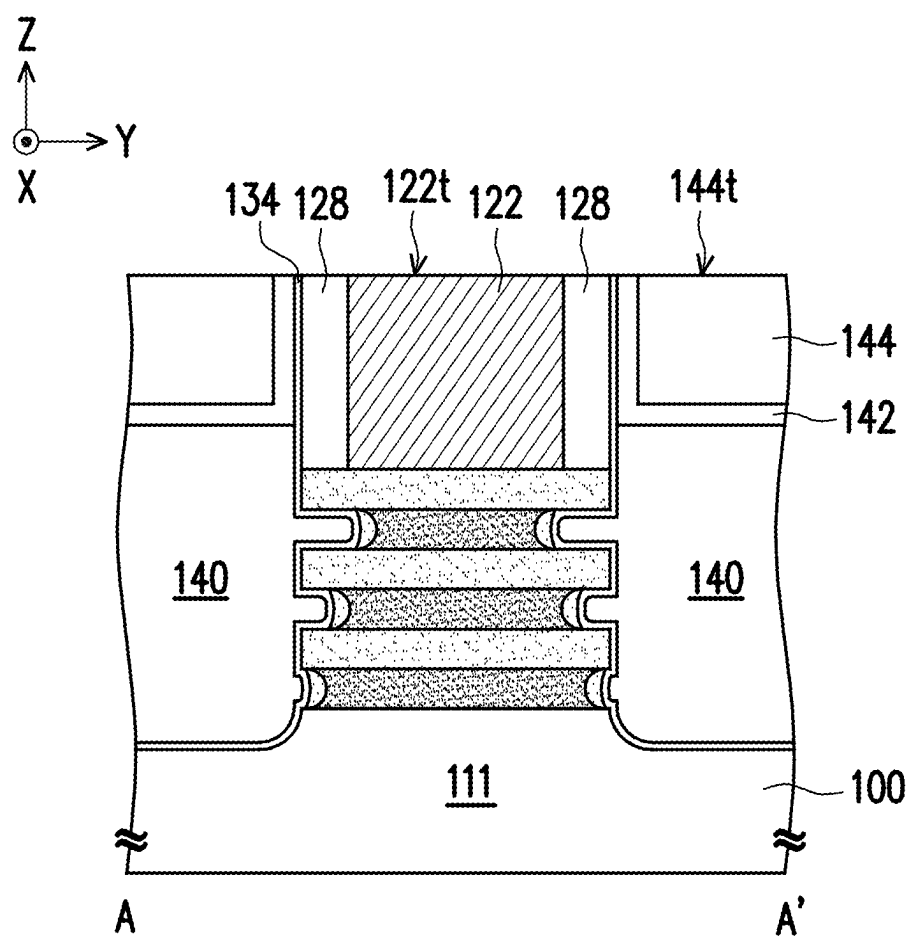


FIG. 19

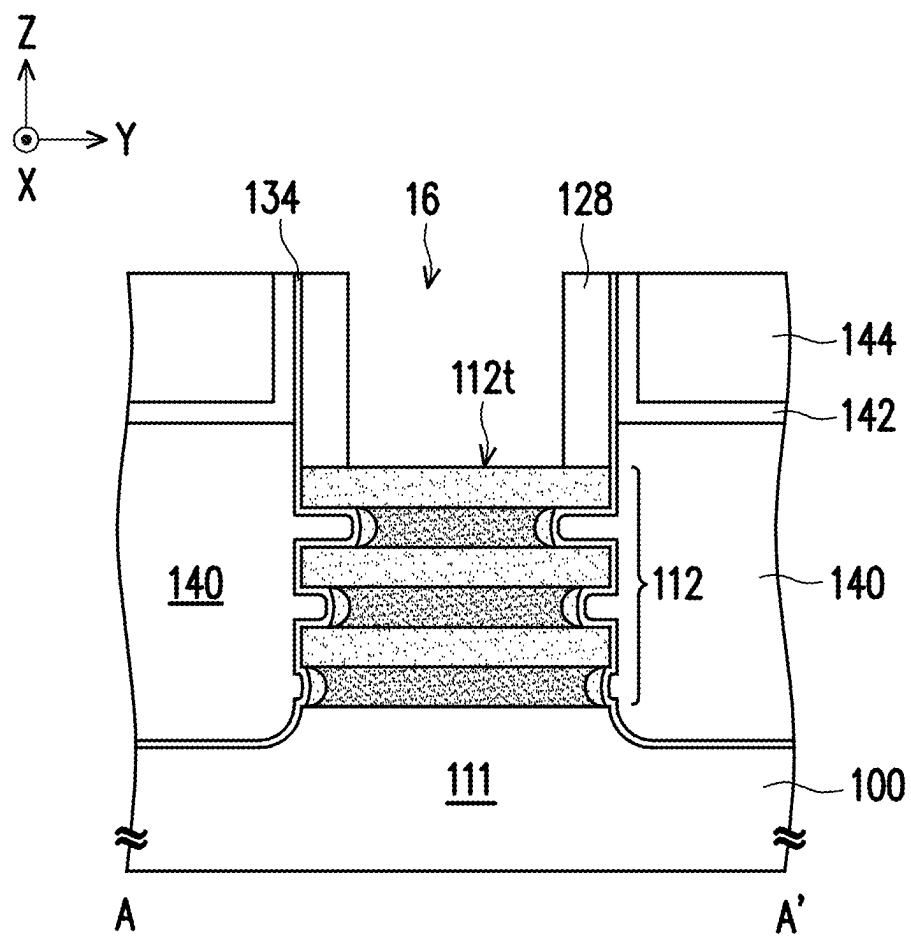


FIG. 20

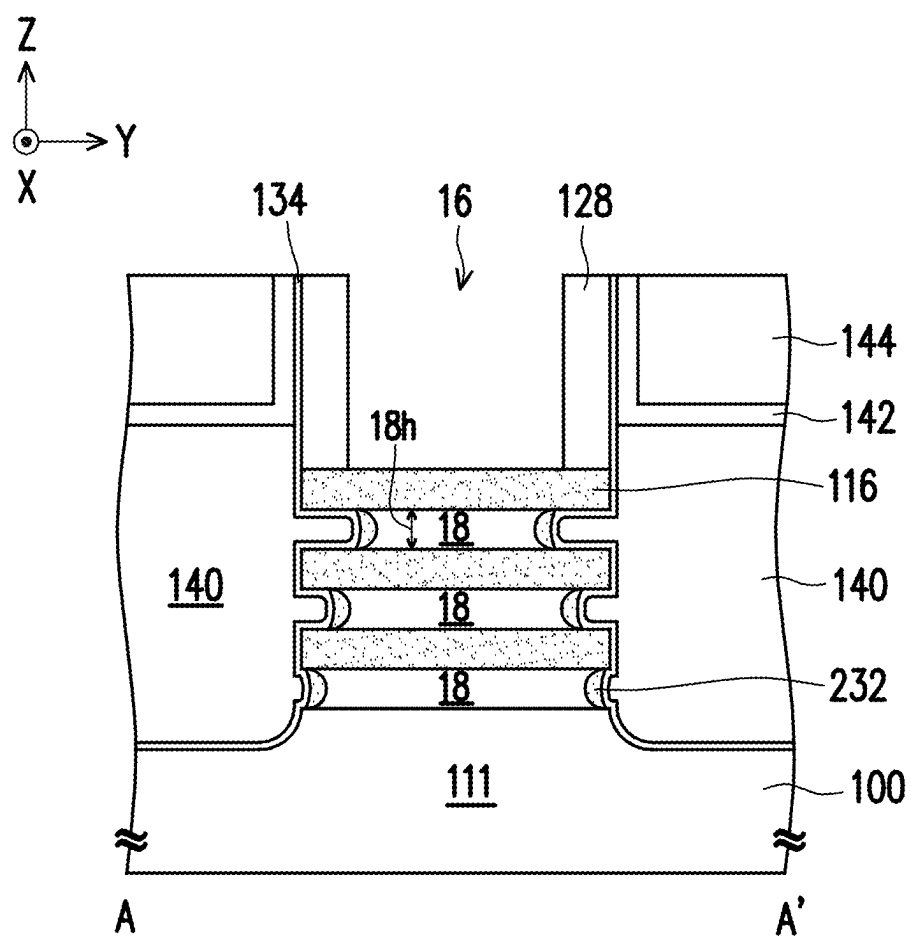


FIG. 21

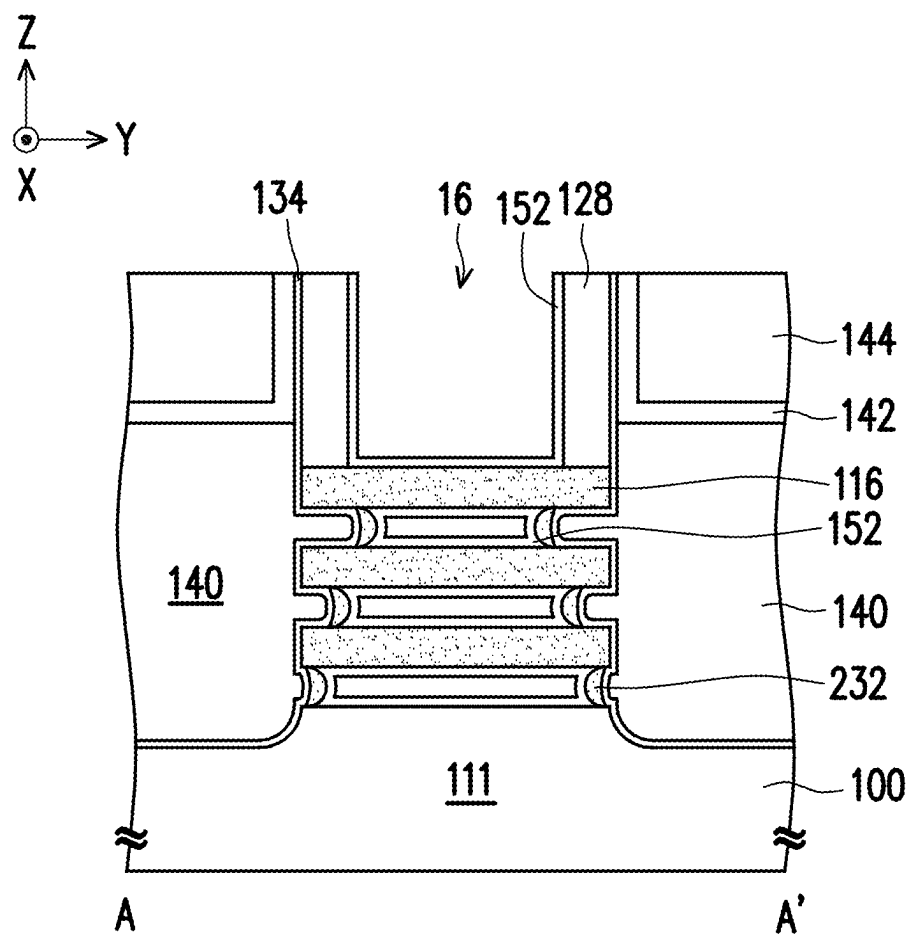


FIG. 22

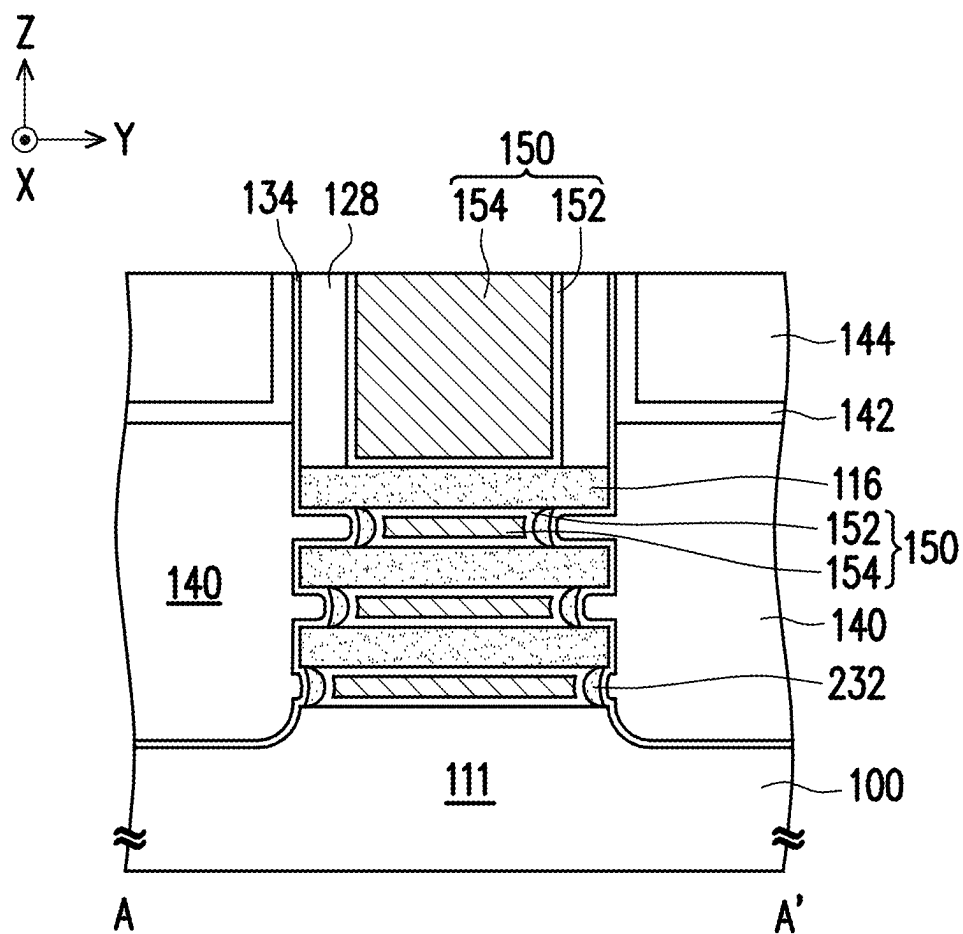


FIG. 23

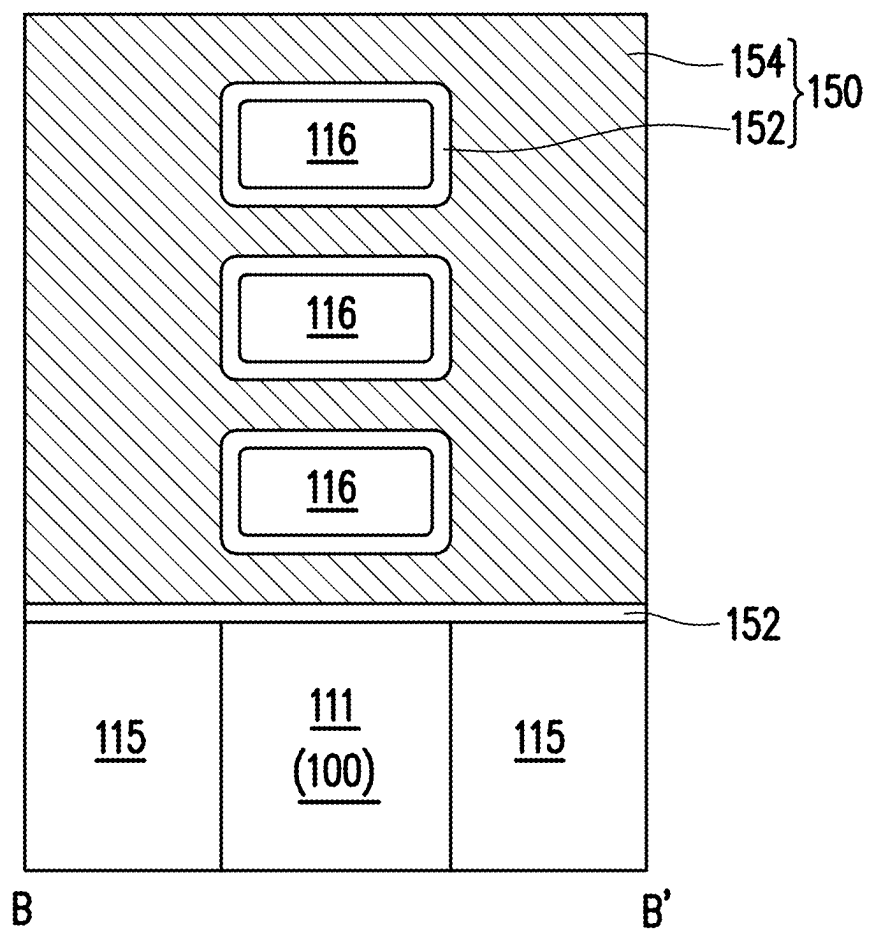


FIG. 24A

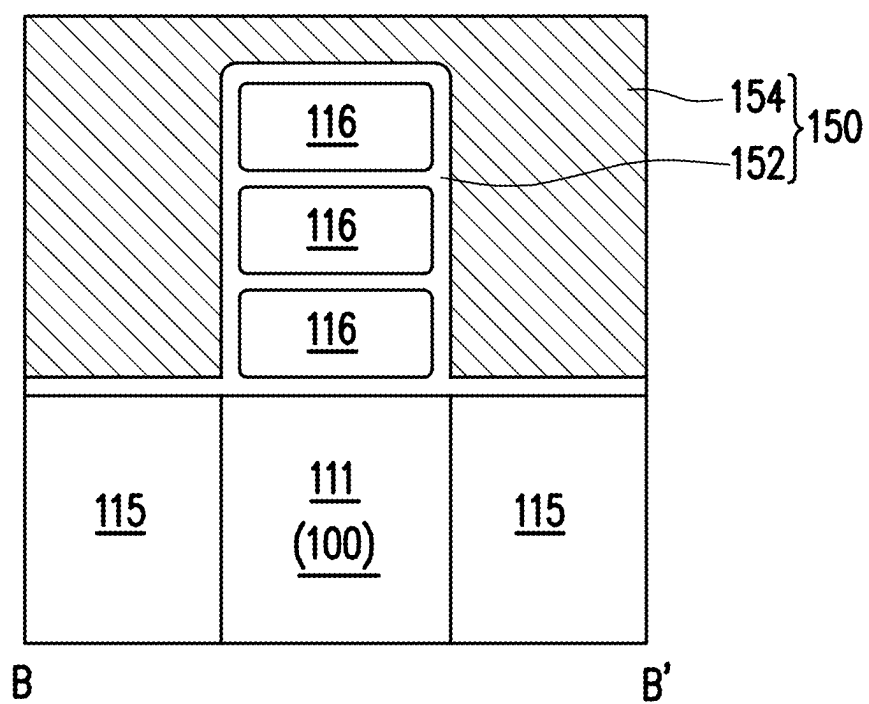


FIG. 24B

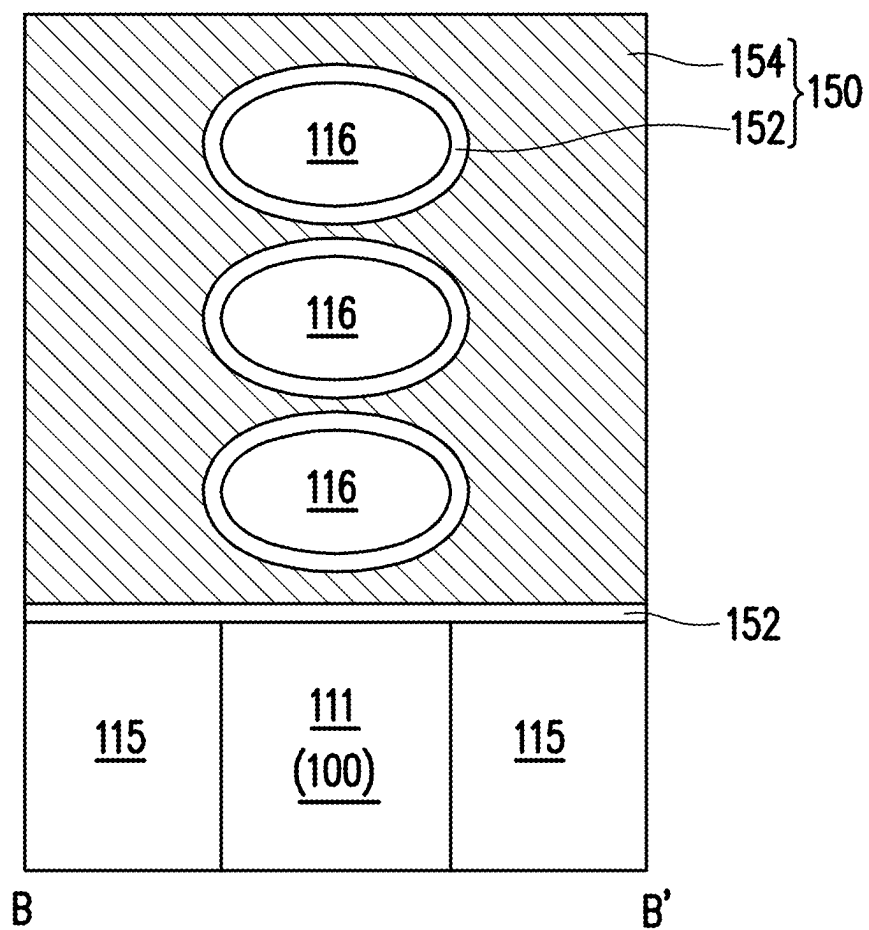


FIG. 24C

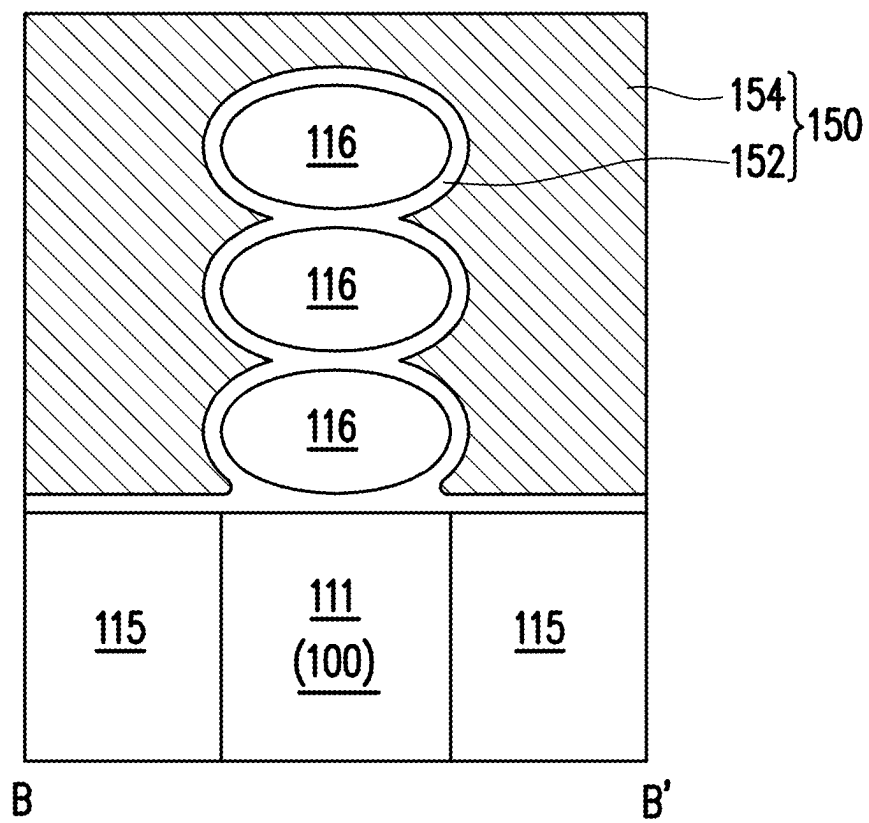


FIG. 24D

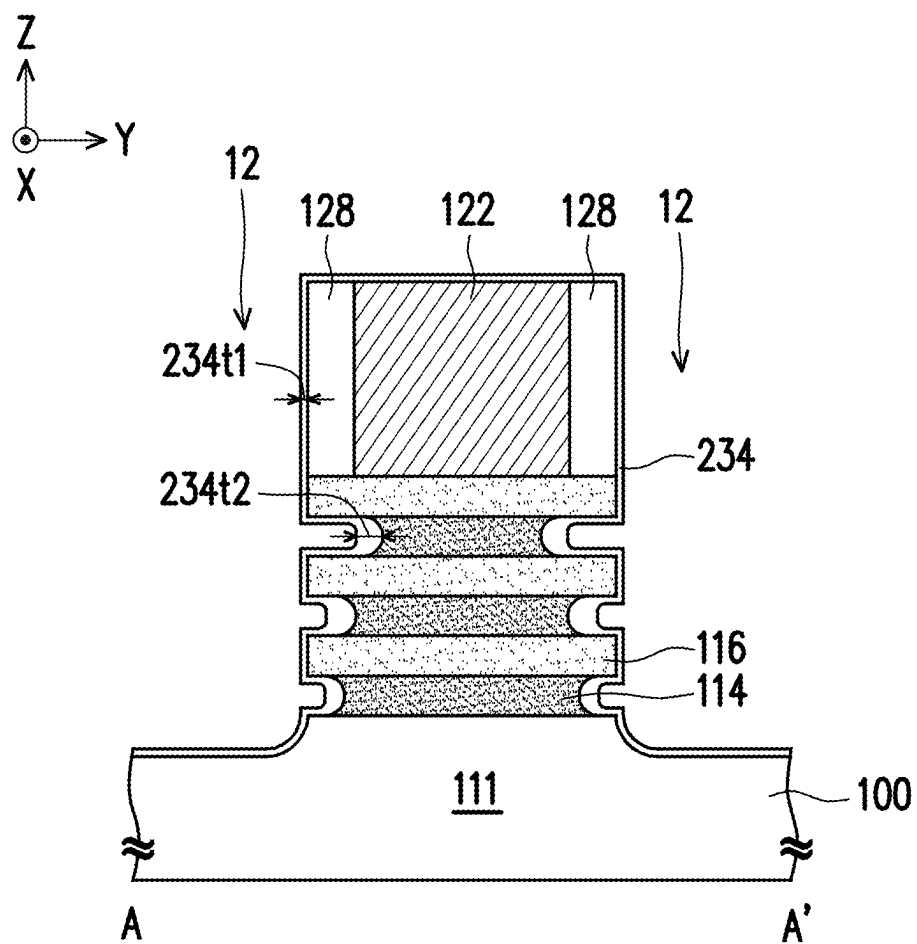


FIG. 25

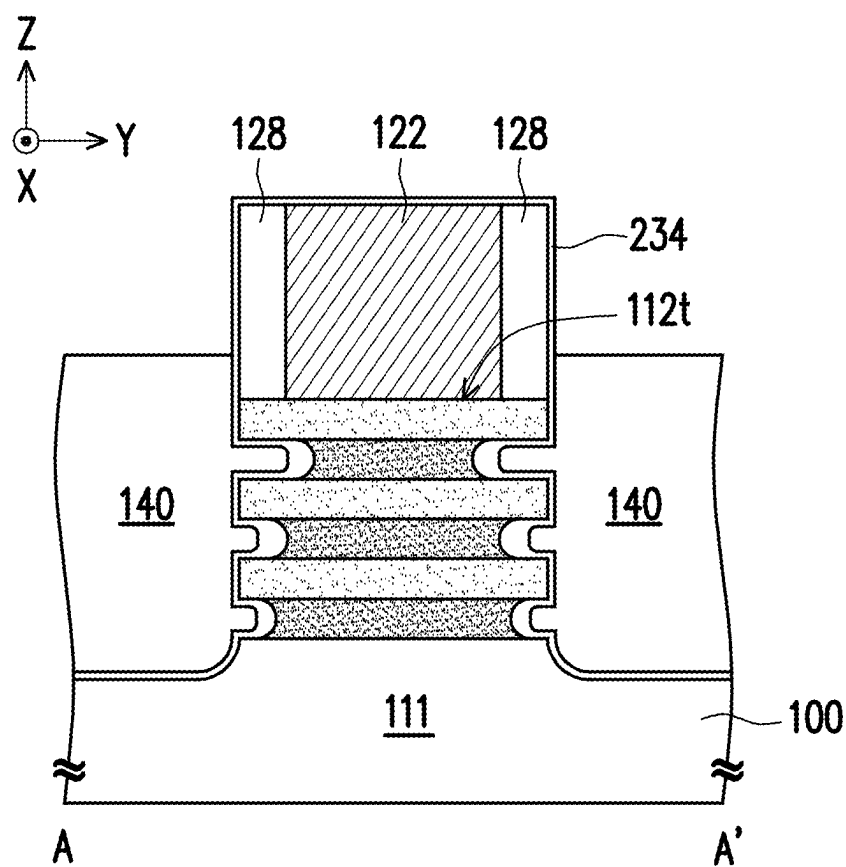


FIG. 26

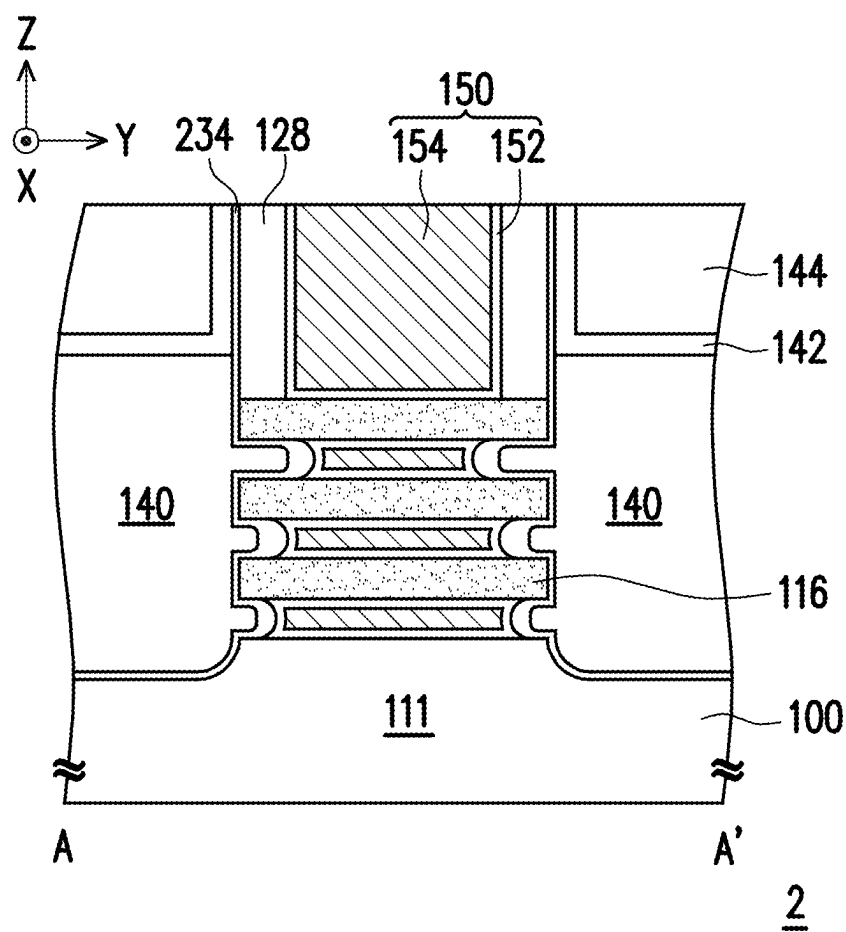


FIG. 27

SEMICONDUCTOR DEVICE AND METHOD OF FORMING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This is a divisional application of and claims the priority benefit of U.S. application Ser. No. 17/873,175, filed on Jul. 26, 2022, now allowed. The U.S. application Ser. No. 17/873,175 is a continuation application of and claims the priority benefit of U.S. application Ser. No. 16/745,340, filed on Jan. 17, 2020, now patented. The entirety of each of the above-mentioned patent applications is hereby incorporated by reference herein and made a part of this specification.

BACKGROUND

[0002] Technological advances in Integrated Circuit (IC) materials and design have produced generations of ICs where each generation has smaller and more complex circuits than the previous generations. In the course of IC evolution, functional density (for example, the number of interconnected devices per chip area) has generally increased while geometry sizes have decreased. This scaling down process generally provides benefits by increasing production efficiency and lowering associated costs.

[0003] Such scaling down has also increased the complexity of processing and manufacturing ICs and, for these advances to be realized, similar developments in IC processing and manufacturing are needed. For example, multi-gate devices have been introduced to replace planar transistors. However, there are quite a few challenges to be handled for the multi-gate technology.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Aspects of the present disclosure are best understood from the following detailed description when read with the accompanying figures. It is noted that, in accordance with the standard practice in the industry, various features are not drawn to scale. In fact, the dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

[0005] FIG. 1 to FIG. 12 are perspective views of intermediate stages in the formation of a semiconductor device in accordance with a first embodiment of the disclosure.

[0006] FIGS. 13, 14A-14C, 15A-15C, 16A-16F, 17, and 18 are corresponding fragmentary cross-sectional views of a semiconductor device in FIG. 7 to FIG. 8 taken along the line A-A' in accordance with some embodiments of the disclosure.

[0007] FIGS. 19, 20, 21, 22, and 23 are corresponding fragmentary cross-sectional views of a semiconductor device in FIG. 9 to FIG. 12 taken along the line A-A' in accordance with some embodiments of the disclosure.

[0008] FIG. 24A to FIG. 24D are corresponding fragmentary cross-sectional views of a semiconductor device in FIG. 12 taken along the line B-B' in accordance with various embodiments of the disclosure.

[0009] FIG. 25 to FIG. 27 are cross-sectional views of intermediate stages in the formation of a semiconductor device in accordance with a second embodiment of the disclosure.

DETAILED DESCRIPTION

[0010] The following disclosure provides many different embodiments, or examples, for implementing different features of the provided subject matter. Specific examples of components and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to be limiting. For example, the formation of a first feature over or on a second feature in the description that follows may include embodiments in which the first and second features are formed in direct contact, and may also include embodiments in which additional features may be formed between the first and second features, such that the first and second features may not be in direct contact. In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed.

[0011] Further, spatially relative terms, such as “beneath,” “below,” “lower,” “above,” “upper” and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. The spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. The apparatus may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein may likewise be interpreted accordingly.

[0012] The gate all around (GAA) transistor structures may be patterned by any suitable method. For example, the structures may be patterned using one or more photolithography processes, including double-patterning or multi-patterning processes. Generally, double-patterning or multi-patterning processes combine photolithography and self-aligned processes, allowing patterns to be created that have, for example, pitches smaller than what is otherwise obtainable using a single, direct photolithography process. For example, in one embodiment, a sacrificial layer is formed over a substrate and patterned using a photolithography process. Spacers are formed alongside the patterned sacrificial layer using a self-aligned process. The sacrificial layer is then removed, and the remaining spacers may then be used to pattern the GAA structure.

[0013] The present disclosure is generally related to semiconductor devices and the fabrication thereof, and more particularly to multi-gate transistors. Multi-gate transistors include those transistors whose gate structures are formed on at least two-sides of a channel region. These multi-gate devices may include a p-type metal-oxide-semiconductor device or an n-type metal-oxide-semiconductor multi-gate device. Specific examples may be presented and referred to herein as FINFET, on account of their fin-like structure. Also presented herein are embodiments of a type of multi-gate transistor referred to as a gate-all-around (GAA) device. A GAA device includes any device that has its gate structure, or portion thereof, formed on 4-sides of a channel region (e.g., surrounding a portion of a channel region). Devices presented herein also include embodiments that have channel regions disposed in nanosheet channel(s), bar-shaped channel(s), and/or other suitable channel configuration. Presented herein are embodiments of devices that may have one or more channel regions (e.g., nanosheets) associated with a single, contiguous gate structure. However, one of ordinary

skill would recognize that the teaching can apply to a single channel (e.g., single nanosheets) or any number of channels. One of ordinary skill may recognize other examples of semiconductor devices that may benefit from aspects of the present disclosure.

[0014] In accordance with some embodiments, a liner layer is formed to line a bottom surface and a sidewall of the source/drain (S/D) region and sandwiched between the S/D region and the semiconductor nanosheets. The liner layer may provide a good interface for epitaxially growing the S/D region which is benefit to control the height and shape of the S/D region, thereby reducing void defects and retaining strain in the channels. In addition, the liner layer or a combination of the inner spacer and the liner layer connecting to each other may increase the etching resistance to protect the S/D region from damaging during the nanosheet formation.

[0015] FIG. 1 to FIG. 12 are perspective views of intermediate stages in the formation of a semiconductor device in accordance with a first embodiment of the disclosure. The semiconductor device illustrated in the following embodiments may be applied to, but not limited thereto, a fin field-effect transistor (FinFET), gate-all-around (GAA) FET, or other transistors including a multi-gate.

[0016] Referring to FIG. 1, a substrate **100** is provided. In some embodiments, the substrate **100** includes a crystalline silicon substrate (e.g., wafer). The substrate **100** may include various doped regions (e.g., p-type well and/or n-type well) depending on design requirements. In some embodiments, the doped regions may be doped with p-type or n-type dopants. For example, the doped regions may be doped with p-type dopants, such as boron or BF_2 ; n-type dopants, such as phosphorus or arsenic; and/or combinations thereof. The doped regions may be configured for an n-type FinFET, or alternatively, configured for a p-type FinFET. In some embodiments, an anti-punch-through (APT) implantation is performed on a top portion of the substrate **100** to form an APT region. The conductivity type of the dopants implanted in the APT region is the same as that of the doped regions (or wells). The APT region may extend under the subsequently formed source/drain (S/D) regions **140** (FIG. 8), and are used to reduce the leakage from the S/D regions **140** to substrate **100**. For clarity, the doped regions and the APT region are not illustrated in FIG. 1 and subsequent drawings. In some alternative embodiments, the substrate **100** includes an element semiconductor such as silicon or germanium, a compound semiconductor such as silicon carbide, gallium arsenic, gallium phosphide, indium phosphide, indium arsenide and indium antimonide, an alloy semiconductor such as SiGe, GaAsP, AlInAs, AlGaAs, GaInAs, GaInP and GaInAsP or combinations thereof.

[0017] As shown in FIG. 1, a semiconductor stack **102** is formed on the substrate **100**. The semiconductor stack **102** may include a plurality of first layers **104a**, **104b**, **104c** (collectively referred to as “first layers **104**”) and a plurality of second layers **106a**, **106b**, **106c** (collectively referred to as “second layers **106**”) stacked alternately in a Z direction. Although only three first layers **104** and three second layers **106** are illustrated in FIG. 1, the embodiments of the present disclosure are not limited thereto. In other embodiments, the number of the first layers **104** and the second layers **106** are adjusted by the need, such as one first layer, two first layers, four first layers, or more first layers. The number of the second layers corresponds to the number of the first layers.

[0018] In some embodiments, the first layers **104** and the second layers **106** include different materials. For example, the first layers **104** are SiGe layers having a germanium percentage in the range between about 15 wt % and 40 wt %, and the second layers **106** are Si layers free from germanium. However, the embodiment of the disclosure is not limited thereto, in other embodiments, the first layers **104** and the second layers **106** have materials with different etching selectivities. In some embodiments, the first layers **104** and the second layers **106** are formed by an epitaxial growth process, such as a molecular beam epitaxy (MBE) process, a metalorganic chemical vapor deposition (MOCVD) process, or the like. In the case, the first layers **104** are epitaxial SiGe layers, and the second layers **106** are epitaxial Si layers. In some alternative embodiments, the first layers **104** and the second layers **106** are formed by a suitable deposition, such as chemical vapor deposition (CVD), atomic layer deposition (ALD), or the like. In the case, the first layers **104** are poly-SiGe layers, and the second layers **106** are poly-Si layers.

[0019] In some embodiments, the first layers **104** have the same thickness T_1 and the second layers **106** have the same thickness T_2 . In some embodiments, the thickness T_1 may be 5 nm to 20 nm and the second thickness T_2 may be 5 nm to 20 nm. Alternatively, the first layers **104a**, **104b**, and **104c** may have different thicknesses, and the second layers **106a**, **106b**, and **106c** may have different thicknesses. In some other embodiments, the first layers **104** and the second layers **106** have the same or different thicknesses.

[0020] As shown in FIG. 1, a mask layer **108** is formed on the semiconductor stack **102**. The mask layer **108** may include a single-layered structure, a two-layered structure, or a multi-layered structure. For example, the mask layer **108** includes a silicon oxide (SiO) layer and a silicon nitride (SiN) layer on the SiO layer. In some embodiments, the mask layer **108** is formed by CVD, ALD, or the like.

[0021] Referring to FIG. 1 and FIG. 2, the mask layer **108** is patterned to form a plurality of mask strips **118**. The semiconductor stack **102** and the substrate **100** are then patterned by using the mask strips **118** as a mask, so as to form a plurality of trenches **10**. In the case, a plurality of fins **111** and a plurality of stacks of semiconductor strips **112** on the fins **111** are formed between the trenches **10**. As shown in FIG. 2, the trenches **10** extend into the substrate **100**, and have lengthwise directions parallel to each other. Herein, the stacks of semiconductor strips **112** are referred to as nanosheet stacks **112** and the combination of the fins **111** and the nanosheet stacks **112** thereon are referred to as hybrid fins **110**, alternatively. Although only two hybrid fins **110** are illustrated in FIG. 2, the embodiments of the present disclosure are not limited thereto. In other embodiments, the number of the hybrid fins **110** may be adjusted by the need, such as one hybrid fin, three hybrid fins, four hybrid fins, or more hybrid fins. In addition, the mask strips **118** illustrated in FIG. 2 have flat top surfaces. However, the embodiments of the present disclosure are not limited thereto. In other embodiments, the mask strips **118** may have dome top surfaces due to the high aspect ratio etching.

[0022] As shown in FIG. 2, in some embodiments, the nanosheet stack **112** include a plurality of first nanosheets **114a**, **114b**, **114c** (collectively referred to as “first nanosheets **114**”) and a plurality of second nanosheets **116a**,

116b, **116c** (collectively referred to as “second nanosheets **116**”) stacked alternately along a Z direction and extending along a Y direction.

[0023] Referring to FIG. 2 and FIG. 3, a plurality of insulating layers **113** are formed in trenches **10**. In detail, in some embodiments, an insulating material is formed on the substrate **100** to cover the hybrid fins **110** and to fill up the trenches **10**. In addition to the hybrid fins **110**, the insulating material further covers the mask strips **118**. The insulating material may include silicon oxide, silicon nitride, silicon oxynitride, a spin-on dielectric material, or a low-k dielectric material. Herein, the low-k dielectric materials are generally dielectric materials having a dielectric constant lower than 3.9. The insulating material may be formed by flowable chemical vapor deposition (FCVD), high-density-plasma chemical vapor deposition (HDP-CVD), sub-atmospheric CVD (SACVD), or spin on. A planarization process may be performed, to remove a portion of the insulating material and the mask strips **118** until the hybrid fins **110** are exposed. In the case, as shown in FIG. 3, top surfaces **110t** of the hybrid fins **110** are substantially coplanar with a top surface **113t** of the planarized insulating material or insulating layers **113**. In some embodiments, the planarization process includes a chemical mechanical polish (CMP), an etching back process, a combination thereof, or the like.

[0024] Referring to FIG. 3 and FIG. 4, the insulating layers **113** are recessed to form a plurality of isolation regions **115**. After recessing the insulating layers **113**, the hybrid fins **110** protrude from top surfaces **115t** of the isolation regions **115**. That is, the top surfaces **115t** of the isolation regions **115** may be lower than the top surfaces **110t** of the hybrid fins **110**. In some embodiments, the nanosheet stacks **112** are exposed by the isolation regions **115**. That is, the top surfaces **115t** of the isolation regions **115** may be substantially coplanar with or lower than bottom surfaces **112bt** of the nanosheet stacks **112**. Further, the top surfaces **115t** of the isolation regions **115** may have a flat surface as illustrated, a convex surface, a concave surface (such as dishing), or a combination thereof. In some embodiments, the insulating layers **113** are recessed by using an appropriate etching process, such as a wet etching process with hydrofluoric acid (HF), a dry etching process, or a combination thereof. In some embodiments, a height difference between the top surfaces **110t** of the hybrid fins **110** and the top surfaces **115t** of the isolation regions **115** ranges from about 30 nm to about 100 nm. In some embodiments, the isolation regions **115** may be shallow trench isolation (STI) regions, deep trench isolation (DTI) regions, or the like.

[0025] Referring to FIG. 4 and FIG. 5, a dummy dielectric layer **120** is formed on the substrate **100**. In detail, as shown in FIG. 5, the dummy dielectric layer **120** conformally cover the surfaces of the nanosheet stacks **112** and the top surfaces **115t** of the isolation regions **115**. In some embodiments, the dummy dielectric layer **120** includes silicon oxide, silicon nitride, silicon oxynitride, or the like, and may be formed by CVD, ALD or the like. In some alternative embodiments, the dummy dielectric layer **120** and the isolation regions **115** have the same or different dielectric materials.

[0026] Referring to FIG. 6, a dummy gate stack **122** is formed over portions of the nanosheet stacks **112** and portion of the isolation regions **115**. The dummy gate stack **122** may extend along a X direction perpendicular to the

extending direction of the nanosheet stacks **112**. That is, the dummy gate stack **122** may be formed across the nanosheet stacks **112**.

[0027] Specifically, the dummy gate stack **122** may include dummy gate electrode **124** and a portion of the dummy dielectric layer **120** covered by the dummy gate electrode **124**. Herein, the portion of the dummy dielectric layer **120** covered by the dummy gate electrode **124** may be referred to as dummy gate dielectric layer **120m**. In some embodiments, the dummy gate electrode **124** includes a silicon-containing material, such as poly-silicon, amorphous silicon, or a combination thereof. The dummy gate electrode **124** may be formed by using a suitable process, such as ALD, CVD, PVD, plating, or combinations thereof. Although the dummy gate electrode **124** illustrated in FIG. 6 is a single-layered structure, the embodiments of the present disclosure are not limited thereto. In other embodiments, the dummy gate electrode **124** may be a multi-layered structure. The dummy gate stack **122** may also include hard mask layer **126** over dummy gate electrode **124**. In some embodiments, the hard mask layer **126** includes a single-layered structure, a two-layered structure, a multi-layered structure. For example, the hard mask layer **126** includes a silicon oxide layer **126a** and a silicon nitride layer **126b** over the silicon oxide layer **126a**.

[0028] As shown in FIG. 6, a pair of spacers **128** are also formed on sidewalls of the dummy gate stack **122**. In some embodiments, the spacers **128** and the dummy gate stack **122** have the same extending direction, namely, the X direction. Similar to the dummy gate stack **122**, the spacers **128** are also formed across the nanosheet stacks **112**. In some embodiments, the spacers **128** are formed of dielectric materials, such as silicon oxide, silicon nitride, carbonized silicon nitride (SiCN), SiCON, or a combination thereof. Although the spacers **128** illustrated in FIG. 6 is a single-layered structure, the embodiments of the present disclosure are not limited thereto. In other embodiments, the spacers **128** may be a multi-layered structure. For example, the spacer **128** may include a silicon oxide layer and a silicon nitride layer on the silicon oxide layer. As shown in FIG. 6, the dummy gate stack **122** and the spacers **128** cover middle portions of the nanosheet stacks **112**, and reveal the opposite end portions not covered.

[0029] Referring to FIG. 6 and FIG. 7, the end portions of the nanosheet stacks **112** are removed and recessed to form recesses **12**. Herein, the recesses **12** may be referred to as source/drain (S/D) recesses **12**. In some embodiments, the end portions of the nanosheet stacks **112** may be removed by an anisotropic etching process, an isotropic etching process, or a combination thereof. In some embodiments, the S/D recesses **12** further extend into the fins **111** and lower than the top surfaces **115t** of the isolation regions **115**. In other words, the end portions of the nanosheet stacks **112** are entirely removed and portions of the fins **111** are further removed. In the case, as shown in FIG. 7, the bottom surfaces **12bt** of the S/D recesses **12** are lower than the top surfaces **115t** of the isolation regions **115**. In some embodiments, some portions of the dummy dielectric layer **120** are removed and other portions of the dummy dielectric layer **120** may be left standing over and aligned to the edges of isolation regions **115**, with the S/D recesses **12** formed therebetween. In addition, portions of the dummy dielectric layer **120** (in FIG. 6) covered by the spacers **128** may be considered to as portions of the spacers **128** as shown in FIG.

7. The spacers **128** may cover sidewalls of the dummy gate stack **122** which includes the dummy gate dielectric layer **120m**, the dummy gate electrode **124**, and the hard mask layer **126**.

[0030] It should be noted that, after forming the S/D recesses **12**, a plurality of inner spacers **132** and a liner layer **134** may be formed before forming source/drain (S/D) regions **140** (as shown in FIG. **8**). For clarity, the forming steps are shown in FIGS. **13**, **14A-14C**, **15A-15C**, **16A-16F**, **17**, and **18** which correspond fragmentary cross-sectional views of a semiconductor device in FIG. **7** to FIG. **8** taken along the line A-A'.

[0031] Referring to FIG. **13**, after forming the S/D recesses **12**, a sidewall **112s** of the nanosheet stacks **112** may be aligned with an outer sidewall **128s** of the spacers **128**. For clarity, the dummy gate stack **122** in the following cross-sectional views are illustrated as a single layer.

[0032] Referring to FIG. **13** and FIG. **14A**, portions of the first nanosheets **114** are laterally recessed. In some embodiments, the portions of the first nanosheets **114** exposed by the S/D recesses **12** are removed, and thus as shown in FIG. **14A**, a plurality of cavities **14** are respectively formed between the second nanosheets **116**. In some embodiments, the first nanosheets **114** are laterally recessed by a wet etching, a dry etching, or a combination thereof. For example, the first nanosheets **114** may be selectively etched by using a wet etchant such as, but not limited to, ammonium hydroxide (NH₄OH), tetramethylammonium hydroxide (TMAH), ethylenediamine pyrocatechol (EDP), or potassium hydroxide (KOH) solutions. Alternatively, before laterally recessing the portions of the first nanosheets **114**, the end portions of the first nanosheets **114** exposed by the recesses **12** may be selectively oxidize, so as to increase the etching selectivity between the first and second nanosheets **114** and **116**. In some alternative embodiments, the oxidation process may be performed by exposing to a wet oxidation process, a dry oxidation process, or a combination thereof. The chemical used in the oxidation process may include H₂SO₄ or the like.

[0033] In some embodiments, as shown in FIG. **14A**, the cavities **14** have the same (lateral) depth D. The depth D may be in a range from about 5 nm to about 20 nm. Herein, the depth D is respectively measured from the sidewall **116s** of one second nanosheet **116** to the sidewall **114s** of the respective first nanosheet **114**. In other words, the sidewalls **116s** of the second nanosheets **116** are not aligned with the sidewalls **114s** of the first nanosheet **114**. However, the embodiments of the present disclosure are not limited thereto, in other embodiments, as shown in FIG. **14B**, the cavities **14a**, **14b**, and **14c** have different depths D1, D2, and D3. In the case, the uppermost first nanosheet **114c** is in contact with the etchant for a longer time than the underlying first nanosheet **114a**, and thus a removal amount of the uppermost first nanosheet **114c** is greater than a removal amount of the underlying first nanosheet **114b**. Similarly, the removal amount of the first nanosheet **114b** is greater than a removal amount of the underlying first nanosheet **114a**. Accordingly, as shown in FIG. **14B**, the cavity **14c** has a depth D3 greater than a depth D2 of the cavity **14b**, and the cavity **14a** has a depth D1 less than the depth D2 of the cavity **14b**. That is, the depths D1, D2, and D3 gradually increase from bottom to top, namely, D1<D2<D3. In some embodiments, the sidewalls **114s** of the first nanosheets **114** are not aligned with each other. The depth D1 may be in a

range from about 5 nm to about 15 nm, the depth D2 may be in a range from about 6 nm to about 16 nm, the depth D3 may be in a range from about 7 nm to about 17 nm. The sidewalls **114s** of the first nanosheets **114** illustrated in FIG. **14A** are vertical sidewalls substantially perpendicular to the top surface **111t** of the fin **111**. However, the embodiments of the present disclosure are not limited thereto, in some alternative embodiments, as shown in FIG. **14C**, the sidewalls **114s'** of the first nanosheets **114** illustrated in FIG. **14C** are curved or arc sidewalls protruding from the end of the first nanosheets **114** into the center of the first nanosheets **114**. In the embodiment, the cavity **14f** has a depth D6 greater than a depth D5 of the cavity **14e**, and the cavity **14d** has a depth D4 less than the depth D5 of the cavity **14e**. That is, the depths D4, D5, and D6 gradually increase from bottom to top, namely, D4<D5<D6. The depth D4 may be in a range from about 5 nm to about 15 nm, the depth D5 may be in a range from about 6 nm to about 16 nm, the depth D6 may be in a range from about 7 nm to about 17 nm.

[0034] Referring to FIGS. **14A** to **14C** and FIGS. **15A** to **15C**, an inner spacer material layer **130** is formed on the substrate **100**. In some embodiments, the inner spacer material layer **130** conformally covers the S/D recesses **12**, the dummy gate stack **122**, and the spacers **128**, and further fills in the cavities **14** (including cavities **14a-14f**) to reduce the size of the cavities **14** or completely fill in the cavities **14**. In some embodiments, the inner spacer material layer **130** includes silicon oxides, silicon nitrides, silicon carbides, silicon carbide nitride, silicon oxide carbide, silicon carbide oxynitride, and/or other suitable dielectric materials, and may be formed by ALD or any other suitable method. In some alternative embodiments, the inner spacer material layer **130** include a low-k dielectric material having a dielectric constant lower than 3.9.

[0035] Referring to FIGS. **15A** to **15C** and FIGS. **16A** to **16C**, a portion of the inner spacer material layer **130** is removed to form a plurality of inner spacers **132** in the cavities **14**. In some embodiments, the portion of the inner spacer material layer **130** is removed by a plasma dry etching or any other suitable method. Generally, the plasma dry etching etches a layer in wide and flat areas faster than a layer in concave (e.g., holes, grooves and/or slits) portions. Thus, the inner spacer material layer **130** may remain inside the cavities **14**. The remained portions of the inner spacer material layer **130** is referred to as the inner spacers **132**. In some embodiments, as shown in FIG. **16A**, the inner spacers **132** have the same length L. The length L may be in a range from about 5 nm to about 20 nm. In other embodiments, as shown in FIG. **16B**, the inner spacers **132a**, **132b**, and **132c** have different lengths L1, L2, and L3. The lengths L1, L2, and L3 may gradually increase along a direction from the substrate **100** to the dummy gate stack **122**, namely, L1<L2<L3. The length L1 may be in a range from about 5 nm to about 15 nm, the length L2 may be in a range from about 6 nm to about 16 nm, the length L3 may be in a range from about 7 nm to about 17 nm. A ratio of the topmost length L3 to the bottommost length L1 may be in a range of 1.1 to 1.4. The inner sidewalls **132s1** of the inner spacers **132** illustrated in FIG. **16A** are vertical sidewalls substantially perpendicular to the top surface **111t** of the fin **111**. However, the embodiments of the present disclosure are not limited thereto, in some alternative embodiments, the inner sidewalls **132s1'** of the inner spacers **132d**, **132e**, and **132f** are curved or arc sidewalls protruding from the end of the first

nanosheets **114** into the center of the first nanosheets **114**, as shown in FIG. **16C**. The inner spacers **132d**, **132e**, and **132f** may have different lengths L_4 , L_5 , and L_6 . The lengths L_4 , L_5 , and L_6 may gradually increase along a direction from the substrate **100** to the dummy gate stack **122**, namely, $L_4 < L_5 < L_6$. The length L_4 may be in a range from about 5 nm to about 15 nm, the length L_5 may be in a range from about 6 nm to about 16 nm, the length L_6 may be in a range from about 7 nm to about 17 nm. A ratio of the topmost length L_6 to the bottommost length L_4 may be in a range of 1.1 to 1.4.

[0036] In some embodiments, the outer sidewalls **132s2** of the inner spacers **132** are aligned with the sidewalls **116s** of the second nanosheets **116**, as shown in FIGS. **16A-16C**. That is, the inner spacer material **130** on the sidewalls is etched and the inner spacer material **130** filled in the cavities **14** are not etched during the said plasma dry etching. However, the embodiments of the present disclosure are not limited thereto, in some alternative embodiments, as shown in FIGS. **16D-16E**, the outer sidewalls **132s2'** of the inner spacers **132** are dented or concave from the sidewalls **116s** of the second nanosheets **116**. In the case, the inner spacer **132g** in FIG. **16D** may be shorter than the inner spacer **132** in FIG. **16A**, and the inner spacer **132h**, **132i**, **132j** in FIG. **16E** may be shorter than the inner spacer **132a**, **132b**, **132c** in FIG. **16B**. In some embodiments, as shown in FIG. **16D** and FIG. **16E**, the dented distances DD are the same to each other. However, the embodiments of the present disclosure are not limited thereto, in other embodiments, the dented distances $DD1$, $DD2$, and $DD3$ may gradually increase along a direction from the substrate **100** to the dummy gate stack **122**, namely, $DD1 < DD2 < DD3$. It should be noted that the inner spacers **232a**, **232b**, and **232c** (collectively referred to as "inner spacers **232**") may be formed as crescent shape. That is, one of the inner spacers **232** has a curved inner sidewall **232s1** and a curved outer sidewall **232s2**. The outer sidewalls **232s2** are dented or concave from the sidewalls **116s** of the second nanosheets **116**. As shown in the enlarged view of FIG. **16F**, one of the inner spacers **232** may have a center thickness **232t1** and an edge thickness **232t2** less than the center thickness **232t1**. A ratio of the center thickness **232t1** to the edge thickness **232t2** may be in a range of 1.0 to 4.0. Hereinafter, the structure illustrated in FIG. **16F** is used as an example for the following steps.

[0037] Referring to FIG. **16F** and FIG. **17**, a liner layer **134** may be formed on the substrate **100**. In some embodiments, the liner layer **134** conformally covers the S/D recesses **12** and the cavities **14**. The liner layer **134** may be polysilicon layer, a germanium (Ge) layer, a silicon-germanium (SiGe) layer, the like, or a combination thereof, and may be formed by ALD.

[0038] Referring to FIG. **17** and FIG. **18**, a strained material **140** (or a highly doped low resistance material) are epitaxially grown from the liner layer **134**. FIG. **18** is the corresponding fragmentary cross-sectional view of FIG. **8** taken along the line A-A'. In some embodiments, the strained material **140** is used to strain or stress the second nanosheets (which may be referred to as channel members) **116** and the fins **111**. Herein, the strained material **140** may be referred to as S/D regions **140**. In the case, the strained material **140** includes a source disposed at one side of the dummy gate stack **122** and a drain disposed at another side of the dummy gate stack **122**. The source covers an end of the fins **111**, and the drain covers another end of the fins **111**.

The S/D regions **140** are abutted and electrically connected to the second nanosheets **116** by the liner layer **134**, while the S/D regions **140** are electrically isolated from the first nanosheets **114** by the inner spacers **232**. In some embodiments, as shown in FIG. **18**, the S/D regions **140** extends beyond the top surface **112t** of the nanosheet stacks **112**. However, the embodiments of the present disclosure are not limited thereto, in other embodiments, the top surface **140t** of the S/D regions **140** is substantially aligned with the top surface **112t** of the nanosheet stacks **112**.

[0039] In some embodiments, the S/D regions **140** is derived from the material of the liner layer **134**. For example, when the liner layer **134** is polysilicon layer, the strained material **140** may be a silicon-containing material. It should be noted that the liner layer **234** is benefit for forming the S/D regions **140** in the cavities **14**. Specifically, the inner spacers **232** made of the dielectric material is not favorable for epitaxially growing the S/D regions, which may form voids between the inner spacers **232** and the S/D regions **140**, thereby affecting the strain in the channels and the performance of the device. In other words, the liner layer **234** may provide a good interface for epitaxially growing the S/D regions **140** which is benefit to control the height and shape of the S/D regions **140**, thereby reducing void defects and retaining strain in the channels. In addition, a combination of the liner layer **134** and the inner spacers **232** made of the low-k dielectric material may improve the parasitic capacitance, thereby enhancing the performance of the device.

[0040] In some other embodiments, the S/D regions **140** include any acceptable material, such as appropriate for p-type FinFETs. For example, if the liner layer **134** is silicon, the S/D regions **140** may include SiGe, SiGeB, Ge, GeSn, or the like. In some alternative embodiments, the S/D regions **140** includes any acceptable material, such as appropriate for n-type FinFETs. For example, if the liner layer **134** is silicon, the S/D regions **140** may include silicon, SiC, SiCP, SiP, or the like. In some embodiments, the S/D regions **140** are formed by MOCVD, MBE, ALD, or the like.

[0041] In some embodiments, the S/D regions **140** may be doped with a conductive dopant. For example, the S/D regions **140**, such as SiGe, may be epitaxial-grown with a p-type dopant for straining a p-type FinFET. That is, the S/D regions **140** is doped with the p-type dopant to be the source and the drain of the p-type FinFET. The p-type dopant includes boron or BF_2 , and the S/D regions **140** may be epitaxial-grown by LPCVD process with in-situ doping. In some alternative embodiments, the S/D regions **140**, such as SiC, SiP, a combination of SiC/SiP, or SiCP is epitaxial-grown with an n-type dopant for straining an n-type FinFET. That is, the S/D regions **140** is doped with the n-type dopant to be the source and the drain of the n-type FinFET. The n-type dopant includes arsenic and/or phosphorus, and the S/D regions **140** may be epitaxial-grown by LPCVD process with in-situ doping.

[0042] As a result of the epitaxial-grown process used to form the S/D regions **140**, the cross section of the S/D regions **140** may have a diamond or pentagonal shape as illustrated in FIG. **8**. However, the embodiments of the present disclosure are not limited thereto. In other embodiments, the cross section of the S/D regions **140** also have a hexagonal shape, a pillar shape, or a bar shape. In some embodiments, as shown in FIG. **8**, adjacent S/D regions **140** are separated from each other after the epitaxial-grown

process is completed. Alternatively, adjacent S/D regions **140** may be merged. In some alternative embodiments, the liner layer **134** on the top surface and the sidewalls of the dummy gate stack **122** may be removed after forming the S/D regions **140**.

[0043] Referring to FIG. 9 and FIG. 19, a contact etch stop layer (CESL) **142** over the S/D regions **140** and an interlayer dielectric (ILD) layer **144** over the CESL **142**. In some embodiments, the CESL **142** conformally covers the S/D regions **140** and the sidewalls of the outer sidewall **128s** of the spacers **128**. For clarity, the CESL **142** is not illustrated in perspective views of FIG. 9. The CESL **142** may include silicon nitride, silicon oxynitride, silicon nitride with oxygen (O) or carbon (C) elements, and/or other materials; and may be formed by CVD, PVD (physical vapor deposition), ALD, or other suitable methods.

[0044] In addition, in order to illustrate the features behind the front portion of the ILD layer **144**, some front portions of the ILD layer **144** are not shown in FIG. 9 and subsequent figures, so that the inner features may be illustrated. It is appreciated that the un-illustrated portions of the ILD layer **144** still exist. In some embodiments, the ILD layer **144** includes silicon oxide, silicon nitride, silicon oxynitride, phosphosilicate glass (PSG), borophosphosilicate glass (BPSG), spin-on glass (SOG), fluorinated silica glass (FSG), carbon doped silicon oxide (e.g., SiCOH), polyimide, and/or a combination thereof. In some other embodiments, the ILD layer **144** includes low-k dielectric materials. Examples of low-k dielectric materials include BLACK DIAMOND® (Applied Materials of Santa Clara, Calif.), Xerogel, Aerogel, amorphous fluorinated carbon, Parylene, BCB (bis-benzocyclobutenes), Flare, SILK® (Dow Chemical, Midland, Mich.), hydrogen silsesquioxane (HSQ) or fluorinated silicon oxide (SiOF), and/or a combination thereof. In alternative embodiments, the ILD layer **144** include one or more dielectric materials and/or one or more dielectric layers. In some embodiments, the ILD layer **144** is formed to a suitable thickness by FCVD, CVD, HDPCVD, SACVD, spin-on, sputtering, or other suitable methods. For example, an interlayer dielectric material layer (not shown) is initially formed to cover the isolation regions **115**, the dummy gate stack **122**, and the spacers **128**. Subsequently, a thickness of the interlayer dielectric material layer is reduced until the dummy gate stack **122** is exposed, so as to form the ILD layer **144**. In the case, the liner layer **134** on the top surface of the dummy gate stack **122** is also removed. The process of reducing the thickness of the interlayer dielectric material layer may be achieved by a chemical mechanical polishing (CMP) process, an etching process, or other suitable processes. In the case, the top surface **144t** of the ILD layer **144** may be coplanar with the top surface **122t** of the dummy gate stack **122**.

[0045] Referring to FIG. 9 and FIG. 20, the dummy gate stack **122** is removed to form a gate trench **16**. The ILD layer **144** and the CESL **142** may protect the S/D regions **140** during removing the dummy gate stack **122**. The dummy gate stack **122** may be removed by using plasma dry etching and/or wet etching. When the dummy gate electrode is polysilicon and the ILD layer **144** is silicon oxide, a wet etchant such as a TMAH solution may be used to selectively remove the dummy gate electrode. The dummy gate dielectric layer is thereafter removed by using another plasma dry etching and/or wet etching.

[0046] Referring to FIG. 10A and FIG. 21, an etching process is performed to remove the first nanosheets **114**. In the case, the first nanosheets **114** may be completely removed to form a plurality of gaps **18** between the second nanosheets **116**, as shown in FIG. 21. Accordingly, the second nanosheets **116** are separated from each other by the gaps **18**. In addition, the bottommost second nanosheet **116** may also be separated from the fin **111** by the gaps **18**. As a result, the second nanosheets **116** are suspended. The opposite ends of the suspended second nanosheets **116** are connected to S/D regions **140**. Herein, the suspended second nanosheets **116** may be referred to as channel members **116**. It should be noted that the inner spacers **232** and portions of the liner layer **134** abutting the inner spacers **232** may be referred to as a barrier for protecting the S/D regions **140** during the etching process. In some embodiments, since the inner spacer **232** has the thinner edge thickness $232t/2$ (in FIG. 16F), the etchant used in the etching process may etch through the thinner edge thickness $232t/2$ to damage the S/D regions **140**. The portions of the liner layer **134** abutting the inner spacers **232** may increase the etching resistance to protect the S/D regions **140** from damaging. Herein the etching process may be referred to as nanosheet formation or releasing nanosheet process.

[0047] In some embodiments, a height $18h$ of the gaps **18** may be 5 nm to 30 nm. In the present embodiment, the second nanosheets **116** include silicon, and the first nanosheets **114** include silicon germanium. The first nanosheets **114** may be selectively removed by oxidizing the first nanosheets **114** using a suitable oxidizer, such as ozone. Thereafter, the oxidized first nanosheets **114** may be selectively removed from the gate trench **16**. In some embodiments, the etching process includes a dry etching process to selectively remove the first nanosheets **114**, for example, by applying an HCl gas at a temperature of about 20° C. to about 300° C., or applying a gas mixture of CF₄, SF₆, and CHF₃. Herein, as shown in FIG. 21, vertically stacked nanosheets **116** may be referred to as semiconductor nanosheet stacks or channel stack of the n-type and/or p-type semiconductor device, alternatively.

[0048] FIG. 10B illustrates a clearer view of the portions of stacked nanosheets **116**. The ILD **144**, the S/D regions **140**, and the spacers **128** as shown in FIG. 10A are not shown in FIG. 10B, although these features still exist.

[0049] Referring to FIG. 11A and FIG. 22, a gate dielectric layer **152** is formed in the gate trench **16** and the gaps **18**. FIG. 11B illustrates a clearer view of the gate dielectric layer **152** wrapping the second nanosheets **116**. In addition, the gate dielectric layer **152** conformally covers the gate trench **16** to form a U-shape cross-section, as shown in FIG. 22. In some embodiments, the gate dielectric layer **152** includes one or more layers of a dielectric material, such as silicon oxide, silicon nitride, or high-k dielectric material, other suitable dielectric material, and/or combinations thereof. Examples of high-k dielectric material include HfO₂, HfSiO, HfSiON, HfTaO, HfTiO, HfZrO, zirconium oxide, aluminum oxide, titanium oxide, hafnium dioxide-alumina (HfO₂—Al₂O₃) alloy, other suitable high-k dielectric materials, and/or combinations thereof. In some embodiments, the gate dielectric layer **152** includes an interfacial layer (not shown) formed between the channel members and the dielectric material. The gate dielectric layer **152** may be formed by CVD, ALD or any suitable method. In one embodiment, the gate dielectric layer **152** is formed by using

a highly conformal deposition process, such as ALD in order to ensure the formation of a gate dielectric layer having a uniform thickness around each channel members. A thickness of the gate dielectric layer 152 is in a range from about 0.5 nm to about 3 nm in some embodiments.

[0050] Referring to FIG. 12A and FIG. 23, a gate electrode 154 is formed on the gate dielectric layer 152 to surround each nanosheet or channel member 116. In the case, the gate electrode 154 and the gate dielectric layer 152 constitute a gate stack 150, and a semiconductor device 1 of the first embodiment is accomplished, as shown in FIG. 12. In the present embodiment, the liner layer 134 lines the bottom surfaces and the sidewalls of the S/D regions 140 and is sandwiched between the S/D regions 140 and the gate stack 150. The liner layer 134 further extends between the S/D regions 140 and the nanosheets 116 to separate the S/D regions 140 from the nanosheets 116. The liner layer 134 is benefit for epitaxially growing the S/D regions 140. In addition, the liner layer 134 also strengthen the blocking effect of the inner spacers 232 with crescent shape during the nanosheet formation or the releasing nanosheet process. Further, the combination of the liner layer 134 and the inner spacers 232 further avoids doping diffusion between the S/D regions 140 and the gate stack 150, thereby improving the performance of the semiconductor device 1.

[0051] The gate electrode 154 may include one or more layers of conductive material, such as polysilicon, aluminum, copper, titanium, tantalum, tungsten, cobalt, molybdenum, tantalum nitride, nickel silicide, cobalt silicide, TiN, WN, TiAl, TiAlN, TaCN, TaC, TaSiN, metal alloys, other suitable materials, and/or combinations thereof. The gate electrode 154 may be formed by CVD, ALD, electroplating, or other suitable method. The gate dielectric layer 152 and the gate electrode 154 may also be deposited over the upper surfaces of the ILD layer 144 and the CESL 142. The gate dielectric layer 152 and the gate electrode 154 formed over the ILD layer 144 and the CESL 142 are then planarized by using, for example, CMP, until the top surfaces of the ILD layer 144 and the CESL 142 are revealed. In some embodiments, after the planarization operation, the gate electrode 154 is recessed and a cap insulating layer (not shown) is formed over the recessed gate electrode 154. The cap insulating layer includes one or more layers of a silicon nitride-based material, such as SiN. The cap insulating layer may be formed by depositing an insulating material followed by a planarization operation.

[0052] In some alternative embodiments, one or more work function adjustment layers (not shown) are interposed between the gate dielectric layer 152 and the gate electrode 154. The work function adjustment layers are made of a conductive material, such as a single layer of TiN, TaN, TaAlC, TiC, TaC, Co, Al, TiAl, HfTi, TiSi, TaSi or TiAlC, or a multilayer of two or more of these materials. For the n-type device, one or more of TaN, TaAlC, TiN, TiC, Co, TiAl, HfTi, TiSi and TaSi is used as the work function adjustment layer, and for the p-type device, one or more of TiAlC, Al, TiAl, TaN, TaAlC, TiN, TiC and Co is used as the work function adjustment layer. The work function adjustment layer may be formed by ALD, PVD, CVD, e-beam evaporation, or other suitable process. Further, the work function adjustment layer may be formed separately for the n-type device and the p-type device which may use different metal layers.

[0053] FIG. 24A shows a cross-sectional view along the line B-B' of the semiconductor device 1 in FIG. 12. In the embodiment, the gate dielectric layer 152 wraps the second nanosheets 116 (hereinafter called channel members 116). In some embodiments, one of the channel members 116 has rounded corners, a flat top surface connecting two adjacent rounded corners, and a flat bottom surface connecting other adjacent rounded corners. The gate dielectric layer 152 wrapping the corresponding channel member 116 also has rounded corners, a flat top surface, and a flat bottom surface. The gate electrode 154 is sandwiched between adjacent channel members 116 to separate the gate dielectric layers 152 from each other, as shown in FIG. 24A. However, the embodiment of the disclosure is not limited thereto, in other embodiments, portions of the gate dielectric layer 154 wrapping the channel members 116 are connected together to form a continuous region. In the case, as shown in FIG. 24B, the gate electrode 154 will not be filled into the gaps between the channel members 116. Although the channel members 116 in cross-section illustrated in FIG. 24A and FIG. 24B are rectangle-like shape, the embodiment of the disclosure is not limited thereto. In some alternative embodiments, as shown in FIG. 24C and FIG. 24D, the channel members 116 in cross-section may be circular shape, elliptical shape, or the like.

[0054] FIG. 25 to FIG. 27 are cross-sectional views of intermediate stages in the formation of a semiconductor device in accordance with a second embodiment of the disclosure.

[0055] FIG. 25 illustrates a structure following the structure in FIG. 14C. Next, a liner layer 234 may be formed on the substrate 100. In some embodiments, the liner layer 234 conformally covers the S/D recesses 12 and the cavities 14. The liner layer 234 may be polysilicon layer, a Ge layer, a SiGe layer, the like, or a combination thereof, and may be formed by ALD. In some embodiments, the liner layer 234 has a first portion on the dummy gate stack 122 (or spacers 128) and a second portion in the cavities 14. The first portion has a first thickness 234/1 and the second portion has a second thickness 234/2. The second thickness 234/2 is greater than the first thickness 234/1. It should be noted that the thicker second thickness 234/2 in the cavities 14 is able to block the etchant used in the subsequent nanosheet formation or releasing nanosheet process.

[0056] FIG. 26 illustrates the S/D regions (or strained material) 140 epitaxially grown from the liner layer 134. In some embodiments, the S/D regions 140 fully fills in the cavities 14 and extends beyond the top surface 112t of the nanosheet stacks 112. The material and forming method of the S/D regions 140 have been described in detail in the above embodiments. Thus, details thereof are omitted here. In addition, the liner layer 234 conformally and continuously covering the cavities 14 may provide a good interface for epitaxially growing the S/D regions 140 which is benefit to control the height and shape of the S/D regions 140, thereby reducing void defects and retaining strain in the channels.

[0057] FIG. 26 and FIG. 27 illustrate a sequence steps corresponding to FIG. 19 to FIG. 23. After forming the S/D regions 140, the CESL 142 is formed on the S/D regions 140 and the ILD layer 144 is formed on the CESL 142. The dummy gate stack 122 is then removed to form the gate trench. Thereafter, the first nanosheets 114 is completely removed to release the second nanosheets 116 and form the

gaps between the second nanosheets **116**. The gate stack **150** is formed in the gate trench and the gaps. The gate stack **150** may include the gate dielectric layer **152** wrapping the second nanosheets **116** and the gate electrode **154** covering the gate dielectric layer **152**. After forming the gate stack **150**, a semiconductor device of the second embodiment is accomplished, as shown in FIG. 27.

[0058] According to some embodiments, the semiconductor device includes a substrate, a plurality of semiconductor nanosheets, a source/drain (S/D) region, a gate stack, and a liner layer. The substrate includes at least one fin. The plurality of semiconductor nanosheets are stacked on the at least one fin. The S/D region abuts the plurality of semiconductor nanosheets. The gate stack wraps the plurality of semiconductor nanosheets. The liner layer lines a bottom surface and a sidewall of the S/D region and is sandwiched between the S/D region and the gate stack.

[0059] According to some embodiments, a method of forming a semiconductor device includes: forming a semiconductor stack on a substrate, wherein the semiconductor stack comprises a plurality of first layers and a plurality of second layers stacked alternately; patterning the semiconductor stack and the substrate to form a plurality of trenches in the substrate and a stack of semiconductor strips between the plurality of trenches; forming a dummy gate stack across the at least one stack of semiconductor strips; removing a portion of the stack of semiconductor strips at opposite sides of the dummy gate stack to form source/drain (S/D) recesses exposing the substrate; laterally recessing the plurality of first layers to form a plurality of cavities; forming a liner layer to cover the S/D recesses and the plurality of cavities; and epitaxially growing S/D regions from the liner layer.

[0060] According to some embodiments, a method of forming a semiconductor device includes: forming a nanosheet stack on at least one fin, wherein the nanosheet stack comprises a plurality of Si nanosheets and a plurality of SiGe nanosheets disposed alternately; laterally recessing the plurality of SiGe nanosheets to form a plurality of cavities; forming a plurality of inner spacers in the plurality of cavities respectively; forming a liner layer to cover outer sidewalls of the plurality of inner spacers; epitaxially growing S/D regions from the liner layer; removing the plurality of SiGe nanosheets to form a plurality of gaps between the plurality of the Si nanosheets; and forming a gate stack wrapping the plurality of the Si nanosheets.

[0061] The foregoing outlines features of several embodiments so that those skilled in the art may better understand the aspects of the present disclosure. Those skilled in the art should appreciate that they may readily use the present disclosure as a basis for designing or modifying other processes and structures for carrying out the same purposes and/or achieving the same advantages of the embodiments introduced herein. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the present disclosure, and that they may make various changes, substitutions, and alterations herein without departing from the spirit and scope of the present disclosure.

What is claimed is:

1. A method of forming a semiconductor device, comprising:

forming a nanosheet stack on at least one fin, wherein the nanosheet stack comprises a plurality of Si nanosheets and a plurality of SiGe nanosheets disposed alternately;

laterally recessing the plurality of SiGe nanosheets to form a plurality of cavities;

forming a liner layer to cover the plurality of cavities and extend to cover a sidewall of the plurality of Si nanosheets;

epitaxially growing S/D regions from the liner layer;

removing the plurality of SiGe nanosheets to form a plurality of gaps between the plurality of the Si nanosheets; and

forming a gate stack to wrap the plurality of the Si nanosheets and fill in the plurality of gaps, wherein the gate stack comprises a gate dielectric layer and a gate electrode on the gate dielectric layer,

wherein the liner layer continuously vertically extends between adjacent Si nanosheets to conformally fill in the plurality of cavities and completely cover an outer sidewall of the gate dielectric layer, wherein the liner layer is in direct contact with the gate dielectric layer between the plurality of Si nanosheets.

2. The method of claim 1, wherein the liner layer comprises a polysilicon layer, a germanium (Ge) layer, a silicon-germanium (SiGe) layer, or a combination thereof.

3. The method of claim 1, wherein a first portion of the liner layer sandwiched between the S/D region and the gate stack has a first thickness, a second portion of the liner layer sandwiched between the S/D region and the plurality of Si nanosheets has a second thickness, and the first thickness is greater than the second thickness.

4. The method of claim 1, further comprising forming a spacer to cover a sidewall of the gate stack on the plurality of Si nanosheets, wherein the liner layer further extends to directly contact a sidewall of the spacer, so that the spacer is sandwiched between the liner layer and the gate stack on the plurality of Si nanosheets.

5. The method of claim 1, wherein the S/D regions have a plurality of protrusions respectively filling into the plurality of cavities, and the plurality of protrusions are vertically sandwiched between the plurality of Si nanosheets.

6. The method of claim 1, wherein depths of the plurality of cavities gradually increase along a stack direction of the nanosheet stack.

7. The method of claim 1, wherein the liner layer is formed by using an atomic layer deposition (ALD).

8. A semiconductor device, comprising:

a plurality of semiconductor nanostructures stacked on a substrate;

a source/drain (S/D) region abutting the plurality of semiconductor nanostructures;

a gate stack wrapping the plurality of semiconductor nanostructures, wherein the gate stack between the plurality of semiconductor nanostructures has an outer sidewall concave from a sidewall of the plurality of semiconductor nanosheet to form a plurality of cavities between the plurality of semiconductor nanostructures; and

a liner layer lining a bottom surface and a sidewall of the S/D region and sandwiched between the S/D region and the gate stack, wherein the liner layer continuously vertically extends between adjacent semiconductor nanostructures to conformally fill in the plurality of cavities and completely cover the outer sidewall of the gate stack, wherein the liner layer comprises:

a first portion sandwiched between the S/D region and the gate stack, and having a first thickness; and

a second portion sandwiched between the S/D region and the plurality of semiconductor nanostructures, and having a second thickness, wherein the first thickness is greater than the second thickness.

9. The semiconductor device of claim 8, wherein the first portion of the liner layer is in direct contact with the gate stack between the plurality of semiconductor nanostructures.

10. The semiconductor device of claim 8, wherein the second portion of the liner layer is in direct contact with the plurality of semiconductor nanostructures and the S/D region.

11. The semiconductor device of claim 8, wherein the liner layer is a polysilicon layer, a germanium (Ge) layer, a silicon-germanium (SiGe) layer, or a combination thereof.

12. The semiconductor device of claim 8, wherein a material of the S/D region is derived from or epitaxially grown from a material of the liner layer.

13. The semiconductor device of claim 8, wherein lateral depths of the plurality of cavities gradually increase along a stack direction of the semiconductor nanostructures.

14. The semiconductor device of claim 8, further comprising a spacer covering a sidewall of the gate stack on the plurality of semiconductor nanostructures, wherein the liner layer further extends to directly contact a sidewall of the spacer, so that the spacer is sandwiched between the liner layer and the gate stack on the plurality of semiconductor nanostructures.

15. A method of forming a semiconductor device, comprising:

forming at least one stack of semiconductor strip on a substrate, wherein the at least one stack of semiconductor strip comprises a plurality of first layers and a plurality of second layers stacked alternately;

forming a dummy gate stack across the at least one stack of semiconductor strips;

removing a portion of the at least one stack of semiconductor strip at opposite sides of the dummy gate stack to form source/drain (S/D) recesses exposing the substrate;

laterally recessing the plurality of first layers to form a plurality of first cavities;

forming a liner layer to cover the S/D recesses and the plurality of first cavities, wherein the liner layer has an inner sidewall in direct contact with the plurality of first layers and an outer sidewall opposite the inner sidewall, and the outer sidewall is concave into the plurality of first cavities to form a plurality of second cavities between adjacent second layers; and

epitaxially growing S/D regions from the liner layer.

16. The method of claim 15, wherein the S/D regions have a plurality of protrusions respectively filling into the plurality of second cavities, and the plurality of protrusions are vertically sandwiched between the plurality of second layers.

17. The method of claim 15, further comprising:

removing the dummy gate stack;

performing an etching process to remove the plurality of first layers and form a plurality of gaps between the plurality of the second layers;

forming a gate dielectric layer wrapping the plurality of the second layers; and

forming a gate electrode to cover the gate dielectric layer.

18. The method of claim 17, wherein the plurality of first layers and the plurality of second layers have different etching selectivities in the etching process.

19. The method of claim 15, wherein a first portion of the liner layer sandwiched between the S/D region and the plurality of first layers has a first thickness, a second portion of the liner layer sandwiched between the S/D region and the plurality of second layers has a second thickness, and the first thickness is greater than the second thickness.

20. The method of claim 15, wherein the liner layer is formed by using an atomic layer deposition (ALD).

* * * * *