



US 20250278173A1


(19) **United States**(12) **Patent Application Publication**  
**OHBA**(10) **Pub. No.: US 2025/0278173 A1**(43) **Pub. Date: Sep. 4, 2025**(54) **DISPLAY TERMINAL, DISPLAY METHOD,  
AND NON-TRANSITORY RECORDING  
MEDIUM****Publication Classification**(51) **Int. Cl.****G06F 3/0484** (2022.01)**G11B 27/34** (2006.01)(52) **U.S. Cl.**CPC ..... **G06F 3/0484** (2013.01); **G11B 27/34**  
(2013.01)(71) Applicant: **Kazuhiro OHBA**, Kanagawa (JP)(72) Inventor: **Kazuhiro OHBA**, Kanagawa (JP)(21) Appl. No.: **19/027,282**(22) Filed: **Jan. 17, 2025**(30) **Foreign Application Priority Data**

Feb. 29, 2024 (JP) ..... 2024-029672

(57)

**ABSTRACT**

A display terminal includes circuitry to display, on a display, a moving image previously obtained through imaging performed by an imaging device and a map indicating a position related to the imaging and display, on the display, a movement path of the imaging device during the imaging on the map based on position information indicating positions of the imaging device during the imaging.

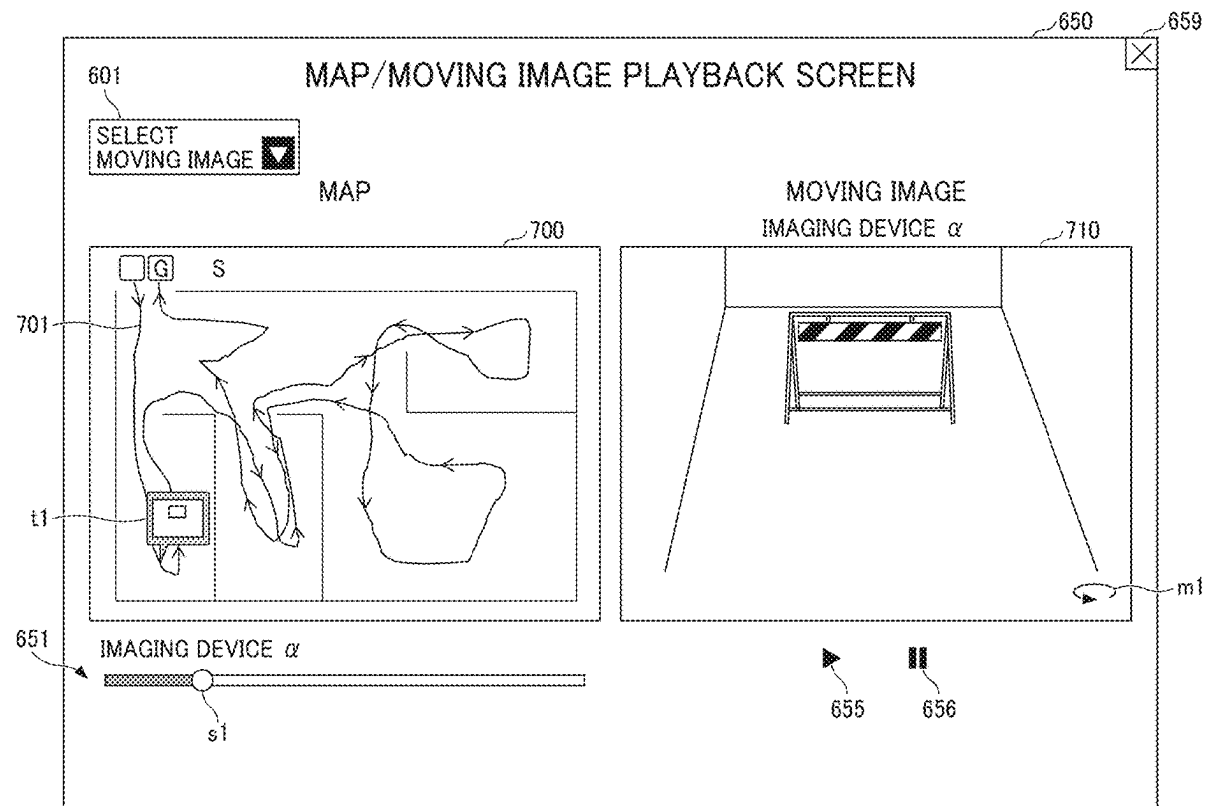

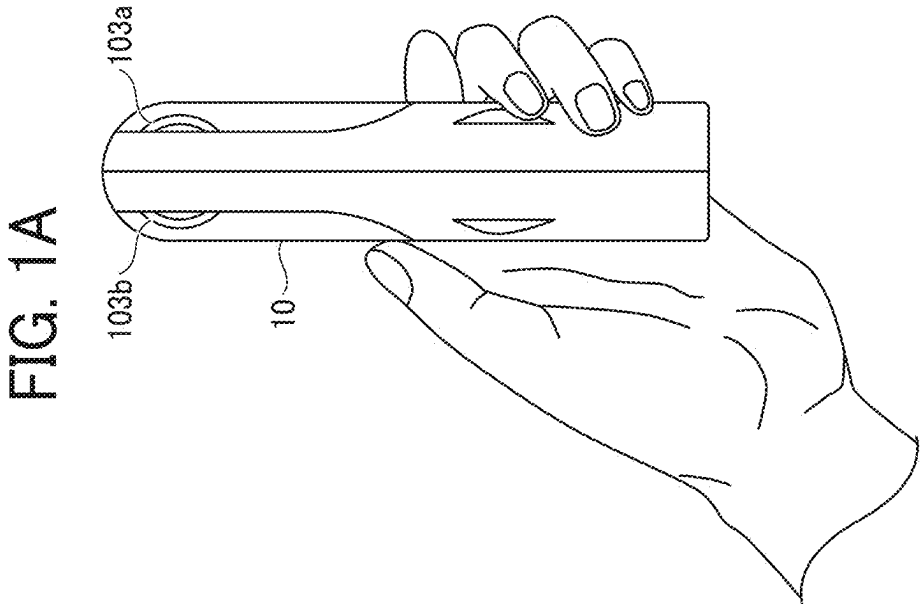
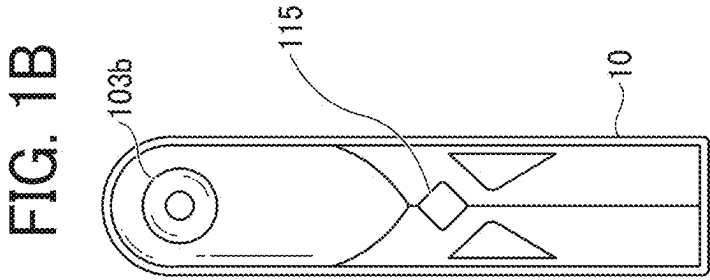
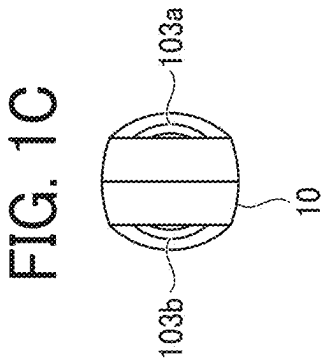


FIG. 2



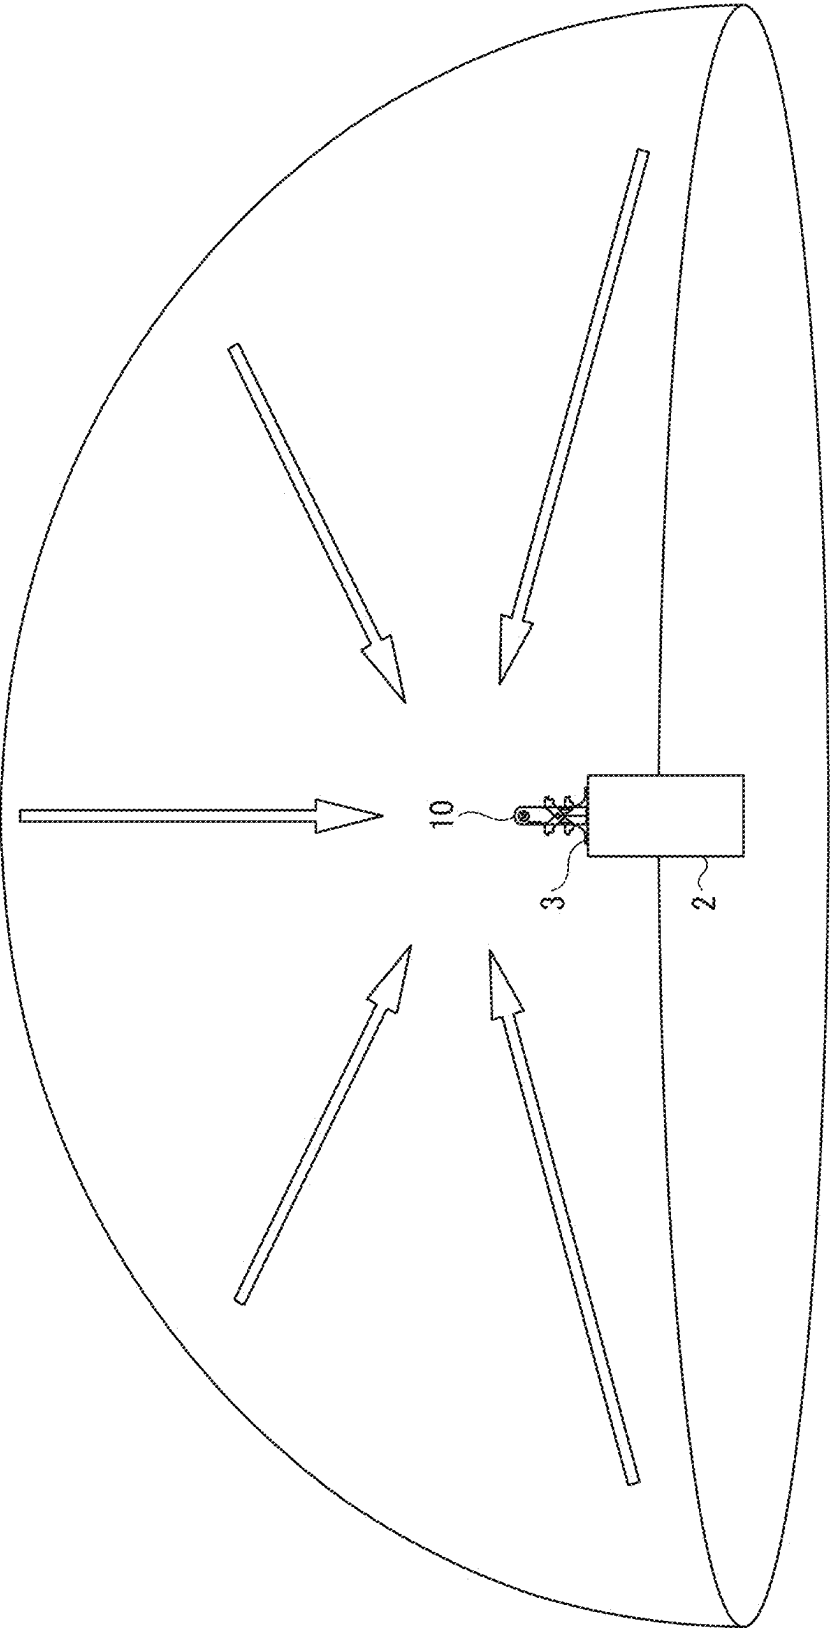


FIG. 3A

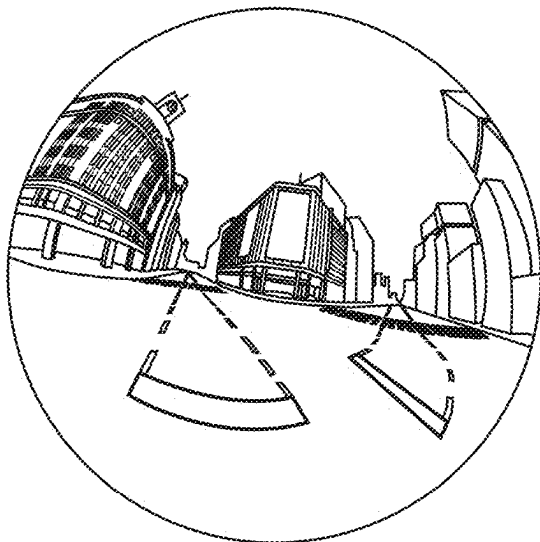


HEMISPHERICAL IMAGE (FRONT)

FIG. 3B

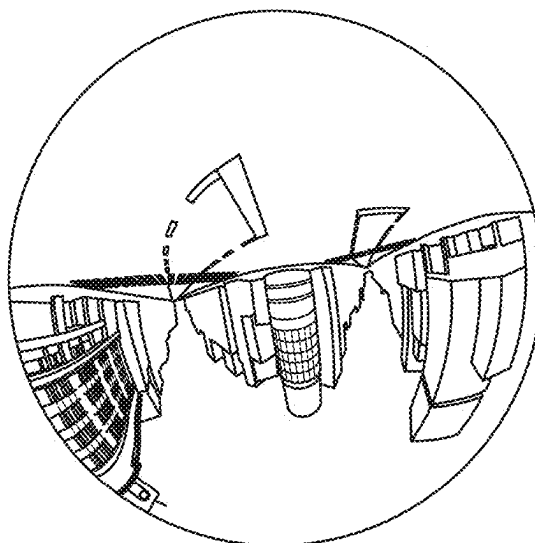


HEMISPHERICAL IMAGE (BACK)

FIG. 3C

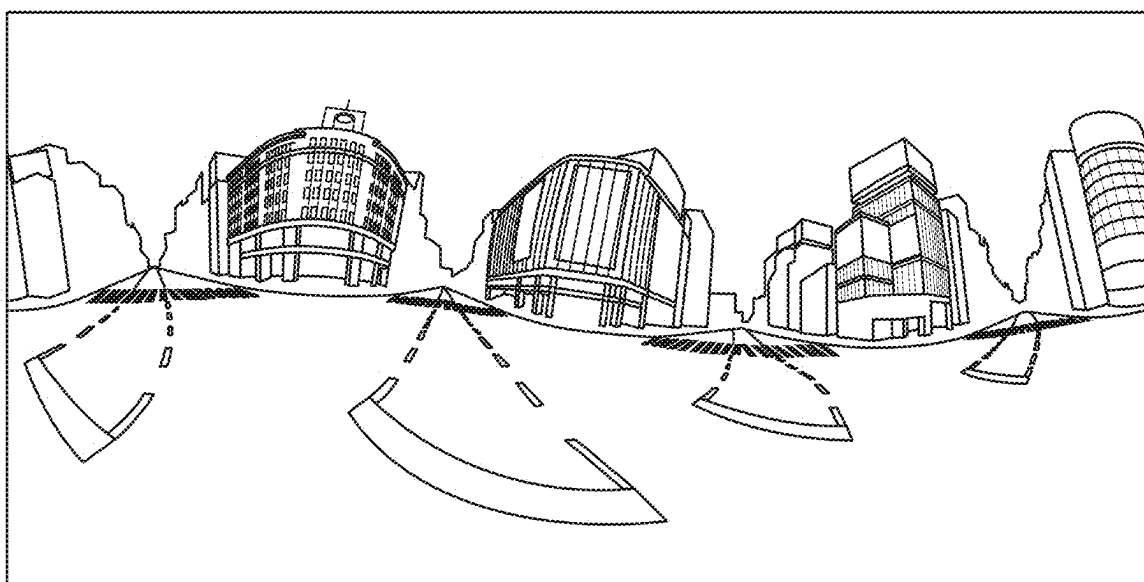

CAPTURED IMAGE (EQUIRECTANGULAR PROJECTION IMAGE EC)

FIG. 4A

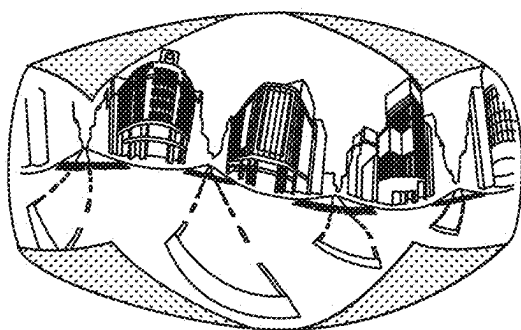

EQUIRECTANGULAR  
PROJECTION IMAGE EC






FIG. 4B

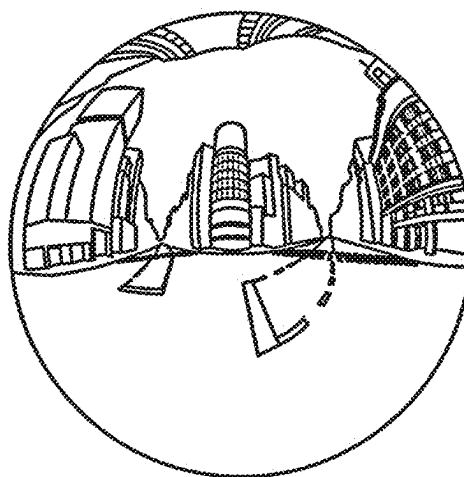

SPHERICAL IMAGE CE

FIG. 5

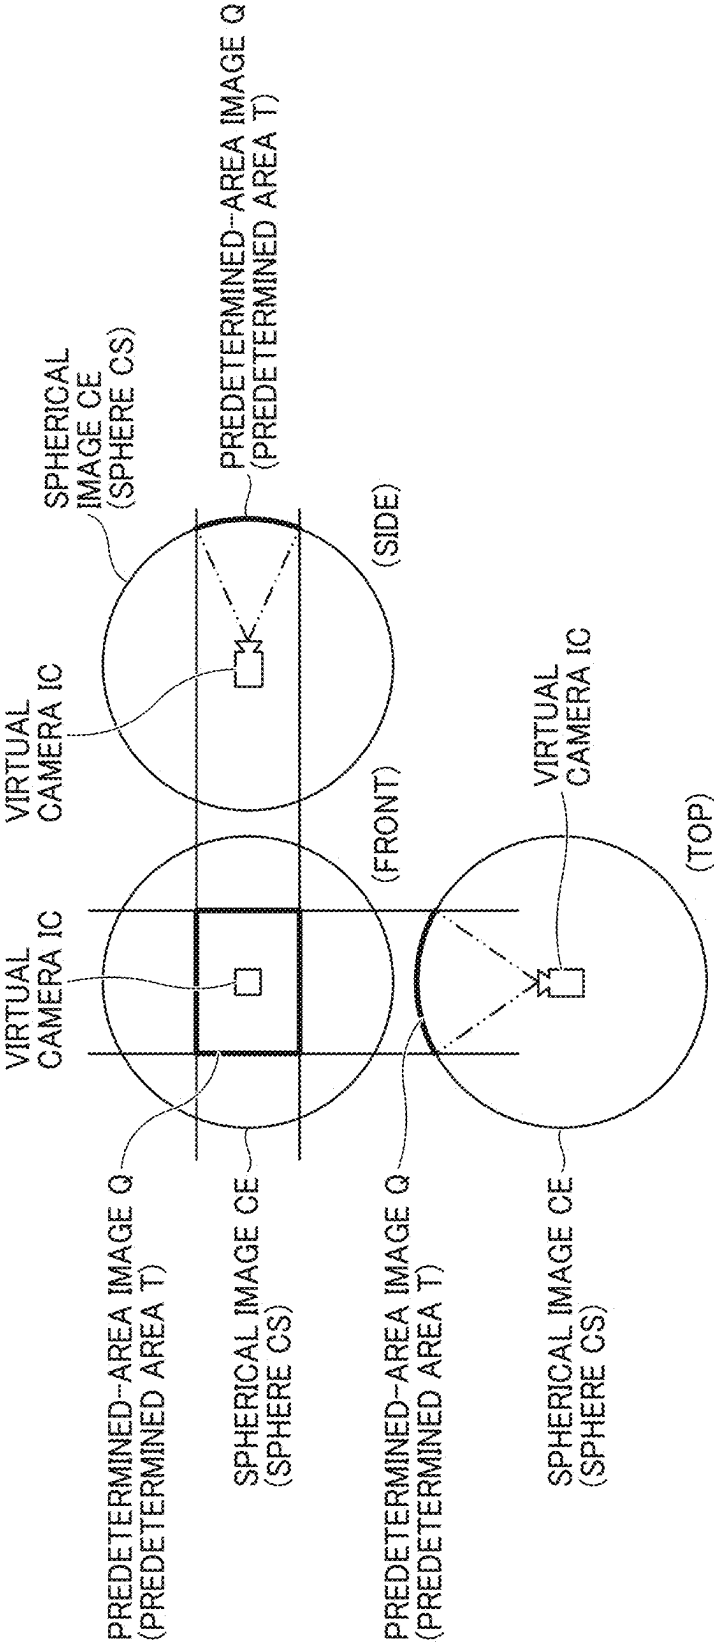


FIG. 6A

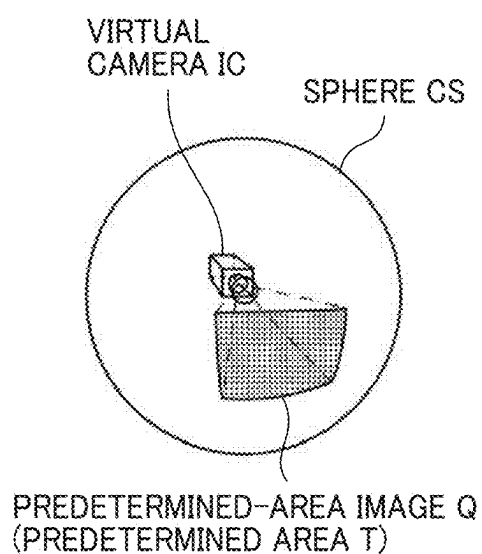


FIG. 6B

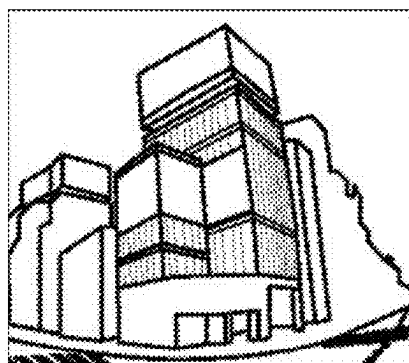


FIG. 6C

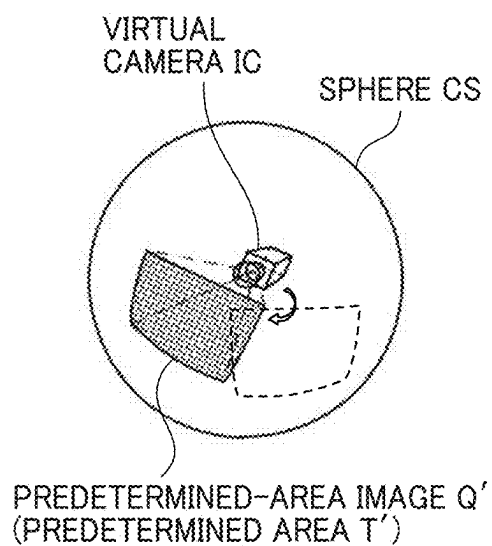


FIG. 6D

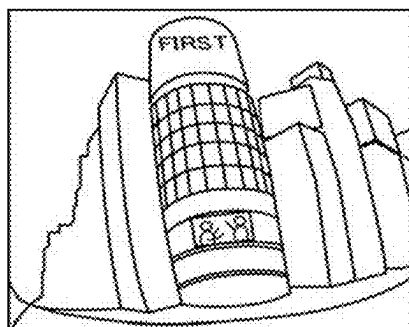


FIG. 7

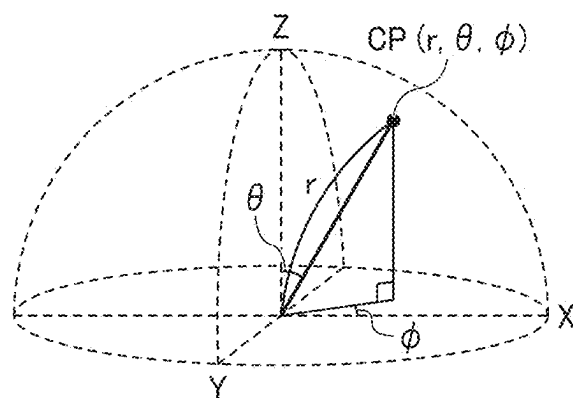


FIG. 8

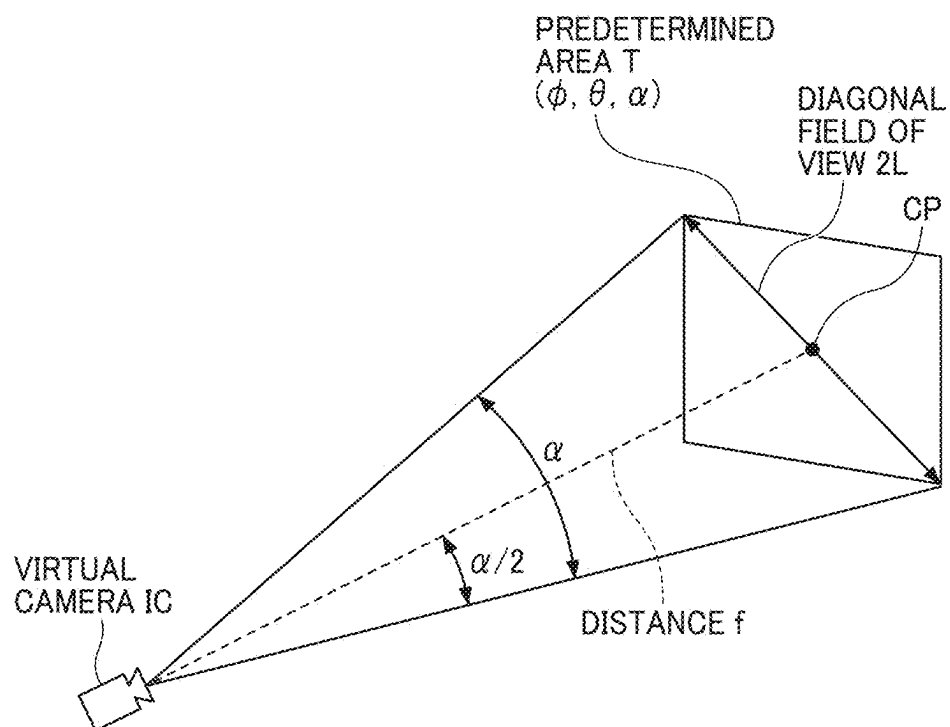
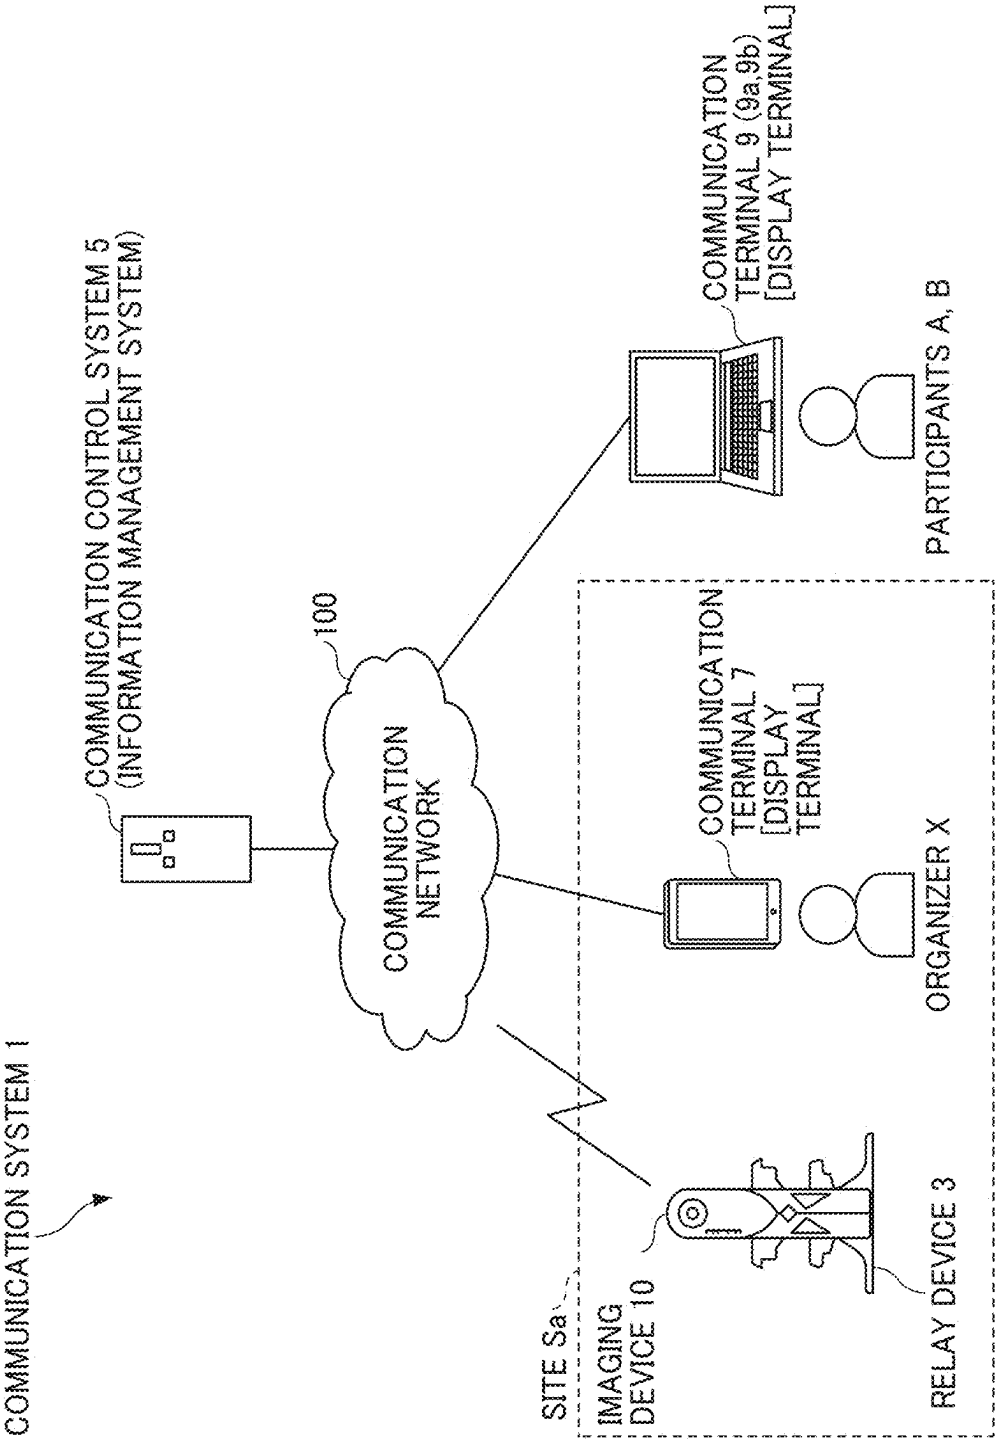




FIG. 9



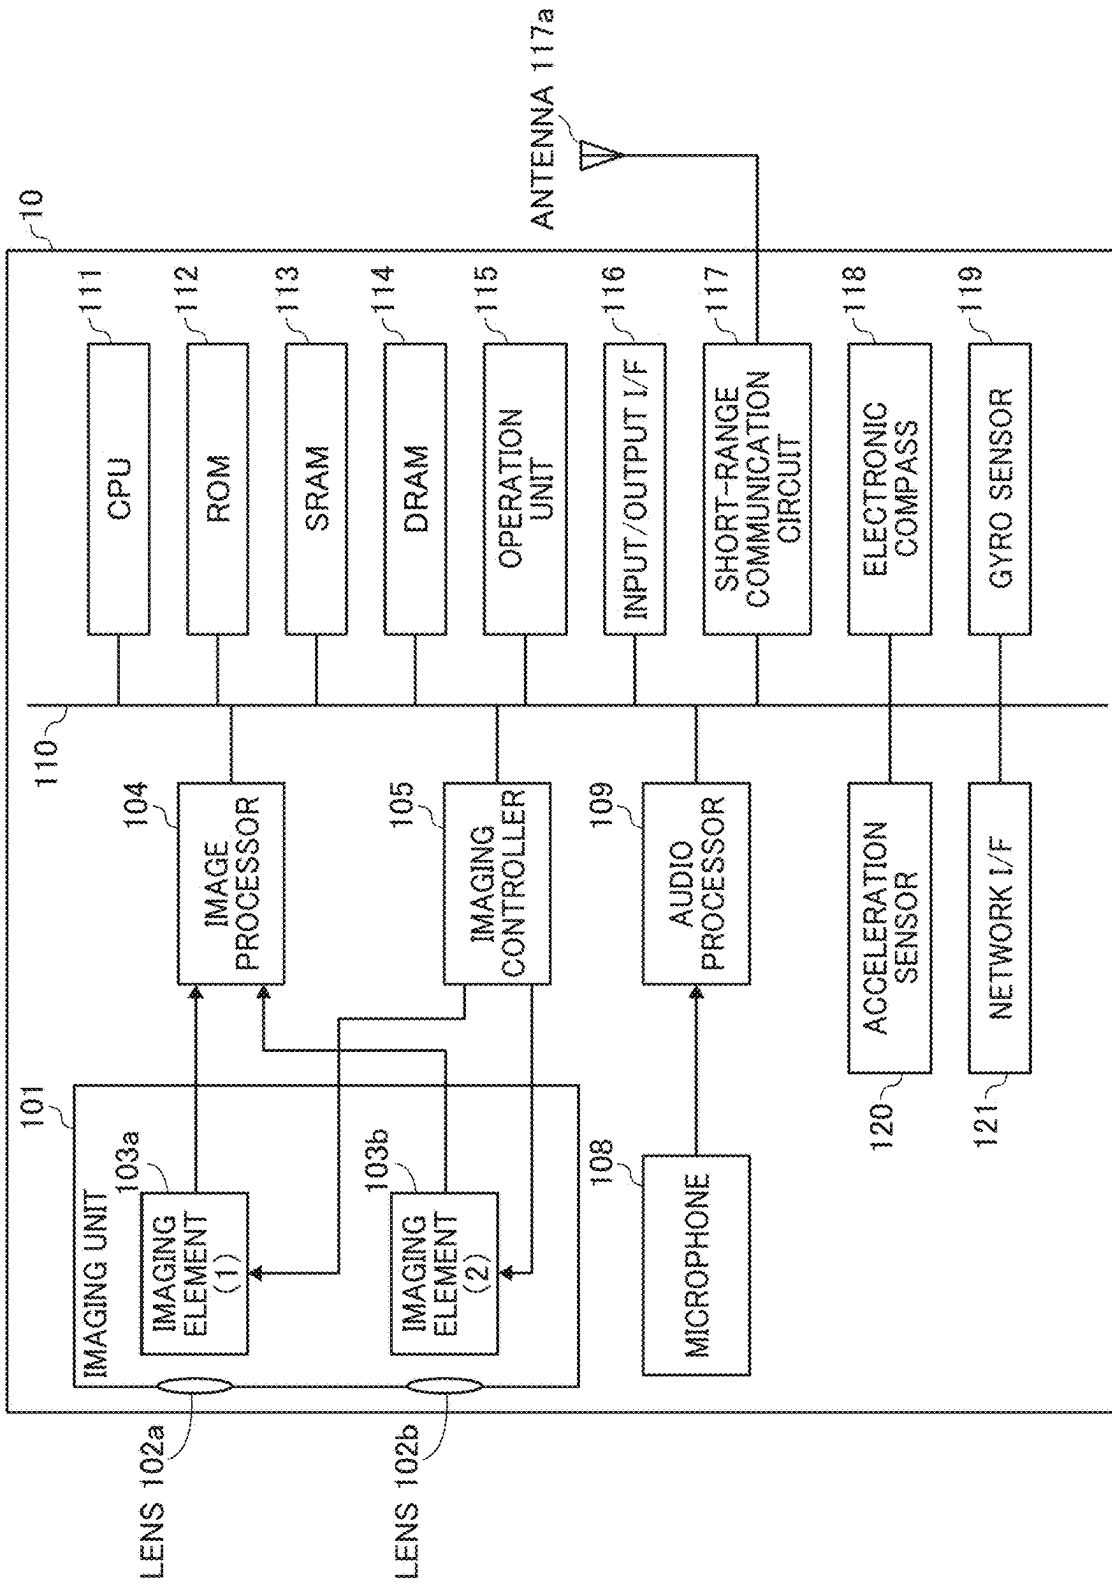


FIG. 10

FIG. 11

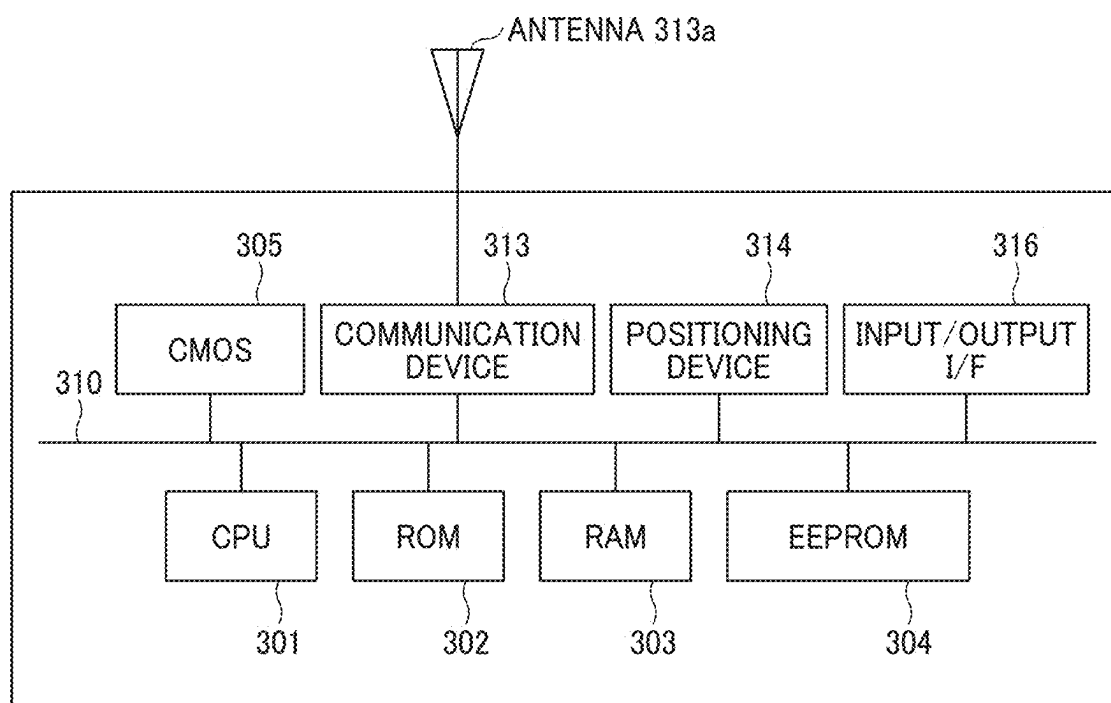


FIG. 12

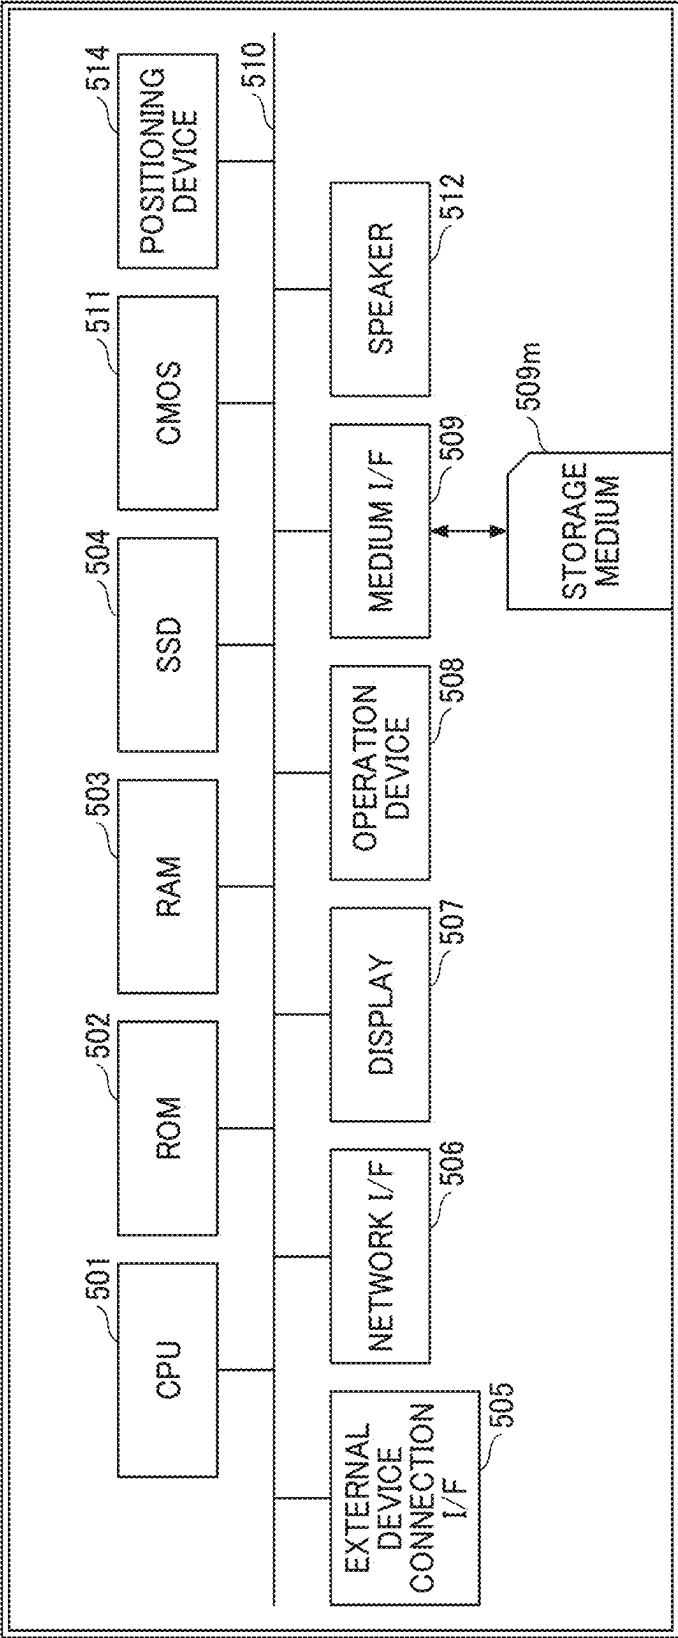


FIG. 13

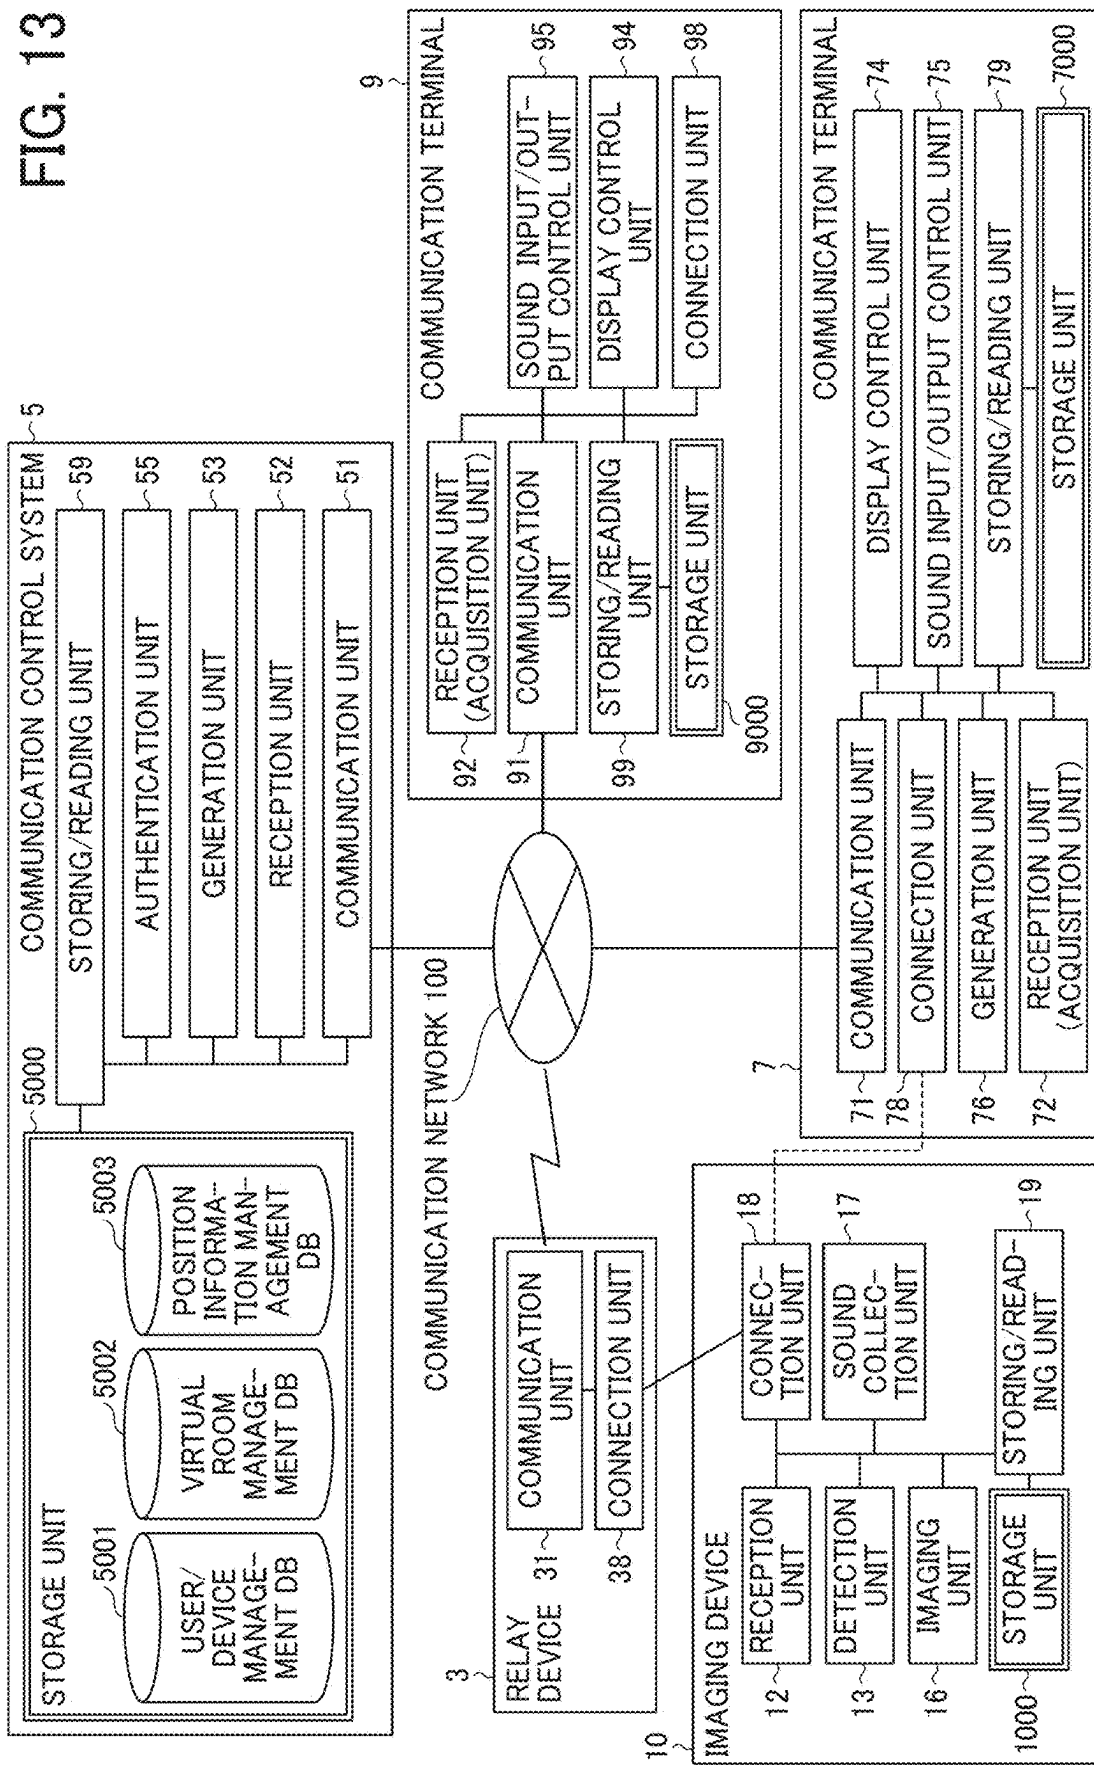


FIG. 14

| DEVICE ID/USER ID | PASSWORD | NAME                    | USER IMAGE                                                                          | IP ADDRESS |
|-------------------|----------|-------------------------|-------------------------------------------------------------------------------------|------------|
| 111d              | pw111d   | IMAGING DEVICE $\alpha$ |                                                                                     | 1.1.1.1.   |
| 112d              | pw112d   | IMAGING DEVICE $\beta$  |                                                                                     | 1.2.1.1.   |
| 100x              | pw100x   | ORGANIZER X             |    | 1.1.1.2.   |
| 100a              | pw100a   | PARTICIPANT A           |    | 1.1.2.1.   |
| 100b              | pw100b   | PARTICIPANT B           |    | 1.1.2.2.   |
| 100c              | pw100c   | PARTICIPANT C           |  | 1.1.2.3.   |
| ...               | ...      | ...                     | ...                                                                                 | ...        |

FIG. 15

| VIRTUAL ROOM ID | VIRTUAL ROOM NAME          | DEVICE ID/USER ID | ORGANIZER ID | PARTICIPANT ID | CONTENT ID | CONTENT URL |
|-----------------|----------------------------|-------------------|--------------|----------------|------------|-------------|
| 111r            | CONSTRUCTION SITE $\alpha$ | 101d              | 100x         | 100a, 100b     | C101       | ...         |
| 112r            | FACTORY $\eta$             | 102d              | 100y         | 100e, 100f     | C102       | ...         |
| ...             | ...                        | ...               | ...          | ...            | ...        | ...         |

FIG. 16

| CONTENT ID: C101                             |                 |
|----------------------------------------------|-----------------|
| DATE AND TIME OF IMAGING AND SOUND CAPTURING | DEVICE POSITION |
| 2023/11/11 12:55:34                          | (x1, y1, z1)    |
| 2023/11/11 12:55:35                          | (x2, y2, z2)    |
| 2023/11/11 12:55:36                          | (x3, y3, z3)    |
| ...                                          | ...             |

FIG. 17

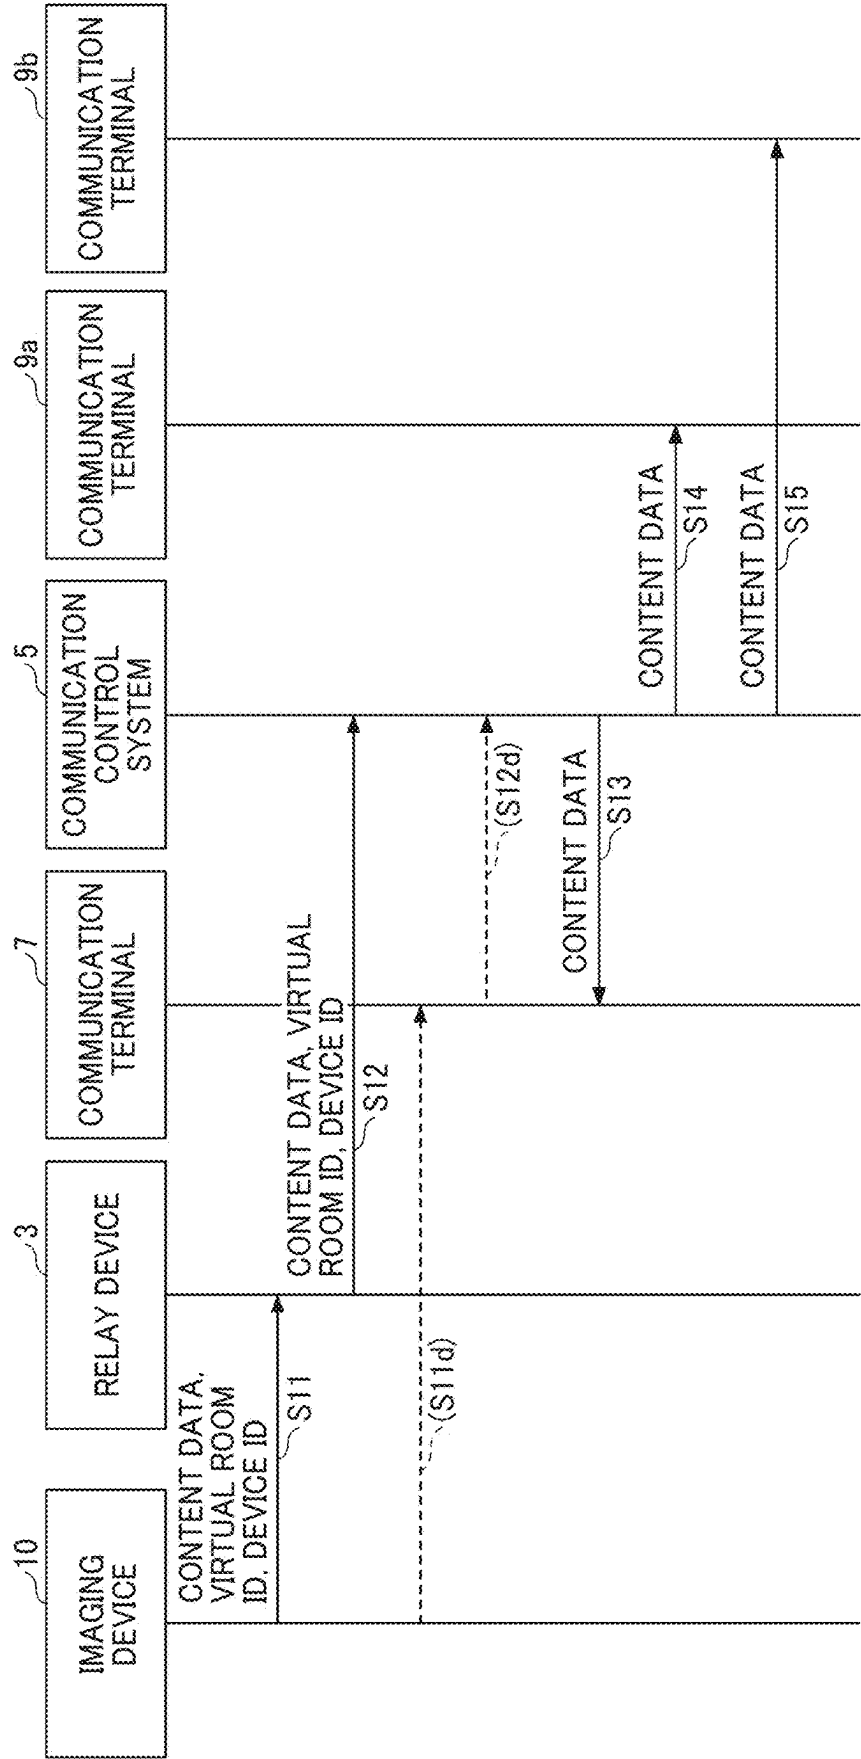




FIG. 18

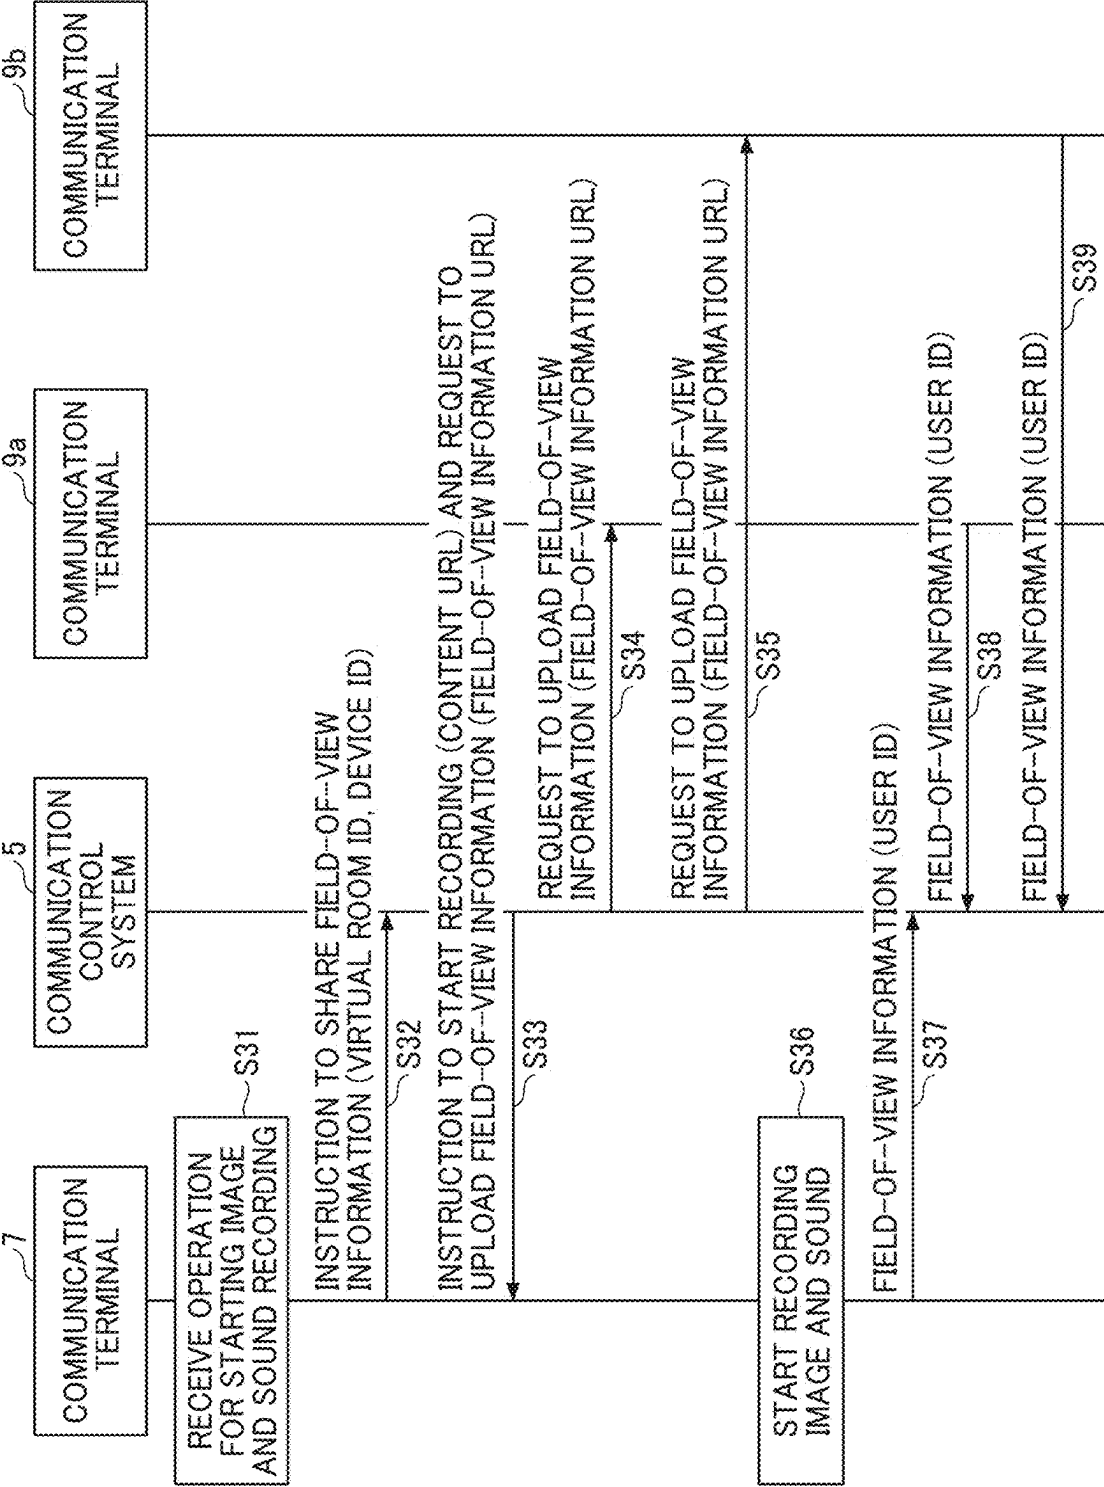


FIG. 19

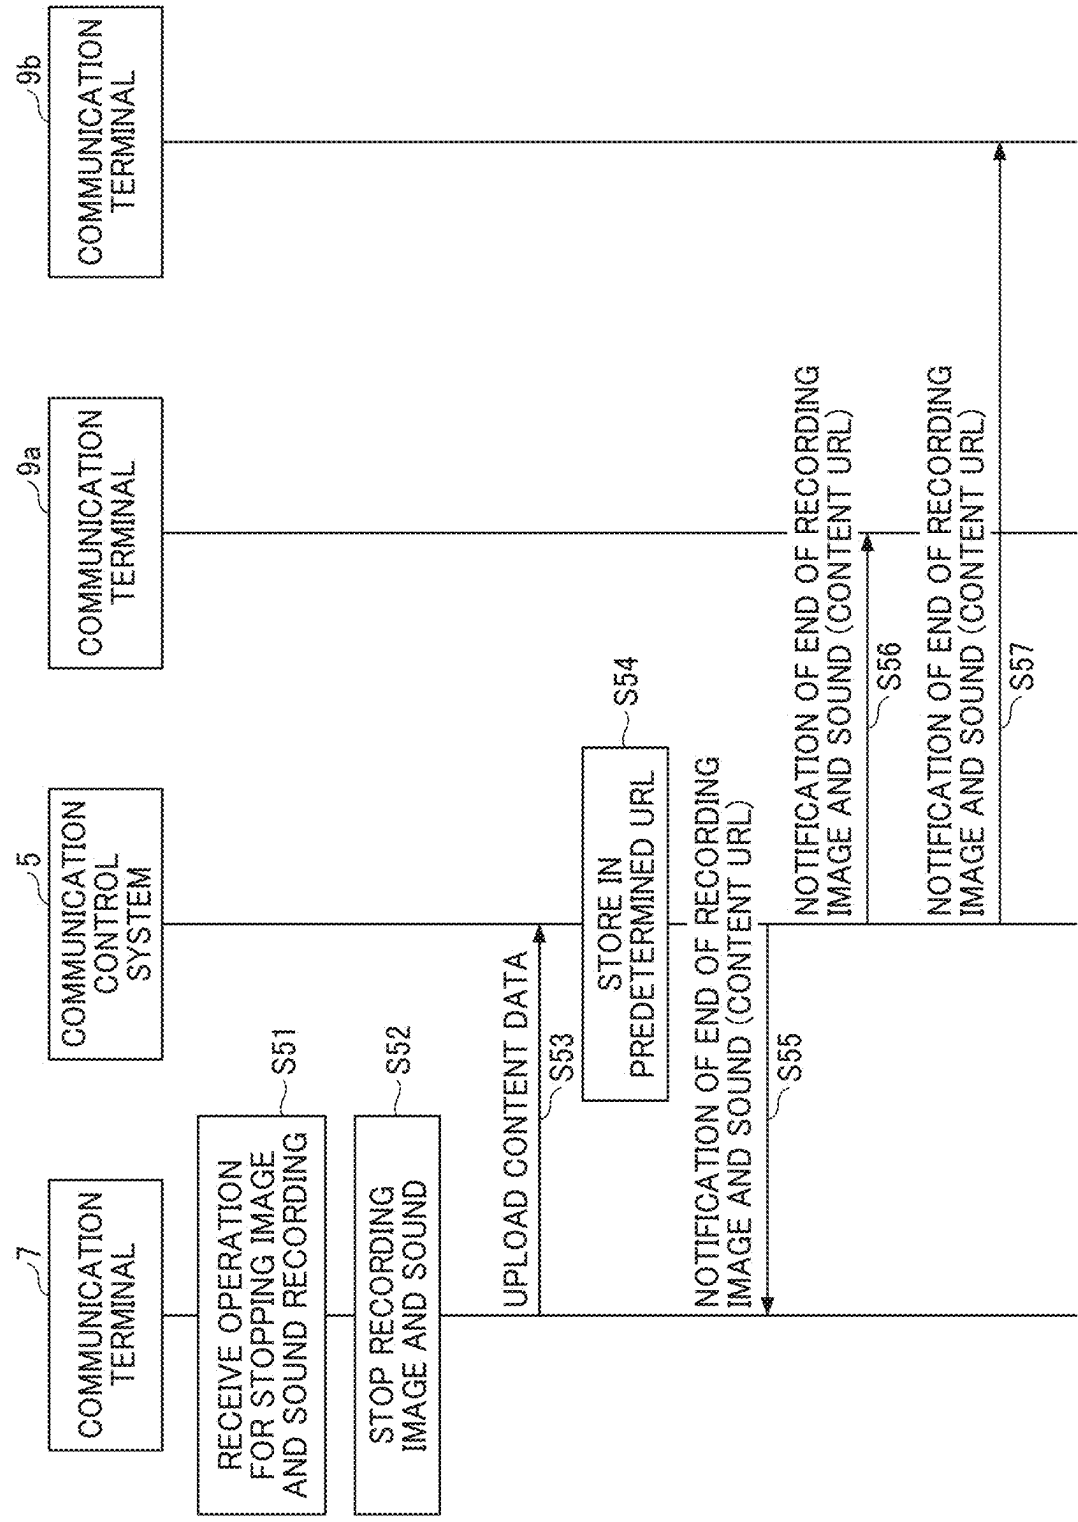


FIG. 20

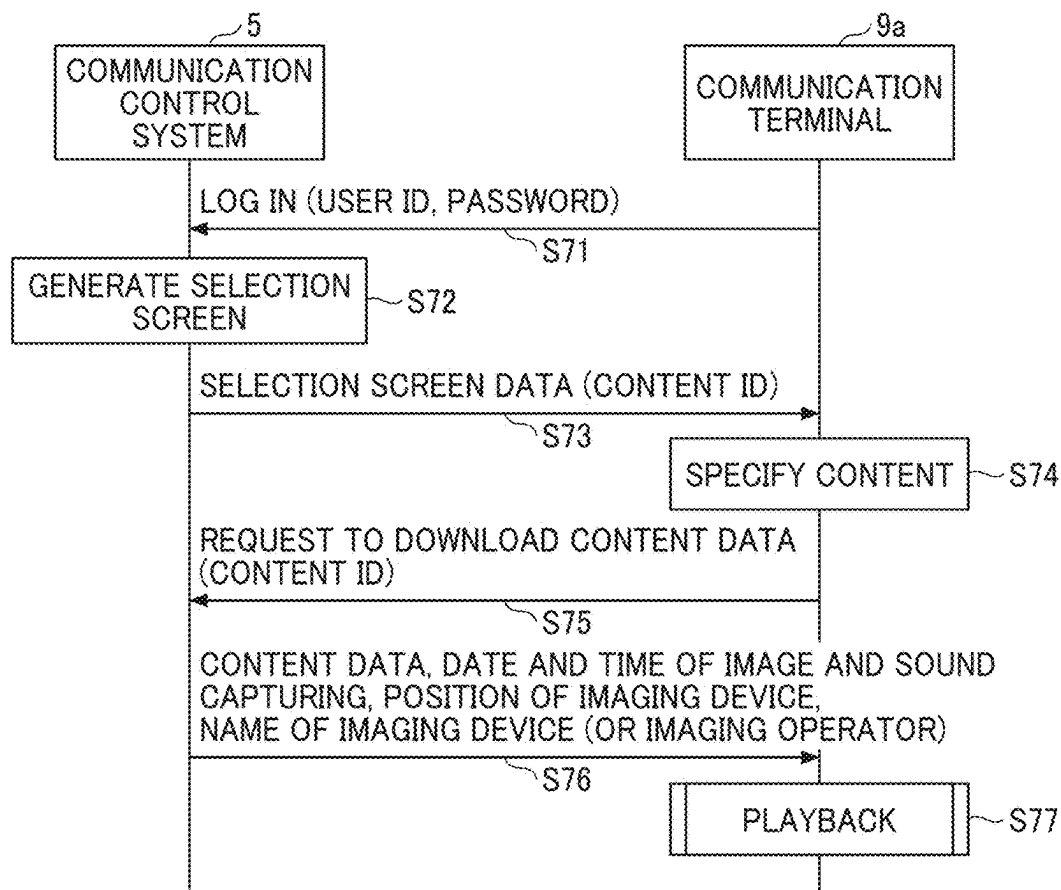


FIG. 21

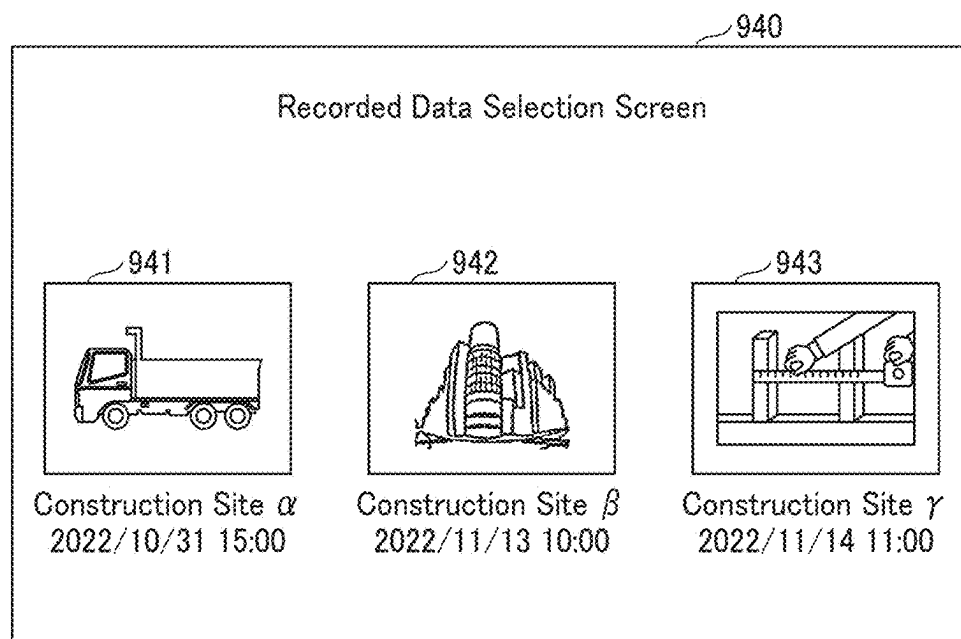
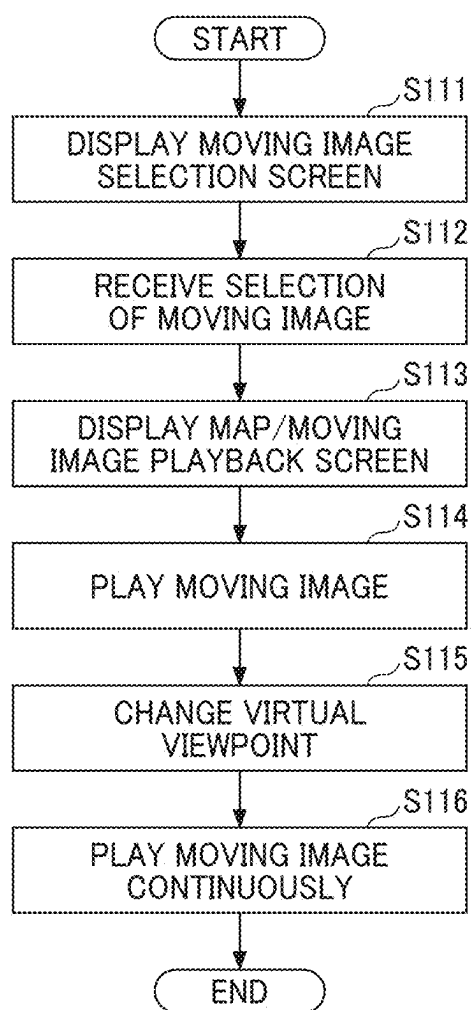


FIG. 22



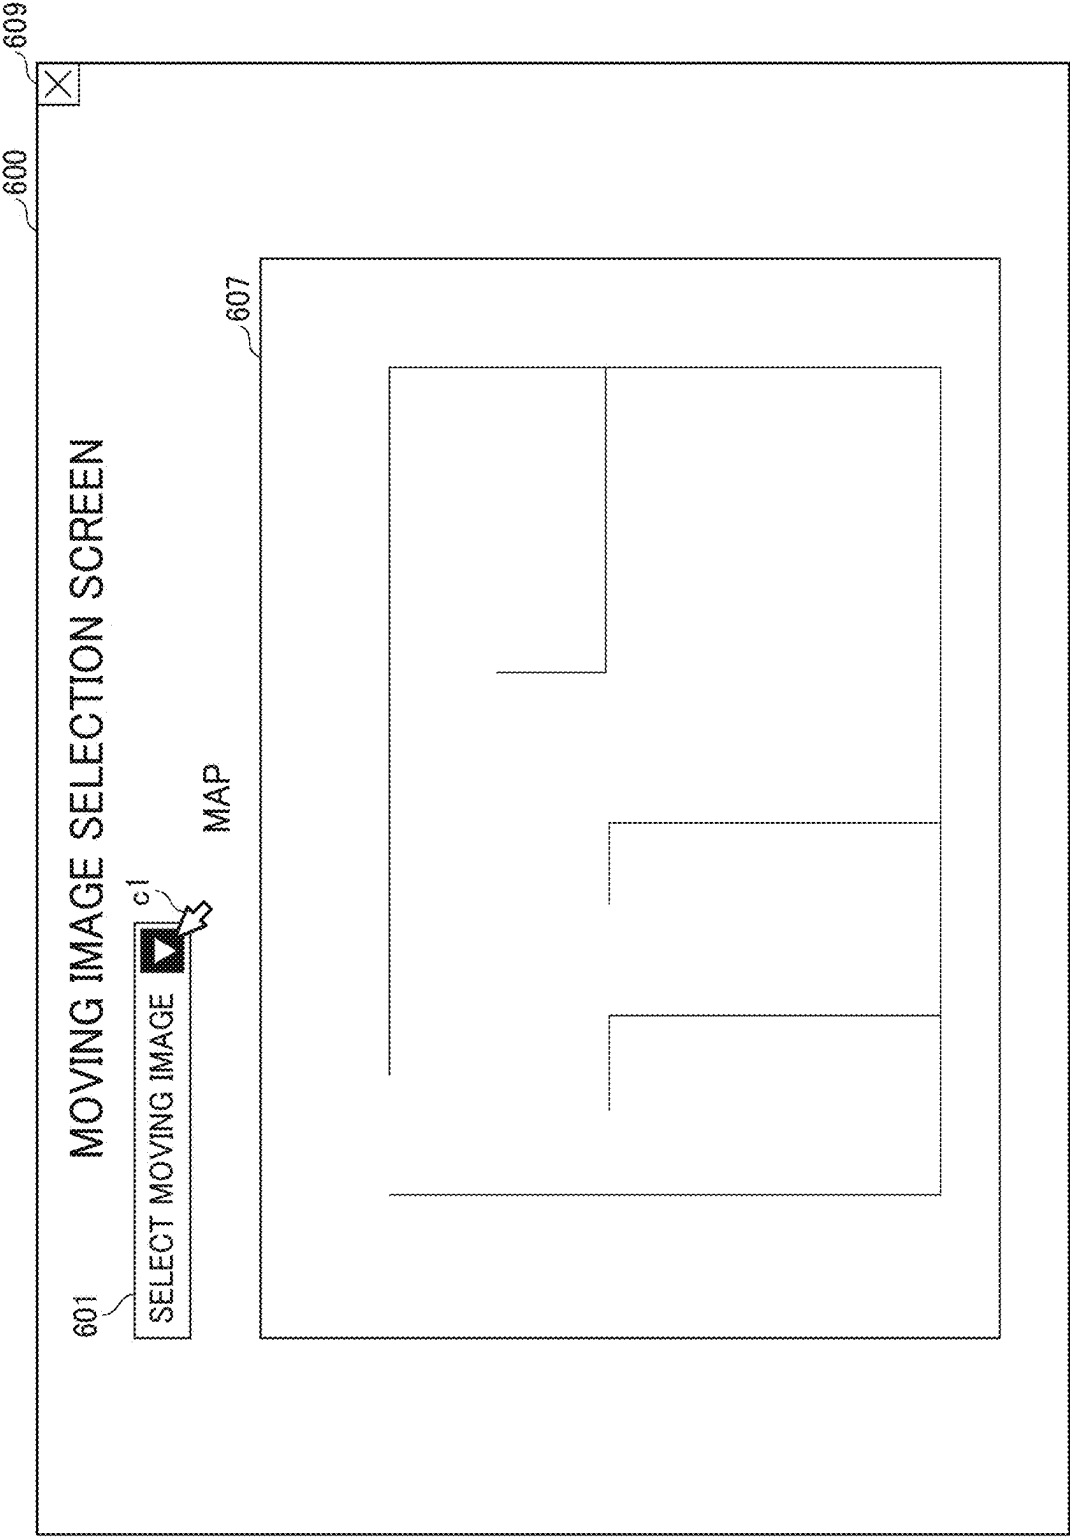


FIG. 23

FIG. 24

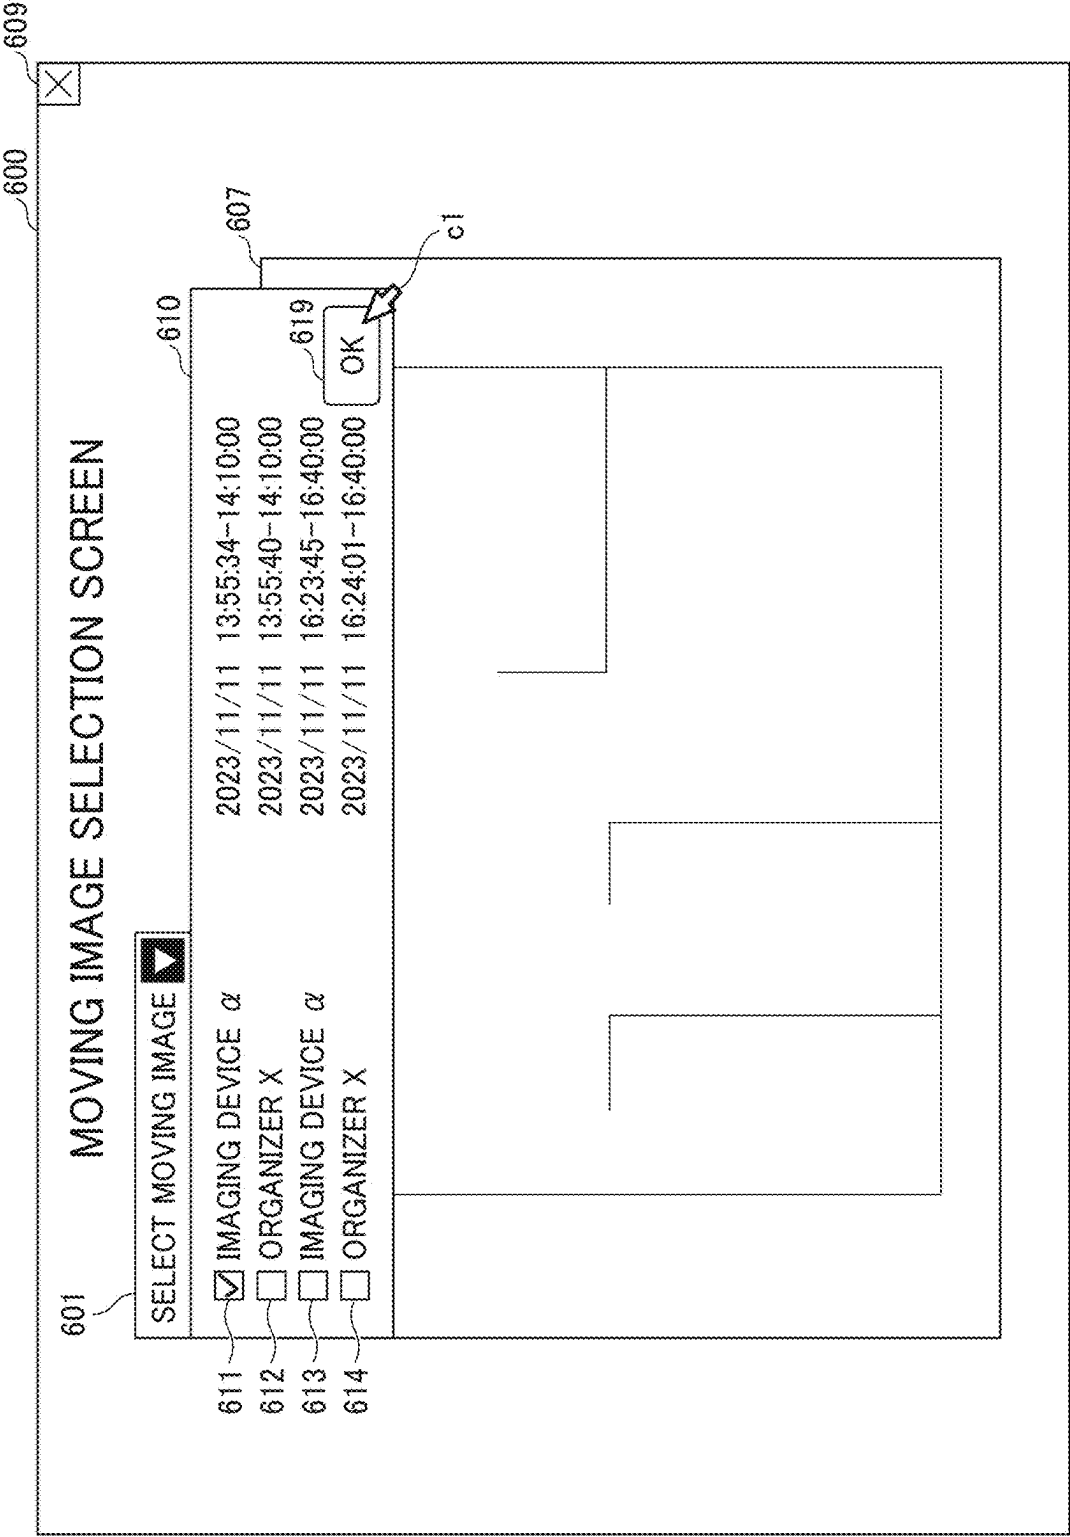


FIG. 25

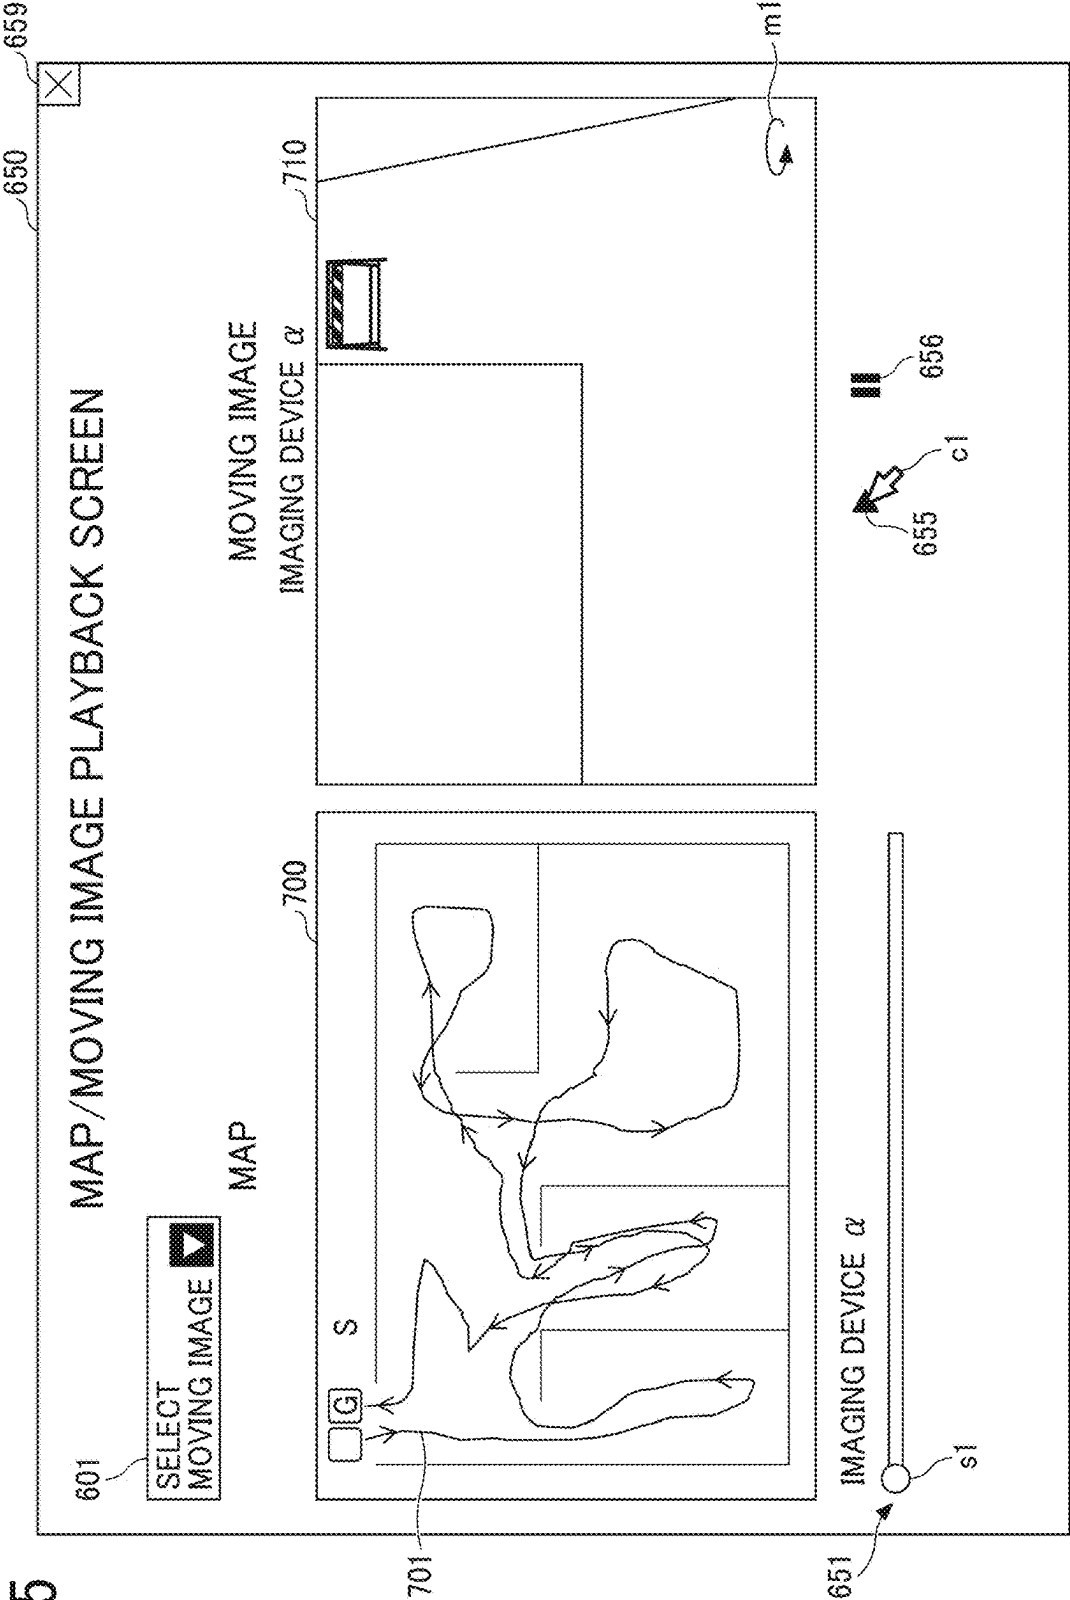


FIG. 26

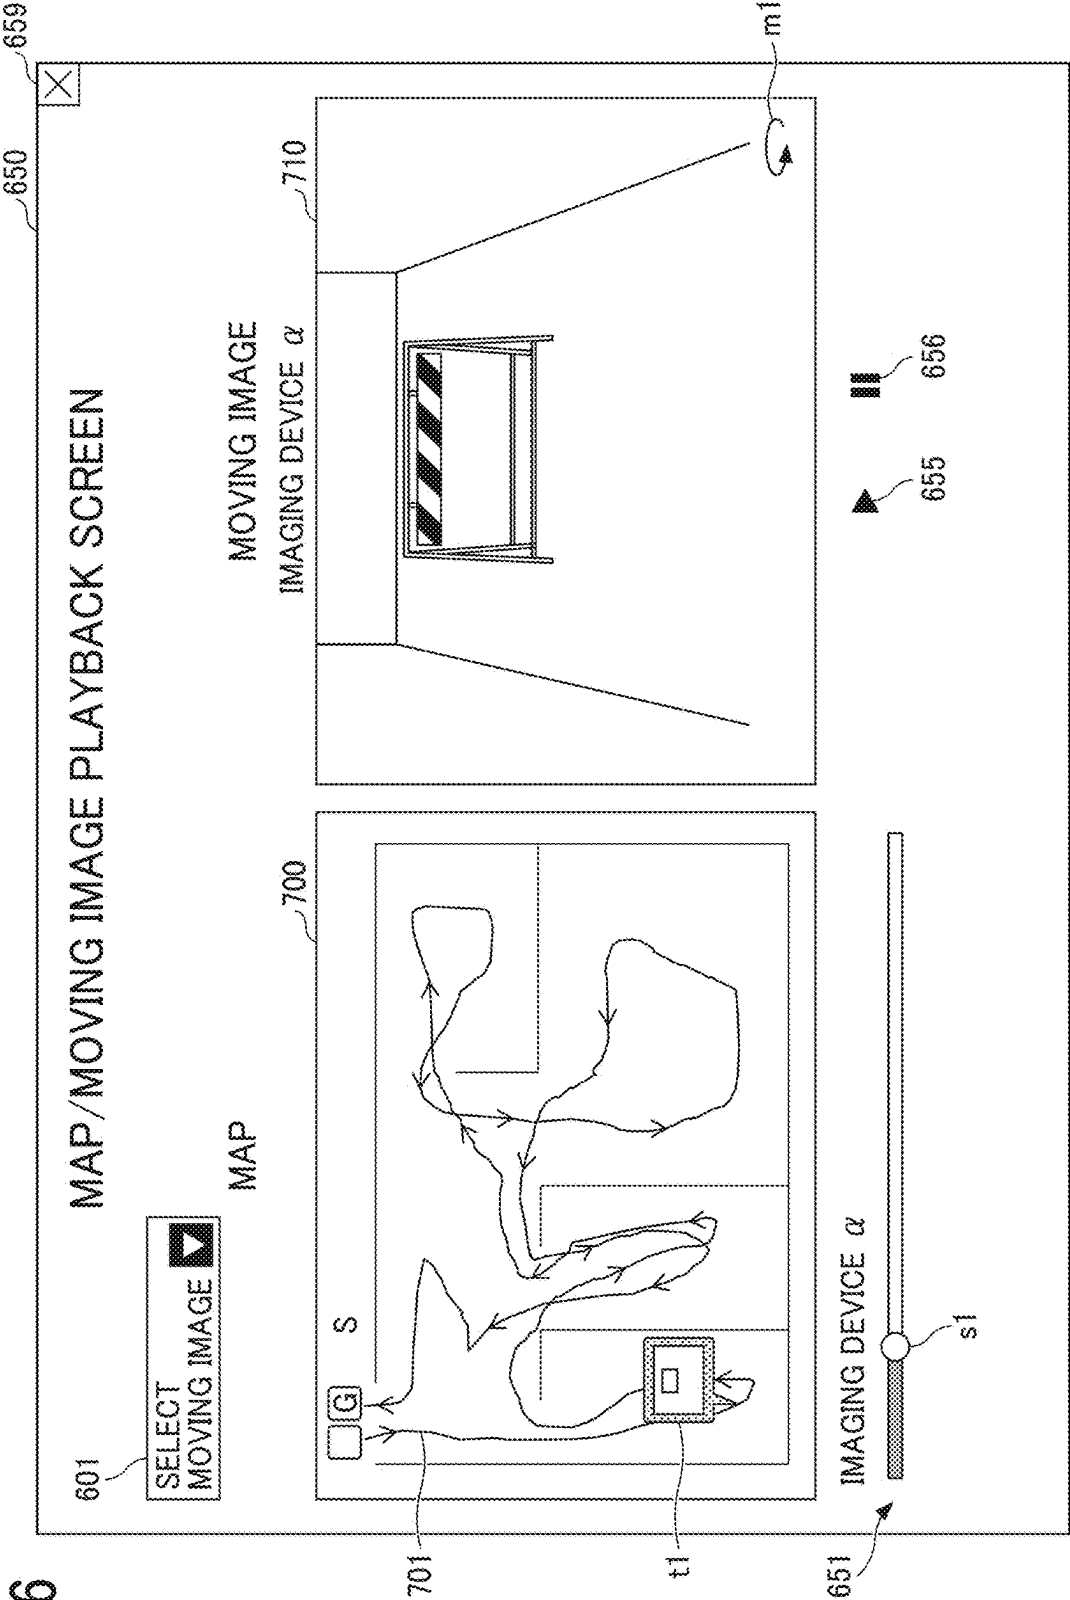




FIG. 27

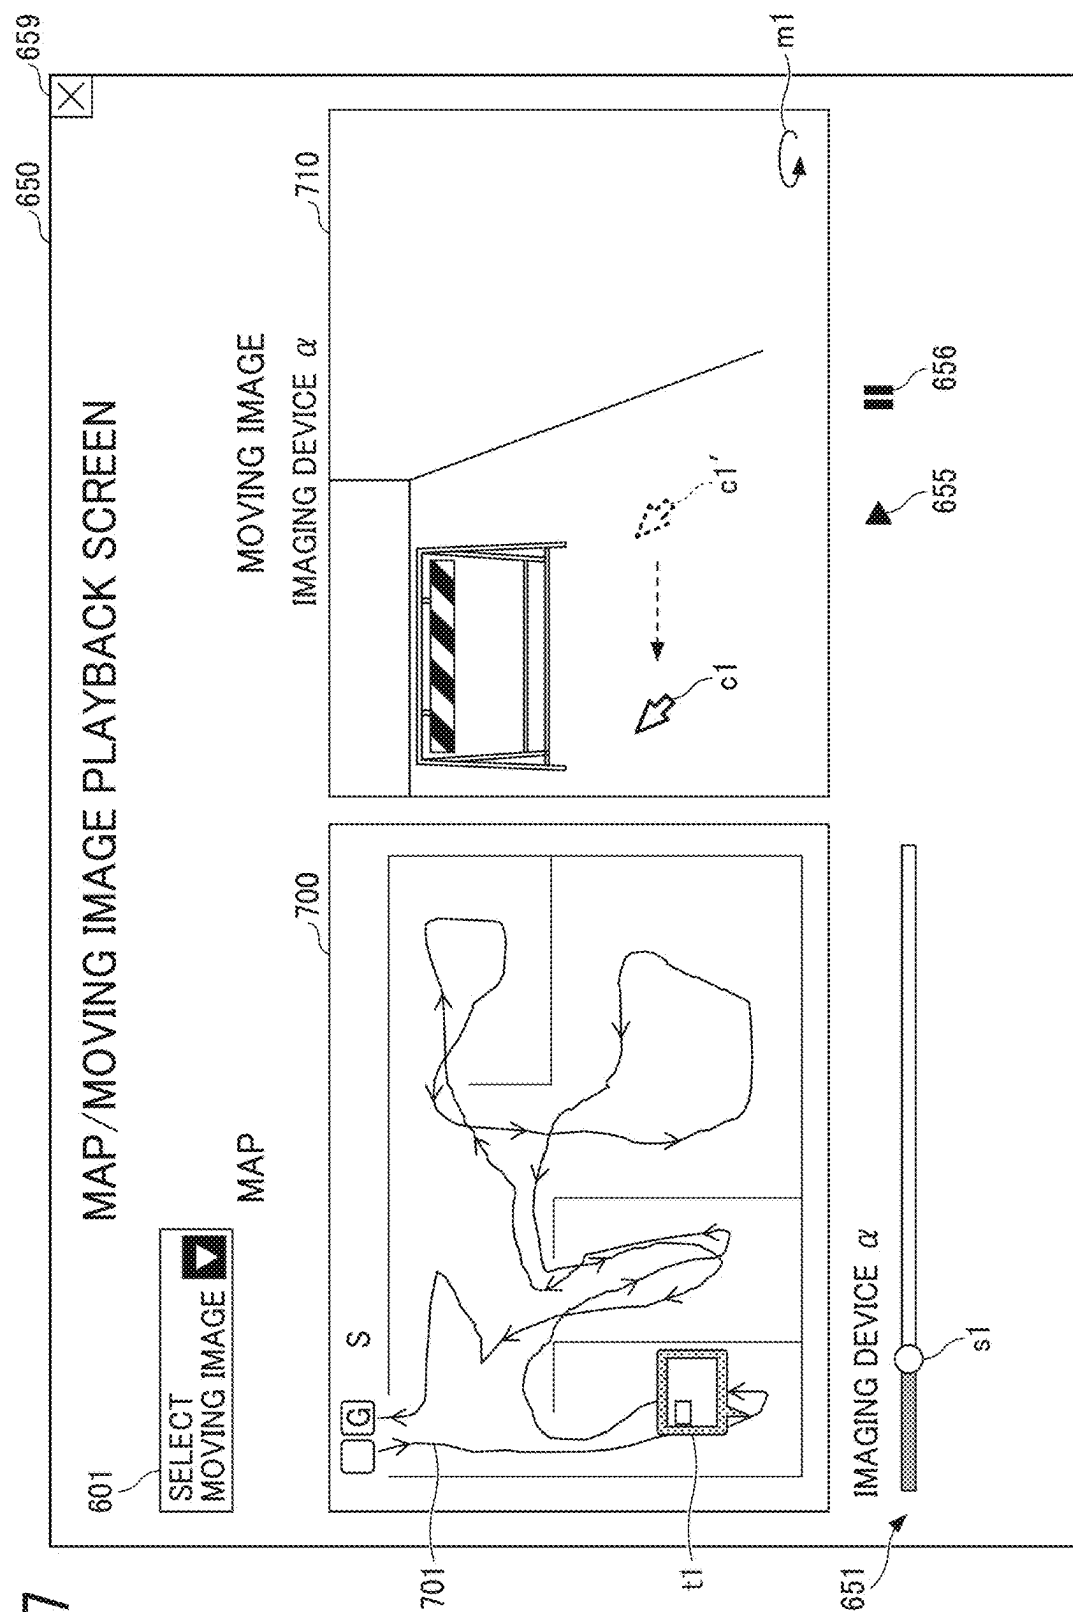


FIG. 28

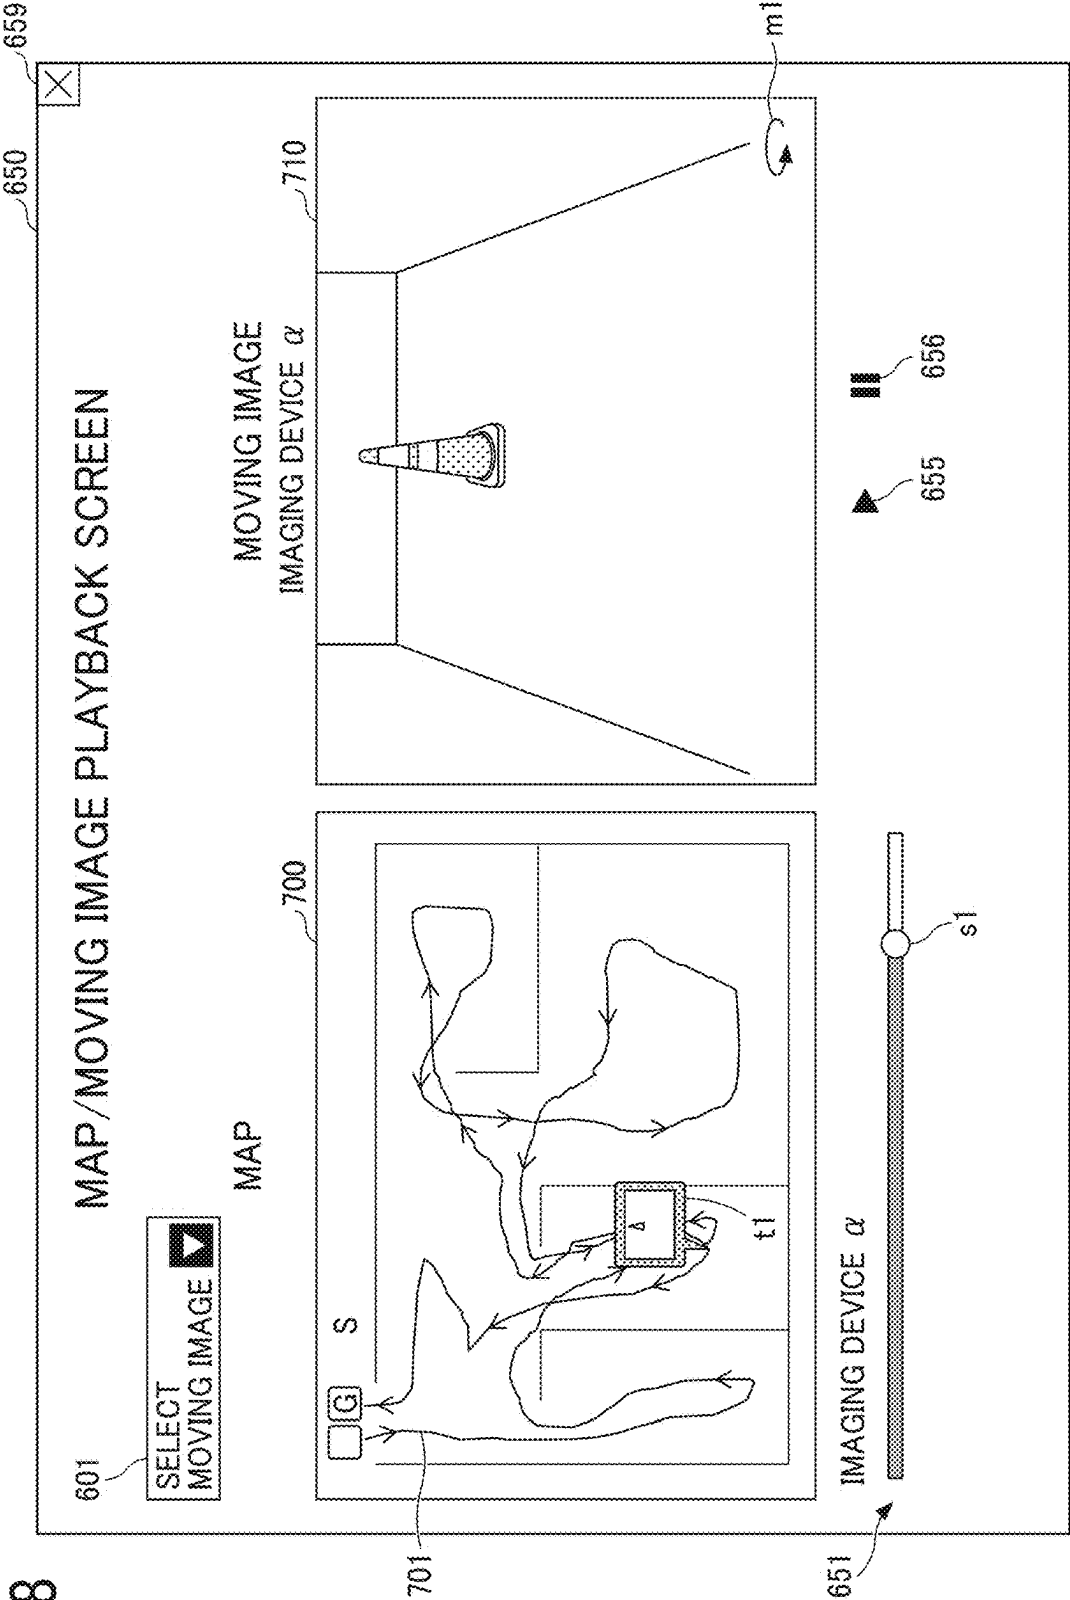


FIG. 29

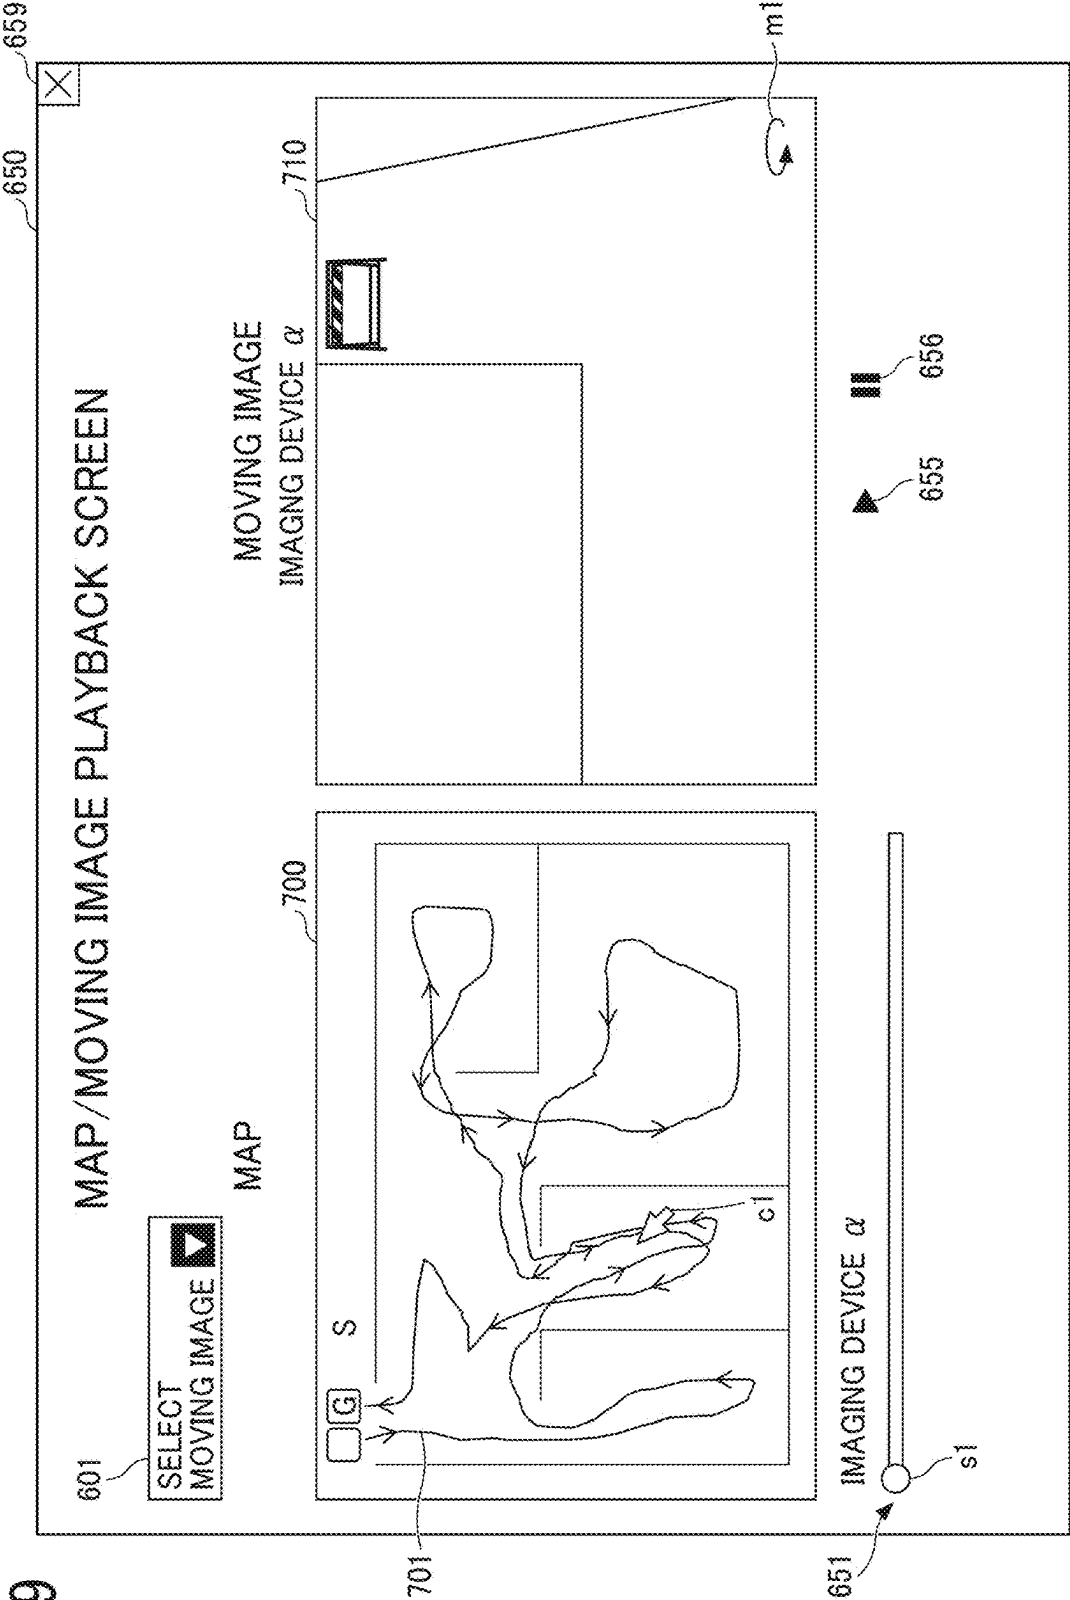


FIG. 30

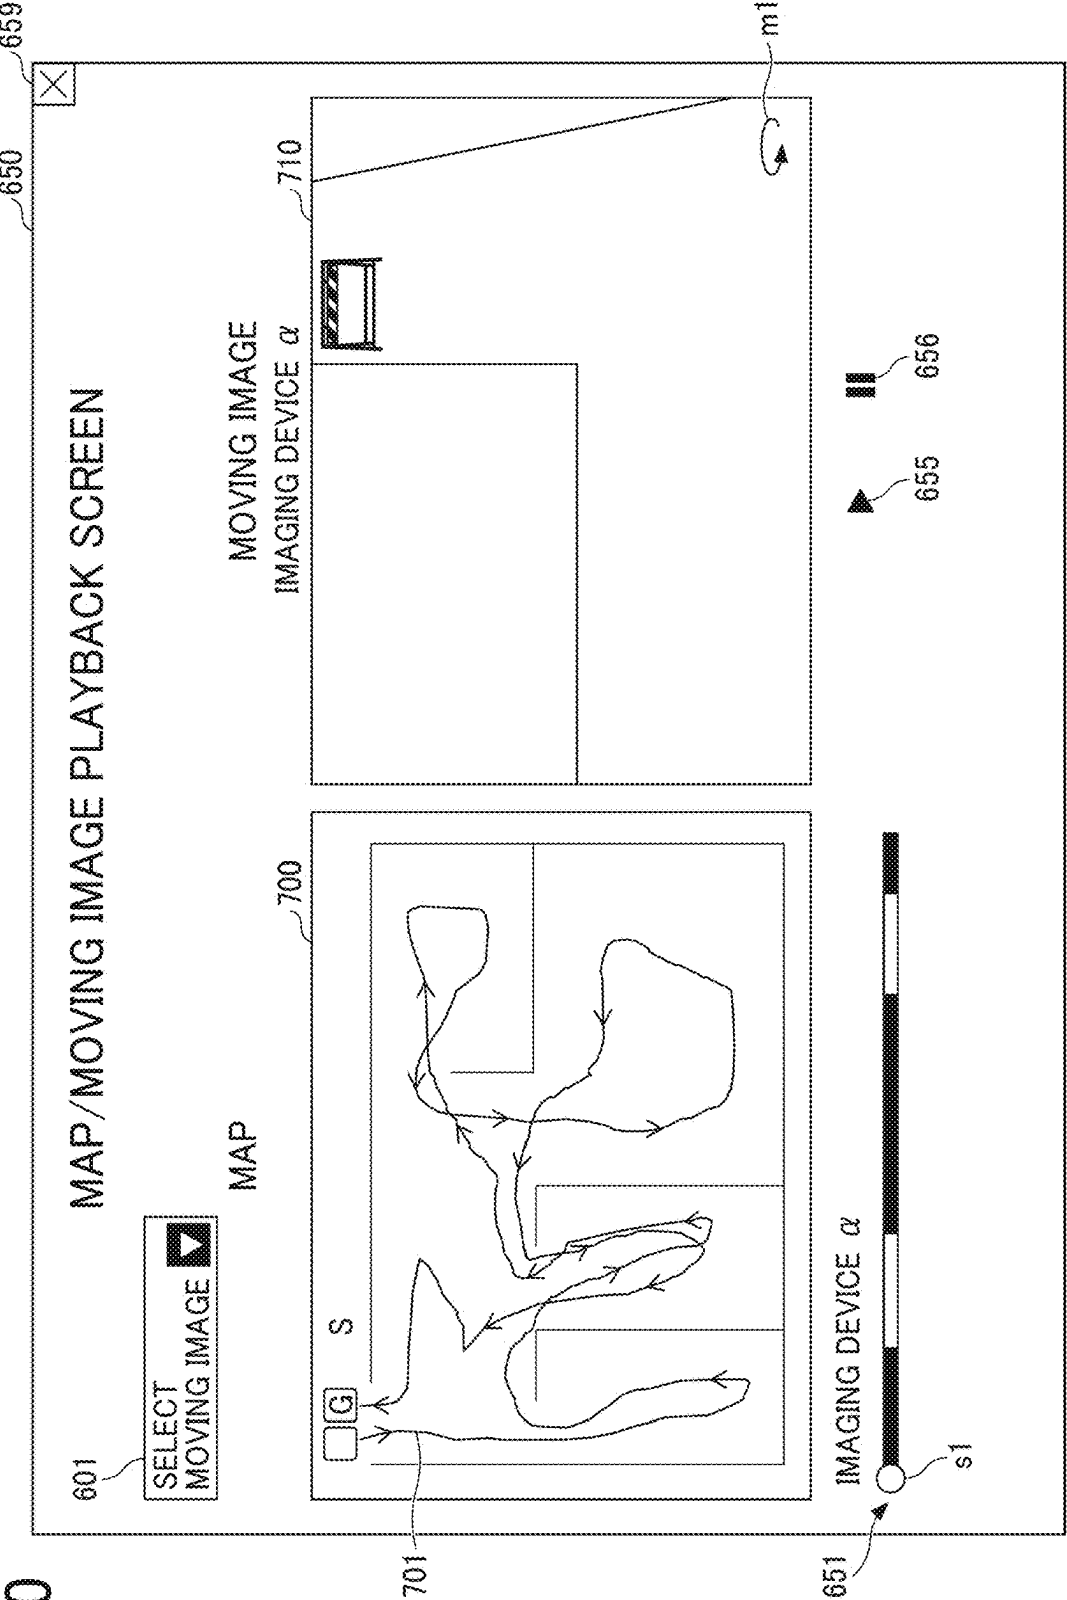


FIG. 31

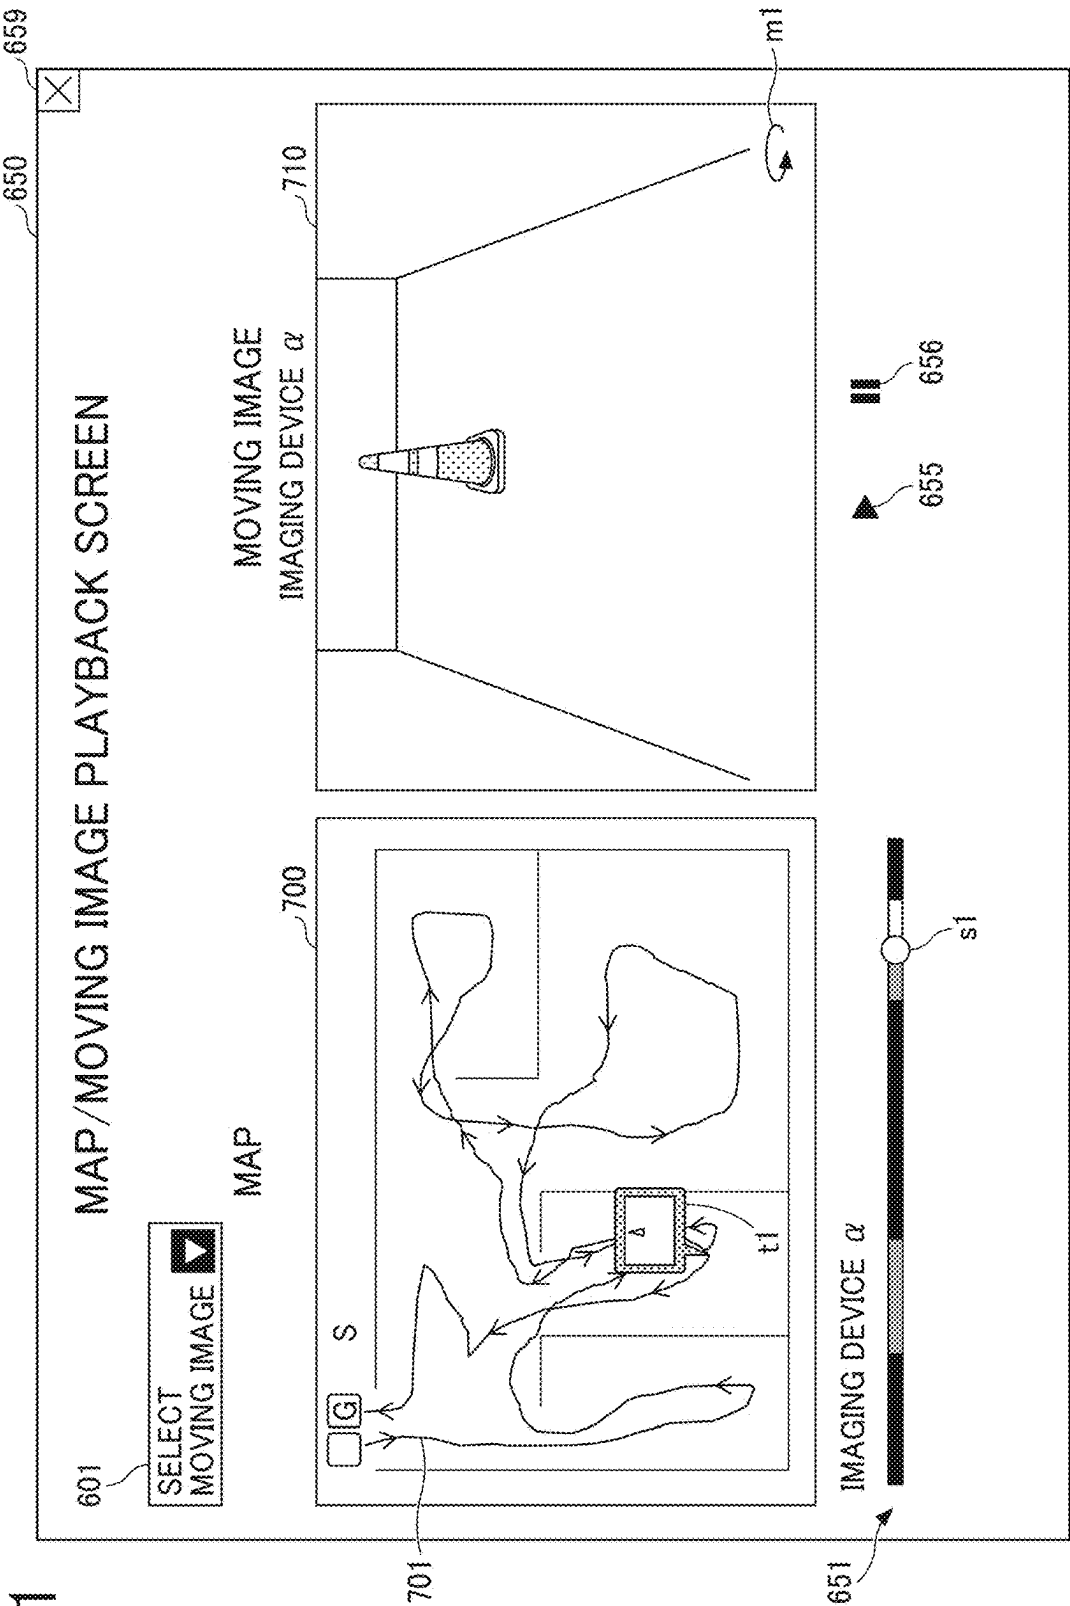


FIG. 32

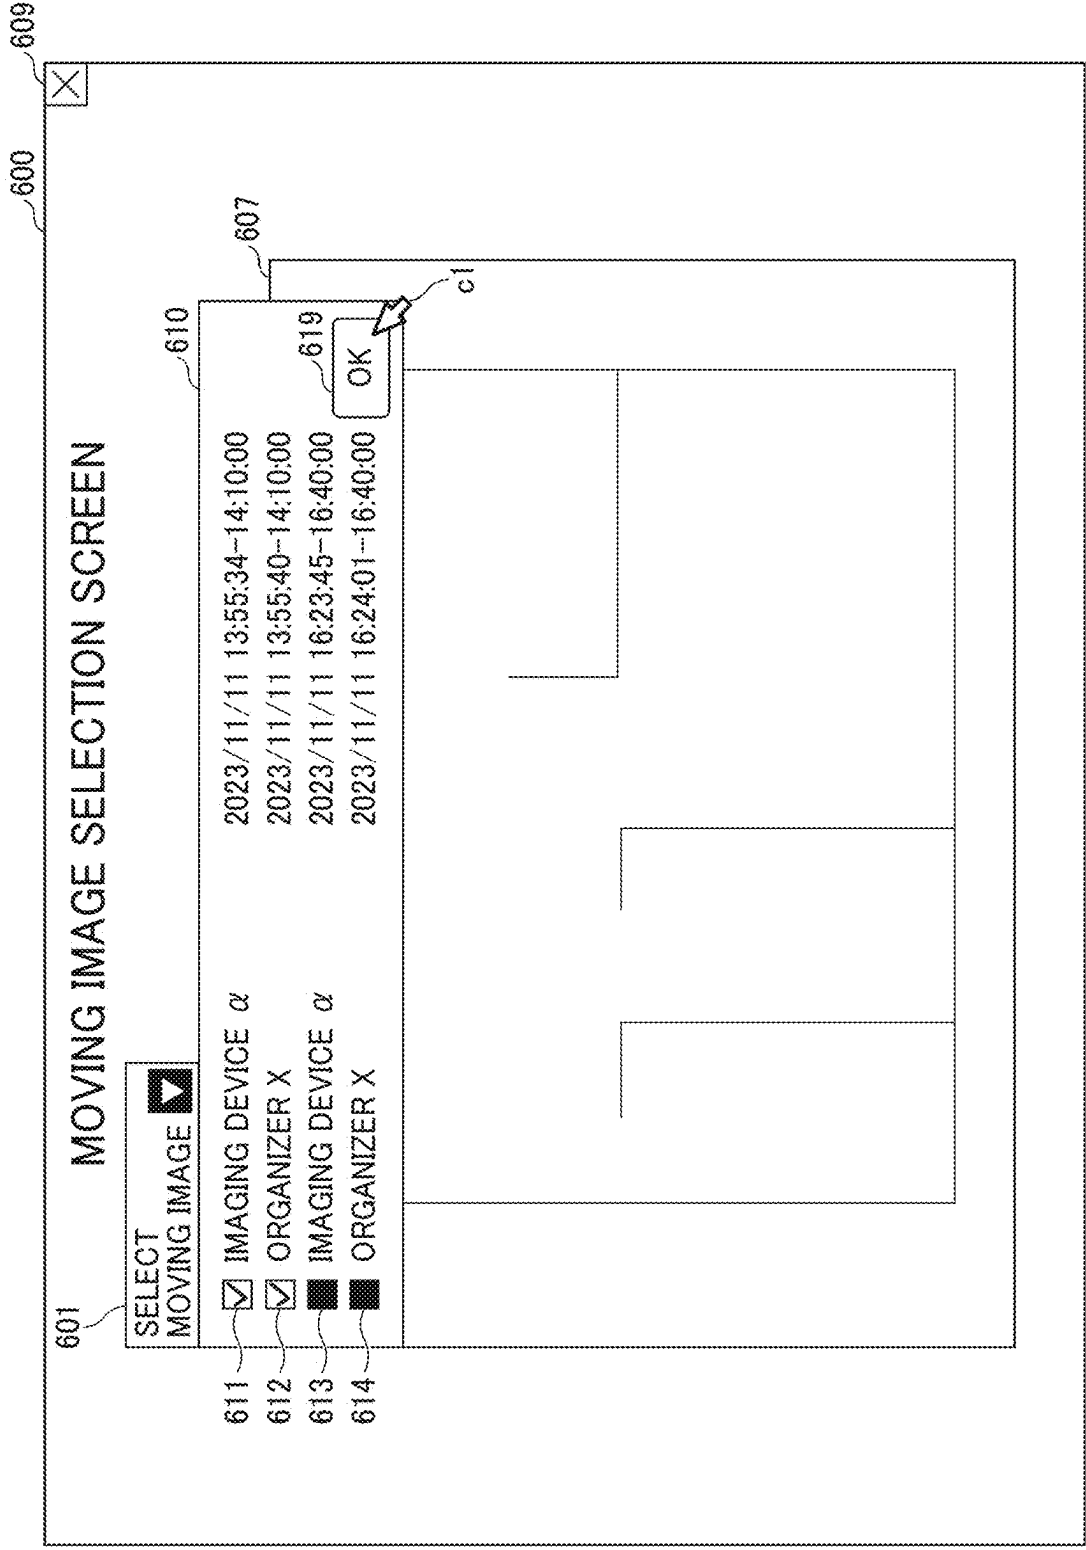


FIG. 33




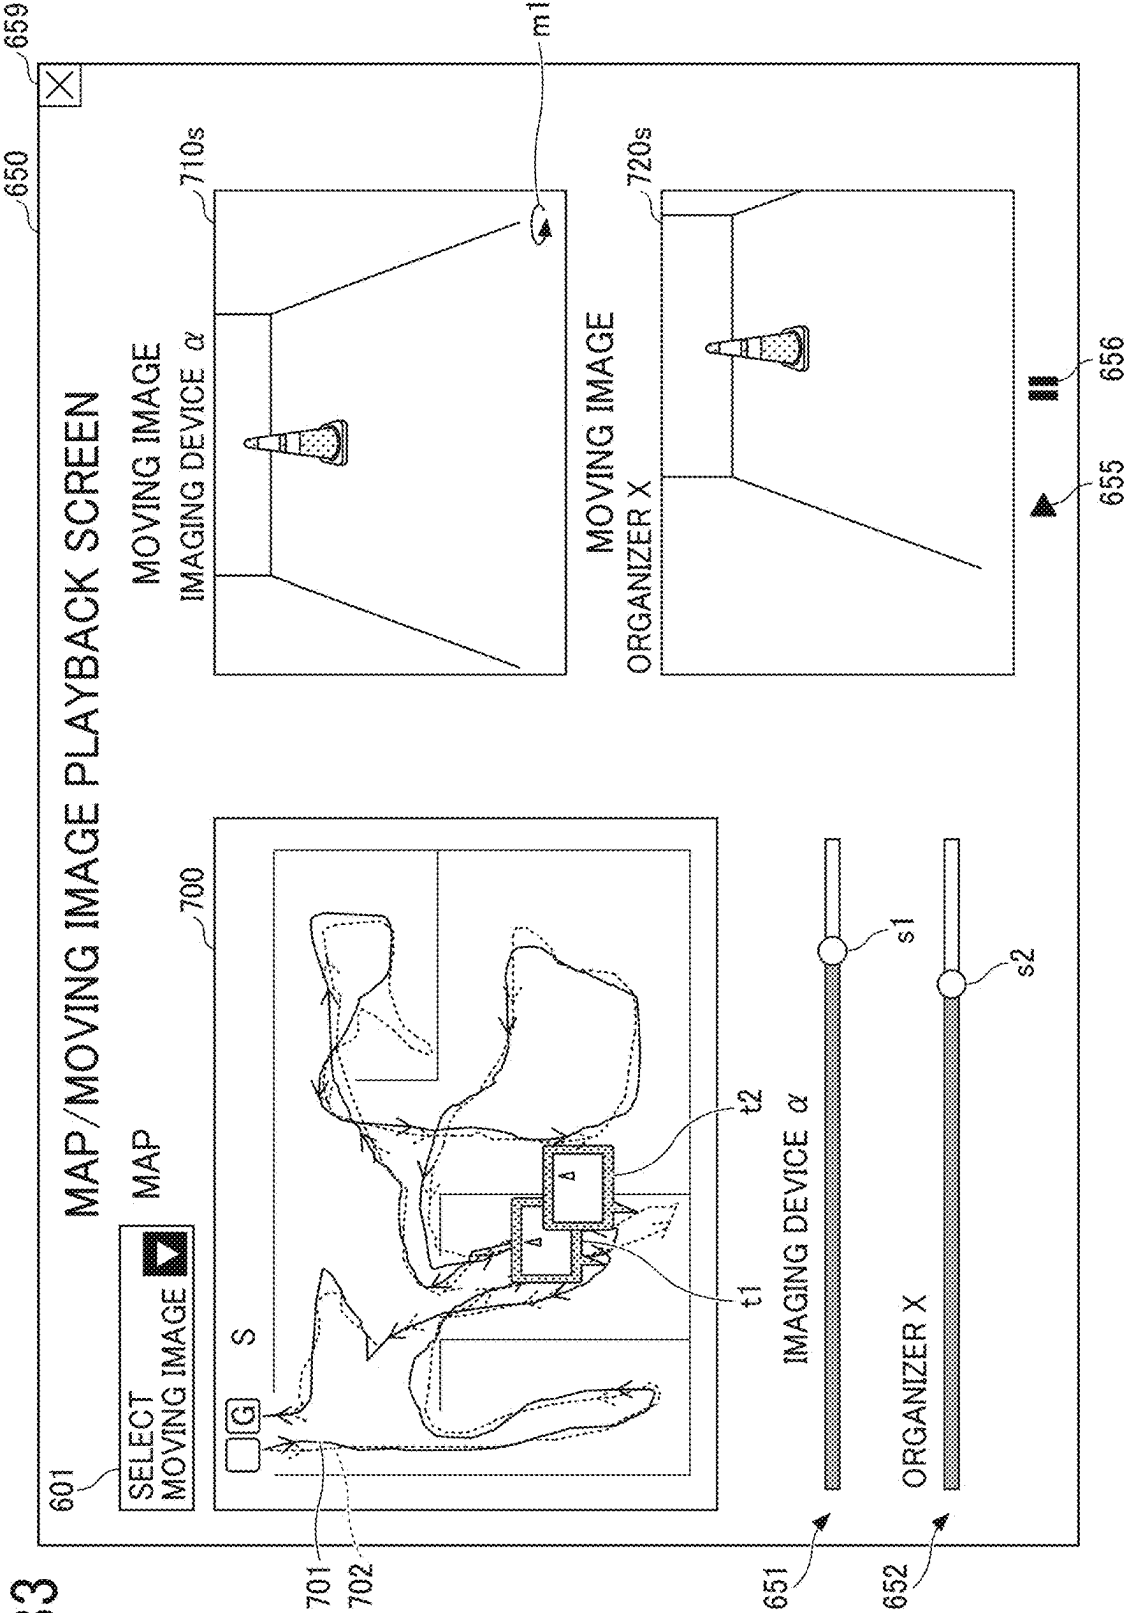


FIG. 34



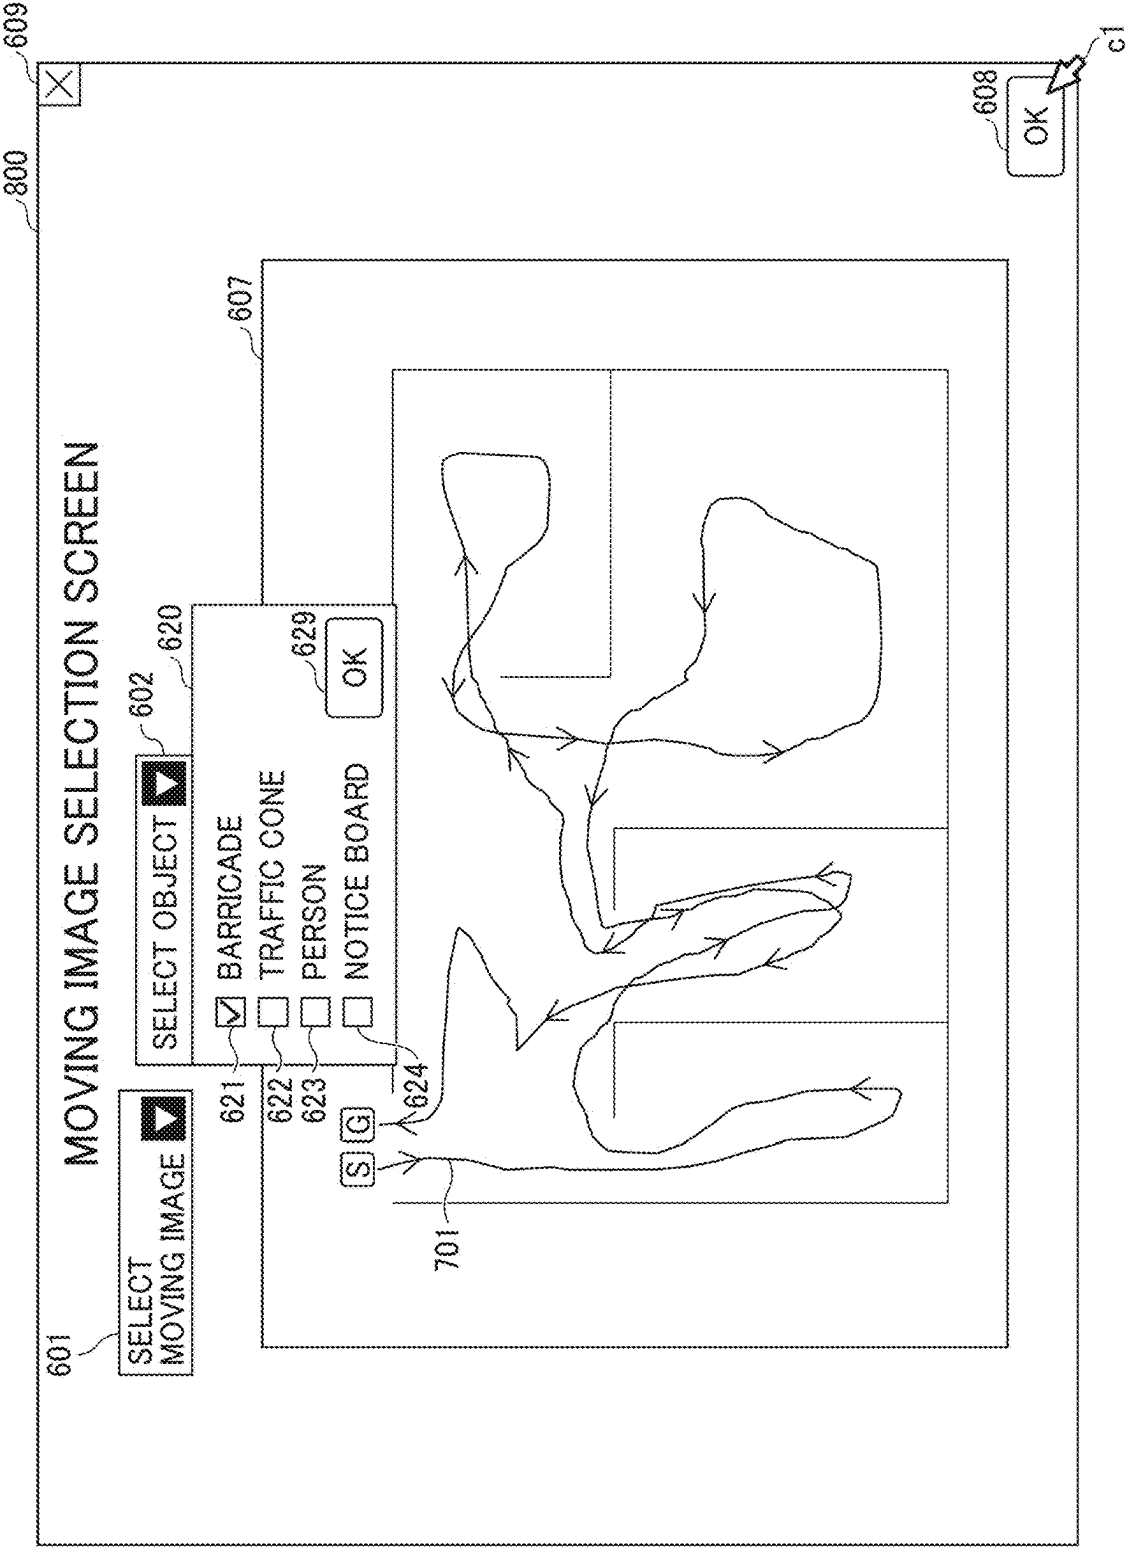

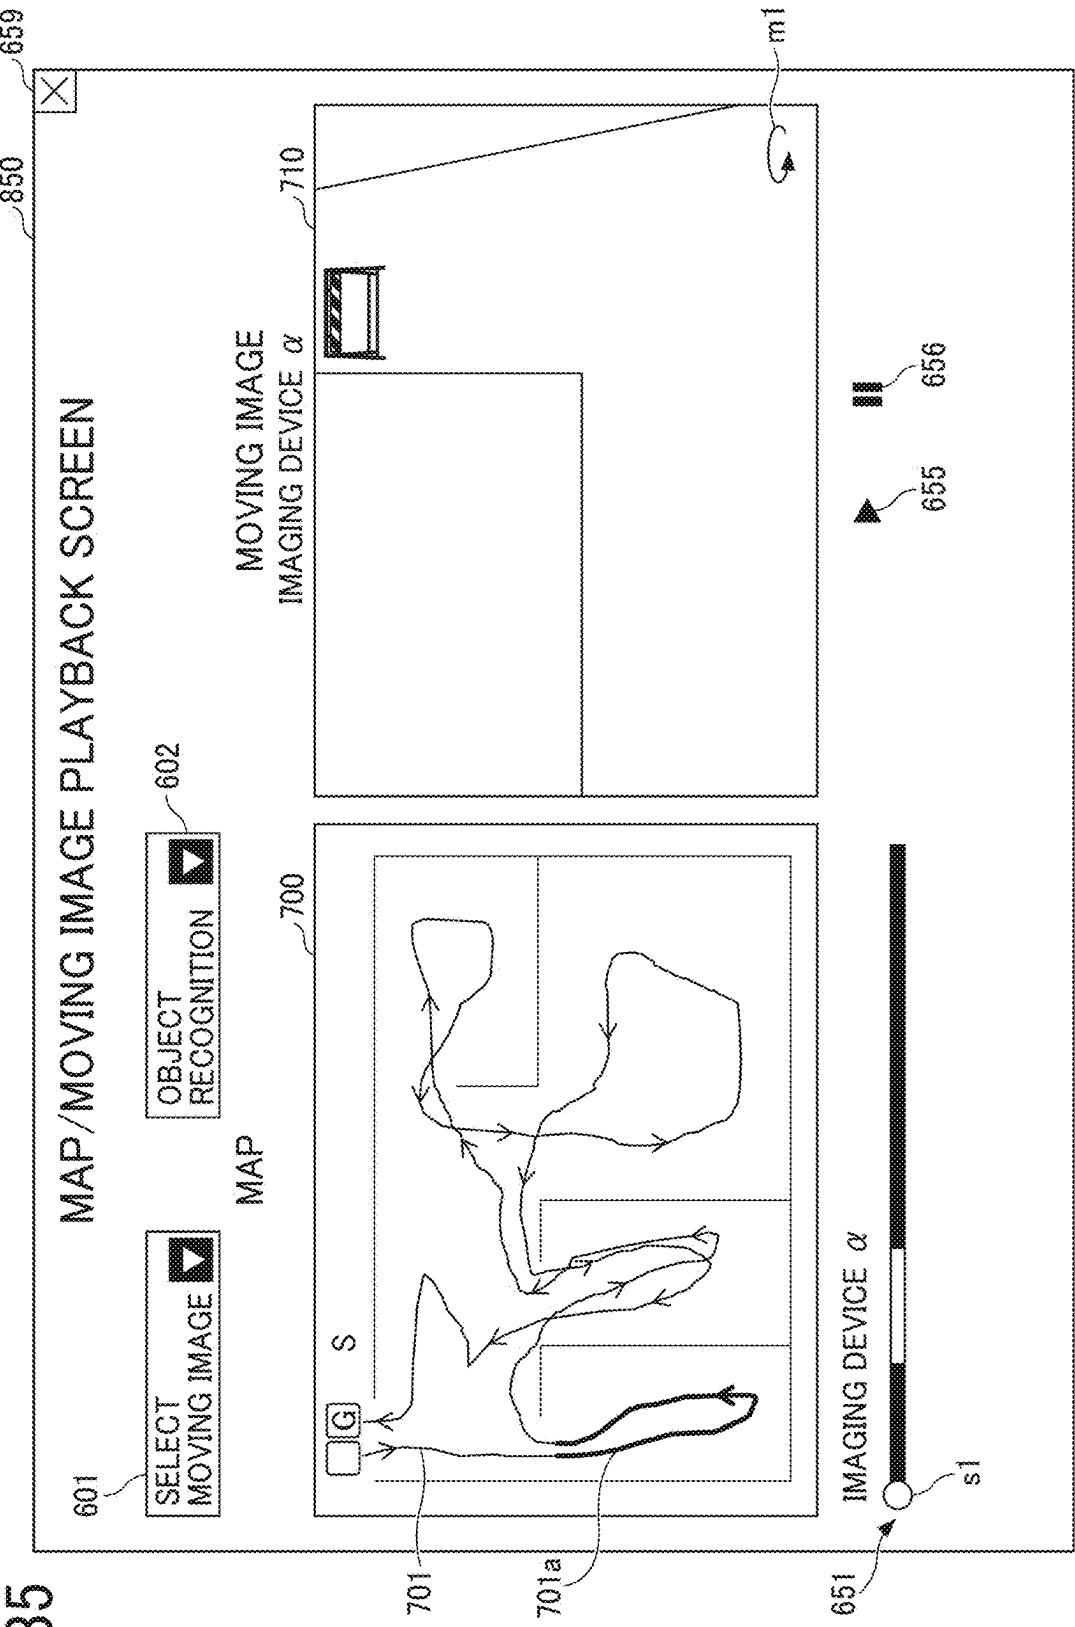

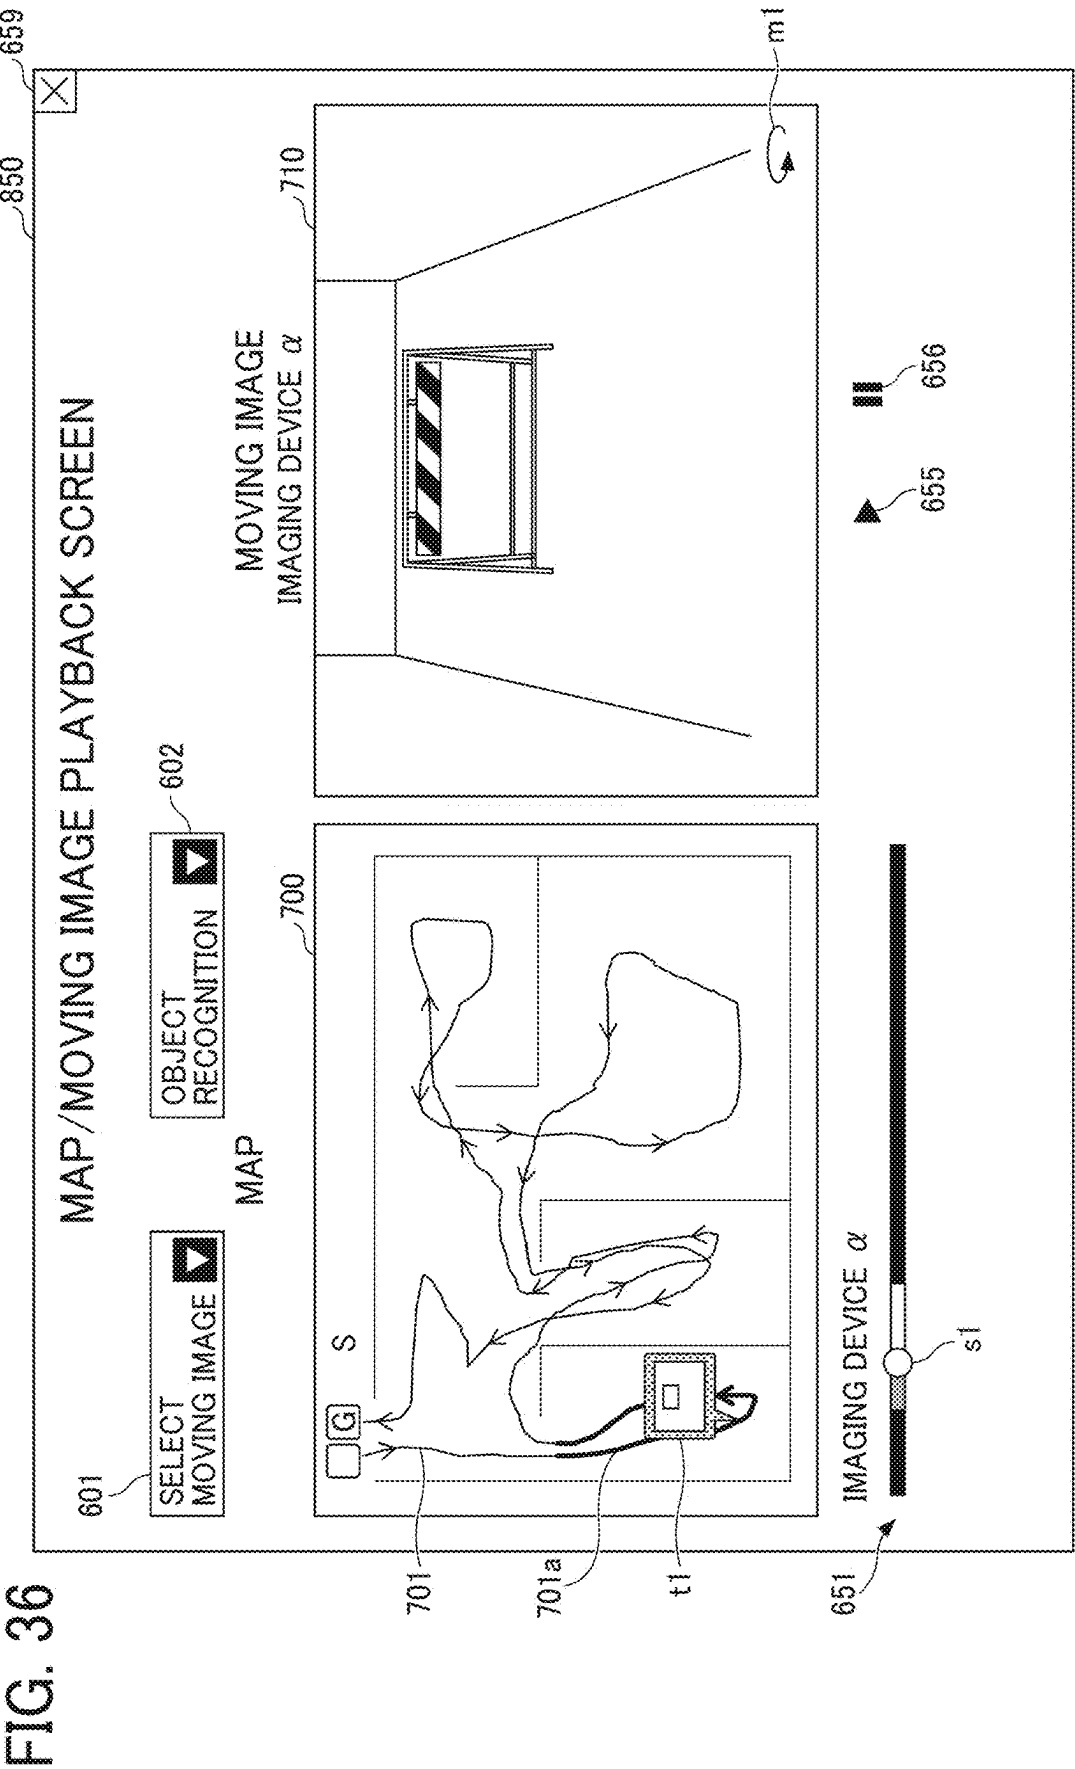

**DISPLAY TERMINAL, DISPLAY METHOD,  
AND NON-TRANSITORY RECORDING  
MEDIUM**

**CROSS-REFERENCE TO RELATED  
APPLICATIONS**

[0001] This patent application is based on and claims priority pursuant to 35 U.S.C. § 119(a) to Japanese Patent Application No. 2024-029672, filed on Feb. 29, 2024, in the Japan Patent Office, the entire disclosure of which is hereby incorporated by reference herein.

**BACKGROUND**

**Technical Field**

[0002] The present disclosure relates to a display terminal, a display method, and a non-transitory recording medium.

**Related Art**

[0003] Currently, wide-field images with a wide field of view, such as 360-degree images (spherical images, omnidirectional images, or all-round images) capturing the entire surrounding area, are known as imaging ranges that include areas not covered by the regular field of view.

[0004] When such an entire wide-field image is displayed on a display terminal, the wide-field image is curved, and a user has difficulty viewing the displayed wide-field image. To cope with this, the display terminal displays a predetermined-area image indicating a predetermined area in the wide-field image to allow the user to view the predetermined-area image.

[0005] Further, operation for selecting a predetermined image from among multiple wide-field images previously recorded and playing the predetermined image has been proposed.

**SUMMARY**

[0006] According to one aspect of the present disclosure, a display terminal includes circuitry to display, on a display, a moving image previously obtained through imaging performed by an imaging device and a map indicating a position related to the imaging and display, on the display, a movement path of the imaging device during the imaging on the map based on position information indicating positions of the imaging device during the imaging.

[0007] According to one aspect of the present disclosure, a display method includes displaying, on a display, a moving image previously obtained through imaging performed by an imaging device and a map indicating a position related to the imaging. The method includes displaying, on the display, a movement path of the imaging device during the imaging on the map based on position information indicating positions of the imaging device during the imaging.

[0008] According to one aspect of the present disclosure, a non-transitory recording medium storing a plurality of instructions which, when executed by one or more processors, causes the processors to perform the above-described method.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0009] A more complete appreciation of embodiments of the present disclosure and many of the attendant advantages

and features thereof can be readily obtained and understood from the following detailed description with reference to the accompanying drawings, wherein:

[0010] FIG. 1A is a left side view of an image capturing device;

[0011] FIG. 1B is a front view of the image capturing device of FIG. 1A;

[0012] FIG. 1C is a plan view of the image capturing device of FIG. 1A;

[0013] FIG. 2 is a diagram illustrating how the image capturing device of FIGS. 1A to 1C is used;

[0014] FIG. 3A is a diagram illustrating a hemispherical image (front side) captured by the image capturing device of FIGS. 1A to 1C;

[0015] FIG. 3B is a diagram illustrating a hemispherical image (back side) captured by the image capturing device of FIGS. 1A to 1C;

[0016] FIG. 3C is a diagram illustrating an image represented by Mercator projection;

[0017] FIG. 4A is a diagram illustrating how a Mercator projection image covers the surface of a sphere;

[0018] FIG. 4B is a diagram illustrating a spherical image;

[0019] FIG. 5 is an illustration of the relative positions of a virtual camera and a predetermined area in a case where a spherical image is represented as a surface area of a three-dimensional solid sphere;

[0020] FIG. 6A is a perspective view of FIG. 5;

[0021] FIG. 6B is a diagram illustrating a predetermined-area image of FIG. 6A being displayed on a display;

[0022] FIG. 6C is a diagram illustrating a predetermined area after the viewpoint of a virtual camera in FIG. 6A is changed;

[0023] FIG. 6D is a diagram illustrating a predetermined-area image of FIG. 6C being displayed on a display;

[0024] FIG. 7 is a diagram illustrating points in a three-dimensional Euclidean space defined in spherical coordinates;

[0025] FIG. 8 is a diagram illustrating a relation between a predetermined area and a point of interest;

[0026] FIG. 9 is a schematic diagram of a communication system;

[0027] FIG. 10 is a block diagram illustrating a hardware configuration of the image capturing device of FIGS. 1A to 1C;

[0028] FIG. 11 is a block diagram illustrating a hardware configuration of a relay device;

[0029] FIG. 12 is a block diagram illustrating a hardware configuration of any one of a communication control system and a communication terminal;

[0030] FIG. 13 is a block diagram illustrating a functional configuration of the communication system of FIG. 9;

[0031] FIG. 14 is a schematic diagram of a user/device management table;

[0032] FIG. 15 is a schematic diagram of a virtual room management table;

[0033] FIG. 16 is a schematic diagram of a position information management table;

[0034] FIG. 17 is a sequence diagram illustrating a communication process in relation to content data in the communication system of FIG. 9;

[0035] FIG. 18 is a sequence diagram illustrating a process for starting image recording and sound recording in the communication system of FIG. 9;

[0036] FIG. 19 is a sequence diagram illustrating a process for stopping image recording and sound recording in the communication system of FIG. 9;

[0037] FIG. 20 is a sequence diagram illustrating a process for playback of a recorded image and recorded sound in the communication system of FIG. 9;

[0038] FIG. 21 is a diagram illustrating a recorded data selection screen;

[0039] FIG. 22 is a flowchart of a playback process;

[0040] FIG. 23 is a diagram illustrating a first display example on a communication terminal and illustrating a moving image selection screen;

[0041] FIG. 24 is a diagram illustrating another first display example on a communication terminal and illustrating a moving image selection screen;

[0042] FIG. 25 is a diagram illustrating still another first display example on a communication terminal and illustrating a map/moving image playback screen;

[0043] FIG. 26 is a diagram illustrating still another first display example on a communication terminal and illustrating a map/moving image playback screen;

[0044] FIG. 27 is a diagram illustrating still another first display example on a communication terminal and illustrating a map/moving image playback screen;

[0045] FIG. 28 is a diagram illustrating still another first display example on a communication terminal and illustrating a map/moving image playback screen;

[0046] FIG. 29 is a diagram illustrating a second display example on a communication terminal and illustrating a map/moving image playback screen;

[0047] FIG. 30 is a diagram illustrating another second display example on a communication terminal and illustrating a map/moving image playback screen;

[0048] FIG. 31 is a diagram illustrating still another second display example on a communication terminal and illustrating a map/moving image playback screen;

[0049] FIG. 32 is a diagram illustrating a third display example on a communication terminal and illustrating a moving image selection screen;

[0050] FIG. 33 is a diagram illustrating another third display example on a communication terminal and illustrating a map/moving image playback screen;

[0051] FIG. 34 is a diagram illustrating a fourth display example on a communication terminal and illustrating a moving image selection screen;

[0052] FIG. 35 is a diagram illustrating another fourth display example on a communication terminal and illustrating a map/moving image playback screen; and

[0053] FIG. 36 is a diagram illustrating still another fourth display example on a communication terminal and illustrating a map/moving image playback screen.

[0054] The accompanying drawings are intended to depict embodiments of the present disclosure and should not be interpreted to limit the scope thereof. The accompanying drawings are not to be considered as drawn to scale unless explicitly noted. Also, identical or similar reference numerals designate identical or similar components throughout the several views.

#### DETAILED DESCRIPTION

[0055] In describing embodiments illustrated in the drawings, specific terminology is employed for the sake of clarity. However, the disclosure of this specification is not intended to be limited to the specific terminology so selected and it is

to be understood that each specific element includes all technical equivalents that have a similar function, operate in a similar manner, and achieve a similar result.

[0056] Referring now to the drawings, embodiments of the present disclosure are described below. As used herein, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise.

[0057] Embodiments of the present disclosure are described below with reference to the attached drawings.

#### Overview of Spherical Image

[0058] A method for generating a spherical image is described with reference to FIGS. 1 (1A to 1C) to 8. The spherical image is also referred to as a spherical panoramic image or a 360-degree panoramic image. The spherical image is an example of a wide-field video (wide-field moving image) having a wide field of view. The wide-field image includes a 180-degree panoramic image.

[0059] An external view of an imaging device 10 is described with reference to FIG. 1 (FIGS. 1A to 1C). The imaging device 10 is a digital camera for acquiring an image to be a spherical image. FIG. 1A, FIG. 1B, and FIG. 1C are a left side view, a front view, and a plan view, respectively, of the imaging device 10.

[0060] As illustrated in FIG. 1A, the imaging device 10 is sized to be held by hand. As illustrated in FIGS. 1A to 1C, the imaging device 10 is provided with an imaging element 103a on the front side (anterior side) and an imaging element 103b on the back side (rear side) in the upper section. As illustrated in FIG. 1B, the imaging device 10 is also provided with an operation unit 115 such as a shutter button on the opposite side of the back side.

[0061] The usage scenario of the imaging device 10 is described below with reference to FIG. 2. FIG. 2 is an illustration of an example of how the imaging device 10 is used. As illustrated in FIG. 2, the imaging device 10 is communicably connected to a relay device 3 installed on a table 2 and is used to capture or acquire an image including the surrounding subjects and scenery. The imaging elements 103a and 103b illustrated in FIG. 1A to FIG. 1C capture the surrounding subjects of the user to obtain two hemispherical images. If the imaging device 10 does not transmit the captured spherical images to another communication terminal or system, the relay device 3 is not needed.

[0062] An overview of a process of generating a spherical image from images captured by the imaging device 10 is described below with reference to FIG. 3 (FIG. 3A to FIG. 3C) and FIG. 4 (FIG. 4A and FIG. 4B). FIG. 3A is a diagram illustrating a hemispherical image (front side) captured by the imaging device 10. FIG. 3B is a diagram illustrating a hemispherical image (back side) captured by the imaging device 10. FIG. 3C is a diagram illustrating an image in equirectangular projection. The image in equirectangular projection may be referred to as an “equirectangular projection image.” For example, an image in Mercator projection may be used. The image in Mercator projection may be referred to as a “Mercator image.” FIG. 4A is a diagram illustrating an equirectangular projection image to cover a sphere. FIG. 4B is a diagram illustrating a spherical image. The “equirectangular projection image” is a spherical image in an equirectangular format and is an example of the wide-field image described above.

[0063] As illustrated in FIG. 3A, an image captured by the imaging element **103a** is a hemispherical image (front side) curved by a wide-angle lens **102a** such as a fisheye lens, which is described later. As illustrated in FIG. 3B, an image captured by the imaging element **103b** is a hemispherical image (back side) curved by a wide-angle lens **102b** such as a fisheye lens, which is described later. The imaging device **10** combines the hemispherical image (front side) and the hemispherical image (rear side) inverted by 180 degrees to create an equirectangular projection image EC as illustrated in FIG. 3C.

[0064] The imaging device **10** uses Open Graphics Library for Embedded Systems (OpenGL ES) to map the equirectangular projection image EC in a manner that the sphere surface is covered as illustrated in FIG. 4A to generate a spherical image CE as illustrated in FIG. 4B. In other words, the spherical image CE is represented as an image corresponding to the equirectangular projection image EC oriented toward the center of the sphere. OpenGL ES is a graphic library used for visualizing two-dimensional (2D) data and three-dimensional (3D) data. OpenGL ES is an example of software that executes image processing. Software other than Open ES may be used to generate the spherical image CE. The spherical image CE is either a still image or a moving image. Although the imaging device **10** generates a spherical image in the above description, a communication control system **5**, a communication terminal **7**, or a communication terminal **9** may perform substantially the same image processing or a part of the image processing instead of the imaging device **10**.

[0065] A Mercator image is mapped to cover a sphere surface using OpenGL ES as illustrated in FIG. 4A to generate a spherical image as illustrated in FIG. 4B. In other words, the spherical image is represented as an image corresponding to the Mercator image oriented toward the center of the sphere. OpenGL ES is a graphic library used for visualizing 2D data and 3D data.

[0066] As described above, since the spherical image CE is an image mapped to the sphere surface to cover the sphere surface, a part of the image may look distorted when viewed by the user, giving a feeling of strangeness. To cope with this, each of the communication terminals **7** and **9** displays a predetermined area that is a part of the spherical image CE as a planar image with little curvature, thus allowing display without giving a feeling of strangeness to the user. Such an image representing a part of a spherical image may be referred to as a predetermined-area image in the following description. A predetermined area and a predetermined-area image are described with reference to FIGS. 5 to 8.

[0067] FIG. 5 is an illustration of relative positions of a virtual camera IC and a predetermined area T when a spherical image is represented as a three-dimensional solid sphere. The virtual camera IC corresponds to a position of the virtual viewpoint of a user viewing the spherical image CE represented as a surface area of the three-dimensional solid sphere. FIG. 6A is a perspective view of FIG. 5. FIG. 6B is a diagram illustrating a predetermined-area image of FIG. 6A being displayed on a display; FIG. 6C is a diagram illustrating a predetermined area after a viewpoint of a virtual camera in FIG. 6A is changed; FIG. 6D is a diagram illustrating a predetermined-area image of FIG. 6C being displayed on a display;

[0068] Assuming that the spherical image CE having been generated is the surface area of a solid sphere CS, the virtual

camera IC is inside of the spherical image CE as illustrated in FIG. 5. The predetermined area T in the spherical image CE is an imaging area of the virtual camera IC. Specifically, the predetermined area T is specified by field-of-view information indicating an imaging direction and a field of view of the virtual camera IC in a three-dimensional virtual space containing the spherical image CE. The field-of-view information may be referred to as “area information.”

[0069] Further, zooming in the predetermined area T is also expressed by bringing the virtual camera IC closer to or away from the spherical image CE. A predetermined-area image Q is an image of the predetermined area T in the spherical image CE. The predetermined area T is defined by a field of view  $\alpha$  and a distance  $f$  from the virtual camera IC to the spherical image CE.

[0070] When the virtual viewpoint of the virtual camera IC is moved (changed) from the state illustrated in FIG. 6A to the right (left in the drawing) as illustrated in FIG. 6C, the predetermined area T in the spherical image CE is moved to a predetermined area T', accordingly. Accordingly, the predetermined-area image Q displayed on a predetermined display is changed to a predetermined-area image Q'. As a result, the image displayed on the predetermined display changes from the image illustrated in FIG. 6B to the image illustrated in FIG. 6D.

[0071] A relation between the field-of-view information and the image of the predetermined area T is described below with reference to FIGS. 7 and 8.

[0072] FIG. 7 is a diagram illustrating a point in a three-dimensional Euclidean space according to spherical coordinates. FIG. 8 is a diagram illustrating a relation between the predetermined area and a point of interest (center point).

[0073] Positional coordinates ( $r, \theta, \phi$ ) are given when the center point CP illustrated in FIG. 7 is represented by a spherical polar coordinate system. The positional coordinates ( $r, \theta, \phi$ ) represent a radius vector, a polar angle, and an azimuth angle. The radius vector  $r$  is the distance from the origin of a three-dimensional virtual space including the spherical image to any point (the center point CP in FIG. 8). Accordingly, the radius vector  $r$  is equal to the distance “ $f$ ” illustrated in FIG. 8.

[0074] Further, as illustrated in FIG. 8, when the center of the predetermined area T that is the imaging area of the virtual camera IC is considered as the center point CP in FIG. 7, a trigonometric function equation expressed by the following (Formula 1) is satisfied.

$$(L/f) = \tan(\alpha/2) \quad (\text{Formula 1})$$

[0075] “ $f$ ” denotes the distance from the virtual camera IC to the center point CP of the predetermined area T. “ $L$ ” is the distance between the center point CP and a given vertex of the predetermined area T ( $2L$  is a diagonal line). “ $\alpha$ ” is a field of view. In this case, the field-of-view information for specifying the predetermined area T can be represented by pan ( $\theta$ ), tilt ( $\phi$ ), and fov ( $\alpha$ ). Zooming of the predetermined area T is expressed by enlarging or reducing a range (arc) of the field angle  $\alpha$ .

#### Overview of Communication System

[0076] An overview of a communication system **1** is described below with reference to FIG. 9. FIG. 9 is a schematic diagram of the communication system **1**.

[0077] As illustrated in FIG. 9, the communication system 1 includes the imaging device 10, the relay device 3, the communication terminal 7, and the communication terminal 9 (communication terminals 9a and 9b). The communication terminals 9a and 9b are collectively referred to as “communication terminal 9.” Each of the communication terminals 7 and 9 may be referred to as a “display terminal” that displays, for example, an image.

[0078] The imaging device 10 is a digital camera for obtaining a wide-field image, such as a spherical image, as described above. The relay device 3 has a cradle function for charging the imaging device 10 and transmitting and receiving data to and from the imaging device 10. The relay device 3 can communicate with the imaging device 10 via a contact point and can communicate with the communication control system 5 via a communication network 100. The communication network 100 includes the Internet, a local area network (LAN), and a (wireless) router.

[0079] The communication control system 5 is, for example, a computer, and can communicate with the relay device 3 and the communication terminals 7 and 9 via the communication network 100. The communication control system 5 manages, for example, field-of-view information, and thus can be referred to as an “information management system.”

[0080] The communication terminals 7 and 9 are computers such as notebook personal computers (PCs), and can communicate with the communication control system 5 via the communication network 100. Each of the communication terminals 7 and 9 is installed with OpenGL ES and creates a predetermined-area image (see FIG. 6) from a spherical image received from the communication control system 5. The communication control system 5 may be configured by a single computer or a plurality of computers.

[0081] Further, the imaging device 10 and the relay device 3 are installed at predetermined positions by an organizer (user) X on a site Sa such as a construction site, exhibition venue, educational institution, or medical facility. The communication terminal 7 is operated (used) by the organizer X. The communication terminal 9a is operated (used) by a participant (user) A such as a viewer at a remote location from the site Sa. The communication terminal 9b is operated (used) by a participant (user) B such as a viewer at a remote location from the site Sa. The participant A and participant B may be at the same location or at different locations.

[0082] The communication control system 5 transmits (distributes) the wide-field image obtained from the imaging device 10 via the relay device 3 to the communication terminals 7 and 9. The communication control system 5 transmits (distributes) a planar image obtained from each communication terminal 7 or 9 to the communication terminals 7 and 9. The wide-field image may be a moving image (wide-field moving image) or a still image (wide-field still image).

#### Hardware Configuration

[0083] Hardware configurations of the imaging device 10, the relay device 3, the communication terminal 7, and the communication terminal 9 are described in detail with reference to FIGS. 10 to 12.

#### Hardware Configuration of Imaging Device

[0084] FIG. 10 is a block diagram illustrating a hardware configuration of the imaging device 10. As illustrated in

FIG. 10, the imaging device 10 includes an imaging unit 101, an image processor 104, an imaging controller 105, a microphone 108, an audio processor 109, a central processing unit (CPU) 111, a read-only memory (ROM) 112, a static random-access memory (SRAM) 113, a dynamic random-access memory (DRAM) 114, the operation unit 115, an input/output interface (I/F) 116, a short-range communication circuit 117, an antenna 117a for the short-range communication circuit 117, an electronic compass 118, a gyro sensor 119, an acceleration sensor 120, and a network I/F 121.

[0085] The imaging unit 101 includes wide-angle lenses 102a and 102b (collectively referred to as lens 102 in the following description unless they need to be distinguished from each other), each having a field view of equal to or greater than 180 degrees so as to form a hemispherical image. The imaging unit 101 further includes the two imaging elements 103a and 103b corresponding to the lenses 102a and 102b respectively.

[0086] The imaging elements 103a and 103b each of which includes an imaging sensor such as a complementary metal oxide semiconductor (CMOS) sensor and a charge-coupled device (CCD) sensor, a timing generation circuit, and a group of registers. The imaging sensor converts an optical image formed by, for example, the lenses 102a and 102b into electrical signals to output image data. The timing generation circuit generates, for example, horizontal or vertical synchronization signals and pixel clocks for the imaging sensor. In the group of registers, for example, various commands and parameters for operations of the imaging elements 103a and 103b are set. The configuration in which the imaging unit 101 includes two wide-angle lenses is merely an example, and the imaging unit 101 may include a single wide-angle lens, or three or more wide-angle lenses.

[0087] Each of the imaging elements 103a and 103b of the imaging unit 101 is connected to the image processor 104 via a parallel I/F bus. By contrast, each of the imaging elements 103a and 103b of the imaging unit 101 is connected to the imaging controller 105 via a serial I/F bus, such as an internet integrated circuit (I2C) bus.

[0088] The image processor 104, the imaging controller 105, and the audio processor 109 are connected to the CPU 111 via a bus 110. Further, the ROM 112, the SRAM 113, the DRAM 114, the operation unit 115, the input/output I/F 116, the short-range communication circuit 117, the electronic compass 118, the gyro sensor 119, the acceleration sensor 120, and the network I/F 121 are also connected to the bus 110.

[0089] The image processor 104 acquires image data from each of the imaging elements 103a and 103b via the parallel I/F bus and performs predetermined processing on the image data. Then, the image processor 104 performs image data combining to generate equirectangular projection image data (an example of a wide-field image), which is described later.

[0090] The imaging controller 105 functions as a master device while each of the imaging elements 103a and 103b functions as a slave device, and the imaging controller 105 sets commands in the group of registers of each of the imaging elements 103a and 103b through the I2C bus. The image controller 105 receives commands from the CPU 111. The imaging controller 105 obtains status data of the group

of registers of each of the imaging elements **103a** and **103b** through the I2C bus and transmits the status data to the CPU **111**.

[0091] The imaging controller **105** instructs the imaging elements **103a** and **103b** to output the image data at a time when the shutter button of the operation unit **115** is pressed. In some cases, the imaging device **10** displays a preview image on a display (e.g., a display of an external terminal such as a smartphone that performs short-range communication with the imaging device **10** through the short-range communication circuit **117**) or displays a moving image (movie). In the case of displaying a moving image, the image data is continuously output from the imaging elements **103a** and **103b** at a predetermined frame rate (frames per minute).

[0092] Further, the imaging controller **105** operates in conjunction with the CPU **111** to synchronize the output timings of image data between the imaging elements **103a** and **103b**. The imaging device **10** according to the present embodiment does not include a display unit (display). However, in some embodiments, the imaging device **10** may include a display. The microphone **108** converts sound into audio data (signals).

[0093] The audio processor **109** obtains the audio data from the microphone **108** through an I/F bus and performs predetermined processing on the audio data.

[0094] The CPU **111** controls the entire operation of the imaging device **10** and executes predetermined processing.

[0095] The ROM **112** stores various programs for execution by the CPU **111**. Each of the SRAM **113** and the DRAM **114** operates as a working memory to store programs to be executed by the CPU **111** or data currently processed. More specifically, in one example, the DRAM **114** stores image data currently processed by the image processor **104** and equirectangular projection image data on which processing has been performed.

[0096] The operation unit **115** collectively refers to various operation buttons, a power switch, a shutter button, and a touch panel that functions both as a display for information and as an input device, and can be used in combination. The operation unit **115** allows the user operating the operation unit **115** to input various image capturing (image capturing) modes or image capturing (image capturing) conditions.

[0097] The input/output I/F **116** collectively refers to an interface circuit, such as a universal serial bus (USB) I/F, for an external medium such as a secure digital (SD) card or a personal computer. The input/output I/F **116** supports at least one of wired and wireless communications. The equirectangular projection image data stored in the DRAM **114** can be stored in an external medium via the input/output I/F **116** or transmitted to an external terminal (apparatus) via the input/output I/F **116**, as appropriate.

[0098] The short-range communication circuit **117** communicates with an external terminal (apparatus) via the antenna **117a** of the imaging device **10** by short-range wireless communication such as near field communication (NFC), BLUETOOTH (registered trademark), and Wi-Fi. The short-range communication circuit **117** transmits the equirectangular projection image data to the external terminal (apparatus).

[0099] The electronic compass **118** calculates the orientation of the imaging device **10** from the Earth's magnetism to output orientation information. The orientation information is an example of related information that is metadata

described in compliance with Exif and is used for image processing such as image correction of captured images. The related information also includes an imaging date and time, that indicates the date and time when the image is captured, and a data size of the image data.

[0100] The gyro sensor **119** detects the change in tilt of the imaging device **10** (roll, pitch, yaw) with the movement of the imaging device **10**. The change in tilt is one example of the related information (metadata) described in compliance with Exif, and used for image processing such as image correction performed on a captured image.

[0101] The acceleration sensor **120** detects acceleration in three axial directions.

[0102] The imaging device **10** can also calculate the attitude (tilt with respect to the direction of gravity) of the own device (imaging device **10**) using, for example, the electronic compass **118** and the acceleration sensor **120**. Further, the imaging device **10** increases the accuracy of image correction by the acceleration sensor **120**.

[0103] The network I/F **121** is an interface for data communication via such as a router using the communication network **100** such as the Internet. The hardware configuration of the imaging device **10** is not limited to the above, and may be any configuration as long as the functional configuration of the imaging device **10** can be implemented. At least a part of the hardware configuration may be implemented by the relay device **3** or the communication network **100**.

#### Hardware Configuration of Relay Device

[0104] FIG. **11** is a block diagram illustrating a hardware configuration of the relay device **3**. The relay device **3** having the hardware configuration illustrated in FIG. **11** has a cradle with a wireless communication function.

[0105] As illustrated in FIG. **11**, the relay device **3** includes a CPU **301**, ROM **302**, RAM **303**, electrically erasable and programmable ROM (EEPROM) **304**, a CMOS sensor **305**, a bus line **310**, a communication device **313**, an antenna **313a**, a positioning device **314**, and an input/output I/F **316**.

[0106] The CPU **301** controls the entire operation of the relay device **3**. The ROM **302** stores a control program such as an initial program loader (IPL) used for operating the CPU **301**. The RAM **303** is used as a working area for the CPU **301**.

[0107] The EEPROM **304** reads or writes under the control of the CPU **301**. The EEPROM **304** stores an operating system (OS) and other programs executed by the CPU **301**, and various data.

[0108] The CMOS sensor **305** is a solid-state imaging element that images a subject under the control of the CPU **301** and obtains image data.

[0109] The communication device **313** communicates with the communication network **100** by a wireless communication signal using the antenna **313a**.

[0110] The positioning device **314** receives a positioning signal including position information (latitude, longitude, and altitude) of the relay device **3** using a global navigation satellite system (GNSS) satellite such as a global positioning system (GPS) satellite or using an indoor MESSAGING system (IMES) as an indoor GPS.

[0111] The input/output I/F **316** is an interface circuit, such as a USB I/F, electrically connected to the input/output I/F **116** of the imaging device **10**. The input/output I/F **316** supports at least one of wired and wireless communications.

[0112] The bus line 310 includes an address bus and a data bus. The bus line 310 electrically connects the components, such as the CPU 301, with each other.

#### Hardware Configuration of Communication Control System/Communication Terminal

[0113] FIG. 12 is a block diagram illustrating a hardware configuration of the communication control system 5. The hardware configuration of each of the communication terminals 7 and 9 is the same as that of the communication control system 5, and thus the description thereof is omitted.

[0114] As illustrated in FIG. 12, the communication control system 5 includes, as a computer, a CPU 501, a ROM 502, a RAM 503, a solid-state drive (SSD) 504, an external device connection I/F 505, a network I/F 506, a display 507, an operation device 508, a medium I/F 509, a bus line 510, a CMOS sensor 511, a speaker 512, and a positioning device 514.

[0115] The CPU 501 controls the entire operation of the communication control system 5. The ROM 502 stores programs used for driving the CPU 501, such as an IPL. The RAM 503 is used as a working area for the CPU 501.

[0116] The SSD 504 reads or writes various data under the control of the CPU 501. When being, for example, a smartphone, each of the communication terminals 7 and 9 may not include the SSD 504. A hard disk drive (HDD) may be used instead of the SSD 504.

[0117] The external device connection I/F 505 is an interface that connects to various external devices (apparatuses). Examples of such external devices include a display, a speaker, a keyboard, a mouse, a universal serial bus (USB) memory, and a printer.

[0118] The network I/F 506 is an interface for data communication via the communication network 100.

[0119] The display 507 is a display unit such as a liquid crystal display (LCD) or an organic electroluminescence (EL) display that displays various images.

[0120] The operation device 508 is an input unit such as various operation buttons, a power switch, a shutter button, and a touch panel for operations including selecting or executing various instructions, selecting a processing target, and moving a cursor.

[0121] The medium I/F 509 controls reading and writing (storing) data from or to a recording medium 509<sub>m</sub> such as a flash memory. Examples of the recording medium 509<sub>m</sub> include a digital versatile disc (DVD) and a BLU-RAY DISC.

[0122] The CMOS sensor 511 is a built-in imaging unit that captures a subject under the control of the CPU 501 and obtains image data. A CCD sensor may be used instead of the CMOS sensor.

[0123] The speaker 512 is a circuit that generates sound such as music or voice by converting an electrical signal into physical vibration.

[0124] The positioning device 514 receives a positioning signal including position information (latitude, longitude, and altitude) of each of the communication terminals 7 and 9 using a GNSS satellite such as a GPS satellite or using an IMES as an indoor GPS.

[0125] The bus line 510 includes an address bus and a data bus. The bus line 510 electrically connects the components, such as the CPU 501, with each other.

#### Functional Configuration

[0126] A functional configuration of the communication system 1 is described below with reference to FIGS. 13 to 16.

#### Functional Configuration of Imaging Device

[0127] As illustrated in FIG. 13, the imaging device 10 includes a reception unit 12, a detection unit 13, an imaging unit 16, a sound collection unit 17, a connection unit 18, and a storing/reading unit 19. Each of the above-mentioned units is a function or a means that is implemented by operating any one or more of the components illustrated in FIG. 10 according to instructions from the CPU 111 executing a program for an imaging device after the program is loaded from the SRAM 113 to the DRAM 114.

[0128] The imaging device 10 further includes a storage unit 1000 that is implemented by the ROM 112, the SRAM 113, and the DRAM 114 illustrated in FIG. 9.

#### Functional Units of Imaging Device

[0129] The reception unit 12 of the imaging device 10 is implemented by processing of the operation unit 115 for the CPU 111 and receives an operation input from the user.

[0130] The detection unit 13 is implemented by, for example, processing of the CPU 111 for a component such as the electronic compass 118, the gyro sensor 119, or the acceleration sensor 120 and obtains attitude information by detecting the attitude of the imaging device 10.

[0131] The imaging unit 16 is implemented by, for example, processing of the CPU 111 for the imaging unit 101, the image processor 104, or the imaging controller 105 and images, for example, scenery to obtain a captured image.

[0132] The sound collection unit 17 is implemented by, for example, processing of the CPU 111 for the audio processor 109 and collects sound around the imaging device 10.

[0133] The connection unit 18 is implemented by, for example, processing of the CPU 111 for the input/output I/F 116 and establishes communication with the relay device 3.

[0134] The storing/reading unit 19 is implemented by, for example, processing of the CPU 111 and stores various data (or information) in the storage unit 1000 or reads various data (or information) from the storage unit 1000.

#### Functional Configuration of Relay Device

[0135] As illustrated in FIG. 13, the relay device 3 includes a communication unit 31 and a connection unit 38. Each of the above-mentioned units is a function or a means that is implemented by operating any one or more of the components illustrated in FIG. 11 according to instructions from the CPU 301 executing a program for the relay device 3 after the program is loaded from the EEPROM 304 to the RAM 303.

#### Functional Configuration of Relay Device 3

[0136] The communication unit 31 of the relay device 3 is implemented by, for example, processing of the CPU 301 for the communication device 313 illustrated in FIG. 11 and establishes data communication with the imaging device 10 and the communication control system 5 via the communication network 100.



[0137] The connection unit **38** is implemented by, for example, processing of the CPU **301** for the input/output I/F **316** and establishes data communication with the imaging device **10**.

#### Functional Configuration of Communication Control System

[0138] The functional units of the communication control system **5** are described below in detail with reference to FIG. **13**. The communication control system **5** includes a communication unit **51**, a reception unit **52**, a generation unit **53**, an authentication unit **55**, and a storing/reading unit **59**. Each of the above-mentioned units is a function or a means that is implemented by operating any one or more of the components illustrated in FIG. **12** according to instructions from the CPU **501** executing a program for the communication control system **5** after the program is loaded from the SSD **504** to the RAM **503**.

[0139] The communication control system **5** further includes a storage unit **5000** that is implemented by the RAM **503** and the SSD **504** illustrated in FIG. **12**. The storage unit **5000** includes a user/device management database (DB) **5001**, a virtual room management DB **5002**, and a position information management DB **5003**.

#### User/Device Management DB

[0140] FIG. **14** is a schematic diagram of a user/device management table. The user/device management DB **5001** includes a user/device management table illustrated in FIG. **14**. In the user/device management table, data items of user ID (or device ID), password, name, user image, and internet protocol (IP) address are associated with each other and managed.

[0141] The user ID is an example of user identification information for identifying a user, such as the organizer X, the participant A, or the participant B. The device ID is an example of device identification information for identifying a device such as the imaging device **10**. When a head mounted display or a similar device is used in addition to the imaging device **10**, the head mounted display or the similar device is also regarded as a device.

[0142] The name is the name of the user or the device. A user name may be the name of the communication terminal used by the user.

[0143] The user image is, for example, an image obtained by schematically modeling the face of the user, an image of a photograph of the face of the user. The user image is preregistered by the user.

[0144] The IP address is an example of destination identifying information of the device such as the communication terminal **7**, communication terminal **9**, or the imaging device **10** used by the user.

#### Virtual Room Management DB

[0145] FIG. **15** is a schematic diagram of a virtual room management table. The virtual room management DB **5002** includes a virtual room management table illustrated in FIG. **15**. In the virtual room management table, data items of virtual room ID, virtual room name, device ID, organizer ID, participant ID, content ID, and content uniform resource locator (URL) (storage location information of content data including image data and audio data) are associated with each other and managed.

[0146] The virtual room ID is an example of virtual room identification information for identifying a virtual room.

[0147] The virtual room name is the name of the virtual room and is assigned by, for example, the user.

[0148] The device ID is the same as the device ID in FIG. **14** and is the ID of a device that has joined the virtual room indicated by the virtual room ID in the same record.

[0149] The organizer ID is an example of organizer identification information for identifying the organizer ID among the user IDs in FIG. **14** and is an ID of the organizer who participates in the virtual room indicated by the virtual room ID in the same record.

[0150] The participant ID is an example of participant identification information for identifying a participant ID among the user IDs in FIG. **14** and is an ID of a participant who participates in a virtual room indicated by the virtual room ID in the same record.

[0151] The content ID is an example of content identification information for identifying content data including image data and sound data. The image in this case is a wide-field image obtained at the time of imaging, and the sound including voice is obtained at the same time of imaging.

[0152] The content URL is an example of content storage location information indicating a location where content (wide-field image, sound information) data is stored. The content URL is stored in association with the content data and the time of imaging (image recording) and sound capturing (sound recording). The time indicates the start and end date and time of the image capturing (recording) and the sound capturing (recording).

#### Position Information Management DB

[0153] FIG. **16** is a schematic diagram illustrating a position information management table. The position information management DB **5003** includes a position information management table illustrated in FIG. **16**. In the position information management table, data items of “imaging and sound capturing” date and time and device position are associated with each other and managed. When sound capturing is not performed, the date and time of imaging is stored. The device position indicates the position of the imaging device **10** or the communication terminal **7** or **9** at the time of imaging. The position of the imaging device **10** is measured by the positioning device **314** of the relay device **3** to which the imaging device **10** is attached. The positions of the communication terminals **7** and **9** are measured by the positioning devices **514** of the communication terminals **7** and **9**. A positioning unit similar to the positioning device **314** may be provided for the imaging device **10**, and the position of the imaging device **10** may be measured by this positioning unit.

[0154] The content ID illustrated in FIG. **16** is the same as the content ID illustrated in FIG. **15**.

[0155] The date and time of imaging and sound capturing indicates the date and time of imaging and sound capturing by the imaging device **10** or the communication terminal **7**.

[0156] The device position indicates the position (absolute position on the earth) of the imaging device **10** or the communication terminal **7** at the date and time of imaging and sound capturing.

### Functional Configuration of Communication Control System

[0157] The functional units of the communication control system **5** are described below in detail with reference to FIG. 13.

[0158] The communication unit **51** of the communication control system **5** is implemented by, for example, processing of the CPU **501** for the network I/F **506** illustrated in FIG. 12 and establishes data communication with other devices (the relay device **3**, the communication terminals **7** and **9**) via the communication network **100**.

[0159] The reception unit **52** is implemented by processing of the operation device **508** for the CPU **501** and receives an operation input from the user (for example, a system administrator).

[0160] The generation unit **53** is implemented by, for example, processing of the CPU **501** and generates, using data stored in the storage unit **5000**, a screen to be transmitted to each of the communication terminals **7** and **9**.

[0161] The authentication unit **55** authenticates, for example, whether the user has the authority to use the virtual room.

[0162] The storing/reading unit **59** is implemented by, for example, processing of the CPU **501** and stores various data (or information) in the storage unit **5000** or reads various data (or information) from the storage unit **5000**.

### Functional Configuration of Communication Terminal 7

[0163] The functional configuration of the communication terminal **7** is described below in detail with reference to FIG. 13. The communication terminal **7** includes a communication unit **71**, a reception unit **72**, a display control unit **74**, a sound input/output control unit **75**, a generation unit **76**, a connection unit **78**, and a storing/reading unit **79**. Each of the above-mentioned units is a function or a means that is implemented by operating any one or more of the components illustrated in FIG. 12 according to instructions from the CPU **501** executing a program for the communication terminal **7** after the program is loaded from the SSD **504** to the RAM **503**.

[0164] The communication unit **71** of the communication terminal **7** is implemented by, for example, processing of the CPU **501** for the network I/F **506** illustrated in FIG. 12 and establishes data communication with other devices (the communication control system **5**) via the communication network **100**.

[0165] The reception unit **72** is implemented by, for example, processing of the operation device **508** for the CPU **501** and receives an operation input from the user, such as the organizer **X**. The reception unit **72** is an example of an acquisition unit and acquires the viewpoint information (field-of-view information) for specifying a predetermined area when an operation for displaying the predetermined area in the wide-field image is received from the user.

[0166] The display control unit **74** is implemented by, for example, processing of the CPU **501** and causes the display **507** of the communication terminal **7** or an external display connected to the external device connection I/F **505** to display various images.

[0167] The sound input/output control unit **75** is implemented by, for example, processing of the CPU **501** of the communication terminal **7** and causes an external micro-

phone connected to the external device connection I/F **505** to capture sound. When a microphone is built into the communication terminal **7**, the sound input/output control unit **75** causes the built-in microphone to capture sound. The sound input/output control unit **75** further causes the speaker **512** of the communication terminal **7** or an external speaker connected to the external device connection I/F **505** to output sound.

[0168] The generation unit **76** is implemented by, for example, processing of the CPU **501** and adds, for example, narration and on-screen text to content data obtained by image recording and sound recording by the communication terminal **7** to generate content data for educational materials and similar purposes.

[0169] The storing/reading unit **79** is implemented by, for example, processing of the CPU **501** and stores various data (or information) in the storage unit **7000** or reads various data (or information) from the storage unit **7000**.

### Functional Configuration of Communication Terminal 9

[0170] The functional configuration of the communication terminal **9** is described below in detail with reference to FIG. 13.

[0171] The communication terminal **9** includes a communication unit **91**, a reception unit **92**, a display control unit **94**, a sound input/output control unit **95**, a connection unit **98**, and a storing/reading unit **99**. Each of the above-mentioned units is a function or a means that is implemented by operating any one or more of the components illustrated in FIG. 12 according to instructions from the CPU **501** executing a program for the communication terminal **9** after the program is loaded from the SSD **504** to the RAM **503**.

[0172] The communication terminal **9** further includes a storage unit **9000** that is implemented by the RAM **503** and the SSD **504** illustrated in FIG. 12.

[0173] The communication unit **91** of the communication terminal **9** is implemented by, for example, processing of the CPU **501** for the network I/F **506** and establishes data communication with other devices (the communication control system **5**) via the communication network **100**.

[0174] The reception unit **92** is implemented by, for example, processing of the operation device **508** for the CPU **501** and receives an operation input from the user, such as a participant. The reception unit **92** is an example of an acquisition unit and acquires the viewpoint information (field-of-view information) for specifying a predetermined area when an operation for displaying the predetermined area in the wide-field image is received from the user.

[0175] The display control unit **94** is implemented by, for example, processing of the CPU **501** and causes the display **507** of the communication terminal **9** or an external display connected to the external device connection I/F **505** to display various images.

[0176] The sound input/output control unit **95** is implemented by, for example, processing of the CPU **501** of the communication terminal **9** and causes an external microphone connected to the external device connection I/F **505** to capture sound. When a microphone is built into the communication terminal **7**, the sound input/output control unit **75** causes the built-in microphone to capture sound. The sound input/output control unit **95** further causes the speaker

**512** of the communication terminal **9** or an external speaker connected to the external device connection I/F **505** to output sound.

[0177] The connection unit **98** is implemented by, for example, processing of the CPU **501** for the external device connection I/F **505** and establishes data communication with an external device connected by wire or wirelessly.

[0178] The storing/reading unit **99** is implemented by, for example, processing of the CPU **501** and stores various data (or information) in the storage unit **9000** or reads various data (or information) from the storage unit **9000**.

#### Processes/Operations

[0179] Processes or operations according to the present embodiment are described below with reference to FIG. 17 to FIG. 36. The processes described below processes after the imaging device **10** and the communication terminals **7** and **9** have already participated in the same virtual room.

#### Process for Transmitting Content Data in Communication System

[0180] A process for transmitting content data in the communication system **1** is described with reference to FIG. 17. FIG. 17 is a sequence diagram illustrating transmitting a wide-field image and field of view information in the communication system **1**. In the following description of the process, the imaging device **10**, the communication terminal **7** used by the organizer X, the communication terminal **9a** used by the participant A, and the communication terminal **9b** used by the participant B are in the same virtual room. The storing/reading unit **79** adds one record corresponding to the virtual room that is set up to the virtual room management DB **5002** (see FIG. 15), and the virtual room ID, the virtual room name, the device ID, the organizer ID, and the participant ID are managed in association with each other as the record. The content ID, the content URL, and the field-of-view information URL are stored later. The processing of Steps Step S11 to Step S15 of FIG. 17 is repeatedly performed, for example, about 30 times or 60 times per second.

[0181] Step S11: The imaging device **10** acquires content (wide-field image and sound information) data by performing sphere imaging at (within) the site Sa and capturing sound by the imaging unit **16**, and then, transmits the content data to the relay device **3** by the connection unit **18**. In this case, the connection unit **18** also transmits the virtual room ID for identifying the virtual room in which the imaging device **10** participates and the device ID for identifying the imaging device **10**. Accordingly, the relay device **3** acquires the content data, the virtual room ID, and the device ID by the connection unit **38**.

[0182] Step S12: The relay device **3** transmits to the communication control system **5** via the communication network **100** the content data, the virtual room ID, and the device ID received by the connection unit **38** in Step S11, by the communication unit **31**. Accordingly, the communication control system **5** receives the content data, the virtual room, and the device ID by the communication unit **51**.

[0183] The imaging device **10** may transmit the content data, the virtual room ID, and the device ID to the communication terminal **7** without transmitting to the relay device **3** (Step S11d). In this case, the communication terminal **7**

transmits the content data, the virtual room ID, and the device ID to the communication control system **5** (Step S12d).

[0184] Step S13: The communication control system **5** searches the virtual room management DB **5002** based on the virtual room ID received in Step S12 to read the user IDs (the organizer ID and the participant IDs) of the users who participate in the same virtual room as the imaging device **10**, by the storing/reading unit **59**. The storing/reading unit **59** also searches the user/device management DB **5001** based on the read organizer ID and participant IDs to read the corresponding user images of the organizer X and the participants A and B and the corresponding IP addresses of the communication terminal **7**, the communication terminal **9a**, and the communication terminal **9b**. The communication unit **51** refers to the IP address of the communication terminal **7** and transmits the content data received in Step S12 to the communication terminal **7**. Accordingly, the communication terminal **7** receives the content data by the communication unit **71**. At this time, the communication unit **51** may transmit the user images and the user IDs of the users participating in the same virtual room in association with each other to the communication terminal **7**.

[0185] Step S14: The communication control system **5** refers to the IP address of the communication terminals **9a** and transmits the content data received in Step S12 to the communication terminal **9a**, by the communication unit **51**. Accordingly, the communication terminal **9a** receives the content data by the communication unit **91**. At this time, the communication unit **51** may transmit the user images and the user IDs of the users participating in the same virtual room in association with each other to the communication terminal **9a**.

[0186] Step S15: The communication control system **5** refers to the IP address of the communication terminals **9b** and transmits the content data received in Step S12 to the communication terminal **9b**, by the communication unit **51**. Accordingly, the communication terminal **9b** receives the content data by the communication unit **91**. At this time, the communication unit **51** may transmit the user images and the user IDs of the users participating in the same virtual room in association with each other to the communication terminal **9b**.

[0187] Through the above-described process, for example, in the communication terminal **9a**, the display control unit **94** displays a predetermined-area image (see FIG. 6B) indicating a predetermined area (see FIG. 6A) in the wide-field image received in the processing of Step S14, and the sound input/output control unit **95** outputs sound based on the sound information received in the processing Step S14. Further, when the reception unit **92** receives an operation performed by the participant A on the screen for changing the predetermined area T (see FIG. 6A) to the predetermined area T' (see FIG. 6C) including, for example, an object in which the participant A is interested, the display control unit **94** displays the predetermined-area image (see FIG. 6D) corresponding to the predetermined area T'.

#### Process for Starting Image Recording and Sound Recording in Communication System

[0188] A process for starting image recording and audio recording in the communication system **1** is described below with reference to FIG. 18. FIG. 18 is a sequence diagram

illustrating a process for starting image recording and sound recording in the communication system 1.

[0189] Step S31: The communication terminal 7 receives an operation to start image recording and sound recording from the organizer X by the reception unit 72.

[0190] Step S32: Before starting image recording and sound recording, the communication terminal 7 transmits an instruction to share field-of-view information (sharing instruction) to the communication control system 5 by the communication unit 71. The sharing instruction includes the virtual room ID of the virtual room in which the communication terminal 7 participates and the device ID of the imaging device 10.

[0191] Accordingly, the communication control system 5 receives the sharing instruction to share the field-of-view information by the communication unit 51.

[0192] Step S33: The communication control system 5 sets the content URL and the field-of-view information URL in the virtual room management DB 5002 (see FIG. 15) by the storing/reading unit 59. Then, the communication unit 51 transmits an instruction to start recording and a request to upload field-of-view information to the communication terminal 7. The instruction includes information indicating a content URL indicating a location where the communication terminal 7 stores the content data after recording. The request includes information indicating a field-of-view information URL for retaining the field-of-view information. Accordingly, the communication terminal 7 receives the instruction to start recording and the request to upload field-of-view information by the communication unit 71.

[0193] Step S34: The communication unit 51 transmits a request to upload field-of-view information to the communication terminal 9a. The request includes information on a URL for retaining field-of-view information. Accordingly, the communication terminal 9a receives the request to upload field-of-view information by the communication unit 91.

[0194] Step S35: Similarly, the communication unit 51 transmits a request to upload field-of-view information to the communication terminal 9b. The request includes information on a URL for retaining field-of-view information. Accordingly, the communication terminal 9b receives the request to upload field-of-view information by the communication unit 91.

[0195] Step S36: Subsequently, the communication terminal 7 starts recording of the content data received in Step S13 of FIG. 17, by the storing/reading unit 79 that is an example of a recording unit for image recording and sound recording. In the case of Step S12d of FIG. 17, the communication terminal 7 may start image recording and sound recording of the content data received from the imaging device 10 in Step S11d, instead of the content data received from the communication control system 5 in Step S13.

[0196] Step S37: When receiving, by the reception unit 72, an operation for changing a field of view by the organizer X, while displaying, for example, the predetermined-area image (see FIG. 6B) corresponding to the predetermined area (see FIG. 6A) of the wide-field image received in Step S13, the communication terminal 7 displays, by the display control unit 74, the predetermined-area image (see FIG. 6D) corresponding to the predetermined area (see FIG. 6C) that is changed from the previous predetermined area (see FIG. 6A) in the same wide-field image. In this case, the reception unit 72 is an example of an acquisition unit and acquires the

field-of-view information (pan, tilt, fov) for specifying the predetermined area to be displayed on the display 507 in the wide-field image when an operation for displaying the predetermined area in the wide-field image is received from the user, such as the organizer X. Then, the communication unit 71 transmits the field-of-view information for specifying the changed predetermined area to the image information URL (communication control system 5) received in Step S33. The field-of-view information includes the user ID of the organizer X who uses the communication terminal 7 that is the transmission source. Accordingly, the communication control system 5 receives the field-of-view information by the communication unit 51. Then, the storing/reading unit 79 stores the user ID, the IP address of the transmission source, the field-of-view information, and the timestamp in a field-of-view information management DB. The timestamp indicates the time at which the field-of-view information is received in Step S37.

[0197] Step S38: Processing that is substantially the same as the processing of Step S37 is also performed between the communication terminal 9a and the communication control system 5 independently of the processing of Step S37. The user ID transmitted in this case is the user ID of the participant A.

[0198] Step S39: Processing that is substantially the same as the processing of Step S37 or the processing of Step S38 is also performed between the communication terminal 9b and the communication control system 5 independently of the processing of Step S37 and the processing of Step S38. The user ID transmitted in this case is the user ID of the participant B.

[0199] The processing of Step S37 to Step S39 may be collectively executed on the communication control system 5 at the end of the recording.

#### Process for Stopping Image Recording and Sound Recording in Communication System

[0200] A process for stopping image recording and sound recording in the communication system 1 is described below with reference to FIG. 19. FIG. 19 is a sequence diagram illustrating a process for stopping image recording and sound recording in the communication system 1.

[0201] Step S51: The communication terminal 7 receives an operation for stopping image recording and sound recording from the organizer X by the reception unit 72.

[0202] Step S52: The storing/reading unit 79 stops image recording and sound recording.

[0203] Step S53: The communication unit 71 uploads (transmits) the recorded content to a predetermined content URL (communication control system 5) received in Step S33.

[0204] The content data includes a time (timestamp) from the start to the end of the recording. Accordingly, the communication control system 5 receives the content data by the communication unit 51.

[0205] Step S54: The communication control system 5 stores the content data along with the timestamp in the predetermined content URL by the storing/reading unit 59. Further, the storing/reading unit 59 converts the timestamps managed in the position information management DB 5003 (see FIG. 16) into a total playback time corresponding to the total recording time of the content data of which the recording is stopped.

[0206] Step S55: The communication unit 51 transmits a notification of the end of the image recording and sound recording (end notification) to the communication terminal 7. The end notification includes information indicating a predetermined content URL. Accordingly, the communication terminal 7 receives the notification of the end of the image recording and sound recording by the communication unit 71.

[0207] Step S56: Similarly, the communication unit 51 transmits a notification of the end of the image recording and sound recording (end notification) to the communication terminal 9a. The end notification includes information indicating a predetermined content URL. Accordingly, the communication terminal 9a receives the notification of the end of the image recording and sound recording by the communication unit 91.

[0208] Step S57: Similarly, the communication unit 51 transmits a notification of the end of the image recording and sound recording (end notification) to the communication terminal 9b. The end notification includes information indicating a predetermined content URL. Accordingly, the communication terminal 9b receives the notification of the end of the image recording and sound recording by the communication unit 91.

[0209] In the case of the processing of Step S55, the end notification may not include a predetermined content URL.

#### Process for Playback of Recorded Image and Recorded Sound in Communication System

[0210] A process for playback of a recorded image and recorded sound in the communication system 1 is described below with reference to FIGS. 20 to 26. FIG. 20 is a sequence diagram illustrating a process for playback of a recorded image and recorded sound in the communication system 1. FIG. 21 is a diagram illustrating a recorded data selection screen. In this example, the participant A uses the communication terminal 9a to play recorded content.

[0211] Step S71: When receiving a login operation of inputting, for example, a login ID and a password from the user A by the reception unit 92, the communication terminal 9a transmits a login request to the communication control system 5 by the communication unit 91. The request includes the user ID and password of the user A. The communication control system 5 receives, by the communication unit 51, the login request and performs authentication, by the authentication unit 55, by referring to the user/device management DB 5001 (see FIG. 14). The following description is given on the assumption that the user A is determined to be a valid accessor by the login authentication.

[0212] Step S72: The communication control system 5 generates a recorded data selection screen 940 as illustrated in FIG. 21, the generation unit 53. In this case, the storing/reading unit 59 searches the virtual room management DB 5002 (see FIG. 15) using the user ID received in Step S71 as a search key and reads all the corresponding virtual room IDs, virtual room names, and content URLs. Then, the generation unit 53 generates thumbnails 941, 942, and 943 using an image of the corresponding content data (with a timestamp) stored in the content URL. Thus, the generation unit 53 adds a virtual room name, such as a “construction site α,” and a recording time, such as “2022 Oct. 31 15:00” indicating a predetermined time (for example, a recording start time) of a timestamp for each thumbnail.

[0213] Step S73: The communication unit 51 transmits the selection screen generated in Step S72 to the communication terminal 9a. The selection screen data includes content IDs each of which identifies a wide-field image used as the source for a corresponding thumbnail. The communication terminal 9a receives the selection screen data by the communication unit 91.

[0214] Step S74: The communication terminal 9a displays the recorded data selection screen 940 as illustrated in FIG. 21 on the display 507 of the communication terminal 9a by the display control unit 94. Then, the reception unit 92 receives an operation for specifying (selection of) a predetermined thumbnail from the participant A. The following description is given on the assumption that the thumbnail 941 is specified (selected).

[0215] Step S75: The communication unit 71 transmits a request to download the content data used as the source for the selected thumbnail 941 to the communication control system 5. This request includes the content ID associated with the thumbnail 941. Accordingly, the communication control system 5 receives the request to download the content data by the communication unit 51.

[0216] Step S76: The communication control system 5 searches the virtual room management DB 5002 (see FIG. 15) using the content ID received in Step S75 as a search key by the storing/reading unit 59. The content data also includes a map, which is described later. The storing/reading unit 59 searches the position information management DB 5003 (see FIG. 16) using the content ID received in the processing of Step S75 as a search key and reads the corresponding information on the imaging date and time, the sound capturing date and time, and the imaging device position. Further, the storing/reading unit 59 searches the virtual room management DB 5002 (see FIG. 15) using the content ID received in the processing of Step S75 as a search key and reads the corresponding device ID or user ID. Then, the storing/reading unit 59 searches the user/device management DB 5001 (see FIG. 14) using the read device ID or user ID as a search key and reads the corresponding name. The name is the name of the imaging device 10, which is an imaging device, or the name of the operator who operated the communication terminal 7 to perform imaging.

[0217] The communication unit 51 transmits the requested content data, the date and time of imaging and sound capturing, the imaging device position, and the name of the imaging device (or the name of the operator of the imaging device) to the communication terminal 9a. Accordingly, the communication unit 91 of the communication terminal 9a receives the content data, the date and time of imaging and sound capturing, the imaging device position, and the name of the imaging device (or the name of the operator of the imaging device).

[0218] Step S77: The communication terminal 9a performs a playback process. That is, the communication terminal 9a displays a screen including a recorded image on the display 507 of the communication terminal 9a by the display control unit 94 and outputs sound by the sound input/output control unit 95.

#### Details of Playback Process

[0219] A process for displaying a screen including an image in the playback process of Step S77 is described below with reference to FIGS. 22 to 36. FIG. 22 is a flowchart of a playback process performed by the commu-

nication terminal 9a. FIGS. 23 to 36 illustrates examples of display screens of the communication terminal 9a.

#### First Display Examples

[0220] First display examples are described with reference to FIGS. 22 to 28. FIG. 22 is a flowchart of a playback process. FIGS. 23 and 24 are diagrams each illustrating a first display example on the communication terminal 9a and illustrating a moving image (video) selection screen. FIGS. 25 to 28 are diagrams each illustrating a first display example on the communication terminal 9a and illustrating a map/moving image playback screen.

[0221] Step S111: The reception unit 72 receives an operation performed by the participant A for displaying a moving image selection screen. In response to the operation performed by the participant A, the display control unit 94 displays a moving image selection screen 600 illustrated in FIG. 23 on the display 507 of the communication terminal 9a. As illustrated in FIG. 23, the moving image selection screen 600 displays a “moving image selection” menu 601 for selecting a moving image, a map 607, and a close button 609 for closing the moving image selection screen 600. The moving image selection screen 600 displays the map 607 corresponding to the recorded data selected on the recorded data selection screen 940 illustrated in FIG. 21.

[0222] Step S112: When the participant A presses the “moving image selection” menu 601 with a cursor c1, the display control unit 94 displays a pull-down menu 610 for selecting a moving image as illustrated in FIG. 24. The pull-down menu 610 includes an imaging date (for example, 2023 Nov. 11), an imaging start time (for example, 13:55:34), and an imaging end time (for example, 14:10:00) for each “device” that has performed imaging to obtain a moving image or “imaging operator” who has operated a device to obtain a moving image. The pull-down menu 610 also includes a check boxes 611, 612, 613, and 614 for receiving the selection for a corresponding device, which has performed imaging to obtain a moving image or imaging operator who operated a device to obtain a moving image. The pull-down menu 610 includes an “OK” button 619 to be pressed to confirm the selection. When the participant A selects a predetermined check box (for example, the check box 611), and presses the “OK” button 619, the reception unit 92 receives the selection of the corresponding moving image (2023, Nov. 11 13:55:34 to 14:10:00) previously obtained by a predetermined imaging device (imaging device  $\alpha$ ).

[0223] Step S113: The display control unit 94 displays a map/moving image playback screen 650 including a past movement path (also may be referred to as a “trajectory” or referred to simply as a “movement path”) 701 as illustrated in FIG. 25, based on the imaging device position (position information) during imaging, acquired by the processing of Step S76. FIG. 25 is a diagram illustrating a first display example on the communication terminal 9a and illustrating a map/moving image playback screen. The map/moving image playback screen 650 displays the “moving image selection” menu 601 and a close button 659 for closing the map/moving image playback screen 650. The map/moving image playback screen 650 includes a map display area 700 and a moving image display area 710. In the map display area 700, a past movement path 701 along which the predetermined imaging device selected in the processing of Step S112 moved during imaging is displayed. At the start

of the movement path 701 and at the goal (end) of the movement path 701, “S” and “G” are displayed, respectively. The movement path 701 also includes a plurality of arrows indicating the movement directions in the past. The name of the selected imaging device (in the example, the imaging device  $\alpha$ ) and a seek bar (also may be referred to as a “playback bar”) 651 are also displayed below the map display area 700, and a slider s1 is displayed in the seek bar 651. The seek bar 651 indicates the total playback time of the moving image to be played in the moving image display area 710. The slider s1 in the seek bar 651 indicates the elapsed playback time of the moving image played in the moving image display area 710. When the position of the slider s1 is changed in the seek bar 651, the elapsed playback time of the moving image being played in the moving image display area 710 is also changed in accordance with the position of the slider s1.

[0224] A mark m1 is displayed inside the moving image display area 710. The mark m1 indicates that the predetermined-area image displayed in the moving image display area 710 is changeable by the user (in the example, the participant A) (see FIGS. 6B to 6D) by changing the predetermined area (see FIGS. 6A to 6C) in the wide-field image.

[0225] Further, the same name as the name of the selected imaging device (imaging device  $\alpha$ ) is displayed above the moving image display area 710. A play button 655 for starting the playback of the moving image in the moving image display area 710 and a pause button 656 for temporarily stopping the playback of the moving image are displayed below the moving image display area 710.

[0226] In FIG. 25, the seek bar 651 indicates the initial state of the playback of the moving image (the elapsed playback time is 0 second).

[0227] Step S114: When the participant A presses the play button 655 illustrated in FIG. 25 with the cursor c1, the reception unit 92 of the communication terminal 9a receives the start of the playback of the moving image, and the display control unit 94 displays the moving image obtained through imaging performed by the imaging device (in the example, the imaging device  $\alpha$ ) in the moving image display area 710. Then, as illustrated in FIG. 26, the display control unit 94 displays a thumbnail t1 related to the moving image on the movement path 701 in the map display area 700 synchronized with (in accordance with) the elapsed playback time of the moving image. The display control unit 94 may display a user image illustrated in FIG. 14 instead of the thumbnail t1 related to the moving image. In this case, the communication terminal 9a also receives the user image in the processing of Step S76 illustrated in FIG. 20. The display control unit 94 also changes the position (length) of the slider s1 in accordance with the elapsed playback time of the moving image.

[0228] As a result, the participant A can grasp the moving image obtained by the imaging device, a position at which the moving image was obtained through imaging performed by the imaging device on the movement path, and an elapsed playback position in the seek bar 651 in association with each other.

[0229] Step S115: In FIG. 27, when the participant A moves the cursor from the position of a cursor c1' to the position of the cursor c1 in the moving image display area 710, the reception unit 92 receives the change (movement) of the virtual viewpoint (see FIG. 6C). Thus, the display

control unit **94** can change the predetermined-area image in the moving image display area **710** by moving the virtual viewpoint in accordance with the movement of the cursor **c1** (see FIG. 6D).

[0230] Step **S116**: When the moving image is played continuously, the display control unit **94** displays the moving image at a predetermined elapsed playback time in the moving image display area **710** as illustrated in FIG. 28. The display control unit **94** displays, in the map display area **700**, the thumbnail **t1** that moves in accordance with the position of the imaging device at the predetermined elapsed playback time. In this case, the content of the thumbnail **t1** has been changed to be related to a part in the moving image currently displayed. Further, the display control unit **94** moves (changes) the slider **s1** to a position at the predetermined elapsed playback time in the seek bar **651**.

[0231] As described above, the display control unit **94** can display the thumbnail **t1** indicating the position of a predetermined imaging device at a predetermined elapsed playback time on the movement path **701** along which the predetermined imaging device moved during imaging, the seek bar **651** visually representing the predetermined elapsed playback time, and the moving image at the predetermined elapsed playback time, in conjunction with (in synchronization with) each other. Thus, when an image obtained by imaging (recording) while the imaging device was moving is played, a user such as the participant A can recognize at which position on the past movement path of the imaging device the image being played was obtained.

#### Second Display Examples

[0232] Second display examples are described below with reference to FIGS. 29 to 31. FIGS. 29 to 31 are diagrams each illustrating a second display example on the communication terminal **9a** and illustrating a map/moving image playback screen.

[0233] In FIG. 25 (processing of Step **S113**), when the participant A moves the cursor **c1** to a predetermined position of interest in the map display area **700** and clicks (specifies) a position as illustrated in FIG. 29, the reception unit **92** receives the specification of the predetermined position in the map display area **700**. In response to the reception unit **92** receiving the specification, the display control unit **94** displays some portions of the seek bar **651** in white and the other portions of the seek bar **651** in black as illustrated in FIG. 30. The white portion of the seek bar **651** corresponds to a predetermined part of the movement path **701** within a predetermined range defined reference to a predetermined position in the movement path **701**. The black portion of the seek bar **651** corresponds to the other part of the movement path **701**. The “predetermined range defined with reference to the predetermined position” is, for example, within an area of a circle having a radius of 3 m with the predetermined position as the center, or within an area of a square having one side of 5 m with the predetermined position as the center. White indicates a range in which the slider **s1** is movable in the seek bar **651**, and black indicates a range in which the slider **s1** is not movable in the seek bar **651**. Using different colors is an example of changing the display form. An example of changing the display form includes not only using different colors, but also using different shapes, patterns, or lighting timings.

[0234] When the playback of the moving image is started, in the processing of Step **S116**, the display control unit **94**

moves the slider **s1** within the range in which the slider **s1** is movable, and displays the moving image display area **710** and the map display area **700** in conjunction with (in synchronization with) the movement of the slider **s1**, as illustrated in FIG. 31. In FIG. 31, the portion of the seek bar **651** where the slider **s1** has moved is displayed in gray.

[0235] As described above, when the participant A specifies a predetermined position on the map, the display control unit **94** can display the seek bar **651** to indicate that a part of moving image that is filtered or selected because the part includes the specified predetermined position and the vicinity is playable (displayable) and the other part of the moving image is not playable (displayable). This allows the participant A to view the selected part (filtered part) of the moving image including the position and the vicinity of the position to which the participant A pays attention. As a result, the participant A can efficiently search for the part of the moving image including a location, such as a damaged portion, where the participant A pays attention and view the part of the moving image.

#### Third Display Examples

[0236] Third display examples are described below with reference to FIGS. 32 and 33. FIG. 32 is a diagram illustrating a third display example on the communication terminal **9a** and illustrating a moving image selection screen. FIG. 33 is a diagram illustrating another third display example on the communication terminal **9a**, and illustrating a map/moving image playback screen.

[0237] In FIG. 24 (processing of Step **S112**), when the participant A selects the check box **612** in addition to the check box **611** in the pull-down menu **610** and presses the “OK” button **619** as illustrated in FIG. 32, the reception unit **92** receives selection of a predetermined moving image (2023 Nov. 11 13:55:40-14:10:00) obtained through imaging by a predetermined operator (organizer X). As illustrated in FIG. 32, the check box **612** for a moving image whose recording time overlaps the recording time (from the start of recording to the end of recording) of the already selected moving image is selectable, and the check boxes **613** and **614** for moving images whose recording times do not overlap the recording time of the already selected moving image are not selectable.

[0238] Accordingly, the display control unit **94** displays the map display area **700** and moving image display areas **710s** and **720s** on the map/moving image playback screen **650** as illustrated in FIG. 33. The moving image display area **710s** is an area obtained by reducing the moving image display area **710** illustrated in FIG. 25, and displays a moving image captured by the imaging device  $\alpha$  (an example of a first imaging device). The moving image display area **720s** is an area having the same size as the moving image display area **710s**, and displays a moving image captured by the communication terminal **7** (an example of a second imaging device) operated by the organizer X. However, unlike the imaging device **10**, the communication terminal **7** does not obtain a wide-field image by imaging, and thus the virtual viewpoint is not adjustable. Accordingly, the mark **m1** is not displayed in the moving image display area **720s**. The moving image display areas **710s** and **720s** can be played (displayed) simultaneously and synchronized with each other by pressing the play button **655**. Similarly, the moving image display areas **710s**

and 720s can be paused simultaneously and synchronized with each other by pressing the pause button 656.

[0239] Further, in the map display area 700, the movement path 701 (indicated by a solid line; an example of a first movement path) along which the imaging device a selected in FIG. 32 moved during imaging (recording) is displayed, and a movement path 702 (indicated by a broken line; an example of a second movement path) along which the communication terminal 7 of the organizer X selected in FIG. 32 moved during imaging (recording) is displayed. The thumbnail t1 related to the moving image (an example of a first moving image) displayed in the moving image display area 710s is displayed on the movement path 701, and a thumbnail t2 related to a moving image (an example of a second moving image) displayed in the moving image display area 720s is displayed on the movement path 702. In this case as well, the user image illustrated in FIG. 14 may be displayed instead of the thumbnail t2 related to the moving image.

[0240] Further, the names of the selected imaging device (in the example, the imaging device  $\alpha$ ) and the seek bar 651 are displayed below the map display area 700, and the slider s1 is displayed in the seek bar 651. Similarly, the name of the selected operator (in the example, the organizer X) and a seek bar 651 are displayed below the map display area 700, and a slider s2 is displayed in the seek bar 652. The seek bar 652 and the slider s2 have the same display forms and functions as the seek bar 651 and the slider s1, respectively. That is, the seek bar 652 indicates the total playback time of the moving image to be played in the moving image display area 720s. The slider s2 in the seek bar 652 indicates the elapsed playback time of the moving image played in the moving image display area 720s. When the position of the slider s2 is changed in the seek bar 652, the elapsed playback time of the moving image being played in the moving image display area 720s is also changed in accordance with the position of the slider s2.

[0241] The number of moving image display areas may be three or more. When the number of moving image display areas is three or more, three or more corresponding movement paths and thumbnails are displayed in the map display area 700, and three or more corresponding seek bars are also displayed.

[0242] As described above, the display control unit 94 displays the plurality of movement paths 701 and 702, the plurality of thumbnails t1 and t2, the plurality of seek bars 651 and 652, and the plurality of moving image display areas 710s and 720s simultaneously in a synchronized manner, and thus a user such as the participant A can view the moving images while comparing the moving images. This can reduce oversight for a problematic location such as a damaged portion in the moving image.

#### Fourth Display Examples

[0243] Fourth display examples are described below with reference to FIGS. 34 to 36. FIG. 34 is a diagram illustrating a fourth display example on the communication terminal 9a and illustrating a moving image selection screen. FIGS. 35 and 36 are diagrams each illustrating a fourth display example on the communication terminal 9a and illustrating a map/moving image playback screen.

[0244] On a moving image selection screen 800 illustrated in FIG. 34, an “object selection” menu 602 is further added to the moving image selection screen 600 illustrated in FIG. 23.

[0245] When the participant A presses the “object selection” menu 602 with the cursor c1 in the processing of Step S112, the display control unit 94 displays a pull-down menu 620 for selecting an object to be displayed in the moving image (image) as illustrated in FIG. 34. The pull-down menu 620 displays the names of objects (object names) that is likely to be displayed (can be displayed) in the moving image. Further, check boxes 621, 622, 623, and 624 each for receiving the selection are displayed for the object names. The pull-down menu 620 displays an “OK” button 629 to be pressed to confirm the selection. The selectable object names may be automatically extracted by the communication control system 5 performing object recognition on the recorded moving image in advance, or may be extracted and manually set by a person who has viewed the recorded moving image. When the participant A selects the check box 621 and presses the “OK” button 629, the reception unit 92 receives the selection of a predetermined object (for example, BAR-RICADE).

[0246] Then, in the processing of Step S113, the display control unit 94 displays a part 701a of the movement path 701 in relation to which the predetermined object selected in the selected moving image is likely to be displayed, to be thicker than the other part, as illustrated in FIG. 35. Using different line thicknesses is an example of changing the display form. An example of changing the display form includes not only using different line thicknesses, but also using different line types (for example, a solid line and a broken line with the same thicknesses), colors, patterns, or lighting timings.

[0247] The reason why an object is “likely to be displayed (can be displayed)” is that even if the object is not displayed in the moving image display area 710, if the selected predetermined object is included in the wide-field image, the participant A can display the object in the moving image display area 710 by changing the virtual viewpoint as in the processing of Step S115.

[0248] In this case, the display control unit 94 includes an object recognition function. For the object recognition function, for example, a technique disclosed in the following Reference 1, 2, or 3 is used.

[0249] Reference 1: (<https://docs.ultralytics.com/>)

[0250] Reference 2: deepface (<https://github.com/serengil/deepface>)

[0251] Reference 3: PoseNet ([https://www.tensorflow.org/lite/examples/pose\\_estimation/overview?hl=ja](https://www.tensorflow.org/lite/examples/pose_estimation/overview?hl=ja))

[0252] In the example, the part 701a is displayed thicker than the other part of the movement path 701. In some embodiments, the shape or color of the part 701a may be changed.

[0253] Further, as illustrated in FIG. 35, the display control unit 94 displays the seek bar 651 corresponding to a predetermined path on which the selected object is likely to be displayed in the movement path 701 in white, and displays the other portions in black. White indicates a range in which the slider s1 is movable in the seek bar 651, and black indicates a range in which the slider s1 is not movable in the seek bar 651.

[0254] When the playback of the moving image is started, in the processing of Step S116, the display control unit 94



moves the slider **s1** within the range in which the slider **s1** is movable, and displays the moving image display area **710** and the map display area **700** in conjunction with the movement of the slider **s1**, as illustrated in FIG. **31**. In FIG. **36**, the portion of the seek bar **651** where the slider **s1** has moved is displayed in gray.

**[0255]** As described above, when the participant A specifies an object, the display control unit **94** can display the seek bar **651** to indicate that a part where the selected object is likely to be displayed in the moving image is playable (displayable) and the other part of the moving image is not playable (displayable). This allows the participant A to view a filtered part of the moving image that includes the object to which the participant A pays attention. As a result, the participant A can efficiently search for the part of the moving image including the object, such as a damaged portion, on which the participant A pays attention and can view the part of the moving image.

**[0256]** As described above, according to the present embodiment, when a moving image obtained through imaging performed by an imaging device while the imaging device was moving is played, a user such as the participant A can recognize at which position on the past movement path of the imaging device the moving image being played was obtained.

**[0257]** The above-described embodiments are illustrative and do not limit the present invention. Thus, numerous additional modifications and variations are possible in light of the above teachings. For example, elements and/or features of different illustrative embodiments may be combined with each other and/or substituted for each other within the scope of the present invention. Any one of the above-described operations may be performed in various other ways, for example, in an order different from the one described above.

**[0258]** The functionality of the elements disclosed herein may be implemented using circuitry or processing circuitry which includes general-purpose processors, special purpose processors, integrated circuits, application-specific integrated circuits (ASICs), field-programmable gate arrays (FPGAs), and/or combinations thereof which are configured or programmed, using one or more programs stored in one or more memories, to perform the disclosed functionality. Processors are considered processing circuitry or circuitry as they include transistors and other circuitry therein. In the disclosure, the circuitry, units, or means are hardware that carry out or are programmed to perform the recited functionality. The hardware may be any hardware disclosed herein which is programmed or configured to carry out the recited functionality.

**[0259]** There is a memory that stores a computer program which includes computer instructions. These computer instructions provide the logic and routines that enable the hardware (e.g., processing circuitry or circuitry) to perform the method disclosed herein. This computer program can be implemented in known formats as a computer-readable storage medium, a computer program product, a memory device, a recording medium such as a CD-ROM or DVD, and/or the memory of an FPGA or ASIC.

**[0260]** The above-described programs may be stored in a (non-transitory) recording medium such as a DVD-ROM to be distributed domestically or internationally as a program product.

**[0261]** The number of each of the CPU **111**, the CPU **301**, the CPU **501**, and the CPU **801** serving as a processor that is hardware may be a single or multiple.

**[0262]** For example, in a construction site, there is a case an imaging device performs imaging while moving (traveling) in the site. When a user plays and views a recorded image obtained through the imaging performed by the imaging device that was moving, there is a user need to grasp at which position on a movement path in the construction site the displayed image was obtained.

**[0263]** According to an aspect of the present disclosure, when a moving image previously obtained through recording performed by an imaging device while the imaging device was moving is played, a user can grasp at which position on a past movement path of the imaging device the moving image being played was obtained.

1. A display terminal, comprising circuitry configured to: display, on a display, a moving image previously obtained through imaging performed by an imaging device and a map indicating a position related to the imaging; and display, on the display, a movement path of the imaging device during the imaging on the map based on position information indicating positions of the imaging device during the imaging.
2. The display terminal of claim 1, wherein the circuitry is configured to display, on the display, a thumbnail related to the moving image, the thumbnail moving on the movement path according to an elapsed playback time of the moving image.
3. The display terminal of claim 2, wherein the circuitry is configured to display, on the display, a seek bar indicating the elapsed playback time.
4. The display terminal of claim 1, wherein the circuitry is further configured to: receive a setting of a predetermined position on the map; and display, on the display, a part of the moving image, the part of the moving image having been obtained by the imaging device moving within a predetermined range with reference to the predetermined position.
5. The display terminal of claim 4, wherein the circuitry is configured to display, on the display, a seek bar corresponding to a total playback time of the moving image, the seek bar including a first portion and a second portion, the first portion having a different display form from that of the second portion, the first portion corresponding to the part of the moving image, the second portion corresponding to another part of the moving image.
6. The display terminal of claim 1, wherein the imaging device includes a plurality of imaging devices including a first imaging device and a second imaging device, and the movement path includes a plurality of movement paths including a first movement path and a second movement path, the first movement path corresponding to movement of the first imaging device, the second movement path corresponding to movement of the second imaging device.
7. The display terminal of claim 6, wherein the circuitry is configured to: display, on the display, a first thumbnail related to a first moving image obtained by the first imaging device, the

first thumbnail moving on the first movement path according to an elapsed playback time of the first moving image; and

display, on the display, a second thumbnail related to a second moving image obtained by the second imaging device on the second movement path in synchronization with a playback of the first moving image, the second thumbnail moving on the second movement path according to an elapsed playback time of the second moving image.

**8.** The display terminal of claim **1**, wherein the circuitry is configured to:

receive selection of an object to be displayed in the moving image; and

display a part of the moving image, the part of the moving image including the object.

**9.** The display terminal of claim **8**, wherein the circuitry is configured to display, on the display, a first part of the movement path in a different manner from a second part of the movement path, the second part being a part other than the first part, the first part corresponding to the part of the moving image obtained by the imaging device moving on the movement path.

**10.** The display terminal of claim **1**, wherein the moving image is a predetermined-area image representing a predetermined area of a wide-field image.

**11.** A display method, comprising:

displaying, on a display, a moving image previously obtained through imaging performed by an imaging device and a map indicating a position related to the imaging; and

displaying, on the display, a movement path of the imaging device during the imaging on the map based on position information indicating positions of the imaging device during the imaging.

**12.** A non-transitory recording medium storing a plurality of instructions which, when executed by one or more processors, causes the one or more processors to perform a method, the method comprising:

displaying, on a display, a moving image previously obtained through imaging performed by an imaging device and a map indicating a position related to the imaging; and

displaying, on the display, a movement path of the imaging device during the imaging on the map based on position information indicating positions of the imaging device during the imaging.

\* \* \* \* \*