




US 20250275615A1

(19) **United States**(12) **Patent Application Publication**
Che(10) **Pub. No.: US 2025/0275615 A1**(43) **Pub. Date: Sep. 4, 2025**(54) **LUGGAGE ACCESSORY AND LUGGAGE
ASSEMBLY**(52) **U.S. Cl.**CPC *A45C 7/0018* (2013.01); *A45C 13/10*
(2013.01)(71) Applicant: **Quanzhou Zhengyu Digital
Technology Co., Ltd.**, Quanzhou (CN)

(57)

ABSTRACT(72) Inventor: **Yiwei Che**, Quanzhou (CN)(21) Appl. No.: **19/214,174**(22) Filed: **May 21, 2025**(30) **Foreign Application Priority Data**Sep. 4, 2024 (CN) 202422166507.6
May 8, 2025 (CN) 202510591207.9**Publication Classification**(51) **Int. Cl.***A45C 7/00* (2006.01)*A45C 13/10* (2006.01)

A luggage accessory and a luggage assembly are provided. The luggage accessory includes an expansion member and a first connection structure. The expansion member has a main body portion and at least one pocket portion that is connected to the main body portion and configured to accommodate articles. The at least one pocket portion includes a first pocket portion, the first pocket portion has a first use state and a second use state, in the first use state, the first pocket portion has a first opening located on a first side of the expansion member and in the second use state, the first pocket portion extends from the first side of the expansion member to form a second opening on a second side of the expansion member.

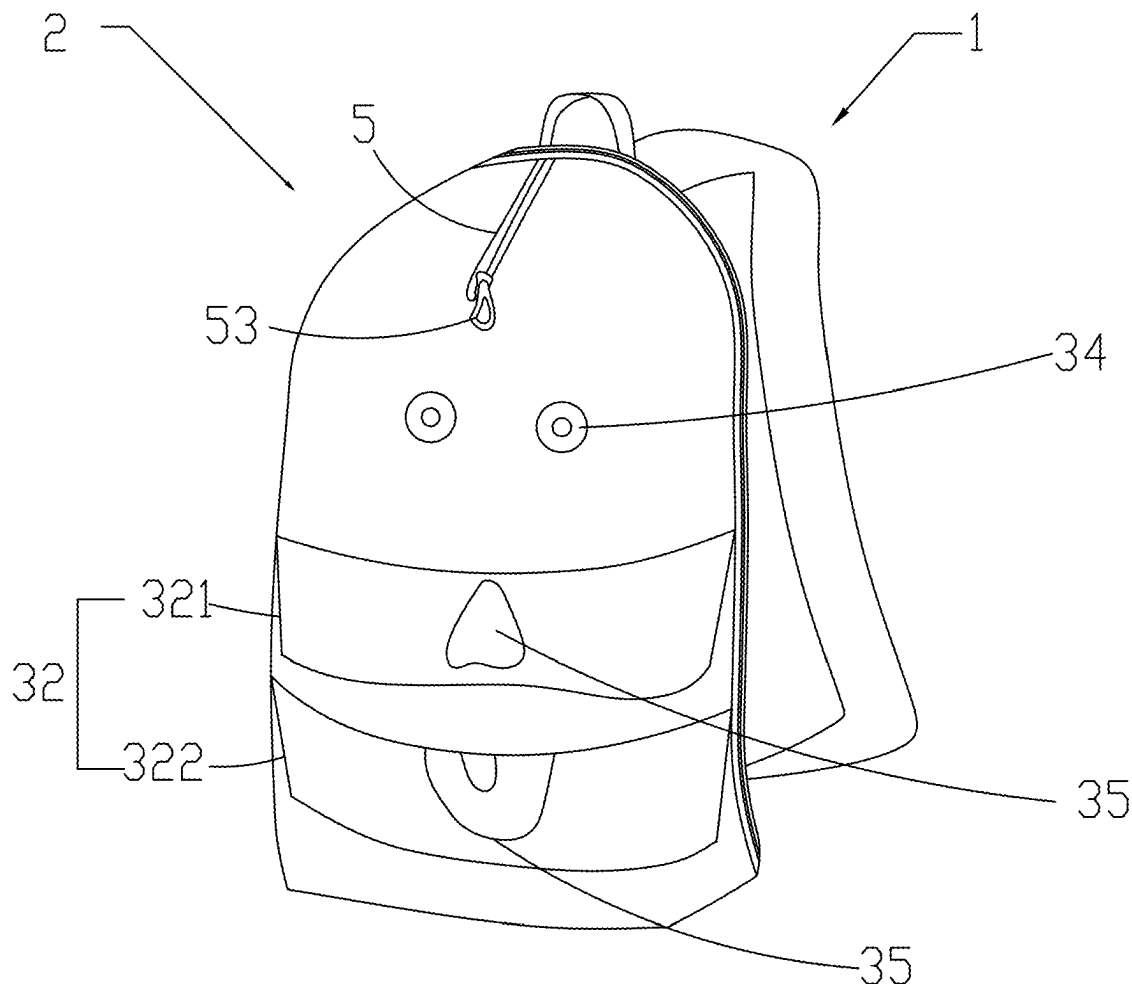100

100

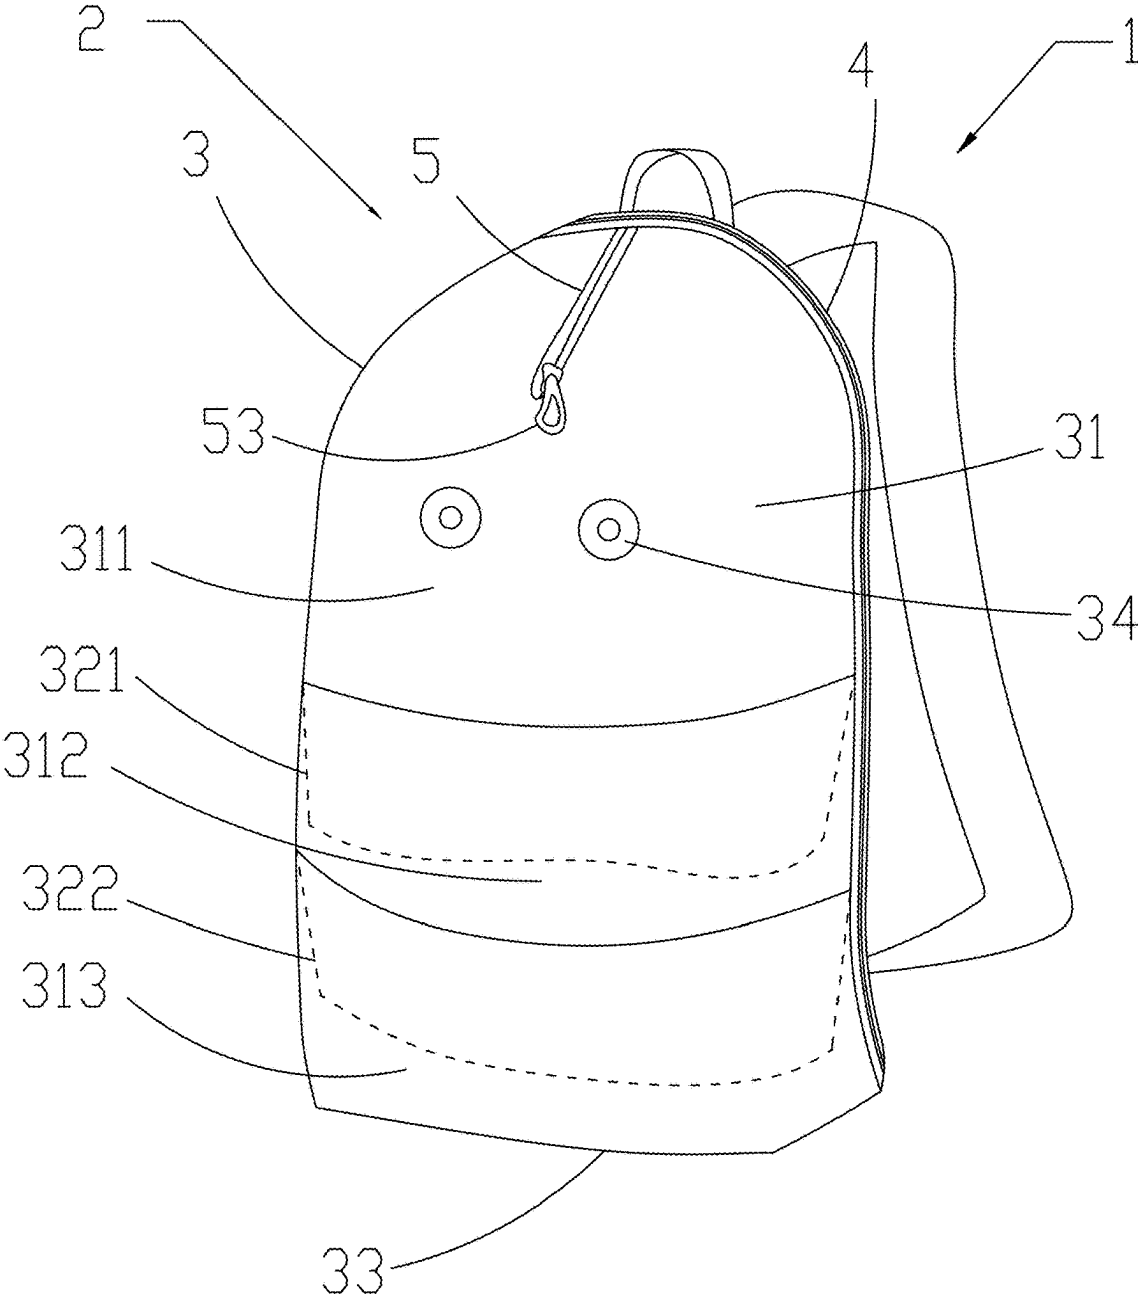


FIG. 1

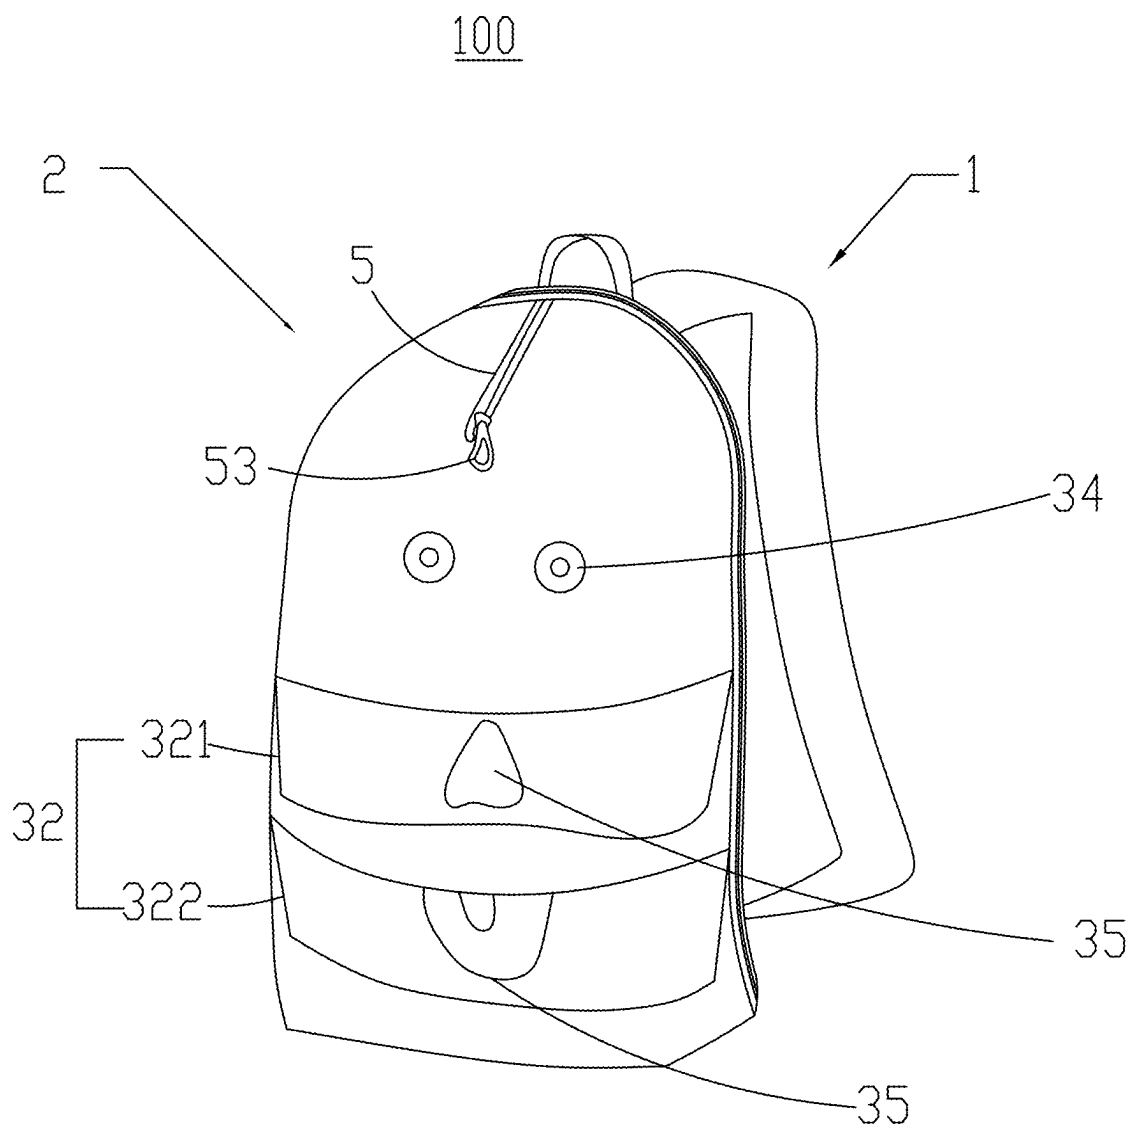


FIG. 2

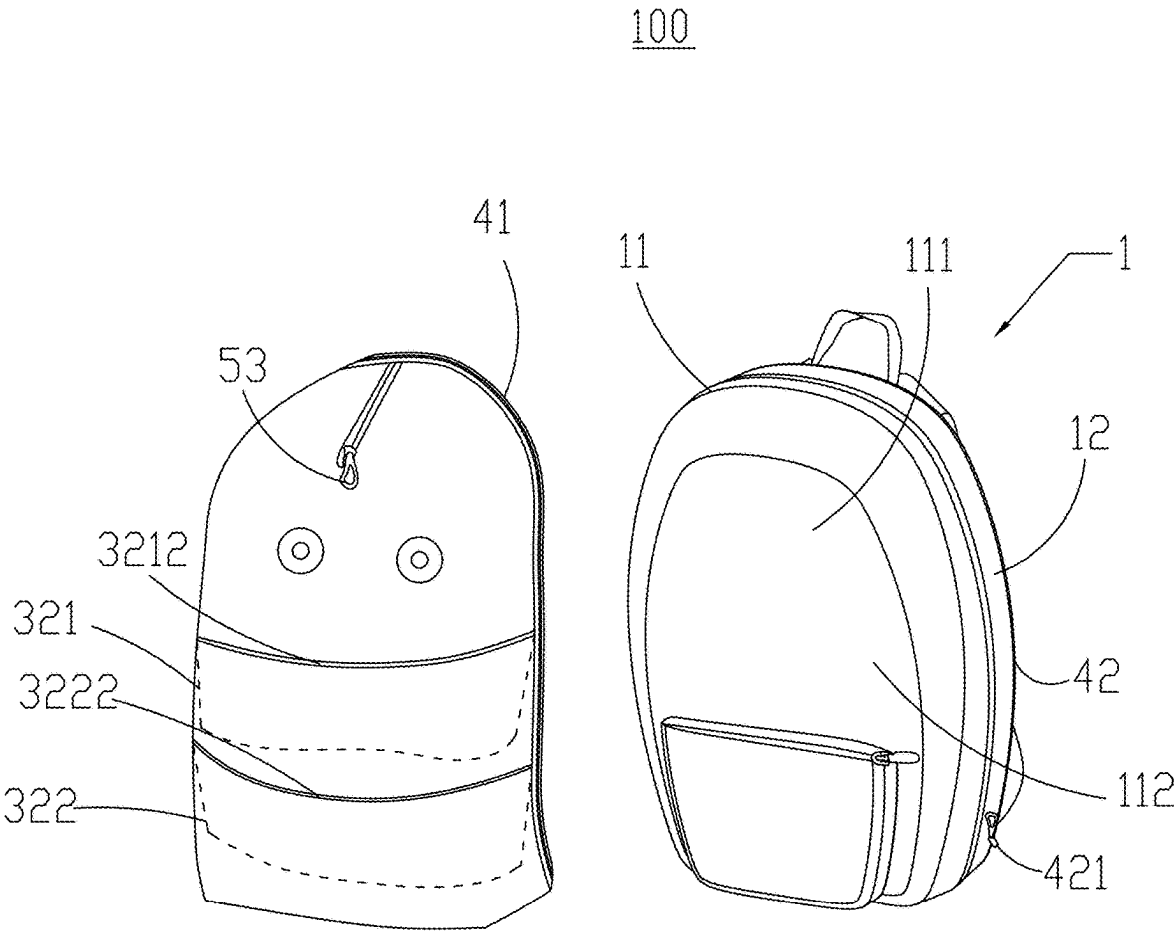


FIG. 3

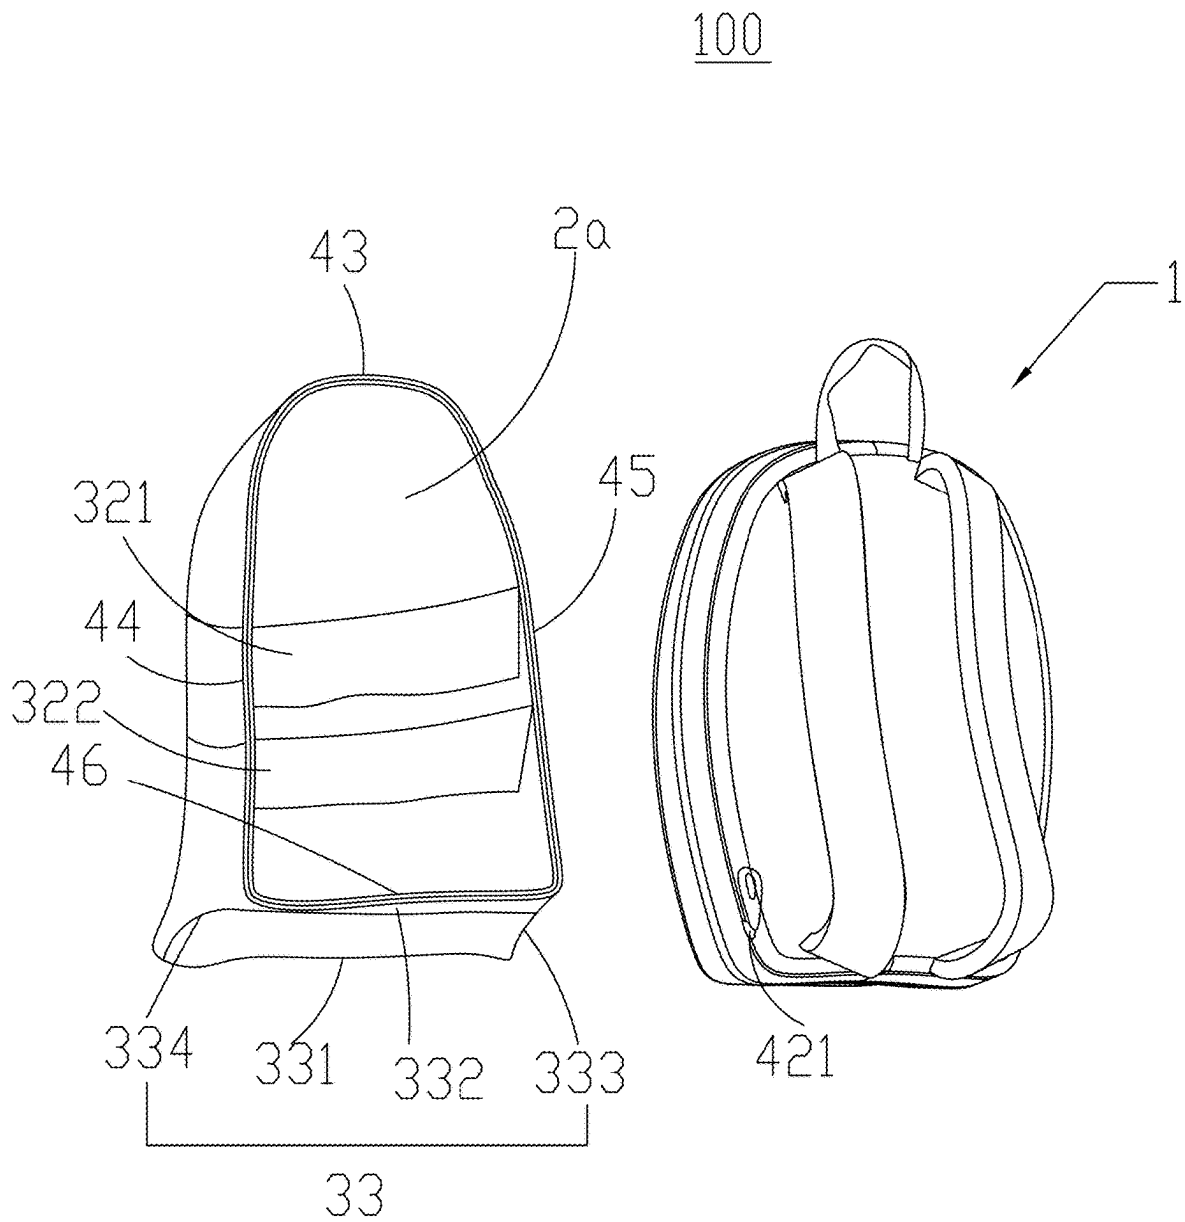


FIG. 4

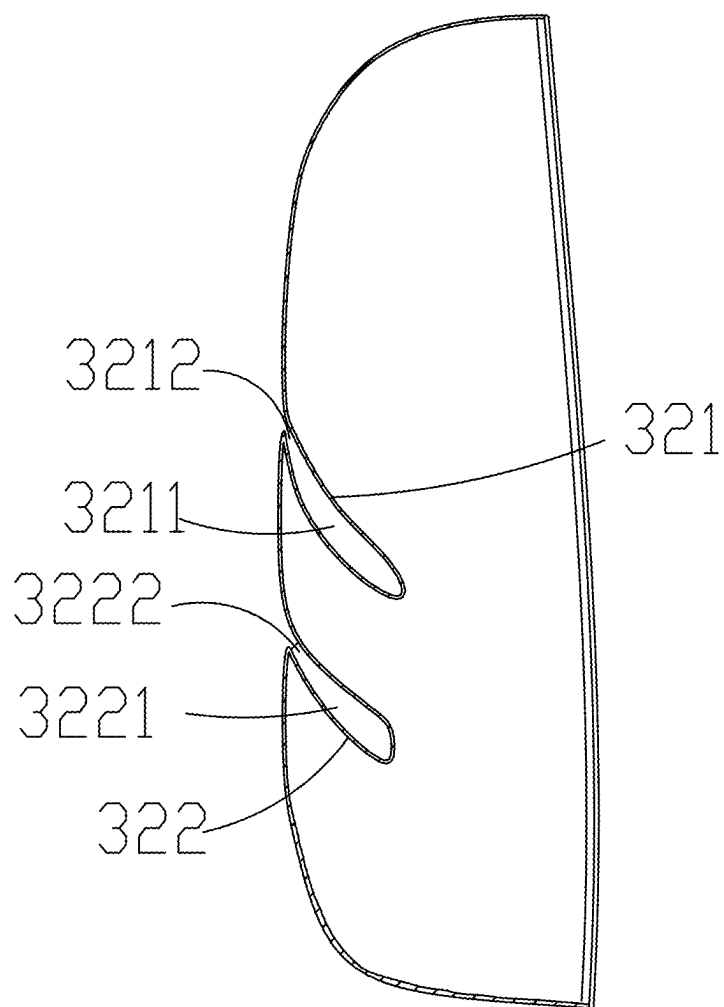


FIG. 5

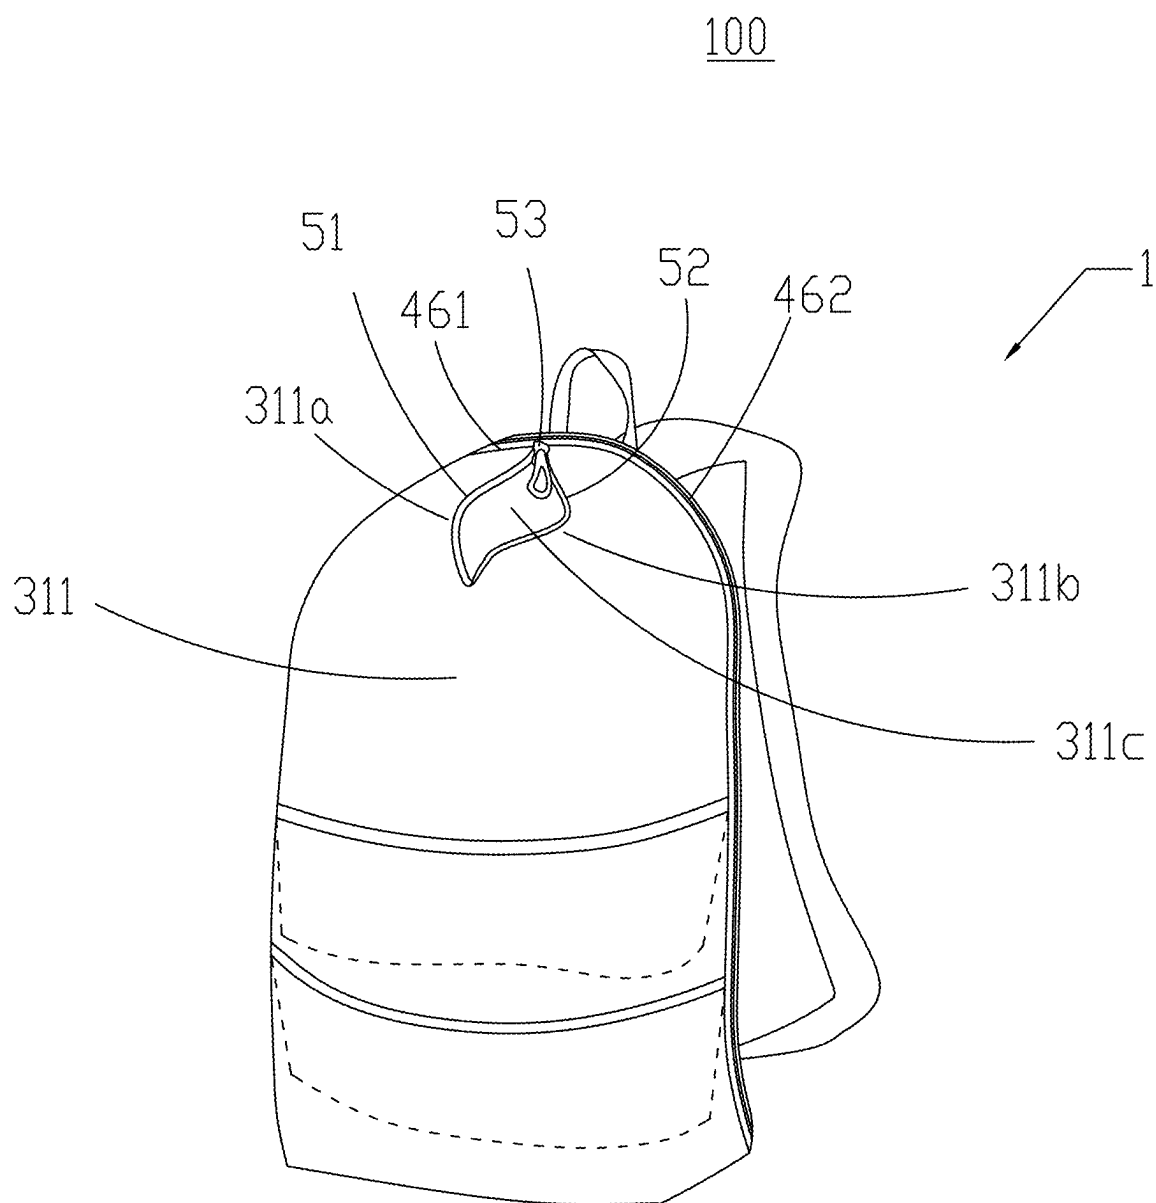


FIG. 6

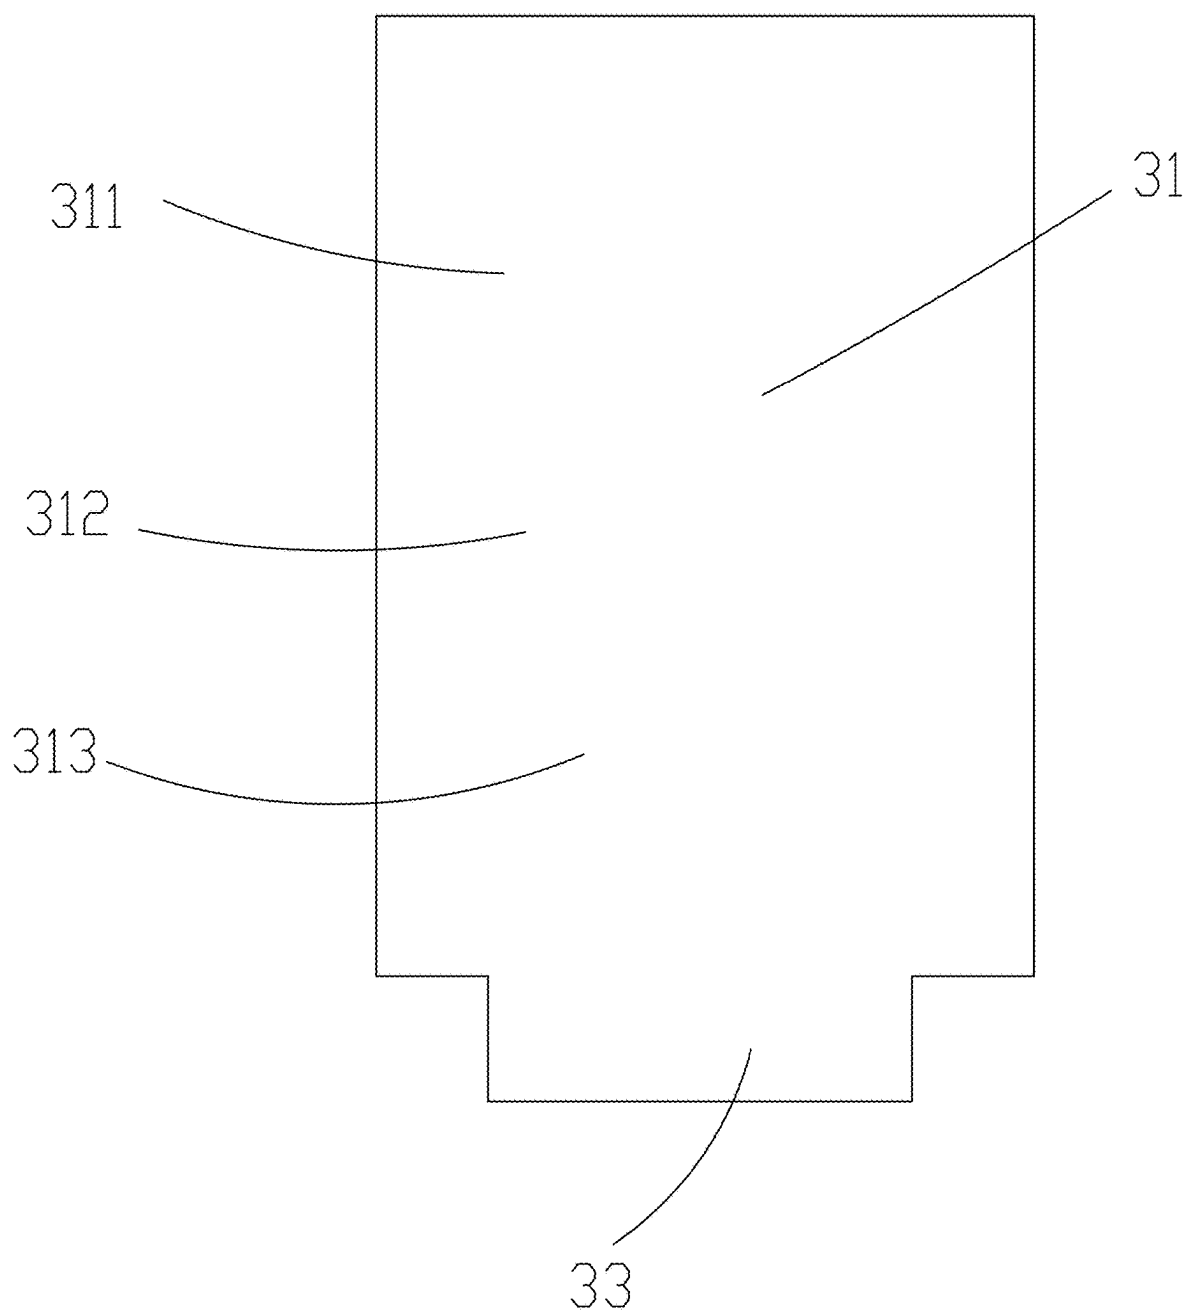


FIG. 7

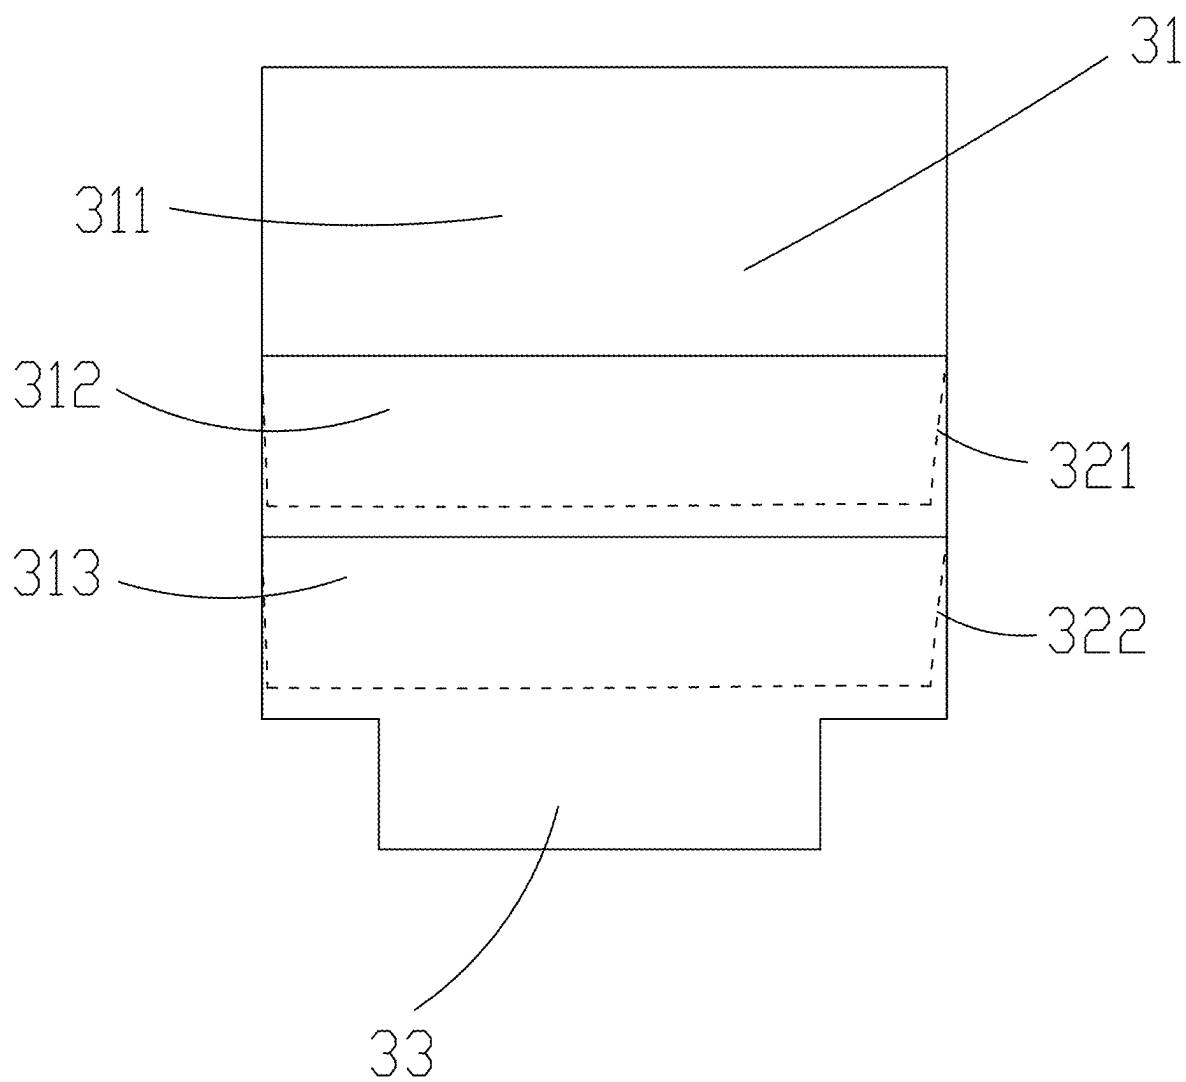


FIG. 8

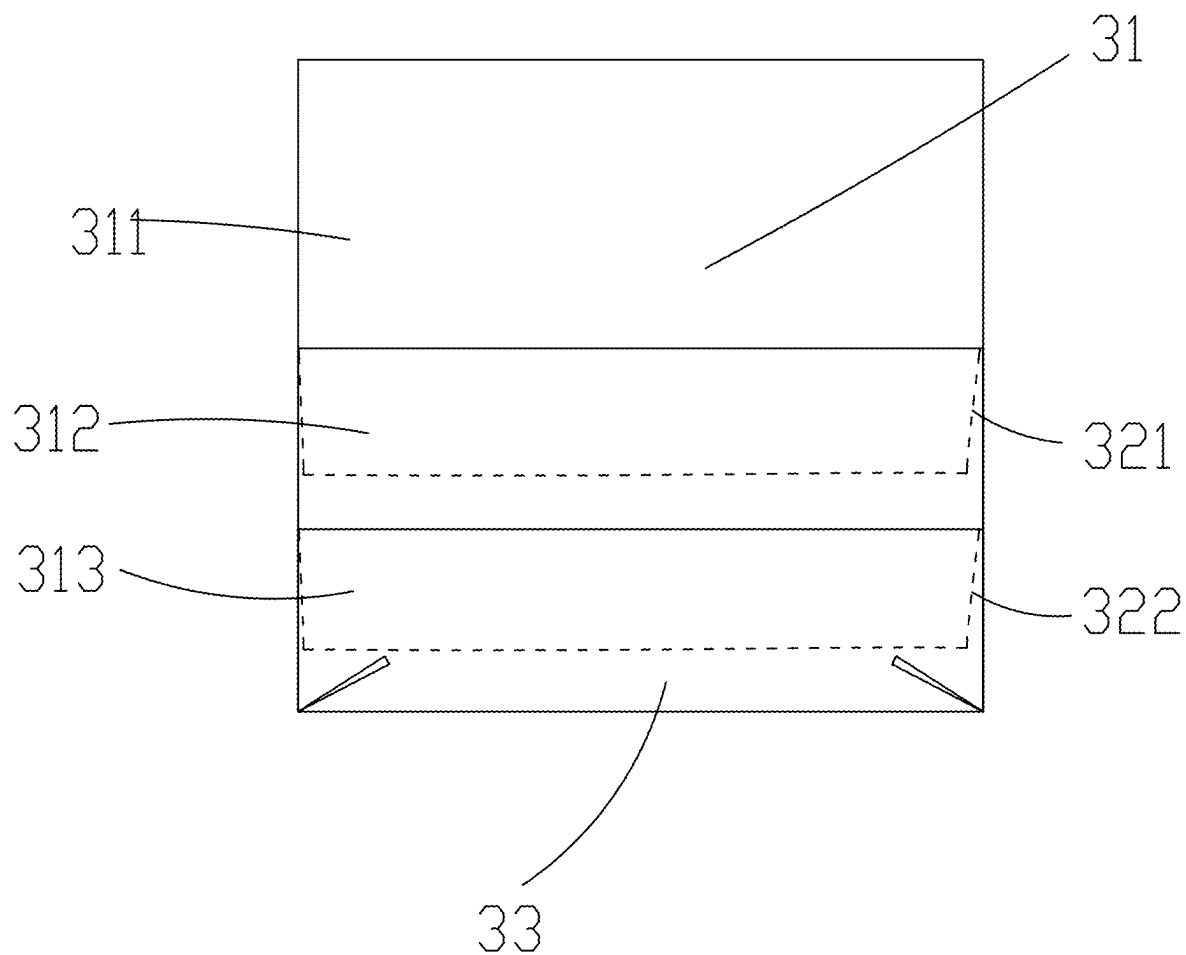


FIG. 9

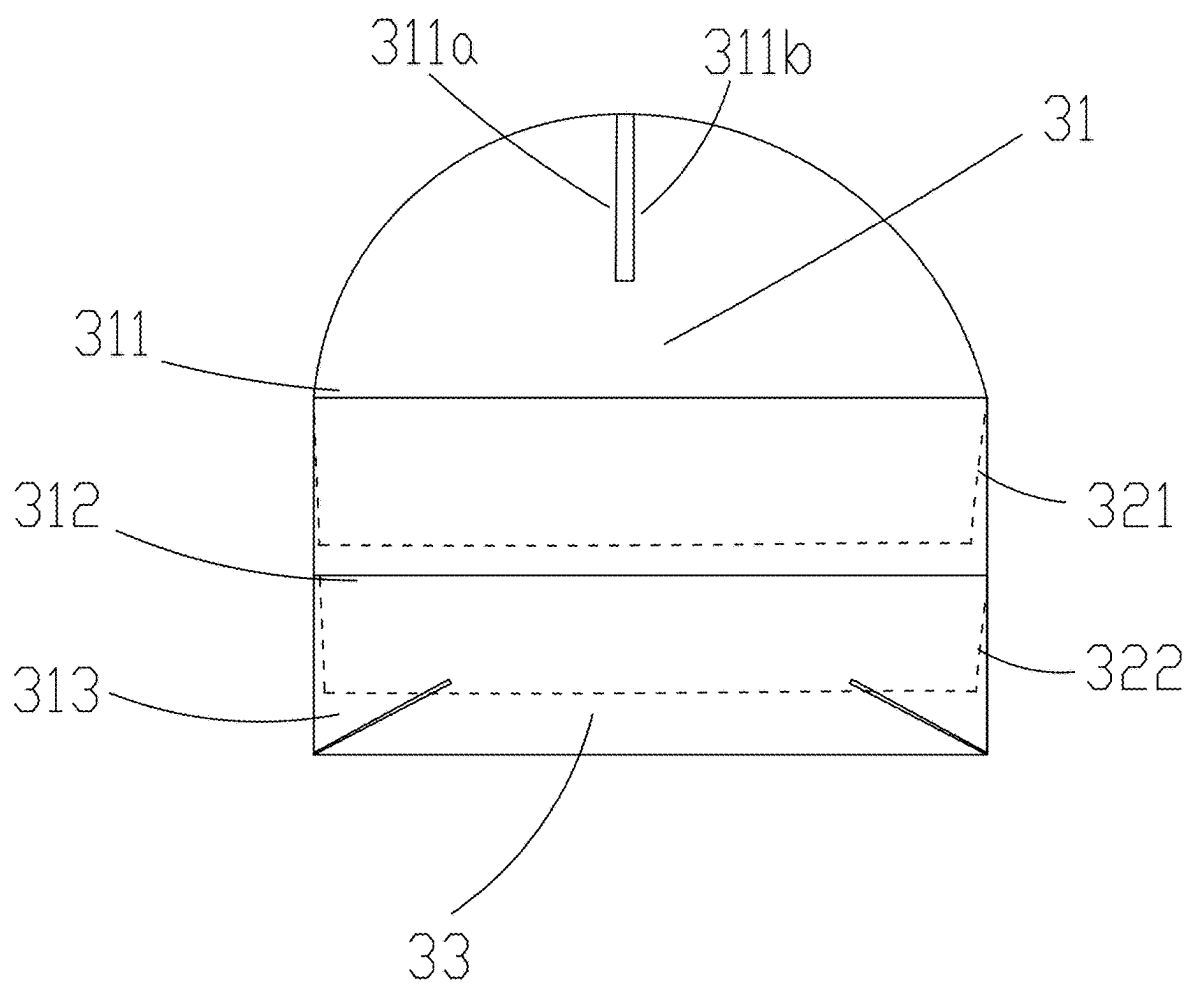


FIG. 10

100A

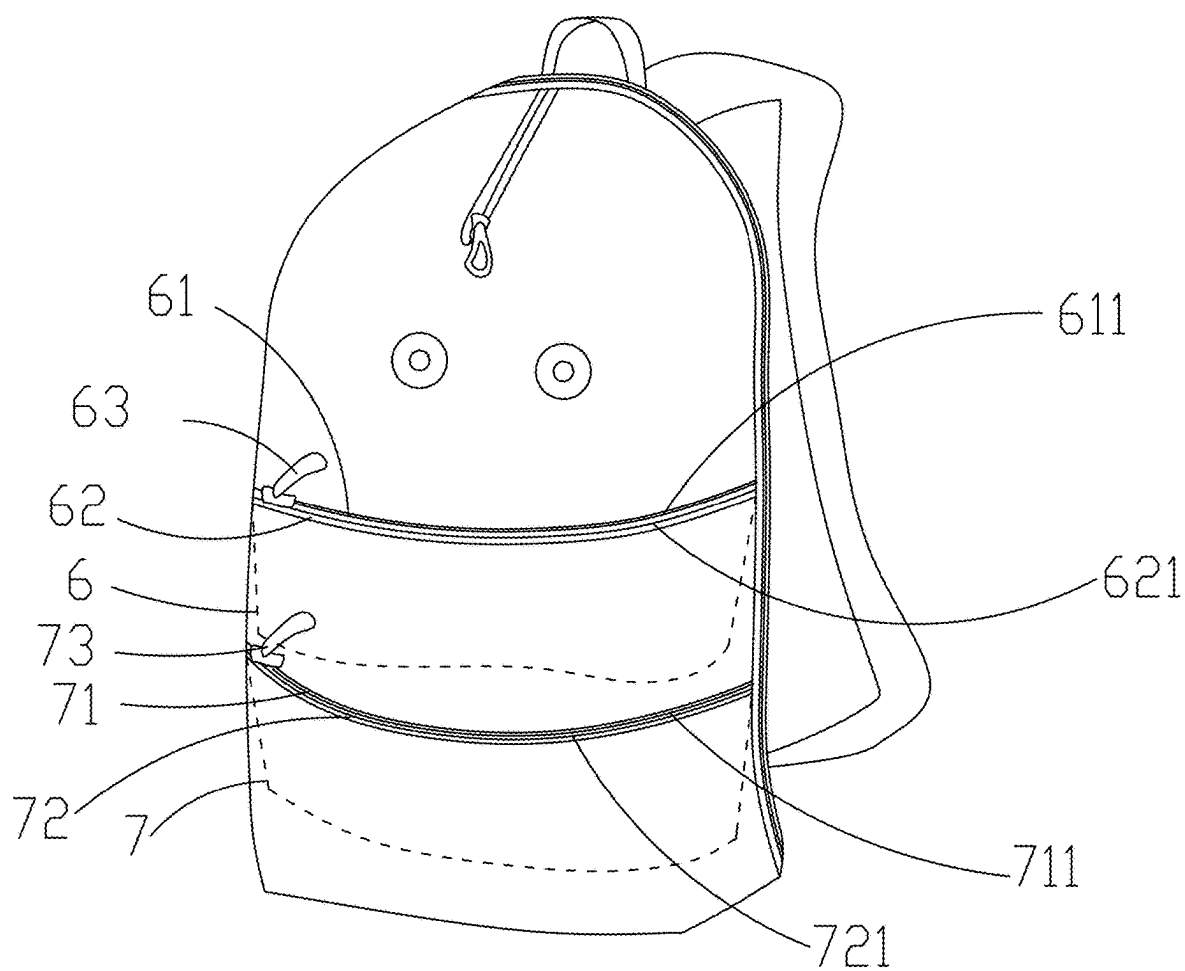


FIG. 11

100A

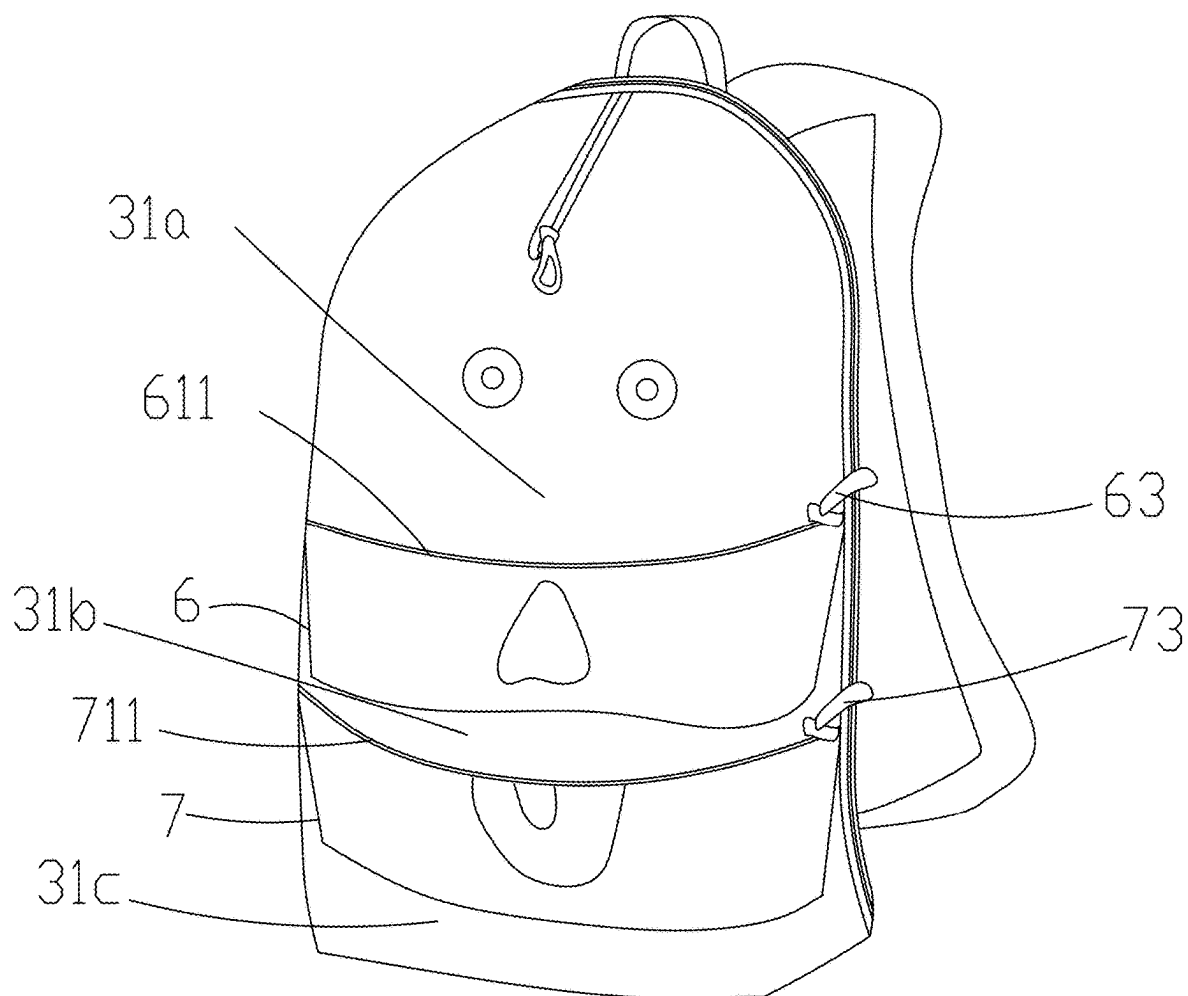


FIG. 12

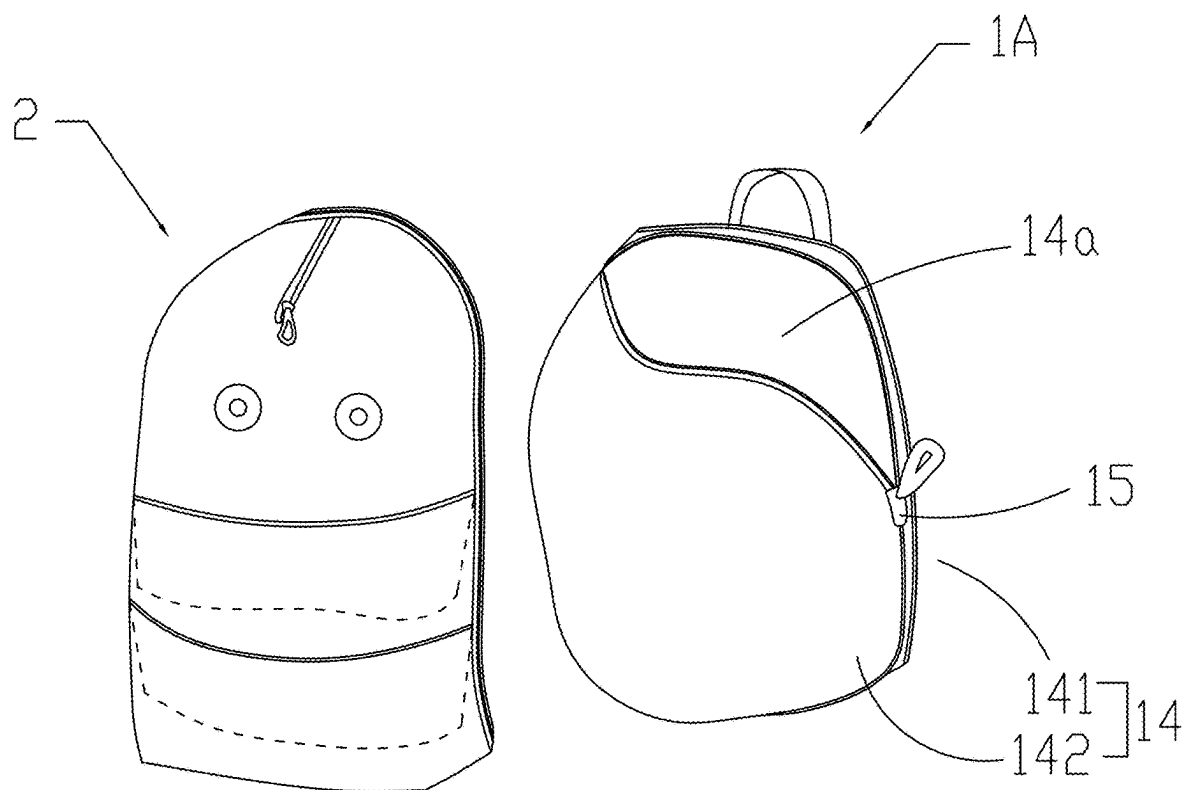


FIG. 13

LUGGAGE ACCESSORY AND LUGGAGE ASSEMBLY

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The application claims priority of Chinese patent application CN202422166507.6, filed on Sep. 4, 2024, and priority of Chinese patent application CN202510591207.9, filed on May 8, 2025, which are incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] This application relates to the field of storage structure techniques, and specifically relates to a luggage accessory and a luggage assembly.

BACKGROUND

[0003] The capacity of an existing luggage is determined by a volume of the existing luggage, and a volume space in the luggage is determined, so that the volume of the luggage is relatively constant and cannot be increased, and the quantity or volume of articles that can be loaded in the luggage is constant. A plurality of pockets, inter layers, or the like are added in the bag to divide the inside of the bag into a plurality of different storage spaces, but the internal volume thereof is not increased, and the volume is reduced due to the increase of the inter layers, or the like.

[0004] When a user uses a luggage for outdoor sports, traveling, and the like, basic daily necessities such as clothes and personal care products are loaded into the luggage, so that the internal space is filled. When a favorite article is purchased, the article needs to be loaded into the luggage but there is no volume space, and the user needs an extra luggage to accommodate the article, resulting in more bags to be carried and poor experience.

[0005] In addition, when the quantity of loaded articles is large, the articles in the luggage are piled up together, so that the user needs to continuously rummage the article in the luggage when looking for a certain article. The articles in the luggage easily become confused, so that the luggage is very inconvenient for the user to use.

SUMMARY

[0006] In order to solve the technical problems, it is necessary to provide a luggage accessory and a luggage assembly that are simple in structure and convenient to carry, and the capacity of a luggage can be expanded.

[0007] In the first aspect, the present application provides a luggage accessory configured to expand a luggage body, which includes an expansion member and a first connection structure. The expansion member has a main body portion and at least one pocket portion that is connected to the main body portion and configured to accommodate articles. The at least one pocket portion includes a first pocket portion, the first pocket portion has a first use state and a second use state, in the first use state, the first pocket portion has a first opening located on a first side of the expansion member so that a user is able to put a first article from the first opening to a first cavity surrounded by a first surface of the first pocket portion, and in the second use state, the first pocket portion extends from the first side of the expansion member to form a second opening on a second side of the expansion member so that the user is able to put a second article from

the second opening to a second cavity surrounded by a second surface of the pocket portion.

[0008] The first connection structure is connected to the expansion member, and configured to be detachably connected to the luggage body so that the luggage accessory is capable of being detachably connected to the luggage body, when the luggage accessory is connected to the luggage body, a first storage cavity is formed between the main body portion and the luggage body, the first pocket portion is located in the first storage cavity in the first use state, and the first pocket portion is located outside the first storage cavity in the second use state and communicates with the first storage cavity by using the second opening.

[0009] In one embodiment, the first pocket portion and the main body portion are formed by sewing a piece of fabric of an integral structure, the main body portion includes a first part and a second part, a first edge of the first pocket portion and the first part are an integral structure, a second edge of the first pocket portion and the second part are an integral structure, a third edge of the first pocket portion is folded and overlapped and connected to a first side of the first connection structure, a fourth edge of the first pocket portion is folded and overlapped and connected to a second side of the first connection structure, and the first side and the second side are disposed back to back.

[0010] In one embodiment, the at least one pocket portion further includes a second pocket portion, the second pocket portion, the main body portion, and the first pocket portion are formed by sewing a same piece of fabric of an integral structure, the main body portion further includes a third part, a first edge of the second pocket portion and the second part are an integral structure, a second edge of the second pocket portion and the third part are an integral structure, a third edge of the second pocket portion is folded and overlapped and connected to the first side of the first connection structure, and a fourth edge of the second pocket portion is folded and overlapped and connected to the second side of the first connection structure; and the second pocket portion is adjacent to the first pocket portion.

[0011] In one embodiment, the main body portion further includes a bottom plate part, a first edge of the bottom plate part and the third part or the second part are an integral structure, a second edge of the bottom plate part is connected to a third side of the first connection structure, the third side of the first connection structure is a bottom side and connected between the first side of the first connection structure and the second side of the first connection structure, a third edge of the bottom plate part is connected to one end of the third part, and a fourth edge of the bottom plate part is connected to the other end of the third part.

[0012] In one embodiment, the first connection structure further includes a fourth side connected between the first side of the first connection structure and the second side of the first connection structure, the third side of the first connection structure and the fourth side of the first connection structure are disposed back to back, and the fourth side of the first connection structure includes a first subpart and a second subpart; the first part includes a first edge that connects an upper portion of the first side of the first connection structure to the first subpart and a second edge that connects an upper portion of the second side of the first connection structure to the second subpart, a top of the first edge is connected to a top of the second edge, the first part further includes a first inner edge and a second inner edge,

a first end of the first inner edge is connected to a first end of the second inner edge, a second end of the first inner edge is connected to a second end of the second inner edge, the second end of the first inner edge is further connected to a joint between the first edge and the second edge, a second end of the second inner edge is also connected to the joint between the first edge and the second edge, the luggage accessory further includes a second connection structure, the second connection structure is configured to detachably connect the first inner edge to the second inner edge, when the first inner edge is separated from the second inner edge, a third opening is formed between the first inner edge and the second inner edge, and the third opening is configured to communicate with the first storage cavity for a user to take and put articles from the third opening.

[0013] In one embodiment, the first connection structure includes a first zipper part, the luggage body includes a second zipper part, the first zipper part and the second zipper part are detachably connected by using a first zipper head; and the second connection structure includes a third zipper part connected to the first inner edge and a fourth zipper part connected to the second inner edge, and the fourth zipper part and the third zipper part are detachably connected by using a second zipper head.

[0014] In one embodiment, a first connector is disposed between the first pocket portion and the first part, a second connector is disposed between the first pocket portion and the second part, and the first connector and the second connector are detachably connected to close or open the first opening; and the first connector is a fifth zipper part, the second connector is a sixth zipper part, and the fifth zipper part and the sixth zipper part are detachably connected by using a third zipper head.

[0015] In one embodiment, a third connector is disposed between the second pocket portion and the second part, a fourth connector is disposed between the second pocket portion and the third part, and the third connector and the fourth connector are detachably connected to close or open the second pocket portion; and the third connector is a seventh zipper part, the fourth connector is an eighth zipper part, and the seventh zipper part and the eighth zipper part are detachably connected by using a fourth zipper head.

[0016] In one embodiment, the expansion member is made of an elastic fabric, and the expansion member is configured to be deformed under the action of an external force; and the elastic fabric has a stretchable ratio of 1:1.3 in horizontal and longitudinal directions.

[0017] In one embodiment, the main body portion and/or the pocket portion are provided with a printed layer, and the printed layer has character, animal or cartoon facial feature patterns.

[0018] In the second aspect, the present application provides a luggage assembly, which includes a luggage body and a luggage accessory detachably connected to the luggage body, the luggage accessory being configured to expand the luggage body. The luggage accessory includes an expansion member and a first connection structure.

[0019] The expansion member has a main body portion and at least one pocket portion that is connected to the main body portion and configured to accommodate articles, the at least one pocket portion includes a first pocket portion, the first pocket portion has a first use state and a second use state, in the first use state, the first pocket portion has a first opening located on a first side of the expansion member so

that a user is able to put a first article from the first opening to a first cavity surrounded by a first surface of the first pocket portion, and in the second use state, the first pocket portion extends from the first side of the expansion member to form a second opening on a second side of the expansion member so that the user is able to put a second article from the second opening to a second cavity surrounded by a second surface of the pocket portion.

[0020] The first connection structure is connected to the expansion member, and is configured to be detachably connected to the luggage body so that the luggage accessory is capable of being detachably connected to the luggage body, when the luggage accessory is connected to the luggage body, a first storage cavity is formed between the main body portion and the luggage body, the first pocket portion is located in the first storage cavity in the first use state, and the first pocket portion is located outside the first storage cavity in the second use state and communicates with the first storage cavity by using the second opening.

[0021] In one embodiment, the luggage body includes a back plate assembly, and the luggage accessory is configured to be detachably connected to the back plate assembly; a waterproof inter layer and/or a waterproof bag are disposed on one side, close to the luggage accessory, of the back plate assembly; the back plate assembly has a second storage cavity; at least one of the first storage cavity and the second storage cavity is filled with a filler to form a pillow; and the back plate assembly includes a back plate body and the waterproof inter layer detachably connected to at least a part of the back plate body by using a second connection structure, and the back plate body and the waterproof inter layer are surrounded to form the second storage cavity.

[0022] In one embodiment, the first pocket portion and the main body portion are formed by sewing a piece of fabric of an integral structure, the main body portion includes a first part and a second part, a first edge of the first pocket portion and the first part are an integral structure, a second edge of the first pocket portion and the second part are an integral structure, a third edge of the first pocket portion is folded and overlapped and connected to a first side of the first connection structure, a fourth edge of the first pocket portion is folded and overlapped and connected to a second side of the first connection structure, and the first side and the second side are disposed back to back.

[0023] In one embodiment, the at least one pocket portion further includes a second pocket portion, the second pocket portion, the main body portion, and the first pocket portion are formed by sewing a same piece of fabric of an integral structure, the main body portion further includes a third part, a first edge of the second pocket portion and the second part are an integral structure, a second edge of the second pocket portion and the third part are an integral structure, a third edge of the second pocket portion is folded and overlapped and connected to the first side of the first connection structure, and a fourth edge of the second pocket portion is folded overlapped and connected to the second side of the first connection structure; and the second pocket portion is adjacent to the first pocket portion.

[0024] In one embodiment, the main body portion further includes a bottom plate part, a first edge of the bottom plate part and the third part or the second part are an integral structure, a second edge of the bottom plate part is connected to a third side of the first connection structure, the third side of the first connection structure is a bottom side and con-

ected between the first side of the first connection structure and the second side of the first connection structure, a third edge of the bottom plate part is connected to one end of the third part, and a fourth edge of the bottom plate part is connected to the other end of the third part.

[0025] In one embodiment, the first connection structure further includes a fourth side connected between the first side of the first connection structure and the second side of the first connection structure, the third side of the first connection structure and the fourth side of the first connection structure are disposed back to back, and the fourth side of the first connection structure includes a first subpart and a second subpart; the first part includes a first edge that connects an upper portion of the first side of the first connection structure to the first subpart and a second edge that connects an upper portion of the second side of the first connection structure to the second subpart, a top of the first edge is connected to a top of the second edge, the first part further includes a first inner edge and a second inner edge, a first end of the first inner edge is connected to a first end of the second inner edge, a second end of the first inner edge is connected to a second end of the second inner edge, the second end of the first inner edge is further connected to a joint between the first edge and the second edge, a second end of the second inner edge is also connected to the joint between the first edge and the second edge, the luggage accessory further includes a second connection structure, the second connection structure is configured to detachably connect the first inner edge to the second inner edge, when the first inner edge is separated from the second inner edge, a third opening is formed between the first inner edge and the second inner edge, and the third opening is configured to communicate with the first storage cavity for a user to take and put articles from the third opening.

[0026] In one embodiment, the first connection structure includes a first zipper part, the luggage body includes a second zipper part, the first zipper part and the second zipper part are detachably connected by using a first zipper head; and the second connection structure includes a third zipper part connected to the first inner edge and a fourth zipper part connected to the second inner edge, and the fourth zipper part and the third zipper part are detachably connected by using a second zipper head.

[0027] In one embodiment, a first connector is disposed between the first pocket portion and the first part, a second connector is disposed between the first pocket portion and the second part, and the first connector and the second connector are detachably connected to close or open the first opening; and the first connector is a fifth zipper part, the second connector is a sixth zipper part, and the fifth zipper part and the sixth zipper part are detachably connected by using a third zipper head.

[0028] In one embodiment, a third connector is disposed between the second pocket portion and the second part, a fourth connector is disposed between the second pocket portion and the third part, and the third connector and the fourth connector are detachably connected to close or open the second pocket portion; and the third connector is a seventh zipper part, the fourth connector is an eighth zipper part, and the seventh zipper part and the eighth zipper part are detachably connected by using a fourth zipper head.

[0029] In one embodiment, the expansion member is made of an elastic fabric, and the expansion member is configured to be deformed under the action of an external force; the

elastic fabric has a stretchable ratio of 1:1.3 in horizontal and longitudinal directions; and the main body portion and/or the pocket portion are provided with a printed layer, and the printed layer has character, animal or cartoon facial feature patterns.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] In order to explain the technical solutions of the embodiments of the present invention more clearly, the following will briefly introduce the accompanying drawings used in the embodiments. Apparently, the drawings in the following description are only some embodiments of the present invention. Those of ordinary skill in the art can obtain other drawings based on these drawings without creative work.

[0031] FIG. 1 is a schematic structural diagram of a luggage assembly in a first use state according to a first embodiment of this application;

[0032] FIG. 2 is a schematic structural diagram of a luggage assembly in a second use state shown in FIG. 1;

[0033] FIG. 3 is an exploded view of a luggage assembly shown in FIG. 1;

[0034] FIG. 4 is an exploded view of a luggage assembly at another angle shown in FIG. 3;

[0035] FIG. 5 is a section view of a luggage accessory shown in FIG. 1;

[0036] FIG. 6 is a schematic structural diagram of a luggage assembly in a third use state shown in FIG. 1;

[0037] FIG. 7 to FIG. 10 are schematic diagrams of a manufacturing flow of a luggage accessory of a luggage assembly shown in FIG. 1;

[0038] FIG. 11 is a schematic structural diagram of a luggage assembly in a first use state according to a second embodiment of this application;

[0039] FIG. 12 is a schematic structural diagram of a luggage assembly in a second use state shown in FIG. 11; and

[0040] FIG. 13 is an exploded view of a luggage assembly according to a third embodiment of this application.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0041] It will be appreciated that for simplicity and clarity of illustration, where appropriate, reference numerals have been repeated among the different figures to indicate corresponding or analogous elements. In addition, numerous specific details are set forth in order to provide a thorough understanding of the exemplary embodiments described herein. However, it will be understood by those of ordinary skill in the art that the exemplary embodiments described herein may be practiced without these specific details. In other instances, methods, procedures, and components have not been described in detail so as not to obscure the related relevant feature being described. Also, the description is not to be considered as limiting the scope of the exemplary embodiments described herein. The drawings are not necessarily to scale and the proportions of certain parts may be exaggerated to better illustrate details and features of the present disclosure.

[0042] The term “comprising” when utilized, means “including, but not necessarily limited to”; it specifically indicates open-ended inclusion or membership in the so-described combination, group, series, and the like. The

disclosure is illustrated by way of example and not by way of limitation in the figures of the accompanying drawings in which like references indicate similar elements. It should be noted that references to “an” or “one” embodiment in this disclosure are not necessarily to the same embodiment, and such references can mean “at least one”. In addition, the terms “first” and “second” are used for descriptive purposes only and cannot be understood as indicating or implying relative importance or implying the number of indicated technical features. Thus, the features defined as “first” and “second” may explicitly or implicitly include one or more of the said features. In the description of embodiments of the invention, “a plurality of” means two or more, unless otherwise specifically defined.

[0043] The terms “top”, “bottom”, and other indicating directions or positions are based on the directions or positions shown in the attached drawings in order to facilitate the description of the embodiment and simplify the description of the invention, rather than indicating or implying that the device or element referred to must have a specific orientation, be constructed and operated in a specific orientation, it cannot be understood as a limitation of the embodiment of the invention.

Embodiment 1

[0044] Referring to FIG. 1 to FIG. 10, a first embodiment of the present application provides a luggage assembly 100. The luggage assembly 100 includes a luggage body 1 and a luggage accessory 2 detachably connected to the luggage body 1. The luggage accessory 2 is used to expand the luggage body 1 so that more articles can be loaded in the luggage assembly 100. Specifically, the luggage accessory 2 is disposed outside the luggage body 1, and a first storage cavity is formed between the luggage accessory 2 and the luggage body 1, so that more articles can be loaded into the first storage cavity in addition to articles in the luggage body 1. The luggage accessory 2 is convenient for a user to use.

[0045] The luggage body 1 includes a back plate assembly 11, and the luggage accessory 2 is configured to be detachably connected to the back plate assembly 11. The luggage accessory 2 is configured to expand the luggage body, and includes an expansion member 3 and a first connection structure 4.

[0046] The expansion member 3 has a main body portion 31 and at least one pocket portion 32 that is connected to the main body portion 31 and configured to accommodate articles. The at least one pocket portion 32 includes a first pocket portion 321. The first pocket portion 321 has a first use state and a second use state. In the first use state, the first pocket portion 321 has a first opening 3212 located on a first side of the expansion member 3 so that the user is able to put a first article from the first opening to a first cavity 3211 surrounded by a first surface of the first pocket portion 321. In the second use state, the first pocket portion 321 extends from the first side of the expansion member 3 to form a second opening 3222 on a second side of the expansion member so that the user is able to put a second article from the second opening to a second cavity 3221 surrounded by a second surface of the pocket portion.

[0047] It may be understood that when articles need to be loaded into the first pocket portion 321, the articles need to be loaded into the first pocket portion 321 through the first opening 3212. When the first pocket portion 321 is in the second use state, the first pocket portion 321 communicates

with the first storage cavity 2a, and volume of the first storage cavity 2a is changed, so that the volume of the first storage cavity 2a is increased. When the first pocket portion 321 is in the first use state, the first pocket portion 321 is located in the first storage cavity 2a, and since the first pocket portion 321 itself has certain volume, the volume of the first storage cavity 2a is reduced. Therefore, in the embodiment of this application, the first pocket portion 321 can change the volume of the first storage cavity 2a, so that the user can select the use state of the first pocket portion 321 based on actual scene needs.

[0048] In the first use state, the first pocket portion 321 is located in the first storage cavity 2a, and the first opening 3212 communicates with the outside, so that the articles can be easily loaded into the first pocket portion 321 directly through the first opening 3212, and are convenient for the user to take. Referring to FIG. 2 and FIG. 4, in the second use state, the first pocket portion 321 is located outside the luggage assembly 100, and the first opening 3212 communicates with the first storage cavity 2a. At this time, the first storage cavity 2a needs to be opened before the articles are loaded into the first pocket portion 321 through the first storage cavity 2a and the second opening 3222 in sequence. When the articles need to be taken out, the first storage cavity 2a also needs to be opened before the articles are taken out.

[0049] The expansion member 3 may be made of an elastic fabric, and the expansion member 3 is configured to be deformed under the action of an external force; The elastic fabric has a stretchable ratio of 1:1.3 in horizontal and longitudinal directions. Specifically, in the present embodiment, the main body portion 31 may be an elastic fabric cover, made of elastic fabric, such as synthetic fiber (such as spandex blend), elastic nylon, elastic polyester fiber, and elastic denim, or made of knitted fabric, elastic mesh fabric, elastic flannel, or the like. The elastic fabric cover may be disposed on the outside of the luggage body and has certain elasticity. When not in use, the elastic fabric cover is disposed on the outside of the luggage body 1 and clings to the luggage body, so that the volume of the luggage assembly can be kept in a small state, and the main body portion does not need to be stored, so that the luggage assembly is convenient for the user to carry. When the articles need to be loaded, more articles can be loaded because the elastic fabric cover itself is of elasticity. The expansion member is made of elastic fabric, so that the expansion member has certain elastic tension, thereby increasing the volume of the first storage cavity, and also facilitating storage and carrying of the luggage accessory.

[0050] It may be understood that the first connection structure 4 is connected to the expansion member 3 and configured to be detachably connected to the luggage body 1 so that the luggage accessory 2 is capable of being detachably connected to the luggage body 1. When the luggage accessory 2 is connected to the luggage body 1, a first storage cavity 2a is formed between the main body portion 31 and the luggage body 1. The first pocket portion 321 is located in the first storage cavity 2a in the first use state. The first pocket portion 321 is located outside the first storage cavity 2a in the second use state and communicates with the first storage cavity 2a by using the second opening 3222.

[0051] Specifically, the first pocket portion 321 and the main body portion 31 are formed by sewing a piece of fabric

of an integral structure. The main body portion **31** includes a first part **311** and a second part **312**. A first edge of the first pocket portion **321** and the first part **311** are an integral structure. A second edge of the first pocket portion **321** and the second part **312** are an integral structure. A third edge of the first pocket portion is folded and overlapped and connected to a first side **43** of the first connection structure **4**. A fourth edge of the first pocket portion is folded and overlapped and connected to a second side **44** of the first connection structure **4**. The first side **43** and the second side **44** are disposed back to back. It may be understood that the first pocket portion **321** and the main body portion **31** are formed by sewing a piece of fabric of an integral structure, thereby having advantages of simple manufacturing and durability.

[0052] In the present embodiment, the at least one pocket portion **32** further includes a second pocket portion **322**. The second pocket portion **322**, the main body portion **31**, and the first pocket portion **321** are formed by sewing a same piece of fabric of an integral structure. The main body portion further includes a third part **313**. A first edge of the second pocket portion **322** and the second part **312** are an integral structure. A second edge of the second pocket portion **322** and the third part **313** are an integral structure. A third edge of the second pocket portion **322** is folded and overlapped and connected to the first side **43** of the first connection structure. A fourth edge of the second pocket portion **322** is folded and overlapped and connected to the second side of the first connection structure **44**. The second pocket portion **322** is adjacent to the first pocket portion **321**. Specifically, the quantity of the pocket portions **32** can be designed based on actual needs, and two pocket portions are mainly described schematically in the present embodiment, but more pocket portions may be provided, which is not limited to the present embodiment.

[0053] The main body portion **31** further includes a bottom plate part **33**. A first edge **331** of the bottom plate part and the third part **313** or the second part **312** are an integral structure. A second edge of the bottom plate part **33** is connected to a third side **45** of the first connection structure. The third side **45** of the first connection structure is a bottom side and connected between the first side **43** of the first connection structure and the second side **44** of the first connection structure. A third edge **333** of the bottom plate part is connected to one end of the third part **313**. A fourth edge **334** of the bottom plate part is connected to the other end of the third part **313**. It may be understood that due to additional design of the bottom plate part **33**, the expanded first storage cavity may have better bottom load-bearing capacity and better use effect.

[0054] The first connection structure further **4** includes a fourth side **46** connected between the first side **43** of the first connection structure and the second side **44** of the first connection structure. The third side **45** of the first connection structure and the fourth side **46** of the first connection structure are disposed back to back. The fourth side **46** of the first connection structure includes a first subpart **461** and a second subpart **462**. The first part **311** includes a first edge that connects an upper portion of the first side **43** of the first connection structure to the first subpart **461** and a second edge that connects an upper portion of the second side **44** of the first connection structure to the second subpart **462**. A top of the first edge is connected to a top of the second edge. The first part **311** further includes a first inner edge **311a** and

a second inner edge **311b**. A first end of the first inner edge **311a** is connected to a first end of the second inner edge **311b**. A second end of the first inner edge **311a** is connected to a second end of the second inner edge **311b**. The second end of the first inner edge **311a** is further connected to a joint between the first edge and the second edge. A second end of the second inner edge **311b** is also connected to the joint between the first edge and the second edge. The luggage accessory **2** further includes a second connection structure **5**. The second connection structure **5** is configured to detachably connect the first inner edge **311a** to the second inner edge **311b**. When the first inner edge **311a** is separated from the second inner edge **311b**, a third opening **311c** is formed between the first inner edge **311a** and the second inner edge **311b**. The third opening **311c** is configured to communicate with the first storage cavity **2a** for a user to take and put articles from the third opening **311c**. It may be understood that by the design of the third opening **311c**, it is convenient for the user to open the first storage cavity, and it is convenient for the user to take and put articles without the user using the first connection structure, thereby improving user experience of the user.

[0055] Specifically, the first connection structure **4** includes a first zipper part **41**. The luggage body **1** includes a second zipper part **42**. The first zipper part **41** and the second zipper part **42** are detachably connected by using a first zipper head **421**. The second connection structure **5** includes a third zipper part **51** connected to the first inner edge **311a** and a fourth zipper part **52** connected to the second inner edge **311b**. The fourth zipper part **52** and the third zipper part **51** are detachably connected by using a second zipper head **53**. It may be understood that by providing zipper structures, use effect of the luggage assembly is better.

[0056] Referring to FIG. 7 to FIG. 10, it may be understood that the expansion member can be manufactured in the following manner.

[0057] First, a piece of integral fabric shown in FIG. 7 may be provided. Next, as shown in FIG. 8, at least one wrinkled pocket portion **32** (such as the first pocket portion **321** and the second pocket portion **322**) are formed as needed. Then, as shown in FIG. 9, the two edges **333** and **334** of the bottom plate portion **33** are sewn together with the main body portion **31**. Then, as shown in FIG. 10, two corners of the main body portion **31** are sewn together to form the first inner edge **311a** and the second inner edge **311b**, so as to obtain the expansion portion **3**. Finally, the first connection structure **4** and the second connection structure **5** are respectively sewn on the expansion member **3** shown in FIG. 10, thereby obtaining the luggage accessory **2** shown in FIG. 1 to FIG. 6.

[0058] From the above process, it may be seen that the luggage accessory in the present embodiment is also relatively simple in manufacturing process, high in production efficiency, and low in costs.

Embodiment 2

[0059] Referring to FIG. 11 and FIG. 12, a second embodiment of this application provides a luggage assembly **100A**. The luggage assembly **100A** is basically the same as the luggage assembly **100** of the first embodiment, that is, the description of the first embodiment of this application is basically applicable to the luggage assembly **100A** of the

second embodiment, and the differences between the second embodiment and the first embodiment will be mainly described below.

[0060] Specifically, in the second embodiment, a first connector **61** is disposed between the first pocket portion **6** and the first part **31a**. A second connector **62** is disposed between the first pocket portion **6** and the second part **31b**. The first connector **61** and the second connector **62** are detachably connected to close or open the first opening. The first connector **61** is a fifth zipper part **611**. The second connector **62** is a sixth zipper part **621**. The fifth zipper part **611** and the sixth zipper part **621** are detachably connected by using a third zipper head **63**.

[0061] A third connector **71** is disposed between the second pocket portion **7** and the second part **31b**. A fourth connector **72** is disposed between the second pocket portion **7** and the third part **31c**. The third connector **71** and the fourth connector **72** are detachably connected to close or open the second pocket portion. The third connector **71** is a seventh zipper part **711**. The fourth connector **72** is an eighth zipper part **721**. The seventh zipper part **711** and the eighth zipper part **721** are detachably connected by using a fourth zipper head **73**.

[0062] It may be understood that the zipper design can effectively avoid loss of articles caused by the fact that the opening of the pocket portion is not closed, thereby improving safety and experience of use.

[0063] In addition, in the first and second embodiments, the main body portion **31** and/or the pocket portion **32** of the expansion member **3** may be provided with a first printed layer **34**, so that the appearance of the luggage accessory **2** is more attractive and ornamental. Specifically, the first printed layer **34** may be formed by spraying or painting. Patterns of the first printed layer **34** may be designed based on actual situations, and may be character, animal, or cartoon facial feature patterns, such as eyes, a nose, and ears, or may be other animal or landscape patterns.

[0064] Similarly, the pocket portion **32** further includes a second printed layer **35**. Specifically, the second printed layer **35** may be formed by spraying or painting. Pattern of the second printed layer **35** may be designed according to actual situations, and may be character, animal, or cartoon facial feature patterns, such as a mouth or a tongue, or may be other animal or landscape patterns. The second printed layer **35** is provided so that the appearance of the luggage accessory **2** is more attractive and ornamental.

Embodiment 3

[0065] Referring to FIG. 13, a third embodiment of this application provides a luggage assembly. The luggage assembly is basically the same as the luggage assembly of the first embodiment, that is, the description of the first embodiment of this application is basically applicable to the luggage assembly of the third embodiment, and differences between the third embodiment and the first embodiment are mainly described below.

[0066] In the third embodiment, the luggage body **1A** includes a back plate assembly **14**. The back plate assembly **14** includes a back plate body **141**, and an inter layer **142** (a waterproof inter layer) disposed on the side close to the luggage accessory **2**. The back plate assembly **14** has a second storage cavity **14a**. At least one of the first storage

cavity and the second storage cavity **14a** formed by the luggage accessory **2** and the luggage body **1A** is filled with a filler to form a pillow.

[0067] The various above embodiments are only used to describe the technical solutions of the present invention, and not intended to limit the present invention. Although the present invention has been described in detail with reference to the foregoing embodiments, those ordinarily skilled in the art should understand that they can still modify the technical solutions described in all the foregoing embodiments, or equivalently replace some or all of the technical features, and these modifications or replacements do not depart the essences of the corresponding technical solutions from the spirit and scope of the technical solutions of all the embodiments of the present invention.

What is claimed is:

1. A luggage accessory, configured to expand a luggage body, comprising:

an expansion member, having a main body portion and at least one pocket portion that is connected to the main body portion and configured to accommodate articles, wherein the at least one pocket portion comprises a first pocket portion, the first pocket portion has a first use state and a second use state, in the first use state, the first pocket portion has a first opening located on a first side of the expansion member so that a user is able to put a first article from the first opening to a first cavity surrounded by a first surface of the first pocket portion, and in the second use state, the first pocket portion extends from the first side of the expansion member to form a second opening on a second side of the expansion member so that the user is able to put a second article from the second opening to a second cavity surrounded by a second surface of the pocket portion; and

a first connection structure, connected to the expansion member, and configured to be detachably connected to the luggage body so that the luggage accessory is capable of being detachably connected to the luggage body, wherein when the luggage accessory is connected to the luggage body, a first storage cavity is formed between the main body portion and the luggage body, the first pocket portion is located in the first storage cavity in the first use state, and the first pocket portion is located outside the first storage cavity in the second use state and communicates with the first storage cavity by using the second opening.

2. The luggage accessory according to claim 1, wherein the first pocket portion and the main body portion are formed by sewing a piece of fabric of an integral structure, the main body portion comprises a first part and a second part, a first edge of the first pocket portion and the first part are an integral structure, a second edge of the first pocket portion and the second part are an integral structure, a third edge of the first pocket portion is folded and overlapped and connected to a first side of the first connection structure, a fourth edge of the first pocket portion is folded and overlapped and connected to a second side of the first connection structure, and the first side and the second side are disposed back to back.

3. The luggage accessory according to claim 2, wherein the at least one pocket portion further comprises a second pocket portion, the second pocket portion, the main body portion, and the first pocket portion are formed by sewing a

same piece of fabric of an integral structure, the main body portion further comprises a third part, a first edge of the second pocket portion and the second part are an integral structure, a second edge of the second pocket portion and the third part are an integral structure, a third edge of the second pocket portion is folded and overlapped and connected to the first side of the first connection structure, and a fourth edge of the second pocket portion is folded and overlapped and connected to the second side of the first connection structure; and the second pocket portion is adjacent to the first pocket portion.

4. The luggage accessory according to claim 3, wherein the main body portion further comprises a bottom plate part, a first edge of the bottom plate part and the third part or the second part are an integral structure, a second edge of the bottom plate part is connected to a third side of the first connection structure, the third side of the first connection structure is a bottom side and connected between the first side of the first connection structure and the second side of the first connection structure, a third edge of the bottom plate part is connected to one end of the third part, and a fourth edge of the bottom plate part is connected to the other end of the third part.

5. The luggage accessory according to claim 3, wherein the first connection structure further comprises a fourth side connected between the first side of the first connection structure and the second side of the first connection structure, the third side of the first connection structure and the fourth side of the first connection structure are disposed back to back, and the fourth side of the first connection structure comprises a first subpart and a second subpart; the first part comprises a first edge that connects an upper portion of the first side of the first connection structure to the first subpart and a second edge that connects an upper portion of the second side of the first connection structure to the second subpart, a top of the first edge is connected to a top of the second edge, the first part further comprises a first inner edge and a second inner edge, a first end of the first inner edge is connected to a first end of the second inner edge, a second end of the first inner edge is connected to a second end of the second inner edge, the second end of the first inner edge is further connected to a joint between the first edge and the second edge, a second end of the second inner edge is also connected to the joint between the first edge and the second edge, the luggage accessory further comprises a second connection structure, the second connection structure is configured to detachably connect the first inner edge to the second inner edge, when the first inner edge is separated from the second inner edge, a third opening is formed between the first inner edge and the second inner edge, and the third opening is configured to communicate with the first storage cavity for a user to take and put articles from the third opening.

6. The luggage accessory according to claim 5, wherein the first connection structure comprises a first zipper part, the luggage body comprises a second zipper part, the first zipper part and the second zipper part are detachably connected by using a first zipper head; and the second connection structure comprises a third zipper part connected to the first inner edge and a fourth zipper part connected to the second inner edge, and the fourth zipper part and the third zipper part are detachably connected by using a second zipper head.

7. The luggage accessory according to claim 2, wherein a first connector is disposed between the first pocket portion and the first part, a second connector is disposed between the first pocket portion and the second part, and the first connector and the second connector are detachably connected to close or open the first opening; and the first connector is a fifth zipper part, the second connector is a sixth zipper part, and the fifth zipper part and the sixth zipper part are detachably connected by using a third zipper head.

8. The luggage accessory according to claim 3, wherein a third connector is disposed between the second pocket portion and the second part, a fourth connector is disposed between the second pocket portion and the third part, and the third connector and the fourth connector are detachably connected to close or open the second pocket portion; and the third connector is a seventh zipper part, the fourth connector is an eighth zipper part, and the seventh zipper part and the eighth zipper part are detachably connected by using a fourth zipper head.

9. The luggage accessory according to claim 1, wherein the expansion member is made of an elastic fabric, and the expansion member is configured to be deformed under the action of an external force; and the elastic fabric has a stretchable ratio of 1:1.3 in horizontal and longitudinal directions.

10. The luggage accessory according to claim 1, wherein the main body portion and/or the pocket portion are provided with a printed layer, and the printed layer has character, animal or cartoon facial feature patterns.

11. A luggage assembly, comprising a luggage body and a luggage accessory detachably connected to the luggage body, the luggage accessory being configured to expand the luggage body, wherein the luggage accessory comprises:

an expansion member, having a main body portion and at least one pocket portion that is connected to the main body portion and configured to accommodate articles, wherein the at least one pocket portion comprises a first pocket portion, the first pocket portion has a first use state and a second use state, in the first use state, the first pocket portion has a first opening located on a first side of the expansion member so that a user is able to put a first article from the first opening to a first cavity surrounded by a first surface of the first pocket portion, and in the second use state, the first pocket portion extends from the first side of the expansion member to form a second opening on a second side of the expansion member so that the user is able to put a second article from the second opening to a second cavity surrounded by a second surface of the pocket portion; and

a first connection structure, connected to the expansion member, and configured to be detachably connected to the luggage body so that the luggage accessory is capable of being detachably connected to the luggage body, wherein when the luggage accessory is connected to the luggage body, a first storage cavity is formed between the main body portion and the luggage body, the first pocket portion is located in the first storage cavity in the first use state, and the first pocket portion is located outside the first storage cavity in the second use state and communicates with the first storage cavity by using the second opening.

12. The luggage assembly according to claim 11, wherein the luggage body comprises a back plate assembly, and the

luggage accessory is configured to be detachably connected to the back plate assembly; a waterproof inter layer and/or a waterproof bag are disposed on one side, close to the luggage accessory, of the back plate assembly; the back plate assembly has a second storage cavity; at least one of the first storage cavity and the second storage cavity is filled with a filler to form a pillow; and the back plate assembly comprises a back plate body and the waterproof inter layer detachably connected to at least a part of the back plate body by using a second connection structure, and the back plate body and the waterproof inter layer are surrounded to form the second storage cavity.

13. The luggage assembly according to claim 11, wherein the first pocket portion and the main body portion are formed by sewing a piece of fabric of an integral structure, the main body portion comprises a first part and a second part, a first edge of the first pocket portion and the first part are an integral structure, a second edge of the first pocket portion and the second part are an integral structure, a third edge of the first pocket portion is folded and overlapped and connected to a first side of the first connection structure, a fourth edge of the first pocket portion is folded and overlapped and connected to a second side of the first connection structure, and the first side and the second side are disposed back to back.

14. The luggage assembly according to claim 13, wherein the at least one pocket portion further comprises a second pocket portion, the second pocket portion, the main body portion, and the first pocket portion are formed by sewing a same piece of fabric of an integral structure, the main body portion further comprises a third part, a first edge of the second pocket portion and the second part are an integral structure, a second edge of the second pocket portion and the third part are an integral structure, a third edge of the second pocket portion is folded and overlapped and connected to the first side of the first connection structure, and a fourth edge of the second pocket portion is folded overlapped and connected to the second side of the first connection structure; and the second pocket portion is adjacent to the first pocket portion.

15. The luggage assembly according to claim 14, wherein the main body portion further comprises a bottom plate part, a first edge of the bottom plate part and the third part or the second part are an integral structure, a second edge of the bottom plate part is connected to a third side of the first connection structure, the third side of the first connection structure is a bottom side and connected between the first side of the first connection structure and the second side of the first connection structure, a third edge of the bottom plate part is connected to one end of the third part, and a fourth edge of the bottom plate part is connected to the other end of the third part.

16. The luggage assembly according to claim 14, wherein the first connection structure further comprises a fourth side connected between the first side of the first connection structure and the second side of the first connection structure, the third side of the first connection structure and the fourth side of the first connection structure are disposed back to back, and the fourth side of the first connection structure comprises a first subpart and a second subpart; the first part

comprises a first edge that connects an upper portion of the first side of the first connection structure to the first subpart and a second edge that connects an upper portion of the second side of the first connection structure to the second subpart, a top of the first edge is connected to a top of the second edge, the first part further comprises a first inner edge and a second inner edge, a first end of the first inner edge is connected to a first end of the second inner edge, a second end of the first inner edge is connected to a second end of the second inner edge, the second end of the first inner edge is further connected to a joint between the first edge and the second edge, a second end of the second inner edge is also connected to the joint between the first edge and the second edge, the luggage accessory further comprises a second connection structure, the second connection structure is configured to detachably connect the first inner edge to the second inner edge, when the first inner edge is separated from the second inner edge, a third opening is formed between the first inner edge and the second inner edge, and the third opening is configured to communicate with the first storage cavity for a user to take and put articles from the third opening.

17. The luggage assembly according to claim 16, wherein the first connection structure comprises a first zipper part, the luggage body comprises a second zipper part, the first zipper part and the second zipper part are detachably connected by using a first zipper head; and the second connection structure comprises a third zipper part connected to the first inner edge and a fourth zipper part connected to the second inner edge, and the fourth zipper part and the third zipper part are detachably connected by using a second zipper head.

18. The luggage assembly according to claim 13, wherein a first connector is disposed between the first pocket portion and the first part, a second connector is disposed between the first pocket portion and the second part, and the first connector and the second connector are detachably connected to close or open the first opening; and the first connector is a fifth zipper part, the second connector is a sixth zipper part, and the fifth zipper part and the sixth zipper part are detachably connected by using a third zipper head.

19. The luggage assembly according to claim 14, wherein a third connector is disposed between the second pocket portion and the second part, a fourth connector is disposed between the second pocket portion and the third part, and the third connector and the fourth connector are detachably connected to close or open the second pocket portion; and the third connector is a seventh zipper part, the fourth connector is an eighth zipper part, and the seventh zipper part and the eighth zipper part are detachably connected by using a fourth zipper head.

20. The luggage assembly according to claim 11, wherein the expansion member is made of an elastic fabric, and the expansion member is configured to be deformed under the action of an external force; the elastic fabric has a stretchable ratio of 1:1.3 in horizontal and longitudinal directions; and the main body portion and/or the pocket portion are provided with a printed layer, and the printed layer has character, animal or cartoon facial feature patterns.

* * * * *