



US 20250283314A1

(19) **United States**(12) **Patent Application Publication**
Iwao et al.(10) **Pub. No.: US 2025/0283314 A1**(43) **Pub. Date: Sep. 11, 2025**(54) **FAUCET DEVICE****Publication Classification**(71) Applicant: **TOTO LTD.**, Kitakyushu-shi (JP)(72) Inventors: **Enisei Iwao**, Fukuoka (JP); **Rei Tsubone**, Fukuoka (JP); **Junsei Idegomi**, Fukuoka (JP)(51) **Int. Cl.**
E03C 1/05 (2006.01)
F16K 11/07 (2006.01)
(52) **U.S. Cl.**
CPC *E03C 1/055* (2013.01); *F16K 11/07* (2013.01)(21) Appl. No.: **19/059,675**(22) Filed: **Feb. 21, 2025**(30) **Foreign Application Priority Data**Mar. 8, 2024 (JP) 2024-036268
Jun. 12, 2024 (JP) 2024-094823(57) **ABSTRACT**

A faucet device according to an embodiment include a water spout part, a hot water and cold water mixing part, an actuator, a controller, and an operation unit. The hot water and cold water mixing part includes a body casing, a thermo-sensitive energizing part, and a valve body. In receiving information on a set temperature, the controller drives the actuator to a predetermined position or by a predetermined drive amount which is corresponding to the set temperature to adjust a position of the valve body in an axial direction of the valve body.

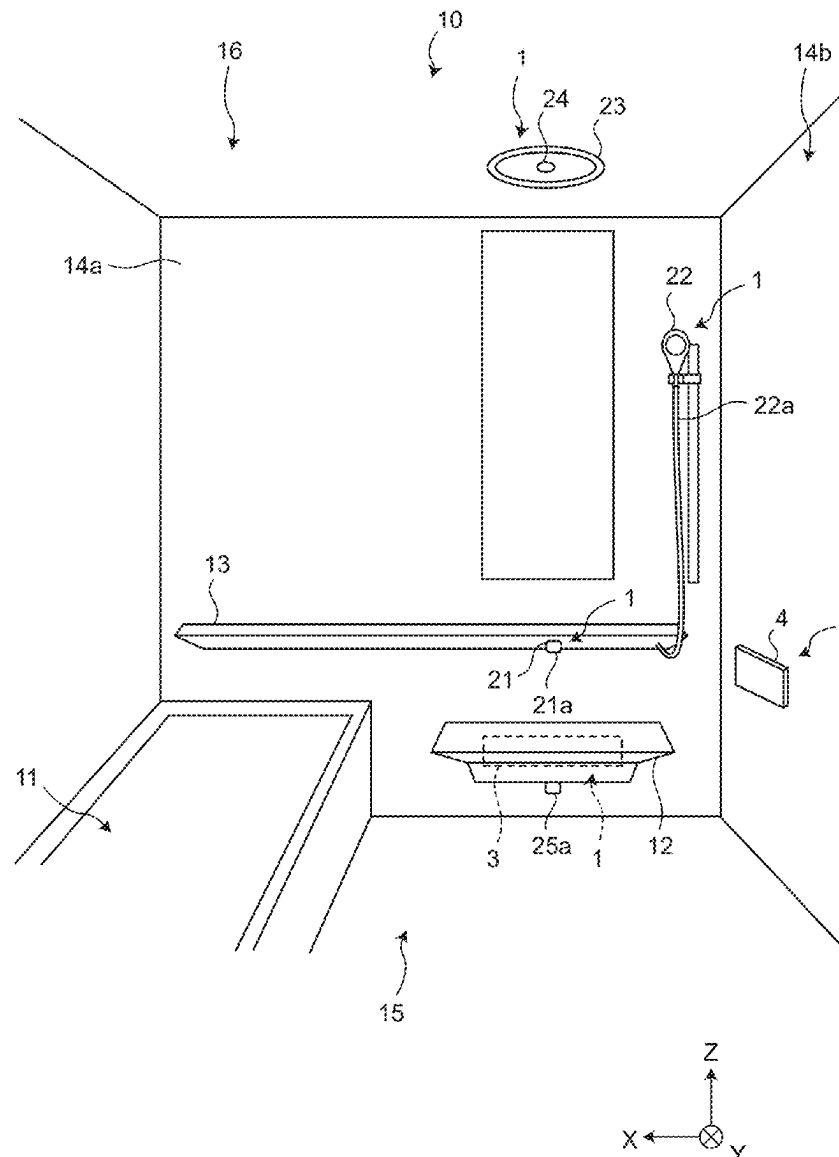


FIG.1

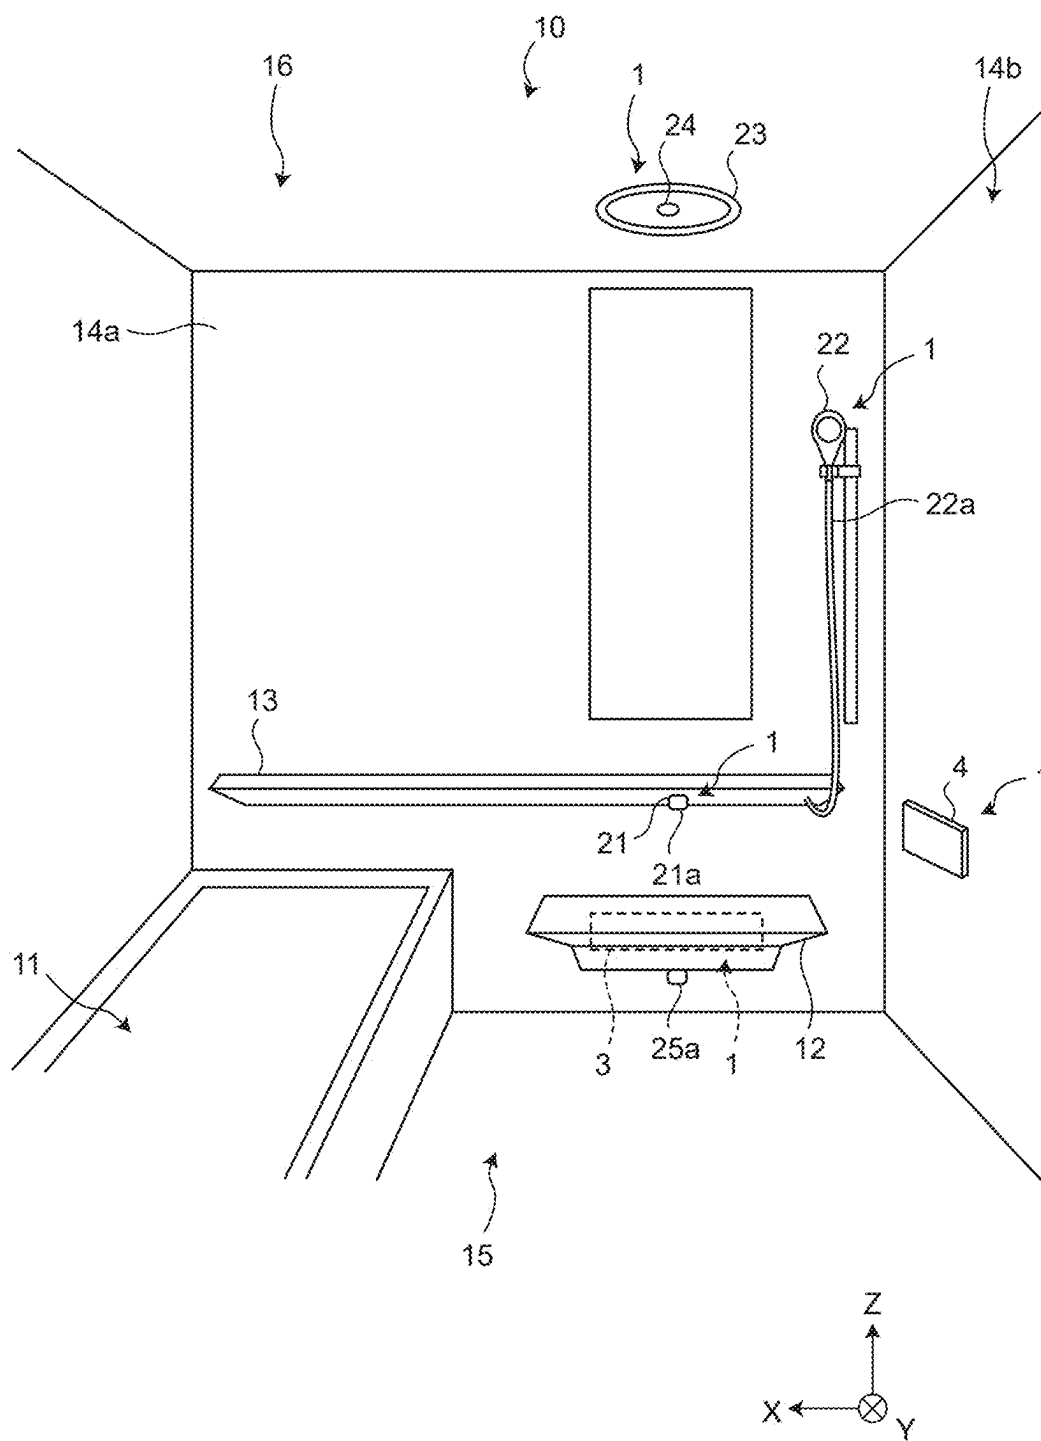


FIG.2

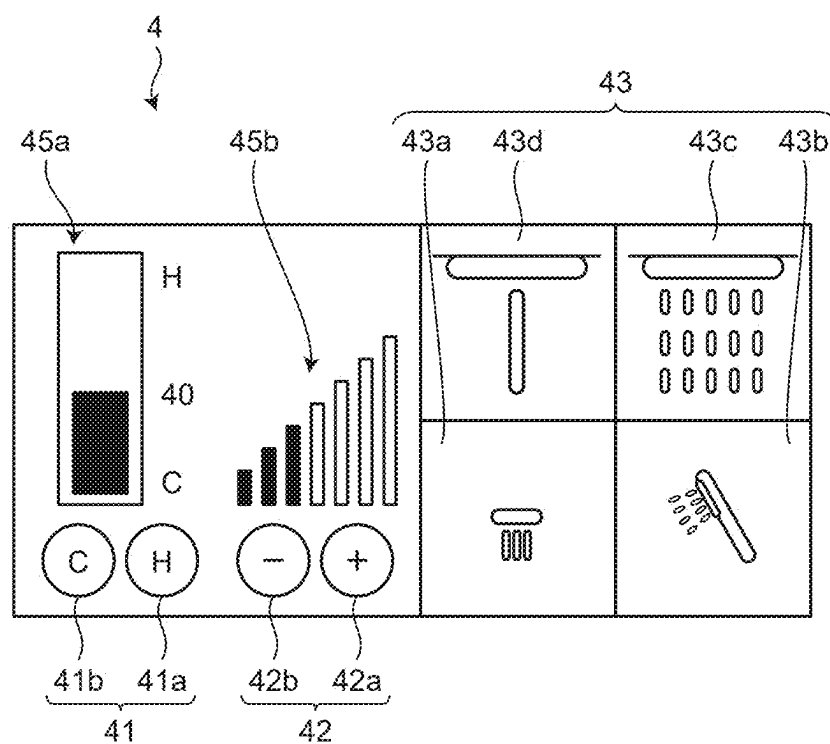
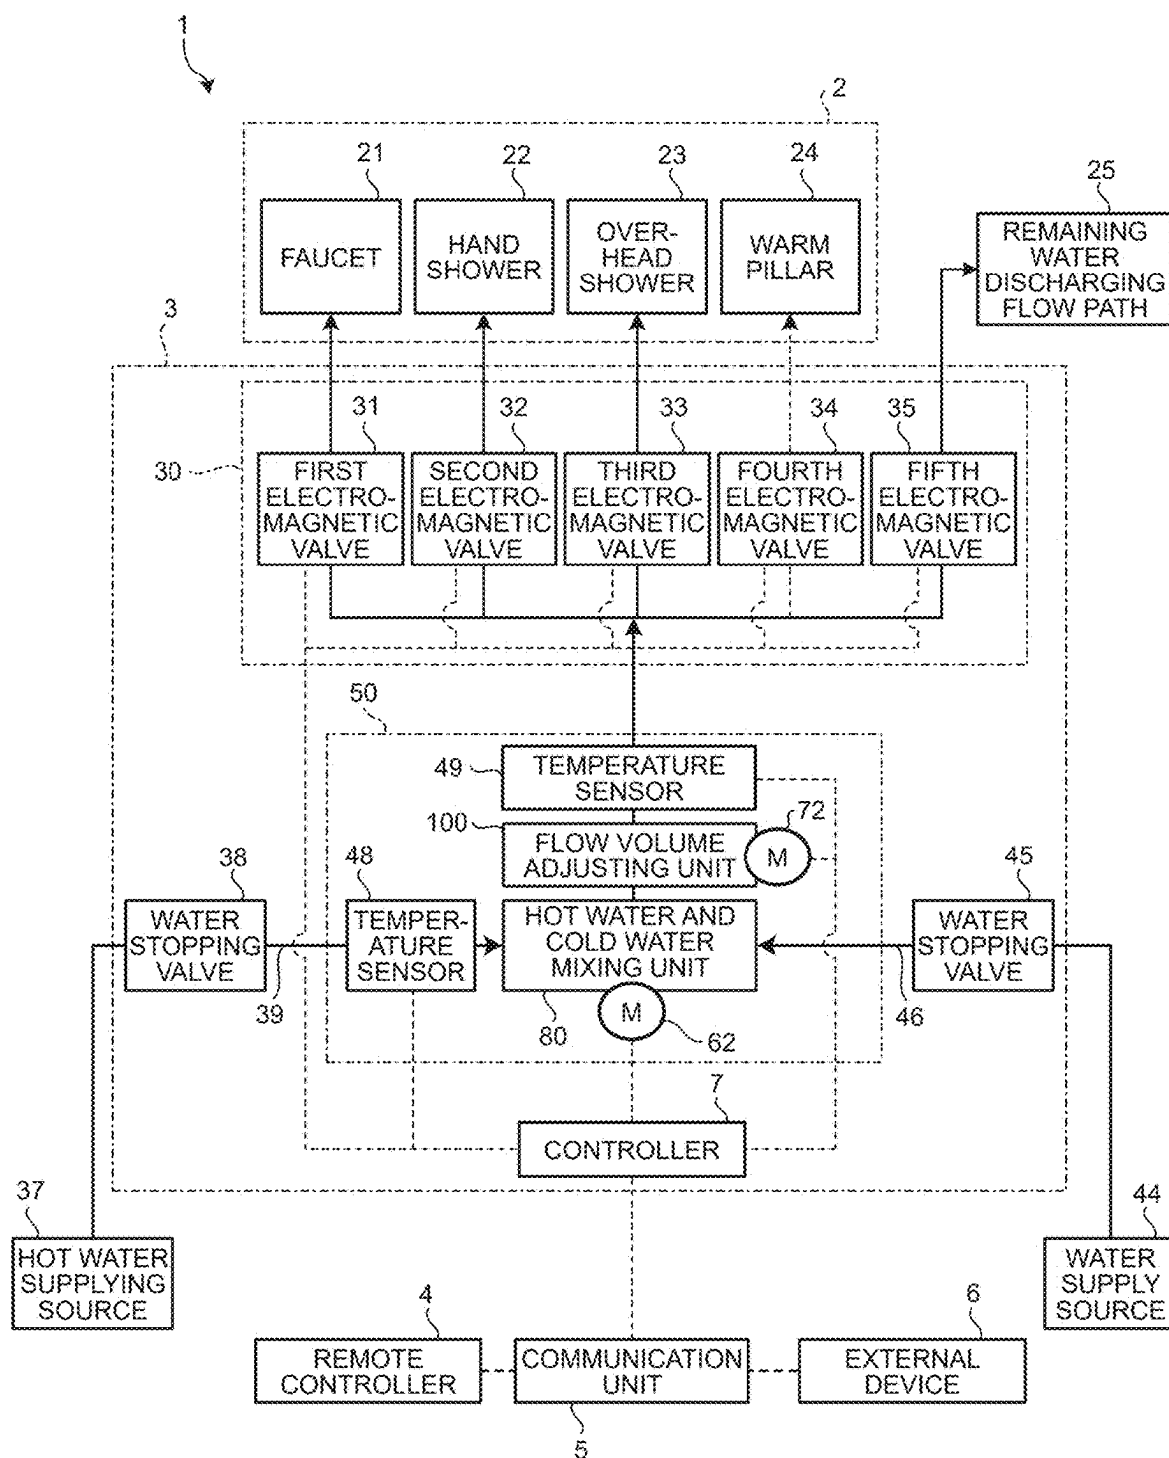


FIG.3



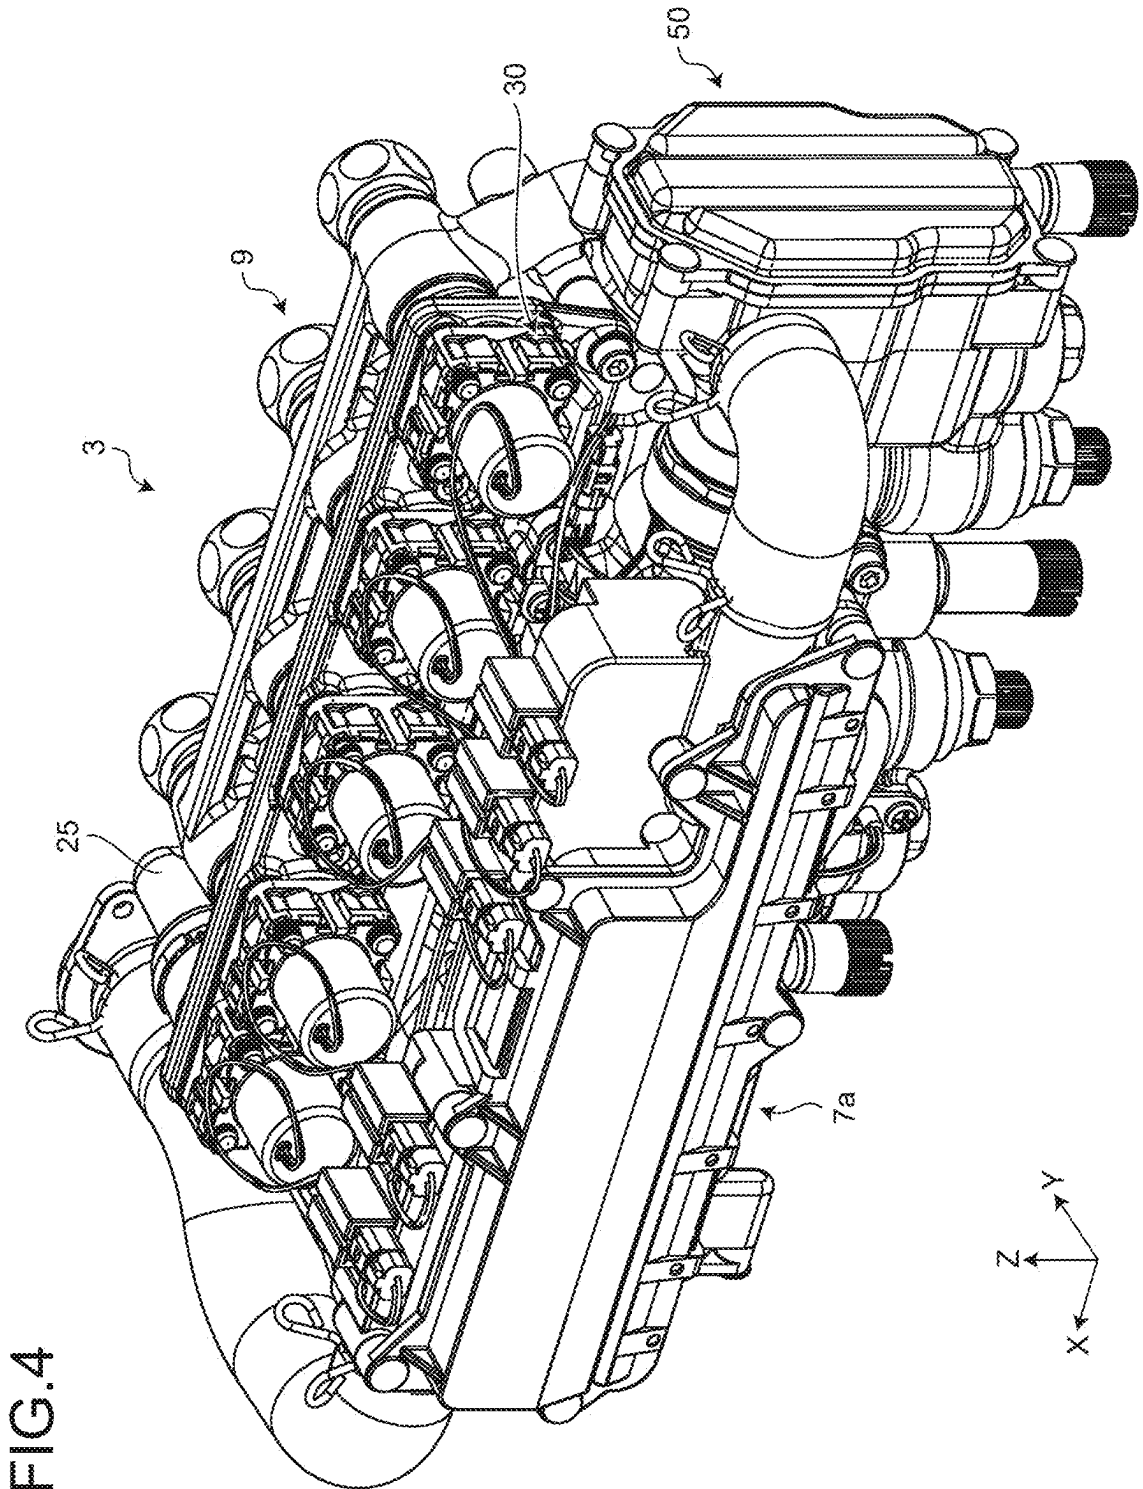


FIG.5

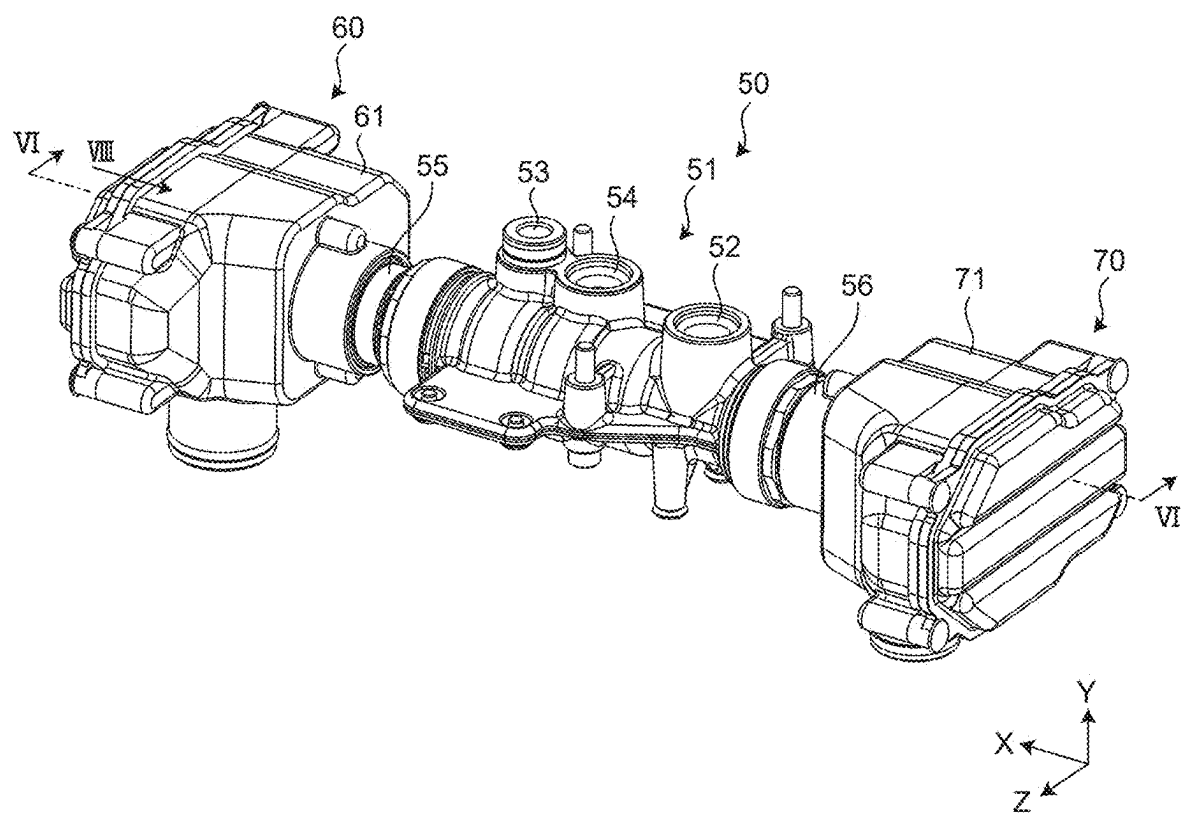


FIG.6

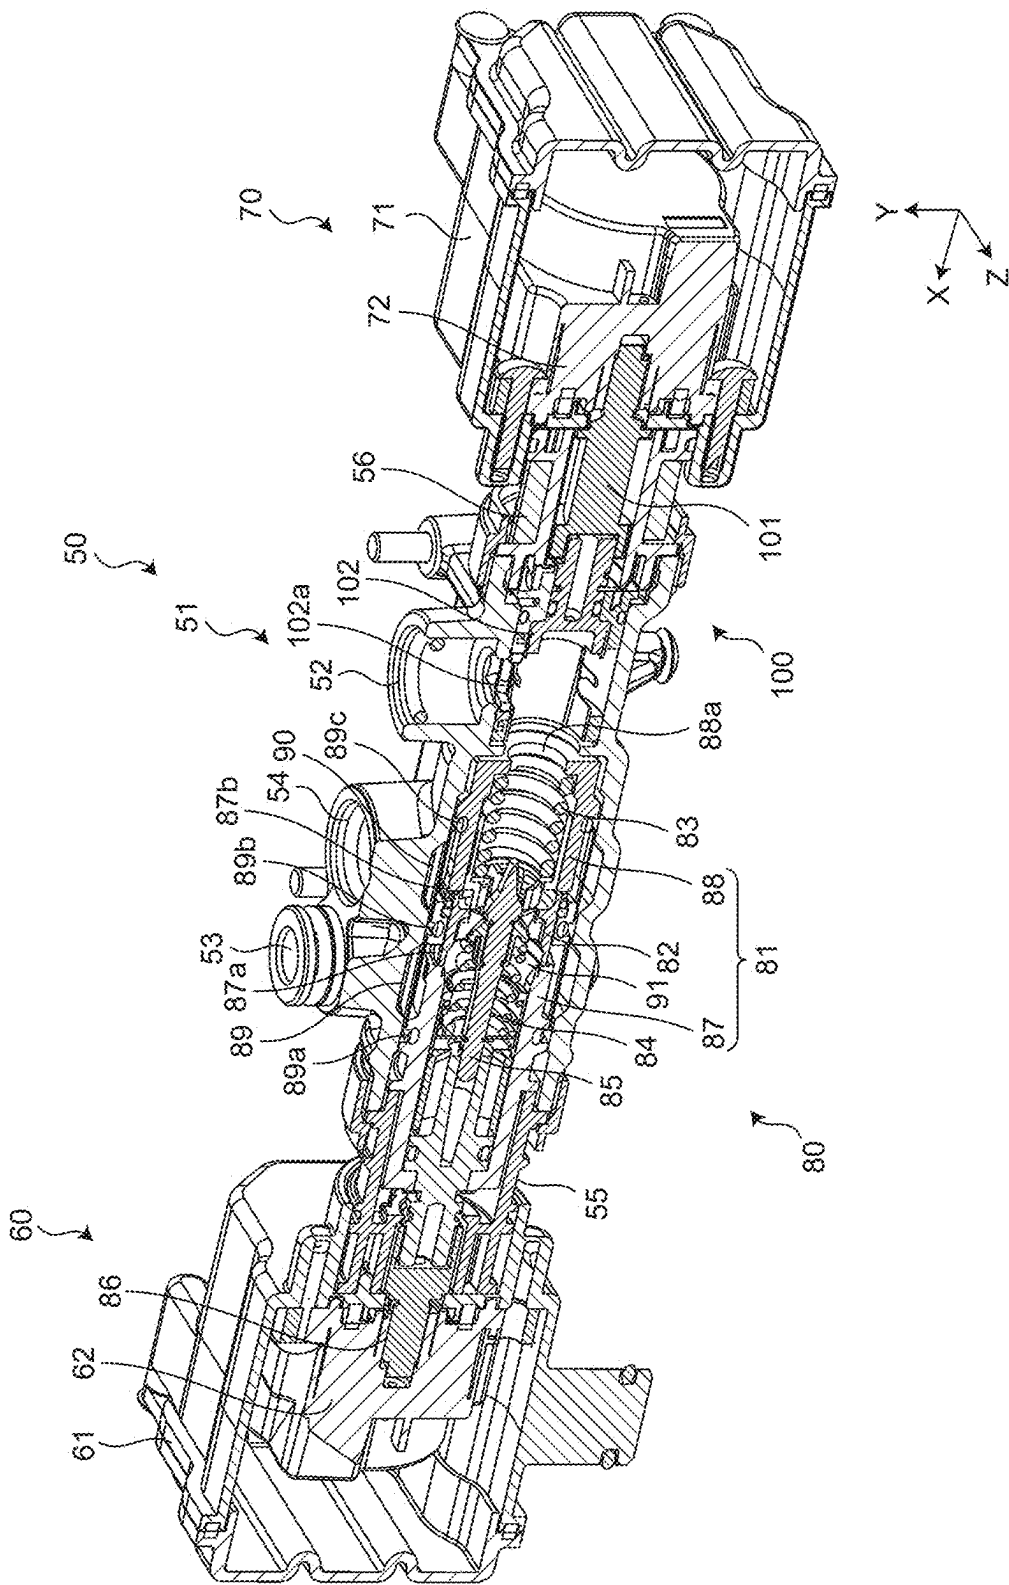


FIG.7

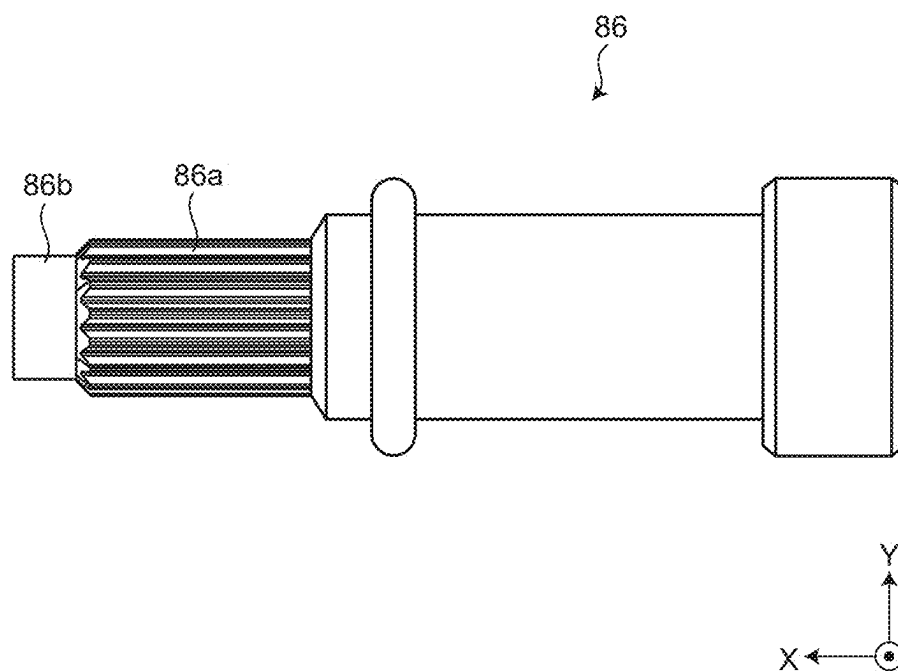


FIG.8


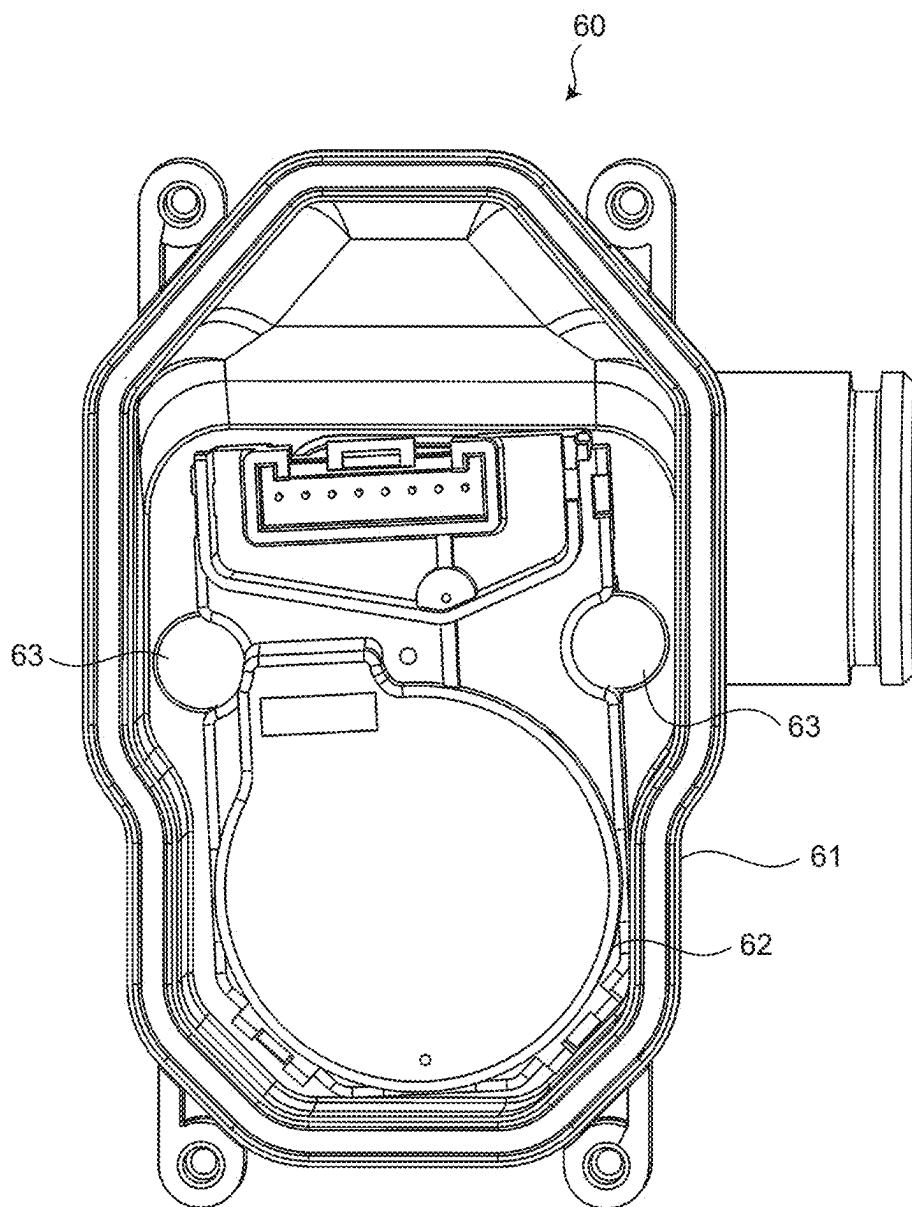


FIG.9

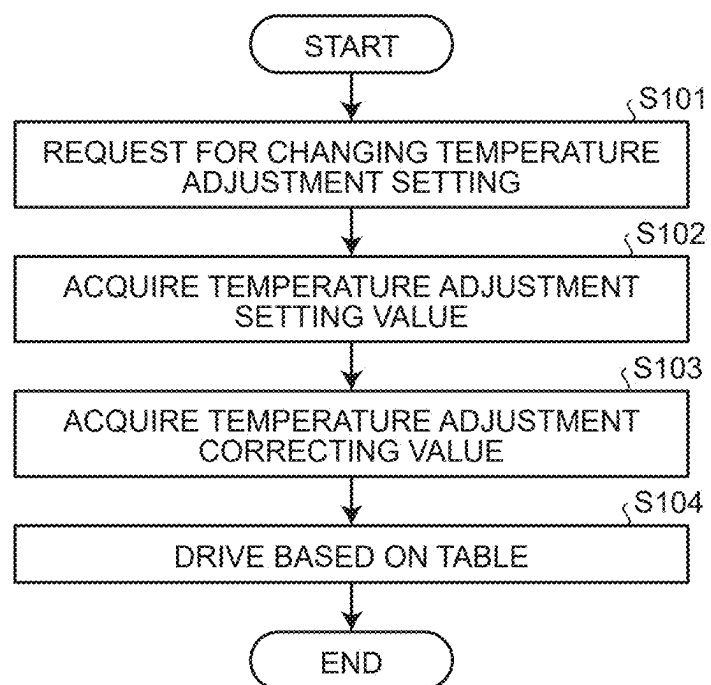


FIG.10

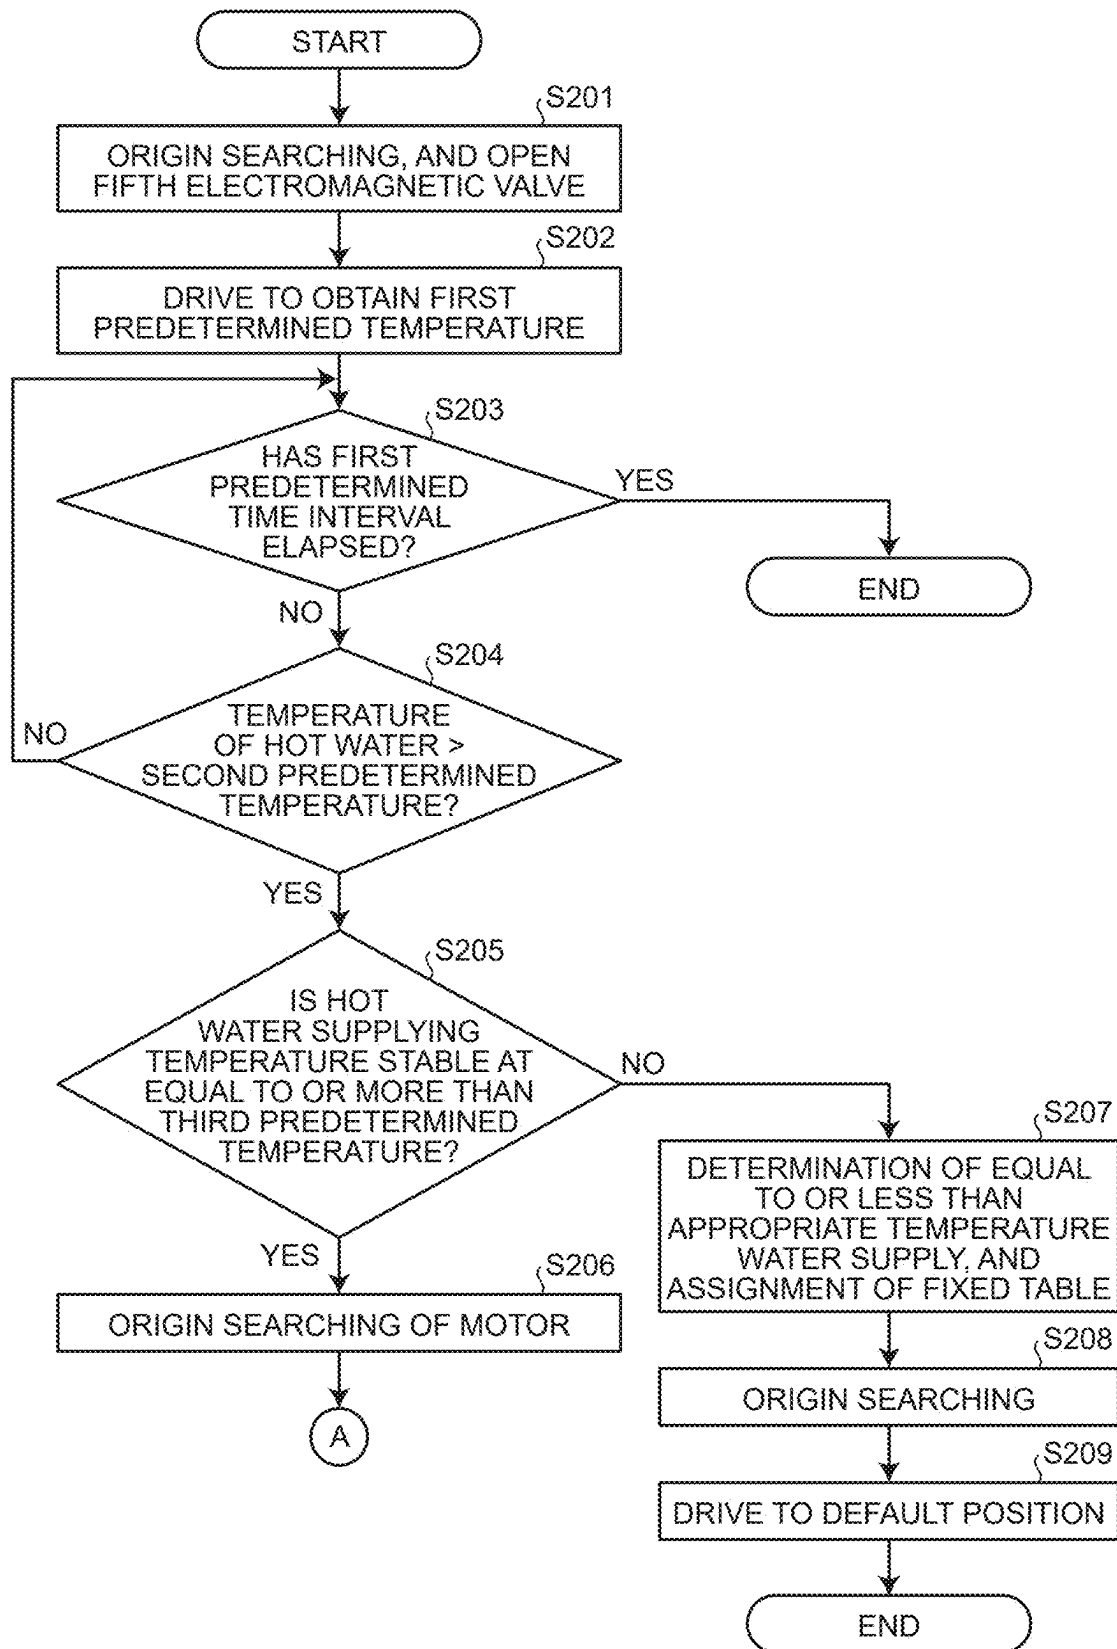


FIG.11

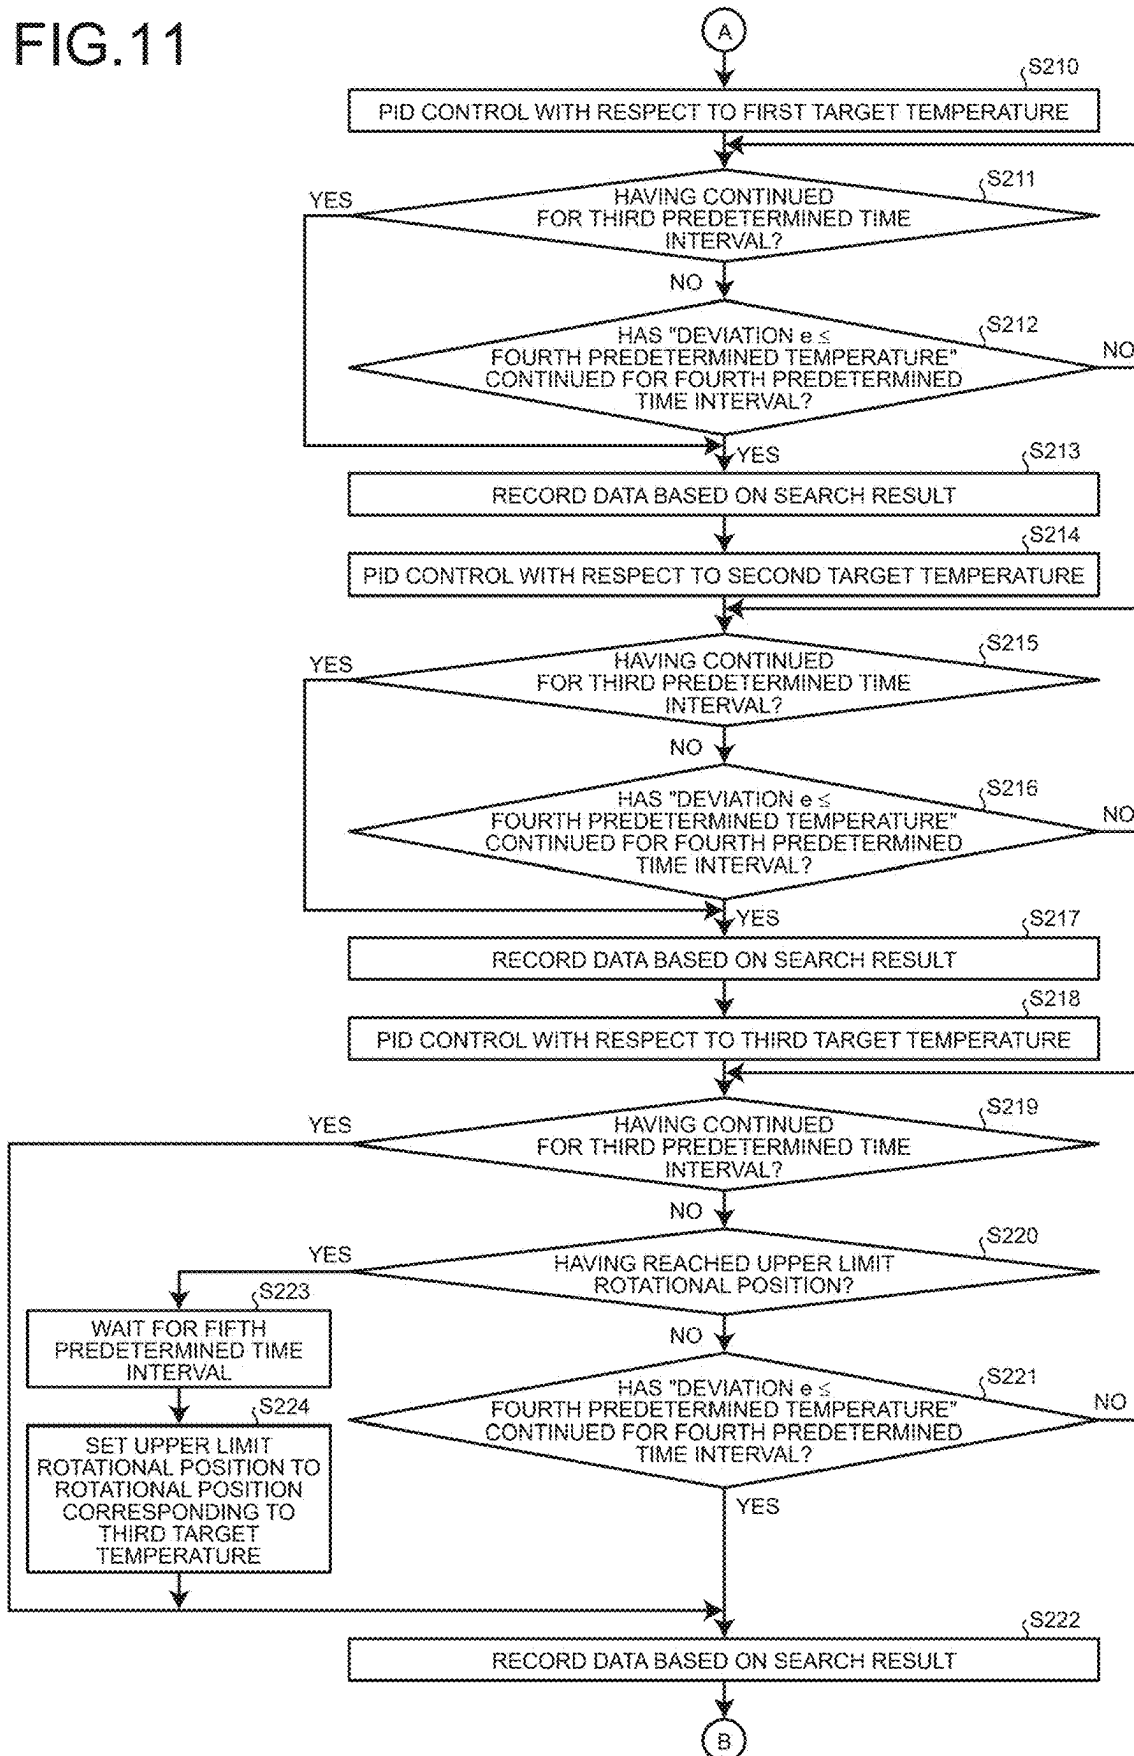


FIG.12

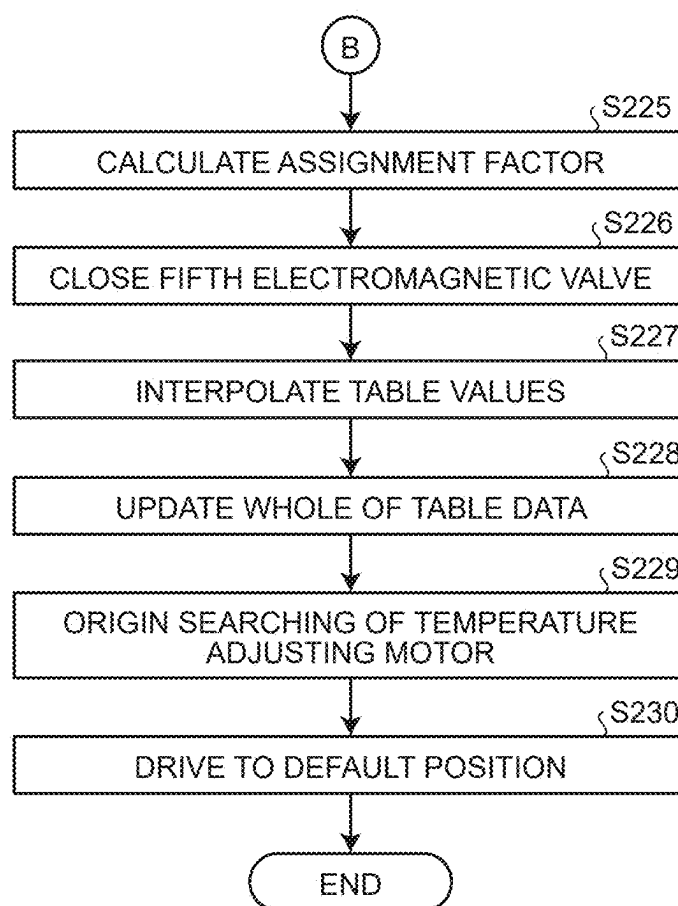


FIG.13

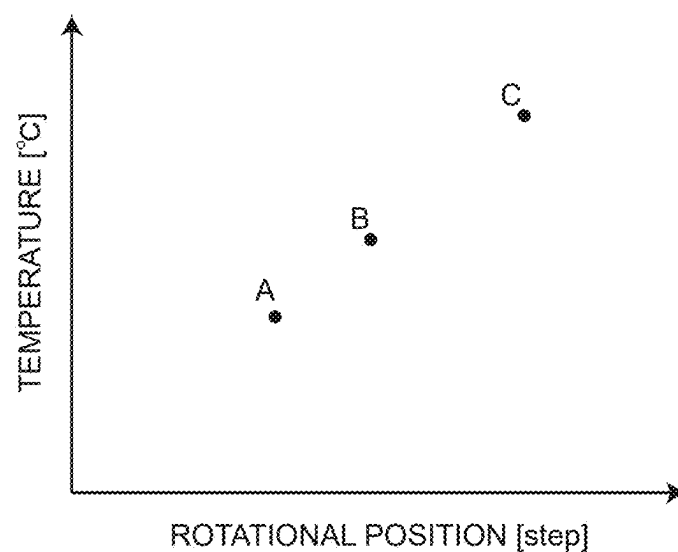


FIG.14


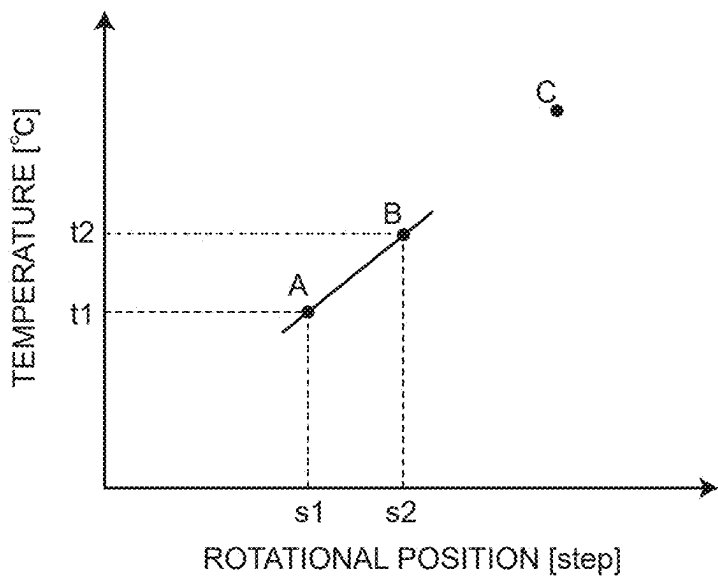


FIG.15

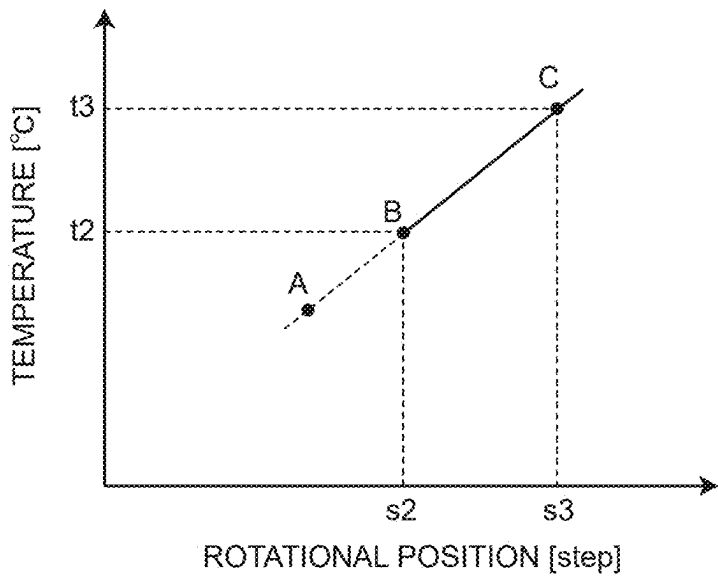

FAUCET DEVICE

CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] This application is based upon and claims the benefit of priority of the prior Japanese Patent Application No. 2024-036268, filed on Mar. 8, 2024 and Japanese Patent Application No. 2024-094823, filed on Jun. 12, 2024, the entire contents of which are incorporated herein by reference.

FIELD

[0002] Embodiment of the disclosure relates to a faucet device.

BACKGROUND

[0003] Conventionally, there has been known a faucet device that is configured to execute feedback control for adjusting a spout water temperature (see Japanese Laid-Open Patent Publication No. 2015-113579).

[0004] In the conventional technology, in a case where temperature controlling is performed with the use of feedback control, an actuator drives for controlling a valve body in some cases even in a case where a set temperature during spouting water is constant. Thus, there has been a problem that driving sounds of the actuator give unpleasant feeling to a user.

SUMMARY

[0005] A faucet device according to one aspect of an embodiment includes: a water spout part that spouts water towards an interior of a bathroom; a hot water and cold water mixing unit that mixes hot water and cold water to be supplied to the water spout part; an actuator that causes the hot water and cold water mixing unit to operate; a controller configured to control driving of the actuator; and an operation unit configured to transmit information on a set temperature to the controller based on an operation of a user, wherein the hot water and cold water mixing unit includes: a body casing in which a cold water inlet, a hot water inlet, and a mixed hot water and cold water outlet are formed; a thermo-sensitive energizing part whose energizing force changes in accordance with a temperature of mixed hot water to be capable of adjusting open degrees of the hot water inlet and the cold water inlet; and a valve body that is incorporated into the body casing to be able to slide along an axial direction of the body casing to adjust the open degrees of the hot water inlet and the cold water inlet, and the controller is further configured to: in receiving the information on the set temperature, drive the actuator to a predetermined position or by a predetermined drive amount which is corresponding to the set temperature to adjust a position of the valve body in an axial direction of the valve body.

[0006] In the faucet device, temperature adjustment is executed by the thermo-sensitive spring, and thus the actuator does not drive for controlling the valve body other than a case where changing a set temperature. Therefore, the faucet device is capable of reducing a case where driving sounds of the actuator give unpleasant feeling to a user. Even in a case where spontaneous temperature adjustment is performed by the thermo-sensitive energizing part, feedback control based on result of the temperature adjustment is further executed, there presents possibility that the sponta-

neous temperature adjustment is inhibited so that a spout water temperature does not stabilize. By employing temperature controlling according to the present disclosure, it is possible to sufficiently exert performance in spontaneous temperature adjustment by the thermo-sensitive energizing part.

[0007] The controller is further configured to: fix an open degree of the valve body until next changing the set temperature after changing the set temperature.

[0008] The faucet device is capable of more reducing unpleasant feeling due to driving sounds of the actuator until a command for changing setting next reaches after changing setting of a set temperature.

[0009] The controller is further configured to: drive the actuator until next changing the set temperature after changing the set temperature, not to change an open degree of the valve body.

[0010] The faucet device is capable of more reducing unpleasant feeling due to driving sounds (namely, operation sounds) of the actuator until a command for changing setting next reaches after changing setting of a set temperature.

[0011] The actuator includes a motor, and the controller is further configured to: release excitation of the motor after driving the motor to the predetermined position or by the predetermined drive amount.

[0012] The faucet device stops energization of the motor so as to release excitation thereof after driving the motor. Thus, the faucet device is capable of reducing increase in power consumption and heat generation of the motor.

[0013] The motor includes a stepping motor, and the stepping motor and the valve body are fixed in an aligned state.

[0014] In the faucet device, the motor and the temperature adjusting valve are previously aligned, even in a case where feedback control is not executed in spouting water, it is possible to precisely spout water at a target set temperature. Thus, the faucet device is capable of improving feeling in use of a user.

[0015] Further including a temperature sensor that detects a water temperature, wherein the water spout part includes: a first water spout part; and a second water spout part that is arranged in a position lower than the first water spout part, and the controller is further configured to: in a case where a water temperature detected by the temperature sensor during spouting water is equal to or more than a predetermined temperature, execute controlling for spouting water from the second water spout part.

[0016] In the faucet device, in a case where the temperature sensor detects a high temperature, a user is able to easily recognize whether or not the faucet device has failed and whether or not the temperature is temporarily unstable in comparison with a case where water is stopped. Moreover, the faucet device spouts water from the second water spout part that is located below the first water spout part so that it is possible to reduce a case where a user takes a large amount of hot water spouted from the water spout part when the temperature sensor detects a high temperature.

[0017] Further including a temperature sensor that detects a water temperature, wherein the controller is further configured to: in a case where a water temperature detected by the temperature sensor during spouting water is equal to or more than a predetermined temperature, drive the actuator such that the valve body moves in a direction for reducing an open degree of the hot water inlet.

[0018] In the faucet device, in a case where the temperature sensor detects a high temperature, a user is able to easily recognize whether or not the faucet device has failed and whether or not the temperature is temporarily unstable in comparison with a case where water is stopped. Moreover, the faucet device spouts water from the second water spout part that is located below the first water spout part so that it is possible to reduce a case where a user takes a large amount of hot water spouted from the water spout part when the temperature sensor detects a high temperature.

[0019] In a case where being continuously operated within a predetermined time interval to increase the set temperature, the operation unit regulates change in the set temperature into a temperature that is equal to or more than a predetermined temperature.

[0020] When a user changes a set temperature, the operation unit does not transmit, to the controller, a signal for changing setting which is continuously performed within a predetermined time interval, so that the faucet device is capable of preventing a set temperature from rising up to a not-intended temperature. Thus, the faucet device is capable of improving the safety.

[0021] The controller is further configured to: be capable of executing a calibration mode for adjusting setting of the predetermined position or the predetermined drive amount in accordance with at least one of an arrangement environment and product unevenness, the actuator includes a motor, and the controller is further configured to: drive the motor while spouting water from the water spout part to execute the calibration mode; and during the calibration mode, release excitation of the motor after driving the motor.

[0022] The faucet device stops energization of the motor so as to release excitation thereof after driving the motor. Thus, the faucet device is capable of reducing increase in power consumption and heat generation of the motor.

BRIEF DESCRIPTION OF DRAWING(S)

[0023] FIG. 1 is a schematic diagram illustrating one example a bath unit in which a faucet device is arranged according to an embodiment;

[0024] FIG. 2 is a front view illustrating a remote controller according to the embodiment;

[0025] FIG. 3 is a block diagram illustrating the outline of a faucet device according to the embodiment;

[0026] FIG. 4 is a perspective view illustrating a faucet body;

[0027] FIG. 5 is a perspective view illustrating a combination faucet unit;

[0028] FIG. 6 is a perspective cross sectional view taken along a line VI-VI illustrated in FIG. 5;

[0029] FIG. 7 is a side view illustrating a spindle;

[0030] FIG. 8 is a diagram illustrating an inner part of a temperature adjusting side motor unit viewed along a direction VIII illustrated in FIG. 5;

[0031] FIG. 9 is a flowchart illustrating a processing procedure for temperature controlling;

[0032] FIG. 10 is a flowchart illustrating a processing procedure for an initial process and a supplied hot water temperature determining process in a calibration mode;

[0033] FIG. 11 is a flowchart illustrating a processing procedure for a normal optimizing process in the calibration mode;

[0034] FIG. 12 is a flowchart illustrating a processing procedure for a temperature adjustment table assigning process in the calibration mode;

[0035] FIG. 13 is a diagram illustrating calculation of an assignment factor;

[0036] FIG. 14 is a diagram illustrating calculation of an assignment factor; and

[0037] FIG. 15 is a diagram illustrating calculation of an assignment factor.

DESCRIPTION OF EMBODIMENT(S)

[0038] As illustrated in FIG. 1, a faucet device 1 according to an embodiment is arranged in a bath unit 10, for example. FIG. 1 is a schematic diagram illustrating one example the bath unit 10 in which the faucet device 1 is arranged according to the embodiment.

[0039] An illustrated orthogonal coordinate system prescribes the positive direction of an X-axis as “left direction”, and further prescribes the negative direction of the X-axis as “right direction”. The orthogonal coordinate system prescribes the positive direction of a Y-direction as “back direction”, and further prescribes the negative direction of the Y-direction as “front direction”. The orthogonal coordinate system prescribes the positive direction of a Z-axis as “upward”, and further prescribes the negative direction of the Z-axis as “downward”. Therefore, in the following explanation, an X-axis direction may be referred to as a left-right direction, a Y-axis direction may be referred to as a front-back direction, and a Z-axis direction may be referred to as an up-and-down direction.

[0040] The bath unit 10 includes a bathtub 11, a first counter 12, a second counter 13, and the faucet device 1. Note that in the following, in a case where not differentiating cold water spouted from the faucet device 1, and mixed hot water obtained by mixing hot water and cold water with each other to be spouted from the faucet device 1, they are comprehensively referred to as “warm/cold water”.

[0041] The first counter 12 is attached to a wall part 14a of the bath unit 10. The first counter 12 protrudes towards the interior of a bathroom from the wall part 14a. The first counter 12 is arranged above a washing place floor 15 of the bath unit 10. The first counter 12 houses therein a faucet body 3 of the faucet device 1. A hot water waiting water spout port 25a is arranged at a lower end of the first counter 12. The hot water waiting water spout port 25a is arranged in the first counter 12 such that a water spouting direction of warm/cold water is downward.

[0042] The second counter 13 is attached to the wall part 14a. The second counter 13 protrudes towards the interior of the bathroom from the wall part 14a. The second counter 13 is arranged above the first counter 12. For example, the second counter 13 extends over the bathtub 11. Note that it is sufficient that the second counter 13 does not extend over the bathtub 11.

[0043] The second counter 13 houses therein a part of the faucet device 1. Specifically, the second counter 13 houses therein a part of a faucet 21 in the faucet device 1, and a part of a hand shower 22 in the faucet device 1. A water spout port 21a of the faucet 21 is arranged in the second counter 13 to be exposed therefrom. The water spout port 21a of the faucet 21 is arranged in the second counter 13 such that a water spouting direction of warm/cold water is downward.

[0044] A shower hose 22a of the hand shower 22 in the faucet device 1 is connected with the second counter 13. The

shower hose **22a** is connected to a shower water guiding channel housed in the second counter **13**.

[0045] To a ceiling **16** of the bath unit **10**, an overhead shower **23** of the faucet device **1** and a warm pillar **24** of the faucet device **1** are attached. The overhead shower **23** and the warm pillar **24** are integrally configured.

[0046] The overhead shower **23** spouts warm/cold water towards a broad range of a user that is broader than a case of the hand shower **22**. For example, the overhead shower **23** is configured such that warm/cold water falls on the whole body of a user. The warm pillar **24** collects and arranges warm/cold water into a single water flow so as to spout it therefrom. In other words, the warm pillar **24** arranges and spouts warm/cold water such that consecutive warm/cold water falls down in a columnar manner.

[0047] A remote controller **4** (namely, operation unit) of the faucet device **1** is attached to a wall part **14b** of the bath unit **10**. The remote controller **4** may be attached to the wall part **14a** to which the first counter **12** and the second counter **13** are attached.

[0048] The remote controller **4** receives various operations of a user with respect to the faucet body **3**. Specifically, the remote controller **4** receives a setting operation of a temperature (namely, set temperature) of warm/cold water in the faucet body **3**. The remote controller **4** receives a setting operation of a flow volume of warm/cold water in the faucet body **3**. The remote controller **4** receives a switching operation between spouting and stopping of warm/cold water. The remote controller **4** receives a switching operation of a water spouting part of warm/cold water. The remote controller **4** includes a sound outputting unit so as to output a sound. In a case where being operated by a user, the remote controller **4** transmits an operation signal according to a corresponding operation to a controller **7** (see FIG. 3) of the faucet device **1**.

[0049] For example, as illustrated in FIG. 2, the remote controller **4** includes a temperature adjusting button **41**, a water amount adjusting button **42**, and a switching button **43**. FIG. 2 is a front view illustrating the remote controller **4** according to the embodiment.

[0050] The temperature adjusting button **41** is a button for adjusting a temperature of mixed hot water in the faucet body **3**. The temperature adjusting button **41** includes a high temperature button **41a** and a low temperature button **41b**. The high temperature button **41a** is a button for increasing a temperature of mixed hot water. The low temperature button **41b** is a button for reducing a temperature of mixed hot water. Note that the remote controller **4** causes a first display **45a** to display a setting state of a temperature of mixed hot water. In a case where the high temperature button **41a** or the low temperature button **41b** is operated, displaying of the first display **45a** is changed in accordance with an operation with respect to the buttons **41a** and **41b**.

[0051] Note that a temperature of mixed hot water in the faucet body **3** can be adjusted within a predetermined temperature range. In a case where a set temperature of mixed hot water becomes lower than the lowest temperature of the predetermined temperature range by an operation with respect to the low temperature button **41b**, hot water is not mixed with cold water in the faucet body **3** so as to spout the cold water.

[0052] The water amount adjusting button **42** is a button for adjusting a flow volume of warm/cold water to be spouted from the faucet device **1**. The water amount adjust-

ing button **42** includes a water increasing button **42a** and a water reducing button **42b**. The water increasing button **42a** is a button for increasing a flow volume of warm/cold water. The water reducing button **42b** is a button for reducing a flow volume of warm/cold water. The remote controller **4** causes a second display **45b** to display a setting state of a water amount of warm/cold water. In a case where the water increasing button **42a** or the water reducing button **42b** is operated, displaying of the second display **45b** changes in accordance with operations with respect to the buttons **42a** and **42b**. Note that a flow volume of warm/cold water spouted from the faucet device **1** can be adjusted within a predetermined flow volume range.

[0053] The switching button **43** is a button for switching between spouting and stopping of warm/cold water in the faucet device **1**. The switching button **43** is a button for changing a water spouting part of warm/cold water in the faucet device **1**. The switching button **43** includes a faucet button **43a**, a hand shower button **43b**, an overhead shower button **43c**, and a warm pillar button **43d**. Each of the buttons **43a** to **43d** is switched between “ON” and “OFF” by a user depressing the corresponding button.

[0054] In a case where the buttons **43a** to **43d** of the switching button **43** are turned “OFF”, warm/cold water is not spouted. In other words, the faucet device **1** is in a water stopping state.

[0055] In a case where one of the switching button **43** is depressed and further the depressed switching button **43** is turned “ON” from a state where the buttons **43a** to **43d** of the switching button **43** are turned “OFF”, warm/cold water is spouted. In other words, the faucet device **1** is turned from a water stopping state into a water spouting state.

[0056] In a case where one of the switching button **43** is depressed in a state where another of the switching button **43** is turned “ON”, the switching button **43** to be turned “ON” is changed so as to change a water spouting part of warm/cold water.

[0057] For example, in a case where the hand shower button **43b** is turned “ON”, warm/cold water is spouted from the hand shower **22**. In this state, in a case where the faucet button **43a** is depressed, the hand shower button **43b** is turned “OFF”, and further the faucet button **43a** is turned “ON”. Thus, a water spouting part of warm/cold water is changed from the hand shower **22** into the faucet **21**, and warm/cold water is spouted from the faucet **21**.

[0058] In a case where the switching button **43** having been turned “ON” is depressed again, the depressed switching button **43** is turned “OFF”, and the buttons **43a** to **43d** of the switching button **43** are turned “OFF” so as to stop spouting warm/cold water. In other words, the faucet device **1** is turned from a water spouting state into a water stopping state.

[0059] Note that each of the buttons **43a** to **43d** is configured such that a user is able to identify “ON” and “OFF” states of the corresponding button. For example, the switching button **43** having been turned “ON” lights up, and further the switching button **43** having been turned “OFF” blacks out.

[0060] Herein, the faucet device **1** is explained as one example which is capable of spouting warm/cold water from the overhead shower **23**, the warm pillar **24**, the hand shower **22**, and the faucet **21**; however, not limited thereto. For example, the faucet device **1** may have a configuration without the overhead shower **23** and the warm pillar **24**.

[0061] Next, the outline of the faucet device 1 according to the embodiment will be explained with reference to FIG. 3. FIG. 3 is a block diagram illustrating the outline of the faucet device 1 according to the embodiment. In FIG. 3, flows of warm/cold water are indicated by arrows of solid lines, and communication lines are indicated by dashed lines.

[0062] The faucet device 1 includes a plurality of water spout parts 2, the faucet body 3, the remote controller 4, and a communication unit 5.

[0063] The plurality of water spout parts 2 includes the faucet 21, the hand shower 22, the overhead shower 23, the warm pillar 24, and the hot water waiting water spout port 25a (see FIG. 1) that is connected to a remaining water discharging flow path 25.

[0064] The faucet body 3 includes a combination faucet unit 50, a spout water switching unit 30, and the controller 7.

[0065] The combination faucet unit 50 includes a hot water and cold water mixing unit 80, a flow volume adjusting unit 100, a temperature sensor 48, and a temperature sensor 49. Hot water is supplied to the hot water and cold water mixing unit 80 from a hot water supplying source 37. Cold water is supplied to the hot water and cold water mixing unit 80 from a water supply source 44. The temperature sensor 48 is arranged on upstream of the hot water and cold water mixing unit 80 so as to detect a temperature (namely, temperature of water) of hot water that is supplied from the hot water supplying source 37. The temperature sensor 49 is arranged on downstream of the hot water and cold water mixing unit 80 so as to detect a temperature (namely, temperature of water) of warm/cold water that is spouted from the hot water and cold water mixing unit 80. A water stopping valve 38 is arranged on a hot water supplying path 39 between the hot water and cold water mixing unit 80 and the hot water supplying source 37. A water stopping valve 45 is arranged on a water supplying path 46 between the hot water and cold water mixing unit 80 and the water supply source 44.

[0066] The hot water and cold water mixing unit 80 mixes hot water supplied from the hot water supplying source 37 and cold water supplied from the water supply source 44 with each other. Specifically, the hot water and cold water mixing unit 80 switches between whether or not hot water is mixed to cold water. The hot water and cold water mixing unit 80 adjusts a ratio of hot water to be mixed to cold water, so as to adjust a temperature of mixed hot water.

[0067] The hot water and cold water mixing unit 80 includes a motor 62. The motor 62 is a stepping motor, for example, and a rotational position (namely, drive amount) of the motor 62 is controlled by the number of steps. The motor 62 operates in accordance with an operation with respect to the temperature adjusting button 41 of the remote controller 4 so as to drive a temperature adjusting valve 82 (see valve body illustrated in FIG. 6), and the hot water and cold water mixing unit 80 switches between whether or not hot water is mixed to cold water.

[0068] The motor 62 operates in accordance with an operation with respect to the temperature adjusting button 41 of the remote controller 4 so as to drive the temperature adjusting valve 82 (see FIG. 6), and the hot water and cold water mixing unit 80 adjusts a ratio of hot water to be mixed to cold water. Even in a case where the temperature adjusting button 41 is not operated, for example, when a tempera-

ture of hot water changes so as to change a temperature of mixed hot water, the hot water and cold water mixing unit 80 adjusts a ratio between a flow volume of hot water and a flow volume of cold water in accordance with the temperature of mixed hot water, so that it is possible to automatically adjust a temperature of mixed hot water.

[0069] Warm/cold water flows into the flow volume adjusting unit 100 from the hot water and cold water mixing unit 80. In a case where warm/cold water is spouted from the water spout parts 2, the flow volume adjusting unit 100 adjusts a flow volume of warm/cold water to be spouted.

[0070] The flow volume adjusting unit 100 includes a motor 72. The motor 72 is a stepping motor, for example, a rotational position (namely, drive amount) of the motor 62 is controlled by the number of steps. In accordance with an operation with respect to the water amount adjusting button 42 of the remote controller 4, the motor 72 drives so as to drive a flow adjusting valve 102 (see FIG. 6), and the flow volume adjusting unit 100 adjusts a flow volume of warm/cold water.

[0071] The spout water switching unit 30 switches between spouting and stopping of warm/cold water to be discharged from the combination faucet unit 50. In other words, the spout water switching unit 30 switches between spouting and stopping of warm/cold water from the water spout parts 2. The spout water switching unit 30 changes a water spouting part of warm/cold water. The faucet device 1 causes the spout water switching unit 30 to execute switching between spouting and stopping of warm/cold water from the water spout part 2, and further causes the flow volume adjusting unit 100 to adjust a flow volume of warm/cold water when warm/cold water is spouted.

[0072] The spout water switching unit 30 includes a plurality of electromagnetic valves 31 to 35. Specifically, the spout water switching unit 30 includes the first electromagnetic valve 31, the second electromagnetic valve 32, the third electromagnetic valve 33, the fourth electromagnetic valve 34, and the fifth electromagnetic valve 35.

[0073] Each of the first electromagnetic valve 31 to the fourth electromagnetic valve 34 is turned into “closed (OFF)” or “open (ON)” in accordance with an operation with respect to the switching button 43.

[0074] In a case where the first electromagnetic valve 31 to the fourth electromagnetic valve 34 are “closed”, warm/cold water is not spouted from the faucet 21, the hand shower 22, the overhead shower 23, or the warm pillar 24. In a case where one of the first electromagnetic valve 31 to the fourth electromagnetic valve 34 is “open”, warm/cold water is spouted from one of the faucet 21, the hand shower 22, the overhead shower 23, and the warm pillar 24, which is corresponding to the “open” electromagnetic valve.

[0075] The first electromagnetic valve 31 switches between spouting and stopping of warm/cold water from the faucet 21. The second electromagnetic valve 32 switches between spouting and stopping of warm/cold water from the hand shower 22. The third electromagnetic valve 33 switches between spouting and stopping of warm/cold water from the overhead shower 23. The fourth electromagnetic valve 34 switches between spouting and stopping of warm/cold water from the warm pillar 24.

[0076] For example, in a case where the first electromagnetic valve 31 is “open” and the second electromagnetic valve 32 to the fourth electromagnetic valve 34 are “closed”, warm/cold water is spouted from the faucet 21.

[0077] The fifth electromagnetic valve 35 is switched between “closed (OFF)” and “open (ON)” in accordance with a change in a mode for spouting water by the remote controller 4 or an operation by an external device 6 (for example, remote controller arranged in water closet). The fifth electromagnetic valve 35 is a valve for discharging water remaining in a hose of the hand shower 22 or the like and/or a pipe, and further is usually kept “closed”. In other words, the fifth electromagnetic valve 35 is turned into “open” in processing remaining water. In a case where the fifth electromagnetic valve 35 is turned into “open”, remaining water is discharged from the hot water waiting water spout port 25a via the remaining water discharging flow path 25.

[0078] In accordance with an operation of the faucet body 3 which is received by an operation of the remote controller 4, the controller 7 controls the motors 62 and 72, and the first electromagnetic valve 31 to the fourth electromagnetic valve 34. In accordance with an operation of the remote controller 4 and/or the external device 6, for example, the controller 7 controls the fifth electromagnetic valve 35.

[0079] The controller 7 is a controller. The controller 7 includes a microcomputer including a Central Processing Unit (CPU), a Read Only Memory (ROM), a Random Access Memory (RAM), and the like; and various circuits, for example. Note that the controller 7 may include hardware such as an Application Specific Integrated Circuit (ASIC) and a Field Programmable Gate Array (FPGA).

[0080] The communication unit 5 receives an operation signal from the remote controller 4 and the external device 6, and further transmits the received operation signal to the controller 7. The remote controller 4 and the external device 6 are connected to the communication unit 5 by wired communication or wireless communication. The controller 7 is connected to the communication unit 5 by using wired communication or wireless communication.

[0081] Next, the faucet body 3 will be explained with reference to FIG. 4. FIG. 4 is a perspective view illustrating the faucet body 3. The faucet body 3 includes a flow path unit 9 in addition to the combination faucet unit 50, the spout water switching unit 30, and the controller 7 (see FIG. 3). The faucet body 3 is attached to the wall part 14a (see FIG. 1) of the bath unit 10 by the flow path unit 9.

[0082] The flow path unit 9 includes the hot water supplying path 39 (see FIG. 3) that causes hot water supplied from the hot water supplying source 37 (see FIG. 3) to flow into the combination faucet unit 50, the water supplying path 46 (see FIG. 3) that causes cold water supplied from the water supply source 44 (see FIG. 3) to flow into the combination faucet unit 50, and a flow path that causes warm/cold water to flow into the water spout parts 2 from the combination faucet unit 50. Note that the flow path unit 9 is provided with the spout water switching unit 30. The flow path unit 9 is provided with the water stopping valves 38 and 45 (see FIG. 3). The flow path unit 9 is provided with the remaining water discharging flow path 25.

[0083] In the faucet body 3, the flow path unit 9 is arranged in a back portion thereof, and the combination faucet unit 50 is arranged in front of the flow path unit 9. A part of the flow path unit 9 is arranged above the combination faucet unit 50. A control box 7a housing therein the controller 7 is arranged in front of the combination faucet unit 50.

[0084] Next, with reference to FIG. 5 to FIG. 8, the combination faucet unit 50 will be more specifically explained. FIG. 5 is a perspective view illustrating the combination faucet unit 50. FIG. 6 is a perspective cross sectional view taken along a line VI-VI illustrated in FIG. 5.

[0085] As illustrated in FIG. 5 and FIG. 6, the combination faucet unit 50 includes a unit body 51, a temperature adjusting side motor unit 60, a flow adjusting side motor unit 70, the hot water and cold water mixing unit 80, and the flow volume adjusting unit 100. In the combination faucet unit 50, the unit body 51 is provided with a water spout port 52 so as to spout warm/cold water from the water spout port 52.

[0086] The unit body 51 extends in the left-right direction. The hot water and cold water mixing unit 80 and the flow volume adjusting unit 100 are inserted into the unit body 51 in the left-right direction. In other words, insertion directions of the hot water and cold water mixing unit 80 and the flow volume adjusting unit 100 coincide with the left-right direction.

[0087] A hot water supplying port 53 connected to the hot water supplying path 39 (see FIG. 3) is arranged on the left side of the unit body 51. A cold water supplying port 54 connected to the water supplying path 46 (see FIG. 3) is arranged in an intermediate portion in the left-right direction of the unit body 51. In the unit body 51, the hot water supplying port 53 and the cold water supplying port 54 are adjacently formed in the left-right direction.

[0088] The temperature adjusting side motor unit 60 includes a cover 61 and the motor 62, and further is arranged in a left edge of the unit body 51. The cover 61 is arranged in a left edge of the unit body 51 via a spacer 55. The motor 62 is arranged in the cover 61. The flow adjusting side motor unit 70 includes a cover 71 and the motor 72, and further is arranged in a right edge of the unit body 51. The cover 71 is arranged in a right edge of the unit body 51 via a spacer 56. The motor 72 is arranged in the cover 71.

[0089] The motor 62 is an actuator that causes the hot water and cold water mixing unit 80 to operate. The motor 62 switches between whether or not mixing cold water and hot water in accordance with a rotational position (namely, drive amount) of the motor 62. In a case where spouting mixed hot water, the motor 62 sets a temperature of mixed hot water in accordance with a rotational position (namely, drive amount) of the motor 62. The motor 72 adjusts a flow volume of warm/cold water in accordance with a rotational position (namely, drive amount) of the motor 72.

[0090] The hot water and cold water mixing unit 80 includes a body casing 81, the temperature adjusting valve 82, a thermo-sensitive spring 83 (namely, thermo-sensitive energizing part), a bias spring 84, the liner 85, and a spindle 86.

[0091] The body casing 81 includes a first body casing 87 and a second body casing 88. A hot water inlet 87a that is a hot water inlet with respect to an internal space of the body casing 81, and a cold water inlet 87b that is a cold water inlet with respect to the above-mentioned internal space are formed on a peripheral wall of the first body casing 87. A mixed hot water and cold water outlet 88a is formed in a right end part of the second body casing 88. The hot water inlet 87a, the cold water inlet 87b, and the mixed hot water and cold water outlet 88a are hole parts via which the internal space of the body casing 81 is communicated with the outside. In an intermediate portion of the body casing 81 in the left-right direction, the hot water inlet 87a and the cold

water inlet **87b** are formed such that the hot water inlet **87a** is located on the left side of the cold water inlet **87b**.

[0092] An outer peripheral space of the body casing **81** is partitioned by O-rings **89a**, **89b**, and **89c** that are sealing members. Thus, a hot water dedicated circular flow path **89** facing the hot water inlet **87a** and a cold water dedicated circular flow path **90** facing the cold water inlet **87b** are formed in the outer peripheral space of the body casing **81**.

[0093] A spout water flow path **91** is formed in an internal space of the body casing **81**. The spout water flow path **91** can be communicated with the water spout port **52** via the mixed hot water and cold water outlet **88a** and the flow adjusting valve **102**.

[0094] The thermo-sensitive spring **83** is housed in the second body casing **88**. The thermo-sensitive spring **83** is arranged in the spout water flow path **91**. The thermo-sensitive spring **83** is a spring whose spring constant changes in accordance with the temperature, for example, and further is made of Shape Memory Alloy (SMA). The thermo-sensitive spring **83** energizes the temperature adjusting valve **82** towards the left side.

[0095] The bias spring **84** is housed in the first body casing **87** arranged in the left portion of the second body casing **88**. The bias spring **84** is arranged in the spout water flow path **91**. The bias spring **84** is a spring whose spring constant is substantially constant with respect to the temperature. The bias spring **84** energizes the temperature adjusting valve **82** towards the right side.

[0096] The temperature adjusting valve **82** is arranged in the first body casing **87** on the right side thereof. The temperature adjusting valve **82** is incorporated into the first body casing **87** to be able to slide along an axial direction (namely, left-right direction) thereof. The temperature adjusting valve **82** moves along the left-right direction in accordance with an energizing force of the bias spring **84** and an energizing force of the thermo-sensitive spring **83** so as to adjust a communication state between the hot water dedicated circular flow path **89** and the cold water dedicated circular flow path **90**, and the spout water flow path **91**.

[0097] Specifically, the temperature adjusting valve **82** is held at a position where an energizing force of the bias spring **84** and an energizing force of the thermo-sensitive spring **83** balance with each other. An open degree of the hot water inlet **87a** is larger and further an open degree of the cold water inlet **87b** is smaller as the temperature adjusting valve **82** further moves towards the right side, and thus an amount of hot water supplied to the spout water flow path **91** increases so as to reduce an amount of cold water, and thus a temperature of mixed hot water rises. An open degree of the hot water inlet **87a** is smaller and further an open degree of the cold water inlet **87b** is larger as the temperature adjusting valve **82** further moves towards the left side, and thus an amount of hot water supplied into the body casing **81** reduces so as to increase an amount cold water, and thus a temperature of mixed hot water reduces.

[0098] The liner **85** is in contact with an edge of the bias spring **84** on a side opposite to the temperature adjusting valve **82**, and further is connected with the motor **62** via the spindle **86**. The spindle **86** converts rotational movement of the motor **62** into linear movement of the liner **85** in the left-right direction. Thus, the liner **85** moves in the left-right direction in accordance with rotation of the motor **62**.

[0099] In the hot water and cold water mixing unit **80**, the liner **85** moves in the left-right direction in accordance with

a rotational position of the motor **62**, so as to change a position of a left edge of the bias spring **84**. Thus, in accordance with a rotational position of the motor **62**, the hot water and cold water mixing unit **80** is capable of changing a position of the temperature adjusting valve **82** where an energizing force of the bias spring **84** and an energizing force of the thermo-sensitive spring **83** balance with each other. Therefore, in a case where spouting mixed hot water, the hot water and cold water mixing unit **80** is capable of setting a temperature of the mixed hot water to a temperature according to a rotational position of the motor **62**.

[0100] For example, in a case where a temperature of hot water is changed to change a temperature of mixed hot water in spouting the mixed hot water, the thermo-sensitive spring **83** expands or contracts in accordance with the temperature of mixed hot water, and the temperature adjusting valve **82** moves in the left-right direction so as to automatically change the balanced position of the temperature adjusting valve **82**. Therefore, amounts of hot water and cold water flowing into the spout water flow path **91** are adjusted so as to automatically adjust a temperature of mixed hot water.

[0101] The flow volume adjusting unit **100** includes a spindle **101** and the flow adjusting valve **102**. One edge of the spindle **101** is connected with the motor **72**, and the other edge thereof is connected with the flow adjusting valve **102**.

[0102] The flow adjusting valve **102** is arranged in the spout water flow path **91**. The flow adjusting valve **102** is rotated in accordance with rotation of the motor **72**. A communication opening **102a** is formed in the flow adjusting valve **102**. The flow adjusting valve **102** is arranged so as to face the water spout port **52** of the unit body **51**. The flow adjusting valve **102** is rotated in accordance with rotation of the motor **72**, and further changes a communication area between the communication opening **102a** and the water spout port **52** so as to change a flow volume.

[0103] Specifically, in a case where the motor **72** locates in a predetermined water stopping position, the communication opening **102a** is not communicated with the water spout port **52**. Thus, in a case where the motor **72** locates in the predetermined water stopping position, warm/cold water is not spouted from the water spout port **2**.

[0104] In a case where the motor **72** rotates towards a water spouting position from a water stopping position, for example, the communication opening **102a** becomes communicated with the water spout port **52**. Thus, warm/cold water is spouted from the water spout port **52**.

[0105] The flow adjusting valve **102** is capable of changing an area in which the communication opening **102a** and the water spout port **52** are communicated with each other, in accordance with a rotational position of the motor **72**. In other words, the flow volume adjusting unit **100** is capable of adjusting a flow volume of warm/cold water to be spouted from the water spout parts **2**, in accordance with a rotational position of the motor **72**.

[0106] Note that in temperature and flow adjusting control of the faucet device **1**, the controller **7** does not execute a fine adjustment by using feedback control. In a case where a water spouting state is changed into a water stopping state, a process for returning to original positions (namely, positions to be control reference) of the motors **62** and **72** for each time of stopping water is not executed, step-out or the like occurs to be gradually accumulated, and thus open degrees of positions of the motors **62** and **72** are supposed to be shifted. In order to avoid the above-mentioned case, the

controller 7 executes “origin searching” that is a process for returning positions of the motor 62 and the motor 72 to original positions thereof at predetermined time intervals or the like.

[0107] Herein, alignment between the motor 62 and the temperature adjusting valve 82 will be explained with reference to FIG. 5 to FIG. 8. FIG. 7 is a side view illustrating the spindle 86. FIG. 8 is a diagram illustrating an inner part of the temperature adjusting side motor unit 60 viewed along a direction VIII illustrated in FIG. 5.

[0108] The motor 62 includes a concave part that can be engaged with a spline 86a formed on a left end part of the spindle 86 illustrated in FIG. 7 and a distal end part 86b having a shape (namely, D cut) obtained by cutting a part of a peripheral surface of the spindle 86, and the above-mentioned concave part is used in connecting the spindle 86.

[0109] The spacer 55 includes a convex part at a surface that is in contact with the unit body 51, and the convex part is engaged with a concave part included in the unit body 51 so as to perform alignment (in other words, regulation) therebetween in a rotational direction whose axis is the left-right direction. The cover 61 includes a convex part that is in contact with the spacer 55, and the convex part is engaged with a concave part included in the spacer 55 so as to perform alignment therebetween in a rotational direction. As illustrated in FIG. 8, the motor 62 is attached to the cover 61 by using screws 63 so as to perform arrangement thereof, and thus alignment therebetween is performed. Assembly of the spindle 86 and the spacer 55 is performed by using an assembly receiving mold (namely, jig) so as to regulate a rotational direction between the spindle 86 and the spacer 55.

[0110] As described above, alignment of each of the unit body 51, the spacer 55, the cover 61, the motor 62, and the spindle 86 is performed with respect to the rotational direction, and thus rotational directions of the motor 62 and the spindle 86 coincide with each other. Therefore, in the combination faucet unit 50, the spindle 86 is connected with a concave part of the motor 62 up to the distal end part 86b, and alignment is performed from the motor 62 up to the temperature adjusting valve 82. As described above, the motor 62 and the temperature adjusting valve 82 are fixed in an aligned state.

[0111] In the faucet device 1, the motor 62 and the temperature adjusting valve 82 are previously aligned, even in a case where feedback control is not executed in spouting water, it is possible to precisely spout water at a target set temperature. Thus, the faucet device 1 is capable of improving feeling in use of a user.

[0112] Next, temperature controlling of the faucet device 1 will be explained with reference to FIG. 9. FIG. 9 is a flowchart illustrating a processing procedure for temperature controlling.

[0113] As illustrated in FIG. 9, the controller 7 receives a request for changing temperature adjustment setting from the remote controller 4 (Step S101).

[0114] Next, the controller 7 acquires a temperature adjustment setting value from the remote controller 4 (Step S102). The temperature adjustment setting value means a value of a set temperature which is transmitted from the remote controller 4.

[0115] Next, the controller 7 acquires a temperature adjustment correcting value from the remote controller 4 (Step S103). The temperature adjustment correcting value is

a value for correcting a temperature adjustment setting value into a higher temperature or a lower temperature. The temperature adjustment correcting value is preliminarily set by the remote controller 4.

[0116] Next, the controller 7 drives the motor 62 into a predetermined rotational position on the basis of a temperature adjusting open degree table (Step S104), and further ends the processing. The temperature adjusting open degree table means data that stores therein set temperatures and rotational positions of the motor 62 in association with each other, for example. For example, in a case where a temperature adjustment setting value is 40° C. and a temperature adjustment correcting value is +1° C., the controller 7 refers to a table value (namely, rotational position) at 41° C. in the temperature adjusting open degree table.

[0117] As described above, in the faucet device 1, the hot water and cold water mixing unit 80 includes the cold water inlet 87b, the body casing 81 in which the hot water inlet 87a and the mixed hot water and cold water outlet 88a are formed, the thermo-sensitive spring 83 whose energizing force changes in accordance with a temperature of mixed hot water to be capable of adjusting open degrees of the hot water inlet 87a and the cold water inlet 87b, and the temperature adjusting valve 82 that is incorporated to be capable of sliding in an axial direction of the body casing 81 and further is capable of adjusting open degrees of the hot water inlet 87a and the cold water inlet 87b. In a case where receiving information on a set temperature, the controller 7 drives the motor 62 to a preliminarily set rotational position or by a preliminarily set drive amount that are corresponding to a set temperature so as to adjust a position in an axial direction of the temperature adjusting valve 82.

[0118] In the faucet device 1, temperature adjustment is executed by the thermo-sensitive spring 83, and thus the motor 62 does not drive for controlling the temperature adjusting valve 82 other than a case where changing a set temperature. Therefore, the faucet device 1 is capable of reducing a case where driving sounds of the motor 62 give unpleasant feeling to a user. Even in a case where spontaneous temperature adjustment is performed by the thermo-sensitive spring 83, feedback control based on result of the temperature adjustment is further executed, there presents possibility that the spontaneous temperature adjustment is inhibited so that a spout water temperature does not stabilize. By employing temperature controlling according to the present disclosure, it is possible to sufficiently exert performance in spontaneous temperature adjustment by the thermo-sensitive spring 83.

[0119] By employing temperature controlling according to the present disclosure, the faucet device 1 does not have to always recognize the present output, unlike feedback control. Moreover, the faucet device 1 does not loop the processing, so that it is possible to execute implementation by simple processing.

[0120] The controller 7 stops energization of the motor 62 so as to release excitation thereof after driving the motor 62 in Step S104 until next receiving a request for changing temperature adjustment setting in Step S101. Thus, an open degree of the temperature adjusting valve 82 is fixed after driving the motor 62 in Step S104 until next receiving a request for changing temperature adjustment setting in Step S101.

[0121] By executing controlling as described above, the faucet device 1 is capable of more reducing unpleasant

feeling due to driving sounds of the motor 62 until a command for changing setting next reaches after changing setting of a set temperature. Additionally, the faucet device 1 is capable of reduce increase in power consumption and heat generation of the motor 62.

[0122] Alternatively, the controller 7 drives (namely, excites) the motor 62 so as not to change an open degree of the temperature adjusting valve 82 until next changing a set temperature after changing the set temperature. Thus, an open degree of the temperature adjusting valve 82 is fixed after driving the motor 62 in Step S104 until next receiving a request for changing temperature adjustment setting in Step S101.

[0123] By executing controlling as described above, the faucet device 1 is capable of more reducing unpleasant feeling due to driving sounds (namely, operation sounds) of the motor 62 until a command for changing setting next reaches after changing setting of a set temperature.

[0124] Moreover, in the remote controller 4, an upper limit (for example, 45° C.) is set for a temperature range of a set temperature. Herein, in a case where the temperature sensor 49 detects a temperature equal to or more than a first predetermined temperature (for example, 55° C.) for a predetermined time interval (for example, three seconds), the controller 7 changes a water spout part into the water spout part 2 (namely, second water spout part) that is arranged below the water spout part 2 (namely, first water spout part) that is spouting water. It is sufficient that the second water spout part is located lower than the first a water spout part; however, the hot water waiting water spout port 25a located in the lowest position is preferable.

[0125] Additionally, the controller 7 may execute a failure diagnosis on the faucet device 1 after changing a water spout part into the second water spout part. Specifically, the controller 7 drives the motor 62 so as to be within a normal temperature range (or low temperature range), and further recognizes whether or not a temperature detected by the temperature sensor 49 has been moderated. For example, in a case where the temperature sensor 49 detects a temperature equal to or less than a second predetermined temperature (for example, 42° C.), the controller 7 executes origin searching on the motor 62 so as to return to normal controlling. In a case where a state continues in which the temperature sensor 49 is detecting a temperature higher than the second predetermined temperature, the controller 7 stops spouting water from the second water spout, and further causes the remote controller 4 to display an error message indicating that a high temperature is detected.

[0126] Alternatively, in a case where the temperature sensor 49 detects a temperature equal to or more than the first predetermined temperature for a predetermined time interval, the controller 7 may cause the motor 62 to operate such that the temperature adjusting valve 82 moves in a direction for reducing an open degree of the hot water inlet 87a. Thus, the controller 7 is capable of reducing a temperature of warm water that is spouted from the water spout parts 2.

[0127] By executing controlling as described above, in the faucet device 1, in a case where the temperature sensor 48 detects a high temperature, a user is able to easily recognize whether or not the faucet device 1 has failed and whether or not the temperature is temporarily unstable, in comparison with a case where water is stopped. Moreover, the faucet device 1 spouts water from the second water spout part that

is located below the first water spout part so that it is possible to reduce a case where a user takes a large amount of hot water spouted from the water spout part 2 when the temperature sensor 48 detects a high temperature.

[0128] In a case where being continuously operated within a predetermined time interval so as to increase a set temperature, the remote controller 4 regulates change in a set temperature into a temperature that is equal to or more than a third predetermined temperature (for example, 42° C.). For example, the continuous operations mean operations of repeatedly pushing a button and/or an operation (holding-down operation) of continuously pushing a button.

[0129] For example, in a case where a user repeatedly pushes the high temperature button 41a within a predetermined time interval, the remote controller 4 cancels only once the operation (for example, operation for raising temperature from 42° C. up to 43° C.) when a set temperature is changed into the third predetermined temperature. Subsequently, in a case where a user performs an operation of pushing the high temperature button 41a, the remote controller 4 activates the operation.

[0130] For example, in a case where a user performs an operation of continuously holding down the high temperature button 41a within a predetermined time interval, the remote controller 4 cancels an operation (for example, operation for rising temperature from 42° C. up to 43° C.) when a set temperature is changed up to the third predetermined temperature. In a case where a user stops an operation of continuously pushing the high temperature button 41a, and then restarts the operation with respect to the high temperature button 41a, the remote controller 4 allows change in a set temperature up to a temperature that is higher than the third predetermined temperature. Note that in a case where cancelling an operation for rising a set temperature, the remote controller 4 may output a sound indicating the cancellation.

[0131] By executing controlling as described above, when a user changes a set temperature, the remote controller 4 does not transmit, to the controller 7, a signal for changing setting which is continuously performed within a predetermined time interval, so that the faucet device 1 is capable of preventing a set temperature from rising up to a not-intended temperature. Thus, the faucet device 1 is capable of improving the safety.

[0132] The controller 7 is capable of executing a calibration mode. The calibration mode is a mode for adjusting setting of a predetermined rotational position or a predetermined drive amount in accordance with at least one of an arrangement environment of the faucet device 1 and product unevenness. In the calibration mode, for example, a plurality of target temperatures is set, and the controller 7 executes a process for matching a spout water temperature to a target temperature for each target temperature. In the above-mentioned process, the controller 7 drives the motor 62 such that a spout water temperature and a target temperature coincide with each other while spouting water from the water spout parts 2 (for example, hot water waiting water spout port 25a), and further searches a rotational position or a drive amount of the motor 62 for each target temperature. The controller 7 is capable of adjusting setting of a predetermined rotational position or a predetermined drive amount on the basis of the searched rotational position or the searched drive amount of the motor 62.

[0133] During the calibration mode, the controller 7 stops energization of the motor 62 so as to release excitation thereof after driving the motor 62 until next driving the motor 62. Thus, the faucet device 1 is capable of reducing increase in power consumption and heat generation of the motor 62 in the calibration mode.

[0134] Next, the calibration mode will be explained with reference to FIG. 10 to FIG. 15. FIG. 10 is a flowchart illustrating a processing procedure for an initial process and a supplied hot water temperature determining process in the calibration mode. FIG. 11 is a flowchart illustrating a processing procedure for a normal optimizing process in the calibration mode. FIG. 12 is a flowchart illustrating a processing procedure for a temperature adjustment table assigning process in the calibration mode. FIG. 13 to FIG. 15 are diagrams illustrating calculation of assignment factors.

[0135] Note that the controller 7 is capable of executing a “water spouting mode” in addition to the above-mentioned “calibration mode”. The “water spouting mode” is a mode for driving, in a case where receiving information on a set temperature from the remote controller 4, the motor 62 to a predetermined rotational position or by a predetermined drive amount alone, which is corresponding to the set temperature so as to adjust a position of the temperature adjusting valve 82 in an axial direction thereof.

[0136] A processing procedure for temperature controlling in the “water spouting mode” is similar to that of the above-mentioned process from Step S101 to Step S104.

[0137] Next, the “calibration mode” will be specifically explained. The “calibration mode” is executed by an operation by a user with respect to the remote controller 4. Specifically, in a case where a user simultaneously holds down a low temperature button 41b and the water increasing button 42a of the remote controller 4 for three seconds so as to shift to a set screen, and then selects “calibration” from the set screen; the first display 45a or the second display 45b displays thereon execution necessity of the “calibration mode”. In a case where a user selects “execute calibration mode” in the remote controller 4, the calibration mode is executed. During execution of the calibration mode, the remote controller 4 causes the first display 45a or the second display 45b to display “executing calibration mode”. Calibration can be executed by the remote controller 4 that is used in common water spouting operations, and thus the faucet device 1 does not need a dedicated setting remote controller. Note that execution of the calibration mode may be temporarily interrupted or cancelled during execution of the calibration mode by an operation of a user with respect to the remote controller 4.

[0138] In the “calibration mode”, an initial process (Step S201 to Step S204) and a supplied hot water temperature determining process (Step S205 to Step S209) are first executed.

[0139] As illustrated in FIG. 10, the controller 7 executes origin searching on the motors 62 and 72, and further opens the fifth electromagnetic valve 35 (Step S201). The faucet device 1 opens the fifth electromagnetic valve 35 so as to execute calibration while spouting water from the hot water waiting water spout port 25a. The controller 7 drives the motor 62 while recognizing environment in actually spouting water, so that it is possible to improve the accuracy in the calibration.

[0140] Next, the controller 7 drives the motor 62 so as to obtain a first predetermined temperature (Step S202). For example, the first predetermined temperature is set to 42° C.

[0141] Next, the controller 7 determines whether or not the first predetermined time interval has elapsed since the motor 62 is driven (Step S203). For example, the first predetermined time interval is set to five minutes.

[0142] In a case where determining that the first predetermined time interval has elapsed since the motor 62 is driven (Step S203: Yes), the controller 7 ends the calibration process. In this case, the controller 7 ends the processing without updating the temperature adjusting open degree table.

[0143] In a case where determining that the first predetermined time interval has not elapsed since the motor 62 is driven (Step S203: No), the controller 7 determines whether or not a temperature (namely, hot water temperature) of hot water detected by the temperature sensor 48 is higher than a second predetermined temperature (Step S204). For example, the second predetermined temperature is set to 32° C. The determination in Steps S203 and S204 is objected to determination of whether or not a power source of a hot water supplying device, which is the hot water supplying source 37, is turned ON.

[0144] In a case where determining that a temperature of hot water detected by the temperature sensor 48 is equal to or less than the second predetermined temperature (Step S204: No), the controller 7 returns the processing to Step S203.

[0145] In a case where determining that a temperature of hot water detected by the temperature sensor 48 is higher than the second predetermined temperature (Step S204: Yes), the controller 7 determines whether or not a hot water supplying temperature is stable at equal to or more than a third predetermined temperature (Step S205). For example, the controller 7 is capable of determining whether or not a hot water supplying temperature is stable, on the basis of the fact that a temperature of hot water detected by the temperature sensor 48 falls within a predetermined range for a predetermined time interval.

[0146] In a case where determining that a hot water supplying temperature is stable at equal to or more than the third predetermined temperature (Step S205: Yes), the controller 7 executes origin searching on the motor 62 (Step S206), and further shifts the processing to a normal optimizing process illustrated in FIG. 9. As described above, after the hot water supplying temperature becomes stable, the controller 7 starts to adjust setting of a rotational position of the motor 62. The faucet device 1 is capable of precisely executing temperature controlling in calibration while reducing effects due to heat absorption of cold cast metal in a case where the flow path unit 9 (see FIG. 4) is constituted of cast metal, and starting up of the hot water supplying device. Thus, the controller 7 is capable of improving the accuracy in calibration.

[0147] In a case where determining that a hot water supplying temperature is not stabilized at equal to or more than the third predetermined temperature (Step S205: No), the controller 7 determines that the hot water supplying temperature is equal to or less than an appropriate temperature water supply, and further assigns a fixed table to a temperature adjusting open degree table (Step S207). The fixed table is preliminarily set on the basis of evaluation data under predetermined conditions (for example, water tem-

perature of water supplying path **46** is 15° C. and hot water temperature of hot water supplying path **39** is 40° C., which are under pressure of 0.2 MPa). As described above, in a case where a hot water supplying temperature is lower than the third predetermined temperature, the controller **7** executes controlling with the use of a dedicated table. Thus, the faucet device **1** is capable of recognizing whether or not a hot water supplying temperature is an appropriate temperature, and further is capable of causing the remote controller **4** to display whether or not the hot water supplying temperature is an appropriate temperature in accordance with a situation, so as to report it to a user. In a case where a hot water supplying temperature is lower than the third predetermined temperature, the faucet device **1** is capable of reducing a case where lukewarm hot water is spouted. Thus, the faucet device **1** is capable of avoiding reduction in usability of a user.

[0148] Next, the controller **7** executes origin searching on the motor **62** (Step S208).

[0149] Next, the controller **7** drives the motors **62** and **72** to default positions thereof (Step S209), and further ends the calibration process. For example, the default position of the motor **62** is a rotational position of the motor **62** corresponding to a center value (for example, 40° C.) of set temperature. The default position of the motor **72** is a rotational position of the motor **72** corresponding to a center value of flow volume.

[0150] Next, a processing procedure for a normal optimizing process in the “calibration mode” will be explained.

[0151] As illustrated in FIG. **11**, the controller **7** executes PID control with respect to a first target temperature (Step S210). Specifically, the controller **7** calculates, by using PID control, a rotational position of the motor **62** whose target temperature is the first target temperature, and further drives the motor **62** to the calculated rotational position. For example, the first target temperature is set to 35° C. Note that PID control is employed as control for coinciding a spouted water temperature with a target temperature; however, not limited thereto, a spouted water temperature may be adjusted into the target temperature by various control methods.

[0152] Next, the controller **7** determines whether or not PID control has continued for a third predetermined time interval since the PID control of Step S210 is started (Step S211). For example, the third predetermined time interval is set to 60 seconds.

[0153] In a case where determining that the third predetermined time interval has not continued since PID control of Step S210 is started (Step S211: No), the controller **7** determines whether or not a deviation e in the PID control is equal to or less than a fourth predetermined temperature, and the state (hereinafter, may be simply referred to as “state equal to or less than fourth predetermined temperature”) has continued for a fourth predetermined time interval (Step S212).

[0154] In a case where determining that a state equal to or less than the fourth predetermined temperature has not continued for the fourth predetermined time interval (Step S212: No), the controller **7** returns the processing to Step S211.

[0155] Next, in a case where determining that the third predetermined time interval has continued since PID control is started with respect to the first target temperature in Step S210 (Step S211: Yes), or in a case where determining that

a state equal to or less than the fourth predetermined temperature has continued for the fourth predetermined time interval (Step S212: Yes); the controller **7** records data on the basis of search result (Step S213). Specifically, the controller **7** records, as a temperature changing point, a drive amount (namely, the number of steps) of the motor **62** and a temperature (namely, first temperature) of mixed hot water detected by the temperature sensor **49** at a timing of Step S213.

[0156] Next, the controller **7** executes PID control with respect to a second target temperature (Step S214). Specifically, the controller **7** calculates, by using PID control, a rotational position of the motor **62** whose target temperature is the second target temperature, and further drives the motor **62** to the calculated rotational position. For example, the second target temperature is set to 40° C.

[0157] Next, the controller **7** determines whether or not the third predetermined time interval has continued since PID control in Step S214 is started (Step S215).

[0158] In a case where determining that the third predetermined time interval has not continued since PID control in Step S214 is started (Step S215: No), the controller **7** determines whether or not a state equal to or less than the fourth predetermined temperature has continued for the fourth predetermined time interval (Step S216).

[0159] In a case where determining that a state equal to or less than the fourth predetermined temperature has not continued for the fourth predetermined time interval (Step S216: No), the controller **7** returns the processing to Step S215.

[0160] In a case where determining that the third predetermined time interval has continued since PID control in Step S214 is started (Step S215: Yes), or in a case where determining that a state equal to or less than the fourth predetermined temperature has continued for the fourth predetermined time interval (Step S216: Yes), the controller **7** records data on the basis of search result (Step S217). Specifically, the controller **7** records, as a temperature changing point, a drive amount (namely, the number of steps) of the motor **62** and a temperature (namely, second temperature) of mixed hot water detected by the temperature sensor **49** at a timing of Step S217.

[0161] Next, the controller **7** executes PID control with respect to a third target temperature (Step S218). Specifically, the controller **7** calculates, by using PID control, a rotational position of the motor **62** whose target temperature is the third target temperature, and further drives the motor **62** to the calculated rotational position. For example, the third target temperature is set to 45° C.

[0162] Next, the controller **7** determines whether or not the third predetermined time interval has continued since PID control in Step S218 is started (Step S219).

[0163] In a case where determining that the third predetermined time interval has continued since PID control in Step S218 is started (Step S219: No), the controller **7** determines whether or not a rotational position of the motor **62** reaches an upper limit rotational position (Step S220).

[0164] In a case where determining that a rotational position of the motor **62** does not reach the upper limit rotational position (Step S220: No), the controller **7** determines whether or not a state equal to or less than the fourth predetermined temperature has continued for the fourth predetermined time interval (Step S221).

[0165] In a case where determining that a state equal to or less than the fourth predetermined temperature has not continued for the fourth predetermined time interval (Step S221: No), the controller 7 returns the processing to Step S219.

[0166] In a case where determining that the third predetermined time interval has continued since PID control in Step S218 is started (Step S219: Yes), or in a case where a state equal to or less than the fourth predetermined temperature has continued for the fourth predetermined time interval (Step S221: Yes), the controller 7 records data on the basis of search result (Step S222), and further proceeds to a normal optimizing process illustrated in FIG. 12. Specifically, in Step S222, the controller 7 records a drive amount (namely, the number of steps) of the motor 62 and a temperature (namely, third temperature) of mixed hot water detected by the temperature sensor 49 at a timing of Step S222.

[0167] In a case where determining reaching an upper limit rotational position (Step S220: Yes), the controller 7 waits for a fifth predetermined time interval (Step S223). For example, the fifth predetermined time interval is set to 30 seconds.

[0168] Next, the controller 7 sets an upper limit rotational position to a rotational position at the third target temperature (Step S224).

[0169] Next, the controller 7 records data on the basis of search result (Step S222), and further proceeds to the normal optimizing process illustrated in FIG. 12. Specifically, in Step S222, the controller 7 records, as a temperature changing point, an upper limit rotational position of the motor 62 and a temperature (namely, third temperature) of mixed hot water detected by the temperature sensor 49.

[0170] As illustrated in FIG. 13, temperature changing points are plotted on a graph whose lateral axis indicates a rotational position of the motor 62 and whose vertical axis indicates a temperature of mixed hot water detected by the temperature sensor 49 while indicating a temperature changing point recorded in Step S213 as a point A, indicating a temperature changing point recorded in Step S217 as a point B, and indicating a temperature changing point recorded in Step S222 as a point C.

[0171] Next, a processing procedure for a temperature adjustment table assigning process in the “calibration mode” will be explained.

[0172] As illustrated in FIG. 12, the controller 7 calculates assignment factors (Step S225). Specifically, the controller 7 calculates a slope and an intercept of a linear equation of a straight line AB obtained by connecting the point A (s_1, t_1) and the point B (s_2, t_2) illustrated in FIG. 14, and further calculates a slope and an intercept of a linear equation of a straight line BC obtained by the point B (s_2, t_2) and the point C (s_3, t_3) illustrated in FIG. 15. The assignment factors include a slope and an intercept of a linear equation of the straight line AB, and a slope and an intercept of a linear equation of the straight line BC.

[0173] Next, the controller 7 closes the fifth electromagnetic valve 35 (Step S226). The controller 7 closes the fifth electromagnetic valve 35 so as to stop spouting water from the hot water waiting water spout port 25a.

[0174] Next, the controller 7 interpolate a table values (Step S227). Specifically, on the basis of an assignment factor calculated in Step S225, the controller 7 calculates a rotational position of the motor 62 for each set temperature

(namely, for each temperature to be set by remote controller 4). For example, at a set temperature equal to or less than the second target temperature, the controller 7 calculates a rotational position of the motor 62 on the basis of a linear equation of the straight line AB. At a set temperature higher than the second target temperature, the controller 7 calculates a rotational position of the motor 62 on the basis of a linear equation of the straight line BC.

[0175] Note that a rotational position of the motor 62 is calculated on the basis of three temperature changing points; however, not limited thereto, equal to or more than three temperature changing points may be searched, a linear equation of a straight line between each two of the temperature changing points in descending order of a target temperature may be calculated, and a rotational position of the motor 62 may be calculated for each set temperature similarly to the case of three points. The controller 7 uses equal to or more than three temperature changing points so as to improve the accuracy in calibration.

[0176] Next, the controller 7 updates whole of the table data (Step S228). Specifically, the controller 7 updates whole of the data on the temperature adjusting open degree table by using a rotational position of the motor 62 calculated in Step S227.

[0177] Next, the controller 7 executes origin searching on the motor 62 (Step S229).

[0178] Next, the controller 7 drives the motors 62 and 72 to default positions thereof (Step S230), and further ends the processing.

[0179] As described above, in the faucet device 1, the controller 7 is capable of executing the calibration mode for adjusting setting of a predetermined position or a predetermined drive amount in accordance with at least one of an arrangement environment (for example, water pressure and hot water supplying temperature) and product unevenness.

[0180] By executing control in such a manner, the faucet device 1 is capable of adjusting, in accordance with each of scenes, a hot water temperature, a hot water pressure, a cold water temperature, and a cold water pressure from the hot water supplying path 39 and the water supplying path 46 which are different for each scene, and individual difference in temperature adjustment of an SMA thermo-valve. Thus, the faucet device 1 causes the motor 62 to move the temperature adjusting valve 82 only when changing a set temperature, and further executes temperature adjustment by using the thermo-sensitive spring 83 during spouting of water, so that it is possible to execute temperature adjustment having high accuracy according to the set temperature. The faucet device 1 is capable of achieving, as much as possible, features to be capable of shortening a time interval until a temperature becomes stable in a case where temperature change and/or pressure fluctuation occurs in supplied cold water or supplied hot water during spouting of water.

[0181] According to one aspect of an embodiment, it is possible to reduce unpleasant feeling given to a user due to drive sounds of an actuator for controlling a valve body.

[0182] Although the invention has been described with respect to specific embodiments for a complete and clear disclosure, the appended claims are not to be thus limited but are to be construed as embodying all modifications and alternative constructions that may occur to one skilled in the art that fairly fall within the basic teaching herein set forth.

<Supplementary Note>

(1)

[0183] A faucet device including:**[0184]** a water spout part that spouts water towards an interior of a bathroom;**[0185]** a hot water and cold water mixing unit that mixes hot water and cold water to be supplied to the water spout part;**[0186]** an actuator that causes the hot water and cold water mixing unit to operate;**[0187]** a controller configured to control driving of the actuator; and**[0188]** an operation unit configured to transmit information on a set temperature to the controller based on an operation of a user, wherein**[0189]** the hot water and cold water mixing unit includes:**[0190]** a body casing in which a cold water inlet, a hot water inlet, and a mixed hot water and cold water outlet are formed;**[0191]** a thermo-sensitive energizing part whose energizing force changes in accordance with a temperature of mixed hot water to be capable of adjusting open degrees of the hot water inlet and the cold water inlet; and**[0192]** a valve body that is incorporated into the body casing to be able to slide along an axial direction of the body casing to adjust the open degrees of the hot water inlet and the cold water inlet, and**[0193]** the controller is further configured to:**[0194]** in receiving the information on the set temperature, drive the actuator to a predetermined position or by a predetermined drive amount which is corresponding to the set temperature to adjust a position of the valve body in an axial direction of the valve body.

(2)

[0195] The faucet device according to (1), wherein**[0196]** the controller is further configured to:**[0197]** fix an open degree of the valve body until next changing the set temperature after changing the set temperature.

(3)

[0198] The faucet device according to (1), wherein**[0199]** the controller is further configured to:**[0200]** drive the actuator until next changing the set temperature after changing the set temperature, not to change an open degree of the valve body.

(4)

[0201] The faucet device according to (1) or (2), wherein**[0202]** the actuator includes a motor; and**[0203]** the controller is further configured to:**[0204]** release excitation of the motor after driving the motor to the predetermined position or by the predetermined drive amount.

(5)

[0205] The faucet device according to (4), wherein**[0206]** the motor includes a stepping motor; and**[0207]** the stepping motor and the valve body are fixed in an aligned state.

(6)

[0208] The faucet device according to any one of (1) to (5)**[0209]** further including:**[0210]** a temperature sensor that detects a water temperature, wherein**[0211]** the water spout part includes:**[0212]** a first water spout part; and**[0213]** a second water spout part that is arranged in a position lower than the first water spout part; and**[0214]** the controller is further configured to:**[0215]** in a case where a water temperature detected by the temperature sensor during spouting water is equal to or more than a predetermined temperature, execute controlling for spouting water from the second water spout part.

(7)

[0216] The faucet device according to any one of (1) to (6) further including:**[0217]** a temperature sensor that detects a water temperature, wherein**[0218]** the controller is further configured to:**[0219]** in a case where a water temperature detected by the temperature sensor during spouting water is equal to or more than a predetermined temperature, drive the actuator such that the valve body moves in a direction for reducing an open degree of the hot water inlet.

(8)

[0220] The faucet device according to any one of (1) to (7), wherein**[0221]** in a case where being continuously operated within a predetermined time interval to increase the set temperature, the operation unit regulates change in the set temperature into a temperature that is equal to or more than a predetermined temperature.

(9)

[0222] The faucet device according to any one of (1) to (8), wherein**[0223]** the controller is further configured to:**[0224]** be capable of executing a calibration mode for adjusting setting of the predetermined position or the predetermined drive amount in accordance with at least one of an arrangement environment and product unevenness,**[0225]** the actuator includes a motor; and**[0226]** the controller is further configured to:**[0227]** drive the motor while spouting water from the water spout part to execute the calibration mode; and**[0228]** during the calibration mode, release excitation of the motor after driving the motor.

What is claimed is:

1. A faucet device comprising:

a water spout part that spouts water towards an interior of a bathroom;

a hot water and cold water mixing unit that mixes hot water and cold water to be supplied to the water spout part;

an actuator that causes the hot water and cold water mixing unit to operate;

a controller configured to control driving of the actuator; and

an operation unit configured to transmit information on a set temperature to the controller based on an operation of a user, wherein

the hot water and cold water mixing unit includes:

- a body casing in which a cold water inlet, a hot water inlet, and a mixed hot water and cold water outlet are formed;
- a thermo-sensitive energizing part whose energizing force changes in accordance with a temperature of mixed hot water to be capable of adjusting open degrees of the hot water inlet and the cold water inlet; and
- a valve body that is incorporated into the body casing to be able to slide along an axial direction of the body casing to adjust the open degrees of the hot water inlet and the cold water inlet, and

the controller is further configured to:

- in receiving the information on the set temperature, drive the actuator to a predetermined position or by a predetermined drive amount which is corresponding to the set temperature to adjust a position of the valve body in an axial direction of the valve body.

2. The faucet device according to claim 1, wherein

the controller is further configured to:

- fix an open degree of the valve body until next changing the set temperature after changing the set temperature.

3. The faucet device according to claim 1, wherein

the controller is further configured to:

- drive the actuator until next changing the set temperature after changing the set temperature, not to change an open degree of the valve body.

4. The faucet device according to claim 2, wherein

the actuator includes a motor, and

the controller is further configured to:

- release excitation of the motor after driving the motor to the predetermined position or by the predetermined drive amount.

5. The faucet device according to claim 4, wherein

the motor includes a stepping motor, and

the stepping motor and the valve body are fixed in an aligned state.

6. The faucet device according to claim 1 further comprising:

- a temperature sensor that detects a water temperature, wherein

the water spout part includes:

- a first water spout part; and
- a second water spout part that is arranged in a position lower than the first water spout part, and

the controller is further configured to:

- in a case where a water temperature detected by the temperature sensor during spouting water is equal to or more than a predetermined temperature, execute controlling for spouting water from the second water spout part.

7. The faucet device according to claim 1 further comprising:

- a temperature sensor that detects a water temperature, wherein

the controller is further configured to:

- in a case where a water temperature detected by the temperature sensor during spouting water is equal to or more than a predetermined temperature, drive the actuator such that the valve body moves in a direction for reducing an open degree of the hot water inlet.

8. The faucet device according to claim 1, wherein

in a case where being continuously operated within a predetermined time interval to increase the set temperature, the operation unit regulates change in the set temperature into a temperature that is equal to or more than a predetermined temperature.

9. The faucet device according to claim 1, wherein

the controller is further configured to:

- be capable of executing a calibration mode for adjusting setting of the predetermined position or the predetermined drive amount in accordance with at least one of an arrangement environment and product unevenness,

the actuator includes a motor, and

the controller is further configured to:

- drive the motor while spouting water from the water spout part to execute the calibration mode; and
- during the calibration mode, release excitation of the motor after driving the motor.

* * * * *