



US 20250280938A1

(19) **United States**

(12) **Patent Application Publication**
Copeland

(10) **Pub. No.: US 2025/0280938 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **BLOW DRYER ATTACHMENT SECURING DEVICE**

(52) **U.S. Cl.**

CPC **A45D 20/122** (2013.01)

(71) Applicant: **Toni Copeland**, Atlanta, GA (US)

(57)

ABSTRACT

(72) Inventor: **Toni Copeland**, Atlanta, GA (US)

(21) Appl. No.: **19/074,510**

(22) Filed: **Mar. 10, 2025**

Related U.S. Application Data

(60) Provisional application No. 63/562,727, filed on Mar. 8, 2024.


Publication Classification

(51) **Int. Cl.**

A45D 20/12

(2006.01)

A blow dryer attachment securing device is disclosed for applying different attachments to blow dryers to utilize different tools when styling and maintaining hair. The blow dryer attachment securing device allows various attachments to remain secured to the blow dryer when applied. The blow dryer attachment securing device comprises a front surface, comprising a grip area, a back surface, hook and loop fasteners, and a buckle component. Additionally, the grip area prevents the attachment from shifting or falling off of the blow dryer. The buckle component allows the width of the device to be adjusted to fit the desired blow dryer. Further, hook and loop fasteners allow the device to be secured into the desired placement on the blow dryer. Finally, the flexible material allows the device to be applied universally to all blow dryers.

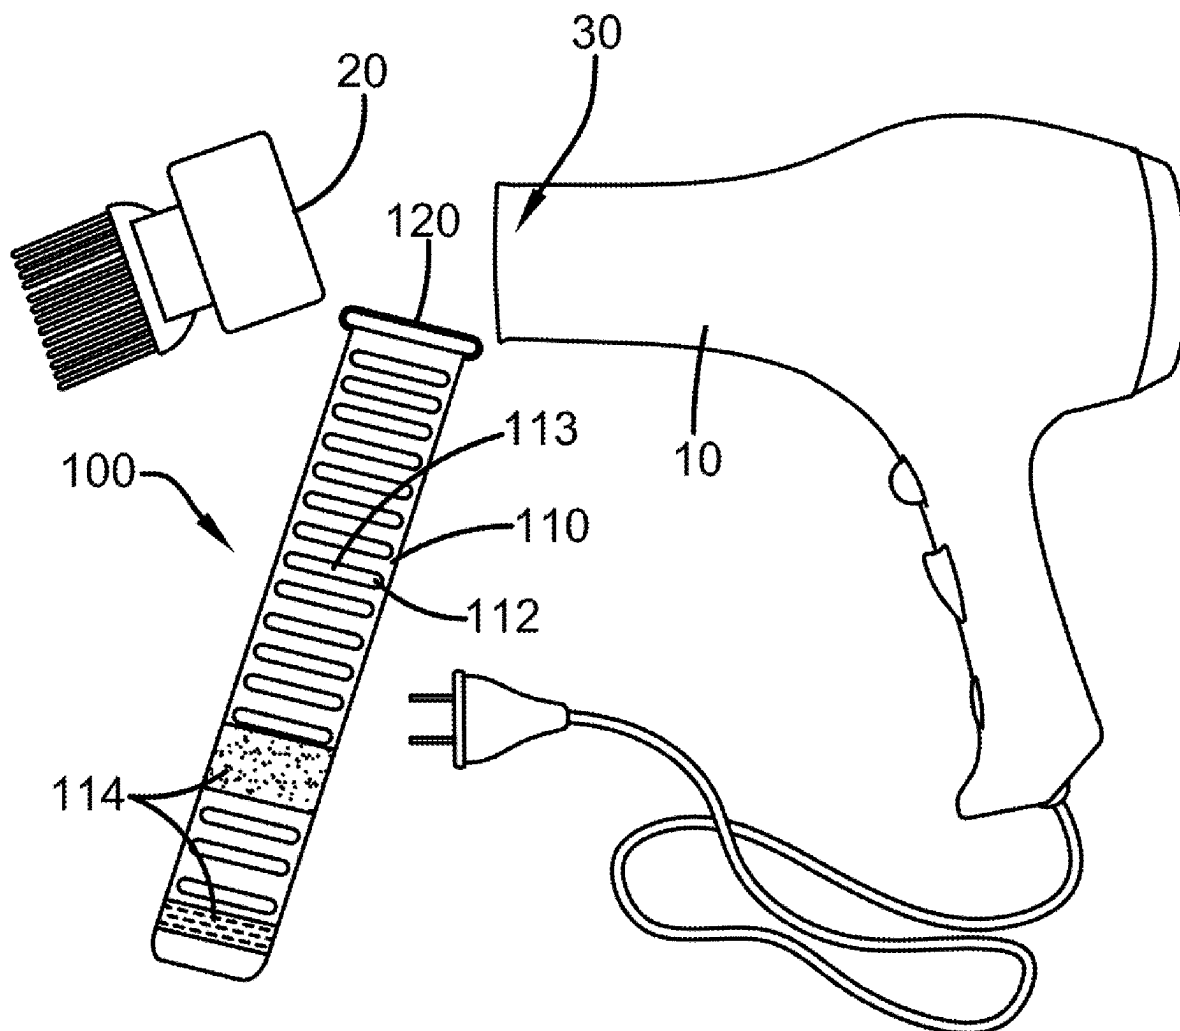

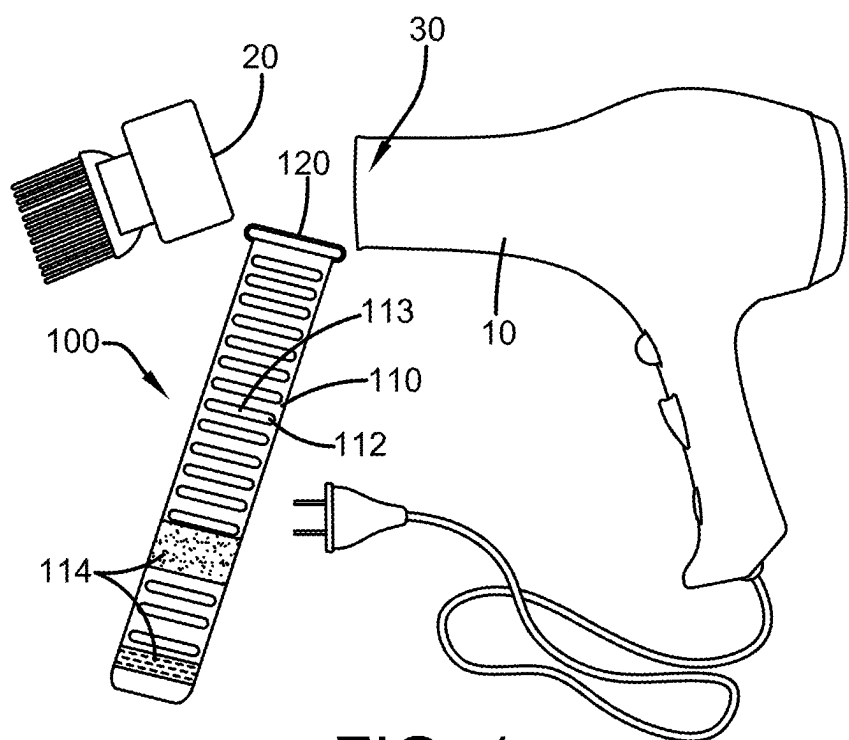


FIG. 1

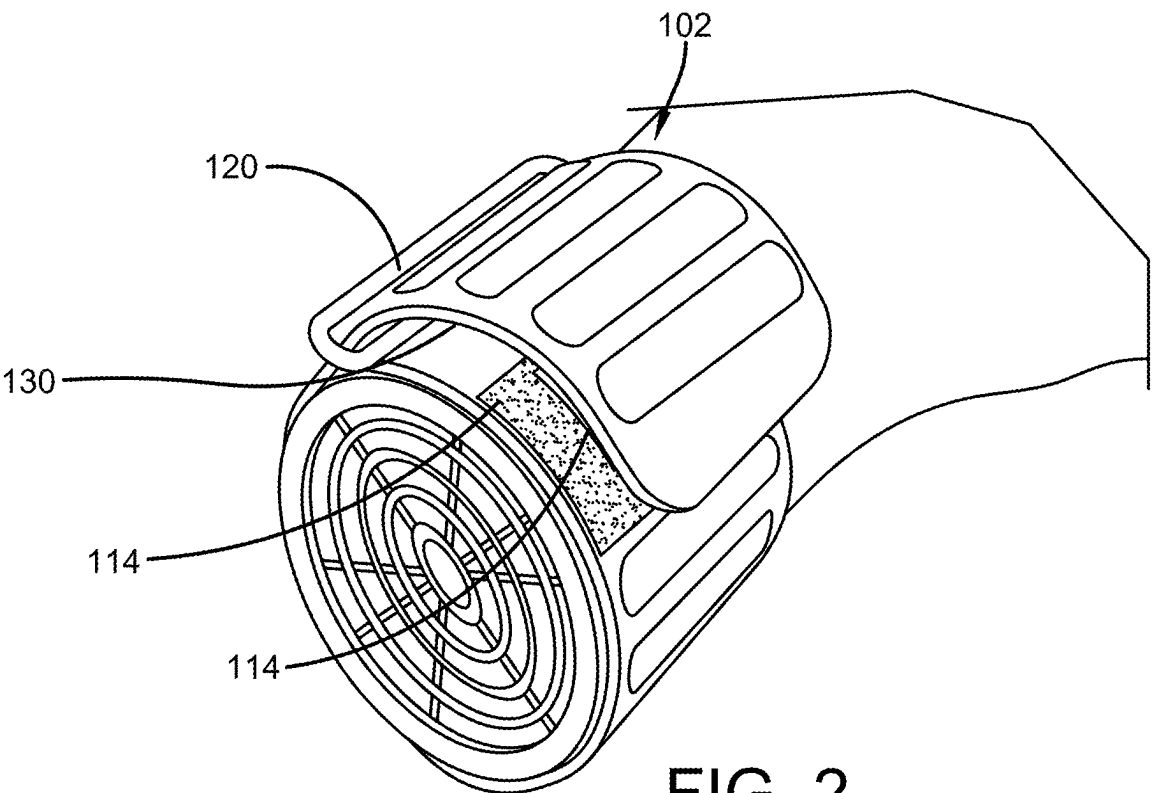


FIG. 2

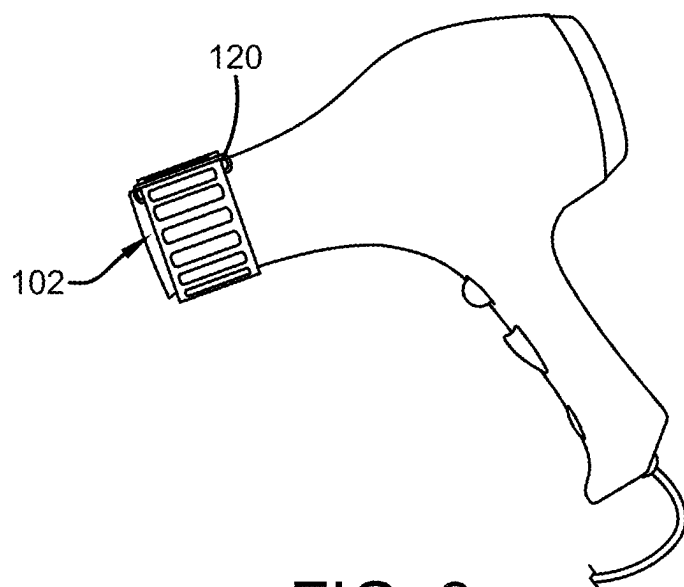


FIG. 3

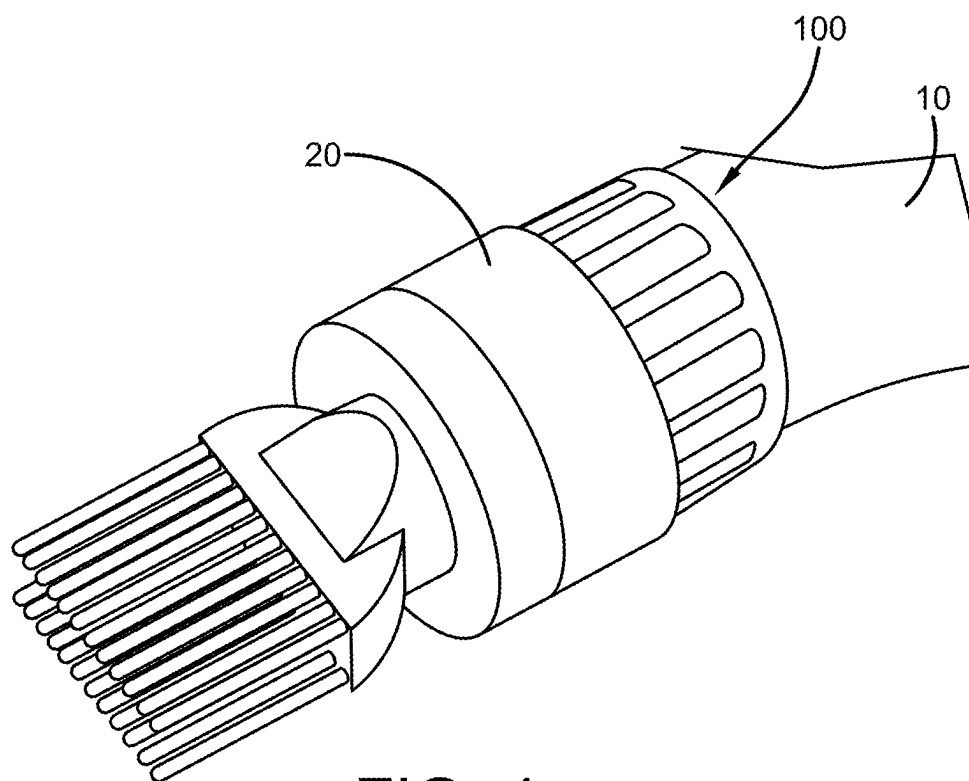


FIG. 4

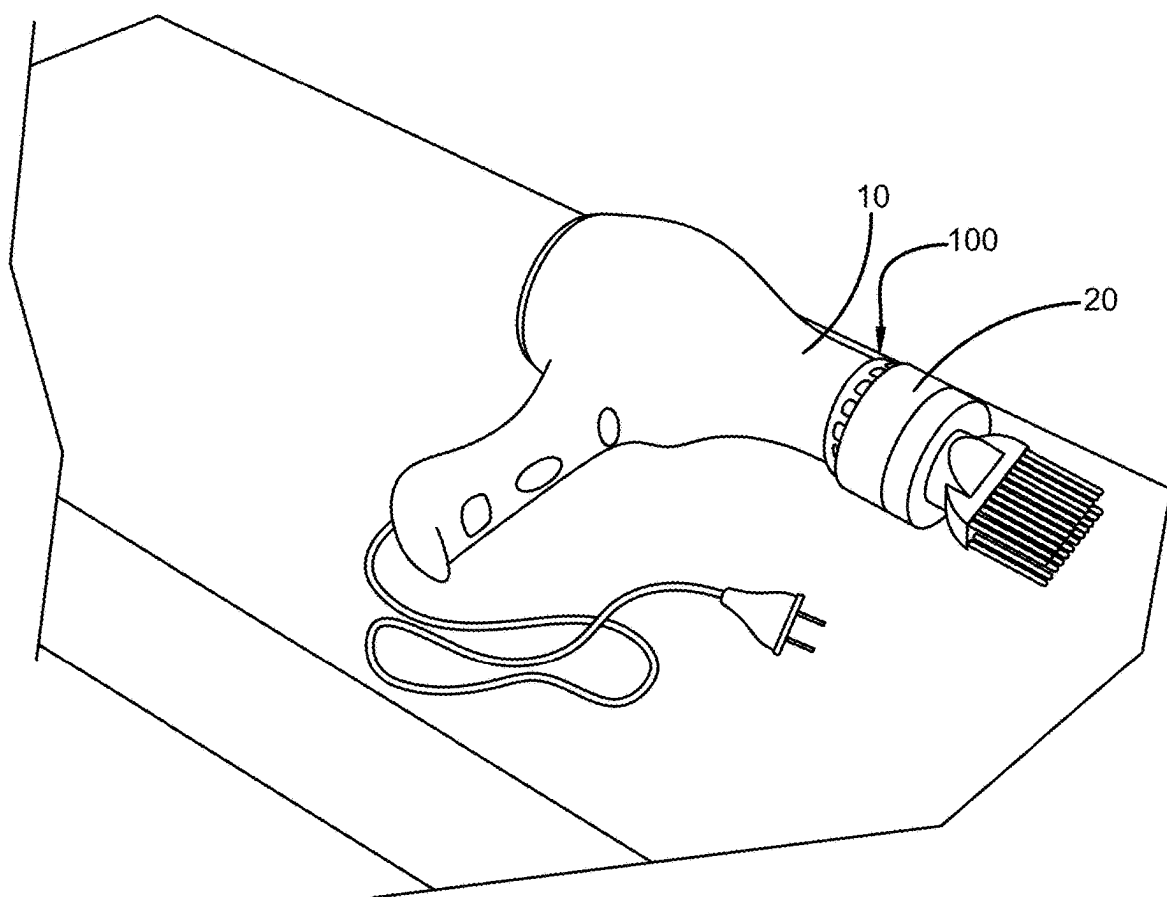


FIG. 5

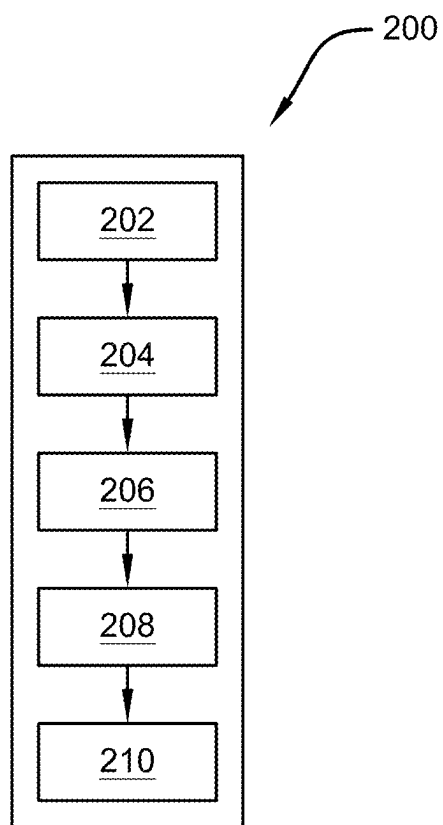


FIG. 6

BLOW DRYER ATTACHMENT SECURING DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority to, and the benefit of, U.S. Provisional Application No. 63/562,727, which was filed on Mar. 8, 2024, and is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

[0002] The present invention relates generally to the field of hair styling devices. More specifically, the present invention relates to an improved hair styling tool adaptor device that secures a hair styling attachment to the styling tool. Accordingly, this disclosure makes specific reference thereto the present invention. Nonetheless, it is to be appreciated that aspects of the present invention are also equally applicable to other like applications, devices and methods of manufacture.

BACKGROUND

[0003] By way of background, this invention relates to improvements in hair styling tool devices. Generally, cosmetologists, barbers, and in-home hair stylists may apply different attachments to their blow dryers to utilize different tools when styling and maintaining hair. However, these attachments may not remain secure enough and constantly fall off the device when being used. This forces the hair stylist to stop what they're doing, reapply the attachment, and then begin the styling routine again.

[0004] Additionally, there are times when stylists may attempt to grab the attachment and hold it securely to the styling tool. This tactic puts the hair stylist at risk for severe burns due to the elevated temperature of the hair styling tool. Further, this method of using the attachment on the device may result in the attachment becoming less effective leading to an undesired hairstyle or unsatisfied customer.

[0005] Accordingly, there is a demand for an improved hair styling tool adaptor device that allows users to safely utilize hair styling tool attachments. More particularly, there is a demand for a blow dryer attachment securing device that secures a replacement hair styling attachment to a hair drying tool.

[0006] Therefore, there exists a long-felt need in the art for a blow dryer attachment securing device that provides users with an improved approach to securing a replacement hair styling attachment to the hair blow dryer. There is also a long-felt need in the art for a blow dryer attachment securing device that provides users with a ribbed rubber or silicone sleeve that keeps the blow dryer's attachment secure while the dryer is being used. Further, there is a long-felt need in the art for a blow dryer attachment securing device that features hook and loop fastener patches along the length of the sleeve to fit the appropriate width of all blow dryer tools. Moreover, there is a long-felt need in the art for a device that allows users to apply a blow dryer attachment over the sleeve, utilizing its ribbed surface to keep the attachment in the proper position. Finally, there exists a long-felt need in the art for a blow dryer attachment securing device that enables users to apply blow dryer attachment quickly and easily without having to physically hold the attachment on the dryer, preventing the user from injury.

[0007] The subject matter disclosed and claimed herein, in one embodiment thereof, comprises a blow dryer attachment securing device. The device is a tool capable of securing a replacement hair styling tool attachment to a blow dryer. The device is comprised of a rectangular rubber or silicone material. Further, the back of the device is comprised of a smooth surface to allow the device to lay flat against the blow dryer nozzle. Additionally, the front of the device is comprised of a ribbed surface to prevent the device from becoming out of place once applied to the blow dryer. Further, the device is comprised of hook and loop fastener patches that allow the device to be secured around the end of the hair dryer. Additionally, the hook and loop fasteners allow the device to be adjusted to accommodate all handheld blow dryers. Accordingly, the device makes securing hair styling tool attachments to blow dryers easier for stylists. The device also accounts for the comfortability of the hair stylist and client during hair preparation.

[0008] In this manner, the blow dryer attachment securing device of the present invention accomplishes all of the forgoing objectives and provides users with a device that helps secure hair styling tool attachments to a blow dryer. The device can secure a plurality of attachments universally to blow dryers.

SUMMARY OF THE INVENTION

[0009] The following presents a simplified summary in order to provide a basic understanding of some aspects of the disclosed innovation. This summary is not an extensive overview, and it is not intended to identify key/critical elements or to delineate the scope thereof. Its sole purpose is to present some general concepts in a simplified form as a prelude to the more detailed description that is presented later.

[0010] The subject matter disclosed and claimed herein, in one embodiment thereof, comprises a blow dryer attachment securing device. The device is a tool capable of securing a replacement hair styling tool attachment to a blow dryer. The device is comprised of a rectangular rubber or silicone material. Further, the back of the device is comprised of a smooth surface to allow the device to lay flat against the blow dryer nozzle. Additionally, the front of the device is comprised of a grip area to prevent the device from becoming out of place once applied to the blow dryer. Further, the device is comprised of hook and loop fastener patches that allow the device to be secured around the end of the hair dryer. Additionally, the hook and loop fasteners allow the device to be adjusted to accommodate all handheld blow dryers. Accordingly, the device makes securing hair styling tool attachments to blow dryers easier for stylists. The device also accounts for the comfortability of the hair stylist and client during hair preparation.

[0011] In one embodiment, the blow dryer attachment securing device is made up, at a minimum, of the following components: a front surface comprising a grip area, hook and loop fasteners to secure the device, a buckle component to adjust the device, and a back surface of the device. Optional items may be added to create additional functionality or increase safety, as needed.

[0012] In one embodiment, the device is comprised of a front surface comprising a recessed or textured grip area. The grip area on the front surface prevents the blow dryer attachment from shifting or falling off while the user is

drying their hair. Additionally, the front surface is comprised of hook and loop fasteners that allow the device to be secured to the blow dryer.

[0013] In one embodiment, the device is comprised of a back surface that is a smooth texture. The smooth surface allows the device to lay flat against the blow dryer nozzle. The smooth texture will prevent any gaps when the device is attached to the blow dryer creating a seamless fit.

[0014] In one embodiment, the device comprised of a buckle component creating an adjustable device. The buckle component attaches each end of the device around the blow dryer. Additionally, the buckle component allows the device to be adjustable to fit a plurality of blow dryers.

[0015] In yet another embodiment, a method of securing a replacement blow dryer attachment to a blow dryer is disclosed. The method includes steps of providing a blow dryer attachment securing device comprising a front surface comprising a grip area, a back surface, hook and loop fasteners, and a buckle component. The method also comprises wrapping the back surface of the device around the barrel of the blow dryer. Further, the method comprises adjusting the size of the device using the buckle component. The method also comprises securing the device around the barrel of the blow dryer using the hook and loop fasteners. Finally, the method comprises affixing the blow dryer attachment over the device secured to the blow dryer.

[0016] Accordingly, the blow dryer attachment securing device of the present invention is particularly advantageous as it provides users with a rubber or silicone sleeve that keeps blow dryer attachments secure while the dryer is in use. More specifically, the blow dryer attachment securing device allows users to apply a blow dryer attachment over the sleeve, utilizing its ribbed surface to keep the attachment in place. Furthermore, the device features hook and loop fasteners to secure the device in place. In this manner, the device enables users to apply blow dryer attachments quickly and easily without having to physically hold the attachment on the dryer or constantly reattaching it.

[0017] To the accomplishment of the foregoing and related ends, certain illustrative aspects of the disclosed innovation are described herein in connection with the following description and the annexed drawings. These aspects are indicative, however, of but a few of the various ways in which the principles disclosed herein can be employed and are intended to include all such aspects and their equivalents. Other advantages and novel features will become apparent from the following detailed description when considered in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The description refers to provided drawings in which similar reference characters refer to similar parts throughout the different views, and in which:

[0019] FIG. 1 illustrates a perspective view of one embodiment of the blow dryer attachment securing device comprising adjustable hook and loop fasteners with attachment connected to the blow dryer of the present invention in accordance with the disclosed architecture;

[0020] FIG. 2 illustrates a perspective view of one embodiment of the blow dryer attachment securing device applied to the end of a hair dryer of the present invention in accordance with the disclosed architecture;

[0021] FIG. 3 illustrates a perspective view of one embodiment of how the blow dryer attachment securing

device is secured to a hair dryer via the hook and loop fasteners of the present invention in accordance with the disclosed architecture;

[0022] FIG. 4 illustrates a perspective view of one embodiment of how the blow dryer attachment fits over the blow dryer attachment securing device of the present invention in accordance with the disclosed architecture;

[0023] FIG. 5 illustrates a perspective view of one embodiment of the blow dryer attachment securing device stored on the hair dryer of the present invention in accordance with the disclosed architecture; and

[0024] FIG. 6 illustrates a flowchart of a method of using one potential embodiment of a blow dryer attachment securing device of the present invention in accordance with the disclosed architecture.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

[0025] The innovation is now described with reference to the drawings, wherein like reference numerals are used to refer to like elements throughout. In the following description, for purposes of explanation, numerous specific details are set forth to provide a thorough understanding thereof. It may be evident, however, that the innovation can be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form to facilitate a description thereof. Various embodiments are discussed hereinafter. It should be noted that the figures are described only to facilitate the description of the embodiments. They are not intended as an exhaustive description of the invention and do not limit the scope of the invention. Additionally, an illustrated embodiment need not have all the aspects or advantages shown. Thus, in other embodiments, any of the features described herein from different embodiments may be combined.

[0026] As noted above, there exists a long-felt need in the art for a blow dryer attachment securing device that provides users with an improved approach in securing a replacement hair styling attachment to the hair blow dryer. There is also a long-felt need in the art for a blow dryer attachment securing device that provides users with a ribbed rubber or silicone sleeve that secures blow dryer attachments to the blow dryer while being used. Further, there is a long-felt need in the art for a blow dryer attachment securing device that features hook and loop fastener patches along the length of the sleeve to fit the appropriate width of all blow dryer tools. Moreover, there is a long-felt need in the art for a device that allows users to apply a blow dryer attachment over the sleeve, utilizing its ribbed surface to keep the attachment in the proper position. Finally, there exists a long-felt need in the art for a blow dryer attachment securing device that enables users to apply blow dryer attachment quickly and easily without having to physically hold the attachment on the dryer, preventing the user from injury.

[0027] The subject matter disclosed and claimed herein, in one embodiment thereof, comprises a blow dryer attachment securing device. The device is a tool capable of securing a replacement hair styling tool attachment to a blow dryer. The device is comprised of a rectangular rubber or silicone piece. Further, the back of the device is comprised of a smooth surface to allow the device to lay flat against the blow dryer nozzle. Additionally, the front of the device is comprised of a grip area to prevent the device from becoming out of place once applied to the blow dryer. Further, the device is

comprised of hook and loop fasteners that allow the device to be secured around the end of the hair dryer. Additionally, the hook and loop fasteners allow the device to be adjusted to accommodate all handheld blow dryers. Accordingly, the device makes securing hair styling tool attachments to blow dryers easier for stylists. The device also accounts for the comfortability of the hair stylist and client during hair preparation.

[0028] More specifically, the blow dryer attachment securing device is made up, at a minimum, of the following components: a front surface comprising a grip area, hook and loop fasteners to secure the device, a buckle component to adjust the width of the device, and a back surface of the device. Optional items may be added to create additional functionality or increase safety, as needed.

[0029] During use, the grip area on the front surface prevents the blow dryer attachment from shifting or falling off while the user is drying hair. Additionally, the front surface is comprised of hook and loop fasteners that allow the device to be secured to the blow dryer. Furthermore, the smooth texture comprised on the back surface of the device, allows the device to lay flat against the blow dryer nozzle. The smooth texture will prevent any gaps when the device is attached to the blow dryer. Finally, the buckle component creates an adjustable device. The buckle component allows the device to attach to the end of the blow dryer. Additionally, the buckle component allows the device to fit a plurality of blow dryers.

[0030] The present invention is also comprised of a method of using the device. The method includes steps of providing a blow dryer attachment securing device comprising a front surface comprising a grip area, a back surface, hook and loop fasteners, and a buckle component. The method also comprises wrapping the back surface of the device around the barrel of the blow dryer. Further, the method comprises adjusting the size of the device using the buckle component. The method also comprises securing the device around the barrel of the blow dryer using the hook and loop fasteners. Finally, the method comprises affixing the blow dryer attachment over the device secured to the blow dryer.

[0031] Accordingly, the blow dryer attachment securing device of the present invention is particularly advantageous as it provides users with a rubber or silicone sleeve that keeps blow dryer attachments secure while the dryer is in use. More specifically, the blow dryer attachment securing device allows users to apply a blow dryer attachment over the sleeve, utilizing its ribbed surface to keep the attachment in place. Furthermore, the device features hook and loop fasteners to secure the device in place. In this manner, the device enables users to apply blow dryer attachments quickly and easily without having to physically hold the attachment on the dryer or constantly reattaching it.

[0032] Referring initially to the drawings, FIG. 1 illustrates a perspective view of one embodiment of the blow dryer attachment securing device **100** comprising adjustable hook and loop fasteners **114** with attachment **20** connected to the blow dryer **10** of the present invention in accordance with the disclosed architecture. Generally, the present invention is directed to a blow dryer attachment securing device **100** that has particular utility in securing different attachments **20** to blow dryers **10** to utilize different tools when styling and maintaining hair. These attachments **10** may not remain secured to the blow dryer **20** and are constantly

becoming detached when being used. In the present invention, the blow dryer attachment securing device **100** prevents the attachments **20** from becoming detached from the blow dryer **20** nozzle. Additionally, the device **100** is adjustable and is compatible with a plurality of blow dryers **20** shapes and sizes.

[0033] The device **100** comprises a body **102** comprised of a front surface **110** comprising a grip area **112**, at least one fastener **114**, a buckle component **120**, and a back surface **130**. The device **100** is typically, but not limited to, rectangular in shape, preferably measuring 5 to 6 inches in length and 1 to 2 inches in width. Additionally, the device **100** is preferably made from a rubber or silicone material that can withstand high temperatures produced by the hair dryer **10** to protect a user from being burned by the hair dryer **10**.

[0034] Further, the device **100** comprises a front surface **110**. The front surface **110** is comprised of at least one grip area **112**. Specifically, the grip area **112** prevents an attachment **20** from moving from the desired placement once applied to the hair dryer **10**. Additionally, the grip area **112** prevents the attachment **20** from becoming detached from the blow dryer **10**. Due to the grip area **112**, users do not need to hold the attachment **20** to the nozzle area **30** of the blow dryer **10**. The grip area **112** is preferably comprised of a textured grip area that may be comprised of a raised and/or recessed texture **113**. The texture **113** further secures an attachment **20** to the device **100** (and thus to the blow dryer **10**).

[0035] Moreover, the device **100** comprises a back surface **130**. The back surface **130** preferably has a smooth texture to allow the surface **130** to lay flat against around nozzle area **30** of the blow dryer **10**. The smooth texture will prevent any gaps when the device is attached to the blow dryer **10**. Additionally, the smooth texture of the back surface **130** prevents the device **100** from shifting or moving from the desired placement. The back surface **130** may be comprised of a non-slip rubber material to further prevent movement/shifting of the device **100** once applied around the nozzle area **30** of a blow dryer.

[0036] As shown in FIGS. 2-3, the blow dryer attachment securing device **100** is applied to a blow dryer **10** to firmly secure an attachment **20** with at least one fastener **114**. More specifically, the device **100** is preferably comprised of at least one (but preferably two) fastener(s) **114** positioned on the front surface **110**. In the preferred embodiment of the device **100** with two fasteners **114**, the fasteners **114** attach to one another to secure the device **100** around a nozzle of a blow dryer **10**. More specifically, the body **102** can be formed into a loop by feeding the body of the device **100** through the buckle component **120**, wherein the looped body **102** can then be placed around the nozzle area of a blow dryer **10**, tightened, and then secured to itself via the fasteners **114**. The fasteners **114** may be any type of reciprocating fastener type known in the art such as but not limited to a hook fastener and a loop fastener, a snap fastener and a button fastener, a pair of magnet fasteners, etc. The removable nature of the device **100** also allows the device **100** to be used with various different blow dryers **10**.

[0037] As shown in FIGS. 4-5, the blow dryer attachment securing device **100** secures the attachment **20** to the blow dryer **10**. Additionally, the attachment **20** is easily secured to the blow dryer **10** when placed over the blow dryer attachment securing device **100** due to the texture **113** of the front

surface 110. Further, the attachment 20 can remain on the blow dryer 10 while not in use.

[0038] FIG. 6 illustrates a flowchart of the method 200 for securing a replacement blow attachment 20 to a blow dryer 10. The method includes steps of at 202, providing a blow dryer attachment securing device 100 comprising a body 102 comprised of a front surface 110 comprising a grip area 112, a back surface 130, at least one fastener 114, and a buckle component 120. The method also comprises at 204, wrapping a body 102 of the device 100 such that the back surface 130 contacts around the barrel of the blow dryer 20. Further, the method comprises at 206, forming the body 102 into a loop by looping the body through the buckle component 120. The method also comprises at 208, securing the device 100 around the nozzle area 30 of the blow dryer 10 by attaching the fasteners 114 to themselves. Finally, the method comprises at 210, affixing a blow dryer attachment 20 over the device 100 to secure the attachment 20 to the blow dryer 10.

[0039] Certain terms are used throughout the following description and claims to refer to particular features or components. As one skilled in the art will appreciate, different users may refer to the same feature or component by different names. This document does not intend to distinguish between components or features that differ in name but not structure or function. As used herein “blow dryer attachment securing device”, “attachment device”, and “device” are interchangeable and refer to the blow dryer attachment securing device 100 of the present invention.

[0040] Notwithstanding the forgoing, the blow dryer attachment securing device 100 of the present invention can be of any suitable size and configuration as is known in the art without affecting the overall concept of the invention, provided that it accomplishes the above-stated objectives. One of ordinary skill in the art will appreciate that the blow dryer attachment securing device 100 as shown in FIGS. 1-5 is for illustrative purposes only, and that many other sizes and shapes of the blow dryer attachment securing device 100 are well within the scope of the present disclosure. Although the dimensions of the blow dryer attachment securing device 100 are important design parameters for user convenience, the blow dryer attachment securing device 100 may be of any size that ensures optimal performance during use and/or that suits the user's needs and/or preferences.

[0041] Various modifications and additions can be made to the exemplary embodiments discussed without departing from the scope of the present invention. While the embodiments described above refer to particular features, the scope of this invention also includes embodiments having different combinations of features and embodiments that do not include all of the described features. Accordingly, the scope of the present invention is intended to embrace all such alternatives, modifications, and variations as fall within the scope of the claims, together with all equivalents thereof.

[0042] What has been described above includes examples of the claimed subject matter. It is, of course, not possible to describe every conceivable combination of components or methodologies for purposes of describing the claimed subject matter, but one of ordinary skill in the art may recognize that many further combinations and permutations of the claimed subject matter are possible. Accordingly, the claimed subject matter is intended to embrace all such alterations, modifications and variations that fall within the spirit and scope of the appended claims. Furthermore, to the

extent that the term “includes” is used in either the detailed description or the claims, such term is intended to be inclusive in a manner similar to the term “comprising” as “comprising” is interpreted when employed as a transitional word in a claim.

What is claimed is:

1. A blow dryer attachment securing device comprising: a body comprised of a front surface and a back surface; a fastener positioned on the front surface; and a buckle component.
2. The blow dryer attachment securing device of claim 1, wherein the body is comprised of a heat-resistant material.
3. The blow dryer attachment securing device of claim 2, wherein the heat-resistant material is comprised of a rubber or a silicone.
4. The blow dryer attachment securing device of claim 1, wherein the fastener is comprised of a hook fastener, a loop fastener, a snap fastener, a button fastener, or a magnet fastener.
5. The blow dryer attachment securing device of claim 1, wherein the front surface is comprised of a grip area comprised of a texture.
6. The blow dryer attachment securing device of claim 1, wherein the texture is comprised of a raised texture.
7. The blow dryer attachment securing device of claim 1, wherein the texture is comprised of a recessed texture.
8. The blow dryer attachment securing device of claim 1, wherein the back surface is comprised of a smooth surface.
9. The blow dryer attachment securing device of claim 1, wherein the back surface is comprised of a non-slip rubber material.
10. The blow dryer attachment securing device of claim 1, wherein the body is comprised of a rectangular shape.
11. A blow dryer attachment securing device comprising: a blow dryer; a blow dryer attachment; and a body comprised of: a front surface comprised of a grip area and a back surface; a first fastener positioned on the front surface; a second fastener positioned on the front surface; and a buckle component.
12. The blow dryer attachment securing device of claim 11, wherein the first fastener and the second fastener are comprised of a pair of reciprocating fasteners.
13. The blow dryer attachment securing device of claim 12, wherein the first fastener is comprised of a hook fastener, a loop fastener, a snap fastener, a button fastener, or a magnet fastener.
14. The blow dryer attachment securing device of claim 12, wherein the fastener is comprised of a hook fastener, a loop fastener, a snap fastener, a button fastener, or a magnet fastener.
15. The blow dryer attachment securing device of claim 11, wherein the grip area is comprised of a texture.
16. The blow dryer attachment securing device of claim 15, wherein the texture is comprised of a raised texture.
17. The blow dryer attachment securing device of claim 15, wherein the texture is comprised of a recessed texture.
18. A method of using a blow dryer attachment securing device, the method comprising the following steps: providing a blow dryer attachment securing device comprised of a body comprised a front surface, a back surface, a fastener, and a buckle component;

wrapping the body around a nozzle area of a blow dryer such that the back surface contacts the nozzle area;
looping the body through the buckle component to form a loop around the nozzle area;
securing the body around the nozzle area by fastening the fastener; and
affixing an attachment over the body to secure the attachment to the blow dryer.

19. The method of using a blow dryer attachment securing device of claim **18**, wherein the fastener is positioned on the top surface.

20. The method of using a blow dryer attachment securing device of claim **18**, wherein the fastener is comprised of a hook fastener or a loop fastener.

* * * * *