



US0D1092330S

(12) **United States Design Patent** (10) **Patent No.:** **US D1,092,330 S**
Andersson (45) **Date of Patent:** **** Sep. 9, 2025**

(54) **BRAKE SHIM WITH SURFACE HAVING AN APPEARANCE OF A TRIAXIAL WEAVE PATTERN**

(71) Applicant: **Trelleborg Sealing Solutions Kalmar AB**, Kalmar (SE)

(72) Inventor: **Jonas Andersson**, Kalmar (SE)

(73) Assignee: **TRELLEBORG SEALING SOLUTIONS KALMAR AB**, Kalmar (SE)

(**) Term: **15 Years**

(21) Appl. No.: **29/900,141**

(22) Filed: **Aug. 17, 2023**

(51) **LOC (15) Cl.** **12-16**

(52) **U.S. Cl.** **D12/180**
USPC **D12/180**

(58) **Field of Classification Search**
USPC D12/180, 400; D15/148–149; D5/47
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

D356,985 S * 4/1995 Steinke D12/180
D357,655 S * 4/1995 Steinke D12/180
(Continued)

Primary Examiner — Jerry Shiuan-Hua Hsu

(74) *Attorney, Agent, or Firm* — Shore IP Group PLLC;
Sean R. Wilsusen

(57) **CLAIM**

The ornamental design for a brake shim with surface having an appearance of a triaxial weave pattern, as shown and described.

DESCRIPTION

FIG. 1 is a front elevation view of a brake shim with surface having an appearance of a triaxial thread-weave pattern according to a first embodiment of the present design;

FIG. 2 is a front perspective view of the brake shim with surface having an appearance of a triaxial thread-weave pattern of FIG. 1;

FIG. 3 is a front elevation view of a brake shim with surface having an appearance of a triaxial thread-weave pattern according to a second embodiment of the present design;

FIG. 4 is a front perspective view of the brake shim with surface having an appearance of a triaxial thread-weave pattern of FIG. 3;

FIG. 5 is a front elevation view of a brake shim with surface having an appearance of a triaxial thread-weave pattern according to a third embodiment of the present design;

FIG. 6 is a front perspective view of the brake shim with surface having an appearance of a triaxial thread-weave pattern of FIG. 5;

FIG. 7 is a front elevation view of a brake shim with surface having an appearance of a triaxial thread-weave pattern according to a fourth embodiment of the present design;

FIG. 8 is a front perspective view of the brake shim with surface having an appearance of a triaxial thread-weave pattern of FIG. 7;

FIG. 9 is a front elevation view of a brake shim with surface having an appearance of a triaxial thread-weave pattern according to a fifth embodiment of the present design;


FIG. 10 is a front perspective view of the brake shim with surface having an appearance of a triaxial thread-weave pattern of FIG. 9;

FIG. 11 is a front elevation view of a brake shim with surface having an appearance of a triaxial thread-weave pattern according to a sixth embodiment of the present design; and,

FIG. 12 is a front perspective view of the brake shim with surface having an appearance of a triaxial thread-weave pattern of FIG. 11.

In the drawings, the broken lines show portions of the brake shim that form no part of the claimed design.

1 Claim, 6 Drawing Sheets

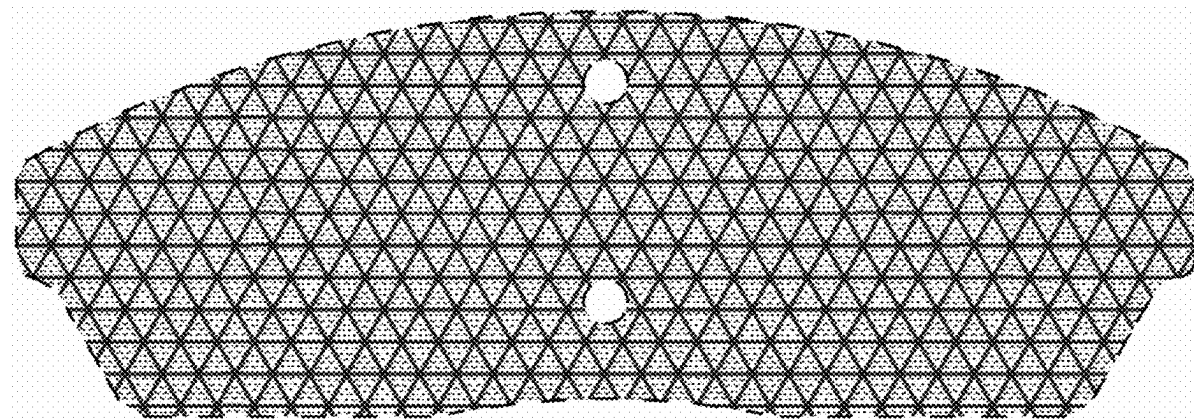

(58) **Field of Classification Search**

CPC F04B 2203/0605; F04B 2203/1201; F16D
65/0012; F16D 69/00

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D368,457	S *	4/1996	Steinke	D12/180
6,213,260	B1 *	4/2001	Sirany	F16D 69/00
				451/63
D547,245	S *	7/2007	Sehmer	D12/180
D614,552	S *	4/2010	Liu	D12/180
D680,480	S *	4/2013	Magaard	D12/180
D684,906	S *	6/2013	Magaard	D12/180
D691,075	S *	10/2013	Magaard	D12/180
D787,392	S *	5/2017	Buxton	D12/180
D956,638	S *	7/2022	Andersson	D12/180
2020/0309208	A1 *	10/2020	Andersson	F16D 65/0012

* cited by examiner

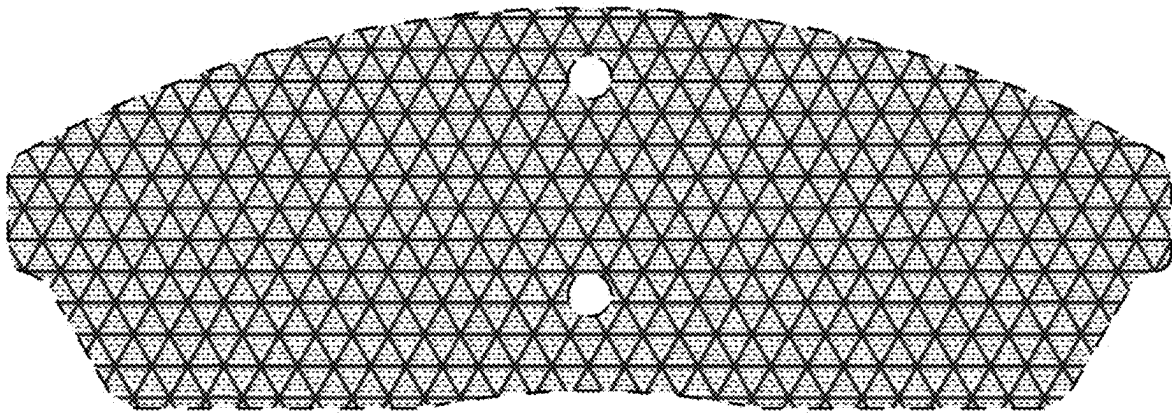


Fig. 1

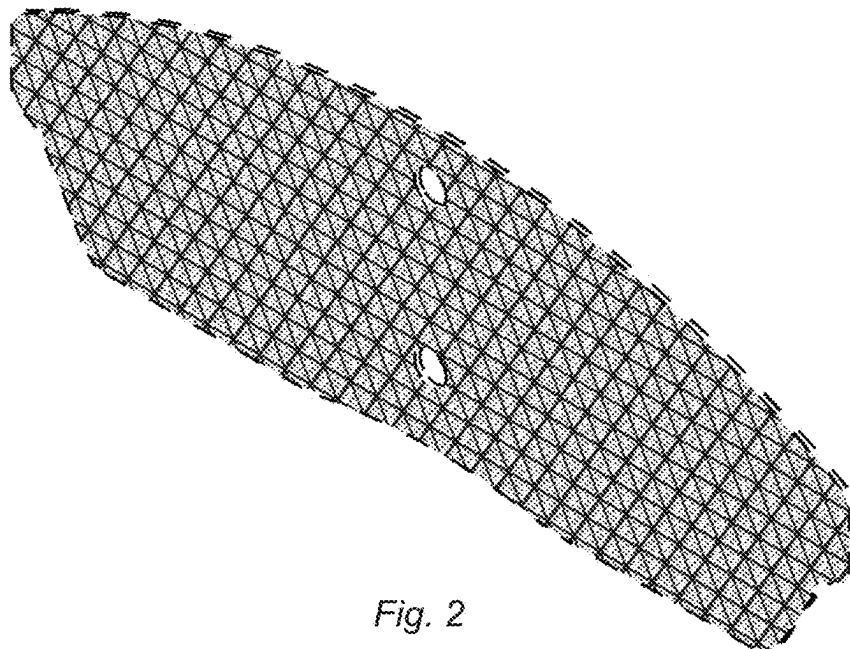


Fig. 2

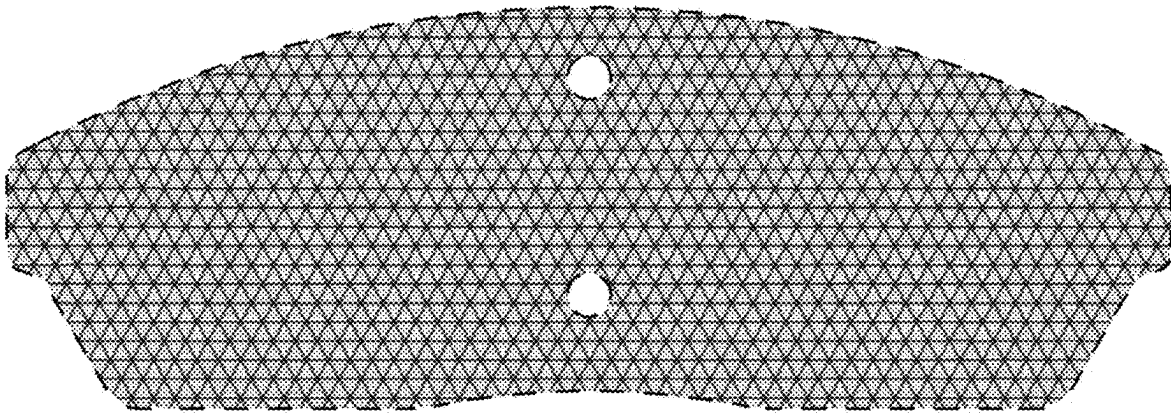


Fig. 3

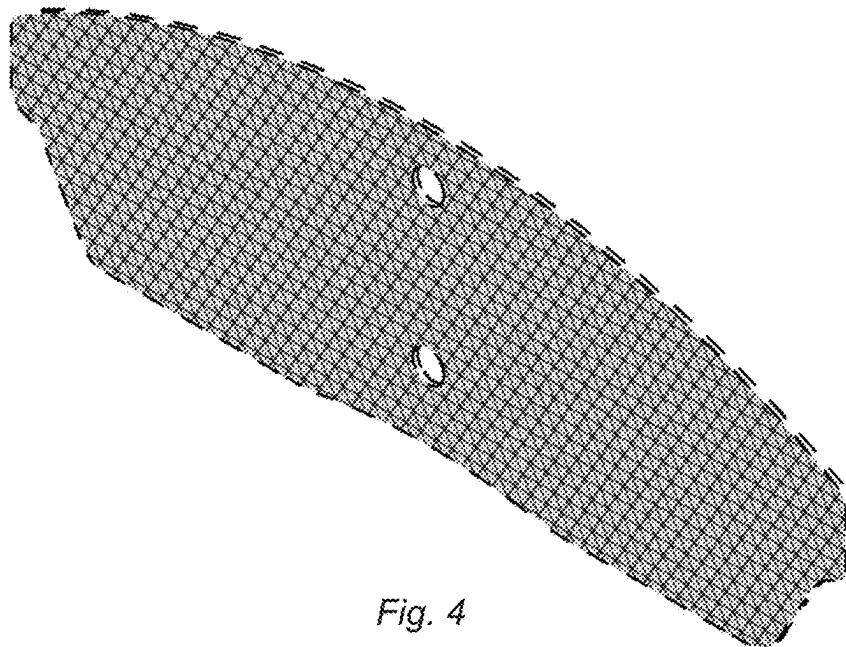


Fig. 4

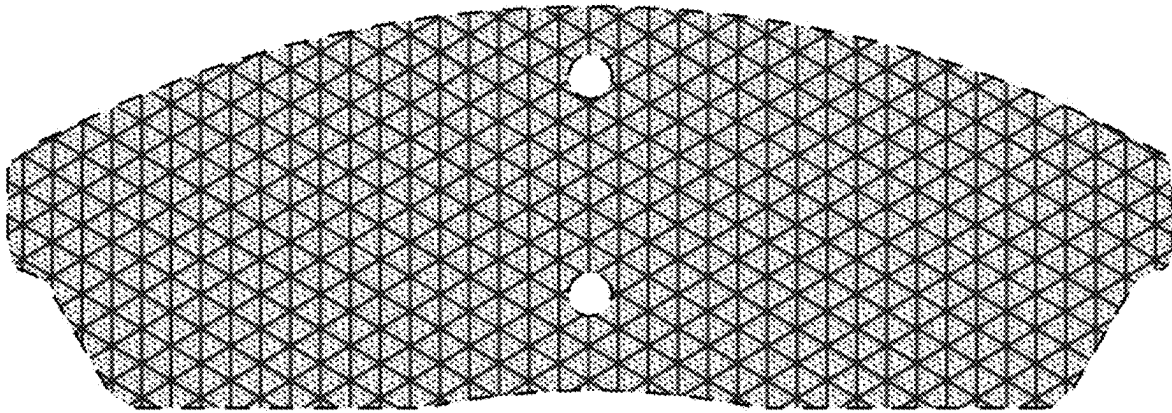


Fig. 5

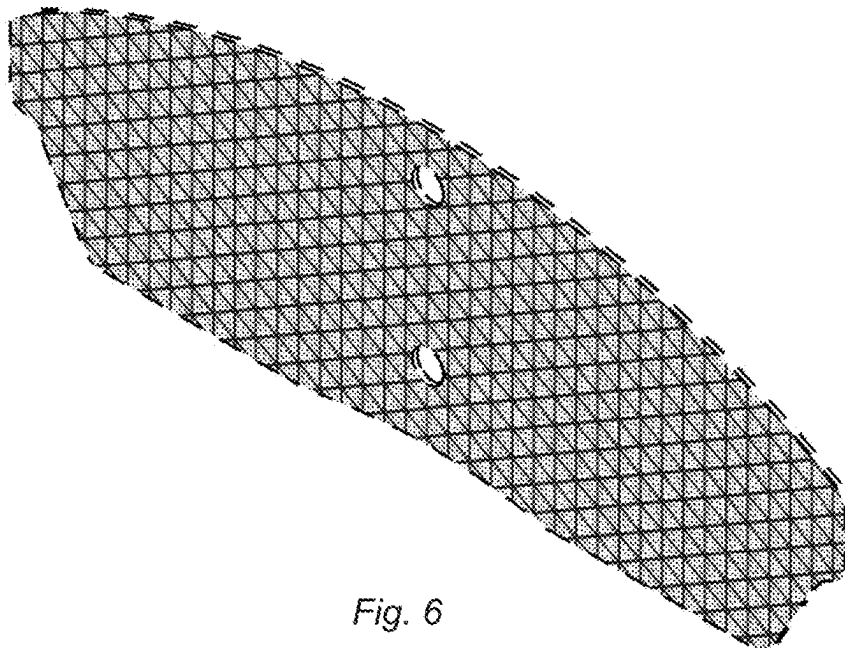


Fig. 6

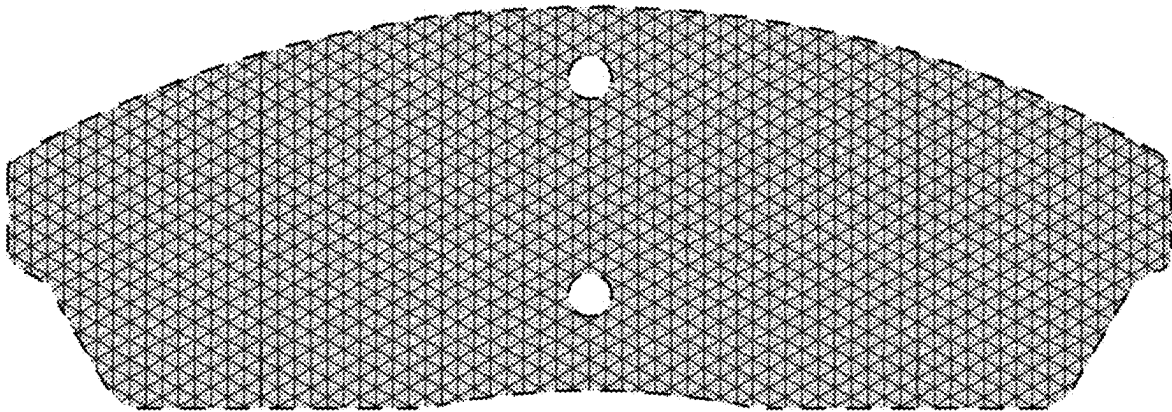


Fig. 7

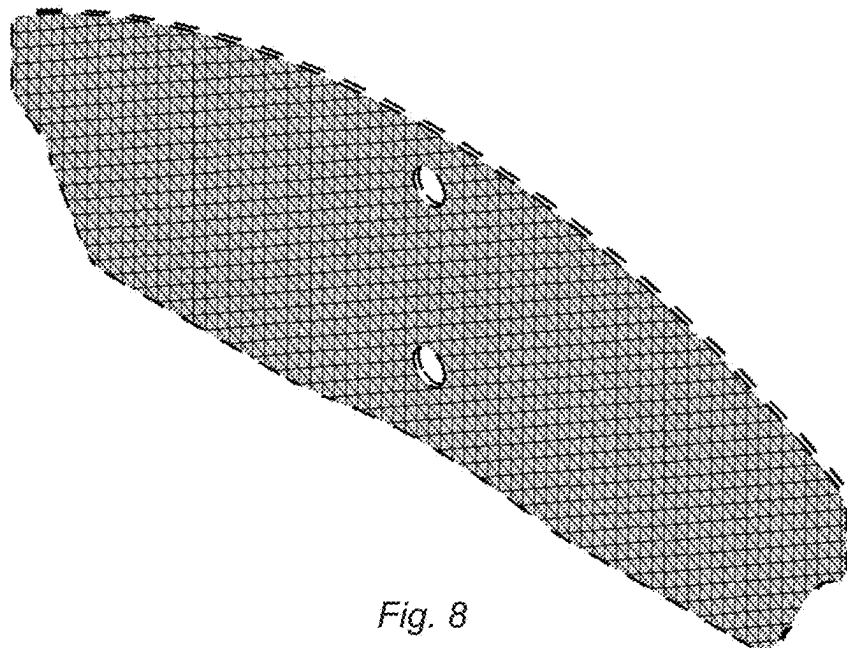


Fig. 8

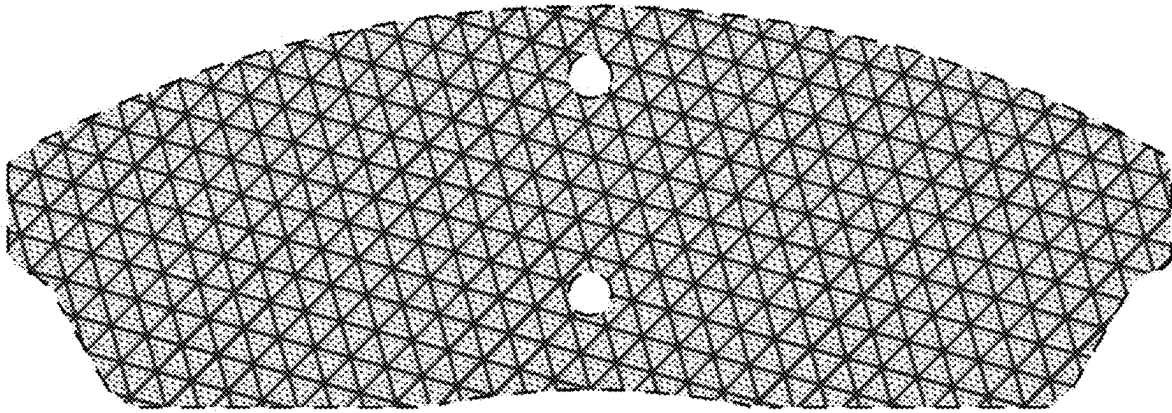


Fig. 9

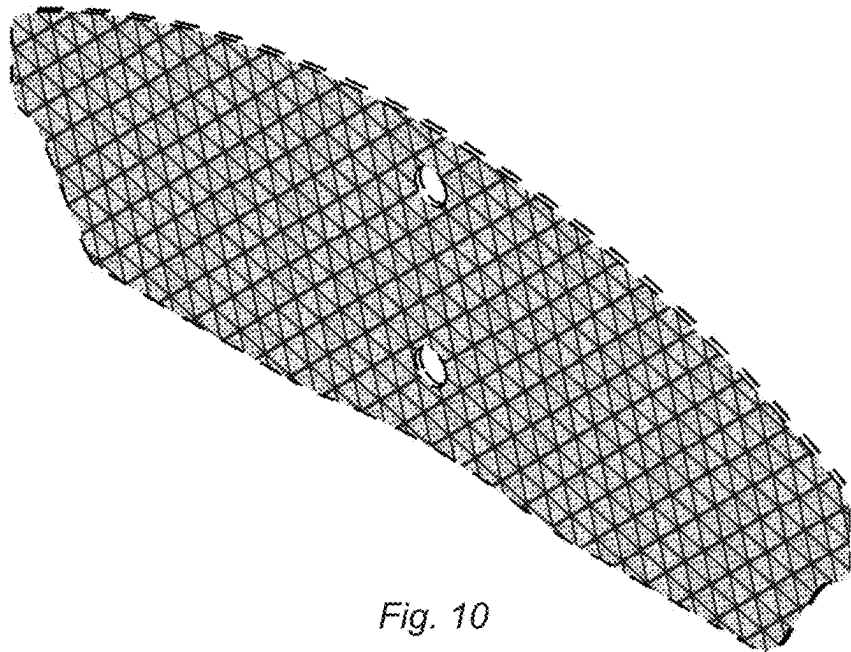


Fig. 10

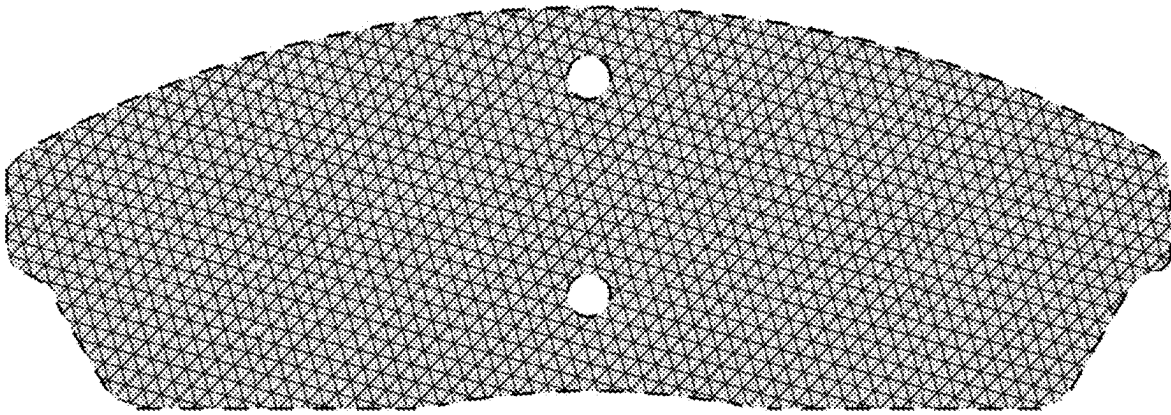


Fig. 11

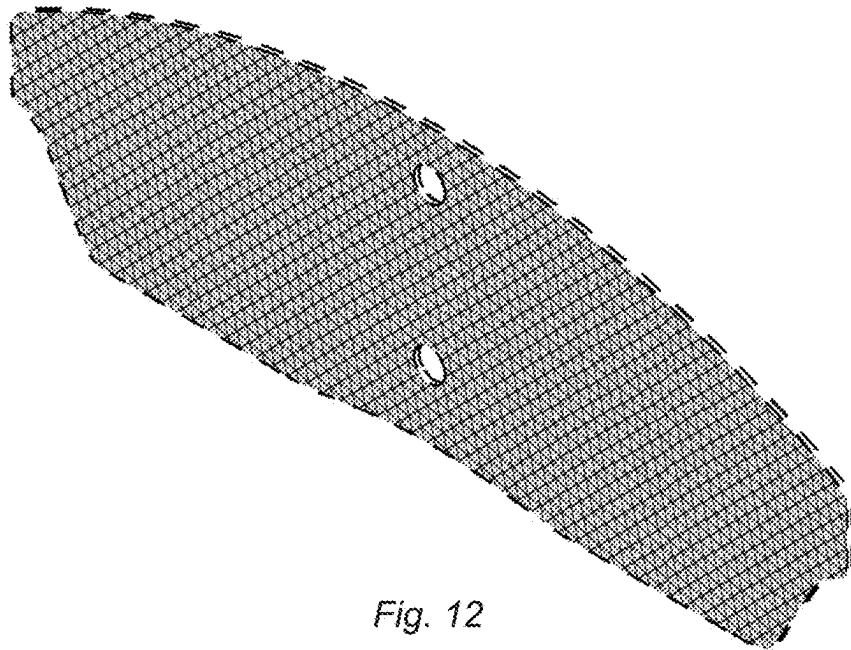


Fig. 12