



US012396909B2

(12) **United States Patent**
Lim et al.

(10) **Patent No.:** **US 12,396,909 B2**
(45) **Date of Patent:** **Aug. 26, 2025**

(54) **SURGICAL PLATFORM SYSTEM**

(56) **References Cited**

(71) Applicant: **Warsaw Orthopedic, Inc.**, Warsaw, IN (US)

U.S. PATENT DOCUMENTS

2,691,979 A 10/1954 Watson
3,060,925 A 10/1962 Honsaker et al.
(Continued)

(72) Inventors: **Roy K. Lim**, Memphis, TN (US);
Katharine E. Darling, Louisville, CO (US); **Mark C. Dace**, Memphis, TN (US)

FOREIGN PATENT DOCUMENTS

CN 110025380 7/2019
EP 3158986 4/2017
(Continued)

(73) Assignee: **Warsaw Orthopedic, Inc.**, Warsaw, IN (US)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 447 days.

International Search Report and Written Opinion dated Jul. 19, 2023 in PCT/IB2023/054288.

(Continued)

(21) Appl. No.: **17/897,356**

Primary Examiner — Fredrick C Conley

(22) Filed: **Aug. 29, 2022**

(74) *Attorney, Agent, or Firm* — Womble Bond Dickinson (US) LLP

(65) **Prior Publication Data**

US 2024/0065912 A1 Feb. 29, 2024

(57) **ABSTRACT**


(51) **Int. Cl.**
A61G 13/08 (2006.01)
A61G 13/00 (2006.01)
(Continued)

A surgical platform system facilitating manipulation of a patient support thereby is provided. The surgical platform system can include a support supporting a linkage portion, a first platform portion, and a second platform portion relative to the ground. The linkage portion can include a base pivotally attached to the support, a first connector pivotally supported by the base, and a first support portion and a second support portion pivotally supported by the first connector. The first platform portion can be supported by the first support portion and the second support portion, and the second platform can be supported by the base. Pivotal movement of the first platform portion relative to the base via pivotal movement of the connector, and pivotal movement of the second platform portion relative to the support via pivotal movement of the base can serve to separately articulate the first platform portion and the second platform portion relative to one another.

(52) **U.S. Cl.**
CPC **A61G 13/08** (2013.01); **A61G 13/0054** (2016.11); **A61G 13/04** (2013.01);
(Continued)

20 Claims, 24 Drawing Sheets

(58) **Field of Classification Search**
CPC A61G 13/00; A61G 13/04; A61G 13/08; A61G 13/0054; A61G 13/06; A61G 13/104; A61G 13/1205; A61G 2200/325
See application file for complete search history.

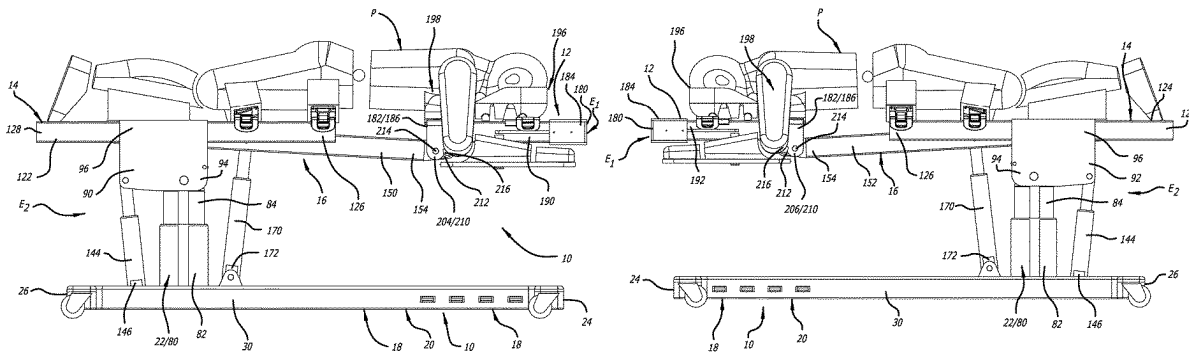

(51)	Int. Cl.		7,472,440 B2	1/2009	Bartlett et al.
	<i>A61G 13/04</i>	(2006.01)	7,484,253 B1	2/2009	Coppens
	<i>A61G 13/06</i>	(2006.01)	7,496,980 B2	3/2009	Sharps
	<i>A61G 13/10</i>	(2006.01)	7,565,708 B2	7/2009	Jackson
	<i>A61G 13/12</i>	(2006.01)	7,600,281 B2	10/2009	Skrripps
(52)	U.S. Cl.		7,669,262 B2	3/2010	Skrripps
	CPC	<i>A61G 13/06</i> (2013.01); <i>A61G 13/104</i>	7,739,762 B2	6/2010	Lamb et al.
		(2013.01); <i>A61G 13/1205</i> (2013.01); <i>A61G</i>	7,882,583 B2	2/2011	Skrripps
		<i>2200/325</i> (2013.01)	8,060,960 B2	11/2011	Jackson
			8,118,029 B2	2/2012	Gneiting et al.
			8,286,283 B2	10/2012	Copeland et al.
			8,286,637 B2	10/2012	Kaska
			8,381,331 B2	2/2013	Sharps et al.
			8,381,335 B2	2/2013	Ahlman
			8,413,660 B2	4/2013	Weinstein et al.
(56)	References Cited		8,424,133 B1 *	4/2013	Rossi A61G 13/04
	U.S. PATENT DOCUMENTS				5/607
	3,227,440 A	1/1966 Scott	8,439,948 B1	5/2013	King
	3,293,667 A	12/1966 Ohrberg	8,443,473 B2	5/2013	Maxwell
	3,306,287 A	2/1967 Arp	8,584,281 B2	11/2013	Diel et al.
	3,389,702 A	6/1968 Kennedy	8,635,725 B2	1/2014	Tannoury et al.
	3,828,377 A	8/1974 Fary, Sr.	8,677,529 B2	3/2014	Jackson
	4,029,089 A	6/1977 Mulhlland	8,707,484 B2	4/2014	Jackson et al.
	4,194,257 A	3/1980 Martin et al.	8,978,180 B2	3/2015	Jackson
	4,627,119 A	12/1986 Hachey et al.	9,072,646 B2	7/2015	Skrripps et al.
	4,655,200 A	4/1987 Knight	9,180,062 B2	11/2015	Jackson
	4,705,026 A	11/1987 Chaussy	9,186,291 B2	11/2015	Jackson et al.
	4,866,796 A	9/1989 Robinson	9,226,865 B2	1/2016	Jackson et al.
	4,872,656 A	10/1989 Brendgord	9,265,680 B2	2/2016	Sharps
	4,901,384 A	2/1990 Eary	9,295,433 B2	3/2016	Jackson et al.
	4,915,101 A	4/1990 Cuccia	9,308,145 B2	4/2016	Jackson
	5,009,407 A	4/1991 Watanabe	9,339,430 B2	5/2016	Jackson et al.
	5,013,018 A	5/1991 Sicek	9,358,170 B2	6/2016	Jackson
	5,088,706 A	2/1992 Jackson	9,402,775 B2	8/2016	Jackson et al.
	5,103,511 A	4/1992 Sequin	9,414,982 B2	8/2016	Jackson
	5,131,106 A	7/1992 Jackson	9,468,576 B2	10/2016	Jackson
	5,362,302 A	11/1994 Jenson et al.	9,498,397 B2	11/2016	Hight et al.
	5,390,383 A	2/1995 Carn	9,522,078 B2	12/2016	Pizzini
	5,410,769 A	5/1995 Waterman	9,554,959 B2	1/2017	Carn
	5,444,882 A	8/1995 Andrews	9,622,928 B2	4/2017	Jackson et al.
	5,564,662 A	10/1996 Lussi et al.	9,642,760 B2	5/2017	Jackson et al.
	5,613,254 A	3/1997 Clayman	9,655,793 B2	5/2017	Hertz
	5,642,302 A	6/1997 Dumont	9,700,476 B2	7/2017	Hoel et al.
	5,860,899 A	1/1999 Rassman	9,713,562 B2	7/2017	Perlman et al.
	5,991,651 A	11/1999 LaBarbera	9,744,089 B2	8/2017	Jackson
	6,003,176 A	12/1999 Wasley	9,849,054 B2	12/2017	Jackson
	6,076,525 A	6/2000 Hoffman	9,937,006 B2	4/2018	Skrripps et al.
	6,112,349 A	9/2000 Connolly	9,993,380 B2	6/2018	Jackson
	6,154,901 A	12/2000 Carr	10,136,863 B2	11/2018	Kaiser et al.
	6,260,220 B1	7/2001 Lamb	10,314,758 B2	6/2019	Dolliver et al.
	6,295,671 B1	10/2001 Reesby et al.	10,342,722 B2	7/2019	Garrido
	6,311,349 B1	11/2001 Kazakia	10,383,779 B2 *	8/2019	Koch A61G 13/06
	6,367,104 B1	4/2002 Fallbo, Sr. et al.	RE47,588 E	9/2019	Erbel et al.
	6,378,149 B1	4/2002 Sanders et al.	10,406,054 B1	9/2019	Scholl et al.
	6,516,483 B1	2/2003 VanSteenburg	10,426,684 B2	10/2019	Dubois et al.
	6,566,833 B2	5/2003 Bartlett	10,492,973 B2	12/2019	Drake
	6,615,430 B2	9/2003 Heimbrock	10,531,998 B2	1/2020	Jackson et al.
	6,671,905 B2	1/2004 Bartlett et al.	10,543,142 B2	1/2020	Lim et al.
	6,681,423 B2 *	1/2004 Zachrisson A61G 13/121	10,548,796 B2	2/2020	Lim et al.
		5/601	10,576,006 B2	3/2020	Lim et al.
	6,701,553 B1	3/2004 Hand et al.	10,695,252 B2	6/2020	Jackson
	6,701,554 B2	3/2004 Heimbrock	10,722,413 B2	7/2020	Lim et al.
	6,701,558 B2	3/2004 VanSteenburg	10,729,607 B2	8/2020	Jackson
	6,715,169 B2	4/2004 Niederkrom	10,751,240 B2	8/2020	Lim et al.
	6,728,983 B2	5/2004 Bartlett et al.	10,835,438 B2	11/2020	Jackson
	6,732,390 B2	5/2004 Krywicznanin	10,835,439 B2	11/2020	Lim et al.
	6,739,006 B2	5/2004 Borders et al.	10,849,809 B2	12/2020	Lim et al.
	6,820,621 B2	11/2004 DeMayo	10,874,570 B2	12/2020	Lim et al.
	6,874,181 B1	4/2005 Connolly et al.	10,881,570 B2	1/2021	Lim et al.
	6,934,986 B2	8/2005 Krywicznanin et al.	10,888,484 B2	1/2021	Lim et al.
	6,941,951 B2	9/2005 Hubert et al.	10,893,996 B2	1/2021	Lim et al.
	6,966,081 B1	11/2005 Sharps	10,898,401 B2	1/2021	Lim et al.
	7,100,225 B1	9/2006 Bailey	10,900,448 B2	1/2021	Lim et al.
	7,152,261 B2	12/2006 Jackson	11,452,656 B2 *	9/2022	Campbell A61G 13/04
	7,189,214 B1	3/2007 Saunders	2002/0138905 A1	10/2002	Bartlett et al.
	7,219,379 B2	5/2007 Krywicznanin et al.	2002/0138906 A1	10/2002	Bartlett et al.
	7,234,180 B2	6/2007 Horton et al.	2002/0157186 A1	10/2002	VanSteenburg
	7,290,302 B2	11/2007 Sharps	2003/0140419 A1	7/2003	Bartlett et al.
	7,343,635 B2	3/2008 Jackson	2003/0140420 A1	7/2003	Niederkrom
	7,426,930 B1	9/2008 Bailey			

(56)

References Cited**U.S. PATENT DOCUMENTS**

2003/0145382	A1	8/2003	Krywicznanin	
2003/0178027	A1	9/2003	DeMayo et al.	
2004/0010849	A1	1/2004	Krywicznanin et al.	
2004/0133979	A1	7/2004	Newkirk et al.	
2004/0133983	A1	7/2004	Newkirk	
2005/0015878	A1*	1/2005	Bannister	A61G 13/06 5/618
2005/0181917	A1	8/2005	Dayal	
2006/0037141	A1	2/2006	Krywicznanin et al.	
2006/0123546	A1	6/2006	Horton	
2006/0162076	A1	7/2006	Bartlett et al.	
2006/0162084	A1	7/2006	Mezue	
2006/0185090	A1	8/2006	Jackson	
2006/0185091	A1	8/2006	Jackson	
2007/0107125	A1	5/2007	Koch et al.	
2008/0034502	A1	2/2008	Copeland et al.	
2008/0134434	A1	6/2008	Celauro	
2008/0222811	A1	9/2008	Gilbert et al.	
2009/0070936	A1	3/2009	Henderson	
2009/0139030	A1	6/2009	Yang	
2009/0248041	A1	10/2009	Williams et al.	
2010/0037397	A1	2/2010	Wood	
2010/0192300	A1	8/2010	Tannoury	
2010/0293713	A1	11/2010	Sharps	
2010/0293719	A1	11/2010	Klemm et al.	
2011/0099716	A1	5/2011	Jackson	
2011/0107516	A1	5/2011	Jackson et al.	
2011/0152931	A1	6/2011	Zhang et al.	
2012/0103344	A1	5/2012	Hunter	
2012/0144589	A1	6/2012	Skriggs et al.	
2012/0255122	A1	10/2012	Diel et al.	
2013/0111666	A1	5/2013	Jackson	
2013/0191994	A1	8/2013	Bellows et al.	
2013/0283526	A1	10/2013	Gagliardi	
2013/0307298	A1	11/2013	Meiki	
2014/0020183	A1	1/2014	Dominick	
2014/0059773	A1	3/2014	Carn	
2014/0068861	A1	3/2014	Jackson	
2014/0109316	A1	4/2014	Jackson et al.	
2014/0130258	A1	5/2014	Kobuss	
2014/0137327	A1	5/2014	Tannoury et al.	
2015/0038982	A1	2/2015	Kilroy et al.	
2015/0044956	A1	2/2015	Hacker	
2015/0245969	A1	9/2015	Hight et al.	
2015/0245971	A1	9/2015	Bernardoni et al.	
2015/0272681	A1	10/2015	Skriggs et al.	
2016/0000621	A1	1/2016	Jackson	
2016/0081582	A1	3/2016	Rapoport	
2016/0089287	A1	3/2016	Buerstner	
2016/0193099	A1	7/2016	Drake	
2016/0317373	A1	11/2016	Jackson et al.	
2016/0331477	A1	11/2016	Yu et al.	
2017/0027797	A1	2/2017	Dolliver et al.	
2017/0049651	A1	2/2017	Lim	
2017/0049653	A1	2/2017	Lim	
2017/0079864	A1	3/2017	Riley	
2017/0112698	A1	4/2017	Hight et al.	

2017/0135891	A1	5/2017	Kettner
2017/0151115	A1	6/2017	Jackson
2017/0341232	A1	11/2017	Perplies
2017/0348171	A1	12/2017	Jackson
2018/0116891	A1	5/2018	Beale et al.
2018/0185106	A1	7/2018	Itkowitz et al.
2018/0185228	A1	7/2018	Catacchio et al.
2018/0193104	A1	7/2018	Beale et al.
2018/0207044	A1	7/2018	Sabet et al.
2018/0222044	A1	8/2018	Guerrera et al.
2018/0363596	A1	12/2018	Lim et al.
2019/0000702	A1	1/2019	Lim et al.
2019/0000707	A1	1/2019	Lim et al.
2019/0029906	A1	1/2019	Konsin et al.
2019/0046381	A1	2/2019	Lim et al.
2019/0046383	A1	2/2019	Lim et al.
2019/0209409	A1	7/2019	Jackson et al.
2019/0374420	A1	12/2019	Lehman et al.
2020/0000668	A1	1/2020	Lim et al.
2020/0060913	A1	2/2020	Lim et al.
2020/0060914	A1	2/2020	Lim et al.
2020/0060915	A1	2/2020	Lim et al.
2020/0138659	A1	5/2020	Lim et al.
2020/0138660	A1	5/2020	Jackson
2020/0170868	A1	6/2020	Jackson
2020/0188208	A1	6/2020	Lim et al.
2020/0268369	A1	8/2020	Stanton
2020/0281788	A1	9/2020	Lim et al.
2020/0297568	A1	9/2020	Lim et al.
2020/0337923	A1	10/2020	Lim et al.
2020/0337926	A1	10/2020	Lim et al.
2020/0337927	A1	10/2020	Lim et al.
2020/0360214	A1	11/2020	Lim et al.
2021/0106391	A1	4/2021	Gregerson et al.
2022/0008016	A1	1/2022	Harrison et al.
2022/0409311	A1	12/2022	Tadano et al.

FOREIGN PATENT DOCUMENTS

EP	3434248	1/2019
EP	3909539	11/2021
JP	2018069048	5/2018
JP	6449958	12/2018
WO	WO0062731	10/2000
WO	2007058673	5/2007
WO	2019067028	4/2019
WO	2021176531	9/2021

OTHER PUBLICATIONS


International Search Report and Written Opinion dated Jun. 27, 2023 in PCT/IL2023/050291.


International Search Report and Written Opinion dated Jul. 20, 2023 in PCT/IB2023/054218.


International Search Report and Written Opinion dated Jul. 20, 2023 in PCT/IB2023/054786.


International Search Report and Written Opinion dated Oct. 18, 2023 in PCT/IB2023/058416.


* cited by examiner

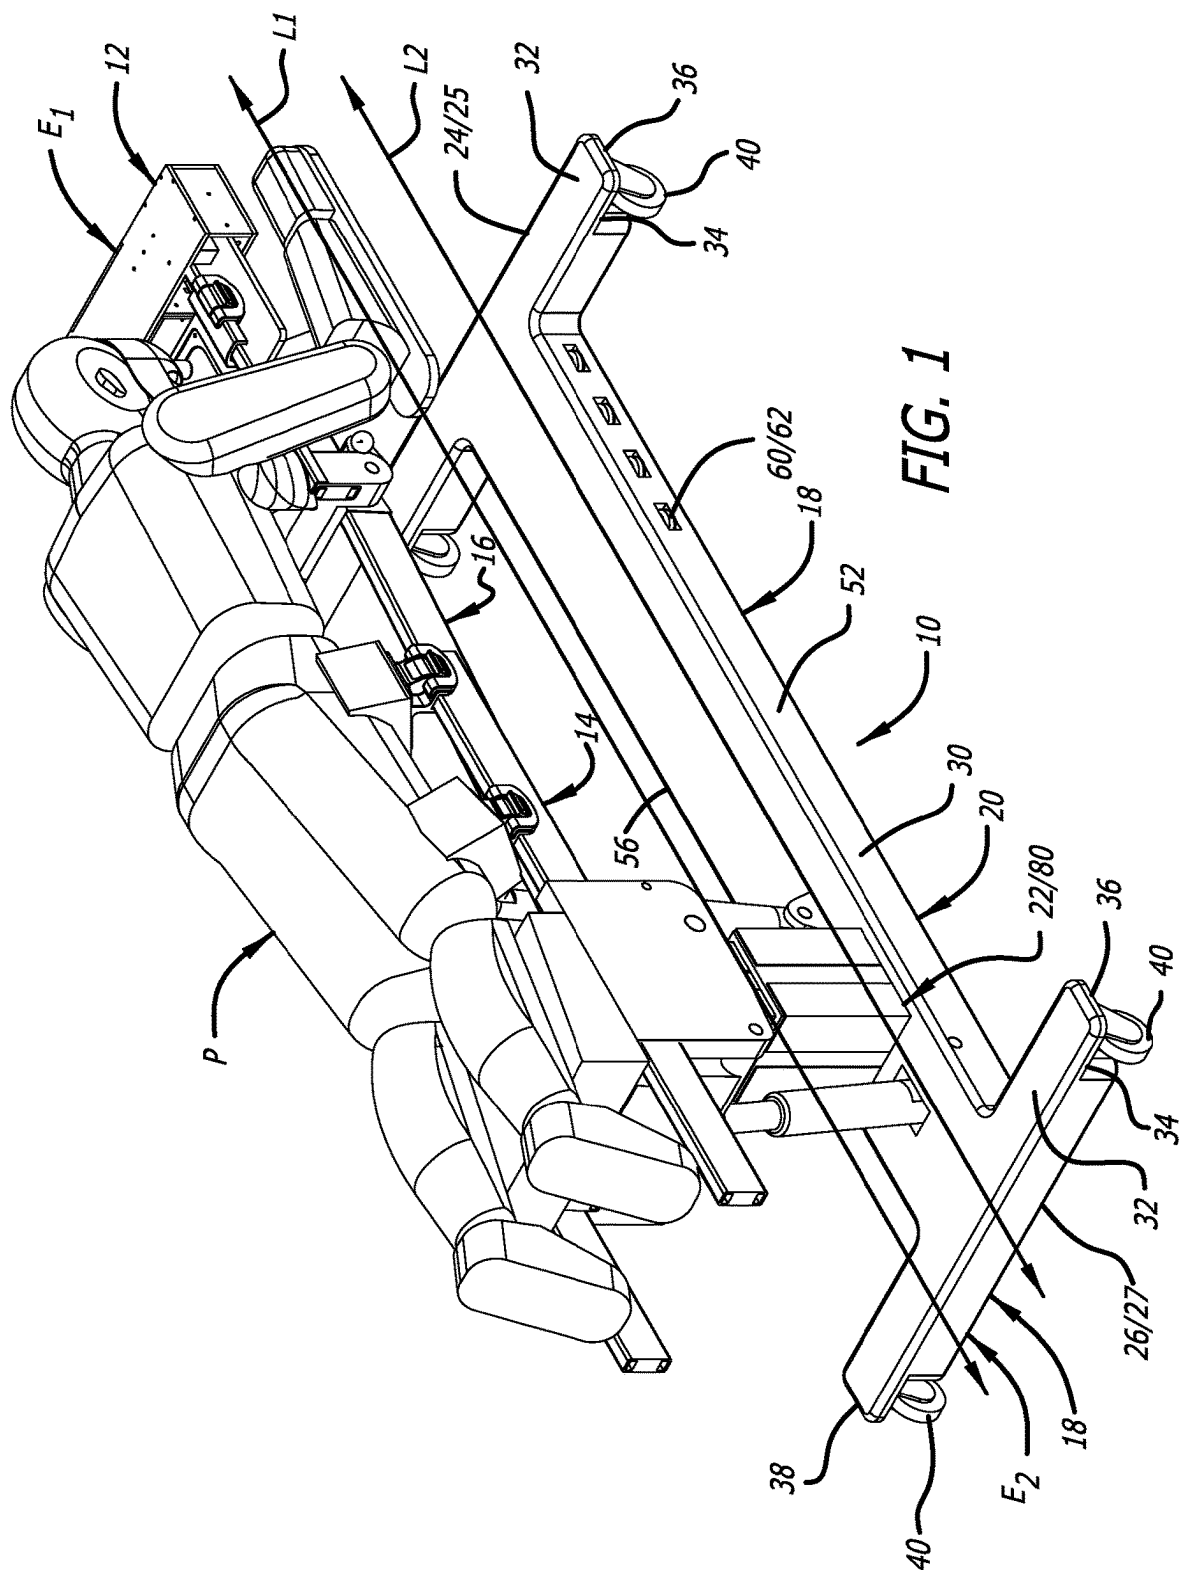

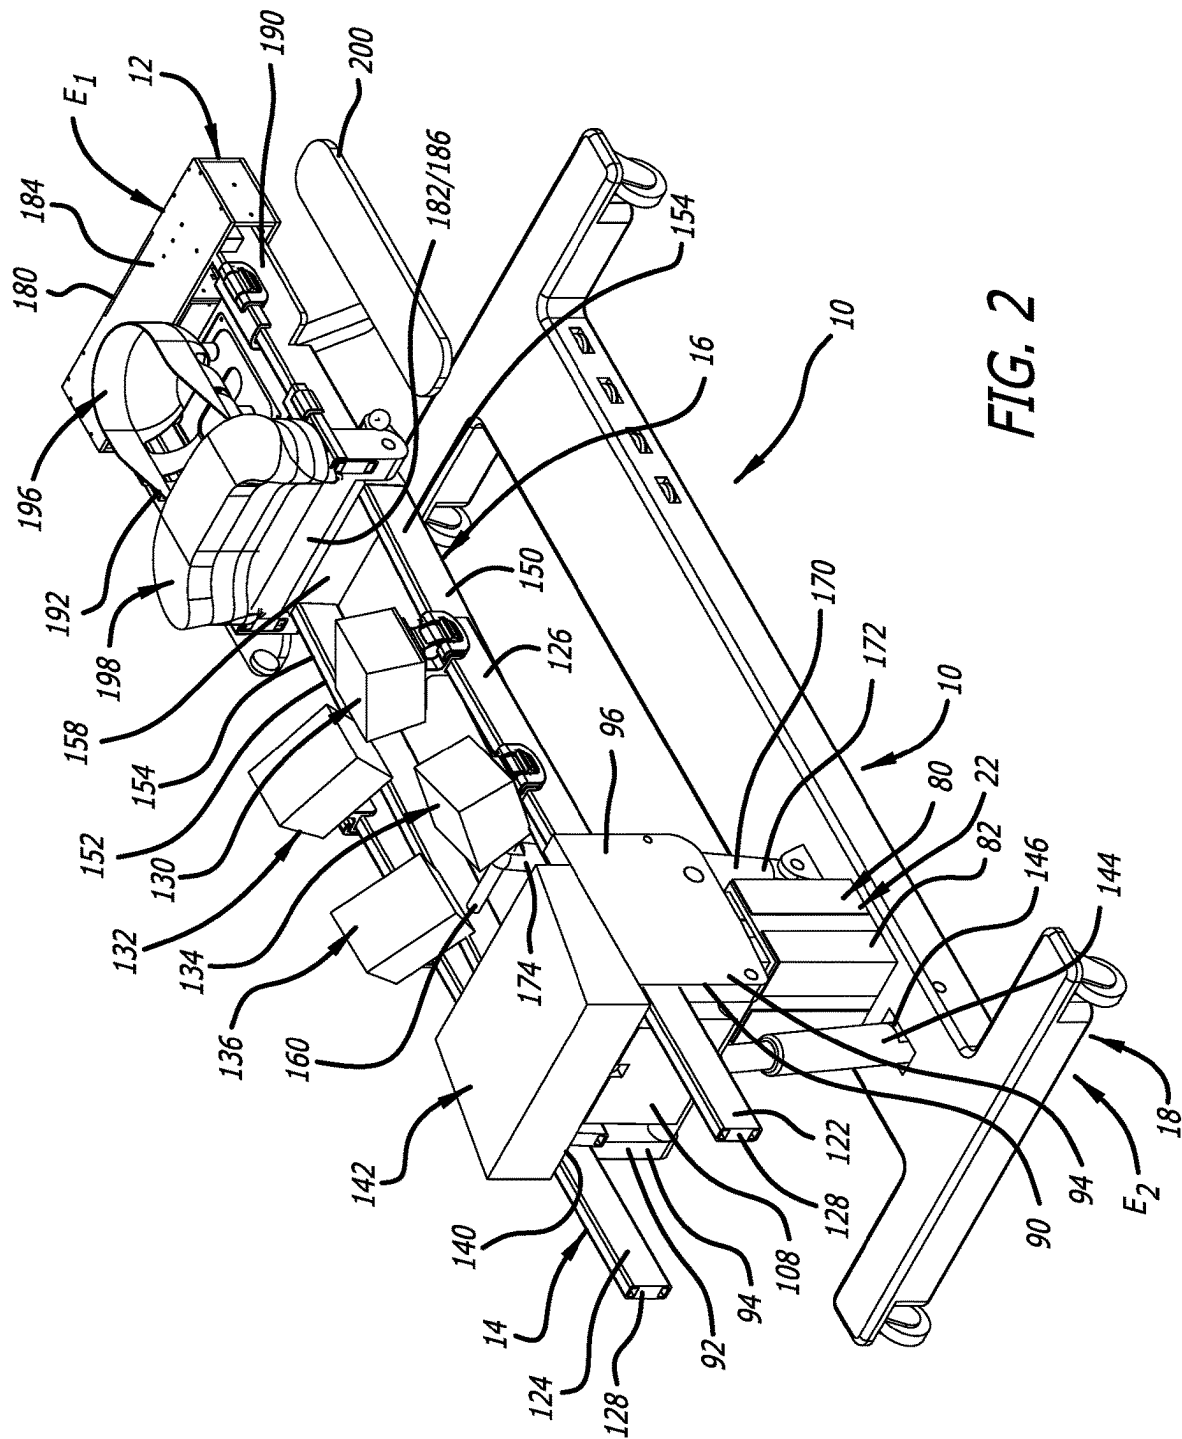

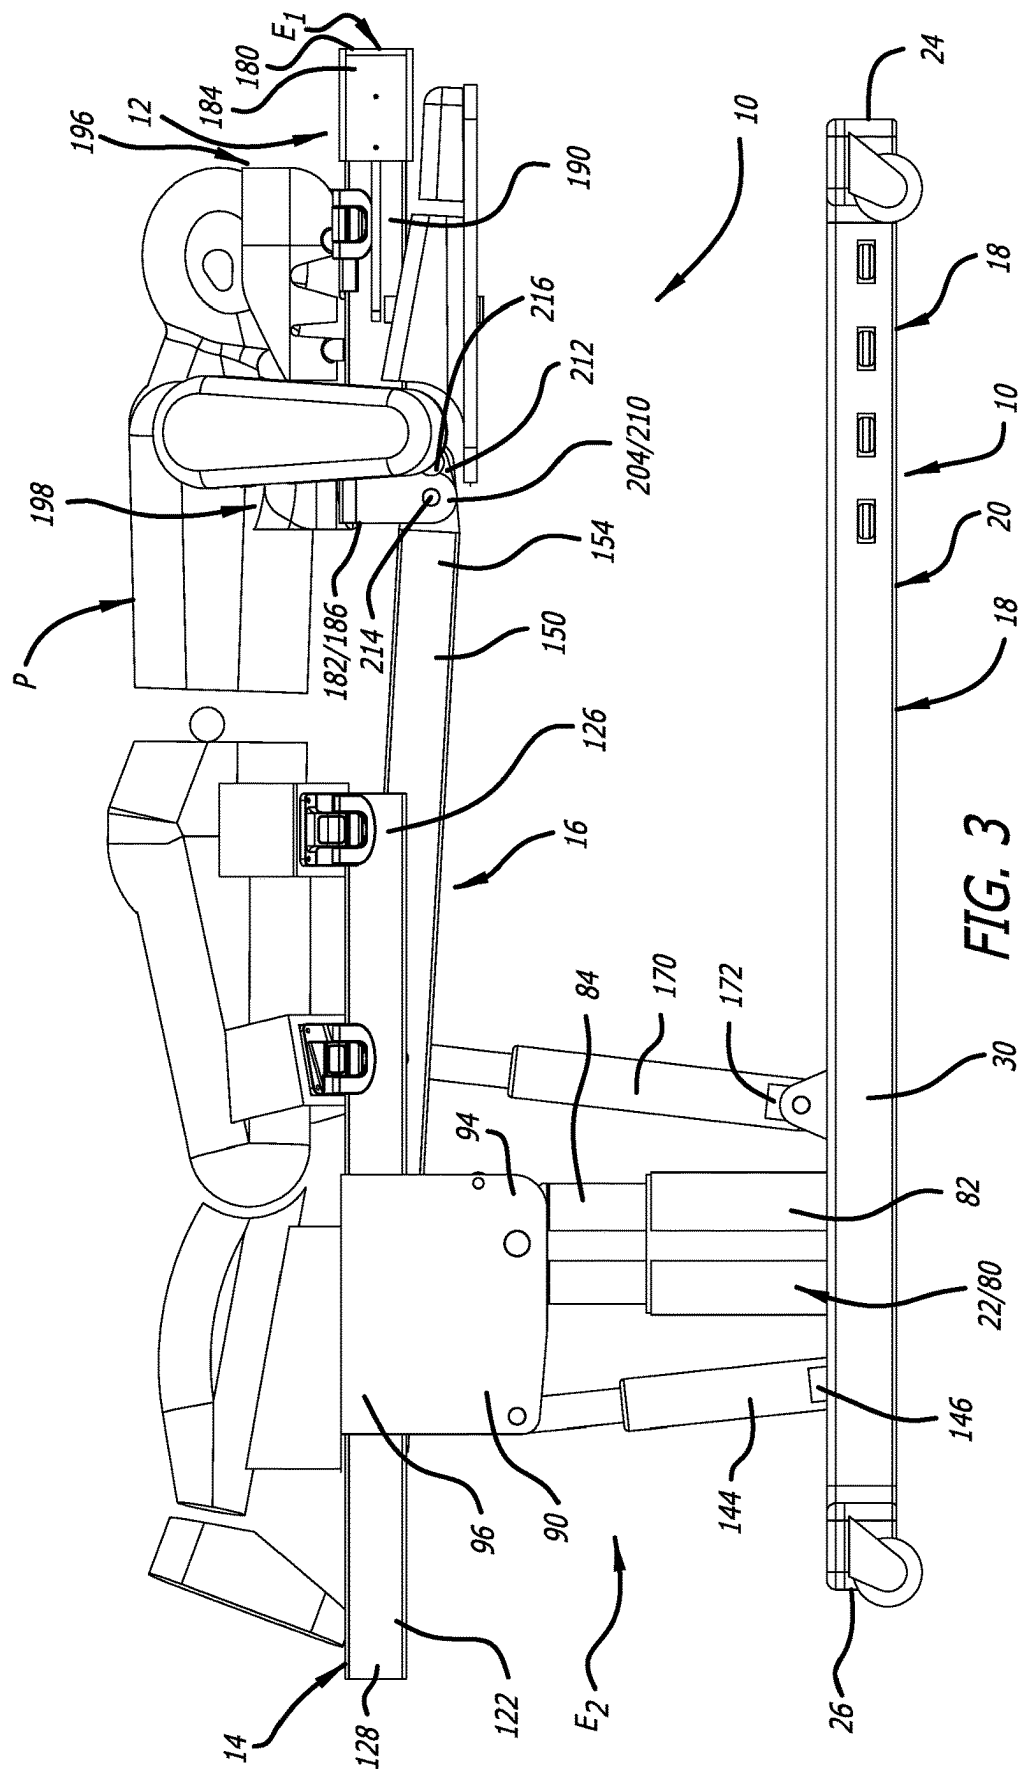

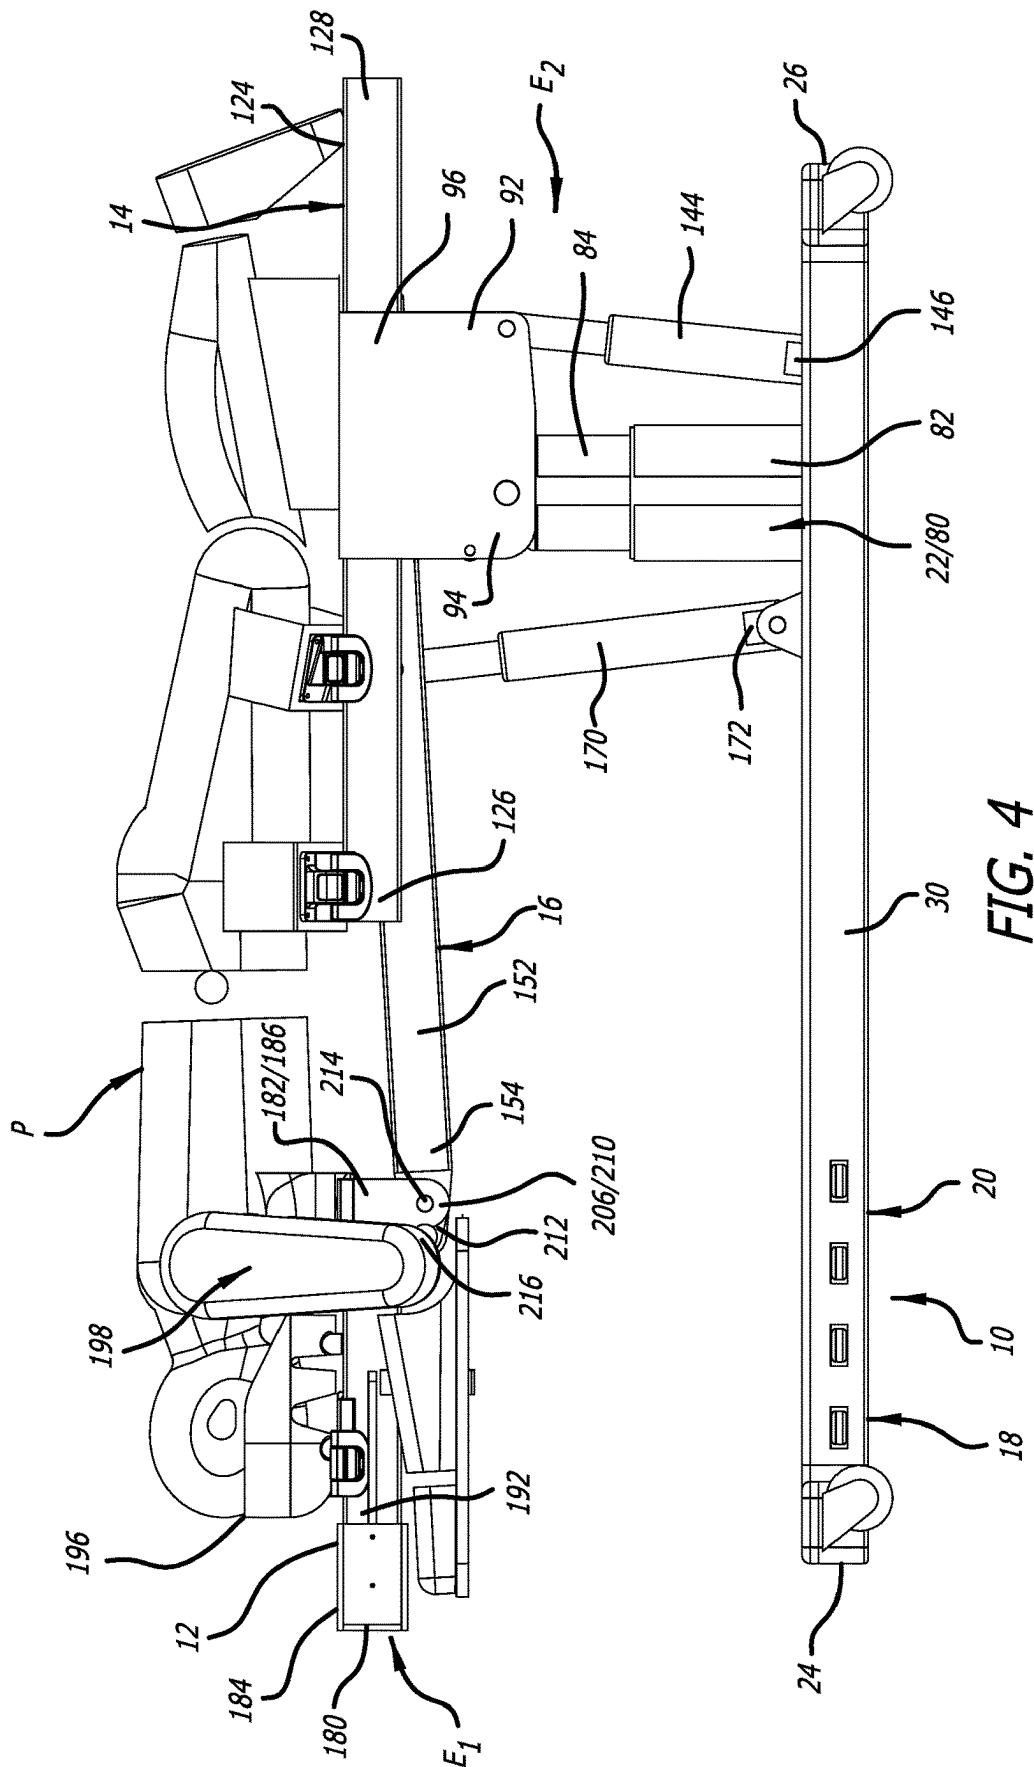

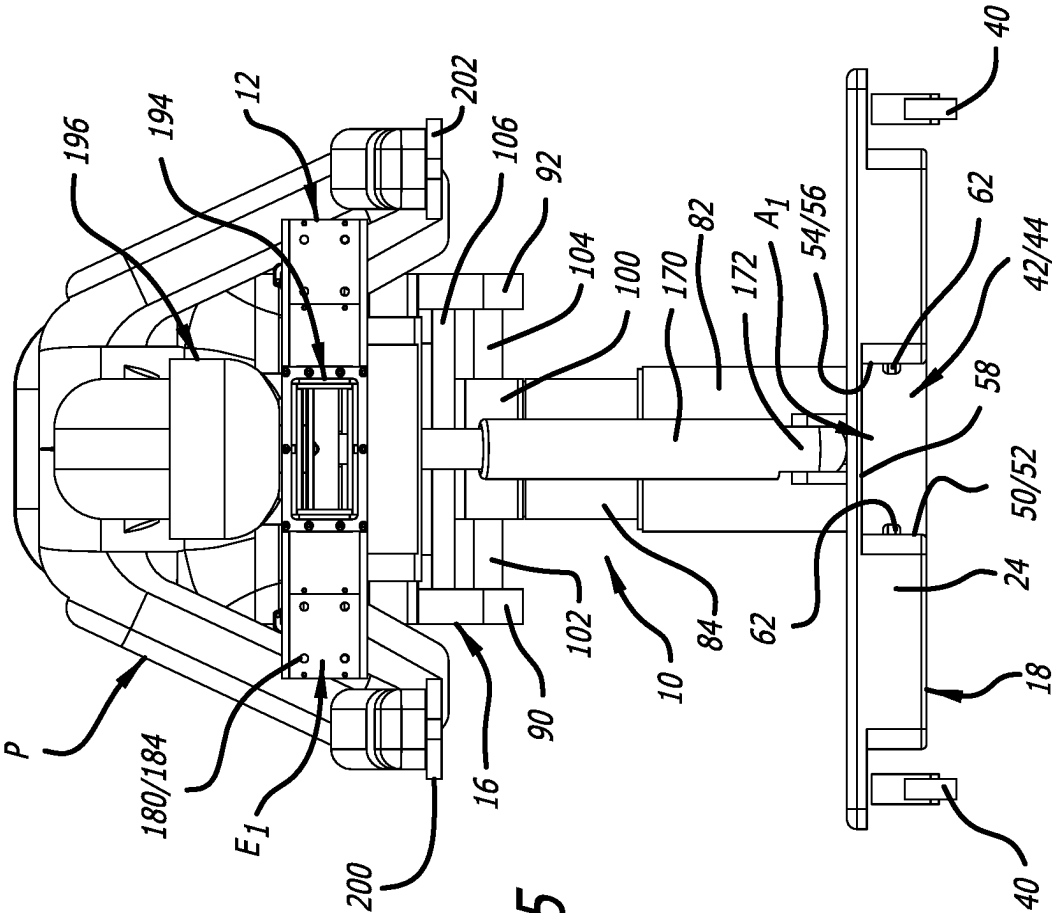

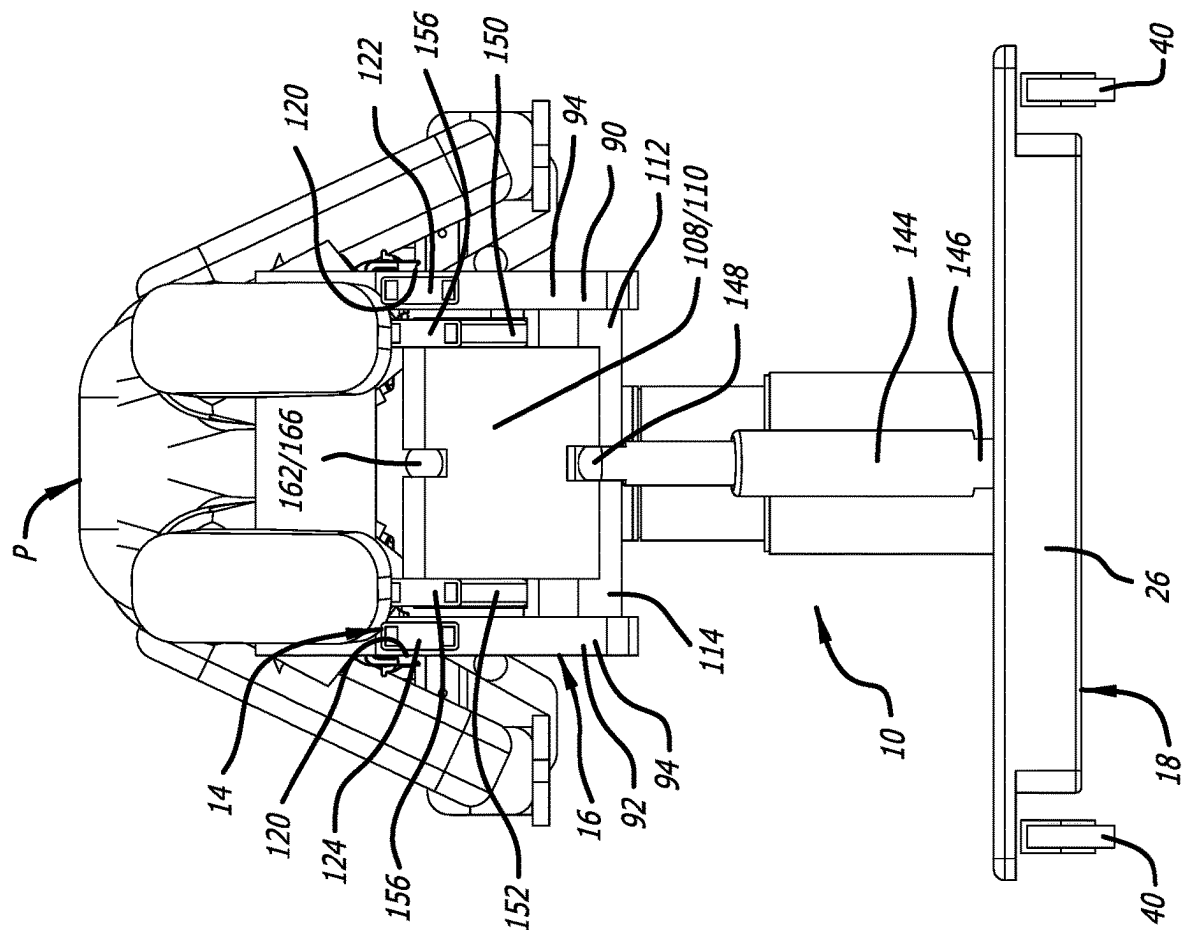


FIG. 6

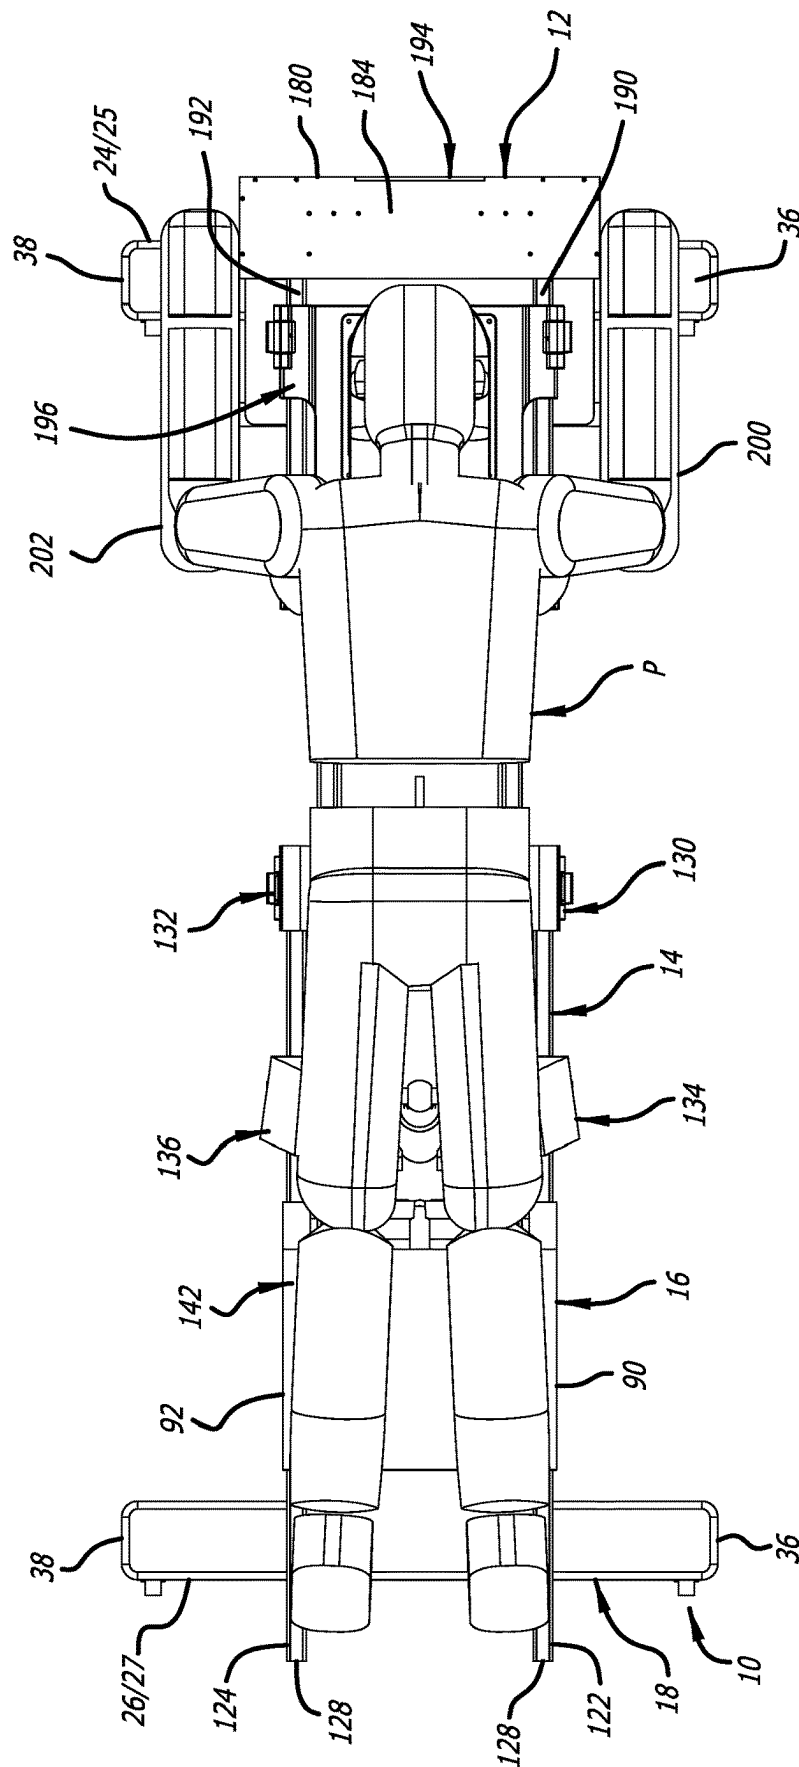
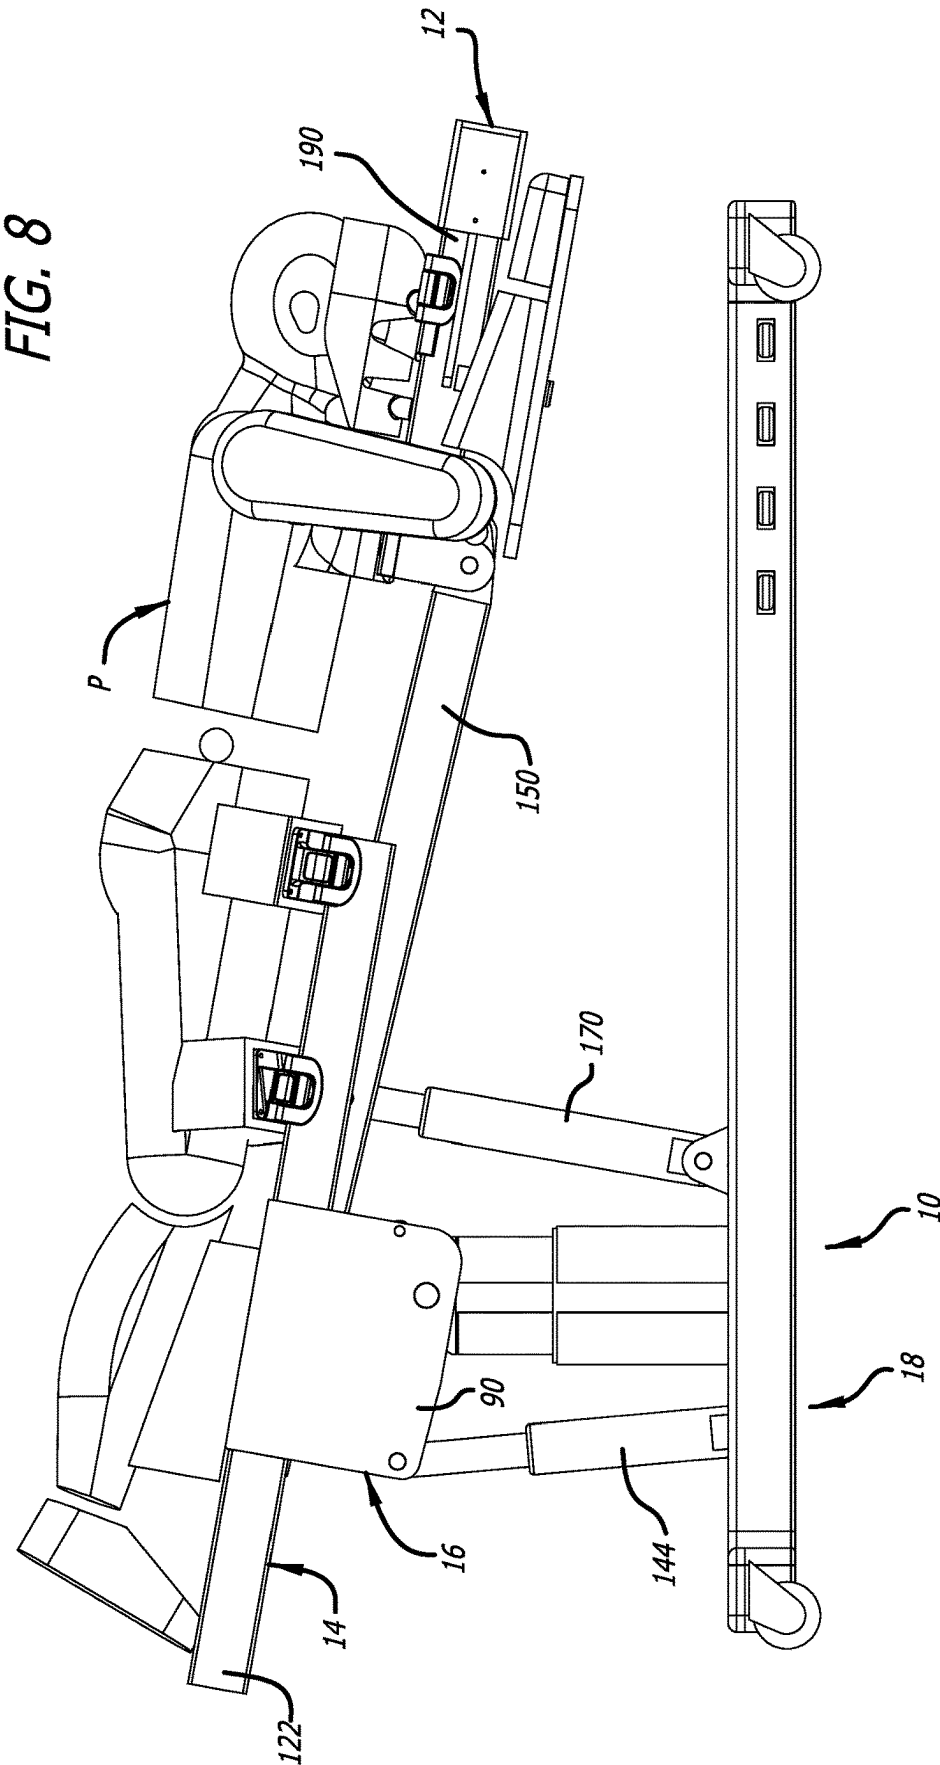
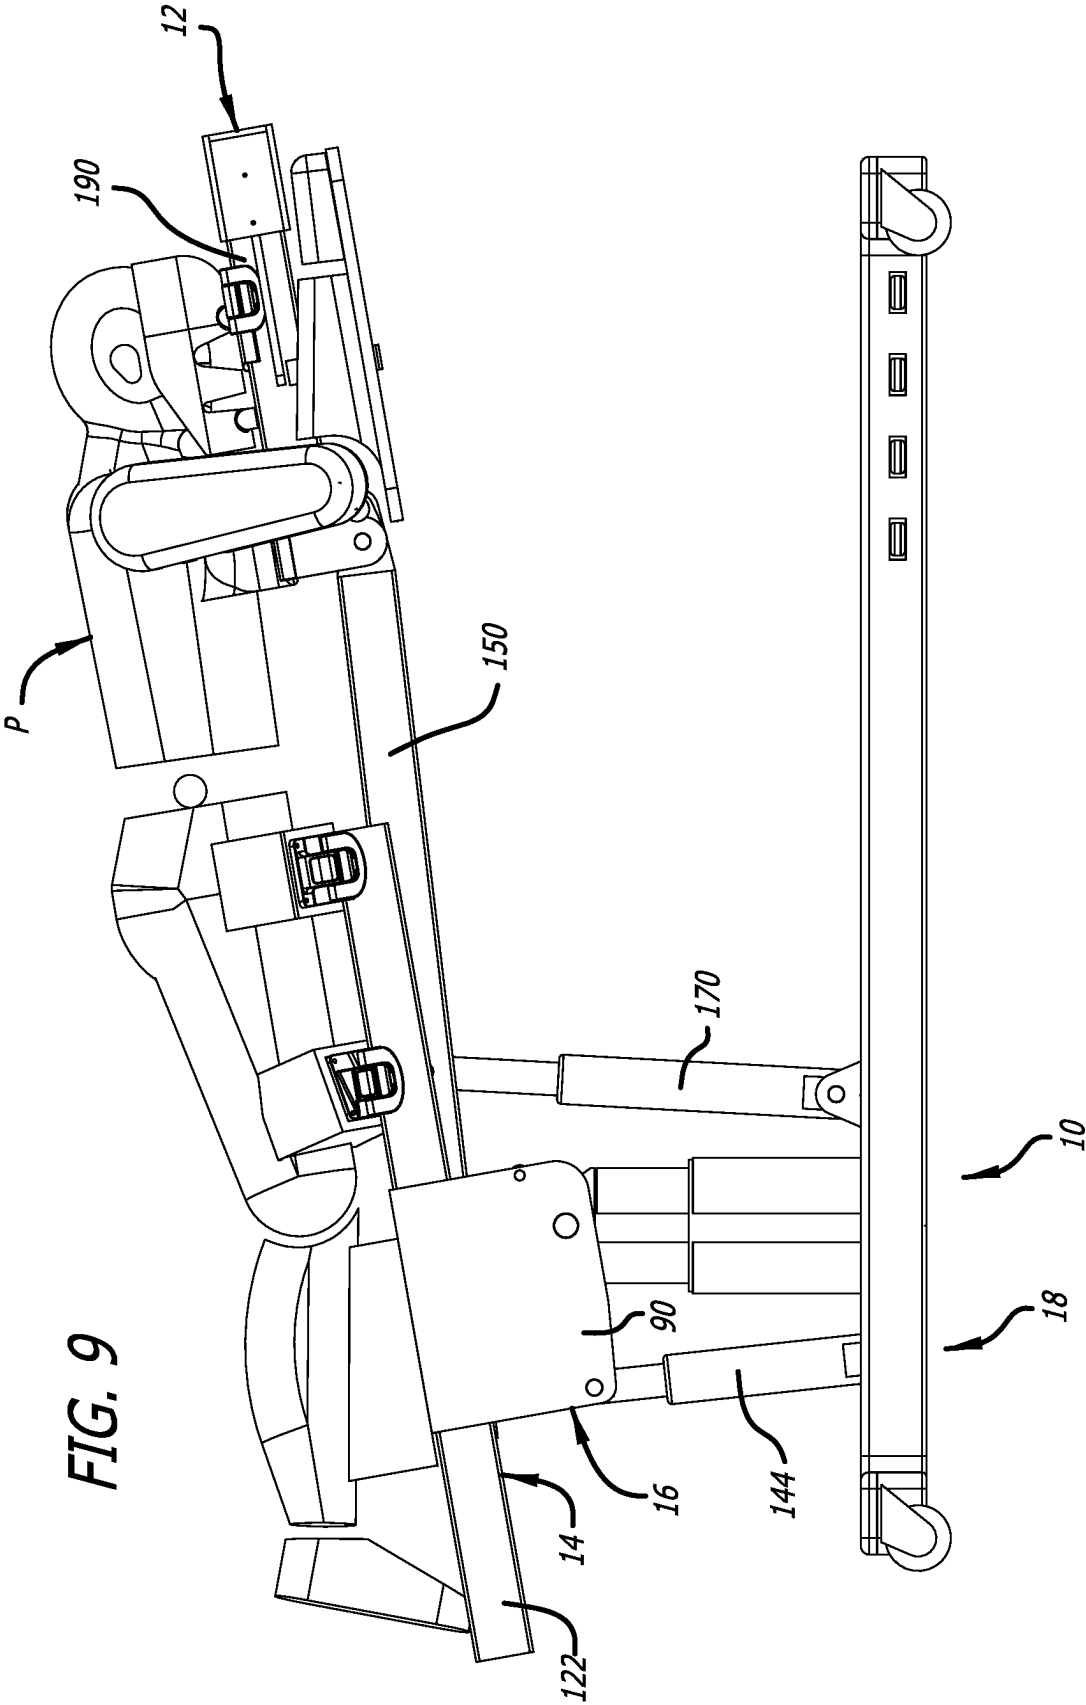


FIG. 7





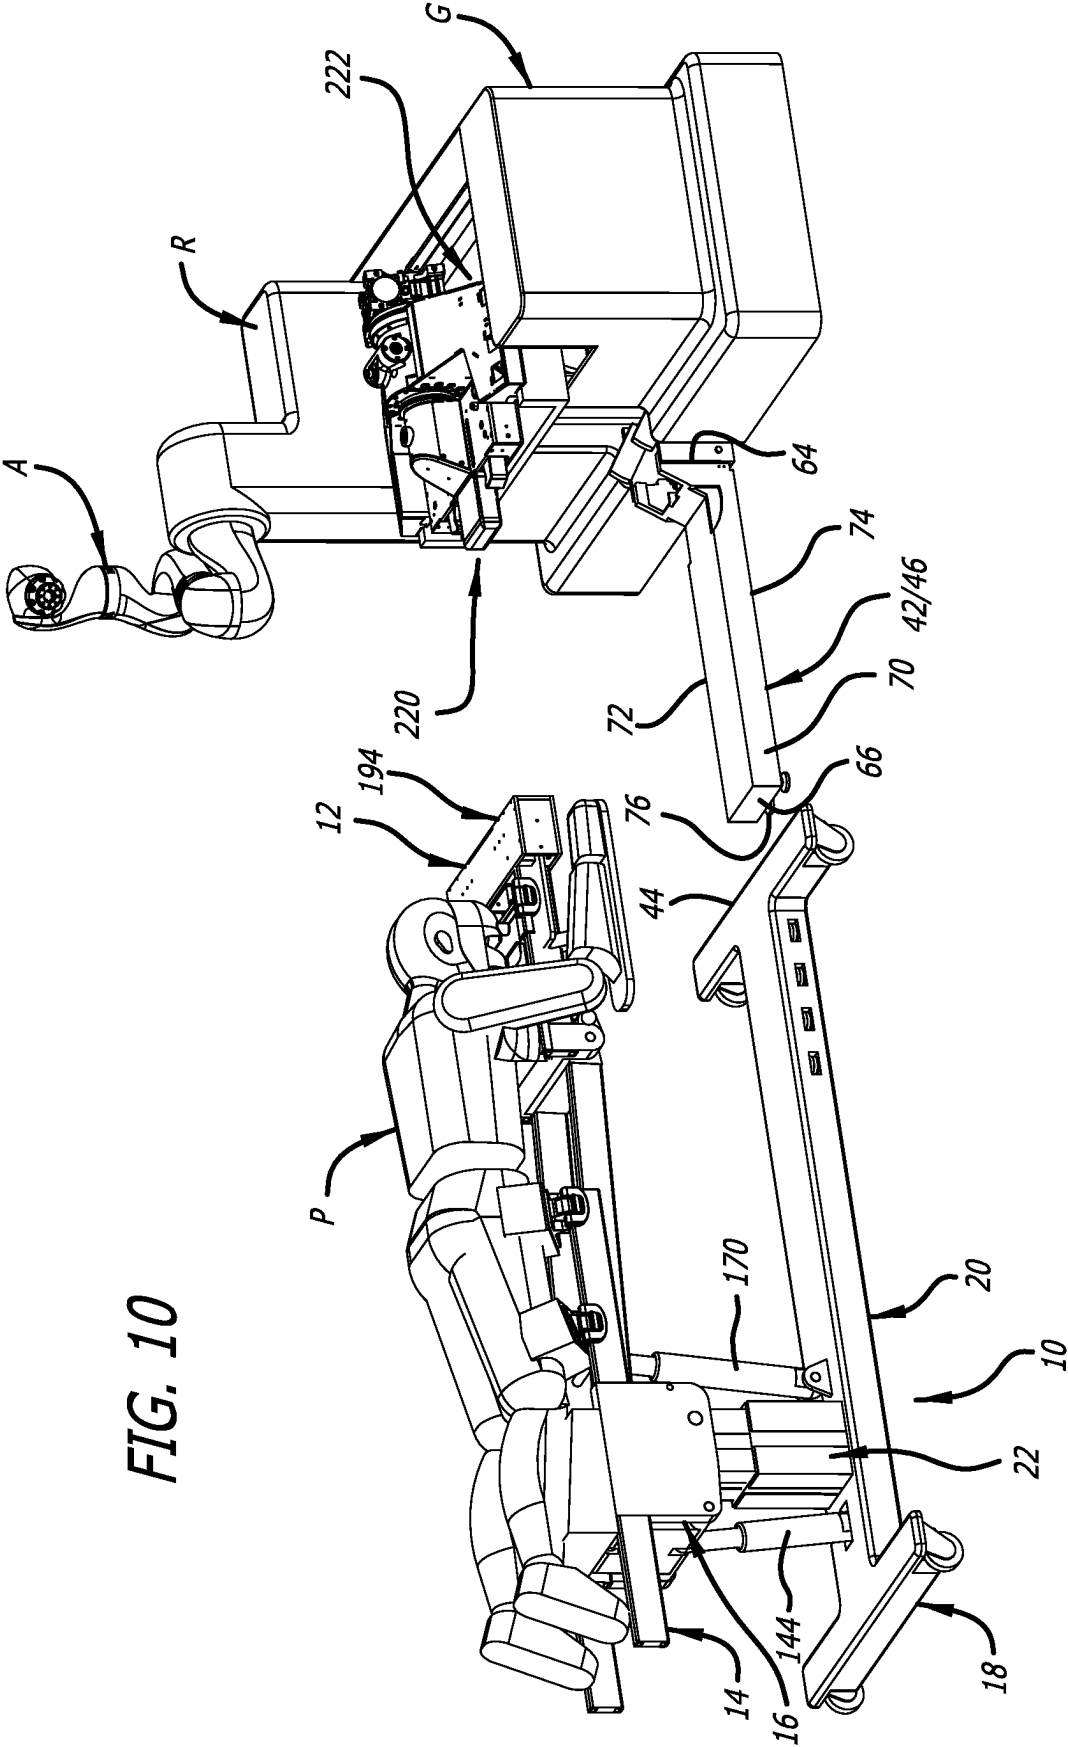
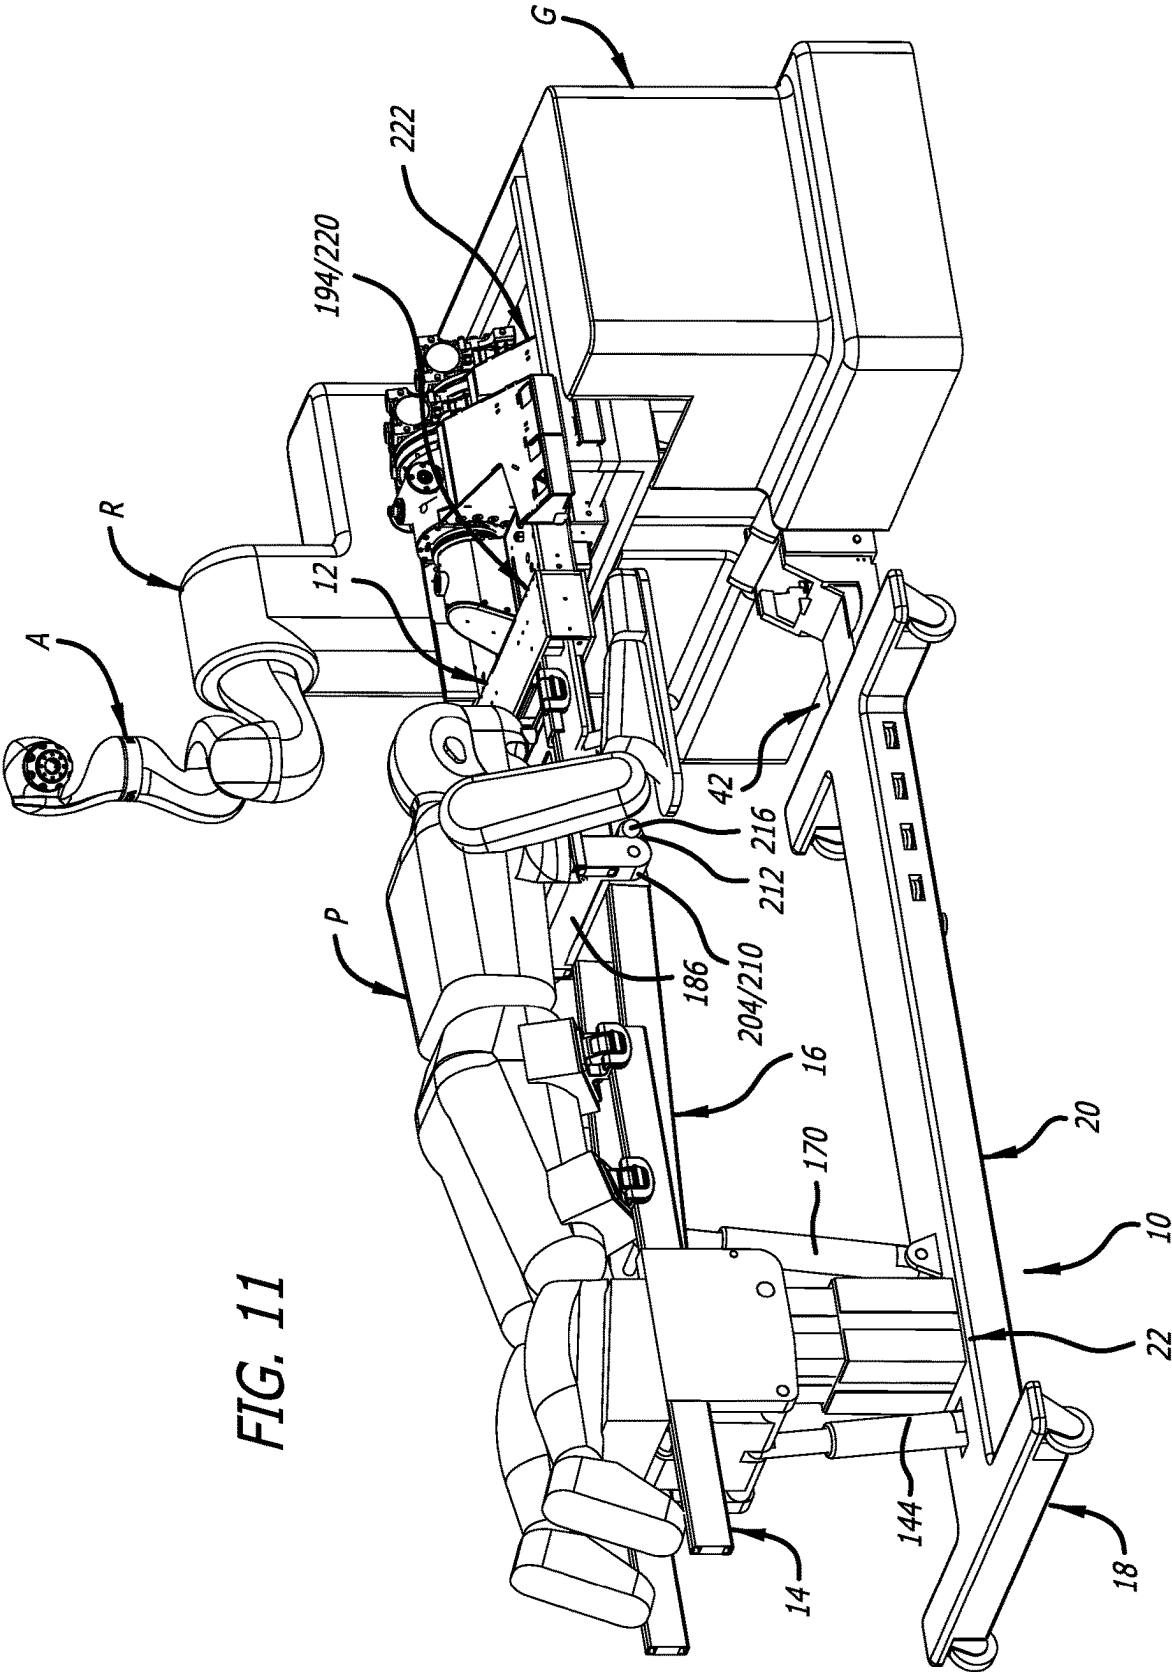


FIG. 10



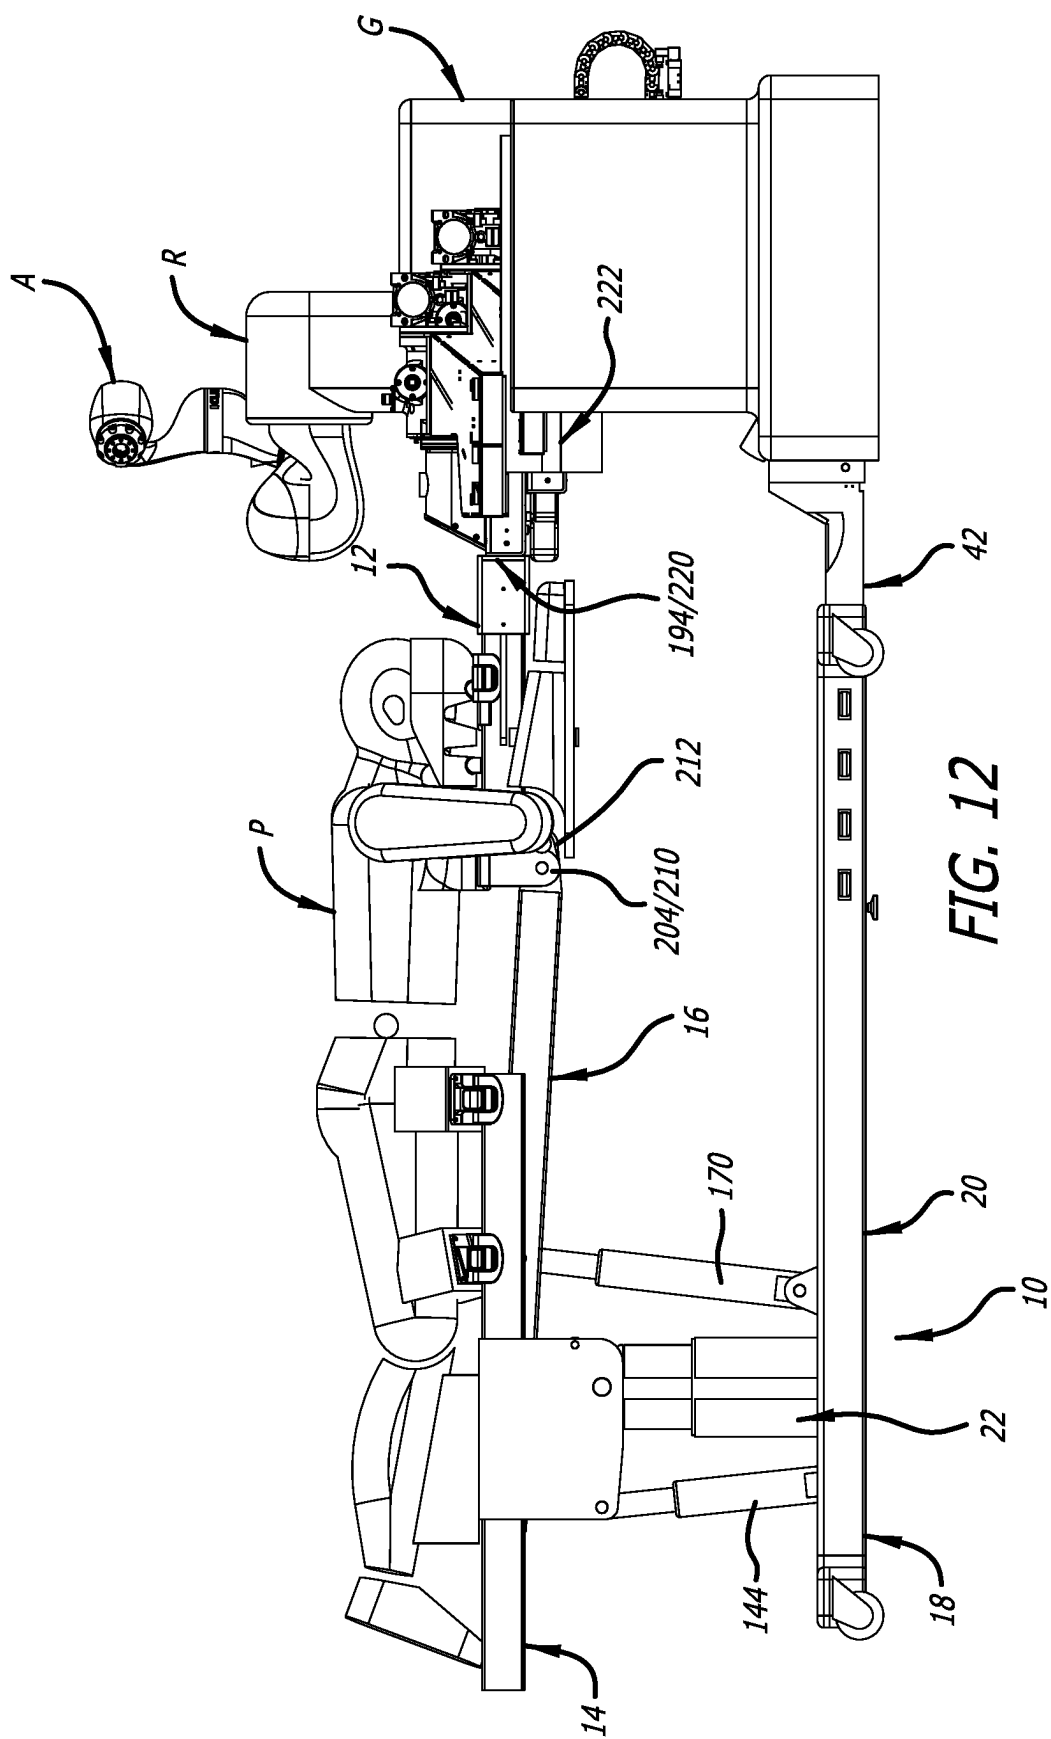
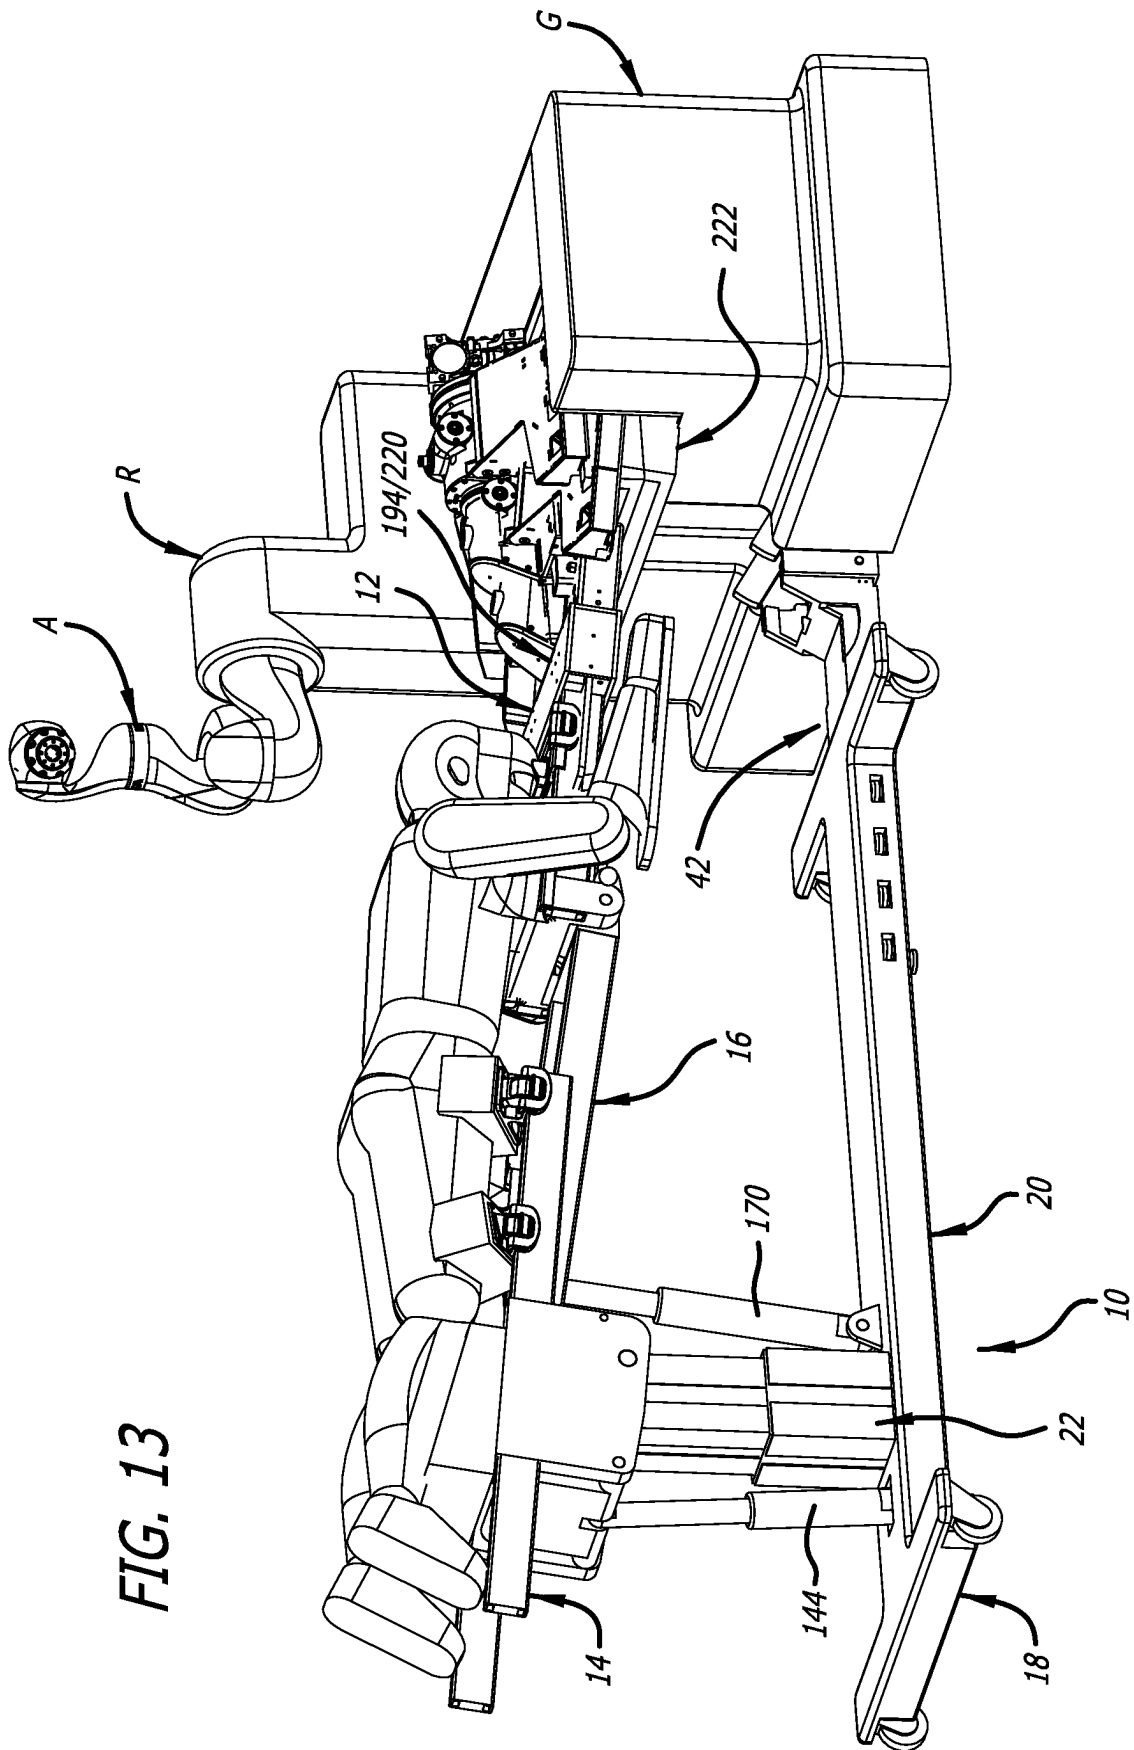


FIG. 13



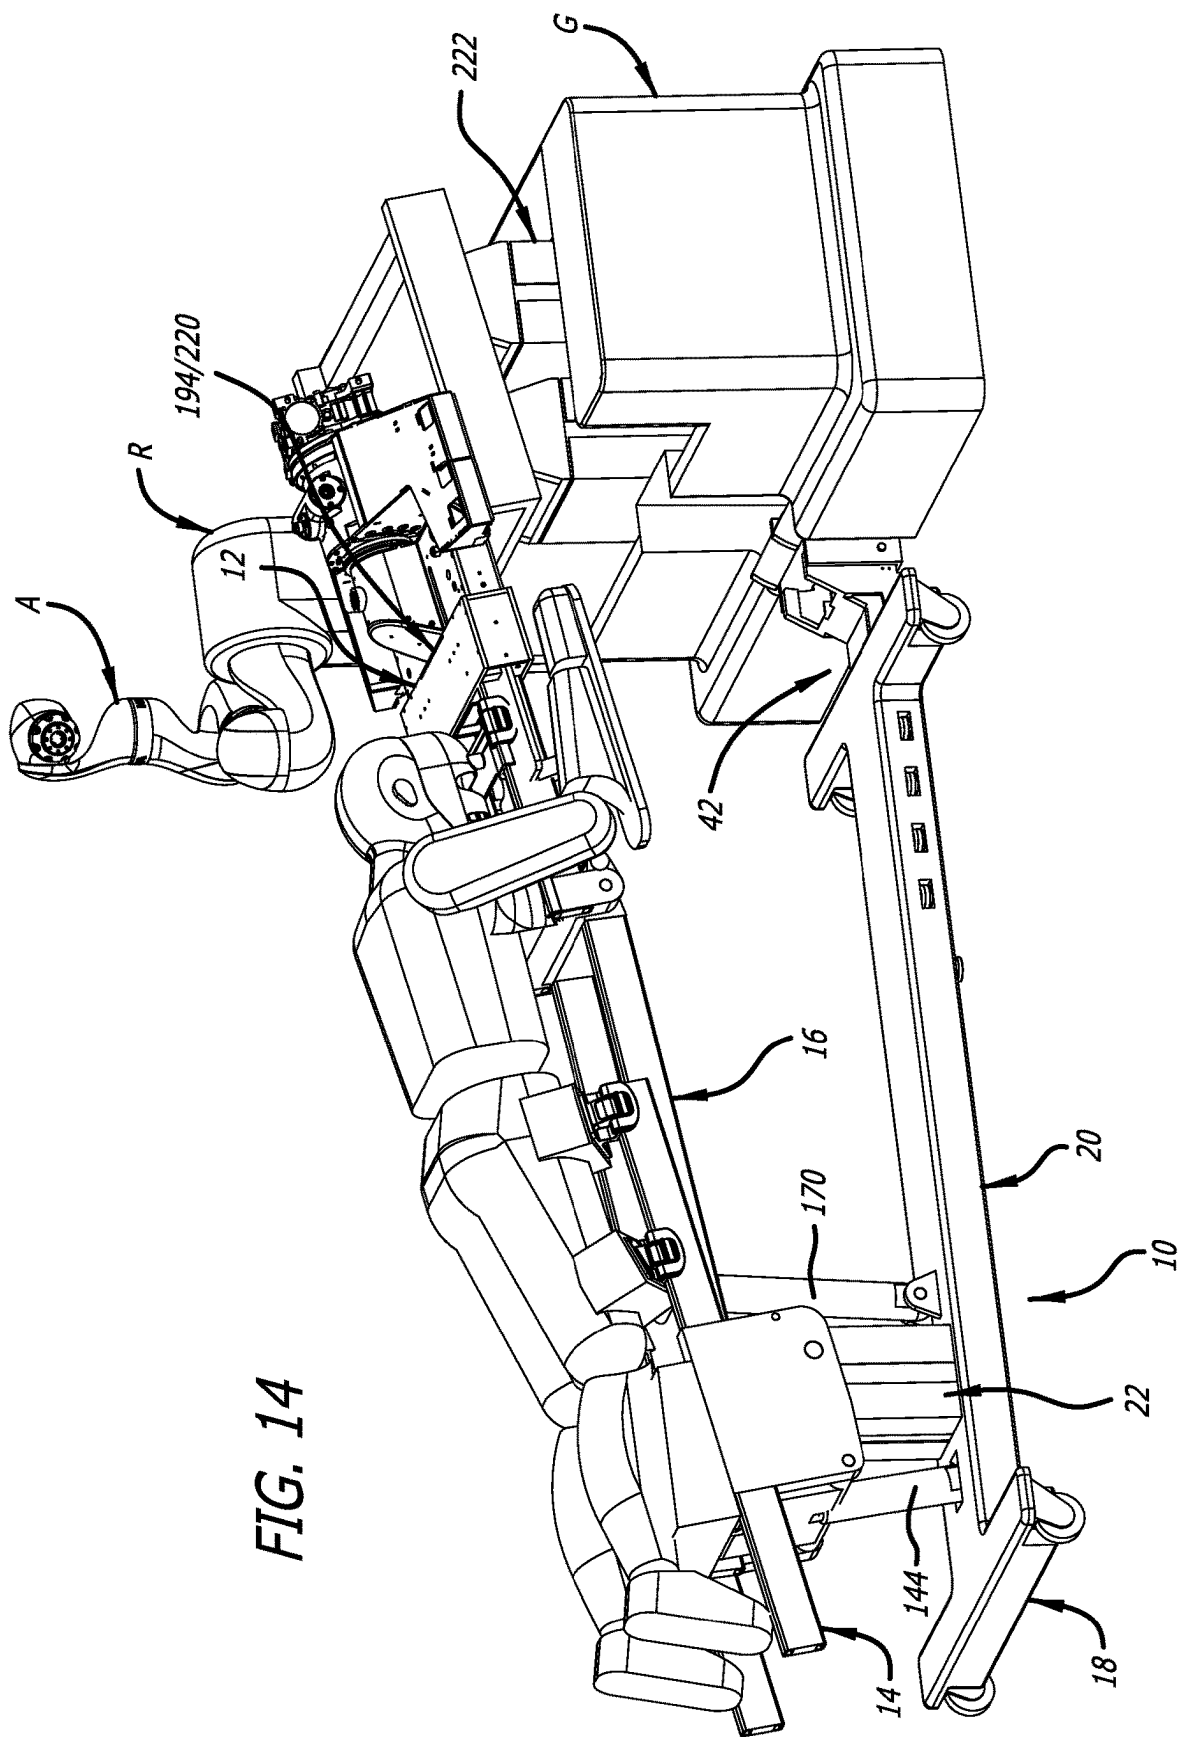


FIG. 14

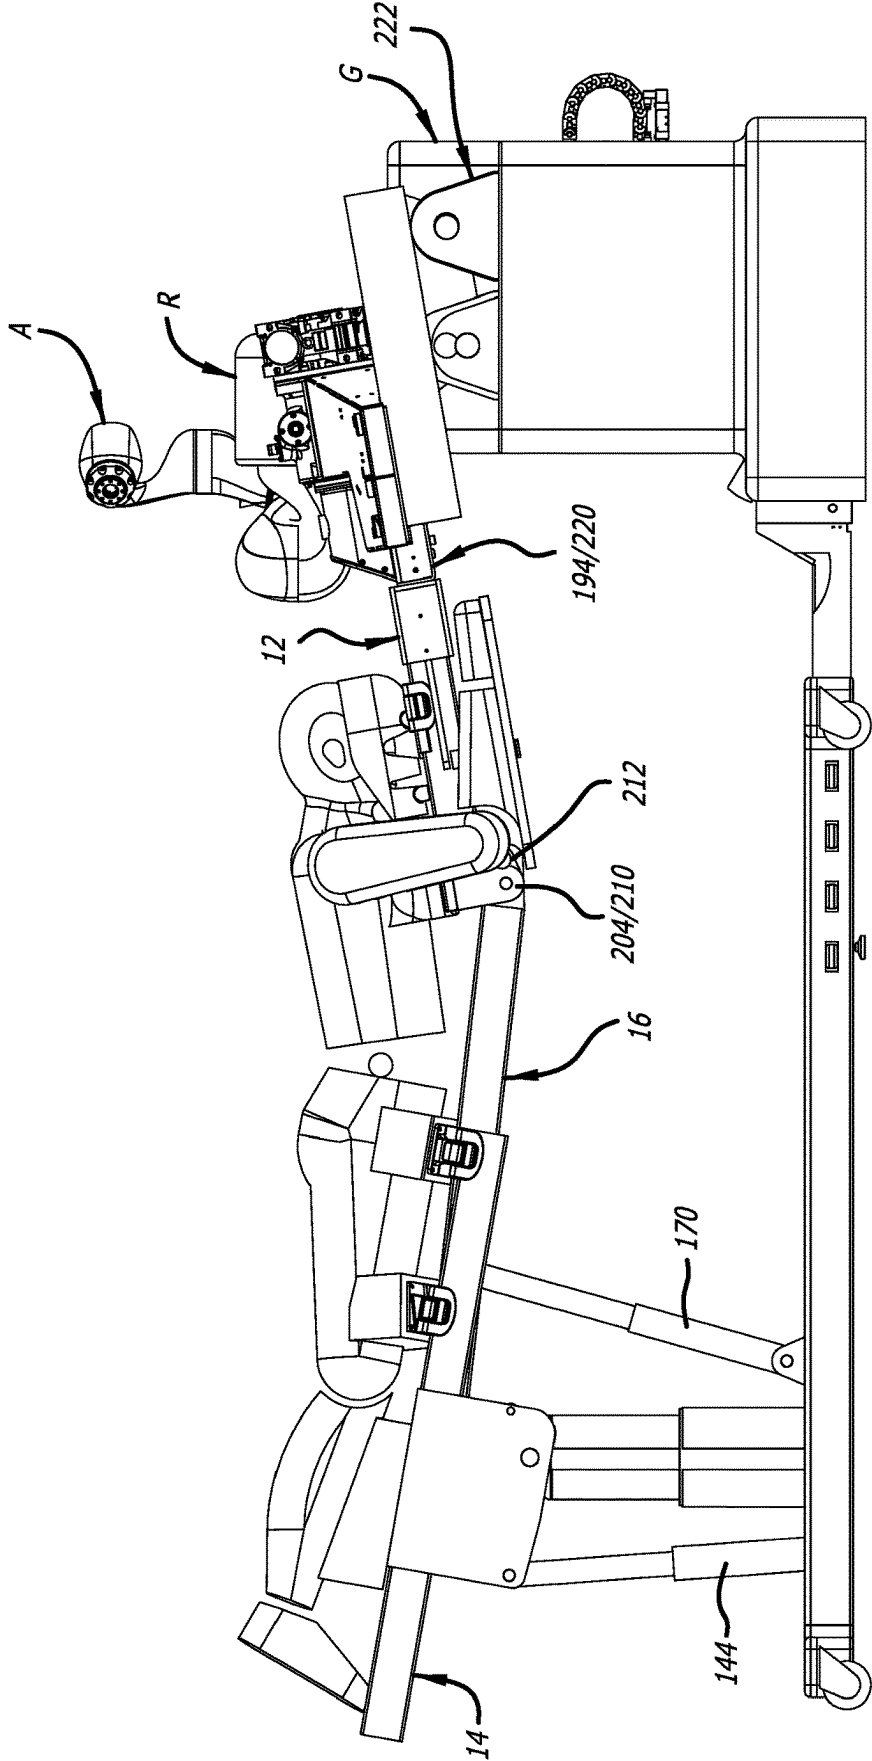


FIG. 15

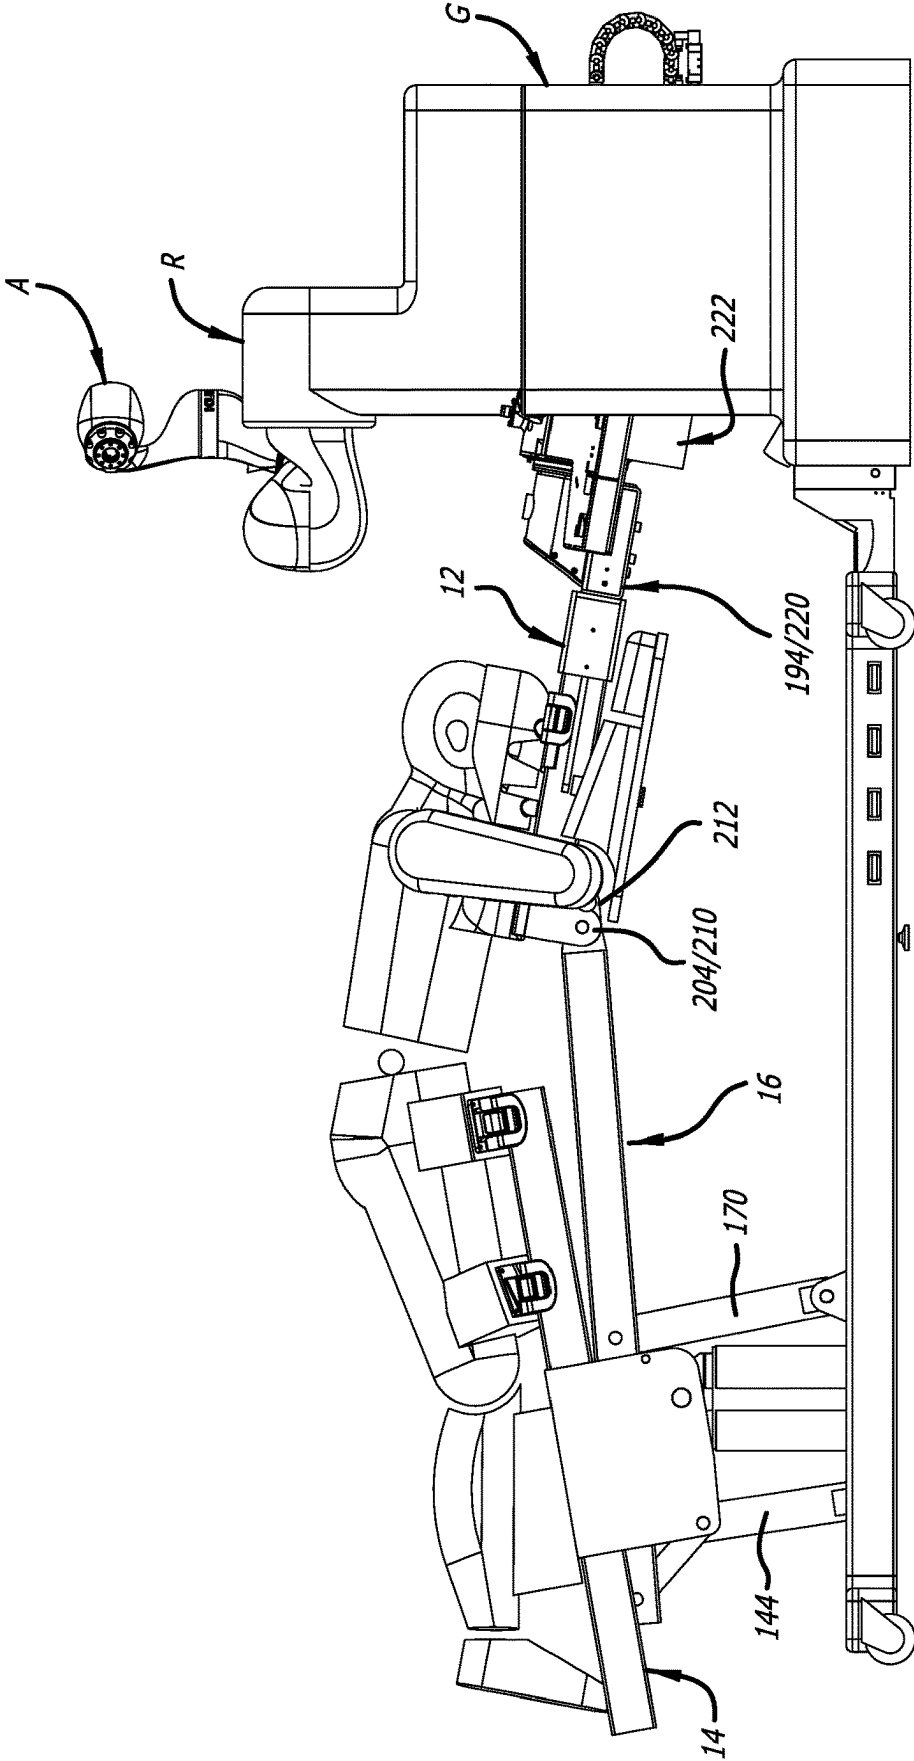
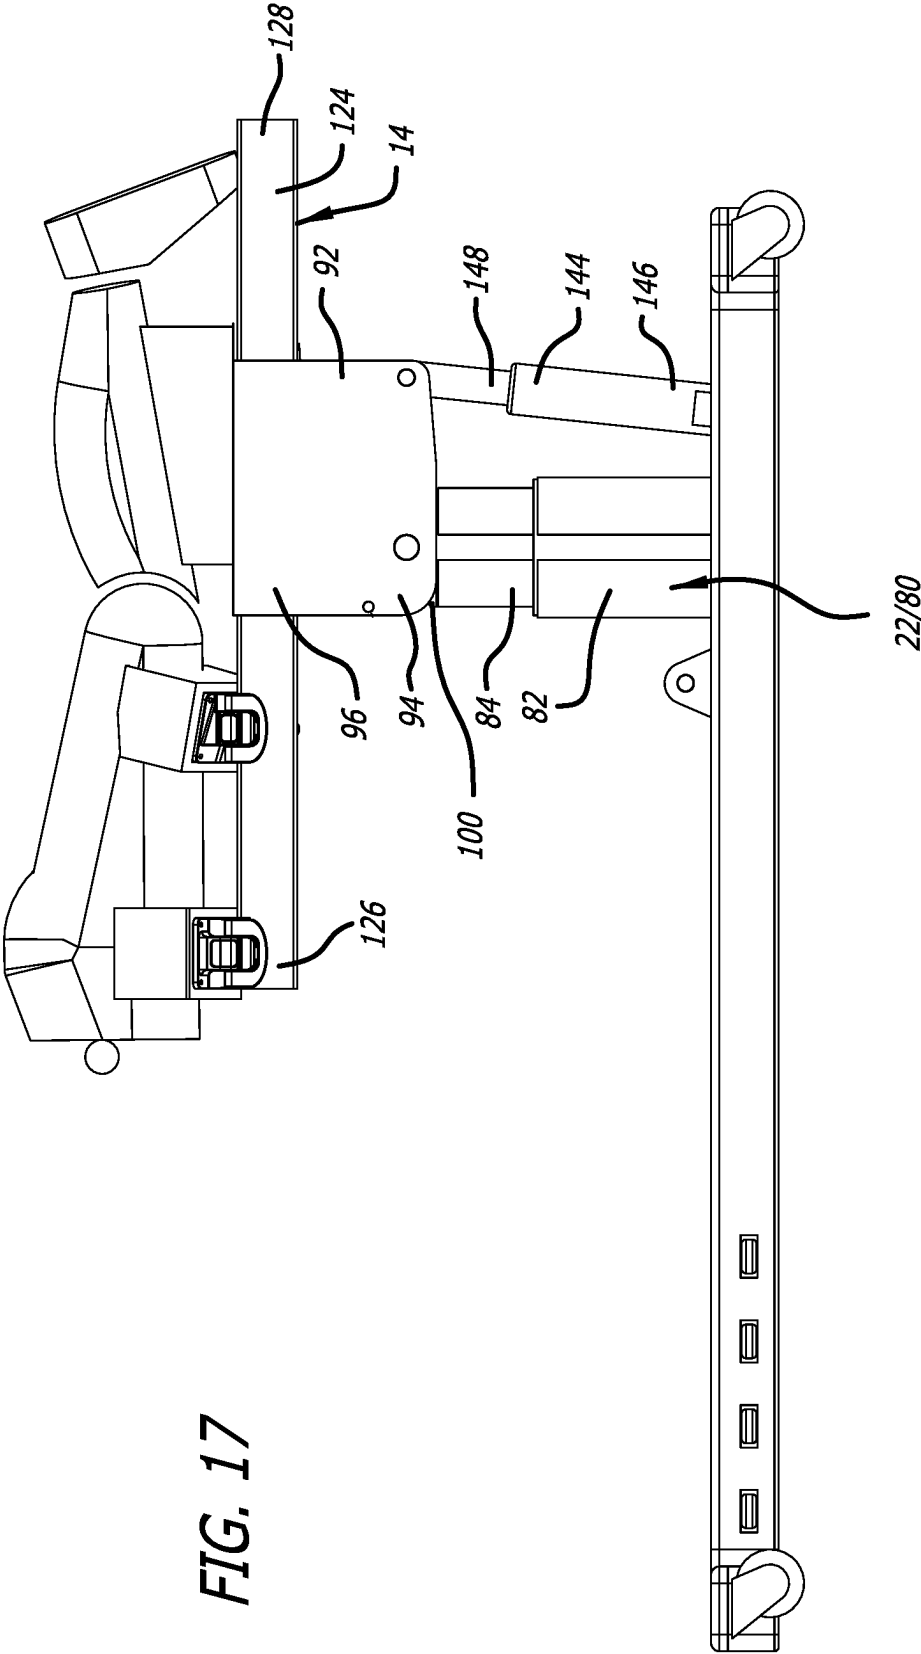


FIG. 16



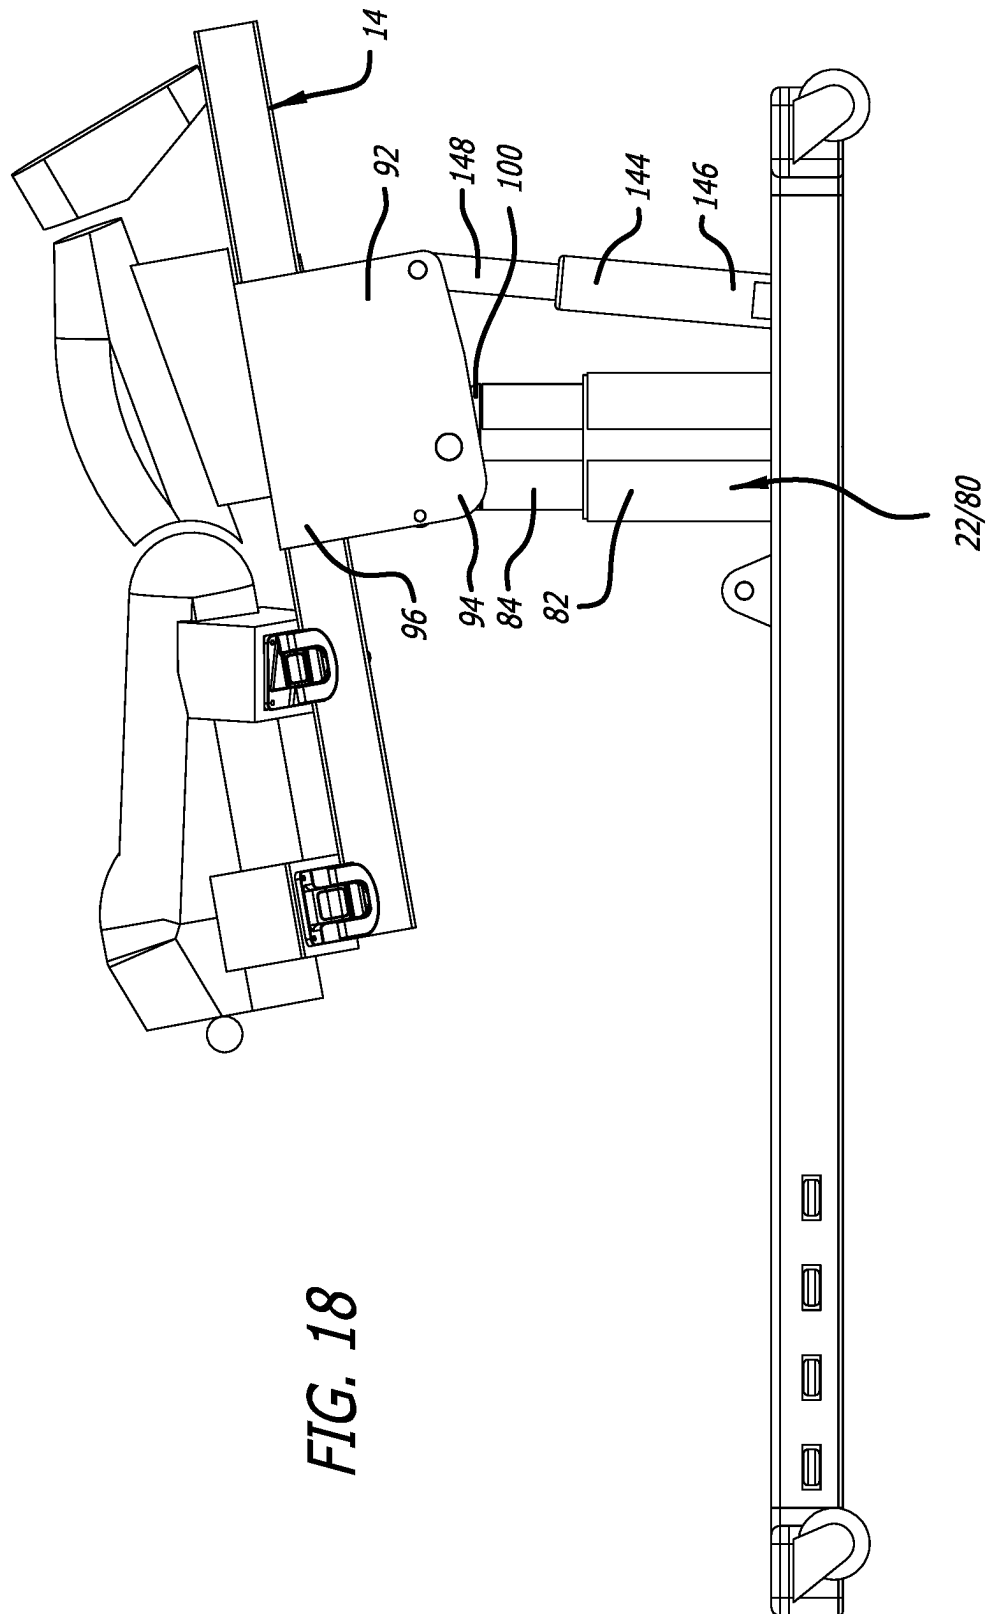
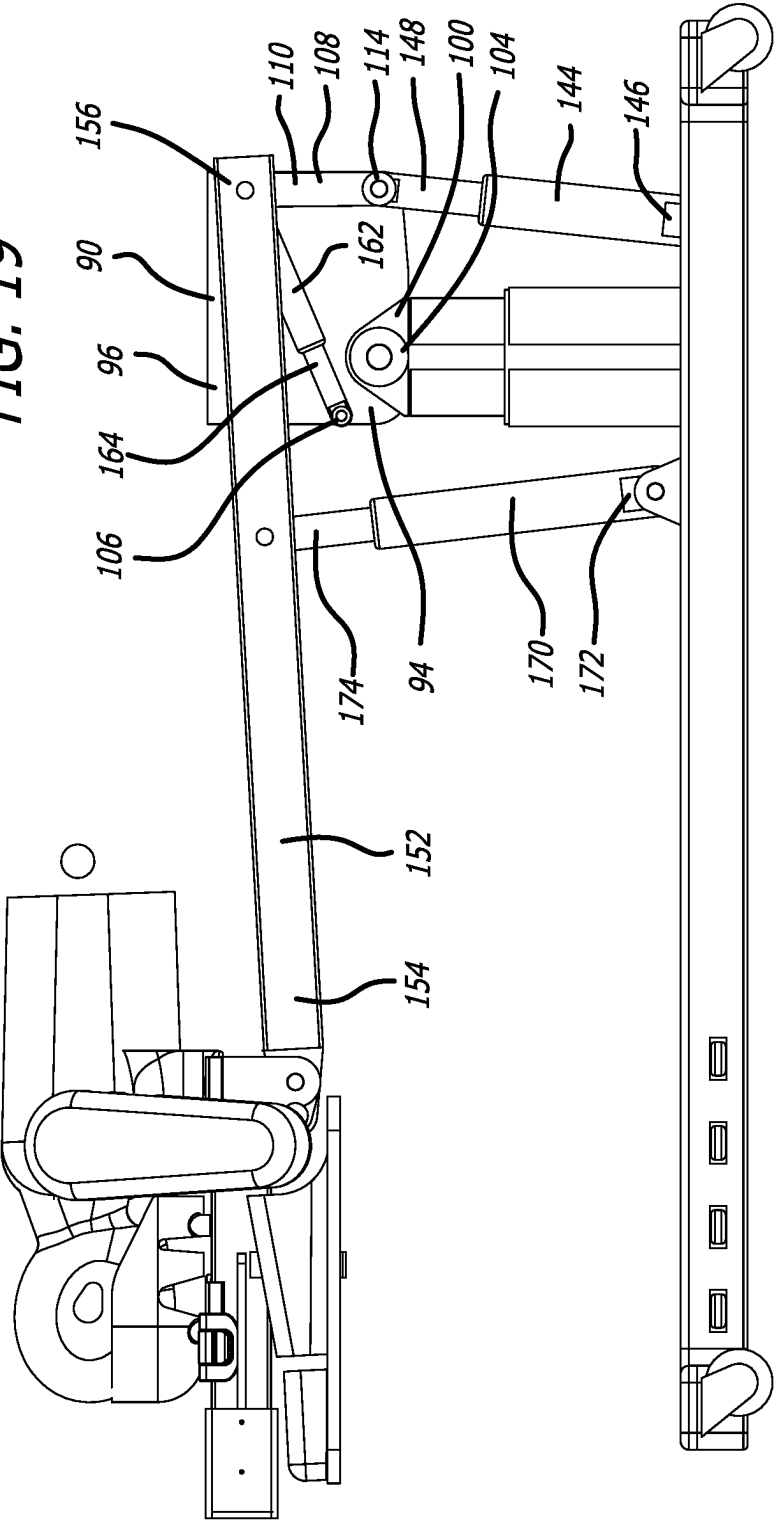
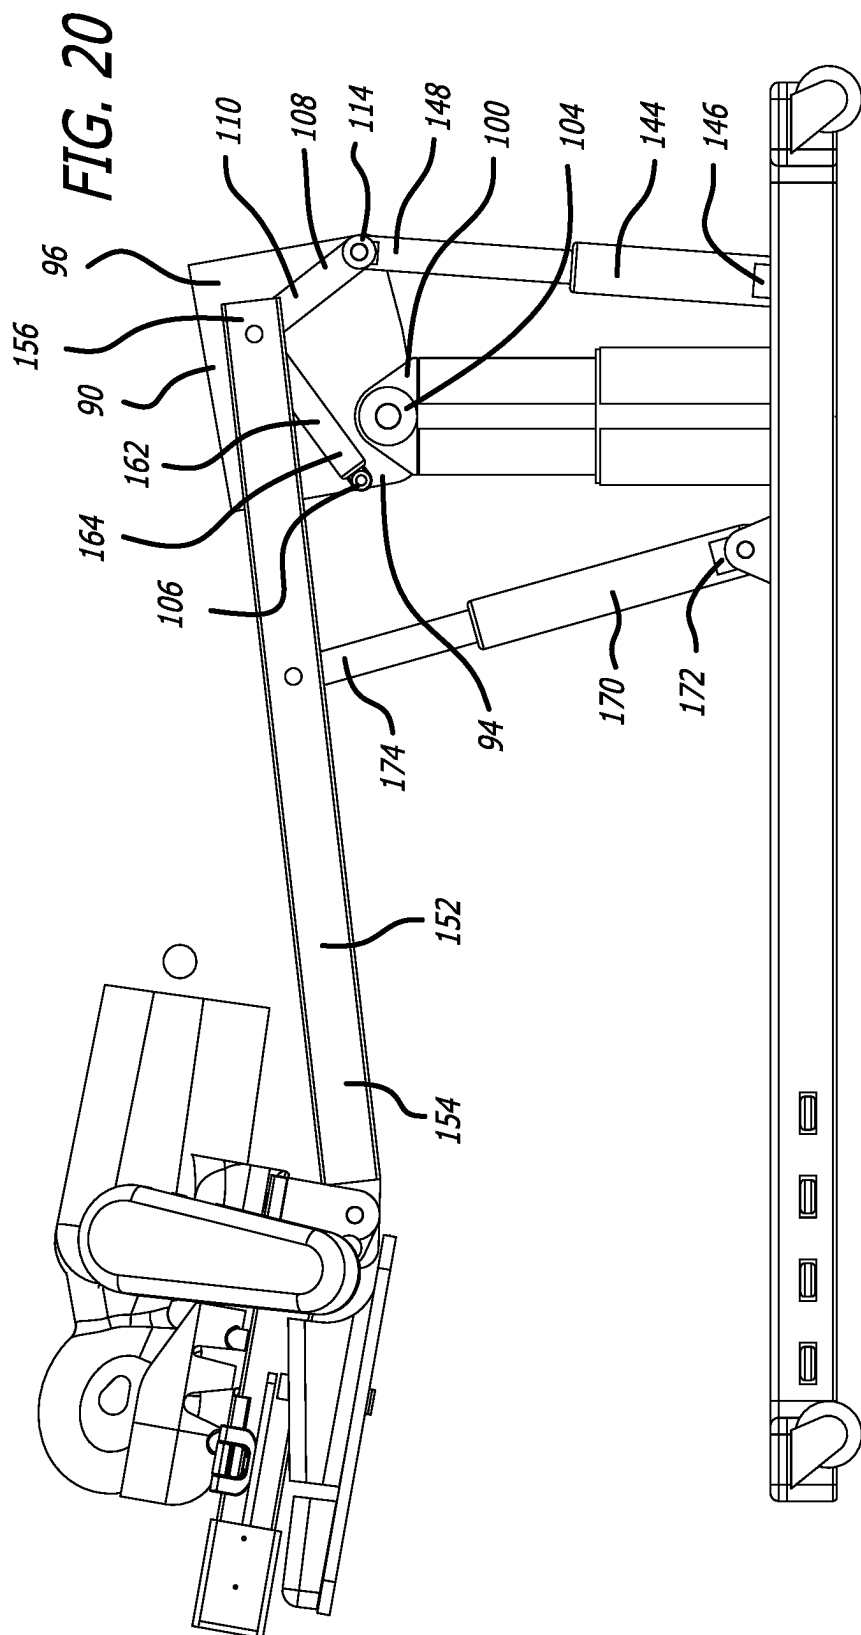


FIG. 18

FIG. 19








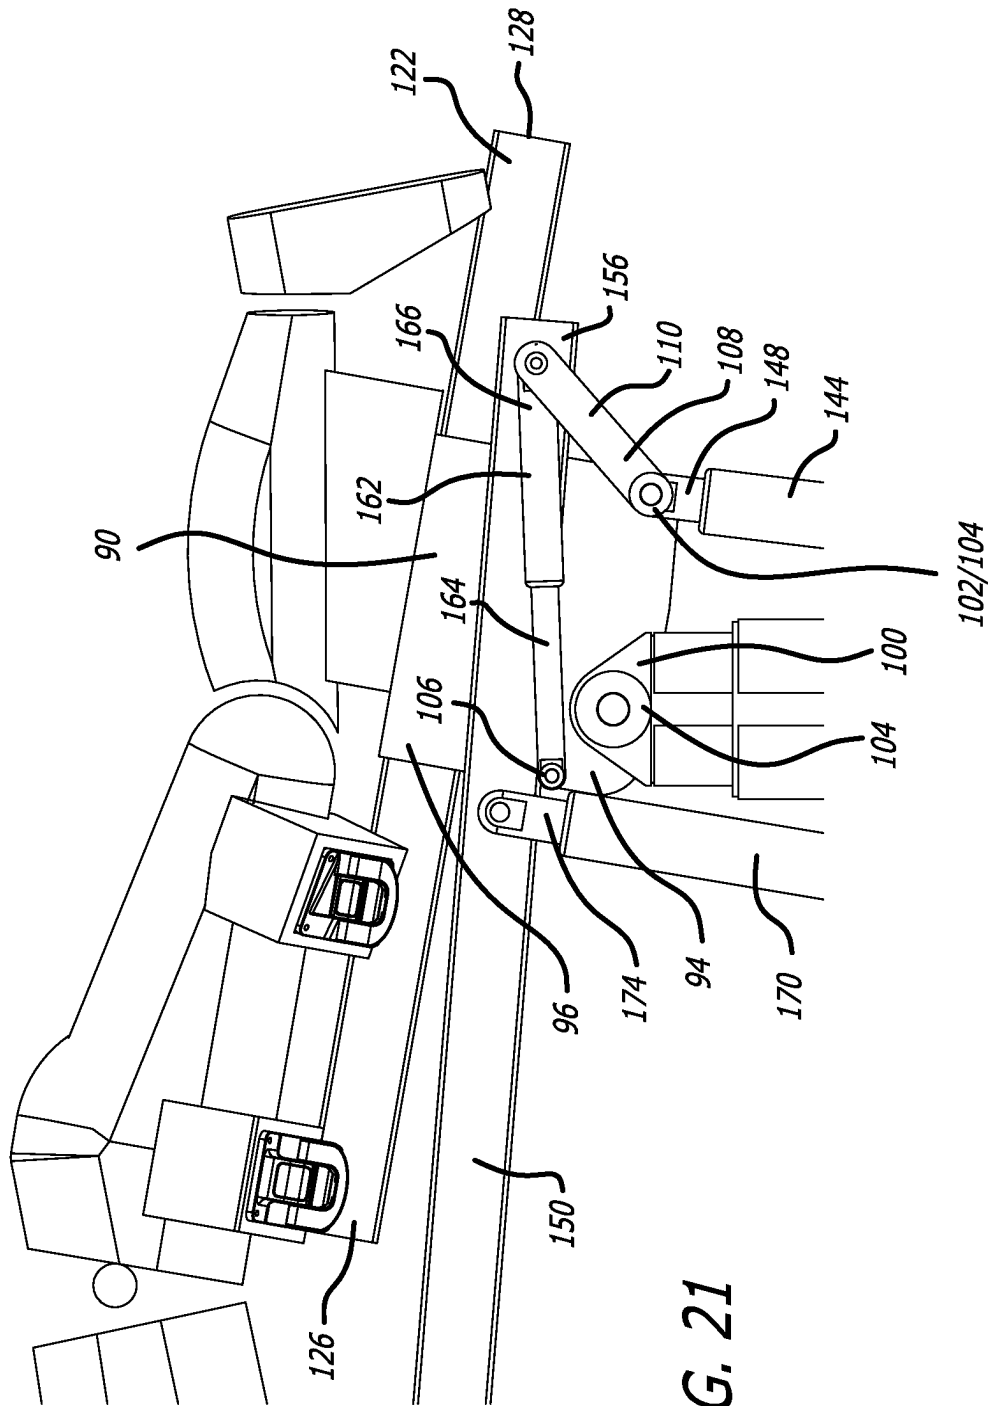


FIG. 21

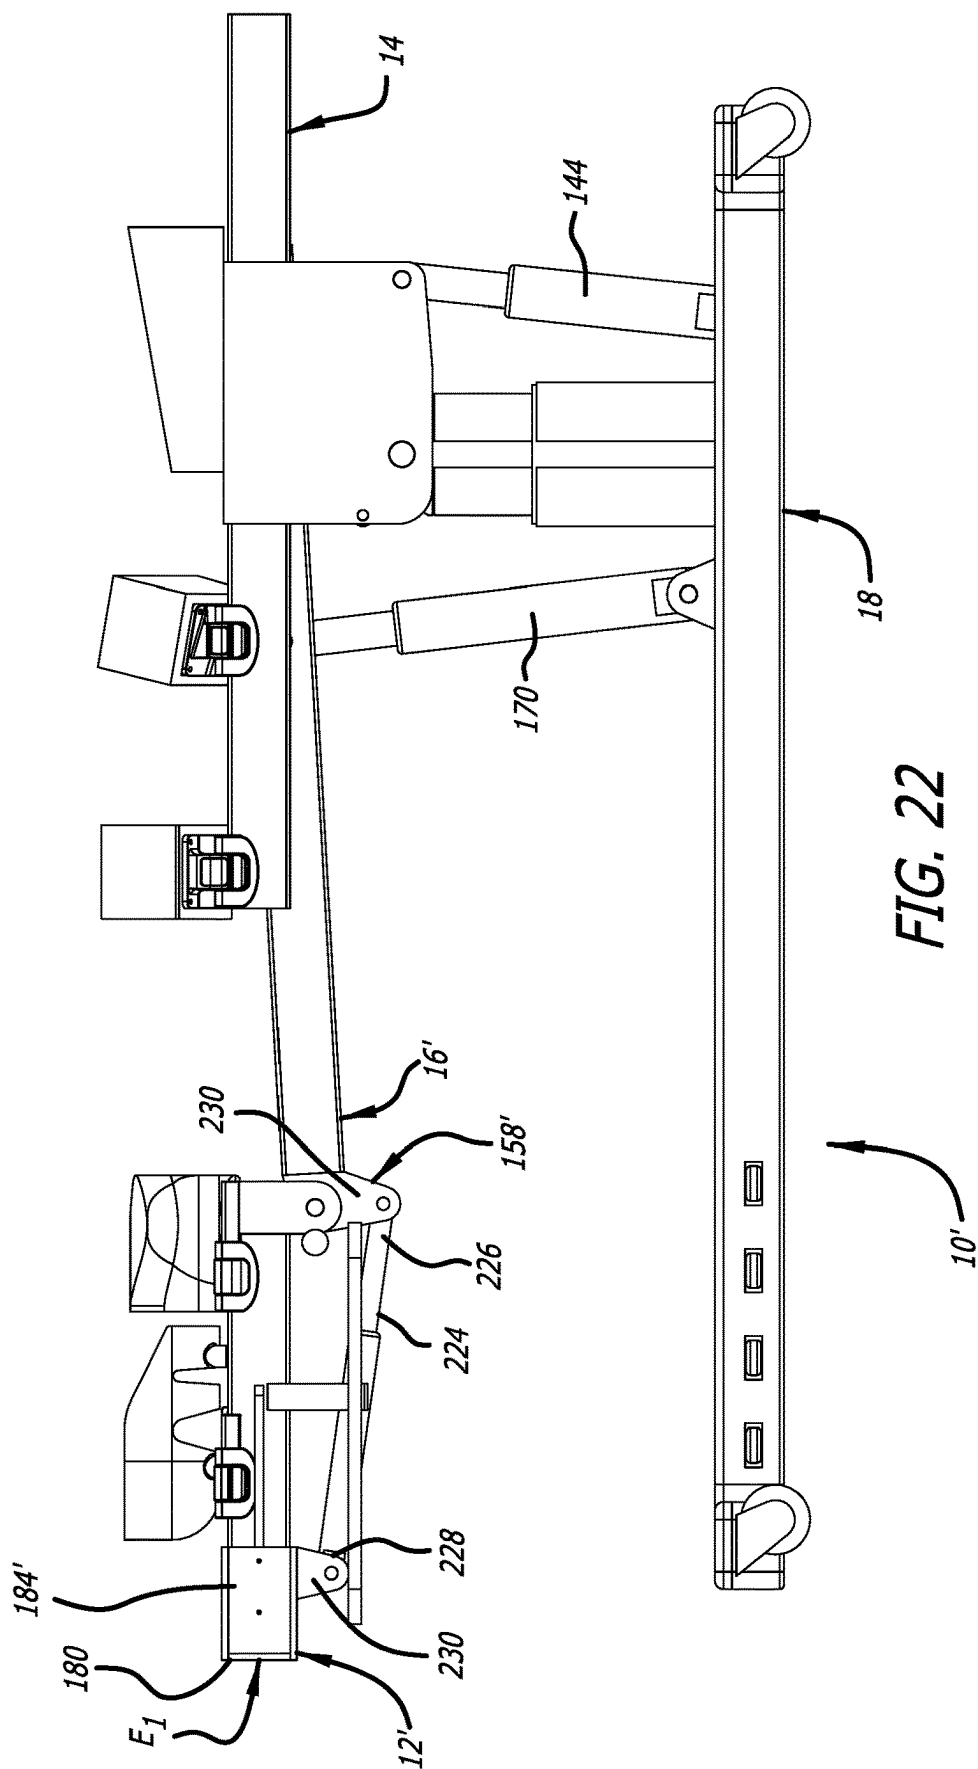

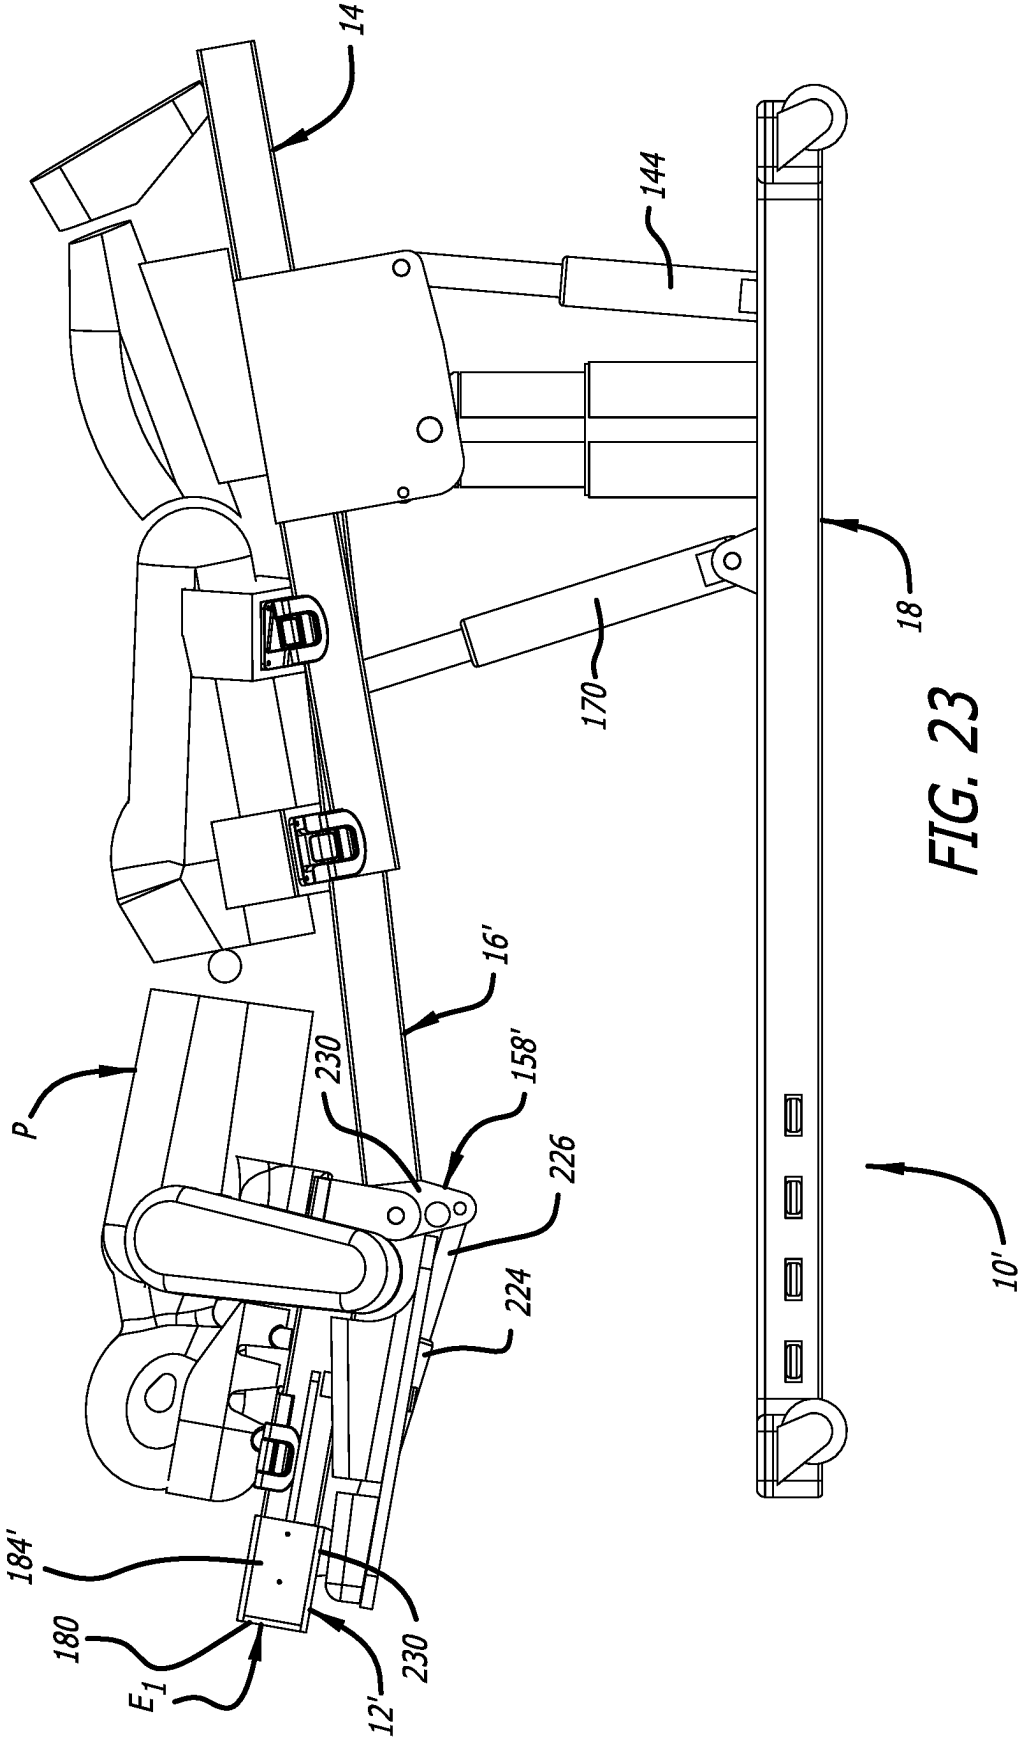

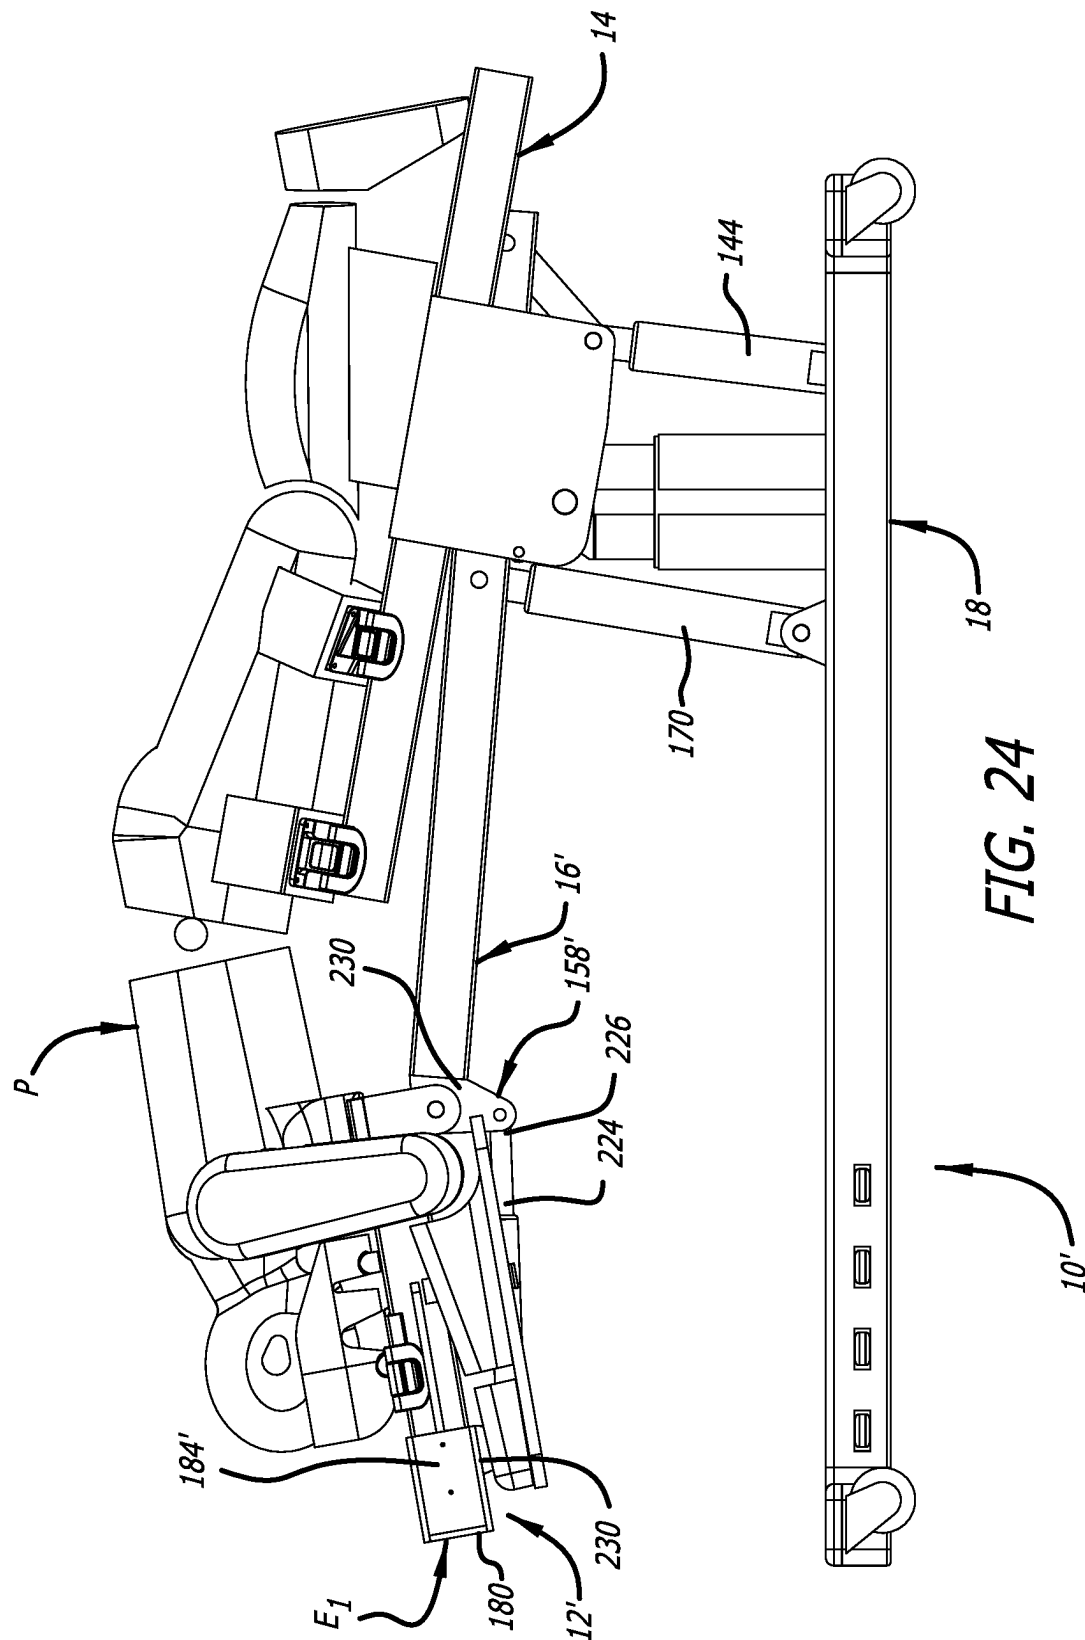

1

SURGICAL PLATFORM SYSTEM**FIELD**

The present technology generally relates to a surgical platform system having a first platform portion and a second platform portion that can be used to adjust portions of a patient supported thereby before, during, and after surgery in relation to a surgical robotic system.

BACKGROUND

Typically, conventional surgical tables include some form of patient articulation, but such patient articulation afforded thereby is often quite limited. For example, sometimes the conventional surgical tables can afford a limited degree of flexion or extension of the spine of the patient by lifting a portion of the torso of the patient in an upward direction and a downward direction. The patient articulation afforded by the conventional surgical tables is limited because portions thereof supporting portions of the patient are typically not separately articulatable to any great degree. For example, portions of the conventional surgical tables supporting the heads and the torsos of the patient and other portions of the conventional surgical tables supporting the legs of the patient are not typically separately articulatable relative to one another in a fashion that affords any great degree of flexion and extension via such articulation. Therefore, in order to enhance patient articulation, there is a need for a surgical platform system including a first platform portion and a second platform portion that are at least in part separately articulatable relative to one another to afford separate articulation of a first portion of the patient supported by the first platform portion and a second portion of the patient supported by the second platform portion. Such a surgical platform system incorporating the first platform portion and the second platform portion separately articulatable relative to one another can correspondingly position/orient and reposition/reorient a first portion of the patient's body supported by the first platform portion, and a second portion of the patient's body supported by the second platform portion with respect to one another. Portions of the surgical platform system can be attached relative to and/or integrated with a surgical robotic system to afford positioning and repositioning the patient's body relative thereto before, during, and after surgery.

SUMMARY

The techniques of this disclosure generally relate to a surgical platform system that can be used as a surgical table for performing surgery on a patient supported thereby, with a first platform portion and a second platform portion of the surgical platform system capable of supporting a first portion and a second portion, respectively, of the patient thereon. The first platform portion and the second platform portion can be separately articulatable relative to one another, and portions of the surgical platform system can be integrated with a surgical robotic system to afford positioning/orienting and repositioning/reorienting the patient's body relative to the surgical robot before, during, and after surgery.

In one aspect, the present disclosure provides a surgical platform system facilitating manipulation of a patient supported thereby, the surgical platform system including a support portion including a horizontally-oriented portion and a vertically-oriented portion, the horizontally-oriented

2

portion having a first end, an opposite second end, a first end portion at the first end, a second end portion at the second end, and a cross member extending between the first end portion and the second end portion, and the vertically-oriented portion including a column portion supported by the horizontally-oriented portion, the column portion spacing a first platform portion, a second platform portion, and a linkage portion of the surgical platform system from the horizontally-oriented portion, the linkage portion including a first base portion positioned on a first side of the column portion, a second base portion positioned on a second side of the column portion, a first connector extending between the first base portion and the second base portion, and a first support portion and a second support portion supported at least in part by the first connector, the first base portion and the second base portion being pivotally attached relative to the column portion, and the second platform portion being supported by the first base portion and the second base portion, the first connector having a first end and an opposite second end, the first end of the first connector being pivotally attached relative to the first base portion and the second base portion, and the first support portion and the second support portion each including a first end and an opposite second end, the first support portion and the second support portion being attached adjacent the second ends thereof to the second end of the first connector, and the first platform portion being supported by the linkage portion adjacent the first ends of the first support portion and the second support portion; the first platform portion including first patient support portions for supporting portions of the patient's head and upper torso; and the second platform portion including second patient support portions for supporting portions of the patient's legs; where the first platform portion is pivotal relative to the first base portion and the second base portion via pivotal movement of the first connector; where the second platform portion is pivotal relative to the column portion via pivotal movement of the first base portion and the second base portion; and where the pivotal movement of the first platform portion relative to the first base portion and the second base portion, and pivotal movement of the second platform portion relative to the column portion serves to separately articulate the first platform portion and the second platform portion relative to one another.

In another aspect, the present disclosure provides a surgical platform system facilitating manipulation of a patient supported thereby, the surgical platform system including a horizontally-oriented portion and a vertically-oriented portion, the horizontally-oriented portion supporting the vertically-oriented portion, and the vertically-oriented portion spacing a first platform portion, a second platform portion, and a linkage portion of the surgical platform system from the horizontally-oriented portion, the linkage portion including a base pivotally attached to the vertically-oriented portion, a first connector supported by the base, and a first support portion and a second support portion supported at least in part by the first connector, the second platform portion being supported by the base, the first connector having a first end and an opposite second end, the first end of the first connector being pivotally attached relative to the base, and the first support portion and the second support portion each including a first end and an opposite second end, the first support portion and the second support portion being attached adjacent the second ends thereof to the second end of the first connector, and the first platform portion being supported by the linkage portion adjacent the first ends of the first support portion and the second support portion; the first platform portion including first patient

3

support portions for supporting portions of the patient's head and upper torso; and the second platform portion including second patient support portions for supporting portions of the patient's legs; where the first platform portion is pivotal relative to the base via pivotal movement of the first connector; where the second platform portion is pivotal relative to the column portion via pivotal movement of the base; and where the pivotal movement of the first platform portion relative to the base, and pivotal movement of the second platform portion relative to the column portion serves to separately articulate the first platform portion and the second platform portion relative to one another.

In yet another aspect, the present disclosure provides a surgical platform system facilitating manipulation of a patient supported thereby, the surgical platform system including a support supporting a linkage portion, a first support platform, and a second support platform relative to the ground, the linkage portion including a base pivotally attached to the support, a first connector supported by the base, and a first support portion and a second support portion supported at least in part by the first connector, the second platform portion being supported by the base, the first connector having a first end and an opposite second end, the first end of the first connector being pivotally attached relative to the base, and the first support portion and the second support portion each including a first end and an opposite second end, the first support portion and the second support portion being attached adjacent the second ends thereof to the second end of the first connector, and the first platform portion being supported by the linkage portion adjacent the first ends of the first support portion and the second support portion; the first platform portion including first patient support portions for supporting portions of the patient's head and upper torso; and the second platform portion including second patient support portions for supporting portions of the patient's legs; where the first platform portion is pivotal relative to the base via pivotal movement of the first connector; where the second platform portion is pivotal relative to the support via pivotal movement of the base; and where the pivotal movement of the first platform portion relative to the base, and pivotal movement of the second platform portion relative to the support serves to separately articulate the first platform portion and the second platform portion relative to one another.

The details of one or more aspects of the disclosure are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the techniques described in this disclosure will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF DRAWINGS

The techniques of this disclosure generally relate to a surgical platform system.

FIG. 1 is a top, side, perspective view of a surgical platform system of the present disclosure with a patient positioned thereon;

FIG. 2 is a top, side, perspective view of the surgical platform system of FIG. 1;

FIG. 3 is a first lateral side, elevational view of the surgical platform system of FIG. 1 with the patient positioned thereon;

FIG. 4 is a second lateral side, elevational view of the surgical platform system of FIG. 1 with the patient positioned thereon;

FIG. 5 is a front, elevational view of the surgical platform system of FIG. 1 with the patient positioned thereon;

4

FIG. 6 is a rear, elevational view of the surgical platform system of FIG. 1 with the patient positioned thereon;

FIG. 7 is a top, plan view of the surgical platform system of FIG. 1 with the patient positioned thereon;

FIG. 8 is a first lateral side, elevational view of the surgical platform system of FIG. 1 including portions thereof oriented to position the patient in a Trendelenburg position;

FIG. 9 is a first lateral side, elevational view of the surgical platform system of FIG. 1 including portions thereof oriented to position the patient in a Reverse-Trendelenburg position;

FIG. 10 is a side, top, perspective view of the surgical platform system of FIG. 1 being positioned relative to a gantry of a surgical robotic system or robotic surgical guidance system;

FIG. 11 is a side, top, perspective view of the surgical platform system of FIG. 1 interconnected relative to the gantry of FIG. 10;

FIG. 12 is a first lateral side, elevational view of the surgical platform system of FIG. 1 interconnected relative to the gantry of FIG. 10;

FIG. 13 is a side, top, perspective view of the surgical platform system of FIG. 1 interconnected relative to the gantry of FIG. 10 with portions of the surgical platform system and the gantry oriented to position the patient in a Trendelenburg position;

FIG. 14 is a side, top, perspective view of the surgical platform system of FIG. 1 interconnected relative to the gantry of FIG. 10 with portions of the surgical platform system and the gantry oriented to position the patient in a Reverse-Trendelenburg position;

FIG. 15 is a first lateral side, elevational view of the surgical platform system of FIG. 1 with the portions of the surgical platform and the gantry oriented to subject the patient's spine to extension;

FIG. 16 is a first lateral side, elevational view of the surgical platform system of FIG. 1 with the portions of the surgical platform and the gantry oriented to subject the patient's spine to flexion;

FIG. 17 is a second lateral side, elevational, fragmentary view of a portion of the surgical platform system of FIG. 1 depicting a platform portion thereof in a first position;

FIG. 18 is a second lateral side, elevational, fragmentary view of the portion of the surgical platform system of FIG. 1 depicting the platform portion thereof in a second position;

FIG. 19 is a second lateral side, elevational, fragmentary view of a portion of the surgical platform system of FIG. 1 depicting portions of another platform portion thereof in a first position;

FIG. 20 is a second lateral side, elevational, fragmentary view of a portion of the surgical platform system of FIG. 1 depicting portions of the another platform portion thereof in a second position;

FIG. 21 is a second lateral side, elevational, fragmentary view of a portion of the surgical platform system of FIG. 1 depicting portions of the platform portion and the patient positioned thereon;

FIG. 22 is a second lateral side, elevational view of an additional embodiment of a surgical platform system according to the present disclosure;

FIG. 23 is a second lateral side, elevational view of the surgical platform system of FIG. 22 with the patient positioned thereon including portions thereof oriented to subject the patient's spine to extension; and

5

FIG. 24 is a second lateral side, elevational view of the surgical platform system of FIG. 22 with the patient positioned thereon including portions thereof oriented to subject the patient's spine to flexion.

DETAILED DESCRIPTION

A preferred embodiment of a surgical platform system of the present disclosure is generally indicated by the numeral 10 in FIGS. 1-7. As depicted in FIG. 1, the surgical platform system 10 includes a first end E_1 , a second end E_2 , and a mid-longitudinal L_1 extending through the first end E_1 and the second end E_2 . The surgical platform system 10 includes a first platform portion 12, a second platform portion 14, a linkage portion 16, and a support portion 18. The first platform portion 12 and the second platform portion 14 can each support portions of a patient P thereon, the linkage portion 16 is used in adjusting the position and orientation of the first platform portion 12 and the second platform portion 14 relative to one another, and the support portion 18 supports the first platform portion 12, the second platform portion 14, and the linkage portion 16 relative to the ground. The first support platform 12 can be used in supporting the head and the torso of the patient P, the second platform portion 14 can be used in supporting the legs of the patient P, and the linkage portion 16 can be used to adjust the head and torso relative to the legs of the patient P by positioning and orienting the first support platform 12 and the second support platform 14 relative to one another. For example, the surgical platform system 10 can be used to adjust the first platform portion 12 and the second platform portion 14 to position/orient the patient in the Trendelenburg position (FIG. 8) and the Reverse-Trendelenburg position (FIG. 9).

As discussed below, the surgical platform system 10 can be positioned and repositioned relative to, be interconnected with, and used in association with a surgical robotic system or robotic surgical guidance system (hereinafter referred to as "robotic system") generally indicated the letter R (FIGS. 10-16). And the robotic system R can be used for performing surgery or facilitating performance of surgery, and such surgery, for example, can included spinal surgery on the spine of the patient P.

Ultimately, the surgical platform system 10 can be operatively attached to a gantry G of the robotic system R, and a robotic arm A supported by the gantry G can be used to perform surgery or facilitate performance of surgery on the patient P. In addition to the relative adjustment of the first platform portion 12 and the second platform portion 14 by the surgical platform system 10, the gantry G, as discussed below, also can be used in adjusting portions relative to other portions of the surgical platform system 10. The relative adjustment of the first platform portion 12 and the second platform portion 14 by the surgical platform system 10 and/or the adjustment afforded by the operative attachment of the surgical platform system 10 to the gantry G can be used to manipulate the body of the patient P and position/orient and reposition/reorient the patient P with respect to the robotic arm A.

The surgical platform system 10 and/or the robotic system R can include a controller or controllers for controlling motorized actuators included in the surgical platform system 10 and/or the gantry G to facilitate the operation thereof. In some embodiments, for example, one of more controllers of the surgical platform system 10 and/or the robotic system R can coordinate movement therebetween by moving the first platform portion 12 and the second platform portion 14 relative to one another.

6

During use, the support portion 18 can be used to facilitate movement of the first platform portion 12, the second platform portion 14, and the linkage portion 16, and can be used positioning the first platform portion 12 relative to the robotic system R. The first platform portion 14 can then be interconnected with the robotic system R or a sub-system (not shown) positioned relative to the robotic system. The support portion 18, as depicted in FIGS. 1-4, includes a horizontally-oriented portion 20 and a vertically-oriented portion 22. The horizontally-oriented portion 20 is used in supporting the vertically-oriented portion 22 relative to the ground, and the vertically-oriented portion 22 is used in supporting the first platform portion 12, the second platform portion 14, and the linkage portion 16 relative to the horizontally-oriented portion 20. After the support portion 18 is properly positioned relative to the robotic system R, the first platform portion 12 can be interconnected with the robotic system R or the sub-system positioned relative to the robotic system.

As depicted in FIG. 1, the horizontally-oriented portion 20 includes a first end member 24 at a first end 25 thereof (collocated with the first end E_1), a second end member 26 at a second end 27 thereof (collocated with the second end E_2), and a cross member 30 extending between the first end member 24 and the second end member 26. The cross member 30 can be aligned with a mid-longitudinal axis L_2 (FIG. 1) of the horizontally-oriented portion 20, can be used to connect the first end member 24 and the second end member 26, and can be expandable and contractable to expand and contract a length of the horizontally-oriented portion 20 along the mid-longitudinal axis L_2 . Each of the first end member 24 and the second end member 26 includes an upper surface 32, a lower surface 34, a first lateral end 36, and a second lateral end 38. Furthermore, casters 40 can be attached relative to the lower surfaces 34 adjacent the first lateral ends 36 and the second lateral ends 38 of the of the first end member 24 and the second end member 26 to space the first end member 24 and the second end member 26 from the ground and to facilitate movement of the support portion 14.

The surgical platform system 10 initially can be positioned relative to the robotic system R using a positioner 42 having portions provided as part of the surgical platform system 10 and the robotic system R. To illustrate, the positioner 42 can include a receiver portion 44 (FIG. 5) that can be provided as part of the support portion 18, and a tongue portion 46 (FIG. 10) that can be attached to or positioned relative to the robotic system R, or vice versa. A similar positioner that can be used as part of the surgical platform system 10 and the robotic system R is disclosed in U.S. Ser. No. 17/740,559, filed May 10, 2022, which is hereby incorporated by reference herein.

The receiver portion 44 can be provided at and adjacent the first end 25, can be formed by and/or attached relative to portions of the first end member 24 and the cross member 30. The receiver portion 44 can be formed as a tunnel formed in portions of the first end member 24 and the cross member 30. The receiver portion 44 includes a first sidewall portion 50 with portions provided adjacent a first lateral side 52 of the cross member 30, a second sidewall portion 54 with portions provided adjacent a second lateral side 56 of the cross member 30, and an upper wall portion 58 formed in part by the lower surface 34 of the first end member 24 and portions of the cross member 30.

Portions of the first sidewall portion 50, the second sidewall portion 54, and the upper wall portion 58 form the tunnel to define a receiving area A_1 for receiving the tongue

7

portion 46. Furthermore, each of the first sidewall portion 50 and the second sidewall portion 54 can include various apertures 60 adjacent the receiving area A₁ that are spaced therealong, and include various bumper wheels 62 rotatably mounted in the various apertures 60. Portions of the bumper wheels 62 can extend into the receiving area A₁. When the tongue portion 46 is received in the receiving area A₁, the bumper wheels 62 are used to both guide and position the tongue portion 46 relative to the first sidewall portion 50 and the second sidewall portion 54 (and the remainder of the horizontally-oriented portion 20).

The tongue portion 46 can be attached to (FIG. 10) or otherwise positioned relative to the robotic system R, and includes a first end 64 and an opposite second end 66. The tongue portion 46 can be attached to the robotic system R at and adjacent the first end 64. Furthermore, the tongue portion 46 can include a first lateral side surface 70, a second lateral side surface 72, and a bottom surface 74 extending between the first end 64 and the second end 66. Adjustable feet 76 can be attached to the bottom surface 74 adjacent the second end 66 to facilitate leveling of at least portions of the tongue portion 46.

As depicted in FIG. 10, to initially position the support portion 18 relative to the robotic system R, the horizontally-oriented portion 20 of the support portion 14 can be positioned so that the tongue portion 46 is received in the receiver portion 44. In doing so, the tongue portion 46 is inserted between the first sidewall portion 50 and the second sidewall portion 54, under the upper wall portion 58, and into the receiving area A₁. As the tongue portion 46 is received in the receiving area A₁, the first lateral side surface 70 contacts the bumper wheels 62 rotatably mounted to the first sidewall portion 50, and the second lateral side surface 72 contacts the bumper wheels 62 rotatably mounted to the second sidewall portion 54. Such contact affords relative movement of the tongue portion 46 to the receiver portion 44 that guides the tongue portion 46 into the receiving area A₁ to initially position the surgical platform system 10 relative to the robotic system R.

When the surgical platform system 10 is attached relative to the robotic system R, adjustment of the first platform portion 12 and the second platform portion 14 relative to one another (via operation of the surgical platform system 10 and/or the robotic system R) can change the distance between the second platform portion 14 and the gantry G, and the position of the tongue portion 46 in the receiving area A₁ can correspondingly change during such operation. As such, the tongue portion 46 can be moved into and out of the receiving A₁ according to the changes in the distance between the second platform portion 14 and the gantry G.

As depicted in FIG. 2-4, the vertically-oriented portion 22 includes a telescoping column 80 for positioning/orienting and repositioning/reorienting the first platform portion 12, the second platform portion 14 and the linkage portion 16 relative to the horizontally-oriented portion 20. The telescoping column 80 includes a lower portion 82 and an upper portion 84. The lower portion of the telescoping column 80 is supported by the cross member 30, and the upper portion 84 can be telescopically moved upwardly and downwardly relative to the lower portion 82. The telescopic expansion and contraction of the telescoping column 80 can be used to correspondingly raise and lower the first platform portion 12, the second platform portion 14, and the linkage portion 16 relative to the horizontally-oriented portion 20 to position/orient and reposition/reorient the first platform portion 12, the second platform portion 14, and the linkage portion 16 between a lower position and an upper position.

8

The linkage portion 16, as depicted in FIGS. 2-4 and 6, includes a base formed by a first base portion 90 positioned adjacent a first side of the telescoping column 80 and a second base portion 92 positioned adjacent a second side of the telescoping column 80. As discussed below, the first base portion 90 and the second base portion 92 are pivotally attached to a portion of the upper portion 84, and the base formed by the first base portion 90 and the second base portion 92 affords pivotal movement of other portions of the linkage portion 16 relative thereto. The first base portion 90 and the second base portion 92 can each include a lower portion 94 and an upper portion 96. Furthermore, as depicted in FIG. 5, the upper portion 84 of the telescoping column 80 can include an extended portion 100 with a first post 102 on a first side of the extended portion 100, and a second post 104 on a second side of the extended portion 100. The lower portion 94 of the first base portion 90 can be pivotally attached to the first post 102, and the lower portion 94 of the second base portion 92 can be pivotally attached to the second post 104. The lower portions 94 of the first base portion 90 and the second base portion 92 are pivotally attached to the first post 102 and the second post 104, respectively, adjacent ends of the lower portions 94 closest to the first end E₁. As discussed below, pivotal movement of the first base portion 90 and the second base portion 92 affords articulation of the first platform portion 12 and the second platform portion 14 relative to the telescoping column 80.

In addition to being attached relative to one another by being pivotally attached to the first post 102 and the second post 104, the first base portion 90 and the second base portion 92 can be attached to one another via a first connector 106 and a second connector 108. The first connector 106 and the second connector 108 extend between and are fastened to the first base portion 90 and the second base portion 92. As depicted in FIGS. 5 and 6, the first connector 106 is attached to the lower portions 94 of the first base portion 90 and the second base portion 92 above where the first base portion 90 and the second base portion 92 are pivotally attached to the first post 102 and the second post 104, respectively; and the second connector 108 is attached to the lower portions 94 of the first base portion 90 and the second base portion 92 adjacent ends of the lower portions 94 closest to the second end E₂.

The attachment to the first post 102 and the second post 104, and, as discussed below, the first connector 106 and the second connector 108 serve in spacing the first base portion 90 and the second base portion 92 apart from one another and providing a rigid and stable connection therebetween. For example, as depicted in FIG. 5, the first connector 106 can be formed as a single rod portion extending between and attaching the first base portion 90 and the second base portion 92 to one another. And, as depicted in FIG. 6, the second connector 108 can include a web portion 110, a first rod portion 112 on a first side of the web portion 110, and a second rod portion 114 on a second side of the web portion 110. Portions of a lower portion of the web portion 110, the first rod portion 112, and the second rod portion 114 extend between and attach the first base portion 90 and the second base portion 92 to one another. The first connector 106 can be fixedly attached between the first base portion 90 and the second base portion 92, and the portions of the web portion 110, the first rod portion 112, and the second rod portion 114 of the second connector 108 can be pivotally connected to the first base portion 90 and the second base portion 92.

As depicted in FIG. 6, the upper portions of the first base portion 90 and the second base portion 92 can each include

a recess 120 for receiving portions of the second platform portion 14 to facilitate attachment of the second platform portion 14 thereto. The second support platform 14, as depicted in FIG. 2, includes a first support portion 122 and a second support portion 124, and the first support portion 122 and the second support portion 124 each include a first end 126 and a second end 128. The first support portion 122 and the second support portion can each be formed, for example, as beams, rails, rods, or tubes having lengths extending between the first end 126 and the second end 128. Portions of the first support portion 122 between the first end 126 and the second end 128 are attached to the first base portion 90 via receipt and attachment thereof in the recess 120, and portions of the second support portion 124 between the first end 126 and the second end 128 are attached to the second base portion 92 via receipt and attachment thereof in the recess 120.

A first upper thigh support 130, a second upper thigh support 132, a first lower thigh support 134, a second lower thigh support 136, a support plate 140, and a lower leg support 142 are supported by and/or between the first support portion 122 and/or the second support portion 124. As depicted in FIG. 2, the first upper thigh support 130 and the first lower thigh support 134 are supported by the first support portion 122. The second upper thigh support 132 and the second lower thigh support 136 are supported by the second support portion 124. The support plate 140 (supporting the lower leg support 142) is supported between the first support portion 122 and the second support portion 124. The first upper thigh support 130, the second upper thigh support 132, the first lower thigh support 134, the second lower thigh support 136, and the support plate 140 can be configured similarly to those disclosed in U.S. Ser. No. 17/704,759, filed Mar. 25, 2022, which is hereby incorporated by reference herein, and the positions thereof can be adjusted relative to the first support portion 122 and the second support portion 124 to accommodate patients of different sizes.

The second platform portion 14 can be pivoted relative to the telescoping column 80 (and the support portion 18) using a first actuator 144 that is actuatable (via expansion and contraction thereof) between at least a first position (FIG. 17) and a second position (FIG. 18). The first actuator 144 has a first end 146 pivotally attached to the horizontally-oriented portion 20, and a second end 148 pivotally attached to the second connector 108 (between the first rod portion 112 and the second rod portion 114, and portions of the web portion 110). The first end 146, for example, can be pivotally attached to the horizontally-oriented portion 20 in an aperture formed therein or a clevis extending outwardly therefrom. Actuation of the first actuator 144 moves the second connector 108 toward or away from the horizontally-oriented portion 20, and correspondingly pivots the first base portion 90, the second base portion 92, and the second platform portion 14 attached thereto relative to the telescoping column 80 (and the support portion 18). In doing so, the first ends 126 of the first support portion 122 and the second support portion 124 are tipped downwardly via expansion of the first actuator 144 or tipped upwardly via contraction of the first actuator 144 to correspondingly tilt the second platform portion 14.

The linkage portion 16 includes a third support portion 150 and a fourth support portion 152 supporting the first platform portion 12, and the third support portion 150 and the fourth support portion 152 are pivotally attached to the second connector 108. The third support portion 150 and the fourth support portion 152 can each be formed, for example,

as beams, rails, rods, or tubes having lengths extending between opposite ends thereof. The first platform portion 12 can be oriented relative to the column 80 (and the support portion 18) via pivotal movement of the first base portion 90 and the second base portion 92, via pivotal movement of the second connector 108 relative to the first base portion 90 and the second base portion 92, and via pivotal movement of the third support portion 150 and the fourth support portion 152 relative to the second connector 108. Pivotal movement of the second connector 108 relative to the first base portion 90 and the second base portion 92, and pivotal movement of the third support portion 150 and the fourth support portion 152 relative to the second connector 108 also orients the first platform portion 12 relative to the second platform portion 14.

As depicted in FIG. 2, the third support portion 150 and the fourth support portion 152 each include a first end 154 and a second end 156. The first platform portion 12 is supported by the third support portion 150 and the fourth support portion 152 adjacent the first ends 154 thereof. And the second ends 156 of the third support portion 150 and the fourth support portion 152 are spaced apart by and pivotally attached to an upper portion of the web portion 110 of the second connector 108. The third support portion 150 and the fourth support portion 152 also are spaced apart by an end portion 158 of the linkage portion 16 at the first ends 154 thereof, and by a third connector 160 intermediate the first ends 154 and the second ends 156.

As depicted in FIGS. 19-21, pivotal movement of the second connector 108 relative to first base portion 90 and the second base portion 92 is afforded by use of a second actuator 162. The second actuator 162, as depicted in FIG. 21, has a first end 164 pivotally attached to the first connector 106, and a second end 166 pivotally attached to the upper portion of the web portion 110 of the second connector 108. The second actuator 162 is actuatable (via expansion and contraction thereof) between at least a first position (FIG. 19) and a second position (FIG. 20). Given the pivotal connection of the lower portion of the second connector 108 to the first base portion 90 and the second base portion 92, actuation of the second actuator 162 pivots the second connector 108 relative to the first base portion 90 and the second base portion 92 to correspondingly move the first ends 154 of the third support portion 150 and the fourth support portion 152 toward (via contraction) or away (via expansion) from the first end E₁. Thus, such pivotal movement serves in orienting the first platform portion 12 relative to the telescoping column 80 (and the support portion 18) and to the second support portion 14 by moving the first platform portion toward or away from the first end E₁.

As also depicted in FIGS. 19-21, pivotal movement of the third support portion 150 and the fourth support portion 152 relative to the second connector 108 is afforded by use of a third actuator 170. The third actuator 170 has a first end 172 pivotally attached to the horizontally-oriented portion 20, and a second end 174 pivotally attached to the third connector 160. The first end 172, for example, can be pivotally attached to the horizontally-oriented portion 20 in an aperture formed therein or a clevis extending outwardly therefrom. The third actuator 170 is actuatable (via expansion and contraction thereof) between at least a first position (FIG. 19) and a second position (FIG. 20). Given the pivotal connection of the third support portion 150 and the fourth support portion 152 to the upper portion of the second connector 108, actuation of the third actuator 170 pivots the third support portion 150 and the fourth support portion 152 relative to the second connector 108 to correspondingly tip

11

the first ends **154** of the third support portion **150** and the fourth support portion **152** downwardly (via contraction) or upwardly (via expansion). Thus, such pivotal movement serves in orienting the first platform portion **12** relative to the telescoping column **80** (and the support portion **18**) and to the second support portion **14** by moving the first platform portion **12** downwardly or upwardly.

The pivotal movement of the second connector **108** relative to the first base portion **90** and the second base portion **92**, and the pivotal movement of the third support portion **150** and the fourth support portion **152** relative to the second connector **108** orients the first platform portion **12** relative to the second platform portion **14**. As such, the first platform portion **12** and the second platform portion **14** are separately articulatable via operation of the second actuator **162** and the third actuator **170**, and, when the patient **P** is supported on the first platform portion **12** and the second platform portion **14**, such separate articulation affords subjecting the patient's body to flexion and extension.

As discussed below, actuation of the first actuator **144**, the second actuator **162**, and the third actuator **170** can be automated and controlled by the controller or controllers of the surgical platform system **10** and/or the robotic system **R**. To illustrate, the controller or controllers can be used, for example, to orient the first platform portion **12** and the second platform portion **14** relative to one another in the above-described Trendelenburg position (FIG. **8**), Reverse-Trendelenburg position (FIG. **9**), or other below-described orientations. As discussed below, the controller or controllers also can be used in conjunction with the robotic system **R** to adjust the position of the first platform portion **12** and the second platform portion **14** relative to one another.

As depicted in FIG. **2**, the first platform portion **12** includes an first end **180**, an opposite second end **182**, a first end portion **184** provided at and adjacent the first end **180**, a second end portion **186** at and adjacent the second end **182**, a fifth support portion **190** extending between the first end portion **184** and the second end portion **186**, and a sixth support portion **192** extending between the first end portion **184** and the second end portion **186**. The fifth support portion **190** and the sixth support portion **192** can each be formed, for example, as beams, rails, rods, or tubes having lengths extending between opposite ends thereof. The first end portion **184** can include an engagement portion **194** similar to that disclosed in U.S. Ser. No. 17/704,759, filed Mar. 25, 2022, for interfacing with portions of the robotic system **R** to facilitate interconnection of the first platform portion **12** with the robotic system **R** or the sub-system positioned relative to the robotic system.

Additionally, the first platform portion **12** can include a head support **196** and a chest support **198** similar to those also disclosed in U.S. Ser. No. 17/704,759, filed Mar. 25, 2022. The head support **196** and the chest support **198** are supported by and/or between the fifth support portion **190** and the sixth support portion **192**, and the positions thereof can be adjusted relative to the fifth support portion **190** and the sixth support portion **192** to accommodate patients of different sizes. Furthermore, in addition to the head support **196** and the chest support **198**, the first platform portion **12** can include a first arm support **200** supported by the fifth support portion **190** and a second arm support **202** supported by the sixth support portion **192**.

The first platform portion **12** can be pivotally attached relative to the linkage portion **16**. As depicted in FIGS. **3** and **4**, the second end portion **186** can include a first extension portion **204** and a second extension portion **206** extending downwardly therefrom. The first extension portion **204** is

12

provided adjacent the fifth support portion **190** and the second extension portion **206** is provided adjacent the sixth support portion **192**. Each of the first extension portion **204** and the second extension portion **206** include a first leg portion **210** attached to the second end portion **186**, and a second leg portion **212** extending outwardly from the first leg portion **210**. First leg portions **210** can each be pivotally attached to the linkage portion **16** via receipt of pins **214** extending therethrough and into the end portion **158** of the linkage portion **16**. And the first platform portion **12** can be fixed in a first pivotal position relative to the linkage portion **16** via receipt of removable pins **216** extending through the second leg portions **212** and into the end portion **158** of the linkage portion **16**. When the removable pins **216** are removed, the first platform portion **12** can pivot relative to the linkage portion **16** (and the second platform portion **12**) into various other pivotal positions. As discussed below, pivot movement afforded by the pivotal attachment of the first platform portion **12** relative to the linkage portion **16** allows the surgical gantry **G** to further articulate the position of the first platform portion **12** relative to the second platform portion **14**.

After the surgical platform system **10** is initially positioned relative to the robotic system **R** (FIG. **10**), and thereafter, the tongue portion **46** is received in the receiving area **A₁**, the engagement portion **194** can be engaged to a complimentary engagement portion **220** similar to that disclosed in U.S. Ser. No. 17/704,759, filed Mar. 25, 2022, provided on the robotic system **R** or the sub-system positioned relative to the robotic system **R**. As depicted in FIG. **10**, the complimentary engagement portion **220** is provided on the gantry **G**. With surgical platform system **10** interconnected (FIGS. **11-16**) with the gantry **G** via engagement of the engagement portion **194** with the complimentary engagement portion **220**, the surgical platform portion **10** can work together with portions of the gantry **10** to articulate the first platform portion **12** and the second platform portion **14** relative to position and orient the patient **P** relative to the robotic system **R**.

As depicted in FIG. **10-16**, the gantry **G** can include a platform manipulator **222** supporting the complimentary engagement portion **220** and positioned above the tongue portion **46**. The platform manipulator **222** can be used in raising, lowering, and tilting (upwardly or downwardly) portions of the first platform portion **12** relative to the second platform portion **14**. To illustrate, when the surgical platform system **10** is interconnected with the gantry **G**, and the first platform portion **12** is in the first pivotal position relative to the linkage portion, the surgical platform system **10** and the platform manipulator **222** can be operated in a coordinated fashion to position/orient the first platform portion **12** and the second platform portion **14** so that the patient **P** is moved into the Trendelenburg position (FIG. **13**) and the Reverse-Trendelenburg position (FIG. **14**). In doing so, the platform manipulator **222** can be used in tilting the first platform portion **12** adjacent the first end **180** downwardly form the Trendelenburg position or upwardly for the Reverse-Trendelenburg position. When the removable pins **216** are removed to allow the first platform portion **12** to pivot relative to the linkage portion **16**, the surgical platform system **10** and the platform manipulator **222** can be operated in a coordinated fashion (via use of the controller or controllers of the surgical platform system **10** and/or the robotic system **R**) to position/orient the first platform portion **12** and the second platform portion **14** so that the patient **P** is subjected to extension (FIG. **15**) or flexion (FIG. **16**). In doing so, the platform manipulator **222** can be used in tilting

13

the first platform portion **12** adjacent the first end **180** upwardly to facilitate subjecting the patient's spine to extension or downwardly to facilitate subjecting the patient's spine to flexion. Thus, operation of the surgical platform system **10** and the platform manipulator **222** can be used to position/orient and reposition/reorient the patient's body with respect to the robotic arm A, and the robotic arm A can be used for performing surgery or facilitating performance of surgery on the patient P.

Another embodiment of the surgical platform system **10'** can be configured to facilitate pivoting of a first platform portion **12'** relative to a linkage portion **16'**. As depicted in FIGS. **22-24**, the surgical platform system **10'** includes similar features to the surgical platform system **10**, and like numerals are used to in describing these similar features. Unlike the surgical platform system **10**, the surgical platform system **10'** includes a modified end portion **158'** of the linkage portion **16**, a modified first end portion **184'** of the first platform portion **12'**, and a fourth actuator **224** extending between the modified end portion **158'** and the modified first end portion **184'**.

Like the first platform portion **12** and the linkage portion **16**, the first platform portion **12** is pivotally attached to the linkage portion **16**. And the fourth actuator **224** is actuatable (via expansion and contraction thereof) between at least a first position (FIG. **23**) and a second position (FIG. **24**) to pivot the first platform portion **12'** relative to the linkage portion **16'**. The fourth actuator **224** has a first end **226** pivotally attached to the modified end portion **158'**, and a second end **228** pivotally attached to the modified first end portion **184'**. The modified end portion **158'** and the modified first end portion **184'** can each include a clevis **230** facilitating pivotal attachment, respectively, of the first end **226** and the second end **228**. Actuation of the fourth actuator **224** pivots the first platform portion **12'** relative to the linkage portion **16'** and tips the first end **180** of the first platform portion **12'** upwardly (FIG. **23**) or downwardly (FIG. **24**). Such upward and downward movement of the first end **180** of the first platform portion **12'** along with coordinated movement of other portions of the surgical platform **10'** can be used to subject the patient's spine to extension (FIG. **23**) and flexion (FIG. **24**). The operation of the fourth actuator **224** can be coordinated with operation of the first actuator **144**, the second actuator **162**, and/or the third actuator **170** using the controller or controllers of the surgical platform system **10** and/or the robotic system R).

It should be understood that various aspects disclosed herein may be combined in different combinations than the combinations specifically presented in the description and the accompanying drawings. It should also be understood that, depending on the example, certain acts or events of any of the processes of methods described herein may be performed in a different sequence, may be added, merged, or left out altogether (e.g., all described acts or events may not be necessary to carry out the techniques). In addition, while certain aspect of this disclosure are described as being performed by a single module or unit for purposes of clarity, it should be understood that the techniques of this disclosure may be performed by a combination of units or modules associated with, for example, a medical device.

We claim:

1. A surgical platform system facilitating manipulation of a patient supported thereby, the surgical platform system comprising:

a support portion including a horizontally-oriented portion and a vertically-oriented portion, the horizontally-oriented portion having a first end, an opposite second

14

end, a first end portion at the first end, a second end portion at the second end, and a cross member extending between the first end portion and the second end portion, and the vertically-oriented portion including a column portion supported by the horizontally-oriented portion, the column portion spacing a first platform portion, a second platform portion, and a linkage portion of the surgical platform system from the horizontally-oriented portion,

the linkage portion including a first base portion positioned on a first side of the column portion, a second base portion positioned on a second side of the column portion, a first connector extending between the first base portion and the second base portion, and a first support portion and a second support portion supported at least in part by the first connector,

the first base portion and the second base portion being pivotally attached relative to the column portion, and the second platform portion being supported by the first base portion and the second base portion,

the first connector having a first end and an opposite second end, the first end of the first connector being pivotally attached relative to the first base portion and the second base portion, and

the first support portion and the second support portion each including a first end and an opposite second end, the first support portion and the second support portion being attached adjacent the second ends thereof to the second end of the first connector, and the first platform portion being supported by the linkage portion adjacent the first ends of the first support portion and the second support portion;

the first platform portion including first patient support portions for supporting portions of the patient's head and upper torso; and

the second platform portion including second patient support portions for supporting portions of the patient's legs;

wherein the first platform portion is pivotal relative to the first base portion and the second base portion via pivotal movement of the first connector;

wherein the second platform portion is pivotal relative to the column portion via pivotal movement of the first base portion and the second base portion; and

wherein pivotal movement of the first platform portion relative to the first base portion and the second base portion and pivotal movement of the second platform portion relative to the column portion serve to separately articulate the first platform portion and the second platform portion relative to one another.

2. The surgical platform system of claim 1, further comprising a first actuator extending between the horizontally-oriented portion and the first connector, the first actuator being actuatable to expand and contract to pivot the first base portion, the second base portion, and the second platform portion relative to the column portion.

3. The surgical platform system of claim 1, wherein the second ends of the first support portion and the second support portion are pivotally attached to the second end of the first connector.

4. The surgical platform system of claim 3, further comprising a first actuator extending between the horizontally-oriented portion and a second connector attached between the first support portion and the second support portion, the first actuator being actuatable to expand and contract to pivot the first support portion and the second support portion relative to the first connector.

15

5. The surgical platform system of claim 4, further comprising a second actuator extending between the second end of the first connector and a third connector attached between the first base portion and the second base portion, the second actuator being actuatable to expand and contract to pivot the first connector relative to the first base portion and the second base portion.

6. The surgical platform system of claim 1, further comprising a first actuator extending between the horizontally-oriented portion and the first connector, a second actuator extending between the horizontally-oriented portion and a second connector attached between the first support portion and the second support portion, and a third actuator extending between the second end of the first connector and a third connector attached between the first base portion and the second base portion, the first actuator being actuatable to expand and contract to pivot the first base portion, the second base portion, and the second platform portion relative to the column portion, the second actuator being actuatable to expand and contract to pivot the first support portion and the second support portion relative to the first connector; and the third actuator being actuatable to expand and contract to pivot the first connector relative to the first base portion and the second base portion.

7. The surgical platform system of claim 6 in combination with a robotic system, further comprising:

the robotic system including a gantry having a platform manipulator and an engagement portion supported by the platform manipulator; and

the first platform portion including a first end and an opposite second end, the first end of the first platform portion including a complimentary engagement portion for engaging the engagement portion of the gantry, and the second end of the first platform portion being attached to the first ends of the first support portion and the second support portion;

wherein, when the engagement portion and the complimentary engagement portion are engaged to one another, the surgical platform system is interconnected with the gantry, and the first actuator, the second actuator, the third actuator, and the platform manipulator can be actuated to position/orient the patient supported by the first platform portion and the second platform portion relative to the robotic system.

8. The combination of the surgical platform system and the robotic system of claim 7, wherein the second end of the first platform portion is pivotally attached to the first ends of the first support portion and the second support portion, and wherein the first actuator, the second actuator, the third actuator, and the platform manipulator can be actuated to pivot the first platform portion and the second platform portion relative to one another.

9. The surgical platform system of claim 1, wherein the column portion is telescopically expandable and contractable between a contracted first position and an expanded second position to raise and lower the first platform portion, the second platform portion, and the linkage portion relative to the horizontally-oriented portion.

10. A surgical platform system facilitating manipulation of a patient supported thereby, the surgical platform system comprising:

a horizontally-oriented portion and a vertically-oriented portion, the horizontally-oriented portion supporting the vertically-oriented portion, and the vertically-oriented portion including a column portion spacing a first platform portion, a second platform portion, and a

16

linkage portion of the surgical platform system from the horizontally-oriented portion,

the linkage portion including a base pivotally attached to the vertically-oriented portion, a first connector supported by the base, and a first support portion and a second support portion supported at least in part by the first connector,

the second platform portion being supported by the base, the first connector having a first end and an opposite second end, the first end of the first connector being pivotally attached relative to the base, and

the first support portion and the second support portion each including a first end and an opposite second end, the first support portion and the second support portion being attached adjacent the second ends thereof to the second end of the first connector, and the first platform portion being supported by the linkage portion adjacent the first ends of the first support portion and the second support portion;

the first platform portion including first patient support portions for supporting portions of the patient's head and upper torso; and

the second platform portion including second patient support portions for supporting portions of the patient's legs;

wherein the first platform portion is pivotal relative to the base via pivotal movement of the first connector;

wherein the second platform portion is pivotal relative to the column portion via pivotal movement of the base; and

wherein pivotal movement of the first platform portion relative to the base and pivotal movement of the second platform portion relative to the column portion serve to separately articulate the first platform portion and the second platform portion relative to one another.

11. The surgical platform system of claim 10, further comprising a first actuator extending between the horizontally-oriented portion and the first connector, the first actuator being actuatable to expand and contract to pivot the base and the second platform portion relative to the column portion.

12. The surgical platform system of claim 10, wherein the second ends of the first support portion and the second support portion are pivotally attached to the second end of the first connector.

13. The surgical platform system of claim 12, further comprising a first actuator extending between the horizontally-oriented portion and a second connector attached between the first support portion and the second support portion, the first actuator being actuatable to expand and contract to pivot the first support portion and the second support portion relative to the first connector.

14. The surgical platform system of claim 13, further comprising a second actuator extending between the second end of the first connector and a third connector attached between portions of the base, the second actuator being actuatable to expand and contract to pivot the first connector relative to the base.

15. The surgical platform system of claim 10, further comprising a first actuator extending between the horizontally-oriented portion and the first connector, a second actuator extending between the horizontally-oriented portion and a second connector attached between the first support portion and the second support portion, and a third actuator extending between the second end of the first connector and a third connector attached between portions of the base, the first actuator being actuatable to expand and

17

contract to pivot the base and the second platform portion relative to the column portion, the second actuator being actuatable to expand and contract to pivot the first support portion and the second support portion relative to the first connector; and the third actuator being actuatable to expand and contract to pivot the first connector relative to the base.

16. The surgical platform system of claim 15 in combination with a robotic system, further comprising:

the robotic system including a gantry having a platform manipulator and an engagement portion supported by the platform manipulator; and

the first platform portion including a first end and an opposite second end, the first end of the first platform portion including a complimentary engagement portion for engaging the engagement portion of the gantry, and the second end of the first platform portion being attached to the first ends of the first support portion and the second support portion;

wherein, when the engagement portion and the complimentary engagement portion are engaged to one another, the surgical platform system is interconnected with the gantry, and the first actuator, the second actuator, the third actuator, and the platform manipulator can be actuated to position/orient the patient supported by the first platform portion and the second platform portion relative to the robotic system.

17. The combination of the surgical platform system and the robotic system of claim 16, wherein the second end of the first platform portion is pivotally attached to the first ends of the first support portion and the second support portion, and wherein the first actuator, the second actuator, the third actuator, and the platform manipulator can be actuated to pivot the first platform portion and the second platform portion relative to one another.

18. The surgical platform system of claim 10, wherein vertically-oriented portion includes a column portion, and the column portion is telescopically expandable and contractable between a contracted first position and an expanded second position to raise and lower the first platform portion, the second platform portion, and the linkage portion relative to the horizontally-oriented portion.

19. A surgical platform system facilitating manipulation of a patient supported thereby, the surgical platform system comprising:

a support supporting a linkage portion, a first support platform, and a second support platform relative to the ground,

the linkage portion including a base pivotally attached to the support, a first connector supported by the base, and

18

a first support portion and a second support portion supported at least in part by the first connector, the second platform portion being supported by the base, the first connector having a first end and an opposite second end, the first end of the first connector being pivotally attached relative to the base, and

the first support portion and the second support portion each including a first end and an opposite second end, the first support portion and the second support portion being attached adjacent the second ends thereof to the second end of the first connector, and the first platform portion being supported by the linkage portion adjacent the first ends of the first support portion and the second support portion;

the first platform portion including first patient support portions for supporting portions of the patient's head and upper torso; and

the second platform portion including second patient support portions for supporting portions of the patient's legs;

wherein the first platform portion is pivotal relative to the base via pivotal movement of the first connector;

wherein the second platform portion is pivotal relative to the support via pivotal movement of the base; and

wherein pivotal movement of the first platform portion relative to the base and pivotal movement of the second platform portion relative to the support serve to separately articulate the first platform portion and the second platform portion relative to one another.

20. The surgical platform system of claim 19 in combination with a robotic system, further comprising:

the robotic system including a gantry having a platform manipulator and an engagement portion supported by the platform manipulator; and

the first platform portion including a first end and an opposite second end, the first end of the first platform portion including a complimentary engagement portion for engaging the engagement portion of the gantry, and the second end of the first platform portion being attached to the first ends of the first support portion and the second support portion;

wherein, when the engagement portion and the complimentary engagement portion are engaged to one another, the surgical platform system is interconnected with the gantry, and the first platform portion and the second platform portion are manipulatable relative to one another to position/orient the patient supported by the first platform portion and the second platform portion relative to the robotic system.

* * * * *